




(86) **Date de dépôt PCT/PCT Filing Date:** 2009/06/02
(87) **Date publication PCT/PCT Publication Date:** 2009/12/17
(45) **Date de délivrance/Issue Date:** 2016/12/20
(85) **Entrée phase nationale/National Entry:** 2010/11/12
(86) **N° demande PCT/PCT Application No.:** US 2009/045900
(87) **N° publication PCT/PCT Publication No.:** 2009/151995
(30) **Priorités/Priorities:** 2008/06/11 (US61/131,664);
2008/08/14 (US12/228,597)


(51) **Cl.Int./Int.Cl.** **B62D 5/04** (2006.01)
(72) **Inventeurs/Inventors:**
RIPLEY, RICHARD D., US;
NAULT, ERIC P., US;
TAYLOR, SCOTT D., US
(73) **Propriétaire/Owner:**
POLARIS INDUSTRIES INC., US
(74) **Agent:** SIM & MCBURNEY

(54) **Titre : SERVODIRECTION POUR VEHICULE TOUT-TERRAIN**
(54) **Title: POWER STEERING FOR AN ALL TERRAIN VEHICLE**

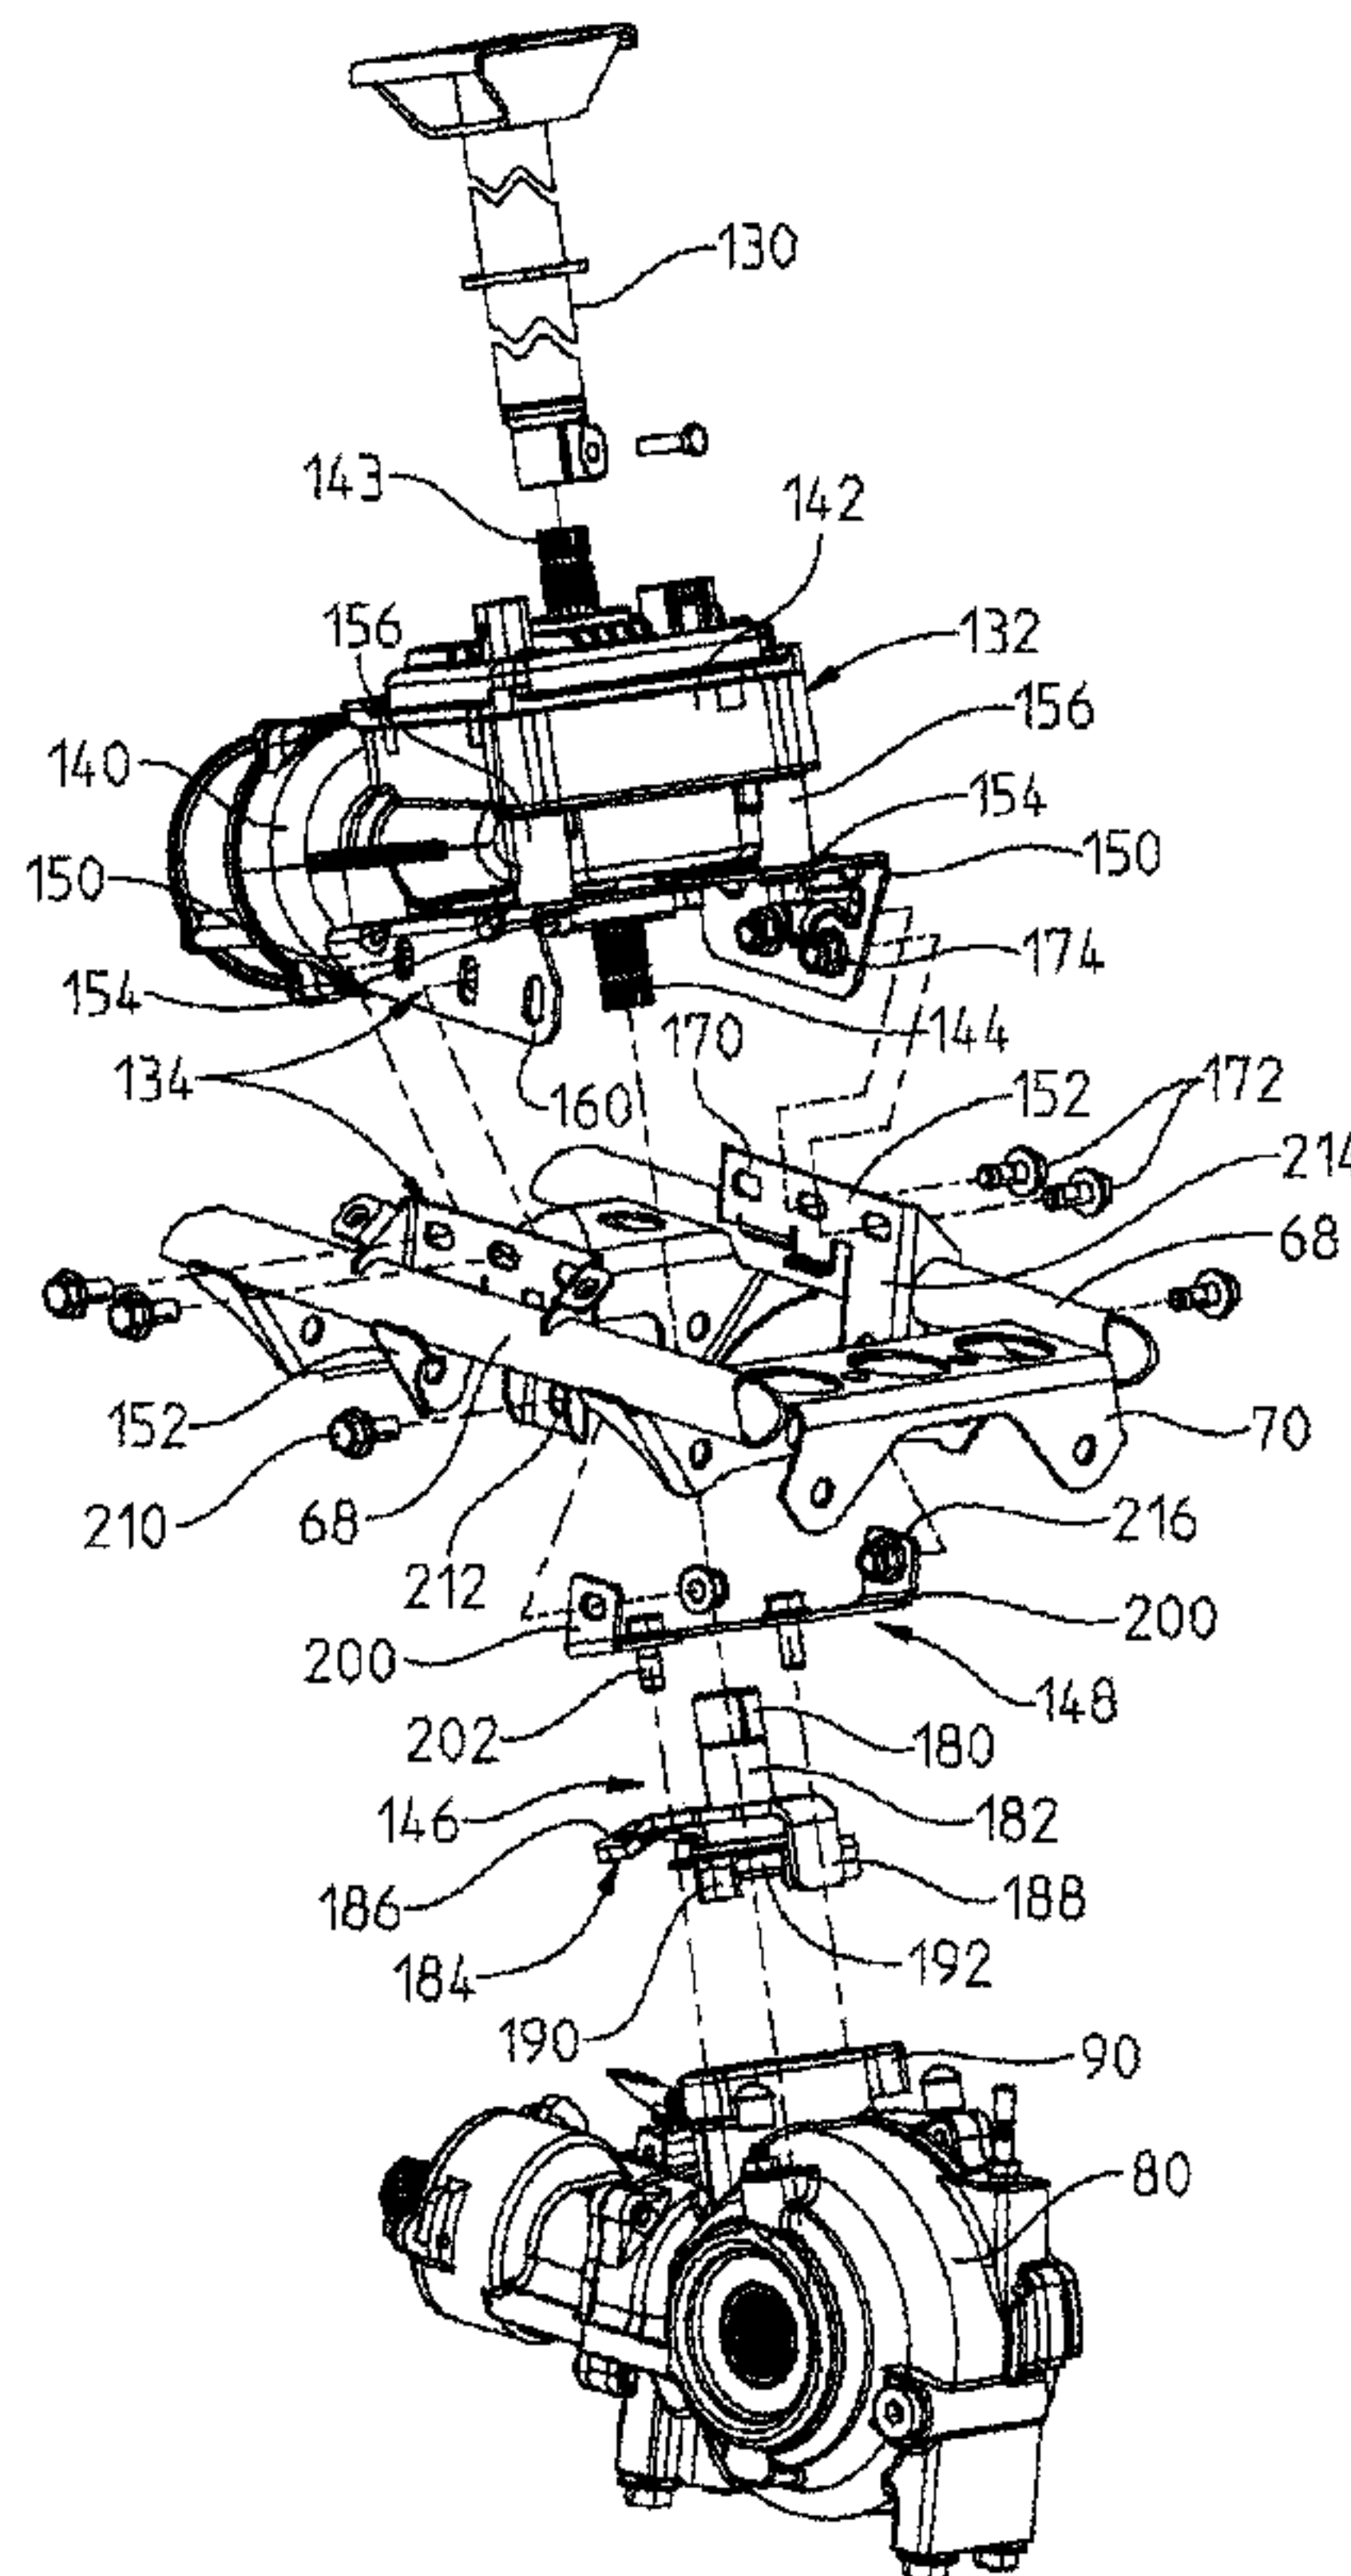

(57) **Abrégé/Abstract:**

An all-terrain vehicle (10) including a frame (50) having longitudinally- spaced ends (52, 56) defining a first longitudinal axis (51), and a power steering unit (132) supported by the frame. The power steering unit has an output shaft (144) which is held at its free end in an aperture (92), and rotates within a bearing (192).

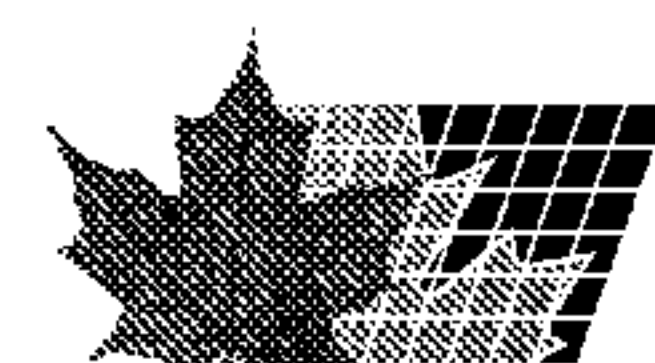

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 December 2009 (17.12.2009)

(10) International Publication Number
WO 2009/151995 A1

(51) International Patent Classification:
B62D 5/04 (2006.01)

(21) International Application Number:
PCT/US2009/045900

(22) International Filing Date:
2 June 2009 (02.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/131,664 11 June 2008 (11.06.2008) US
12/228,597 14 August 2008 (14.08.2008) US

(71) Applicant (for all designated States except US): **PO-LARIS INDUSTRIES INC.** [US/US]; 2100 Highway 55, Medina, MN 55340 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RIPLEY, Richard, D.** [US/US]; 47925 Forest Boulevard, Rush City, MN 55069 (US). **NAULT, Eric, P.** [US/US]; 420 Garfield Street, Dresser, WI 54009 (US). **TAYLOR, Scott, D.** [CA/US]; 10923 Nassau Circle Ne, Blaine, MN 55449 (US).

(74) Agents: **GROEN, Eric, J.** et al.; Baker & Daniels Llp, 300 N. Meridian Street, Suite 2700, Indianapolis, IN 46204 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: POWER STEERING FOR AN ALL TERRAIN VEHICLE

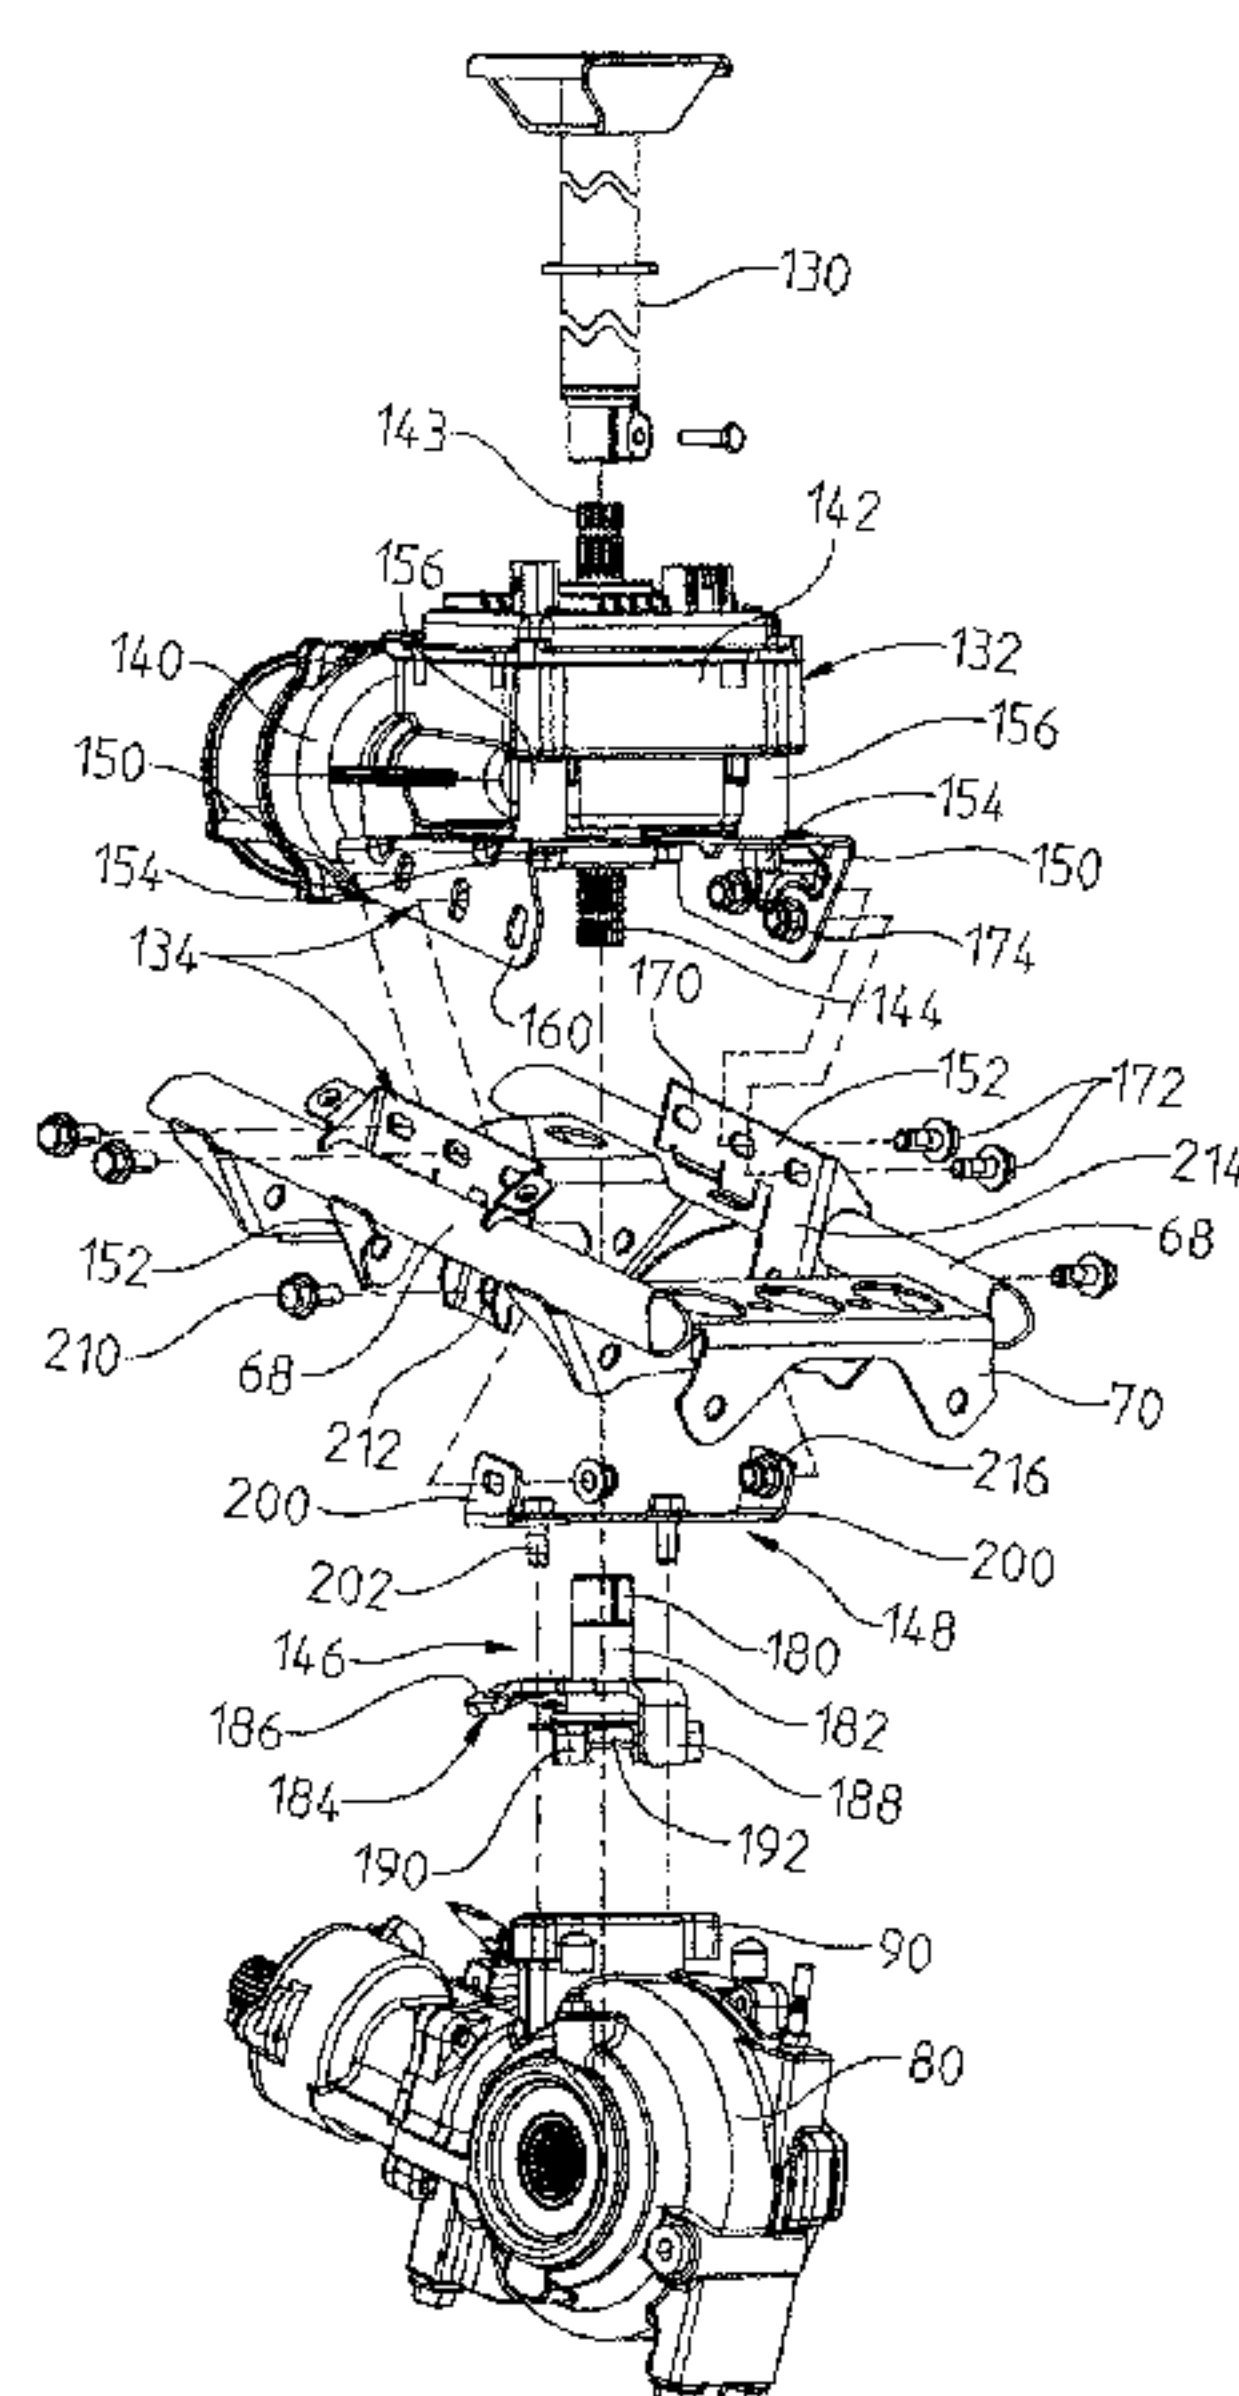


FIG. 13

(57) Abstract: An all-terrain vehicle (10) including a frame (50) having longitudinally- spaced ends (52, 56) defining a first longitudinal axis (51), and a power steering unit (132) supported by the frame. The power steering unit has an output shaft (144) which is held at its free end in an aperture (92), and rotates within a bearing (192).

POWER STEERING FOR AN ALL TERRAIN VEHICLE

BACKGROUND OF THE INVENTION

[0001] The present disclosure relates to all-terrain vehicle (ATVs) having a power steering assembly. Specifically, the present disclosure relates to ATVs having a power steering assembly operatively connected to the steering shaft of the vehicle.

[0002] Generally, all terrain vehicles ("ATVs") and utility vehicles ("UVs") are used to carry one or two passengers and a small amount of cargo over a variety of terrains. Due to increasing recreational interest in ATVs, it is desirable to provide the ATVs with power steering or a power assist steering. Some versions of the steering already exist; see for example U.S. Patents 6,966,399 and 7,077,233; and U.S. Patent Application Publication No. 2006/0212200.

[0003] U.S. Patent 6,966,399 discloses a frame including longitudinally spaced-apart ends defining a first longitudinal axis, the frame comprising a frame front end portion, a plurality of wheels operably coupled to the frame, a steering linkage operatively coupled between an operator input steering portion and at least one of the plurality of wheels, a power steering assembly operatively coupled to the steering linkage, the power steering assembly comprising an electric motor and a gear box, the gear box comprising an input shaft and an output shaft, the input shaft being operatively coupled to the operator input steering portion, and the output shaft being operatively coupled to a steering linkage.

[0004] The above mentioned and other features of this invention, and the manner of attaining them, will become more apparent and the invention itself will be better understood by reference to the following description of embodiments of the invention taken in conjunction with the accompanying drawings.

- 2 -

[0005] In one embodiment, an all-terrain vehicle comprises a frame including longitudinally spaced-apart ends defining a first longitudinal axis, the frame comprising a frame front end portion; a plurality of wheels operably coupled to the frame; a steering linkage operatively coupled between an operator input steering portion and at least of the plurality of wheels; and a power steering assembly operatively coupled to the steering linkage. The power steering assembly comprises an electric motor and a gear box, the gear box comprising an input shaft and an output shaft, the input shaft being operatively coupled to the operator input steering portion and the output shaft being operatively coupled to the steering linkage. The output shaft is supported both vertically and laterally by a support assembly.

[0006] In another embodiment, an all-terrain vehicle comprises a frame comprising longitudinally spaced-apart ends defining a first longitudinal axis, the frame comprising a frame front end portion; a plurality of wheels operably coupled to the frame; a steering linkage operatively coupled between an operator input steering portion and at least of the plurality of wheels; a power steering assembly operatively coupled to the steering linkage, the power steering assembly comprising an electric motor and a gear box, the gear box comprising an input shaft and an output shaft, the input shaft being operatively coupled to the operator input steering portion, and the output shaft being operatively coupled to the steering linkage, and having a bearing adjacent its free end. A bearing support flange is attached to the frame and supports the output shaft bearing.

[0006a] In another embodiment, a four wheel all-terrain vehicle comprises: a frame defining a first longitudinal axis and including longitudinally spaced-apart ends; a plurality of wheels operably coupled to the frame; a front differential having a housing and operably coupled to a front portion of the plurality of wheels; and a rear differential having a housing and operably coupled to a rear portion of the plurality of wheels, the frame comprising a frame front end portion, a steering linkage operatively coupled between an operator input steering portion and at least one of the plurality of wheels, and a power steering assembly operatively coupled to the steering linkage, the power steering assembly comprising an electric motor and a gear box, the gear box comprising an input shaft and an output shaft, the input shaft being operatively coupled to the operator input steering portion, and the output shaft being operatively coupled to the steering linkage, wherein the output shaft is supported both vertically and laterally at its

- 2a -

free end by a support assembly, the free end of the output shaft comprises a bearing and the bearing is fixed within an aperture integrated within the housing of the front differential, the output shaft is configured to rotate relative to the bearing, the steering linkage is positioned intermediate the output shaft and the support assembly, and a lower portion of the output shaft is received within the steering linkage.

[0006b] In another embodiment, an all-terrain vehicle comprises: a frame defining a first longitudinal axis and including longitudinally spaced-apart ends, the frame comprising: a frame front end portion; a plurality of wheels operably coupled to the frame; a steering linkage operatively coupled between an operator input steering portion and at least one of the plurality of wheels; and a power steering assembly operatively coupled to the steering linkage, the power steering assembly comprising an electric motor and a gear box, the gear box comprising an input shaft and an output shaft, the input shaft being operatively coupled to the operator input steering portion, and the output shaft being operatively coupled to the steering linkage, the output shaft being supported at its free end, the free end of the output shaft being adjacent a bearing and a bearing support flange being attached to the frame and supporting the output shaft bearing, wherein the all-terrain vehicle is a four wheel drive vehicle and further comprises front and rear differentials, and wherein the bearing support flange is provided on the front differential.

[0007] The subject invention will now be described by way of the following drawings, where:

[0008] Fig. 1 is a perspective view of an ATV in accordance with illustrative embodiments of the present invention.

[0009] Fig. 2 is a left side view of the ATV shown in Fig. 1.

[0010] Fig. 3 is a right side view of the ATV shown in Fig. 1.

- 3 -

- [0011] Fig. 4 is a top plan view of the ATV shown in Fig. 1.
- [0012] Fig. 5 is a bottom plan view of the ATV shown in Fig. 1.
- [0013] Fig. 6 is a side view of the frame of the ATV shown in Fig. 1.
- [0014] Fig. 7 is another perspective view of the frame of the ATV shown in Fig. 1.
- [0015] Fig. 8 is a right side view of an engine and transmission that may be used in an ATV such as the one shown in Fig. 1.
- [0016] Fig. 9 is a top view of an engine and transmission of Fig. 8.
- [0017] Fig. 10 is a left-hand side perspective view of the suspension assembly, without the power steering assembly in place.
- [0018] Fig. 11 is a right-hand side perspective view of the power steering assembly which may be incorporated into the frame of Fig. 10.
- [0019] Fig. 12 is a front perspective view of the power steering assembly of Fig. 11.
- [0020] Fig. 13 is a partially exploded front perspective view of the power steering assembly of Figs. 11 and 12.
- [0021] Corresponding reference characters indicate corresponding parts throughout the several views. Although the drawings represent embodiments of the present invention, the drawings are not necessarily to scale and certain features may be exaggerated in order to better illustrate and explain the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

- [0022] The embodiments disclosed below are not intended to be exhaustive or to limit the invention to the precise forms disclosed in the following detailed description. Rather, the embodiments are chosen and described so that others skilled in the art may utilize their teachings. For example, while the following description refers primarily to an

- 4 -

all terrain vehicle, it should be understood that the invention may have application to other types of vehicles, such as snowmobiles, motorcycles, watercraft, utility vehicles, scooters, golf carts, and mopeds.

[0023] Referring initially to Figs. 1-4, one illustrative embodiment of an all terrain vehicle (ATV) 10 is shown. ATV 10 includes front end 11 supported by front wheels 12 and tires 14, and rear end 13 is supported by rear wheels 16 and tires 18. ATV 10 further includes a straddle-type seat 20, rear panel 22 which may include a tool storage compartment or rear rack, front panel 24 which may include a tool storage compartment or front rack and handlebar assembly 26. Front end 11 and rear end 13 are separated by footwells 28 on both lateral sides of ATV 10 and separated by seat 20. Front end 11 is also supported by front suspension 30. Handlebar assembly 26 is operably coupled to front wheels 12 to allow a rider to steer ATV 10 when supported by seat 20 and/or footwells 28. Front panel 24 and rear panel 22 may also include an accessory coupling system such as the one disclosed in U.S. Patent No. 7,055,454.

[0024] Referring now to Figs. 5-7, ATV 10 includes frame 50 defining a longitudinal axis 51 (Figs. 5 and 6) and which includes front portion 52, middle portion 54, and rear portion 56. As shown in Fig. 6, front portion 52 and rear portion 52 of frame 50 are angled upwardly to provide additional ground clearance to front end 11 and rear end 13 of ATV 10. As shown in Figs. 6 and 7, front portion 52 includes lower frame tubes 60 having brackets 62 for mounting the front differential thereto. Front portion 52 further includes two pair of upstanding tube pairs 64 and 66, connector tubes 68, having cross brackets 70 mounted between cross tubes 68.

[0025] Figs. 8 and 9 are an illustrative side and top views of engine 72 and transmission 74 of ATV 10, respectively. Engine 72 is positioned adjacent front end 11 of ATV 10. Transmission 74 is illustratively coupled directly to engine 72 in the manner detailed herein. Transmission 74 provides power to front differential 80

- 5 -

through front transmission shaft 81 and to rear differential 78 through rear transmission shaft 83. Front differential 80 powers front axle 84, whereas rear differential 78 powers rear axle 86. As best shown in Fig. 9, differential 80 includes a mounting flange 90 having an internal bore 92 and mounting holes 94, which will be described in greater detail herein.

[0026] Referring now to Fig. 10, front end 11 and front suspension 30 of ATV 10 are shown. Front suspension 30 includes upper and lower control arms, illustratively A-arms 100 and 102, on each side of ATV 10. Upper A-arms 100 are coupled on one end at upper inner pivot couplings 104 to bracket portion 106 of bracket 70. Lower A arms 102 are coupled on one end at lower inner pivot couplings 110 to brackets 62 of front portion 52 of frame 50. Upper A arms 100 also include brackets 120 which are coupled to shock absorbers 122. Shock absorbers 122 dampen the upward and downward travel of frame 50 relative to wheels 12, to provide a comfortable ride to the rider of ATV 10.

[0027] Front axles or half shafts 84 extend from front differential 80 to drive the front wheels of ATV 10. Each half shaft 84 is operably coupled to a wheel 12. In this illustrative embodiment, ATV 10 is four-wheel drive. As such, front axles 84 are rotated by front differential 80 to power front wheels 12, and rear axles 86 are rotated by rear differential 78 to power rear wheels 16.

[0028] Front suspension 30 and rear suspension 210 may include certain elements of the Predator™ brand ATV and the Outlaw™ brand ATV, both available from Polaris Industries, the assignee of the present disclosure. Details of the Predator™ brand ATV suspension are disclosed in U.S. Patent No. 6,767,022, U.S. Patent No. 7,000,931, and U.S. Patent No. 7,004,484. Details of the Outlaw™ brand ATV suspension are disclosed in U.S. Patent Application Serial No. 11/528,889, filed September 27, 2006, and U.S. Patent Application Serial No. 11/543,430, filed October 5 2006, both of which claim the benefit of U.S. Serial No. 60/813,597, filed February 1, 2006.

[0029] With respect now to Figs. 11-13, the power steering assembly 26 will be described in greater detail. Steering assembly 26 is comprised of an upper steering shaft 130 attached to a power steering unit 132. Power steering unit 132 is attached by way of a bracket assembly 134 to connecting tubes 68. Brackets could be connected by any known means, but it is anticipated that brackets 134 are welded to tubes 68 at joints 136 (Fig. 12). As shown best in Fig. 13, power steering assembly 132 is comprised of an electric motor 140 and a gear box 142 where steering shaft 130 is splined to an upper spline 143 and a lower spline 144 of gear box 142 is connected to a lower steering linkage assembly 146. Lower steering linkage 146 is attached to bracket assembly 134 by way of a further interconnecting bracket 148.

[0030] With more particularity, and with reference to Figs. 12 and 13, bracket assembly 134 is comprised of upper bracket portions 150 and lower bracket portions 152. Upper bracket portions 150 are attached to gear box 142 by way of fasteners 154 which extend through threaded bosses 156 on gear box 142. Each upper bracket portion 150 includes a plate portion 160 for mounting adjacent to lower bracket portions 152. Meanwhile lower bracket portions 152 include plate portions 170 which receive therethrough fasteners 172 which couple with fasteners 174. As should be appreciated, coupling fasteners 172 through plate portion 170 and plate portion 160 to fasteners 174 rigidly fixes gear box 142 and motor 140 to the frame tubes 68, just above tubes 68. This positions the power steering assembly generally above the tubes and the upper A-arms 100, with a portion extending below the A-arms 100.

[0031] With reference still to Figs. 12 and 13, lower steering linkage assembly 146 is also rigidified by way of attachment to both the front differential 80 and to frame tubes 68. With reference first to Fig. 13, lower steering linkage assembly 146 is comprised of an upper splined coupler 180 attached to a stub shaft 182. Stub

- 7 -

shaft 182 is rigidly fixed to rotatable coupler 184 which is comprised of Pitman arm 186 and a stop member 188 which rotates clockwise and counterclockwise between extreme positions. Assembly 146 also includes a bearing cap 190 which is profiled to be received over flange 90 of front differential 80. Bearing cap 190 is contoured with the shape of flange 90 (see Fig. 9 and 13) and bearing cap 190 is fixed relative to flange 90 during operation of the power steering unit as further described herein. The free end of stub shaft 182 is provided with a bearing 192 which rotates with stub shaft 182 and is profiled to be received within aperture 92 (see Fig. 9) at the top of the front differential 80 within a bearing sleeve (not shown).

[0032] Lower steering assembly 146 is also attached to the front differential 80 and to the lower brackets 170 of bracket assembly 134 by way of interconnecting bracket 148. Interconnecting bracket 148 includes L-shaped bracket members 200 with fasteners 202 extending through bearing cap 190 and into apertures 94 (Fig. 9) on the top front differential 80 as best shown in Figs. 12 and 13. Meanwhile fasteners 210 extend through an aperture 212 of lower arms 214 (which extend from lower brackets 170) which in turn correspond with fasteners 216. As mounted, power steering unit is held in the vertical sense and later sense by bearing 192 in aperture 92; and in a lateral sense by bracket assembly 148 attached to bracket assembly 134.

[0033] While multiple power steering units are possible, as defined herein, the unit is provided by Globe Industries, and preferably has an output torque greater than 50 N-M, and more preferably approximately 50 N-M.

[0034] The scope of the claims should not be limited by the preferred embodiments set forth above, but should be given the broadest interpretation consistent with the description as a whole.

- 8 -

What is claimed is:

1. A four wheel all-terrain vehicle comprising:
 - a frame defining a first longitudinal axis and including longitudinally spaced-apart ends;
 - a plurality of wheels operably coupled to the frame;
 - a front differential having a housing and operably coupled to a front portion of the plurality of wheels; and
 - a rear differential having a housing and operably coupled to a rear portion of the plurality of wheels,
 - the frame comprising a frame front end portion, a steering linkage operatively coupled between an operator input steering portion and at least one of the plurality of wheels, and a power steering assembly operatively coupled to the steering linkage, the power steering assembly comprising an electric motor and a gear box, the gear box comprising an input shaft and an output shaft, the input shaft being operatively coupled to the operator input steering portion, and the output shaft being operatively coupled to the steering linkage, wherein the output shaft is supported both vertically and laterally at its free end by a support assembly, the free end of the output shaft comprises a bearing and the bearing is fixed within an aperture integrated within the housing of the front differential, the output shaft is configured to rotate relative to the bearing, the steering linkage is positioned intermediate the output shaft and the support assembly, and a lower portion of the output shaft is received within the steering linkage.
2. The all-terrain vehicle of claim 1, wherein the aperture is located at the top of the front differential housing.
3. The all-terrain vehicle of claim 1 or 2, wherein the support assembly further comprises a bearing cap which at least partially surrounds the bearing, and is fixed to the top of the front differential housing.
4. The all-terrain vehicle of claim 3, wherein a Pitman arm is attached to the output shaft, above the bearing cap.
5. The all-terrain vehicle of claim 3 or 4, wherein the top of the front differential is provided with a flange, profiled to receive the bearing and the bearing cap.

- 9 -

6. The all-terrain vehicle of any one of claims 3 to 5, wherein the support assembly further comprises a first bracket assembly for attaching the power steering assembly to the frame.

7. The all-terrain vehicle of claim 6, wherein the support assembly further comprises a second bracket assembly attached to the bearing cap and to the first bracket assembly, laterally supporting the output shaft.

8. An all-terrain vehicle comprising:

a frame defining a first longitudinal axis and including longitudinally spaced-apart ends, the frame comprising:

a frame front end portion;

a plurality of wheels operably coupled to the frame;

a steering linkage operatively coupled between an operator input steering portion and at least one of the plurality of wheels; and

a power steering assembly operatively coupled to the steering linkage, the power steering assembly comprising an electric motor and a gear box, the gear box comprising an input shaft and an output shaft, the input shaft being operatively coupled to the operator input steering portion, and the output shaft being operatively coupled to the steering linkage, the output shaft being supported at its free end, the free end of the output shaft being adjacent a bearing and a bearing support flange being attached to the frame and supporting the output shaft bearing,


wherein the all-terrain vehicle is a four wheel drive vehicle and further comprises front and rear differentials, and wherein the bearing support flange is provided on the front differential.

9. The all-terrain vehicle of claim 8, wherein the bearing is attached to the free end of the output shaft, the bearing is held by the bearing support flange, and the output shaft rotates relative to the bearing.

10. The all-terrain vehicle of claim 9, wherein the bearing support flange comprises an aperture and the bearing and the output shaft are held fixed within the aperture.

- 10 -

11. The all-terrain vehicle of claim 10, wherein the aperture is located at the top of the front differential housing.
12. The all-terrain vehicle of claim 11, wherein the support assembly further comprises a bearing cap which at least partially surrounds the bearing, and is fixed to the bearing support flange.
13. The all-terrain vehicle of any one of claims 8 to 12, wherein the output shaft is supported both vertically and laterally.
14. The all-terrain vehicle of any one of claims 8 to 13, wherein the output torque on the output shaft is at least 50 Nm.
15. The all-terrain vehicle of any one of claims 8 to 13, wherein the output torque on the output shaft is approximately 60 Nm.

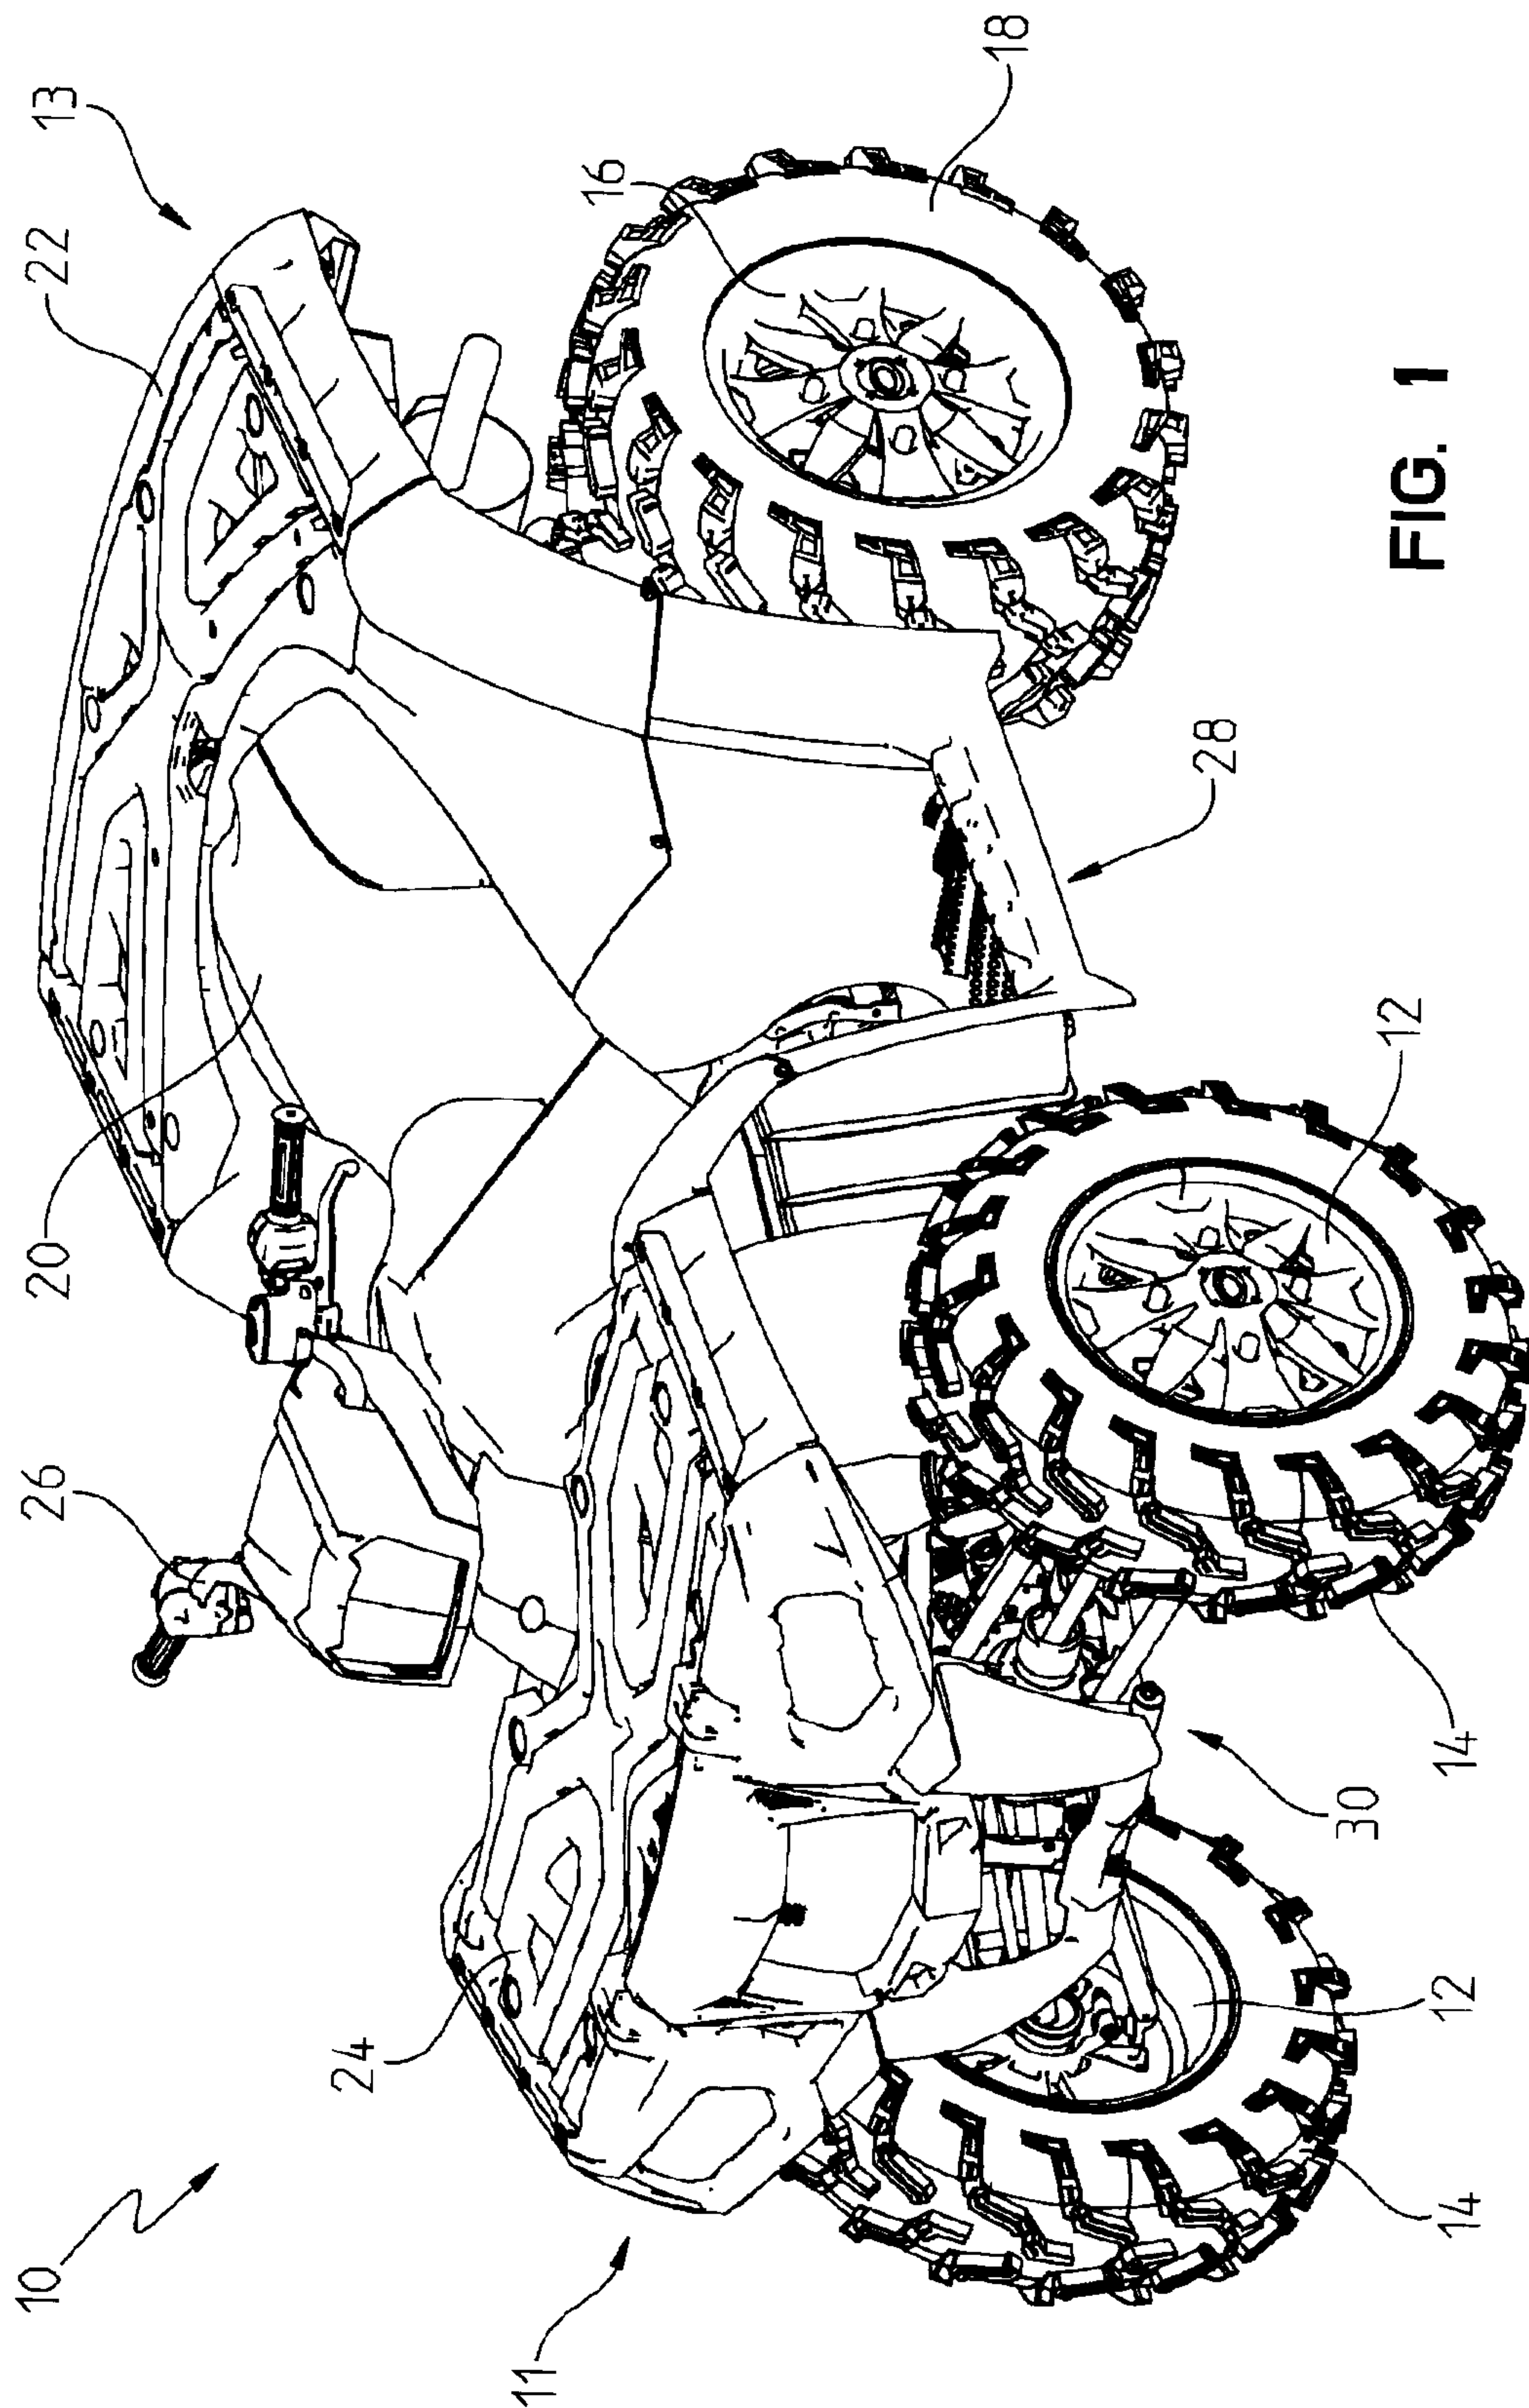**FIG. 1**

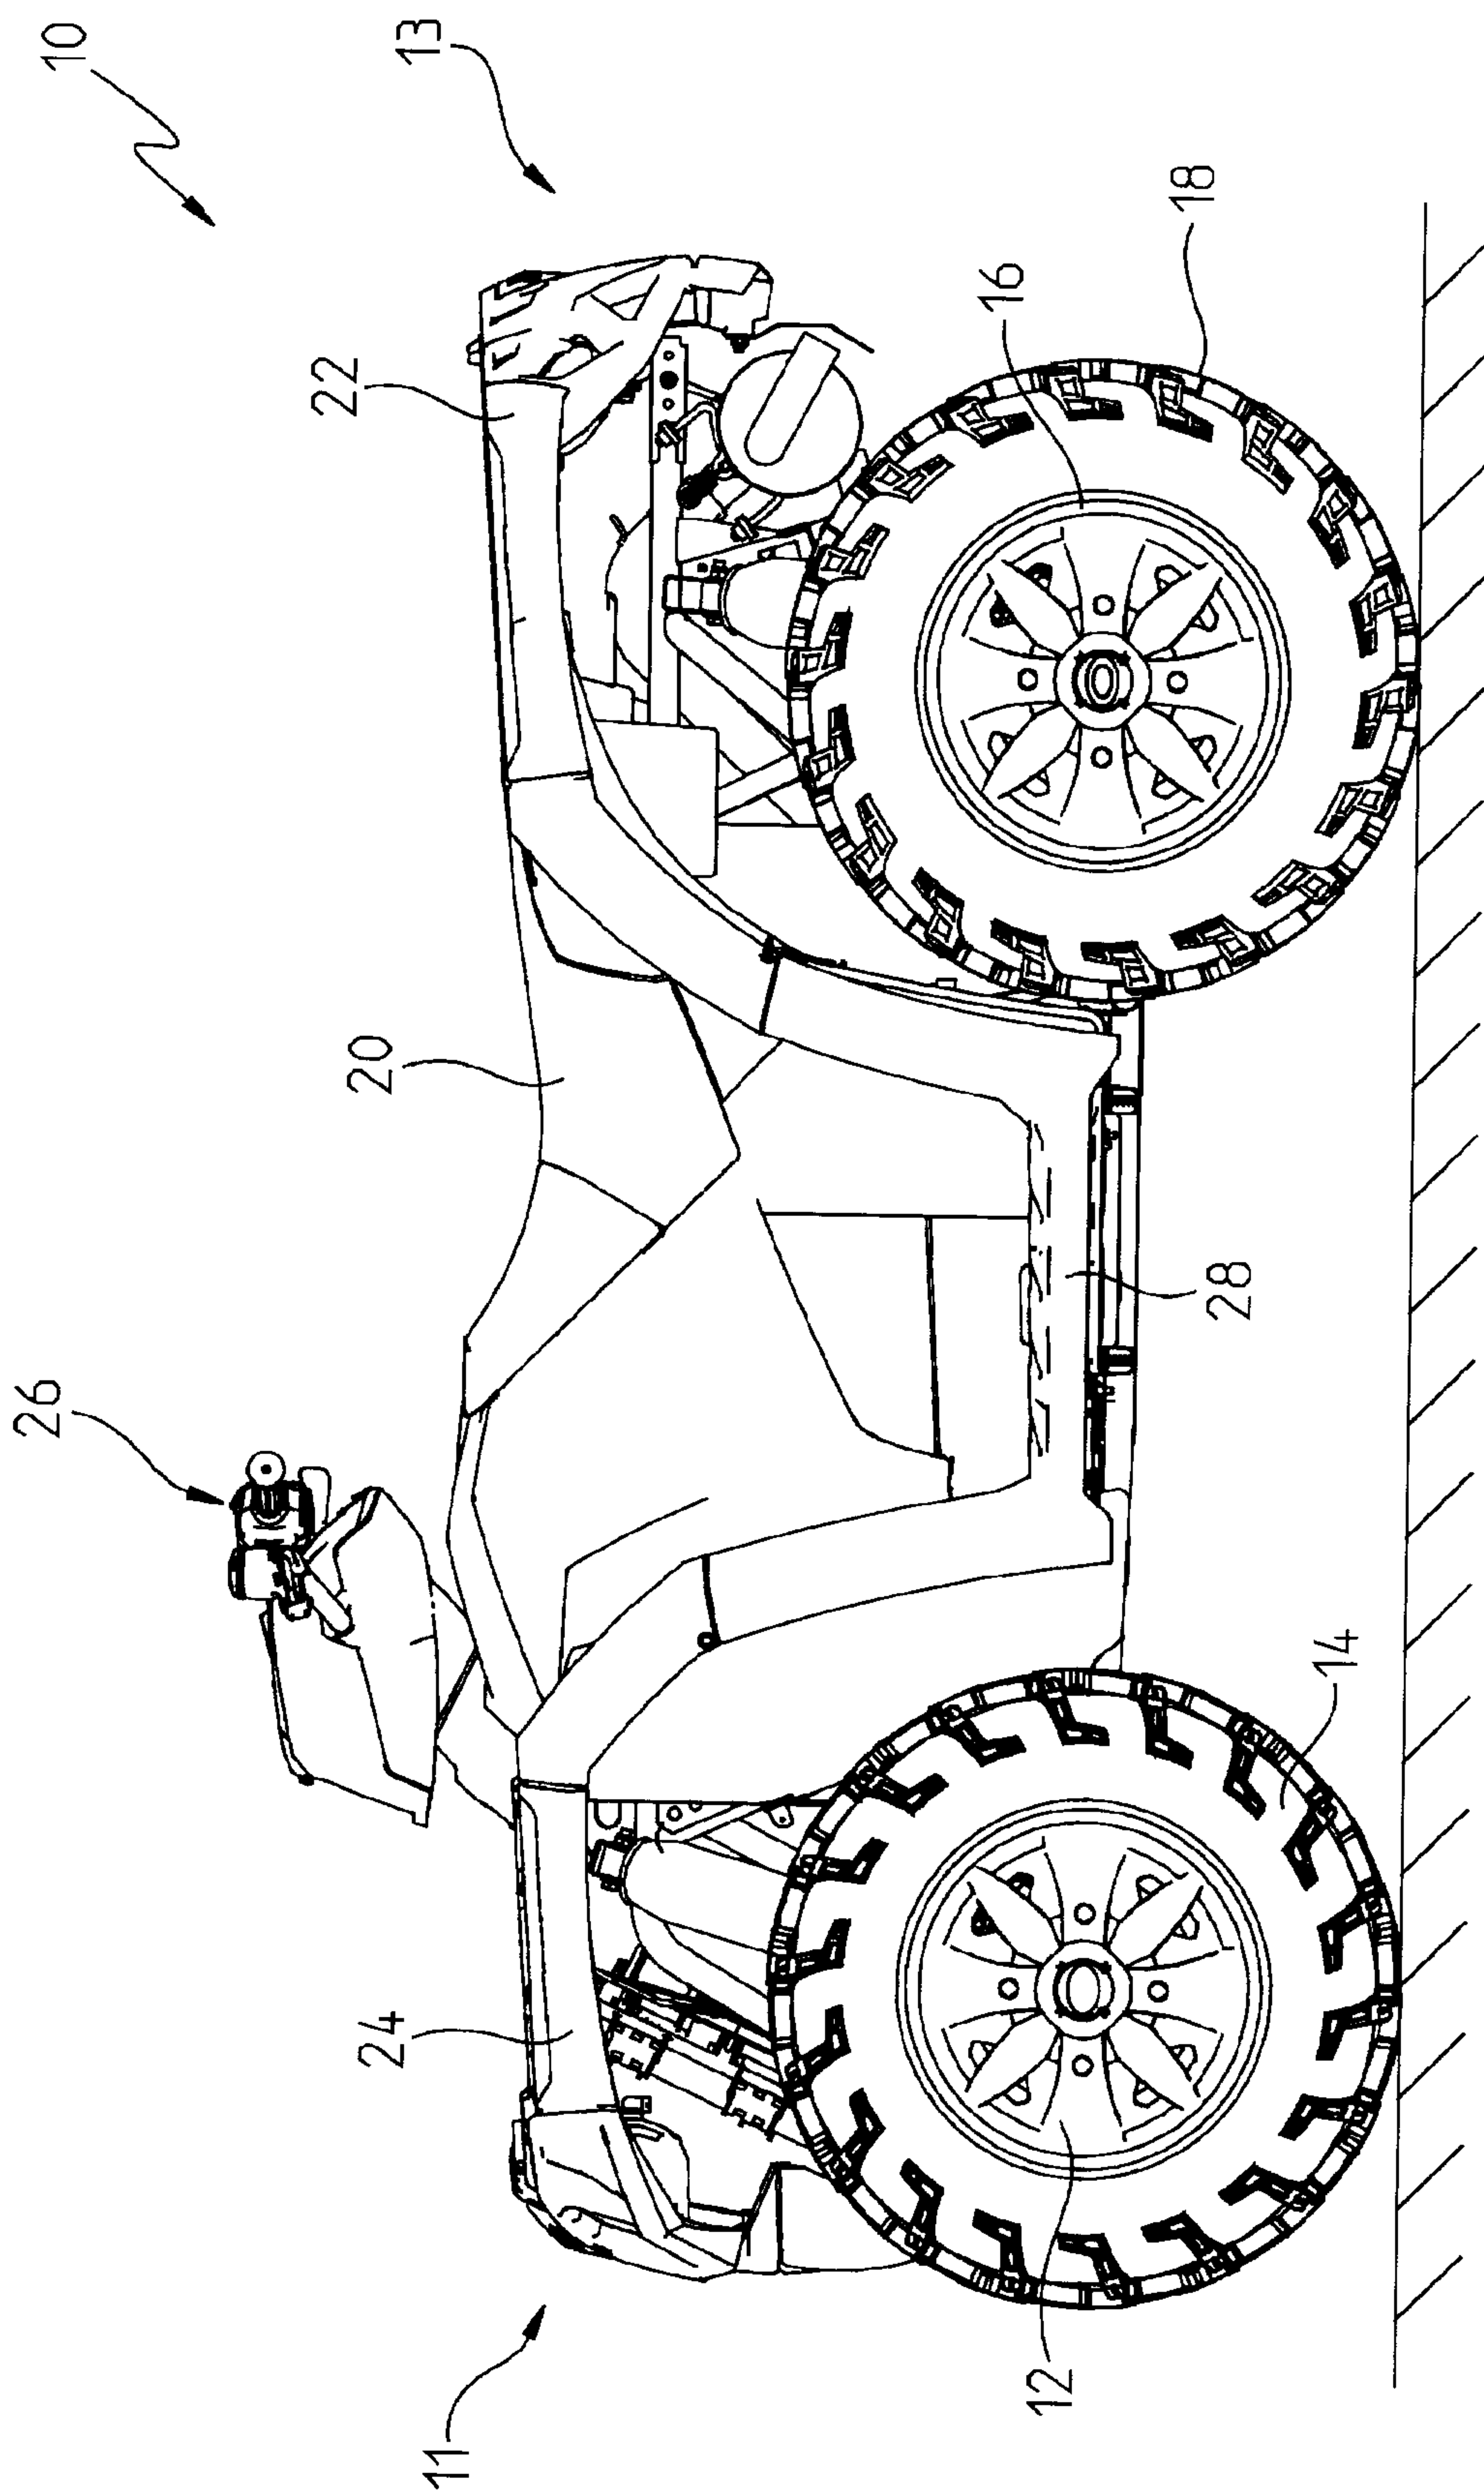


FIG. 2

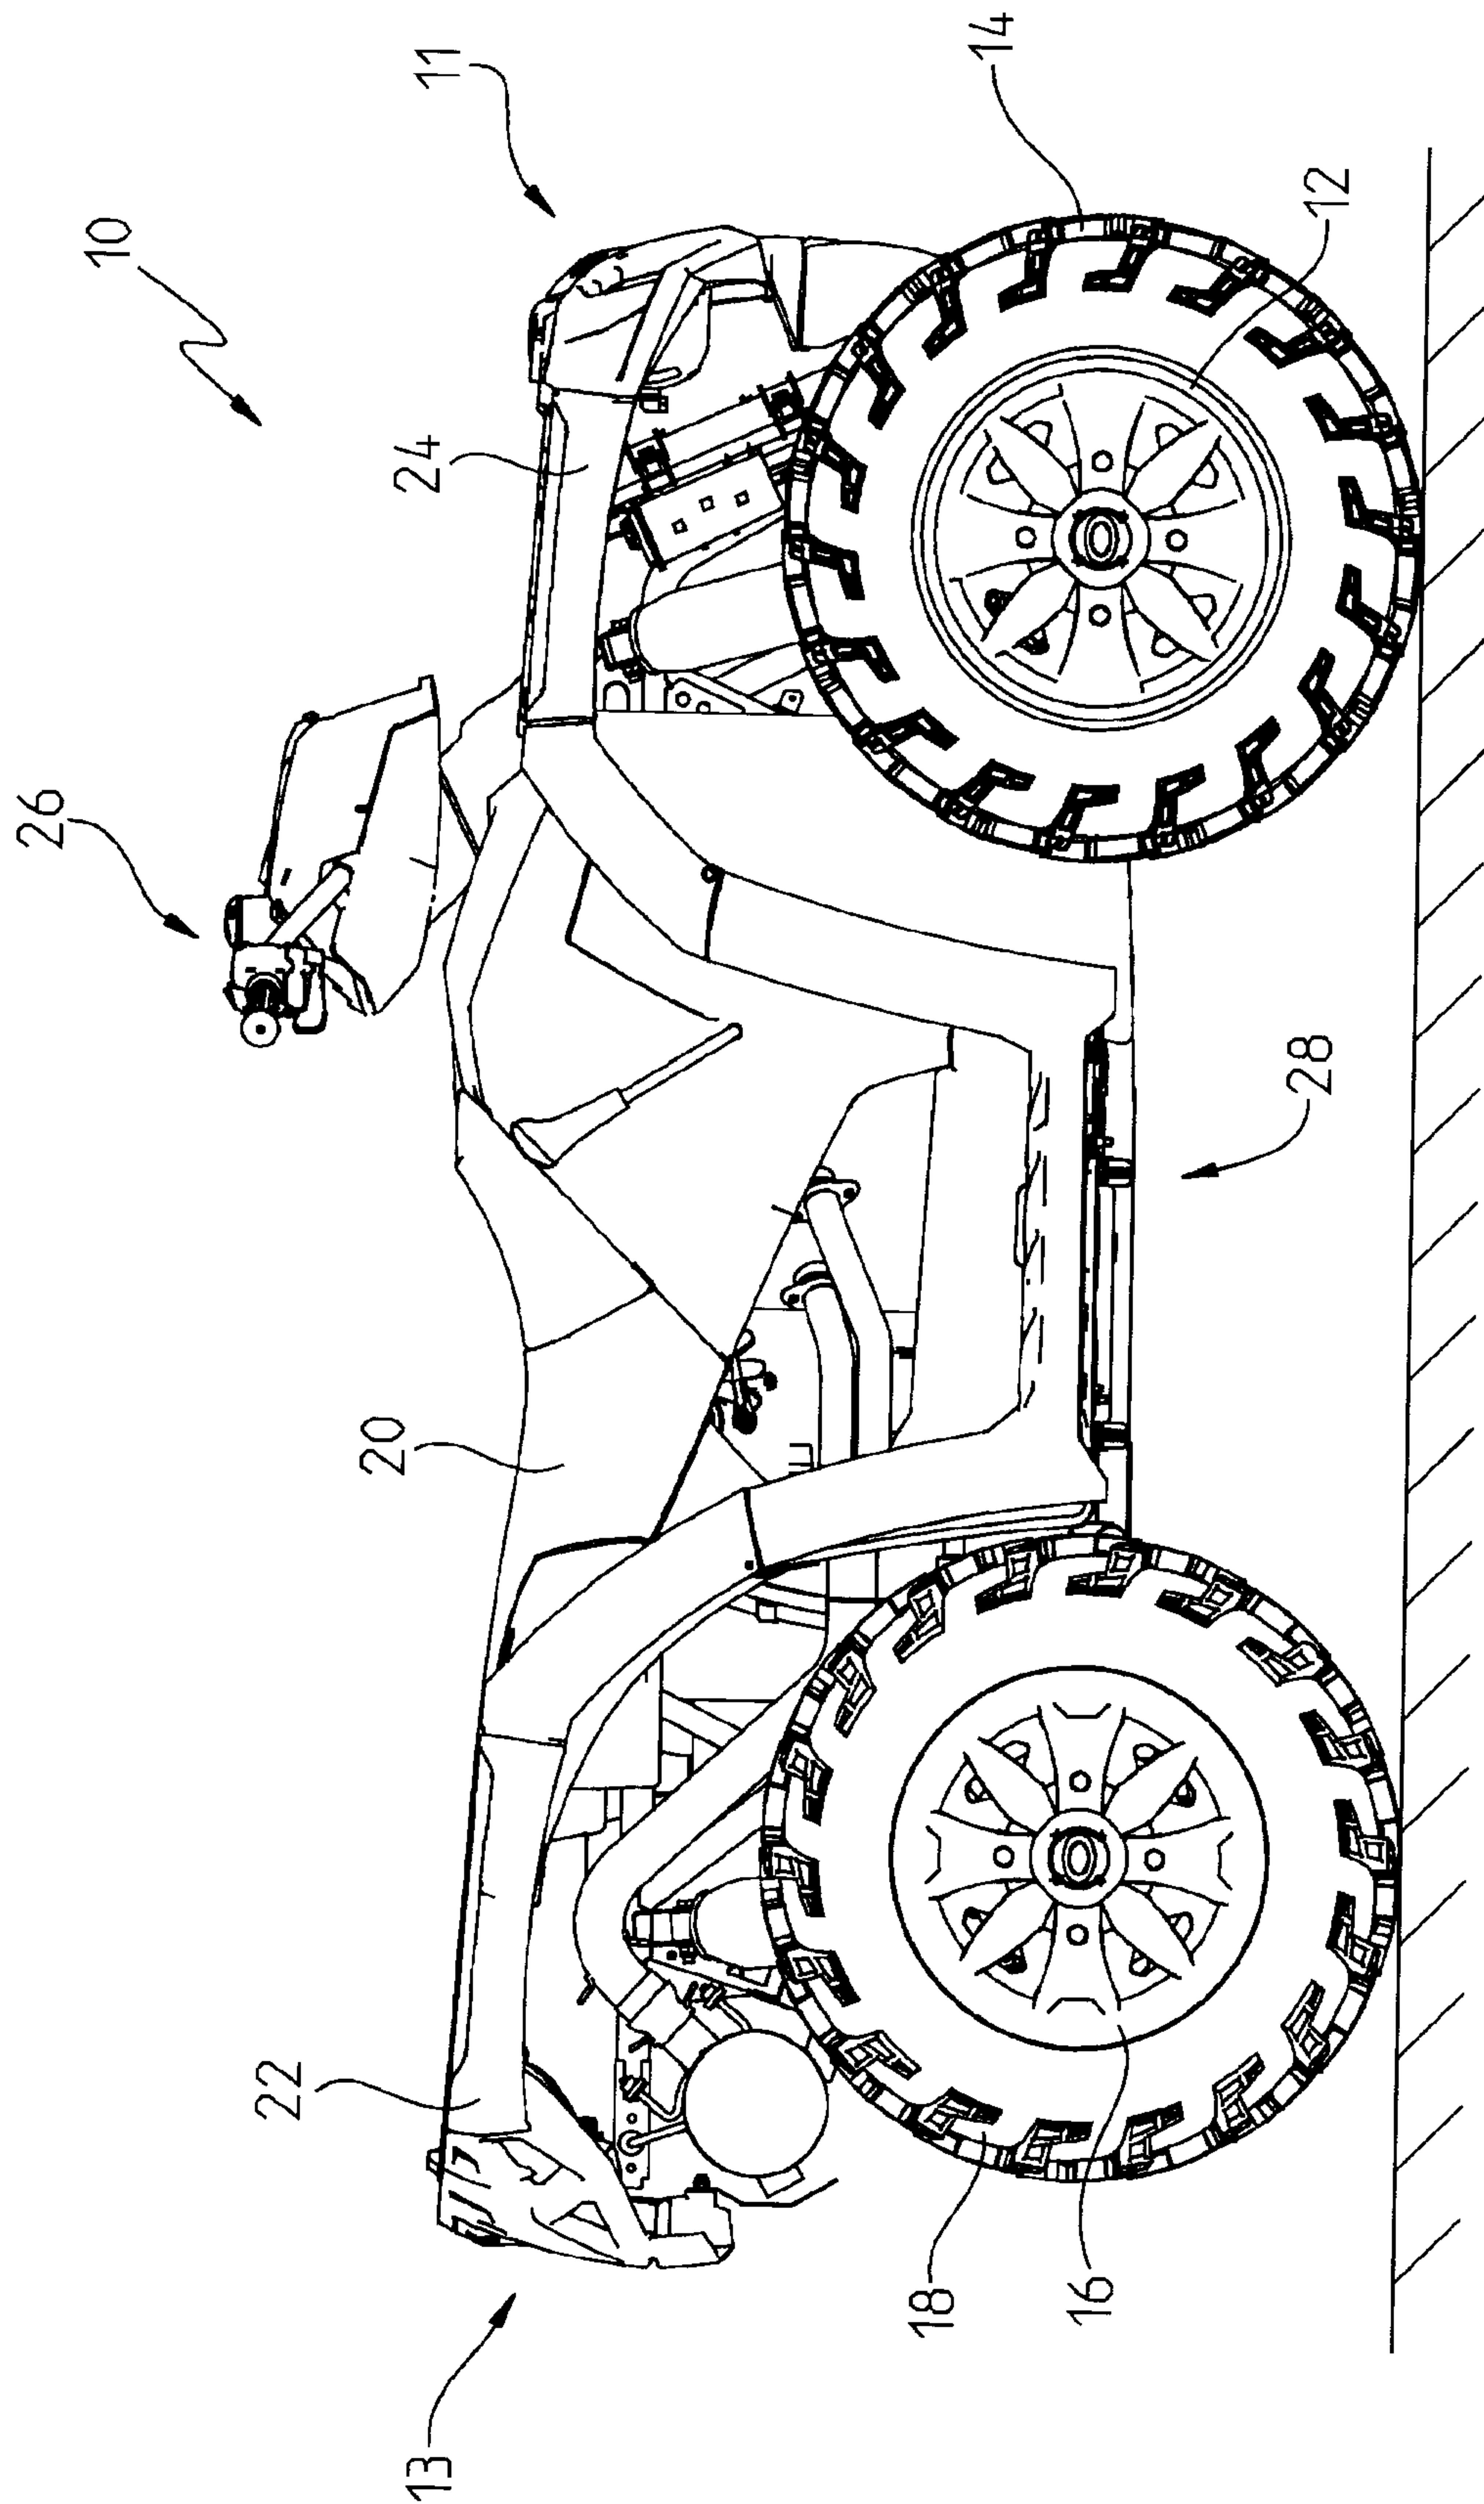


FIG. 3

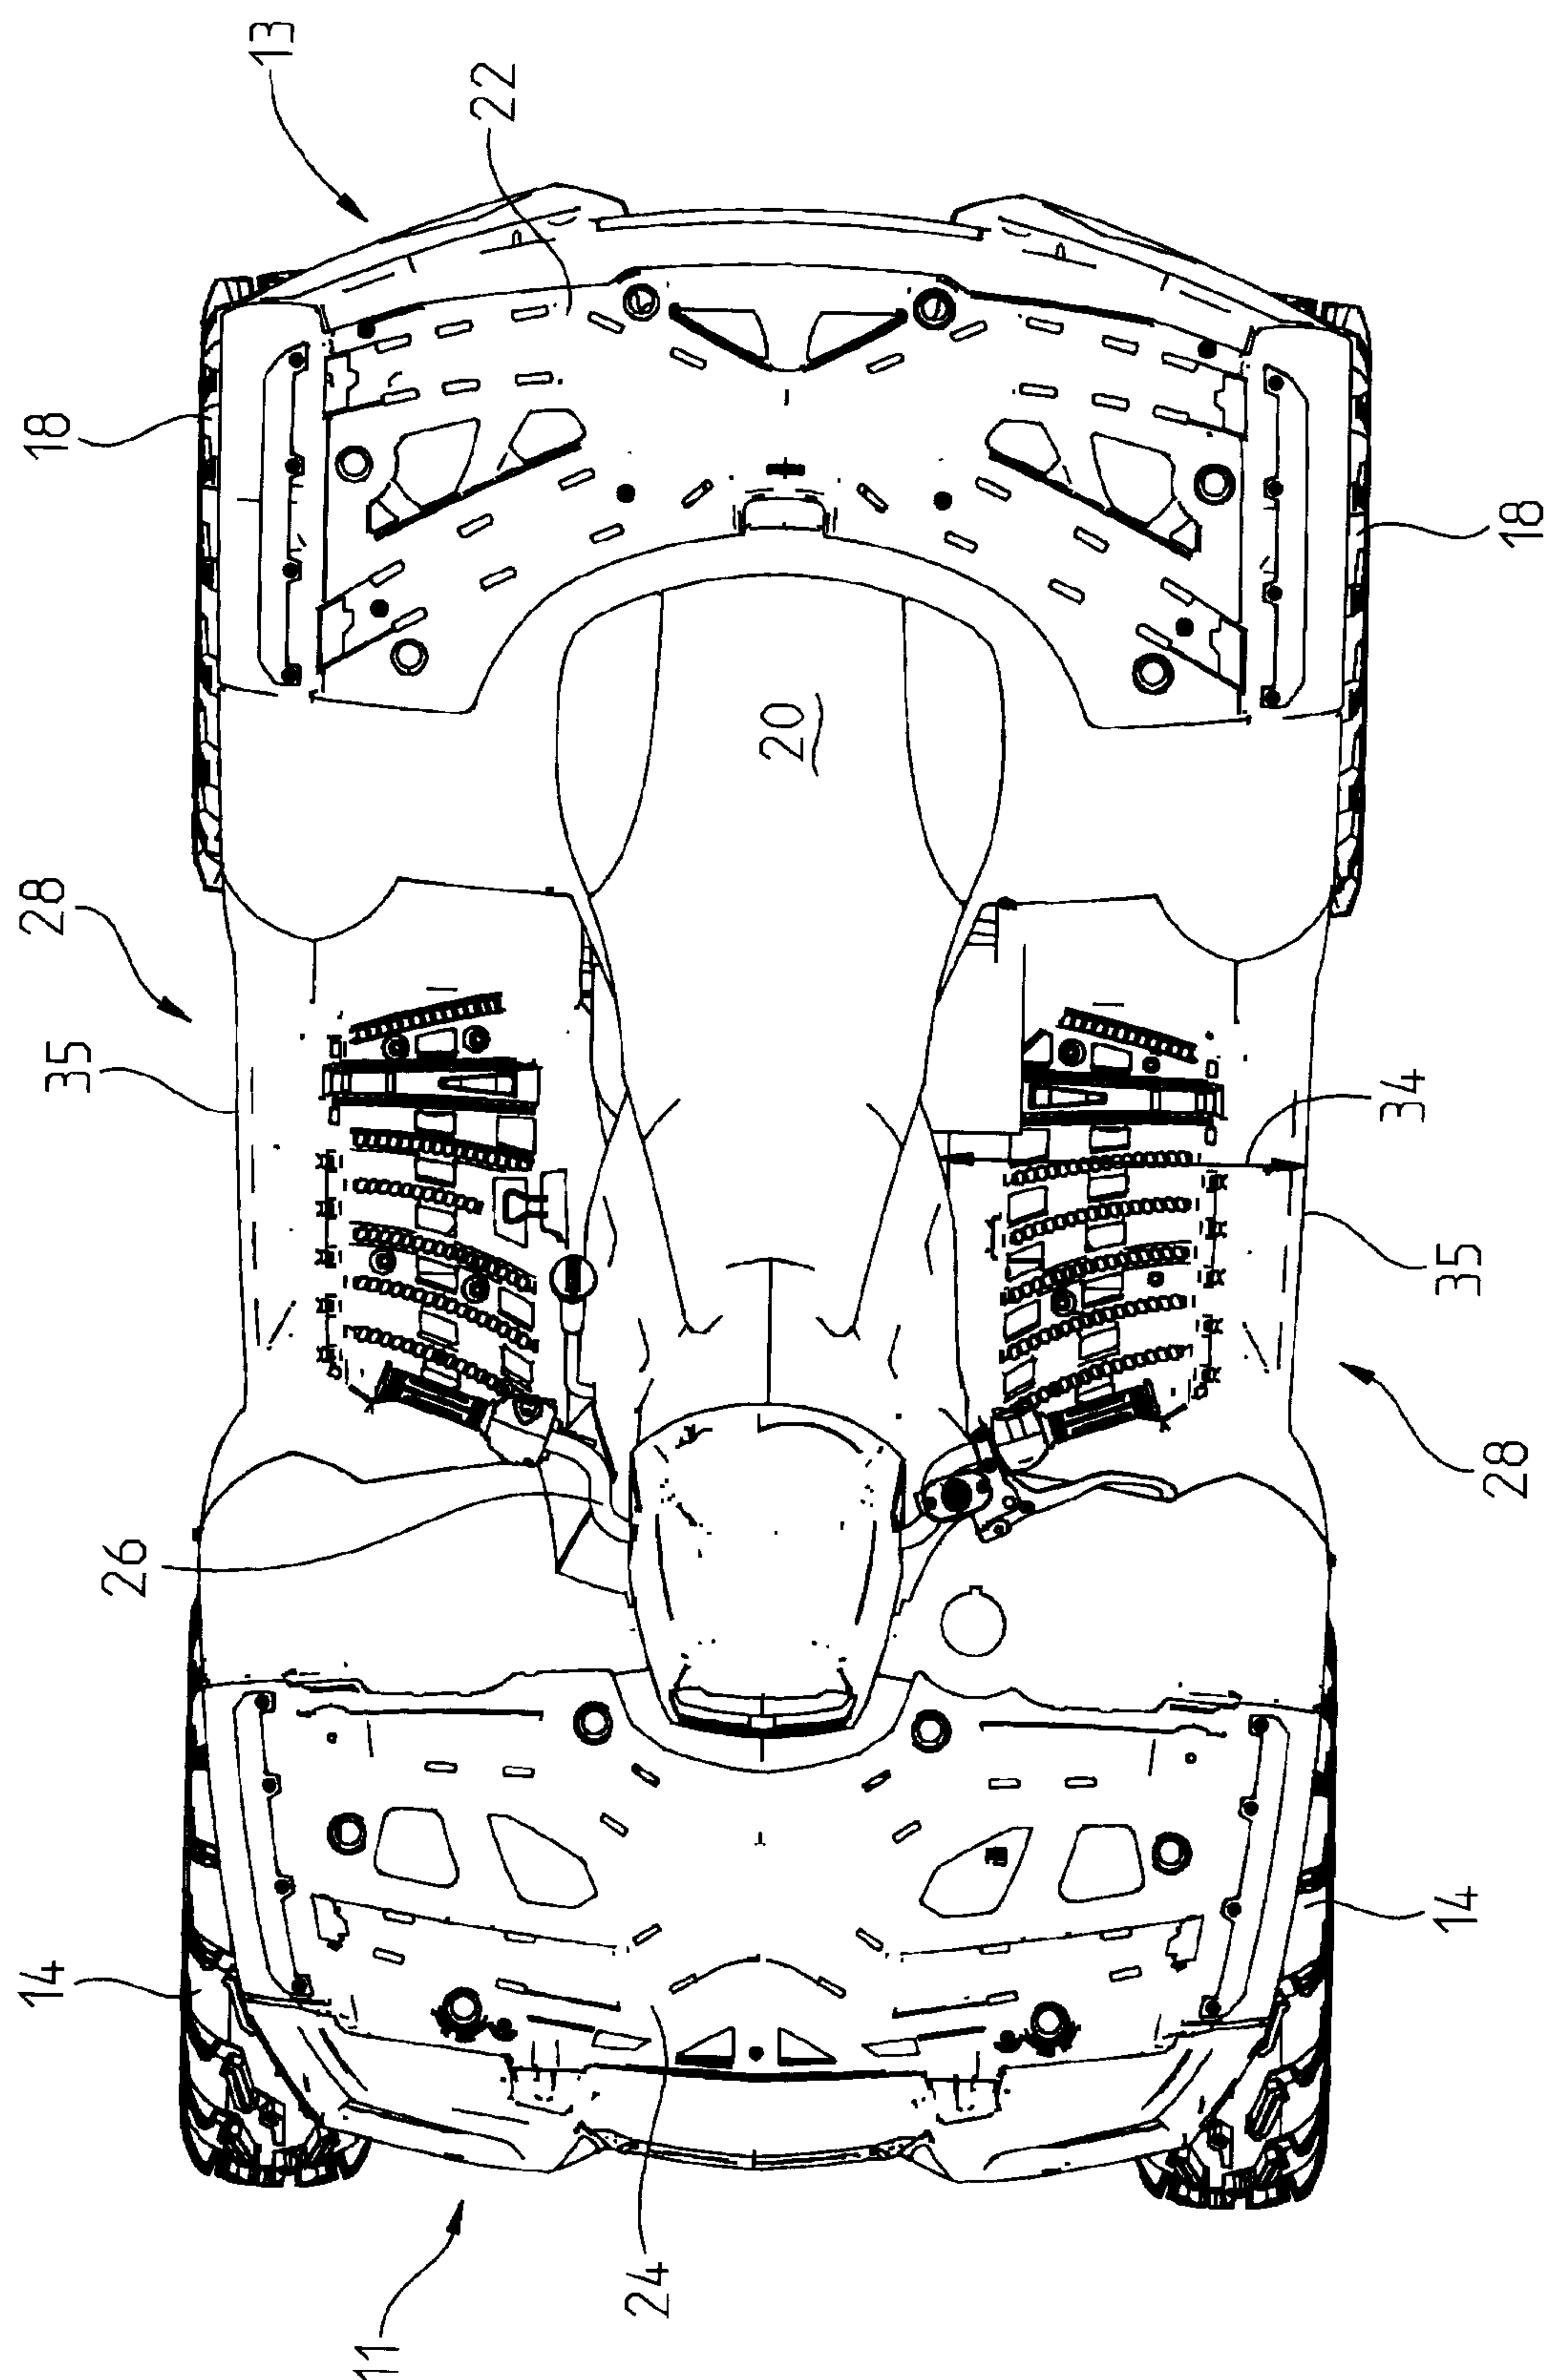


FIG. 4

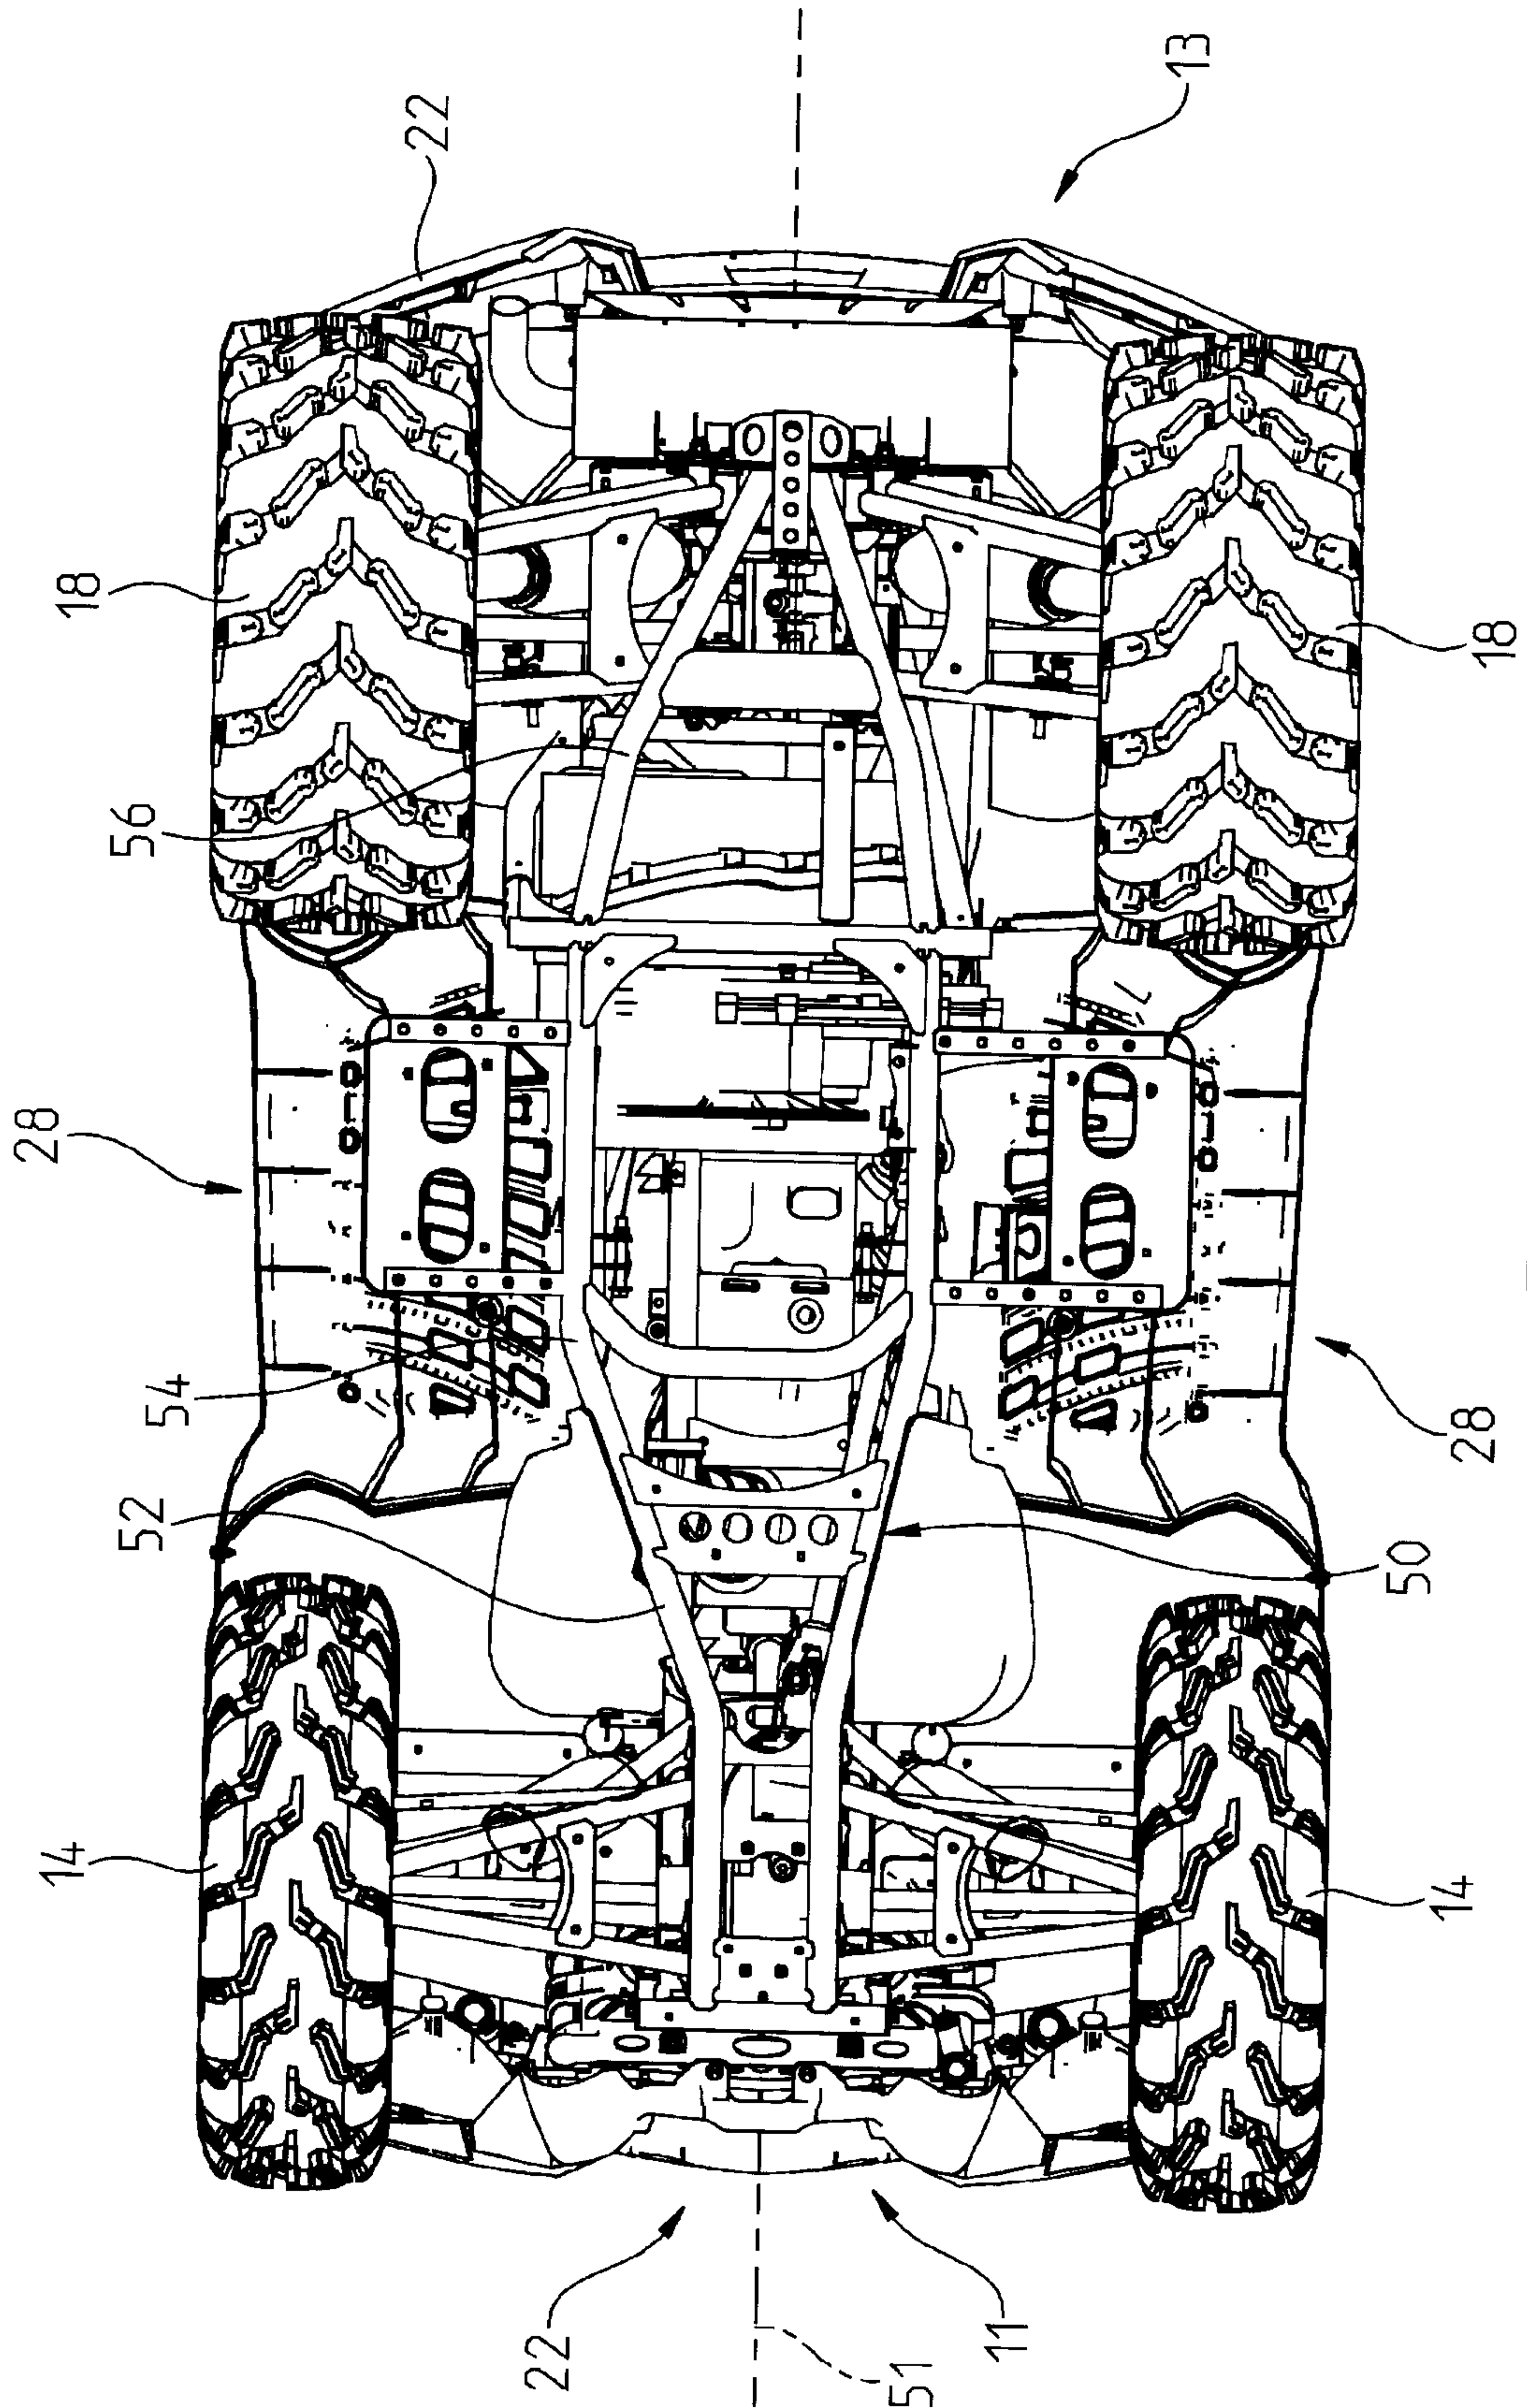


FIG. 5

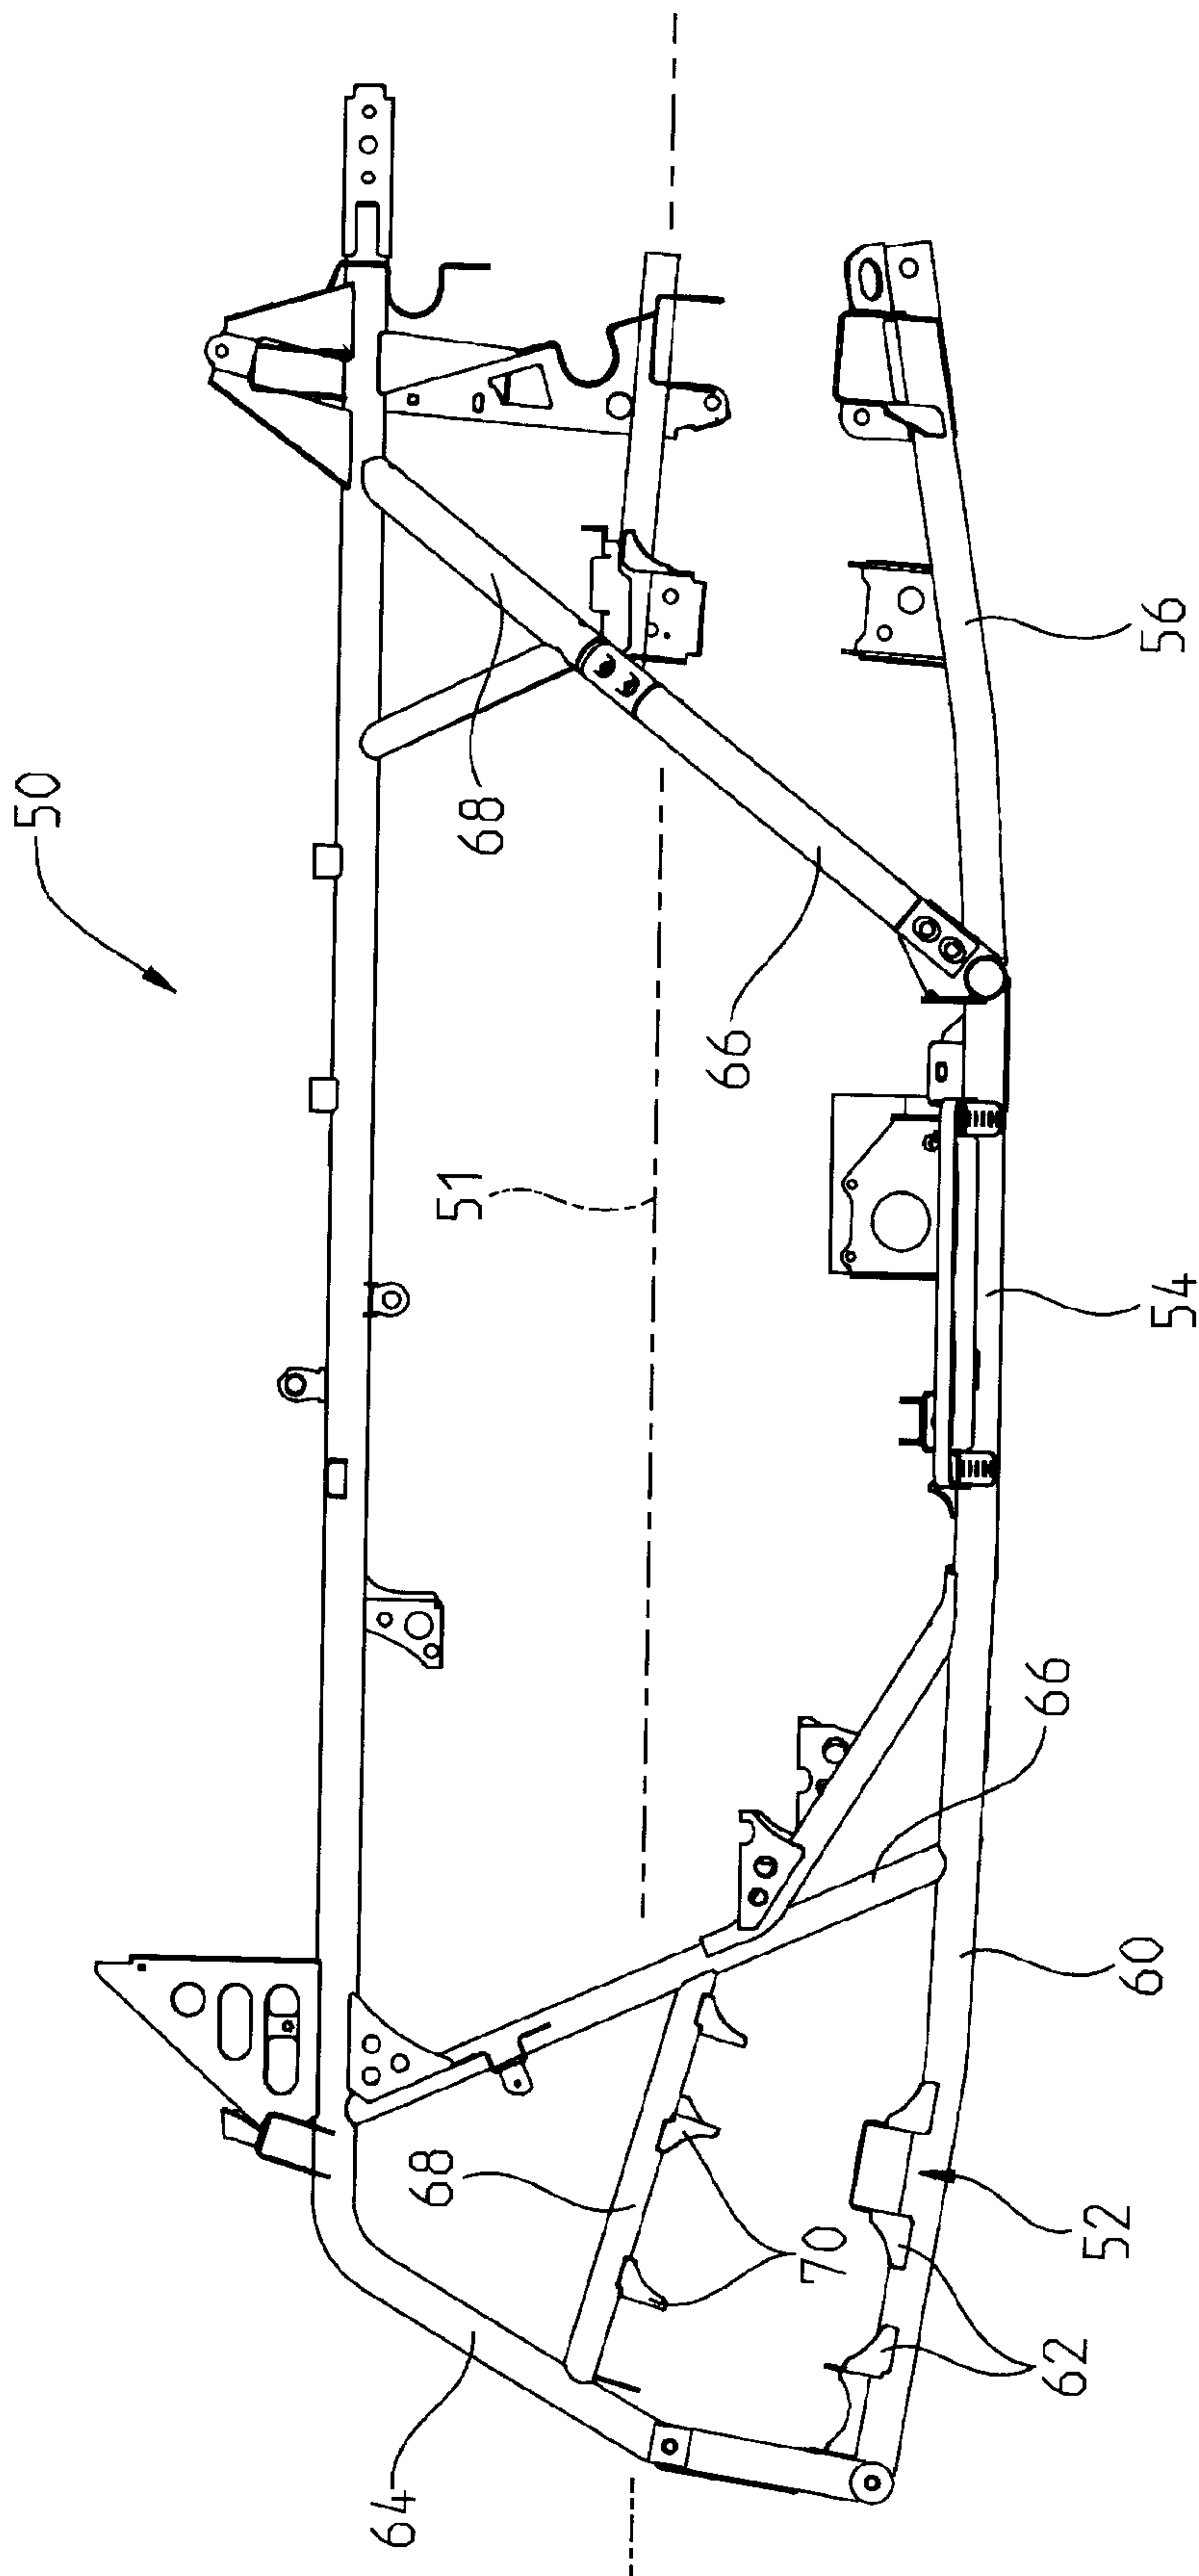
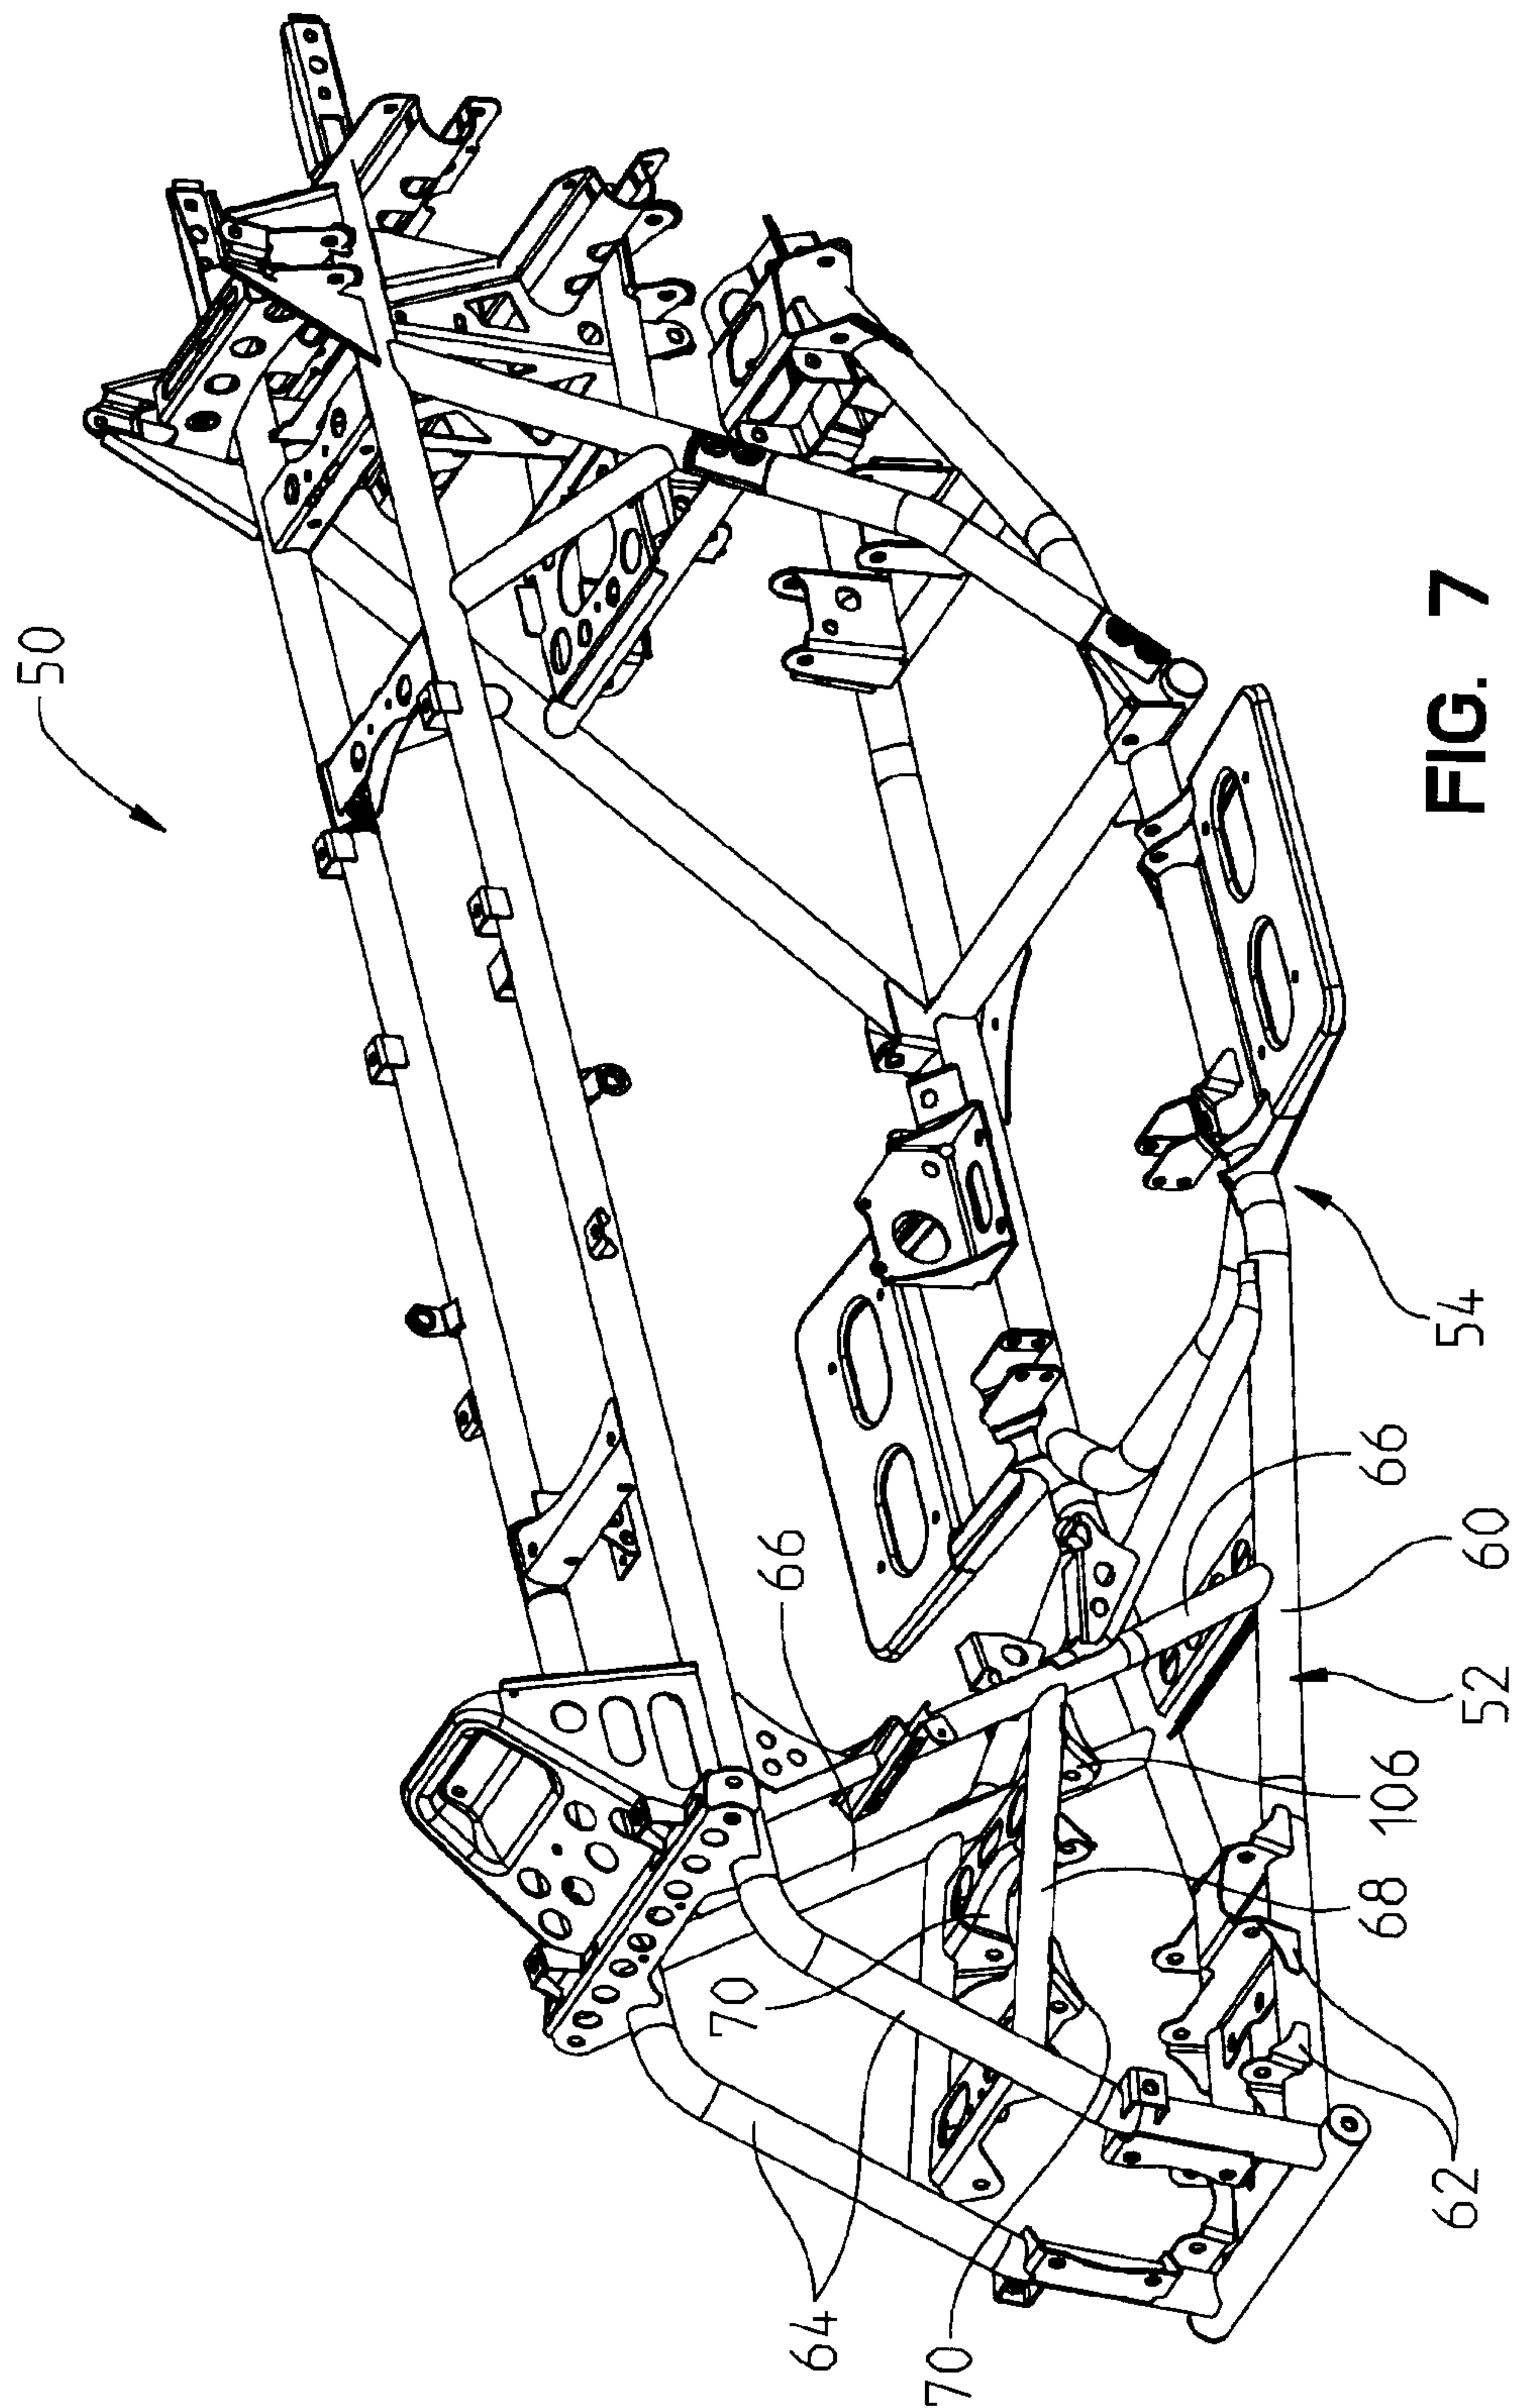


FIG. 6



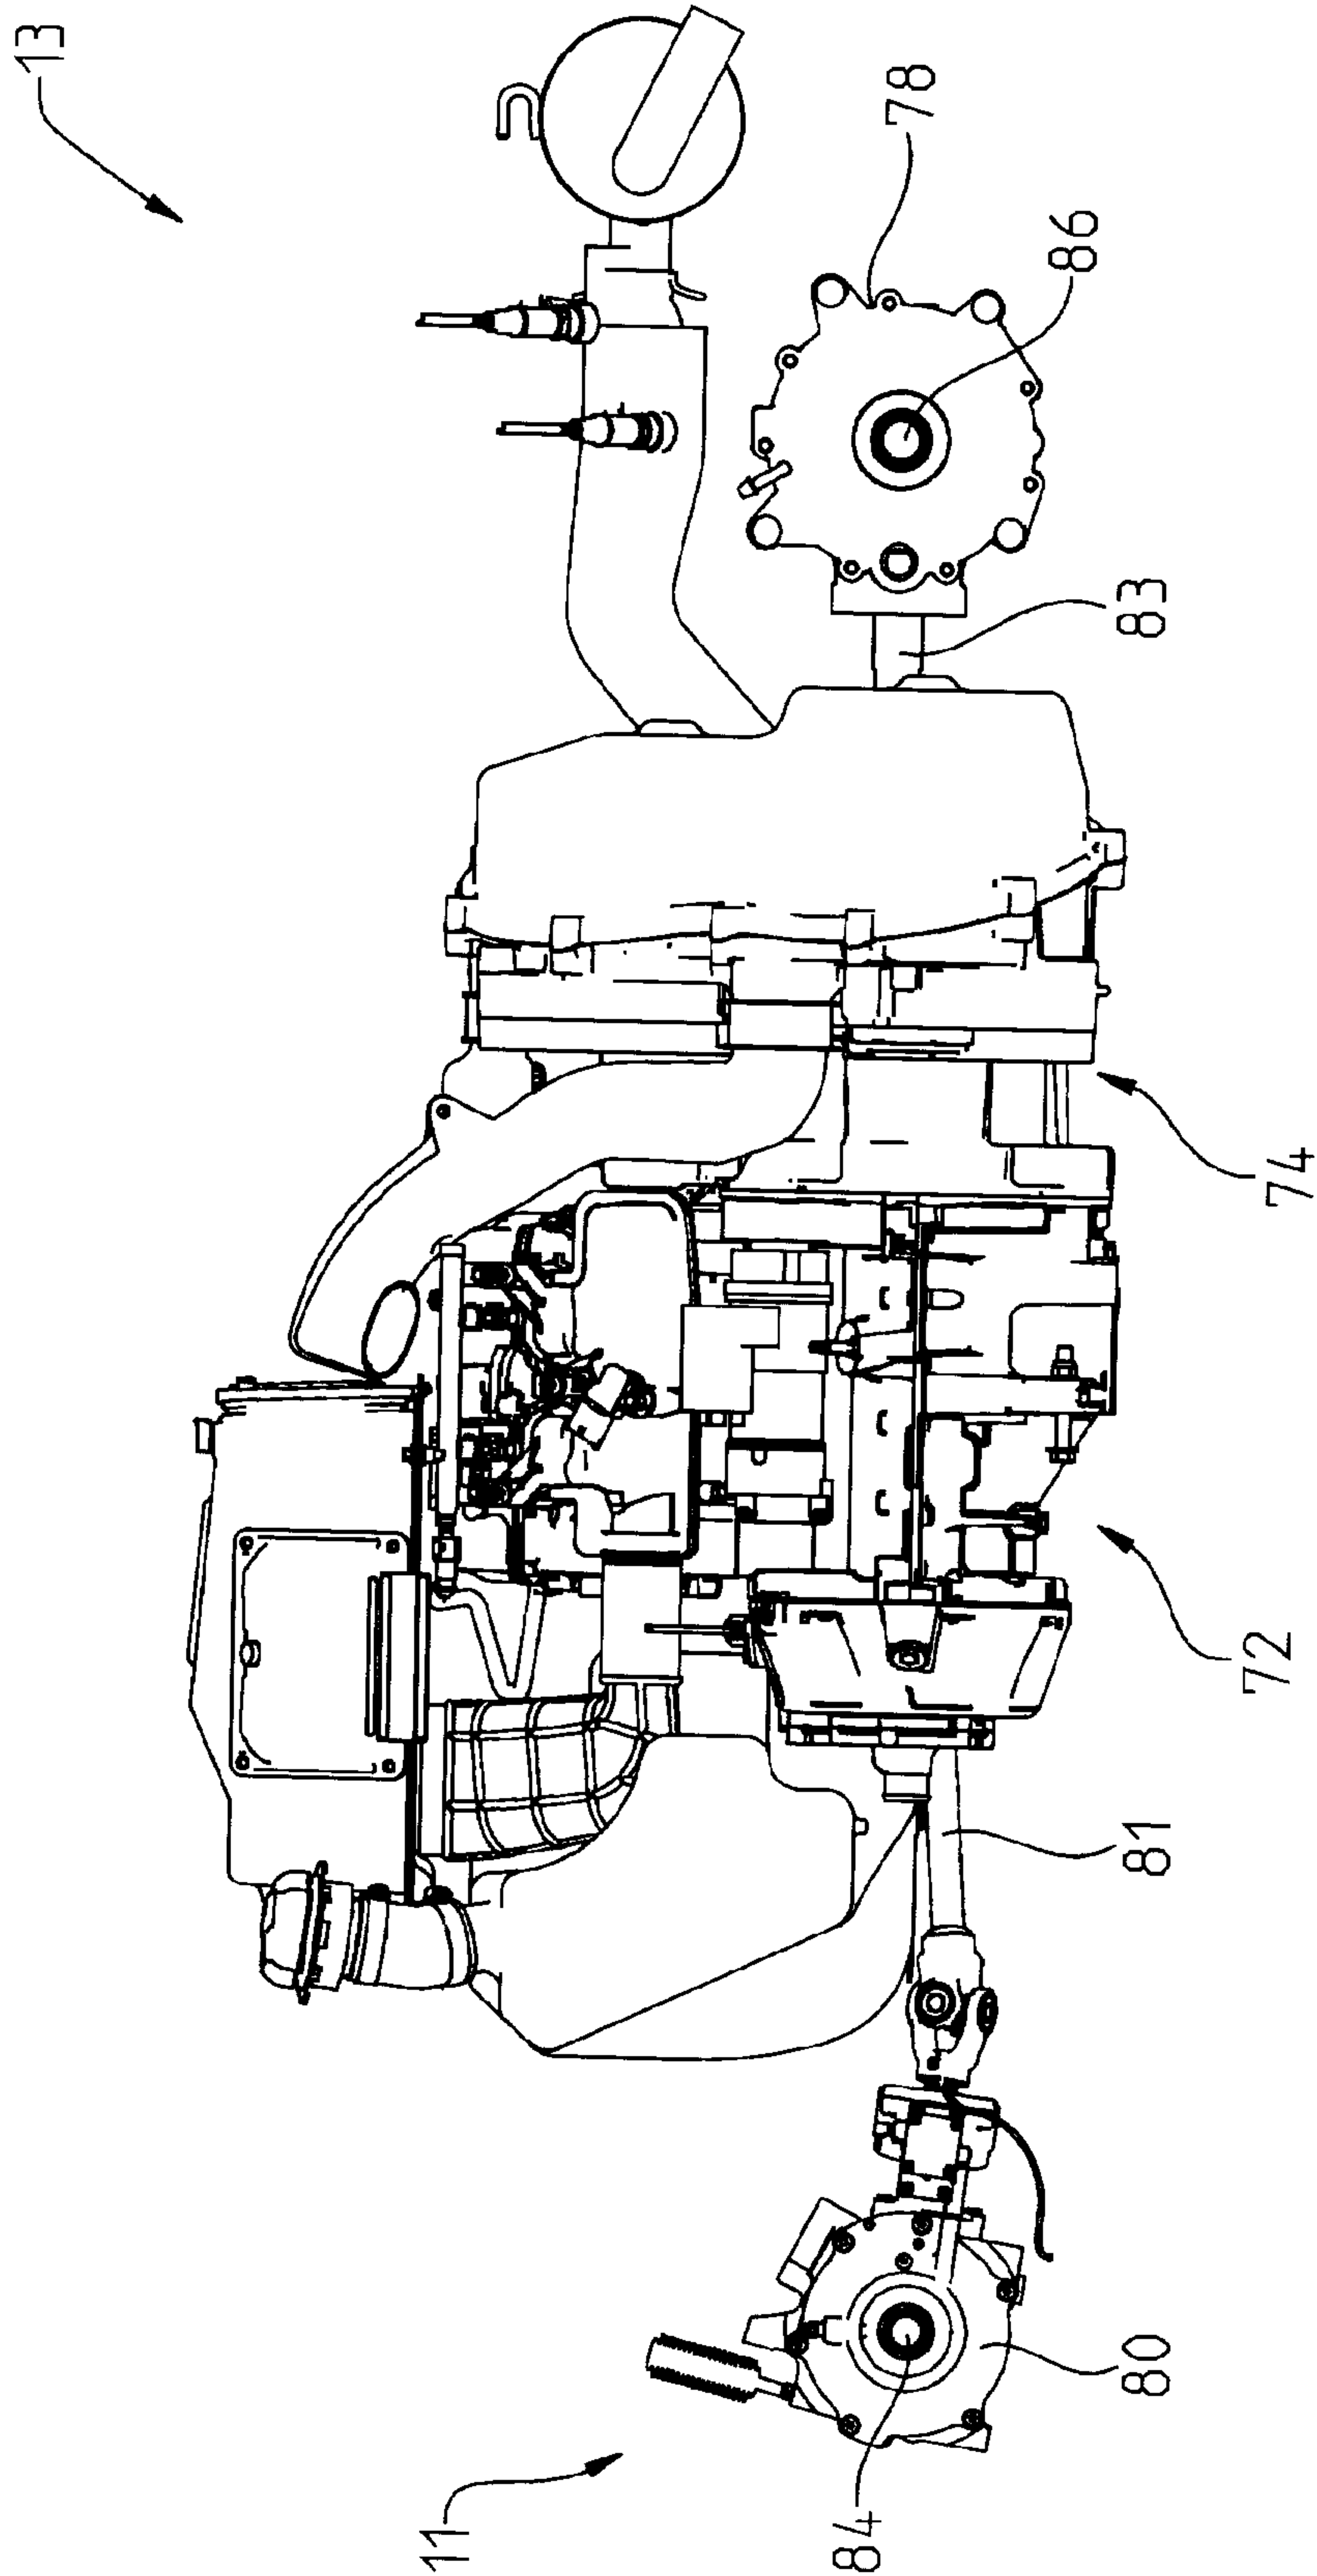


FIG. 8

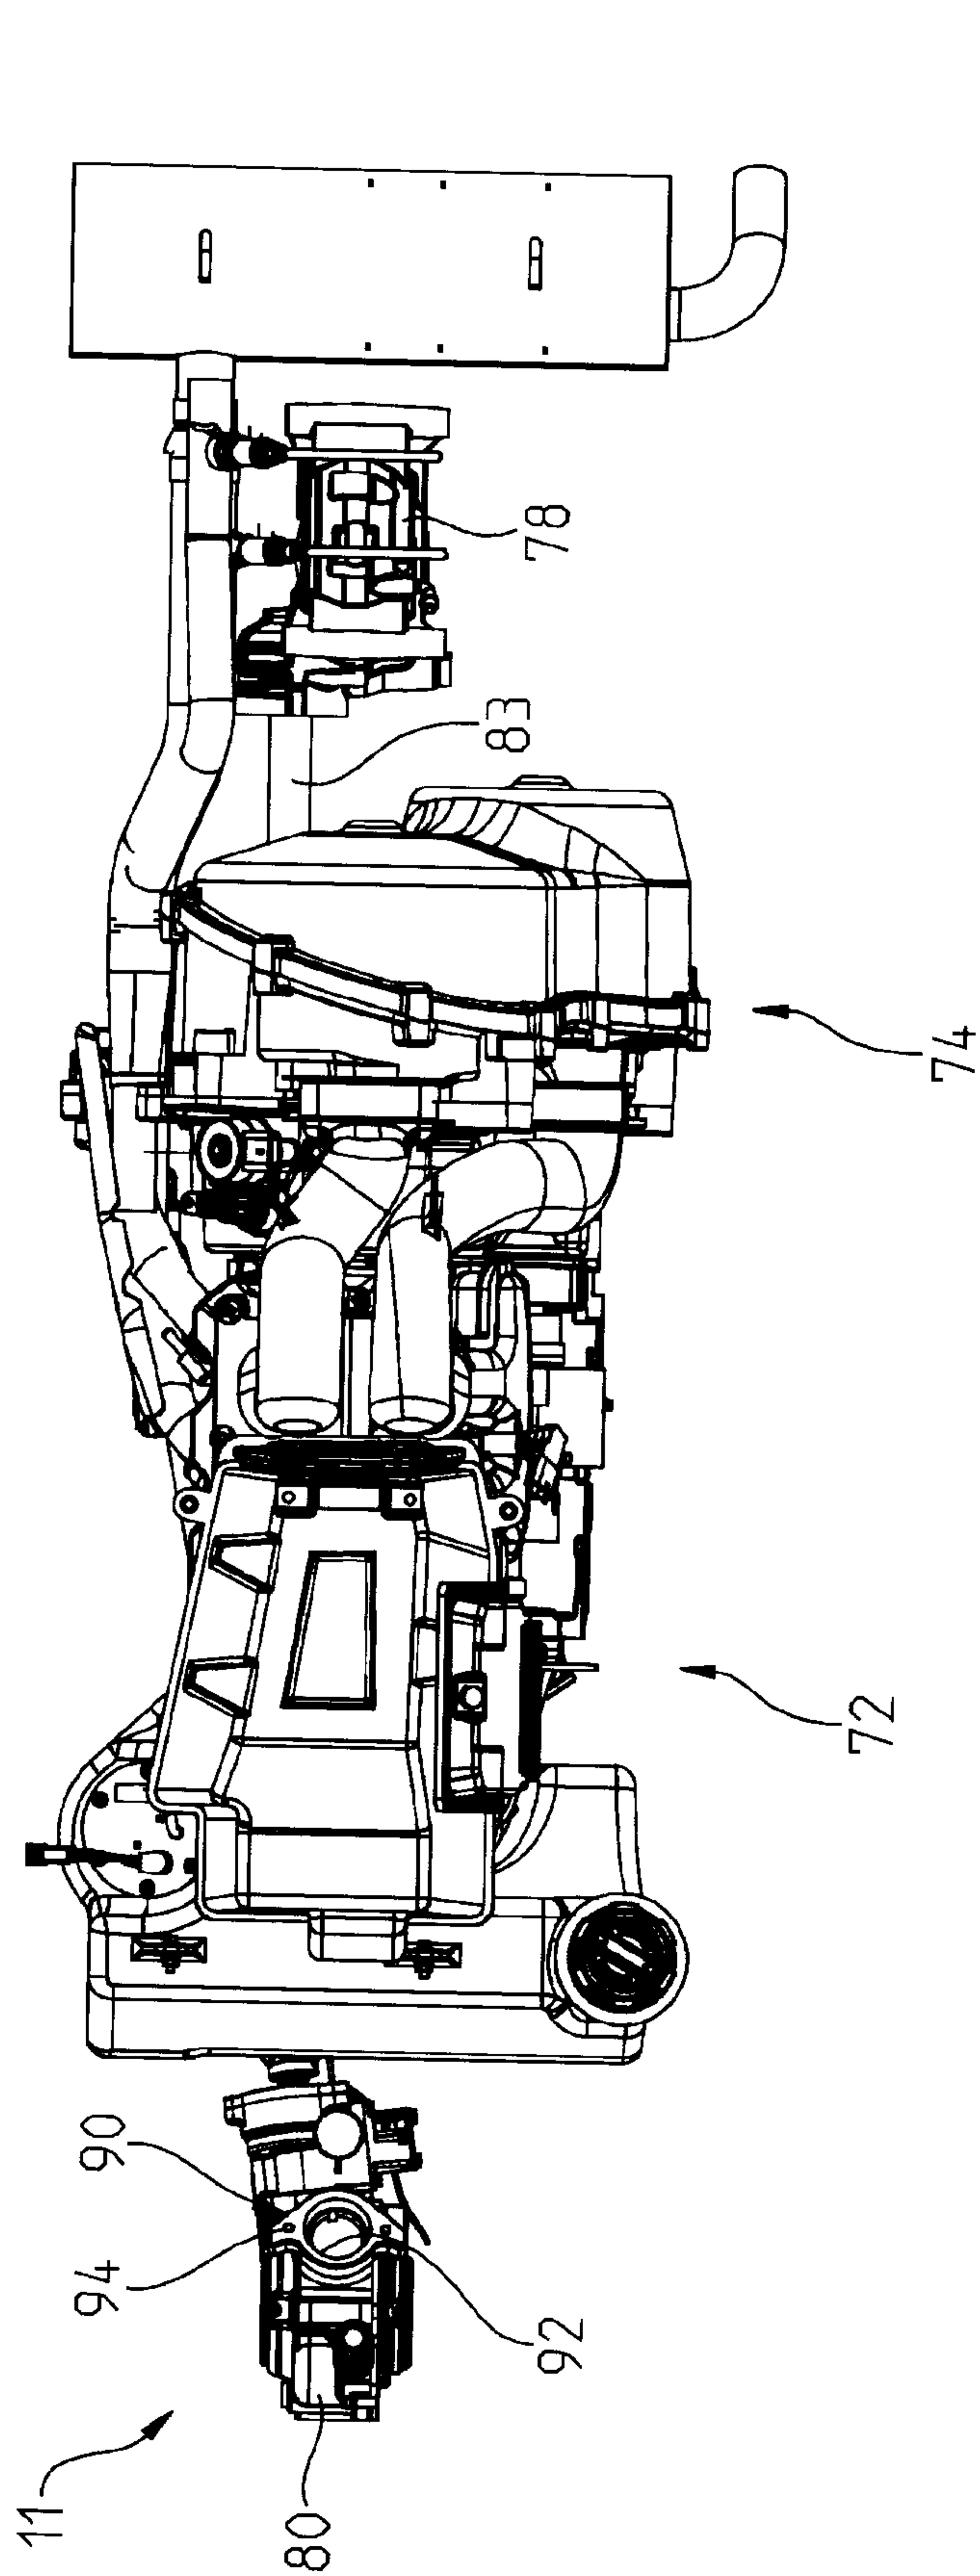


FIG. 9

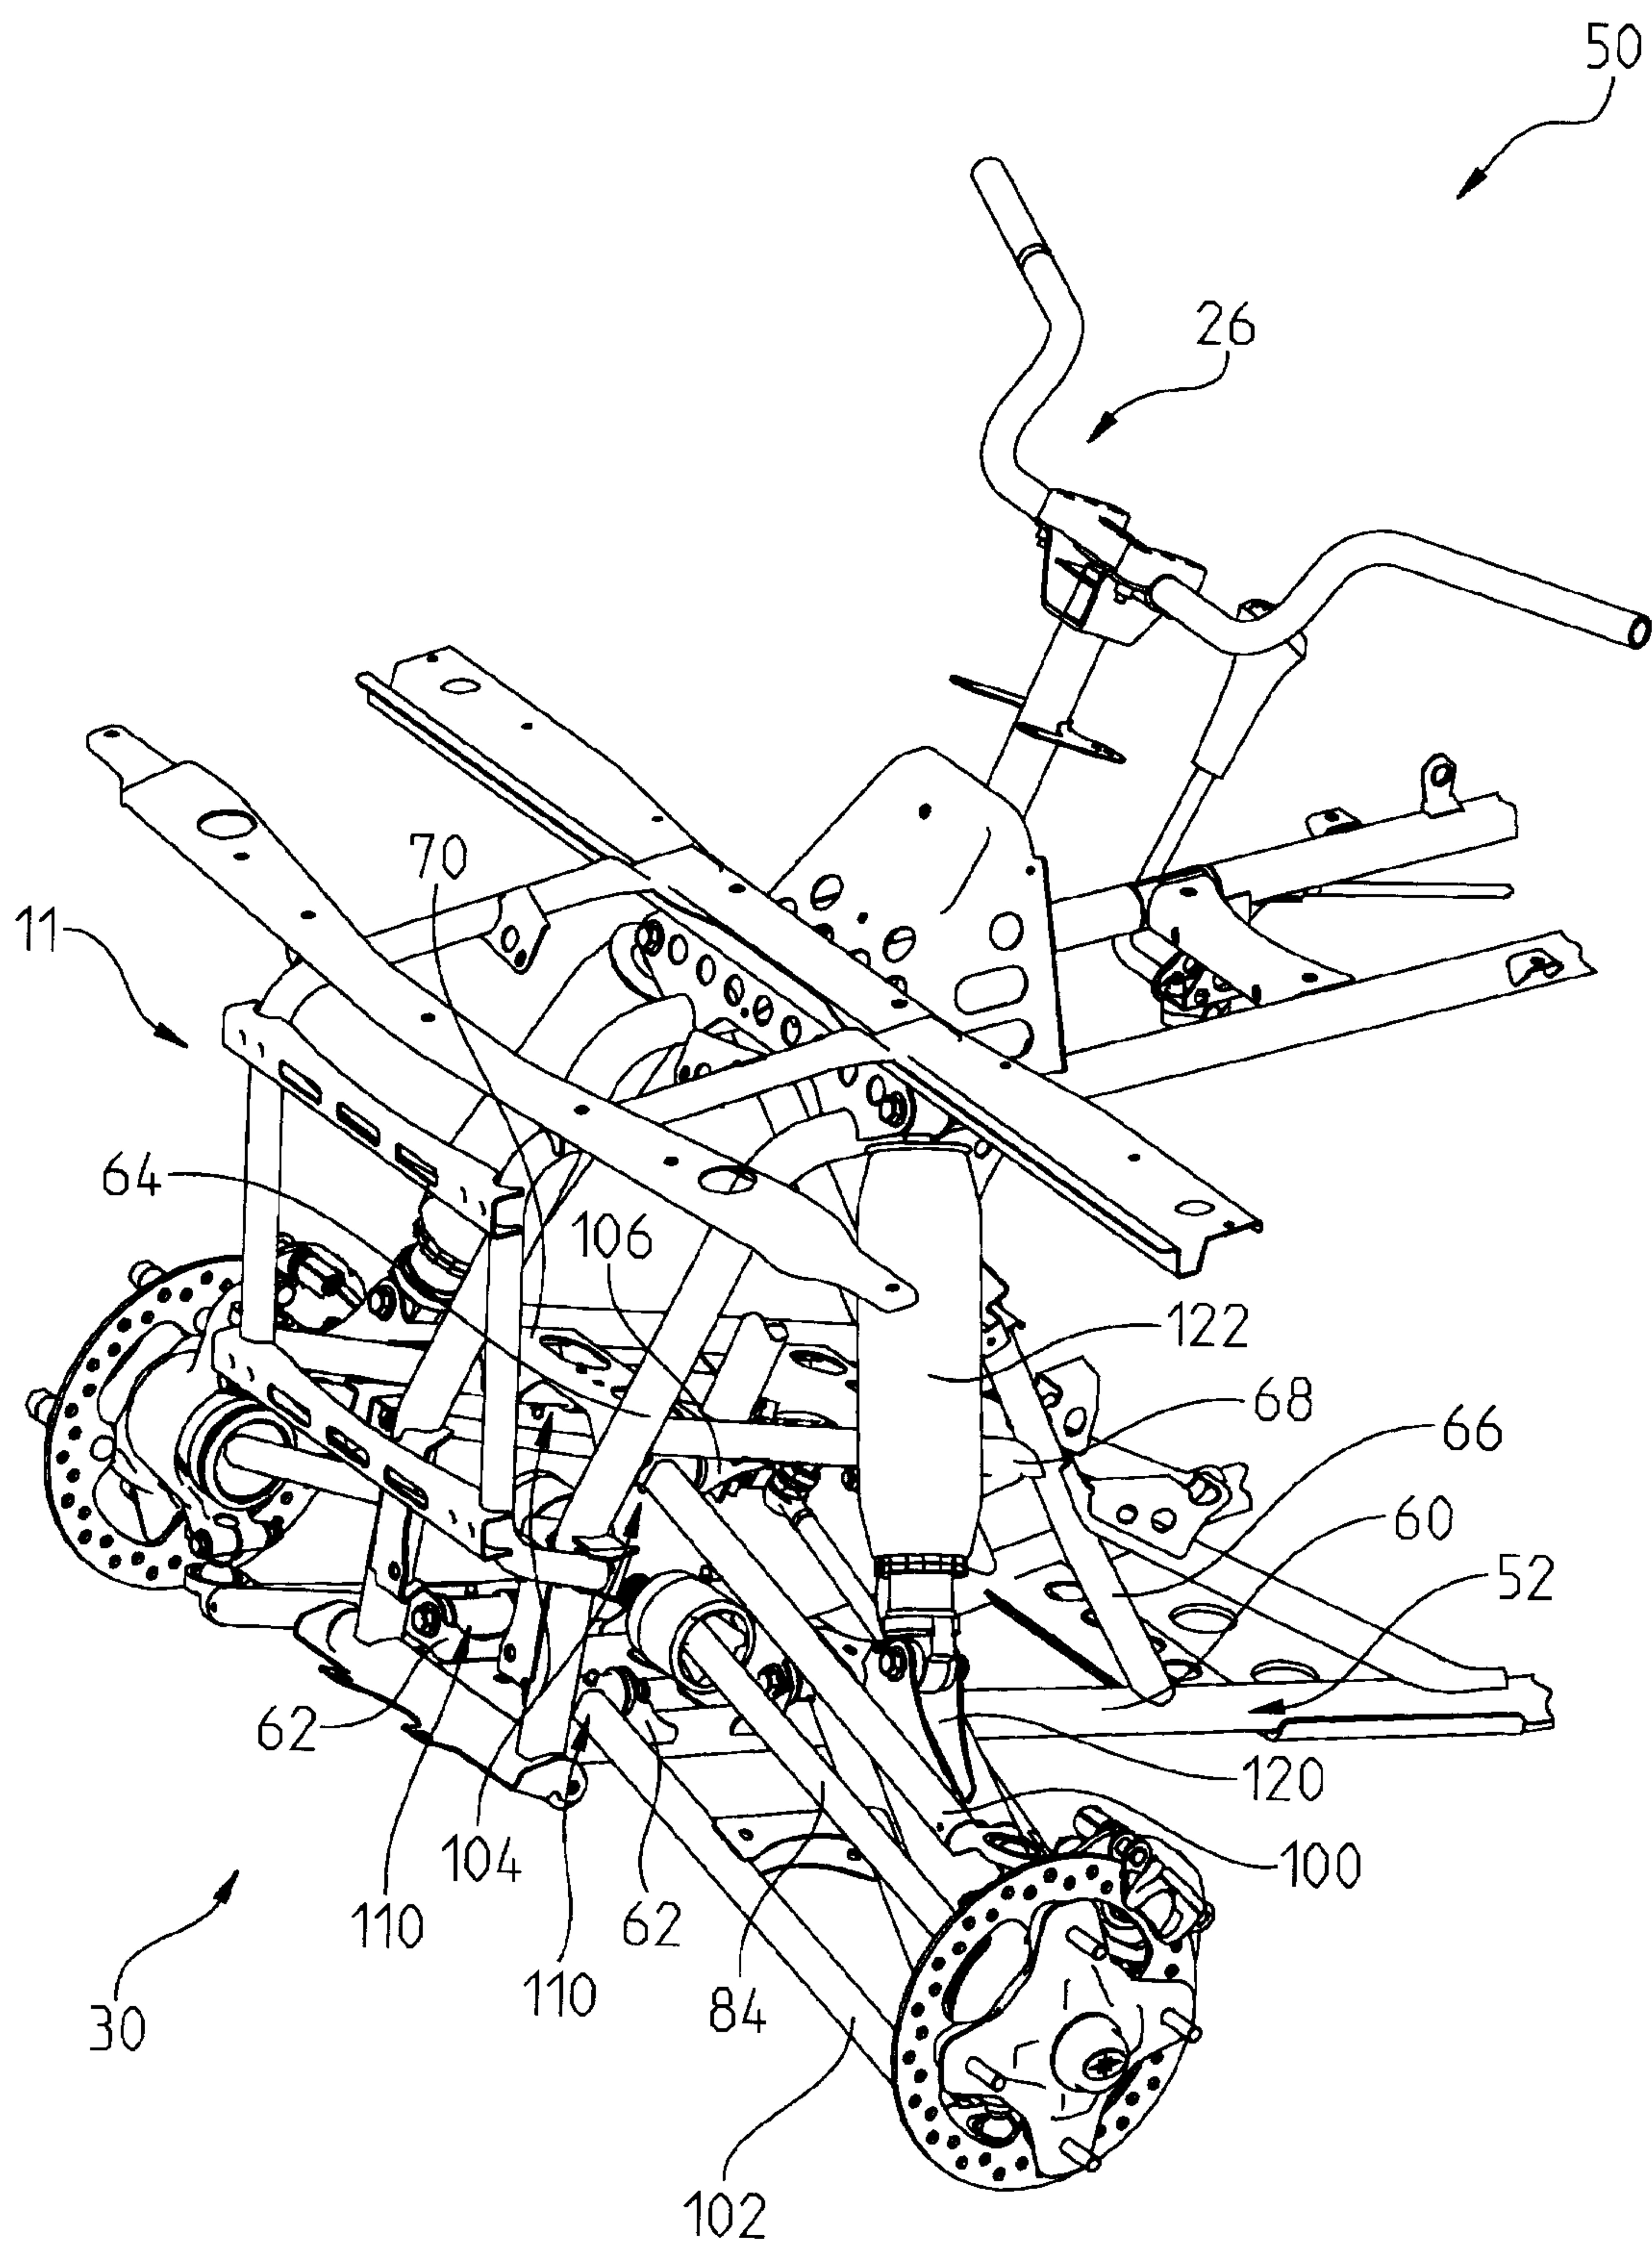


FIG. 10

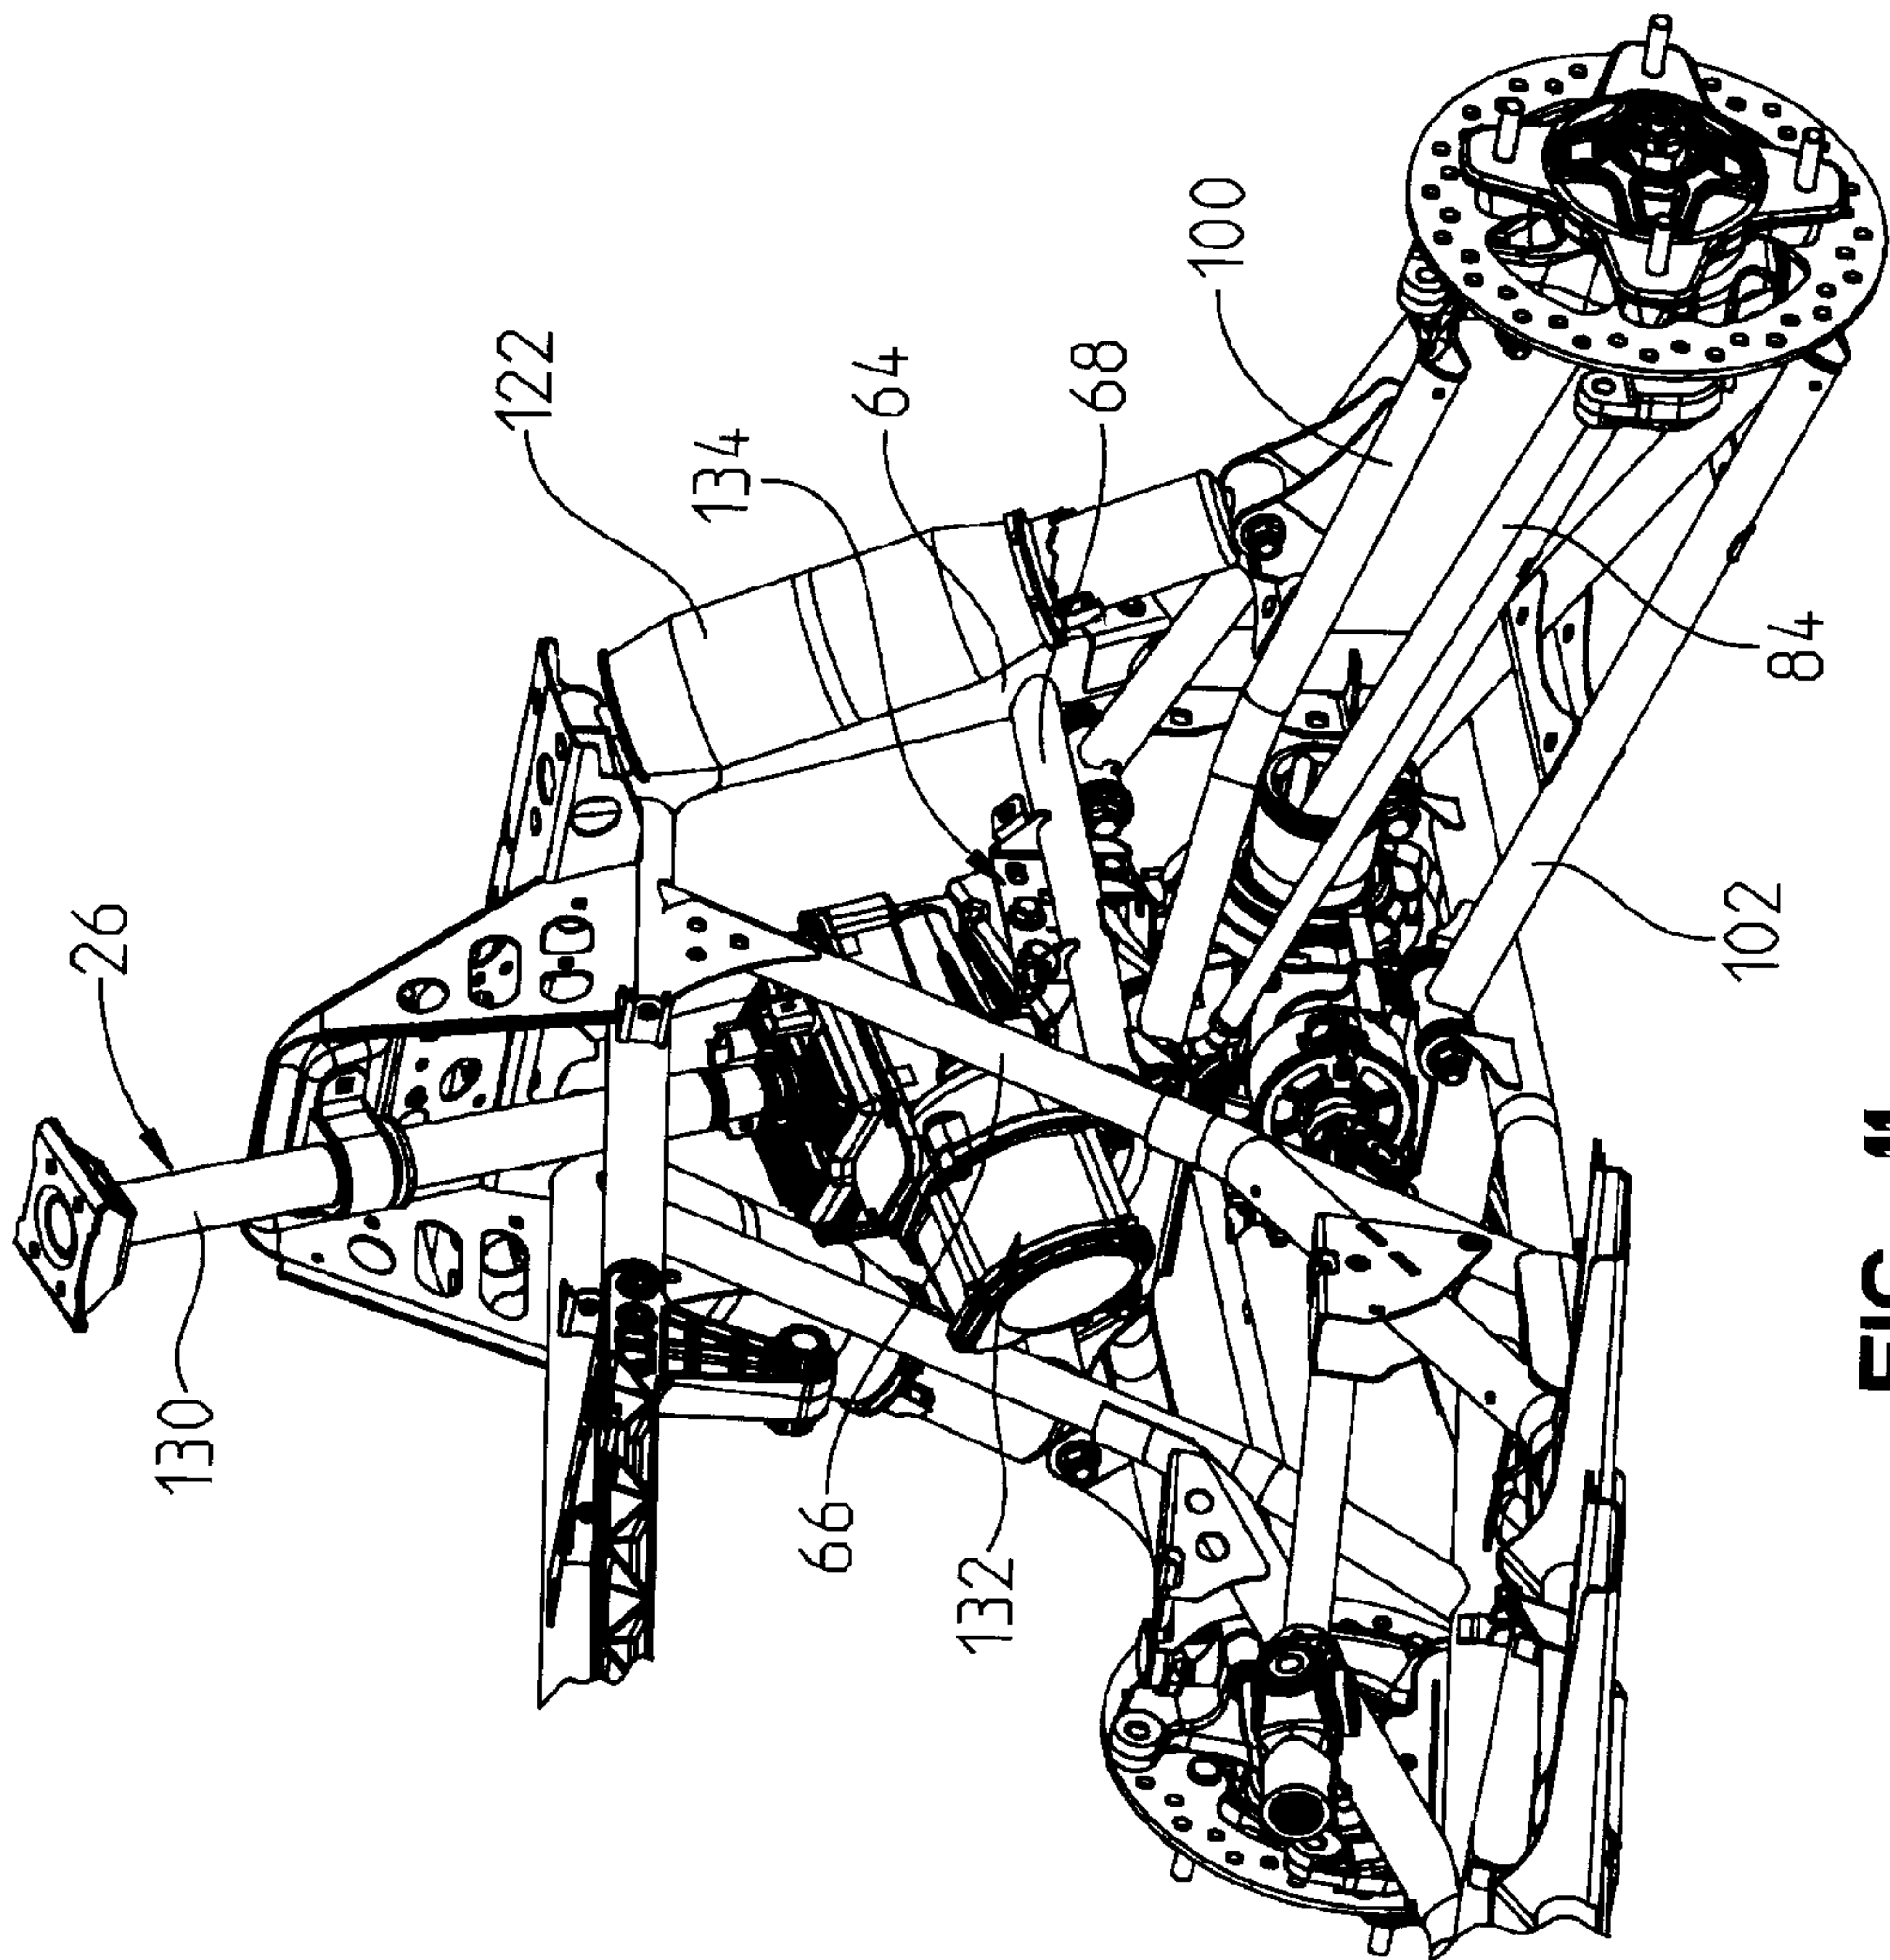


FIG. 11


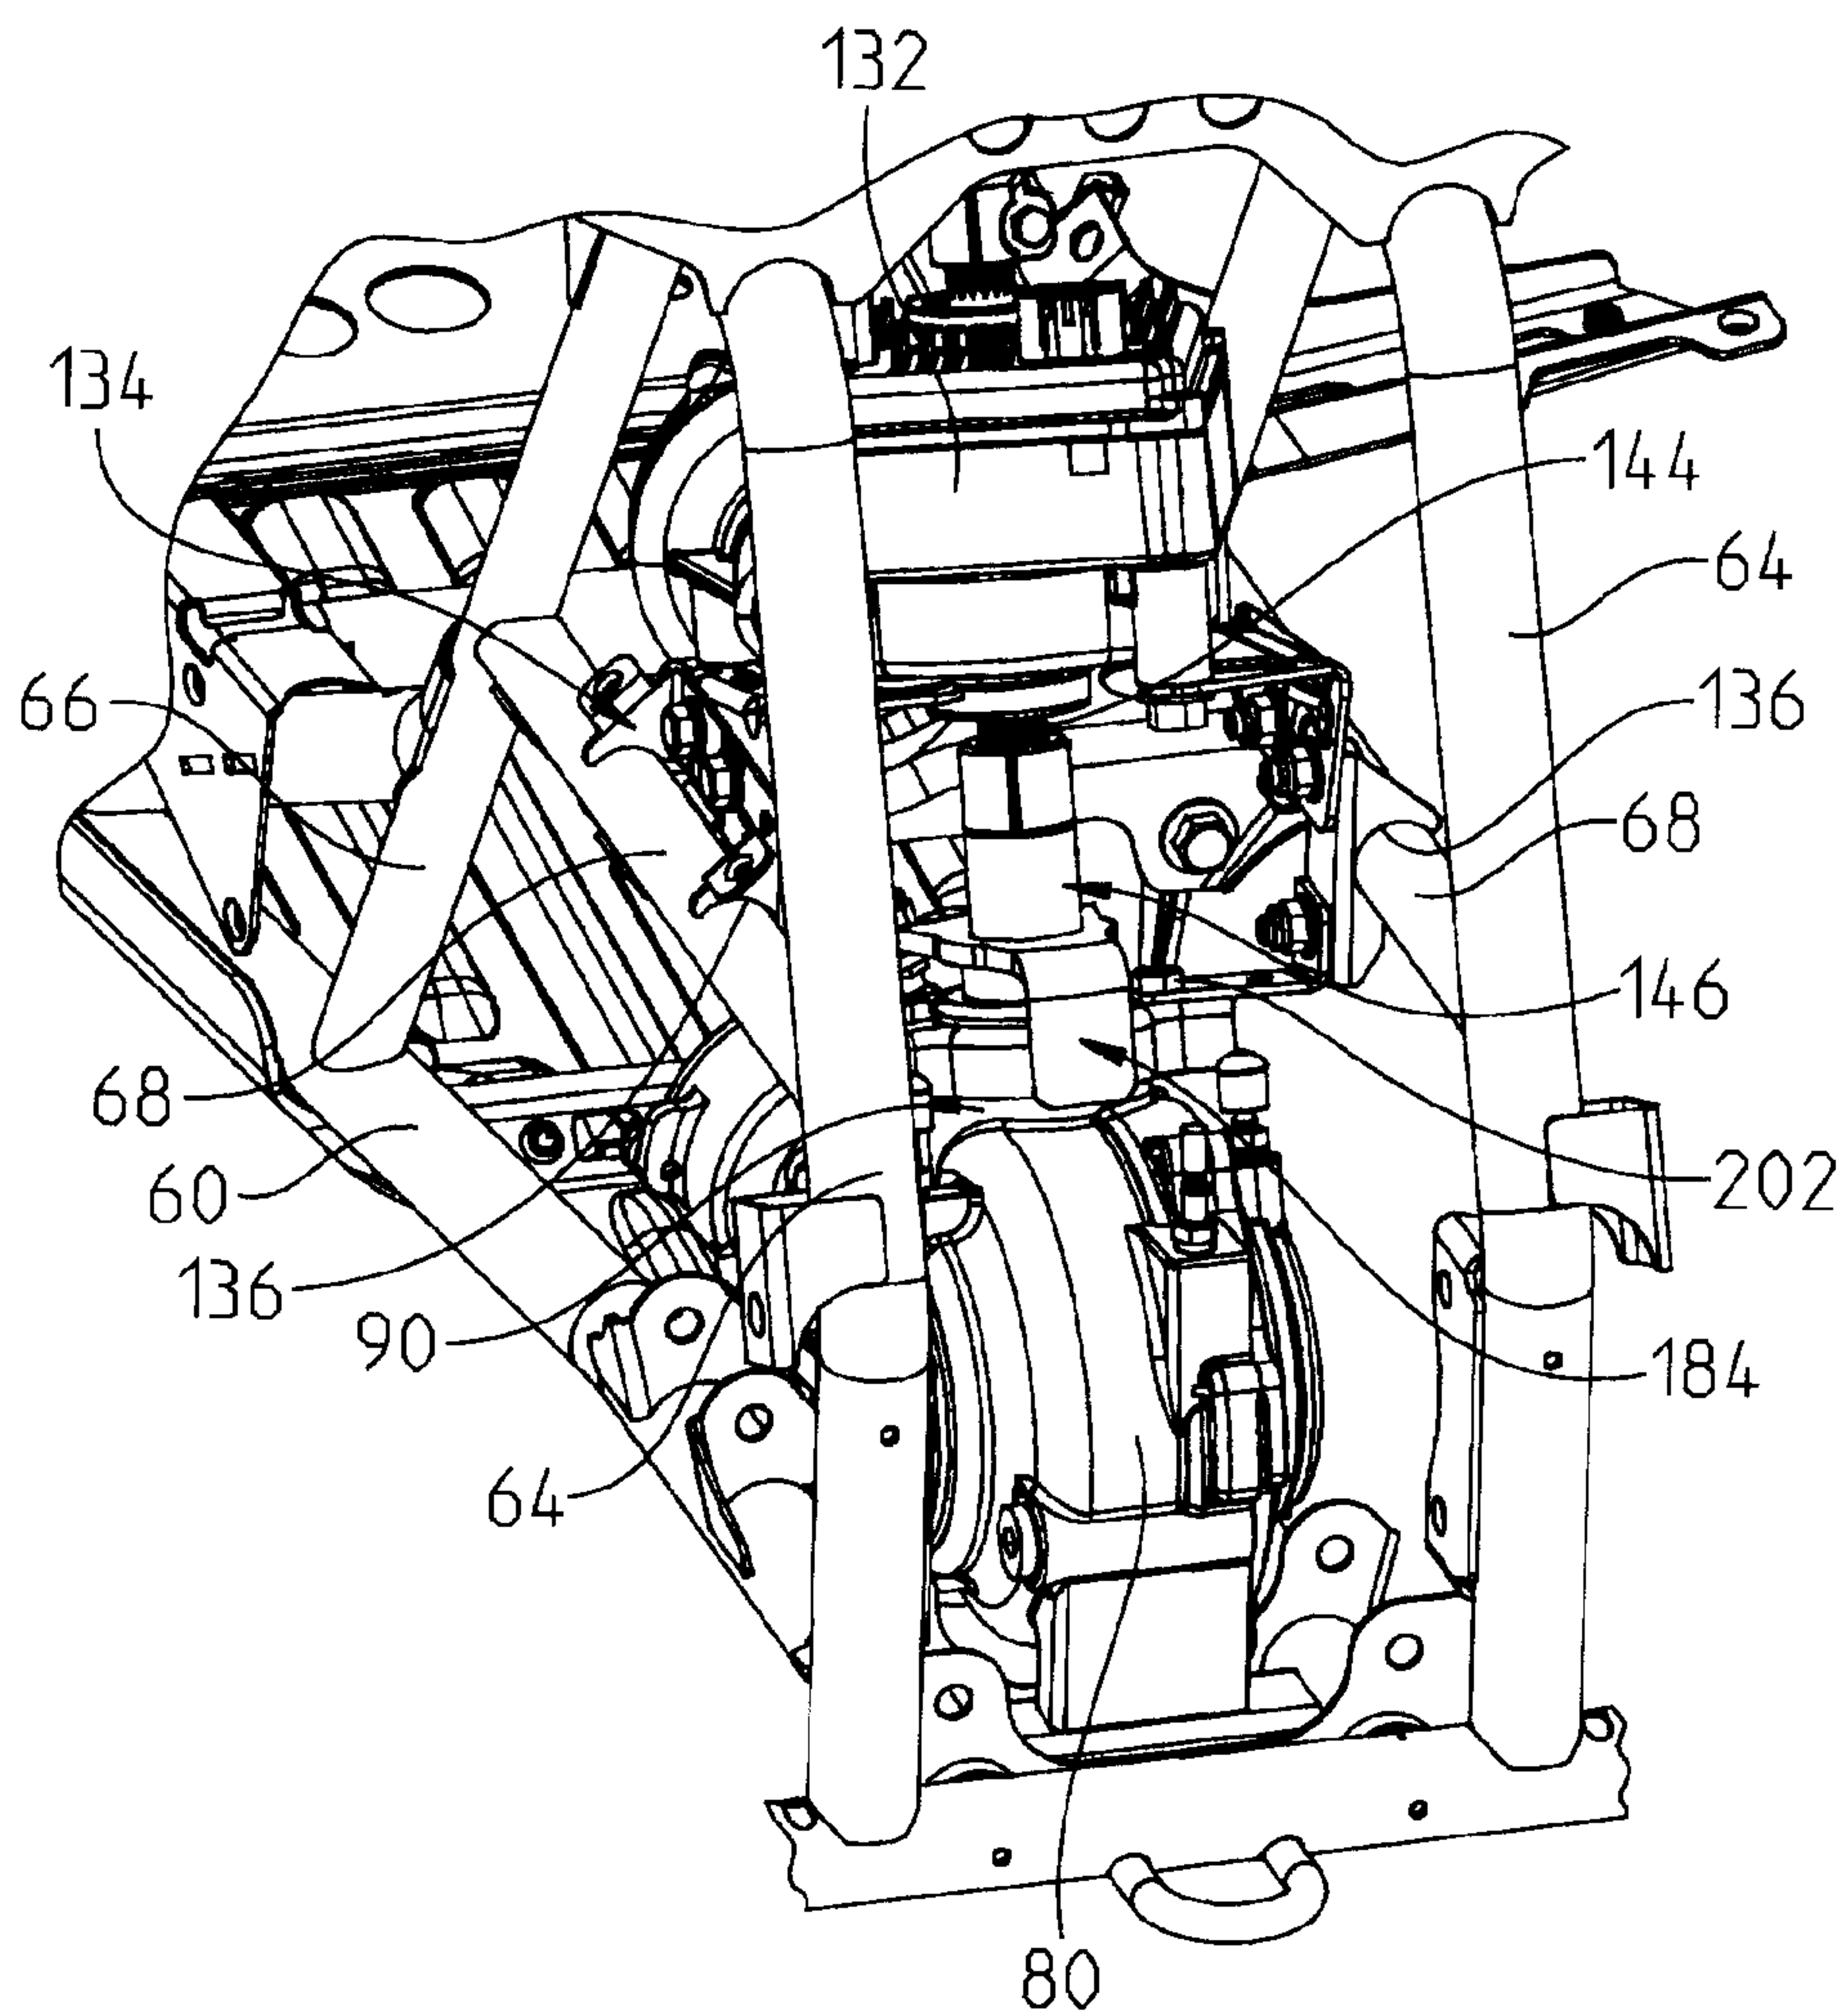


FIG. 12

**FIG. 13**

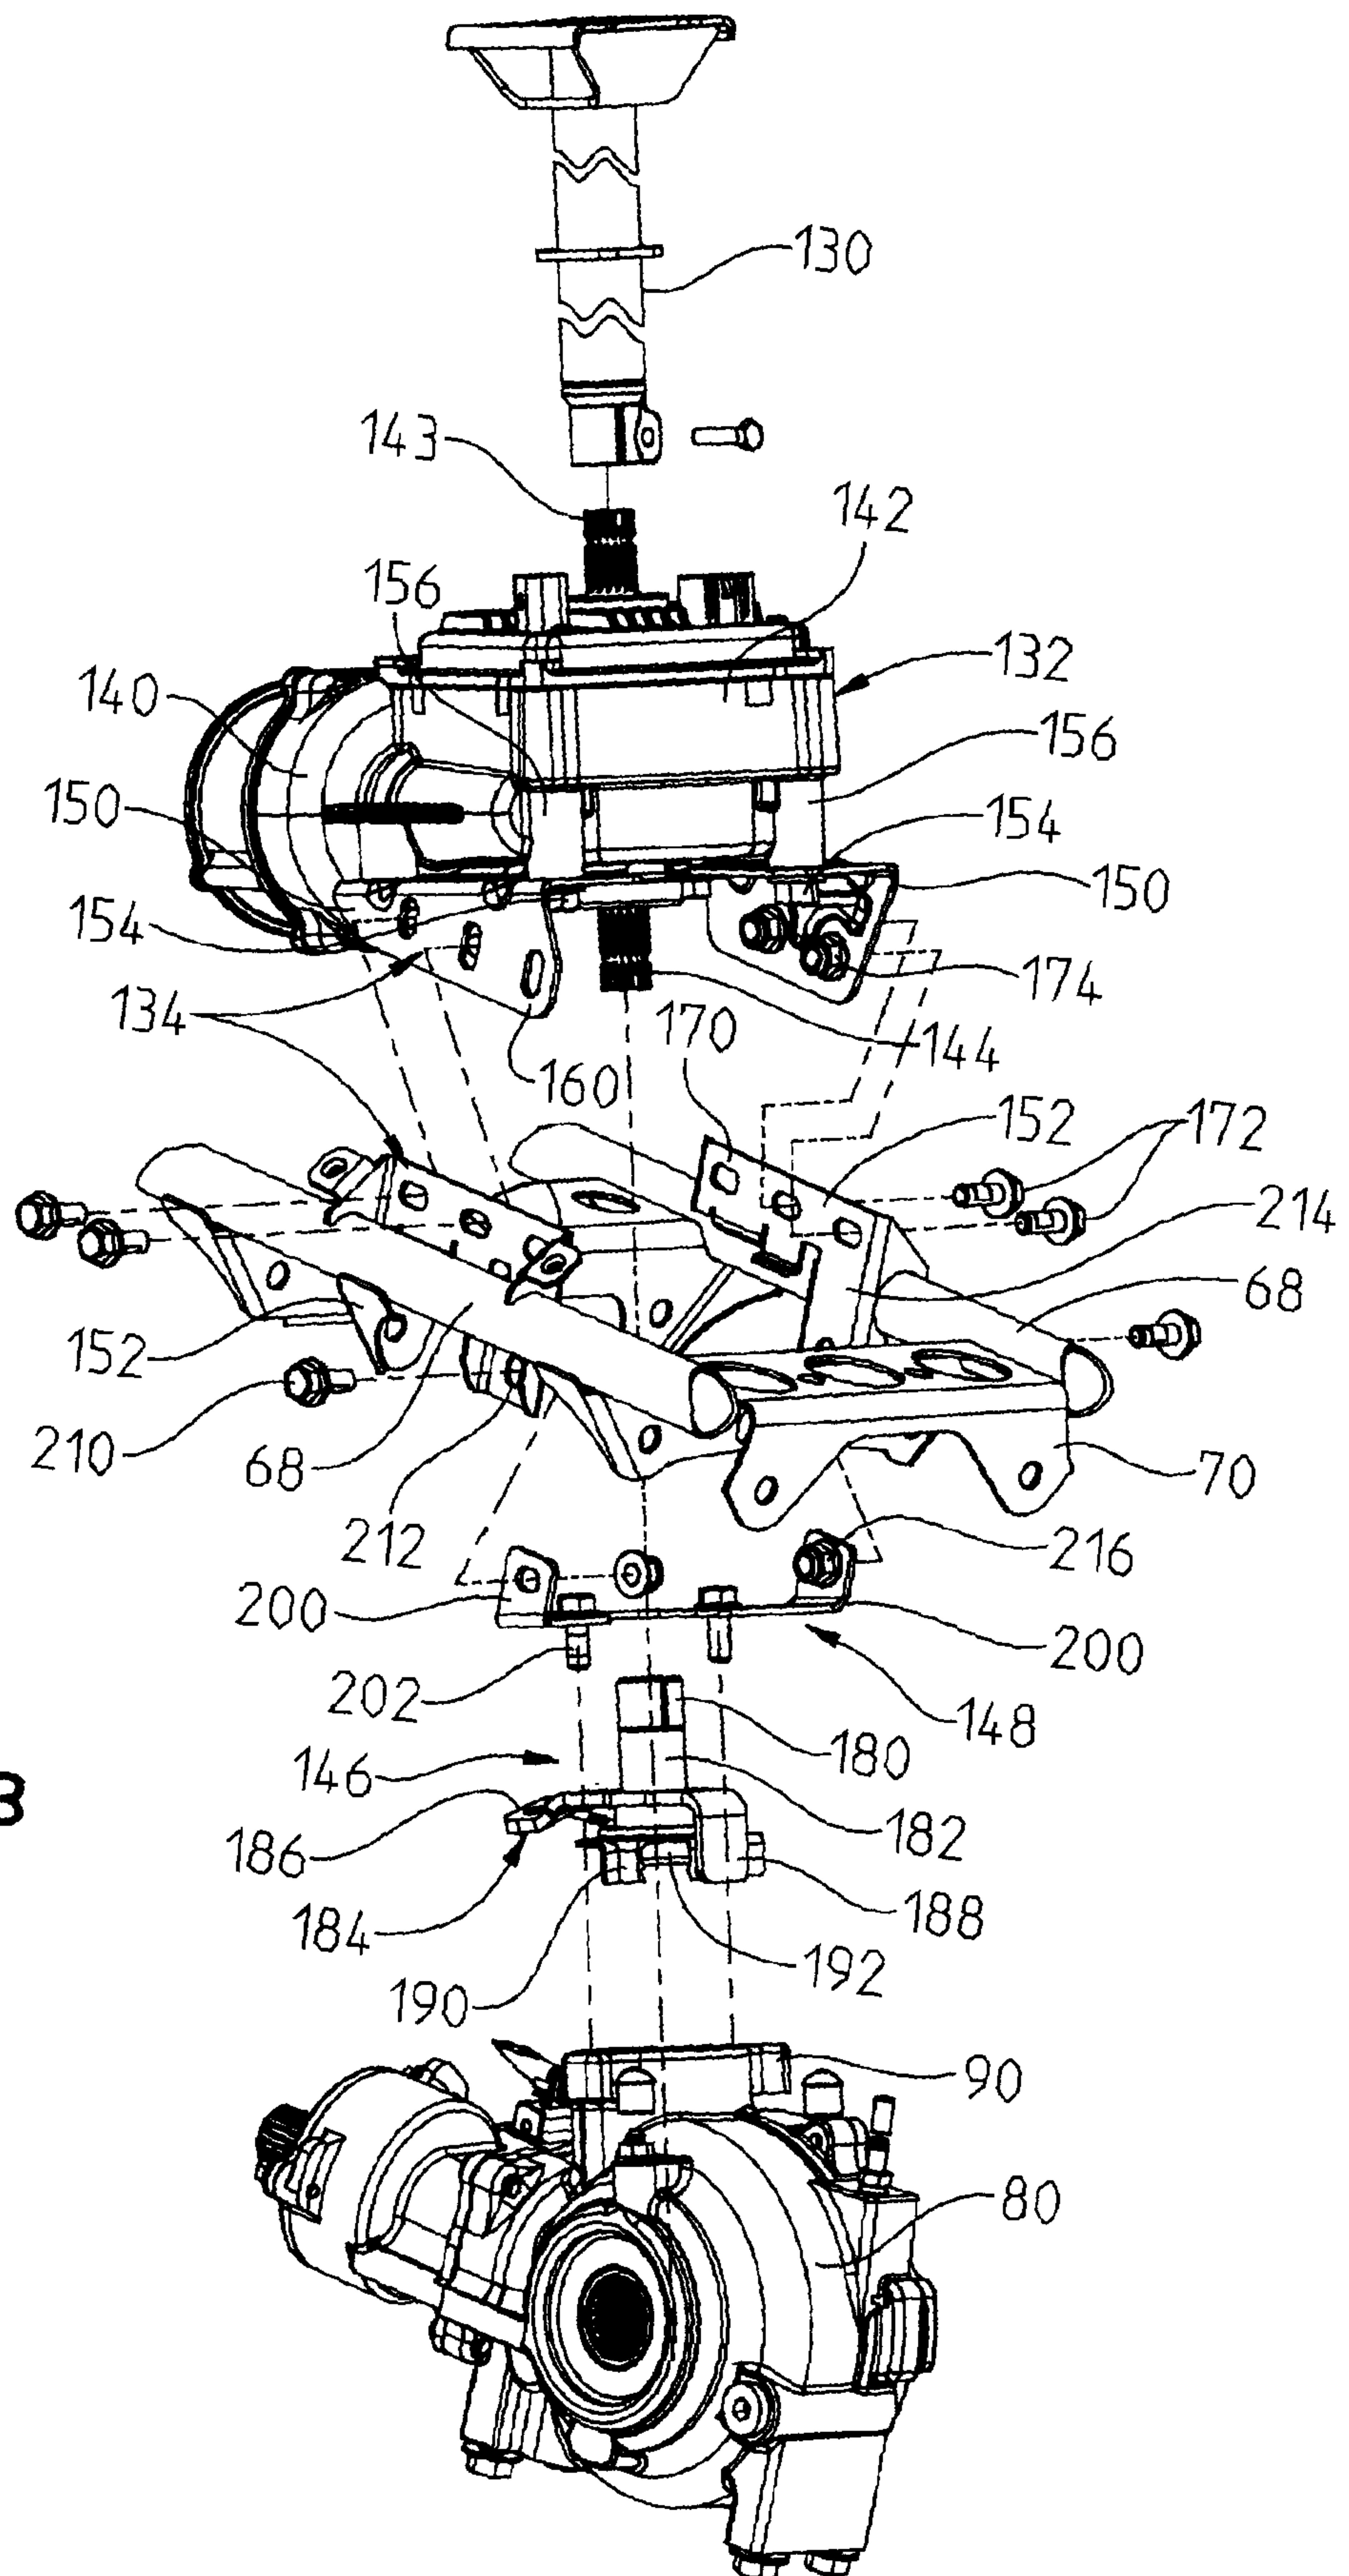