



(51) International Patent Classification:

C09K 8/54 (2006.01) E21B 41/02 (2006.01)
E21B 37/06 (2006.01)

(21) International Application Number:

PCT/US2019/052308

(22) International Filing Date:

21 September 2019 (21.09.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/734,752 21 September 2018 (21.09.2018) US
16/577,972 20 September 2019 (20.09.2019) US

(71) Applicant: **BAKER HUGHES, A GE COMPANY, LLC**
[US/US]; 17021 Aldine Westfield, Houston, TX 77073
(US).


(72) Inventor: **MENENDEZ, Carlos, M.**; 16322 Shining Rock
Ln., Houston, TX 77095 (US).

(74) Agent: **BEEBE, James, L.**; Intellectual Property Counsel,
Baker Hughes, a Ge Company, LLC, 17021 Aldine West-
field, Houston, TX 77073 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: ORGANIC BLEND ADDITIVE USEFUL FOR INHIBITING LOCALIZED CORROSION OF EQUIPMENT USED IN OIL AND GAS PRODUCTION

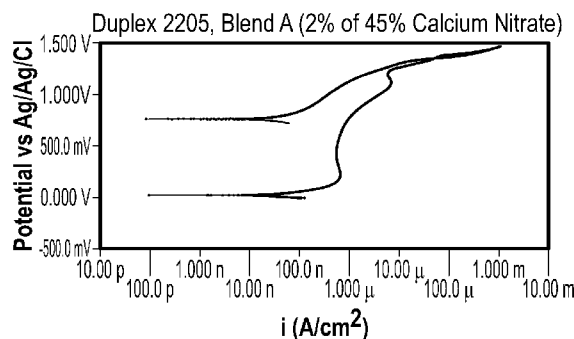

Blend	E _{ocp} (Volts)	E _{pit} -E _{ocp} (Volts)	E _{rep} -E _{ocp} (Volts)
A	0.014	0.791	1.000
B	0.147	0.647	0.953
C	0.004	0.755	1.005

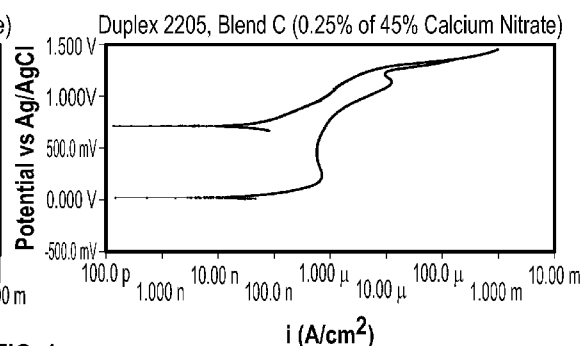
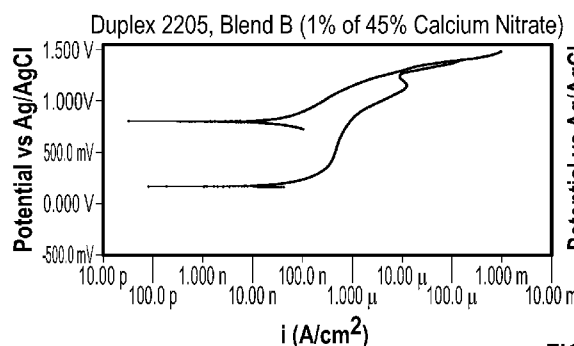


FIG. 1

(57) Abstract: An organic blend chemical additive comprising more than 50 wt.% organic solvent (e.g. methanol and/or ethylene glycol), less than 10 wt.% water, a nitrate salt, a maleic acid copolymer, and optionally an imidazoline may be delivered to a production well through a conduit having a stainless steel and corrosion resistant metal alloy surface, such as a capillary string or an umbilical tubing, the organic blend chemical additive being shown to be useful in inhibiting localized corrosion of and improving the repassivation of the equipment or conduit.

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

**ORGANIC BLEND ADDITIVE USEFUL FOR INHIBITING LOCALIZED
CORROSION OF EQUIPMENT USED IN OIL AND GAS
PRODUCTION**

TECHNICAL FIELD

[0001] The invention relates to the use of an organic chemical blend additive to inhibit corrosion in oil and gas production applications, and more particularly relates to using such an additive for inhibiting localized corrosion of chemical injection equipment used in the production of oil and gas.

BACKGROUND

[0002] It is well known that steel and alloy made tubulars and equipment used in the production of oil and gas are exposed to corrosive environments. Such environments generally contain acid gases (CO₂ and H₂S) and brines of various salinities. Under such conditions, the steel or alloy will corrode, possibly leading to equipment failures, injuries, environmental damage, and economic loss.

[0003] While the rate at which corrosion will occur depends on a number of factors, such as the type of metal or alloy, partial pressure of the acid gases, salinity, pH, temperature, etc., some sort of corrosion almost inevitably occurs. One way to mitigate this problem is to introduce corrosion inhibitors in the hydrocarbon production system.

[0004] Corrosion inhibitors are widely introduced into oil and gas production wells and pipeline transmission lines to help prevent or reduce corrosion of carbon steels surfaces coming into contact with fluids or gases produced from wells.

[0005] Methanol-based organic blends containing corrosion and scale inhibitors are sometimes delivered to production fluids or gases through capillary strings and umbilical tubing to aid in reducing or preventing corrosion of or formation of scale upon carbon steel surfaces in the well that come into contact with the production fluid or

gas. However, the use of such methanol-based organic blends, because of the presence of chlorides, have been shown to generate pitting corrosion of (i.e. localized corrosion) and to reduce the repassivation ability of the stainless steel (e.g. 316L) and corrosion resistant alloy (e.g. Duplex 2205) capillary strings and umbilical tubing that are being used to deliver chemicals into the production well.

[0006] It would be advantageous to develop an organic chemical blend additive that would help to inhibit this localized corrosion of the stainless steel or corrosion resistant alloy made capillary string and umbilical tubing while still being useful to inhibit corrosion of and reduce scale formation upon other metal surfaces in a production well.

SUMMARY

[0007] There is provided, in one form, a method of inhibiting corrosion upon a metal surface of equipment used to deliver additives into a production well in which an organic chemical blend is introduced to the well through a conduit, such as a capillary string or umbilical tubing, the organic chemical blend additive being made up of a nitrate salt, a maleic acid copolymer, greater than 50 wt.% of an organic solvent, other organic components and less than 10 wt.% water and the amount of the organic chemical blend additive introduced being effective to inhibit localized corrosion of and to improve repassivation potential of a stainless steel and corrosion resistant alloy surface of the capillary string or umbilical tubing.

[0008] There is also provided, in another non-restrictive form, a treated system containing a conduit for delivering additives into a production well having a metal or metal alloy surface, and an organic chemical blend additive comprising a nitrate salt, a maleic acid copolymer, other organic components, greater than 50 wt.% of an organic solvent, and less than 10 wt.% water.

[0009] In yet another form, an imidazoline may additionally be included in the organic chemical blend additive to aid in inhibiting

corrosion or improving repassivation of metal surfaces of equipment and conduits used to deliver additives into a production well.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a set of graphs comparing the pitting potential, repassivation potential, and open circuit potential when organic chemical blend additives having the compositions set forth in Table 1 are applied to a Duplex 2205 alloy surface of a capillary string.

[0011] FIG. 2 is a set of graphs comparing the pitting potential, repassivation potential, and open circuit potential when the organic chemical blend additives having the compositions set forth in Table 1 are applied to a stainless steel 316L surface of a capillary string.

[0012] FIG. 3 is a graph comparing the performance of an organic chemical blend additive that contains both calcium nitrate and a maleic acid copolymer to the performance of an organic chemical blend additive that doesn't include a maleic acid copolymer upon a Duplex 2205 alloy surface and a stainless steel 316L surface of a capillary string.

[0013] FIG. 4 is a set of graphs comparing the pitting potential, repassivation potential, and open circuit potential when organic chemical blend additives having the compositions set forth in Table 2 are applied to a Duplex 2205 alloy surface and a stainless steel 316L surface of a capillary string.

DETAILED DESCRIPTION

[0014] As previously noted, metal and metal alloy made conduits, pipes, tubing, and other equipment used to deliver chemicals and additives useful in the production of oil and gas from a well can experience localized corrosion (pitting) from the chemicals being delivered. It has been discovered that an effective amount of organic chemical blend additive made predominantly of an organic solvent containing a nitrate, a maleic acid copolymer, less than 10 wt.% water, and optionally an imidazoline may be useful to inhibit localized

corrosion and improve repassivation of metal and metal alloy surfaces of equipment used to deliver additives and chemicals to production wells.

[0015] The most commonly used equipment for delivering chemicals and additives to production wells are capillary strings and umbilical tubing. These conduits run down to the bottom of the well and the intake point of an electrical submersible pump to allow for delivery of chemicals and additives to the fluid in the well. Often, these pieces of equipment are made from stainless steel, such as 316L, or corrosion resistant alloys, such as Duplex 2205, but are not necessarily limited to these specific types of metal or metal alloys.

[0016] In one embodiment, the organic chemical blend additive contains or includes a nitrate salt, a maleic acid copolymer, greater than 50 wt.% of an organic solvent, and less than 10 wt.% water.

[0017] Suitable nitrates salts include, but are not limited to, calcium nitrate, sodium nitrate, potassium nitrate, or a combination thereof. Calcium nitrate, in particular, is shown to have better solubility in organic solvents such as methanol or ethylene glycol.

[0018] An example of the maleic acid copolymer that may be used in the organic chemical blend additive is, without limitation, propenoic acid, ethyl ester, polymer with ethenyl acetate, and/or 2,5-furandione, hydrolyzed. This copolymer is included to aid in the reduction of scale formation in the production fluid or any metal surfaces in contact with production fluid. The amount of maleic acid copolymer in the organic chemical blend additive ranges from about 1 wt.% to about 15 wt.%.


[0019] Suitable organic solvents useful in the organic chemical blend additive may include methanol, ethylene glycol, isopropyl alcohol, 2-butoxyethanol, propylene glycol, butyl carbitol, and combinations thereof.

[0020] In one non-restrictive embodiment, the blend is organic-solvent based. That is, the amount of the organic solvent in the organic chemical blend additive is greater than 50% wt.% and alternatively, greater than 70 wt.%, based on the total amount of organic chemical

blend additive. Water is present in a small amount, for example, in an amount less than 10 wt.%, and alternatively less than 5 wt.%, based on the total amount of organic chemical blend additive.

[0021] In one non-limiting embodiment, the amount of nitrate present in the blend ranges from about 0.25% of a 45% aqueous solution of nitrate salt to about 5% of a 45% aqueous solution of the nitrate salt. In yet another embodiment, the nitrate salt is present in the organic chemical blend additive in an amount less 2 % of a 45% aqueous solution of nitrate.

[0022] In an alternative embodiment, the organic chemical blend additive further comprises an imidazoline to help improve corrosion inhibition and repassivation potential of the metal surface of a conduit used to deliver chemicals and additives to a production well. Imidazolines useful in the organic chemical blend additive for this purpose may have the following general formula:



In this formula, R describes the hydrophobic tail portion of the molecule and P describes the pendant group of the molecule. In one embodiment, R is a tall oil fatty acid. The pendant group, P, may be selected from a group consisting of $(\text{CH}_2-\text{CH}_2)-\text{X}$, $(\text{CH}_2-\text{CH}_2-\text{O})_n\text{H}$, $\text{CH}_2-\text{CH}_2-(\text{NH}-\text{CH}_2-\text{CH}_2)^y\text{NH}-\text{CO}-\text{R}_1$, wherein X may be NH_2 , OH, or $\text{NH}-\text{CO}-\text{R}_2$, n is 10, and y is equal to or greater than 2. The proportions of the optional imidazoline in the organic chemical blend additive may range from about 5 wt.% independently to about 30 wt.%.

[0023] It is difficult to predict in advance what amount of organic chemical blend additive should be introduced to the production well to achieve an optimum corrosion inhibition and repassivation

improvement because such amount is dependent upon many interrelated variables such as, for example, the nature of the production fluid being extracted from the production well, the nature of other the oilfield chemicals being delivered, and nature of the metal surface of the conduits and other equipment used to deliver chemicals to the production well or to carry the production fluid, etc.

Nevertheless, in one non-limiting example, the amount of organic chemical blend additive being delivered ranges from about 10 ppm independently to about 1000 ppm independently. Alternatively, the amount of organic chemical blend additive being delivered may range from about 50 ppm independently to about 300 ppm independently or range from about 75 ppm independently to about 150 ppm independently. The amounts in this paragraph are based on the total amount of production fluid in the well. As used herein with respect to a range, "independently" means that any threshold may be used together with another threshold to give a suitable alternative range, e.g. about 50 ppm independently to about 1000 ppm independently is also considered a suitable alternative range.

[0024] For purposes of this disclosure, the term "inhibit" is defined to mean reduce, suppress, or prevent. It is not necessary for the corrosion, localized or general, and scaling of the metal surfaces of capillary string, umbilical, tubing, or other oil and gas production or piping having metal surfaces to be entirely prevented for the chemical blend additives discussion herein to be considered effective, although complete prevention is a desirable goal.

[0025] The invention will be further described with respect to the following Examples, which are not meant to limit the invention, but rather to further illustrate the various embodiments.

EXAMPLES

[0026] The Cyclic Potentiodynamic Polarization ("CPP") graphs in Figure 1 and Figure 2 depict the pitting potential, repassivation

potential, and open circuit potential performance of organic chemical blend additives having the compositions set forth in Table 1 below upon a Duplex 2205 alloy surface and upon a stainless steel 316L surface of a capillary string. $E_{rep} - E_{ocp}$ is the difference between the repassivation potential (E_{rep}) and the open circuit potential (E_{ocp}). The larger the difference in these values, the more the metal tends to repassivate. An $E_{rep} - E_{ocp} > 200$ mV represents an effective protection of the metal surface.

[0027] The curves on Figure 1 demonstrate that an organic chemical blend additive containing a maleic acid copolymer, at least 50 wt.% organic solvent, and less than 10 wt.% water, and 0.25% of a 45% aqueous solution of calcium nitrate achieves the same amount of corrosion inhibition and repassivation improvement on Duplex 2205 metal surface as an organic chemical blend additive containing a maleic acid copolymer, at least 50 wt.% organic solvent, and less than 10 wt.% water, and 1 or 2% of a 45% aqueous solution of calcium nitrate on the same type metal surface.

[0028] The performance was a bit different when the organic chemical blend additive was applied to a stainless steel 316L surface. While an additive containing only 1% of a 45% aqueous solution of calcium nitrate performed just as well in inhibiting corrosion and improving repassivation potential as an additive that contained 2% of a 45% aqueous solution of calcium nitrate, the results were not as good when an additive with 0.5% of a 45% aqueous solution of calcium nitrate was applied to the stainless steel surface, as shown the curves in Figure 2. These results indicate that determining what amount of components is necessary to achieve good results may depend on the stainless steel or alloy used on a given capillary string or umbilical tubing.

[0029] In addition, the CPP graph in Figure 3 indicates that there is a significant improvement in corrosion inhibition and repassivation improvement with an organic chemical blend additive that contains both the nitrate salt and a maleic acid copolymer, Blend B,

represented by curve B as compared to an organic chemical blend additive that doesn't include a maleic acid copolymer, Blend D, represented by curve D. These results suggest that the maleic acid copolymer may act synergistically with the nitrate salt to improve repassivation behavior and inhibit localized corrosion.

[0030] Table 1 shows the composition of Blends A, B, C, D, and E, the CPP graphs of which are shown in Figures 1, 2, and 3.

TABLE 1. Chemical Blend Additive Compositions

Component	A (%)	B (%)	C (%)	D (%)	E (%)
Maleic acid copolymer	2 - 10	2 - 10	2 - 10	0.0	2 - 10
Water	< 10	<10	< 10	< 10	< 10
Methanol	40 - 70	40 - 70	40 - 70	40 - 70	40 - 70
Ethylene Glycol	10 - 30	10 - 30	10 - 30	10 - 30	10 -30
45% Calcium Nitrate in water	2.0	1.0	0.25	1.0	0.5
Other Organic compounds	10 -25	10 - 25	10 -25	10 -25	10 -25

[0031] The CPP graphs in Figure 4 depict the pitting potential, repassivation potential, and open circuit potential curves of the organic chemical blend additives further containing an ethoxylated imidazoline, as set forth in the compositions in Table 2 below, upon a Duplex 2205 alloy surface and upon a stainless steel 316L surface.

TABLE 2. Chemical Blend Additive Compositions- with an imidazoline

Component	F (%)	G (%)
Ethoxylated Imidazoline	10 - 30	10 -30
Maleic acid copolymer	2 - 10	2 -10
Water	< 10	< 10

Methanol	40 - 70	40 - 70
Ethylene Glycol	10 - 30	10 - 30
45% Calcium Nitrate in water	0.0	0.1
Other Organic Components	10 - 25	10 - 25

[0032] Figure 4 demonstrates that the addition of an ethoxylated imidazoline to the organic chemical blend additive, for example, greatly improves the repassivation behavior of Duplex 2205 even when the organic chemical blend additive contains only 0.1% of a 45% aqueous solution of calcium nitrate, a smaller amount than otherwise employed or expected to achieve an Erep – Eocp larger than 200 mV. These results suggest that the imidazoline may act synergistically with the nitrate salt and the maleic acid copolymer to improve repassivation behavior and inhibit localized corrosion.

[0033] In the foregoing specification, the invention has been described with reference to specific embodiments thereof. However, it will be evident that various modifications and changes can be made thereto without departing from the broader spirit or scope of the invention as set forth in the appended claims. Accordingly, the specification is to be regarded in an illustrative rather than a restrictive sense. For example, metallurgy, equipment, nitrates, maleic acid copolymers, organic solvents, and other components, falling within the claimed parameters, but not specifically identified or tried in a particular fluid, blend, or method, are expected to be within the scope of this invention.

[0034] The present invention may suitably comprise, consist or consist essentially of the elements disclosed and may be practiced in the absence of an element not disclosed. For example, the method may consist of or consist essentially of introducing an organic chemical blend additive to a production well via a conduit having a metal

surface, the organic chemical blend additive consisting essentially of or consisting of a nitrate salt, a maleic acid copolymer, greater than 50 wt.% of an organic solvent, and less than 10 wt.% water. As another example, the treated system may comprise, consist of, or consist essentially of: a conduit for delivering additives to a production well having a metal or metal alloy surface; and organic chemical blend additive consisting essentially of or consisting of a nitrate salt, a maleic acid copolymer, greater than 50 wt.% of an organic solvent, and less than 10 wt.% water.

[0035] In another non-limiting embodiment, the additive may comprise, consist essentially of, or consist of a nitrate salt, a maleic acid copolymer, greater than 50 wt.% of an organic solvent, and less than 10 wt.% water.

[0036] In a different non-restrictive version, the additive may comprise, consist essentially of, or consist of, a nitrate salt, a maleic acid copolymer, an imidazoline, greater than 50 wt.% of an organic solvent, and less than 10 wt.% water.

[0037] As used herein, the terms “comprising,” “including,” “containing,” “characterized by,” and grammatical equivalents thereof are inclusive or open-ended terms that do not exclude additional, unrecited elements or method acts, but also include the more restrictive terms “consisting of” and “consisting essentially of” and grammatical equivalents thereof. As used herein, the term “may” with respect to a material, structure, feature or method act indicates that such is contemplated for use in implementation of an embodiment of the disclosure and such term is used in preference to the more restrictive term “is” so as to avoid any implication that other, compatible materials, structures, features and methods usable in combination therewith should or must be, excluded.

[0038] As used herein, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise.

[0039] As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

[0040] As used herein, the term “about” in reference to a given parameter is inclusive of the stated value and has the meaning dictated by the context (e.g., it includes the degree of error associated with measurement of the given parameter).

CLAIMS


What is claimed is:

1. A method of inhibiting corrosion comprising:
introducing an organic chemical blend additive to a production well, where the organic chemical blend additive comprises:
a nitrate,
a maleic acid copolymer,
an organic solvent in an amount greater than 50 wt.%,
based on a total amount of the organic chemical blend additive, and
less than 10 wt.% water, based on a total amount of the organic chemical blend additive.
2. The method of claim 1, wherein the organic chemical blend is introduced to the production well through a conduit made up of stainless steel or a corrosion resistant alloy.
3. The method of claim 2, wherein the conduit is a capillary string or an umbilical tubing made up of stainless steel or a corrosion resistant alloy.
4. The method of claim 2, comprising the further step of inhibiting localized corrosion of the stainless steel or corrosion resistant alloy surface of the conduit.
5. The method of claim 2, comprising the further step of improving the repassivation potential of the stainless steel or corrosion resistant alloy surface of the conduit.

6. The method of claim 1, wherein nitrate is selected from a group consisting of calcium nitrate, sodium nitrate, potassium nitrate, and a combination thereof.
7. The method of claim 1, wherein the maleic acid copolymer is a polycarboxylic acid having the following chemical description:
propenoic acid, ethyl ester, polymer with ethenyl acetate and 2,5 furandione, hydrolyzed.
8. The method of claim 1, wherein the organic chemical blend additive further comprises an imidazoline.
9. The method of claim 1, wherein the nitrate is in solution form and present in the organic chemical blend additive in an amount less than 2 wt.%, based on the total amount of the organic chemical blend additive.
10. A treated system comprising:
 - a conduit for delivering additives to a production well having a metal or metal alloy surface; and
 - an organic chemical blend additive comprising:
 - a nitrate,
 - a maleic acid copolymer,
 - an organic solvent in an amount greater than 50 wt.%, based on a total amount of the organic chemical blend additive, and
 - less than 10 wt.% water, based on a total amount of the organic chemical blend additive.
11. The treated system of claim 10, wherein the system further comprises a production fluid and the concentration of the organic chemical blend additive in the system ranges from about 10 ppm to

about 1000 ppm, based on a total amount of the production fluid present in the system.

12. The treated system of claim 10, wherein the treated fluid further comprises an imidazoline having a general formula:



where R is a tall oil fatty acid and where P is selected from a group consisting of $(\text{CH}_2-\text{CH}_2)\text{-X}$, $(\text{CH}_2-\text{CH}_2\text{-O})_n\text{H}$, and $\text{CH}_2-\text{CH}_2\text{-(NH-CH}_2\text{-CH}_2\text{)}^y\text{NH-CO-R}_1$; wherein X is NH_2 , OH, or NH-CO-R_2 , n is 10, and y is equal to or greater than 2.


13. The treated system of claim 12, wherein the imidazoline is an ethoxylated imidazoline.

14. The treated system of claim 10, wherein the organic solvent is selected from a group consisting of methanol, ethylene glycol, isopropyl alcohol, 2-butoxyethanol, propylene glycol, butyl carbitol, and combinations thereof.


15. The treated system of claim 10, where the organic chemical blend additive comprises less than 5 wt.% water, based on the total amount of the organic chemical blend additive.

16. The treated system of claim 10, wherein the amount of maleic acid copolymer in the organic chemical blend additive ranges from about 1 wt.% to about 15 wt.%.


17. The treated system of claim 10, wherein the amount of imidazoline in the organic chemical blend additive ranges from about 5 wt.% to about 30 wt.%.

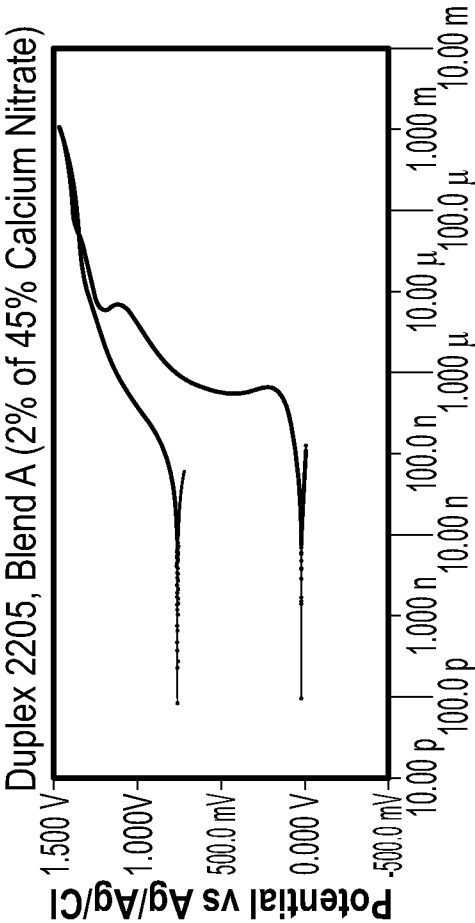

$i \text{ (A/cm}^2\text{)}$

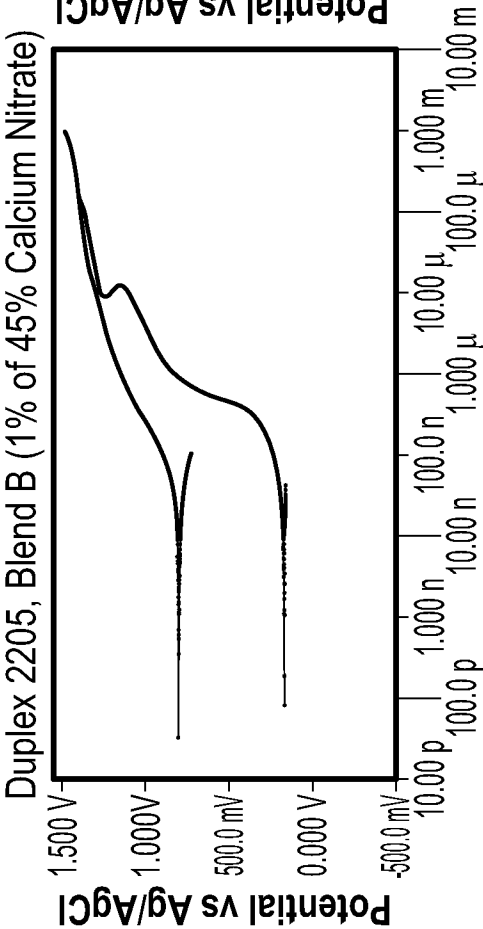

$i \text{ (A/cm}^2\text{)}$

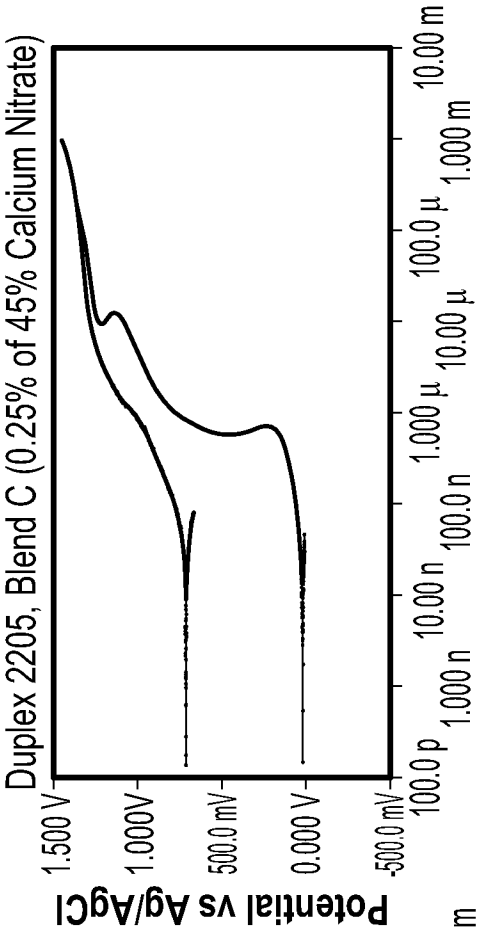

$i \text{ (A/cm}^2\text{)}$

FIG. 1

2/4

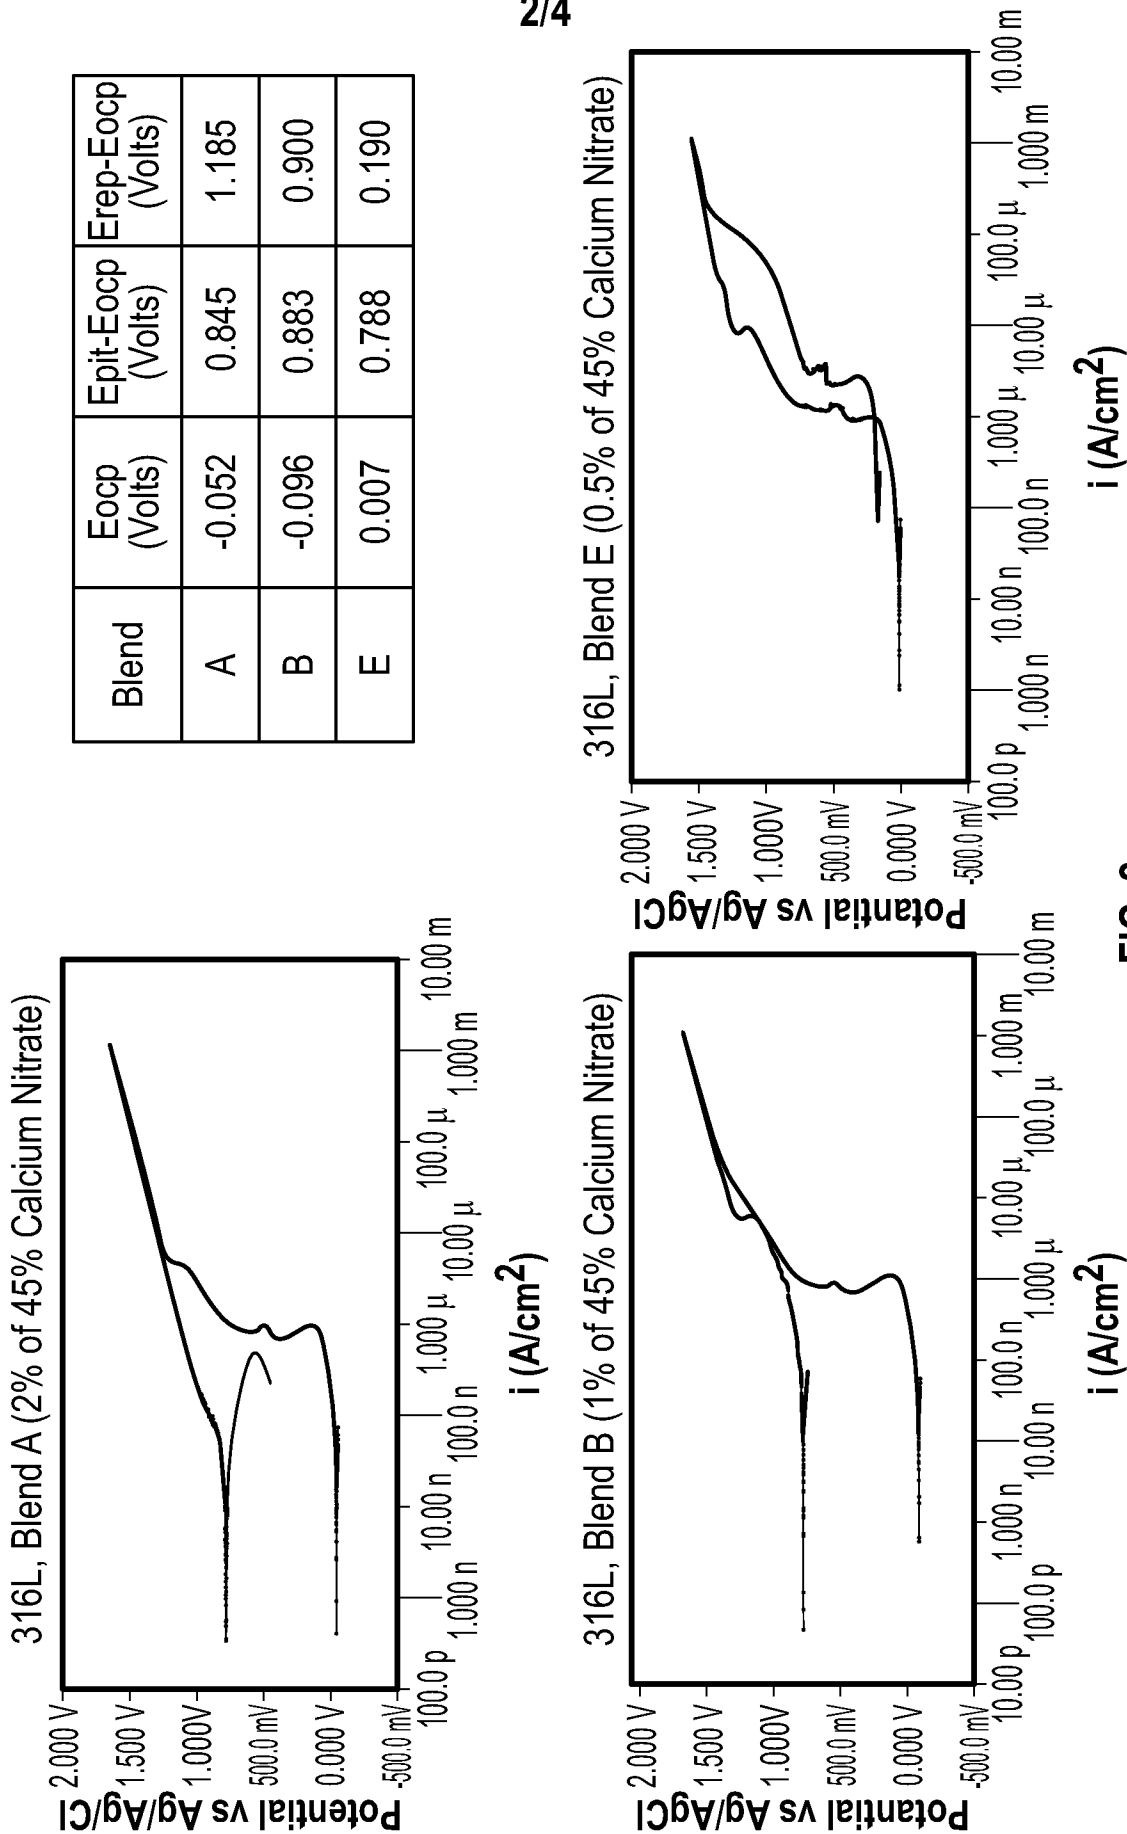


FIG. 2



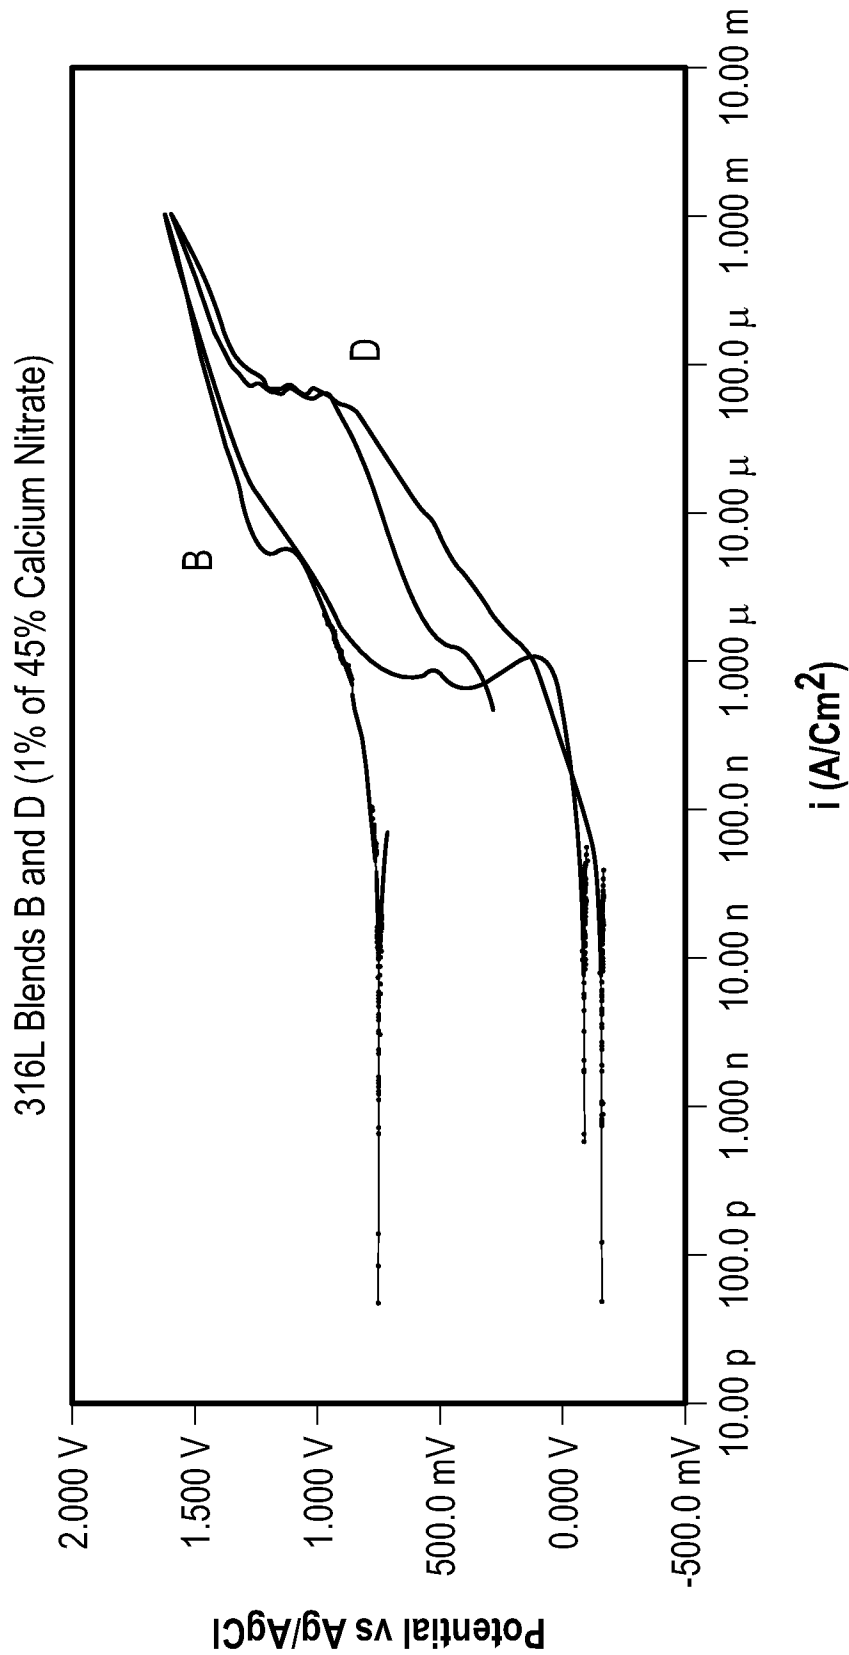



FIG. 3

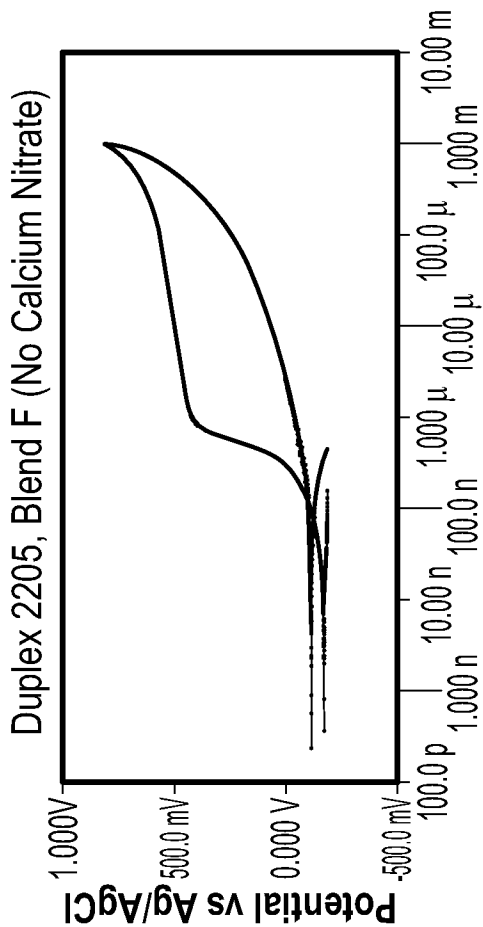

$i \text{ (A/cm}^2\text{)}$

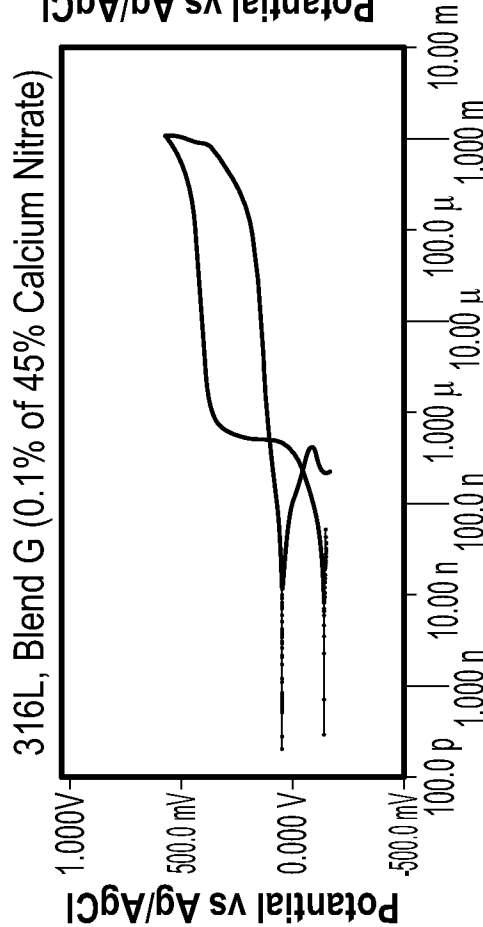

$i \text{ (A/cm}^2\text{)}$

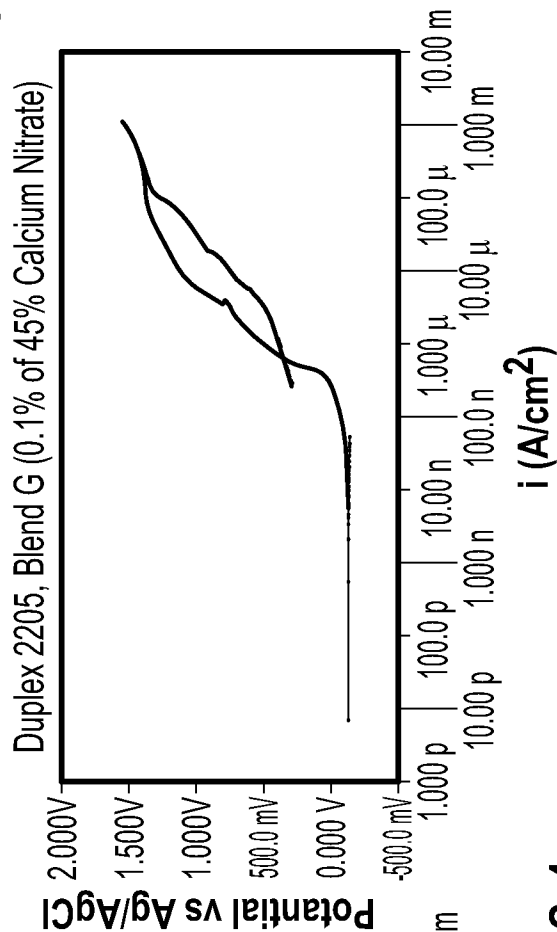

$i \text{ (A/cm}^2\text{)}$

FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2019/052308**A. CLASSIFICATION OF SUBJECT MATTER****C09K 8/54(2006.01)i, E21B 37/06(2006.01)i, E21B 41/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09K 8/54; A47J 36/02; C09K 8/532; C23F 11/04; C23F 11/08; C23F 11/14; E21B 37/06; E21B 41/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: nitrate, maleic acid copolymer, organic solvent, water, localized corrosion, conduit, production well, imidazoline

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2018-0105732 A1 (CLARIANT INTERNATIONAL, LTD.) 19 April 2018 See paragraphs [0001], [0004], [0034]-[0044], [0071], [0123]-[0139].	1-17
A	WO 2017-189528 A1 (ECOLAB USA, INC.) 02 November 2017 See the whole document.	1-17
A	US 2007-0075120 A1 (YANG, BO et al.) 05 April 2007 See the whole document.	1-17
A	US 9518328 B1 (CORTEC CORPORATION) 13 December 2016 See the whole document.	1-17
A	FINSGAR, MATJAZ et al., "Application of corrosion inhibitors for steels in acidic media for the oil and gas industry: A review", Corrosion Science, 2014, Vol. 86, pages 17-41 See the whole document.	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 January 2020 (10.01.2020)

Date of mailing of the international search report

10 January 2020 (10.01.2020)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

HAN, Inho

Telephone No. +82-42-481-3362



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/052308

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2018-0105732 A1	19/04/2018	AR 104127 A1 BR 112017020781 A2 CA 2981370 A1 DK 3277771 T3 EA 201792183 A1 EP 3277771 A1 EP 3277771 B1 TW 201706393 A WO 2016-155967 A1	28/06/2017 26/06/2018 06/10/2016 08/07/2019 31/01/2018 07/02/2018 08/05/2019 16/02/2017 06/10/2016
WO 2017-189528 A1	02/11/2017	AU 2017-257627 A1 CA 3021971 A1 EP 3449038 A1 US 2017-0306504 A1	08/11/2018 02/11/2017 06/03/2019 26/10/2017
US 2007-0075120 A1	05/04/2007	EP 1910587 A1 EP 1910587 B1 JP 2008-546910 A KR 10-1300541 B1 KR 10-2008-0027339 A US 2010-0196773 A1 US 2012-0288404 A1 US 8066902 B2 US 9660277 B2 WO 2007-002558 A1	16/04/2008 07/08/2019 25/12/2008 02/09/2013 26/03/2008 05/08/2010 15/11/2012 29/11/2011 23/05/2017 04/01/2007
US 9518328 B1	13/12/2016	None	