



- (51) **International Patent Classification:**
B01D 17/04 (2006.01) *B01D 17/022* (2006.01)
- (21) **International Application Number:**
PCT/US2016/028273
- (22) **International Filing Date:**
19 April 2016 (19.04.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/700,919 30 April 2015 (30.04.2015) US
- (71) **Applicant:** UOP LLC [US/US]; 25 East Algonquin Road, P. O. Box 5017, Des Plaines, Illinois 60017-5017 (US).
- (72) **Inventors:** CHEN, Pengfei; Uop LLC, 25 East Algonquin Road, P.O. Box 5017, Des Plaines, Illinois 60017-5017 (US). XU, Zhanping; Uop LLC, 25 East Algonquin Road, P.O. Box 5017, Des Plaines, Illinois 60017-5017 (US). WEN, Xiaoming; Uop LLC, 25 East Algonquin Road, P.O. Box 5017, Des Plaines, Illinois 60017-5017 (US).
- (74) **Agent:** ROMANO, Ashley E.; Uop LLC, 25 East Algonquin Road, P.O. Box 5017, Des Plaines, Illinois 60017-5017 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]


(54) **Title:** ACTIVE COALESCER TO REMOVE FINE LIQUID DROPLETS

FIG. 1a




FIG. 1b




FIG. 1c

(57) **Abstract:** Separation processes and separation apparatus are described. The process includes introducing a stream of liquid containing dispersed droplets of another liquid into a separation apparatus comprising a vessel having at least one mesh screen covering substantially all of the cross-section of the vessel. The mesh screen is periodically slightly moved so that the wires of the mesh screen contact the dispersed droplets and some of the dispersed droplets coalesce on the wires. The coalesced droplets rise or fall from the wires through the stream of the second liquid. The coalesced droplets are collected in a portion of the vessel. A stream of the second liquid having a reduced level of dispersed droplets is recovered.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, —
GW, KM, ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

ACTIVE COALESCER TO REMOVE FINE LIQUID DROPLETS

STATEMENT OF PRIORITY

This application claims priority to U.S. Application No. 14/700919 which was filed April 30, 2015, the contents of which are hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

There are a variety of hydrocarbon conversion processes, and these processes utilize different catalysts.

Alkylation is typically used to react light olefins, for example mixtures of alkenes such as propylene and butylene, with isobutane to produce a relatively high-octane branched-chain paraffinic hydrocarbon fuel, including isoheptane and isooctane. Similarly, an alkylation reaction can be performed using an aromatic compound such as benzene in place of the isobutane. When using benzene, the product resulting from the alkylation reaction is an alkylbenzene (e.g. cumene, linear alkylbenzenes, etc.).

The alkylation of paraffins with olefins for the production of alkylate for gasoline can use a variety of catalysts. The choice of catalyst depends on the end product a producer desires. Typical alkylation catalysts include concentrated sulfuric acid or hydrofluoric acid. However, sulfuric acid and hydrofluoric acid are hazardous and corrosive, and their use in industrial processes requires a variety of environmental controls. Sulfuric acid alkylation requires an often expensive regeneration process.

There has been a move to replace the use of sulfuric acid and hydrofluoric acid with more environmentally friendly materials.

One material that has been studied is ionic liquid. Ionic liquids are essentially salts in a liquid state, and are described in US Patent Nos. 4,764,440, 5,104,840, and 5,824,832. The properties vary extensively for different ionic liquids, and the use of ionic liquids depends on the properties of a given ionic liquid. Depending on the organic cation of the ionic liquid and the anion, the ionic liquid can have very different properties. Ionic liquids provide advantages over other catalysts, including possibly posing less of an environmental threat than catalysts like HF, and being non-volatile.

Processes utilizing ionic liquids as catalysts in hydrocarbon conversion processes, such as alkylation, isomerization, disproportionation, reverse disproportionation, and oligomerization have been developed.

5 In biphasic ionic liquid processes, such as alkylation, small droplets of ionic liquid become dispersed in the continuous hydrocarbon phase. Because ionic liquids are typically fairly expensive, the ionic liquid catalysts need to be recovered. Some recovery of the droplets of ionic liquid can be accomplished by gravity settling due to the density difference between the ionic liquid and the hydrocarbon, or other separation processes.

10 However, fine droplets of ionic liquid are difficult to be separated by gravity, and some remain dispersed in the hydrocarbon phase after these separation processes. These small droplets are carried out with the hydrocarbon. In addition to requiring post-treatments to prevent droplets from fouling down-stream equipment, they are an economic loss.

15 One process designed to separate the fine droplets of ionic liquid from the hydrocarbon is described in US Patent No. 8,067,656. A coalescer material having a stronger affinity for the ionic liquid than the hydrocarbons is used. The coalescer material can be a high surface area material having a large amount of contact area to which the dispersed ionic liquids can adhere. However, these materials may be prone to plugging due to fine openings or channels in the coalescence medium.

20 Therefore, there remains a need for processes and devices for recovering the dispersed fine droplets of liquid.

SUMMARY OF THE INVENTION

25 One aspect of the present invention is a process for the separation of a first liquid from a continuous phase of a second liquid containing dispersed droplets of the first liquid. In one embodiment, the process includes introducing a stream of the continuous phase of the second liquid containing the dispersed droplets of the first liquid into a separation apparatus comprising a vessel containing at least one mesh screen covering substantially all of a cross-section of the vessel, the mesh screen made of wires. The mesh screen is periodically slightly rotated back and forth so that the wires of the mesh screen contact the dispersed droplets of the first liquid and at least a portion of the dispersed droplets of the first

liquid coalesce on the wires. Coalesced droplets of the first liquid are formed on the wires, and the coalesced droplets are allowed to move from the wires through the stream of the second liquid. The coalesced droplets are collected in a portion of the vessel to form a layer of the first liquid and a stream of the continuous phase of the second liquid having a reduced level of dispersed droplets of the first liquid. The stream of the continuous phase of the second liquid having the reduced level of dispersed droplets of the first liquid is recovered. The layer of the first liquid can also be recovered, if desired.

Another aspect of the invention is a separation apparatus. In one embodiment, the separation apparatus includes a vessel having an inlet and at least two outlets; and at least one mesh screen covering substantially all of a cross-section of the vessel, the at least one mesh screen made of wires, the at least one mesh screen being movably mounted in the vessel.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A, 1B, and 1C illustrate three embodiments of a mesh screen which can be used in the present invention.

Fig. 2 illustrates one embodiment of a separation process of the present invention utilizing the mesh screen.

Fig. 3A and 3B illustrate other embodiments of a separation process of the present invention utilizing the mesh screen.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides processes and separation apparatus for removing fine droplets of a first liquid dispersed in a second liquid, such as fine droplets of ionic liquid in a stream of a continuous phase of hydrocarbon using a mesh screen which moves slightly. In contrast to traditional coalescing media which are static, the moving mesh screen provides an active way to capture the fine dispersed droplets. The holes of the mesh screen are larger than typical coalescing media to avoid plugging. The periodic sweeping motion provides the same or an increased chance of capturing the dispersed droplets compared to typical coalescing media.

Figs. 1A, 1B, and 1C illustrate several designs of the mesh screens 100. The separation apparatus includes at least one mesh screen 100 which covers substantially all of the cross-section of the vessel. By substantially all of the cross-section of the vessel, we mean that it covers at least 90% of the cross section, or at least 95%, or at least 97%.

5 In the following discussion, the separation of fine ionic liquid droplets from a continuous hydrocarbon phase is used as an example to illustrate the process. In this case, the density of the dispersed ionic liquid droplets is greater than that of the continuous hydrocarbon phase.

10 Periodically, the mesh screen 100 moves slightly in the vessel. By moving slightly, we mean, moving the mesh screen a distance larger than the maximum spacing between the wires and less than twice the maximum spacing between the wires in the direction of movement, e.g. typically between one and two times the spacing d between adjacent wires in the rotating direction to ensure the sweeping of the whole cross section of the vessel by the wires.

15 The openings in the mesh screen are relatively large to avoid or reduce plugging, e.g., the distance d between two adjacent wires of the mesh screen is typically in the range of 0.25cm to 2.5 cm.

20 In some embodiments, the size of the openings varies depending on the location of the opening. For example, in the embodiments shown in Figs. 1B and 1C, the distance d between adjacent wires at the outer edge of the mesh screen is greater than the distance d in the center part of the mesh screen.

25 The purpose of the movement is to increase the likelihood of contact between the fine droplets and the wires in the mesh screen as the liquid with the droplets flows through the mesh screen. In some embodiments, the movement is side to side, horizontally, vertically, or diagonally, for example. In other embodiments, the movement is rotational. In this case, the mesh screen rotates around the center axis slightly, e.g., less than 10° , or less than 7° , or less than 5° , or less than 4° , or less than 3° , or less than 2° .

30 For example, when the maximum spacing (d) on mesh screen as shown in Fig. 1C is 1.25cm, and the radius of separation tank and the mesh screen is 1m, then the rotation magnitude is between 0.72° and 1.43° for a radial wire to move a distance of $1d$ and $2d$, respectively.

In another example, when a fine ionic liquid droplet flows with the continuous liquid in a velocity (v_f) of 0.0061m/s through the mesh screen, and the thickness of the mesh wires is 0.25mm, then the time for the fine ionic liquid droplet to pass through the mesh screen is 0.041s. In this case, the moving velocity at the outer edge of the mesh screen needs to be at least 0.30m/s for a wire to sweep a distance of 1.25cm so that the wire has a chance to contact with the passing droplet. The angular velocity of rotation of the mesh screen is 0.31/s. Rotating the mesh screen back and forth slightly is better than continuous rotation of the mesh screen in one direction. It minimizes the disturbance created by the motion of the mesh screen and therefore minimizes the mixing of the separated first and second liquids. In addition, the design of motion frequency, wire thickness, and maximum spacing between wires can be optimized to minimize turbulence or disturbance that may hinder separation.

For vessels with rectangular or square cross section, the mesh screen can be designed with its length or width slightly smaller than that of the tank so that the screen can be moved side to side (horizontally, vertically, or diagonally) to cover the cross-section of the vessel fully.

Because the moving mesh screen covers substantially all of the cross-section of the vessel, theoretically all of the fine dispersed droplets will be captured by the wires of the mesh screen, even though the periodic movement is small.

When the fine droplets are captured on the wires of the mesh screen, the droplets coalesce into larger droplets which are easier to settle out of the second liquid. The layer of the first liquid can then be recovered and recycled to a conversion zone or other process zone where the first liquid is used.

After passing through the mesh screen, the stream of the continuous phase of the second liquid will have a lower level of the dispersed droplets of the first liquid than the incoming stream.

The hydrocarbon stream containing dispersed ionic liquid droplets generally contains less than 30-50% in volume, or less than 20% in volume, or less than 10% in volume, or less than 7% in volume, or less than 5% in volume, or less than 3% in volume, or less than 1% in volume, or less than 1000 ppm in volume of dispersed ionic liquid.

The dispersed ionic liquid droplets typically have a diameter of less than 1000 μ m, or less than 750 μ m, or less than 500 μ m, or less than 250 μ m, or less than 100 μ m,

or less than 75 μm , or less than 50 μm , or less than 45 μm , or less than 40 μm , or less than 35 μm , or less than 30 μm .

In order to improve the efficiency of the separation, there are typically a series of mesh screens, for example, at least two mesh screens, or at least five mesh screens, or at least ten mesh screens, preferably installed on one shaft or support for rotating or moving. The mesh screens are generally 0.5cm to 5 cm apart. The pattern and the orientation of the mesh screens in a series can be the same or different from each other. Employing a series of mesh screens increases the recovery of the small droplets.

The mesh screens can be made of materials which have a greater affinity for the liquid of the droplets than the continuous liquid phase, for example, materials having a greater affinity for the ionic liquid droplets than for the hydrocarbon continuous phase. Suitable materials for the mesh screens include, but are not limited to, metals, glass fibers, polymer fibers, or metals coated with polymers.

Because of the large size of the holes in the mesh screen, the wires can be made so that they have small bristles on them in order to capture the small droplets better without worrying plugging the mesh screen.

Fig. 2 illustrates one embodiment of a separation apparatus 110 including a vessel 120 employing three mesh screens 125. As will be understood, there could be fewer mesh screens or more mesh screens, as desired. A stream 130 of a continuous phase of a second liquid (for example, a hydrocarbon phase) containing dispersed droplets of a first liquid (for example, ionic liquid droplets) enters the vessel 120. The stream 130 flows through the mesh screens 125 which are perpendicular to the bulk liquid flow and periodically move back and forth slightly. There will be motors and associated controllers to actuate and control the movement of the mesh screens (not shown).

As the mesh screens 125 move, more droplets of the first liquid have the opportunity to contact the wires of the mesh screen 125 and coalesce on them. The coalesced droplets fall down to the bottom of the vessel 120 and form a layer 135 of the heavier first liquid.

In some embodiments, the dispersed droplets have a density less than that of the continuous phase. In that case, the lighter coalesced droplets would rise through the

continuous phase to the top of the vessel, rather than fall to the bottom. The layer of coalesced droplets will form a layer on top of the second liquid.

After passing through the mesh screens 125, the continuous phase of the second liquid has less of the first liquid. Thus, the stream 140 of the continuous phase exiting the vessel 120 has fewer droplets of the first liquid than the incoming stream 130. The stream 140 can be sent to a process zone, or further treated (not shown), as desired.

The stream 145 contains the first liquid from the layer 135. The stream 145 can be further treated, such as by regenerating ionic liquid, and/or recycled to a process (not shown).

In this embodiment, the horizontal axis h of the vessel 120 is greater than the vertical axis v .

Fig. 3A illustrates an embodiment in which the horizontal axis h is less than the vertical axis v . In this embodiment, the stream 130 enters near the bottom of the vessel 120, flows upward, and the stream 140 exits at (or near) the top, and the stream 145 exists at (or near) the bottom.

Fig. 3B illustrates another embodiment in which the horizontal axis h is less than the vertical axis v . In this embodiment, the stream 130 enters at (or near) the top of the vessel 120 and flows downward. The stream 140 exits at the side, and the stream 145 exists at (or near) the bottom. A baffle 150 can be used to reduce the potential entrainment of the droplets of the first liquid in the side draw of the second liquid.

The stream of the second liquid containing dispersed droplets of a first liquid can be a hydrocarbon stream with dispersed droplets of ionic liquid, or an aqueous system with dispersed droplets of organic solvent, for example. The hydrocarbon stream with the droplets of ionic liquid may come from a hydrocarbon conversion process, for example. Examples of processes that could generate hydrocarbon streams with dispersed ionic liquid droplets include, but are not limited to, alkylation, oligomerization, isomerization, disproportionation, and reverse disproportionation.

The hydrocarbon to be treated can be any hydrocarbon typically processed in the hydrocarbon conversion processes and will depend on the particular hydrocarbon conversion process involved. The hydrocarbon typically includes, but is not limited to, hydrocarbons containing 1 to 30 carbon atoms.

The ionic liquid can be any ionic liquid. There can be one or more ionic liquids. Suitable ionic liquids include, but are not limited to, nitrogen-containing cations and phosphorus-containing cations, such as phosphonium based ionic liquid, imidazolium based ionic liquid, ammonium based ionic liquid, lactamium based ionic liquid, pyridinium based ionic liquid, pyrrolidinium based ionic liquid, or combinations thereof.

SPECIFIC EMBODIMENTS

While the following is described in conjunction with specific embodiments, it will be understood that this description is intended to illustrate and not limit the scope of the preceding description and the appended claims.

A first embodiment of the invention is a process for the separation of a first liquid from a continuous phase of a second liquid containing dispersed droplets of the first liquid comprising introducing a stream of the continuous phase of the second liquid containing the dispersed droplets of the first liquid into a separation apparatus comprising a vessel containing at least one mesh screen covering substantially all of a cross-section of the vessel, the mesh screen made of wires; periodically slightly moving the mesh screen so that the wires of the mesh screen contact the dispersed droplets of the first liquid and at least a portion of the dispersed droplets of the first liquid coalesce on the wires; forming coalesced droplets of the first liquid on the wires; allowing the coalesced droplets to move from the wires through the stream of the second liquid; collecting the coalesced droplets in a portion of the vessel to form a layer of the first liquid and a stream of the continuous phase of the second liquid having a reduced level of dispersed droplets of the first liquid; and recovering the stream of the continuous phase of the second liquid having the reduced level of dispersed droplets of the first liquid. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph further comprising recovering the layer of the first liquid. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein there are at least two mesh screens separated by less than 5.0 cm. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein the maximum distance between adjacent wires is in a range of 0.25 cm to 2.5 cm. An embodiment of the invention is one, any

or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein a distance between adjacent wires at an outer edge of the at least one mesh screen is greater than a distance between adjacent wires in the middle of the at least one mesh screen. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein periodically slightly moving the at least one mesh screen comprises periodically moving the mesh screen a distance less than twice the maximum spacing between adjacent wires. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein periodically slightly moving the at least one mesh screen comprises periodically moving the mesh screen from a first side of the vessel to a second side of the vessel. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein periodically slightly moving the at least one mesh screen comprises periodically rotating the mesh screen less than 10° . An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein a horizontal axis of the vessel is greater than a vertical axis, and wherein the at least one mesh screen is perpendicular to a bulk flow of the stream of the continuous phase of the second liquid containing the dispersed droplets of the first liquid. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein a vertical axis of the vessel is greater than a horizontal axis, and wherein the mesh screen is perpendicular to a bulk flow of the stream of the continuous phase of the second liquid containing the dispersed droplets of the first liquid. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein the mesh screen moves at a frequency so that the dispersed droplets of the first liquid contact at least one wire when passing through the screen. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein the first liquid is an ionic liquid and the second liquid is a hydrocarbon. An embodiment of the invention is one, any or all of prior embodiments in this paragraph up through the first embodiment in this paragraph wherein the ionic liquid comprises a phosphonium based ionic liquid, an imidazolium based ionic liquid, a pyridinium based ionic liquid, a trialkyl or tetraalkyl ammonium based ionic liquid, a pyrrolidinium based ionic liquid, a lactamium based ionic

liquid, and combinations thereof. An embodiment of the invention is one, any or all of prior
embodiments in this paragraph up through the first embodiment in this paragraph wherein the
dispersed droplets of the first liquid have a diameter of less than 100 μm . An embodiment of
the invention is one, any or all of prior embodiments in this paragraph up through the first
5 embodiment in this paragraph wherein the wires are made of a material having a stronger
affinity for the first liquid than the second liquid.

A second embodiment of the invention is a separation apparatus comprising a vessel
having an inlet and at least two outlets; and at least one mesh screen covering substantially all
of a cross-section of the vessel, the at least one mesh screen made of wires, the at least one
10 mesh screen being movably mounted in the vessel. An embodiment of the invention is one,
any or all of prior embodiments in this paragraph up through the second embodiment in this
paragraph wherein there are at least two mesh screens separated by less than 5.0 cm. An
embodiment of the invention is one, any or all of prior embodiments in this paragraph up
through the second embodiment in this paragraph wherein the maximum distance between
15 adjacent wires is in a range of 0.25 cm to 2.5 cm. An embodiment of the invention is one, any
or all of prior embodiments in this paragraph up through the second embodiment in this
paragraph wherein a distance between adjacent wires at an outer edge of the at least one mesh
screen is greater than a distance between adjacent wires in the middle of the at least one mesh
screen. An embodiment of the invention is one, any or all of prior embodiments in this
20 paragraph up through the second embodiment in this paragraph wherein the at least one mesh
screen is movable a distance less than twice the maximum spacing between adjacent wires.

Without further elaboration, it is believed that using the preceding description that one
skilled in the art can utilize the present invention to its fullest extent and easily ascertain the
essential characteristics of this invention, without departing from the spirit and scope thereof,
25 to make various changes and modifications of the invention and to adapt it to various usages
and conditions. The preceding preferred specific embodiments are, therefore, to be construed
as merely illustrative, and not limiting the remainder of the disclosure in any way whatsoever,
and that it is intended to cover various modifications and equivalent arrangements included
within the scope of the appended claims.

In the foregoing, all temperatures are set forth in degrees Celsius and, all parts and
percentages are by weight, unless otherwise indicated.

CLAIMS

What is claimed is:

1. A process for the separation of a first liquid from a continuous phase of a second liquid containing dispersed droplets of the first liquid comprising:

5 introducing a stream 130 of the continuous phase of the second liquid containing the dispersed droplets of the first liquid into a separation apparatus 110 comprising a vessel 120 containing at least one mesh screen 125 covering substantially all of a cross-section of the vessel 120, the mesh screen 125 made of wires;

10 periodically slightly moving the mesh screen 125 so that the wires of the mesh screen 125 contact the dispersed droplets of the first liquid and at least a portion of the dispersed droplets of the first liquid coalesce on the wires;

forming coalesced droplets of the first liquid on the wires;

allowing the coalesced droplets to move from the wires through the stream of the second liquid;

15 collecting the coalesced droplets in a portion of the vessel 120 to form a layer 135 of the first liquid and a stream 140 of the continuous phase of the second liquid having a reduced level of dispersed droplets of the first liquid;

and

20 recovering the stream 140 of the continuous phase of the second liquid having the reduced level of dispersed droplets of the first liquid.

2. The process of claim 1 further comprising recovering the layer 135 of the first liquid.

3. The process of any of claims 1-2 wherein there are at least two mesh screens 125 separated by less than 5.0 cm.

25 4. The process of any of claims 1-2 wherein the maximum distance between adjacent wires is in a range of 0.25 cm to 2.5 cm.

5. The process of any of claims 1-2 wherein a distance between adjacent wires at an outer edge of the at least one mesh screen 125 is greater than a distance between adjacent wires in the middle of the at least one mesh screen 125.

6. The process of any of claims 1-2 wherein periodically slightly moving the at least one mesh screen 125 comprises periodically moving the mesh screen 125 a distance less than twice the maximum spacing between adjacent wires.

7. The process of any of claims 1-2 wherein periodically slightly moving the at least one mesh screen 125 comprises periodically moving the at least one mesh screen 125 from a first side of the vessel 120 to a second side of the vessel 120.

8. The process of any of claims 1-2 wherein periodically slightly moving the at least one mesh screen 125 comprises periodically rotating the at least one mesh screen 125 less than 10° .

9. The process of any of claims 1-2 wherein the mesh screen 125 moves at a frequency so that the dispersed droplets of the first liquid contact at least one wire when passing through the at least one mesh screen 125.

10. A separation apparatus 110 comprising:

a vessel 120 having an inlet and at least two outlets; and

at least one mesh screen 125 covering substantially all of a cross-section of the vessel 120, the at least one mesh screen 125 made of wires, the at least one mesh screen 125 being movably mounted in the vessel 120.

1/2

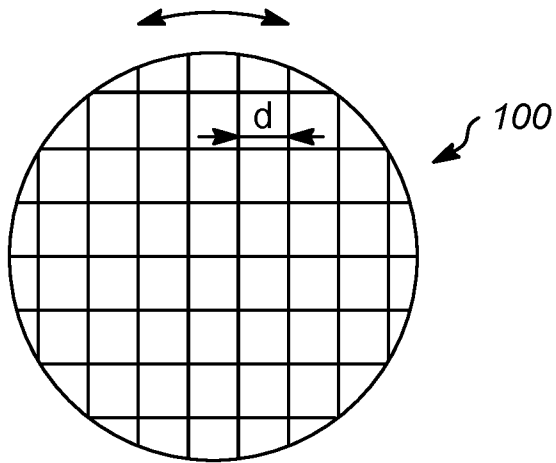


FIG. 1a

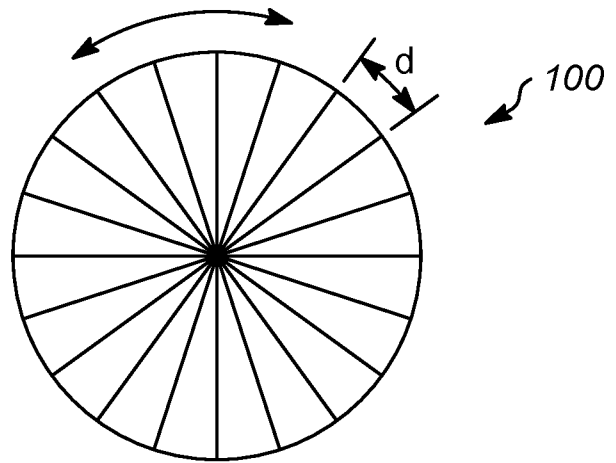


FIG. 1b

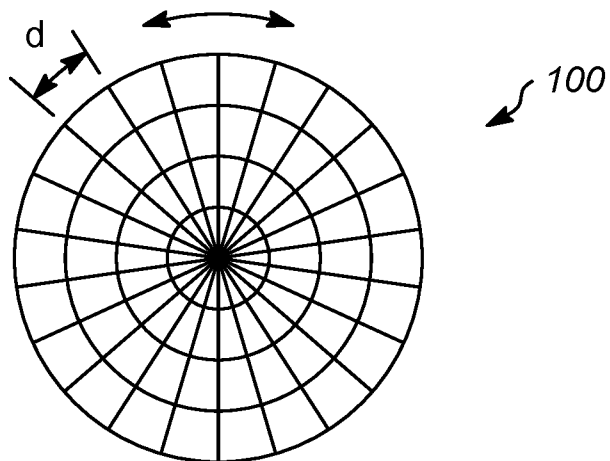


FIG. 1c

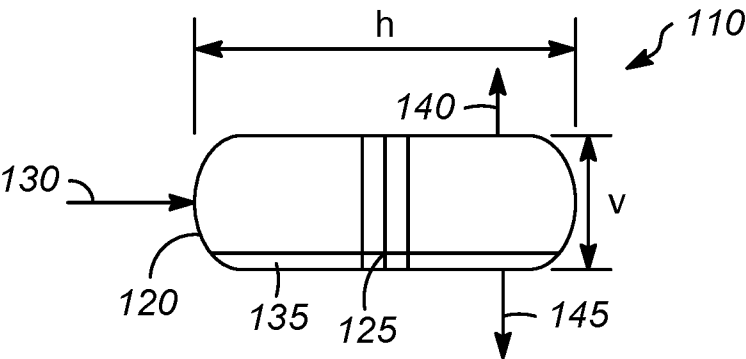


FIG. 2

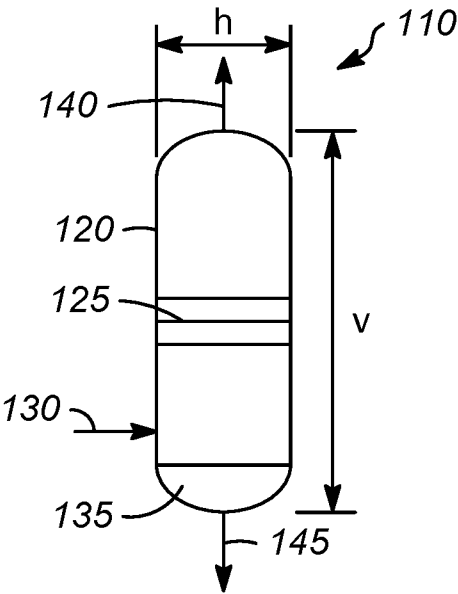


FIG. 3A

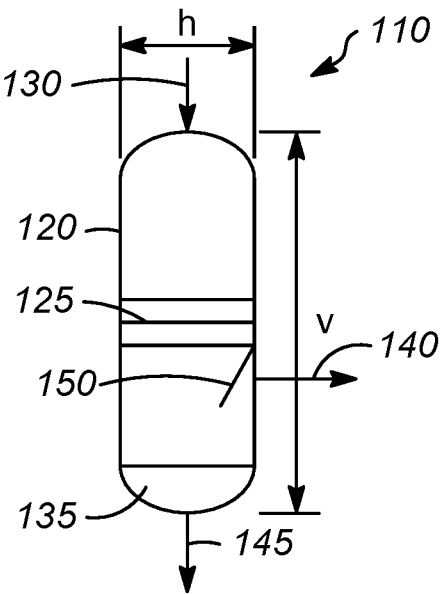


FIG. 3B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 2016/028273

A. CLASSIFICATION OF SUBJECT MATTER		
B01D 17/04 (2006.01) B01D 17/022 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
B01D 17/00-17/04		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
PatSearch (RUPTO internal), USPTO, PAJ, Esp@cenet, DWPI, EAPATIS, PATENTSCOPE		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 1064065 A (PFAUDLER PERMUTIT INC.) 05.04.1967, p. 1, line 60-p. 2, line 103, fig. 1, 2	1-5, 8-10
A		6, 7
Y	EA 201190345 A1 (NTNU TECHNOLOGY TRANSFER AS) 29.06.2012, p. 1, lines 5-5, p. 5, lines 22-36, p. 6, lines 1-31, p. 10, lines 15-26, p. 11, lines 19-33, fig.1	1-5, 8-10
Y	SU 1292843 A1 (KAZANSKY AVIATIONSONNY INSTITUT IM. A. N. TUPOLEVA) 28.02.1987, abstract, col. 2, lines 37-40	1-5, 8-10
A	RU 2105584 C1 (ZOBOV ALEKSANDR MIKHAILOVICH) 27.02.1998	1-10
A	US 2010/0326922 A1 (GENERAL ELECTRIC COMPANY) 30.12.2010	1-10
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
"A" document defining the general state of the art which is not considered to be of particular relevance		
"E" earlier document but published on or after the international filing date		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
07 July 2016 (07.07.2016)	08 September 2016 (08.09.2016)	
Name and mailing address of the ISA/RU: Federal Institute of Industrial Property, Berezhkovskaya nab., 30-1, Moscow, G-59, GSP-3, Russia, 125993 Facsimile No: (8-495) 531-63-18, (8-499) 243-33-37	Authorized officer N. Kromova Telephone No. 499-240-25-91	