



(51) International Patent Classification:

B01L 3/00 (2006.01) **B01F 13/00** (2006.01)
B01F 5/04 (2006.01) **B01F 3/08** (2006.01)

(21) International Application Number:

PCT/EP2015/070400

(22) International Filing Date:

7 September 2015 (07.09.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


14186463.7 25 September 2014 (25.09.2014) EP

(71) Applicant: EUROPEAN MOLECULAR BIOLOGY
LABORATORY [DE/DE]; Meyerhofstr. 1, 69117 Heidel-
berg (DE).(72) Inventors: UTHARALA, Ramesh; c/o European Molecu-
lar Biology Laboratory, Meyerhofstr. 1, 69117 Heidelberg
(DE). EICHER, Dominic; c/o European Molecular Bio-
logy Laboratory, Meyerhofstr. 1, 69117 Heidelberg (DE).
MERTEN, Christoph; c/o European Molecular Biology
Laboratory, Meyerhofstr. 1, 69117 Heidelberg (DE).(74) Agent: HARRISON, Robert; 24IP Law Group Sonnen-
berg Fortmann, Patent- und Rechtsanwälte, Herzogspital-
straße 10a, 80331 München (DE).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MICROFLUIDIC DEVICE FOR THE GENERATION OF COMBINATORIAL SAMPLES

Figure 2

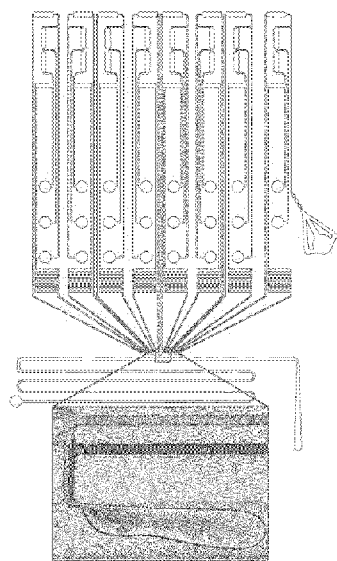

(57) Abstract: The present disclosure relates to a microfluidic device and a method allowing the generating and screening of combinatorial samples. A microfluidic device for producing droplets of at least one sample into an immiscible phase is provided, the device comprising a drop-let maker connecting an immiscible phase channel and a sample channel having at least one sample inlet connected to at least one sample inlet channel injecting the at least one sample into the sample channel, wherein the injection of the at least one sample is controlled by at least one sample valve, so that the at least one sample flows either towards a sample waste outlet or into the at least one sample inlet channel, wherein different sample inlet channel of the at least one sample inlet channel have the same hydrodynamic resistance resulting from the length, height and width of each sample inlet channel upstream of the droplet maker.

Published:

— *with international search report (Art. 21(3))*

5

Title: Microfluidic Device for the generation of combinatorial samplesDescription10 Field of the invention

[0001] The present disclosure relates to a microfluidic device and a method allowing the generating and screening of combinatorial samples.

15 Background of the invention

[0002] Microfluidic devices consist typically of channel networks with channel dimensions of 10-500 μm in which liquids can be actuated by different means. More sophisticated microfluidic analysis systems have been developed using polymers with the purpose of
20 miniaturizing existing lab scale experimental setups, to reduce sample reagent consumption and thereby cost, but also to gain sensitivity, throughput and multiplexing capabilities.

[0003] One of the basic technologies for modern microfluidics was developed in the 1990s and has been termed soft lithography (Xia and Whitesides, 1998). It is based on earlier photolithographic techniques developed to fabricate microelectronic devices (Nall and
25 Lathrop, 1958). Soft lithography allows fast prototyping of new microfluidic chip designs by replica folding. Briefly, it allows repetitive manufacture of identical microfluidic chips by using micro scale structures patterned onto a silicon wafer as a negative mold. The time required from mold fabrication to the use of a finished microfluidic chip is at most one
30 day. Molds are filled with polydimethylsiloxane (PDMS) and baked. The cured PDMS chip can be cut out using a scalpel. Molds can be re-filled with PDMS and thus can be re-used many times (Duffy et al., 1998). It has many advantages when used for microfluidic chip production in the context of biological and biomedical applications. The cured polymer is biocompatible and highly gas permeable, which allows the culturing of cells on-chip
35 and the performance of many biochemical assays. Since PDMS has optical properties similar to that of glass, microfluidic devices made from this material are transparent and pro-

5 cesses carried out on-chip can be monitored directly under a standard light microscope. Additionally, it is very flexible and easy to handle which makes it very amenable to use in the development of new prototype chips (Xia and Whitesides, 1998).

[0004] WO 2007/081386 provides a microfluidic channel for mixing and investigating
10 aqueous phase droplets encapsulated in an oil stream.

[0005] A publication of Shaojiang Zeng et al. "Microvalve-actuated precise control of individual droplets in microfluidic devices", LabChip, May 21, 2009; 9(10): 1340-1343 describes an example for the generation of sequences of individual droplets separated by
15 an immiscible oil in a microfluidic channel. A droplet marker is described that is capable of generating four different droplet species that can be fused one by one in a combinatorial fashion. While in theory this approach allows for the generation of many mixtures of different compounds (that can be screened for a desired effect or exploited for on-chip synthesis of compound libraries) the system has several limitations: The system is dependent
20 on droplet fusion and only allows for the generation of combinatorial droplet pairs; The system is driven by negative pressure. All flow is generated by aspirating from the outlet resulting in different droplet sizes for the different compounds when applying constant valve opening times. Even though this can be compensated in theory by adjusting the individual valve opening times, only a poor level of control can be achieved. Since each infused
25 compound needs a specific valve opening time, it seems very challenging to systematically generate all possible droplet pairs (and synchronize the generation of the individual droplets to allow for pairing). In conclusion, the system can be hardly scaled up (the working principle was shown for 4 infused compounds, only, and solely two droplet species were fused). Furthermore, a negative pressure driven system has strict limitations in terms
30 of the maximum flow rates and hence the throughput.

[0006] EP 1 601 874 describes the use of mechanical devices such as a Braille-display for closing and opening valves in a microfluidic system.

[0007] It is an object of the present disclosure to overcome at least one of the disadvantages of prior art.

5

Summary of the invention

[0008] The present disclosure provides a microfluidic device for producing droplets of at least one sample into an immiscible phase, the device comprising a droplet maker connect-
10 ing an immiscible phase channel and a sample channel having at least one sample inlet connected to at least one sample inlet channel injecting the at least one sample into the sample channel, wherein the injection of the at least one sample is controlled by at least one sample valve, so that the at least one sample flows either towards a sample waste out-
15 let or into the at least one sample inlet channel, wherein different sample inlet channel of the at least one sample inlet channel have the same hydrodynamic resistance resulting from the length, height and width of each sample inlet channel upstream of the droplet maker.

[0009] The at least one sample inlet channel may have a sample fluidic resistor to adjust its length. It is obvious for a person skilled in the art that the hydrodynamic resistance of a
20 channel is related to the parameters of length, height and width of a channel. Thus, a person ordinary skilled in the art will be able without undue burden to determine the hydrodynamic resistance of a particular channel or tubing.

[0010] The at least one valve may be connected to a pressurized sample reservoir to al-
25 low the sample to flow into the microfluidic device. In this embodiment, the at least one valve is used to allow samples stored in a pressurized sample reservoir to flow into the microfluidic device or chip.

[0011] The length, height and width of the immiscible phase channel upstream of the
30 droplet maker have also to be taken into account to ensure a higher hydrodynamic resistance of the immiscible phase channel than the sample channel to avoid that the at least one sample preferably enters the immiscible phase channel. Again, a person ordinary skilled in the art will easily be able to choose parameters ensuring the intended resistance ratio.

35

5 [0012] One possibility to ensure a higher resistance in the immiscible phase channel is an immiscible phase fluidic resistor of the immiscible phase channel upstream of the droplet maker to ensure a higher resistance of the immiscible phase channel than the resistance of the sample channel to avoid that the at least one sample can enter the immiscible phase channel.

10 [0013] It is further intended that the sample droplets flow into an outlet channel and that a read-out channel can be connected to the outlet channel, wherein the read-out channel is a separable tubing. Thus, read-out channels can be filled with droplets or a sequence of droplets like a binary code and the read-out channel can be separated after finalizing the
15 respective sequence or barcode.

[0014] The microfluidic device of the instant disclosure may have additional immiscible phase inlets directly at a transition point where samples are flushed out of at least one sample storage reservoir into a second microfluidic device. The at least one sample storage
20 reservoir may be a tubing or microwell plate.

[0015] It is intended that the diameter of the at least one sample storage reservoir is at least twice of the diameter of the read-out channel.

25 [0016] Further, the additional immiscible phase inlets can be arranged as additional outer channels or channels arranged coaxially with the sample storage.

[0017] The at least one sample can be at least one of an aqueous solution, an organic solvent or a combination thereof and the immiscible phase may comprise oil like mineral oil, fluorinated oil or any other liquid not miscible with an aqueous liquid, organic solvent or a
30 combination thereof. It is within the scope of the present disclosure that different immiscible phase can be used, like different types of oil or immiscible phases having different properties, for example different optical properties.

35 [0018] The microfluidic device may have a read-out module for analysing the sample droplet or sequence of sample droplets in the outlet channel or in the read-out channel.

- 5 Alternatively a separable read-out channel can be transferred to an external read-out device.

[0019] Another object of the present disclosure is a method for providing a sequence of droplets of at least one sample, the method comprising:

- 10
- providing at least two compounds to a microfluidic device;
 - producing at least one combinatorial sample out of the at least two compounds having a specific mixture of the at least two compounds;
 - injecting the at least one combinatorial sample into a microfluidic device;
 - generating at least one droplet of the at least one combinatorial sample in an immiscible phase; and
- 15
- separating the at least one droplet with at least one immiscible phase;
 - providing at least one priming droplet in front of the first of the at least one droplet of the at least one combinatorial sample.

- 20 [0020] The method of the present disclosure can be used to generate a sequence of droplets comprising different combinatorial samples, wherein a sequence of droplets may comprise at least 50 droplets.

- [0021] The method of the present disclosure may comprise the preparation of a priming droplet or a plurality of priming droplets, which comprises the solvent of the at least one combinatorial sample or only one of the at least two compounds for preparing the combinatorial sample.
- 25

- [0022] Further, the at least one compound of the at least two compounds may be a prokaryotic or eukaryotic cell or wherein the at least one combinatorial sample comprises one prokaryotic or eukaryotic cell.
- 30

[0023] The at least one compound of the at least two compounds may be aspirated or transferred from a storage reservoir.

5 [0024] The combinatorial sample may be transferred from a storage reservoir into a read-out channel having a diameter, which is no more than half of the diameter of the storage reservoir

[0025] It is within the scope of the present disclosure that the droplets may be produced
10 with a significantly smaller diameter than the one of the outlet channel or read-out channel and wherein the droplets are confined or separated from droplets containing a different sample composition using plugs of a third immiscible phase having a diameter significantly above the diameter of the reservoir to space out the droplets.

15 [0026] The at least one compound may be aspirated from microwell plates for delivery to a microfluidic device using a miscible carrier phase.

[0027] Aspirating the at least one compound can be synchronized with the valves of the microfluidic device. The synchronization ensures that droplets or plugs contain only pure
20 samples or samples containing additional substrates.

[0028] Another way to produce only the intended samples is that only a medium section of the aspirated at least one compound will be used.

25 [0029] The method of the present disclosure comprises further the generation of an optical identifier between optical barcodes, wherein optical barcode comprises sequential droplet sequences using different properties of the droplets and wherein the end of each optical barcode is marked by droplets having a unique composition.

30 [0030] Further, a droplet or a plurality of droplets may be used to produce a unique signal different from the signals used for the generation of individual digits of a sequential barcode.

[0031] Prior to injecting the at least one combinatorial sample into a microfluidic device
35 the remains of a previous combinatorial sample may be flushed into the droplet maker using the following combinatorial sample to produce a waste plug followed by transferring

5 all aqueous liquids to the waste while the immiscible phase is still injected into the droplet maker so that a spacer of the immiscible phase separates the waste plug from the following combinatorial sample.

[0032] The outlet channel or read-out channel can be filled with a sequence of priming
10 droplets prior to generating droplets of a sample to ensure that the filled outlet or read-out channel provides already the conditions during the production of droplets of samples.

Brief description of the Figures

15 [0033] Examples and embodiments of the present disclosure will now be described and shown in the following figures. It is obvious for a person ordinary skilled in the art, that the present disclosure is not limited to the shown embodiments. It shows:

[0034] Figure 1 Schematically depiction of providing optimal start conditions.

20

[0035] Figure 2 Schematic illustration of one embodiment of the invention.

[0036] Figure 3 Schematic depiction of a 2D and 3D configuration for injecting additional sheath oil.

25

[0037] Figure 4 Comparison of read-out of multi-cell droplets and single cell droplets.

[0038] Figure 5 Schematic depiction of adding an end of barcode signal.

30

[0039] Figure 6 Encapsulation of combinatorial samples avoiding cross-contamination.

[0040] Figure 7 Encapsulation of homogeneously concentrated compounds delivered
35 by an auto sampler in dispersed form spaced out by a miscible carrier phase.

5

Detailed description of the invention

[0041] The present disclosure provides a microfluidic device allowing the generation and screening of combinatorial samples in a high throughput fashion. Starting with a number of
10 n inlets (into which n different compounds can be injected) a total of up to $2^n - 1$ chemically distinct samples can be generated in an automated fashion.

[0042] All channels providing a liquid to the droplet maker are arranged “upstream” of the droplet maker within the meaning of the instant disclosure. The outlet channel transporting the droplets or sequence of droplets is arranged “downstream” of the droplet maker.
15 The terms droplets or plugs are used synonymously.

[0043] An aqueous liquid within the meaning of the present disclosure comprises every liquid that is miscible with water. In contrary, the immiscible phase comprises every liquid
20 that is not miscible with water, like oil.

[0044] The device of the present disclosure can be used for generating an optical barcoding system for the newly generated combinatorial samples, hence drastically facilitating downstream screening application (e.g. screening the samples for biological effects). The
25 technology is very useful for a variety of applications including stem cell differentiation, combinatorial drug screens and combinatorial chemistry.

[0045] Document WO2013037962 discloses a device and a sample barcoding approach. The instant disclosure provides further details of the device which are novel and inventive
30 over the disclosure of WO2013037962 .

[0046] Figure 1 shows in R1 to R4 different start condition before analyzing a sequence of droplets. The resistance (R) of a reservoir such as tubing depends on the inner medium and is particularly high for two-phase systems. R1 shows a tubing filled with air, R2 shows
35 a tubing filled with liquid, R3 shows a tubing filled with only a few plugs and R4 shows a tubing filled with many plugs. Basically, the hydrodynamic resistance in the setups shown

5 in R1 to R4 is different. As a consequence, the tubing has to be filled with “dummy” plugs or droplets before the samples to be analyzed are generated to achieve a more constant resistance throughout the entire experiment (R5).

[0047] After the combinatorial samples are generated using e.g. a braille display chip,
10 they are stored in a sequential fashion either in a tubing, capillary or microfluidic channel. In the beginning of the experiment this reservoir does not contain any plugs, but rather air or any priming liquid such as oil or water. However, moving this single-phase system typically requires a lower backpressure compared to moving an array of plugs (a two-phase system). Hence during the course of the experiment, in which more and more plugs are
15 generated and injected into the reservoir, the backpressure changes resulting in inhomogeneous sample sizes and inhomogeneous fractions of individual compounds within mixtures. This effect can be overcome by priming the system with “priming plugs” (e.g. water plugs in oil), generated in the same way as the later samples for analysis, so that only after the tubing has been filled completely with the priming plugs or droplets (or optionally even
20 flushed for a longer time period), the assay samples for analysis are generated. The assay samples will experience a much lower change in back pressure over time (as the number of total plugs in the system remains almost constant) and hence hardly change in size.

[0048] Successful operation of the combinatorial Braille device (microfluidic device)
25 requires careful adjustments of the resistances of all channels. For example, the channels for all aqueous samples should have the same resistance, which can be achieved by the use of resistors (to compensate for differences in length, width or height). Additionally, the channel downstream of the oil inlet must have a higher resistance than the channel between the drop maker (T-junction) and the sample outlet, as otherwise aqueous samples are occa-
30 sionally pushed into the oil channel, changing the desired direction of flow (from the oil inlet to the sample outlet) inside the device.

[0049] The size of the aqueous plugs or droplets also varies if the sample channels up-
stream of the drop maker have significantly different resistances. This is the case for the
35 geometry shown in WO2013037962 as the length for the disclosed channels differs significantly. The instant disclosure provides a microfluidic device (chip) with sample channels

upstream of the drop maker having the same length. Thus, varying sample sizes and varying fractions of individual compounds are avoided within a mixture. A fluidic resistor at the inlet of the immiscible phase (oil) can be used to avoid that the aqueous samples (optionally injected at much higher flow rates as compared to the oil) enter the oil channel upon opening of the valves (referring to the valves that control the flow of aqueous samples towards the drop maker).

[0050] Figure 2 shows a setup of a microfluidic device having fluidic resistors of the sample inlet channels 40 as well as a fluidic resistor of the immiscible phase channel 42. The fluidic resistors of the of the sample inlet channel 40 are used to adjust the same length for each sample inlet channel. The fluidic resistor of the immiscible phase 42 channel should ensure that the resistance of the immiscible phase channel is higher than the resistance of the outlet channel and/or read-out channel downstream of the droplet maker. Upstream of the fluidic resistors 40 are the sample inlets 25 and the waste outlet 30 arranged. On top of figure 2 the valves 20 are arranged in a so called valve module. A cell inlet 15 can be used to flush cells into the microfluidic device. The immiscible phase inlet 50 applies the immiscible phase 85.

[0051] The droplet maker 100 comprises a T-junction 35 in the embodiment of figure 1 as well as a sample channel 29 and sample inlet channel 27. A droplet 80 is formed in the immiscible phase 85

[0052] Many biological and chemical assays require the addition of further substrates to the samples after their initial generation. This has been done for instance after an incubation time to initiate a readout reaction based on fluorescence. Technically, this task can be achieved using a fusion module as described in by Clausell-Tormos et al. (Chem Biol. May 2008;15(5):427-437). However, when using samples containing cells or high concentrations of protein, this approach is difficult, as wetting is frequently observed at the point where the samples exit the storage reservoir and enter the microfluidic fusion chip. The inventors discovered that this can be avoided by injecting additional carrier oil (acting similar to the sheath fluid in FACS applications) with a low concentration of surfactant at this point. Geometrically this requires additional outer channels (2D configuration) or a coaxial

5 flow of oil (3D configuration) using an additional tubing around the reservoir into which oil is continuously injected and further flows into the microfluidic fusion chip, hence insulating the aqueous samples from the channel walls.

[0053] Figure 3 shows schematically setups for the addition of additional substrates by
10 additional immiscible phase inlets 120 to the samples. Such an addition requires a fusion step involving the injection of all sample plugs through a connection port for droplet fusion 130 into a second microfluidic device. Fusion electrodes 110 can be arranged at the fusion chamber 90 as well as the substrate droplet maker 100. Wetting occurs frequently at the transition point from the tubing to the channel walls. This can be overcome by injecting
15 additional “sheath oil” either in a 2D or 3D configuration (120 top and bottom).

[0054] When generating plugs that host cells, it is difficult to obtain equal cell numbers across all samples (Clausell-Tormos et al, Chem Biol. May 2008;15(5):427-437). This may cause problems in drug screening applications, as a strong readout signal (e.g. in a cell-
20 based fluorescence assay) could either be due to a particularly effective drug or simply to a sample with an extraordinary high number of cells. In theory, this problem can be overcome by performing single cell assays: Using a cell density corresponding to less than one cell per plug volume, most plugs will contain either one or no cell. This allows omitting all samples showing only background signals (= empty plugs), while the plugs showing a sig-
25 nal intensity, which is significantly above background, will host most likely the same cell number ($n=1$). However, as single cell assays are subjected to biological variation, this approach requires a high number of replicates. Experimentally generating droplets, which are much smaller than the plugs described in WO2013037962 at high frequency, may solve this problem. However, due to the decreased size, these droplets would typically not keep a
30 sequential order: If their diameter is smaller than the diameter of the reservoir, the different samples can shuffle, thus making it impossible to track the sample identity. However, this can be avoided by using larger mineral oil plugs (diameter significantly above the diameter of the reservoir) to space out the small droplets.

35 [0055] The samples are eventually flushed for the readout through a channel with a diameter comparable to that of the small droplets, so that each sample is measured individu-

ally without the possibility for two samples passing the detector at the same time. It is important to note that the diameter of the reservoir for incubation (tubing) cannot have such a small diameter, as this would result in resistances that cannot be handled experimentally. We hence suggest having a relatively large diameter ($> 100\mu\text{m}$) of the reservoir for incubation, while passing the samples through a narrow constriction ($< 100\mu\text{m}$) upstream or at the readout point.

[0056] Figure 4 shows in the upper part that plug hosting different cell numbers (A 68 cells; B 75 cells; C 53 cells) will cause different signal intensities in the readout. This can be overcome by single-cell analysis. If a particular sample has less cells, the number of positive peaks will be decreased, but their average intensity remains the same (bottom of figure 4). Experimentally this requires the use of large diameter reservoirs and small diameter readout channels for the signal read-out. The single cell droplets are spaced out with larger immiscible phase plugs.

[0057] It is possible to use a microfluidic device for a barcoding strategy of samples by making use of plugs containing different fluorophores (or concentrations thereof). As their sequence is kept constant throughout the entire experiment, samples can be used to write binary codes (e.g. high intensity = 1; low intensity = 0). It has been discovered that this type of barcoding becomes much more reliable when adding a unique signal for encoding the end of the barcode. This can be done by generating a sample with intermediate signal intensity or a completely different signal (color).

[0058] Figure 5 shows that the readability of the binary barcodes (1 and 0) can be drastically improved by adding an additional "end of barcode" signal. This is particularly relevant as the number of digits per barcode is not constant, making it difficult to define the end of a barcode. Each barcode can be separated by immiscible phase plugs.

[0059] Cross-contamination may occur in microfluidic devices making use of channels through which different reagents are flushed sequentially (based on the mixture to be generated). This is particularly relevant, as each channel upstream of the droplet maker has a certain dead volume, which remains after the generation of a particular mixture. To over-

5 come this problem, the present disclosure provides a method for flushing out these remains and encapsulating them into a so-called “waste plug” in between each sample mixture.

[0060] The method is based on splitting the generation of each new sample (each new combinatorial mixture) into two phases: First, the valve configuration for the generation of
10 this particular mixture (VC_i) is set for just a very short time (a time period corresponding to less than the desired sample size for a given assay; e.g. 1s) during which the remains of the previous sample are flushed into the droplet maker (mixing with and contaminating the current sample). Then the valve configuration is switched so that all aqueous liquids are sent to the waste while oil is still injected into the droplet maker. In consequence, an oil
15 spacer is generated physically separating this newly generated waste plug from the next sample. Now the valve configuration is switched back to VC_i . As the dead volume of the channels is now already filled with the desired mixture, no cross-contamination occurs and a plug with known sample composition is generated. Noteworthy, there is hardly any alternative to this procedure: Flushing the channels with washing buffer in between each sam-
20 ple would not overcome the cross-contamination issue, as it would remain in the dead volume of the channel network as well, thus contaminating or at least diluting the next ($i + 1$) sample.

[0061] Figure 6 shows the encapsulation of a combinatorial sample into droplets without
25 significant cross-contamination between the samples. An open valve 300 allows the respective sample to enter the channel and a closed valve 310 will stop the respective sample from entering the channel. A1-A5: After the encapsulation of a particular first combinatorial sample 320 the channels upstream of the drop maker are still filled with this sample and droplets thereof 321. These remains can be eliminated by shortly flushing the channels
30 with a second sample mixture 330, followed by the injection of only an immiscible phase like oil. In consequence a waste plug 341 is generated from the mixture of samples 340, while the channels upstream of the drop maker are filled with pure 330. Hence opening the valves for the generation of 330 again results in the generation of a pure new combinatorial sample droplet 331, without any significant contamination from the previous sample. Part
35 B of figure 6 shows a sequence of waste and sample plugs generated as described in A1 to A5.

5

[0062] WO2013037962 also discloses the idea of sequentially injecting different compounds into at least one of the inlets of the combinatorial microfluidic chip. This can, for example, be achieved by connecting an auto sampler to the microfluidic chip. However, each compound aspirated by an auto sampler from microwell plates is transported to the microfluidic chip using a miscible carrier phase (e.g. buffer). This may cause two problems: The compound is diluted according to Taylor-Aris dispersion and furthermore the miscible phase is also injected into the combinatorial chip. However, for the generation of systematic combinatorial mixtures it is typically desirable dealing with pure, homogeneously concentrated compounds. To achieve this, the beginning and end of each compound plug coming from the auto sampler can be truncated and sent to the waste (comp. fig. 2). The instant disclosure provides a method installing a feedback loop between the auto sampler and the control of the braille display: Whenever the auto sampler injects a new compound into the tubing leading to the microfluidic chip, an electrical signal (relay signal) is sent to the control software. After a constant delay in time for each compound, the dispersed compound plug arrives at the microfluidic chip, where its beginning and end is transferred to the waste by switching the valves accordingly (based on a pre-determined time sequence for the valve configurations). Due to the internal reference signal for each sample (the relay signal coming from the auto sampler), efficient synchronization between the two devices is guaranteed.

25

[0063] Figure 7 shows the encapsulation of homogeneously concentrated compounds delivered by an auto sampler 400 in dispersed form spaced out by a miscible carrier phase. The (dispersed) beginning and end of each compound plug, as well as the spacer, can be sent to the waste by synchronizing the valve configuration of the braille display with the arrival of compound plugs at the microfluidic chip. Each time the auto sampler 400 injects a compound into the tubing leading to the microfluidic chip, an electrical signal serving as an internal reference point 450 is sent to the control software of the braille display. Only after a pre-determined delay in time 430 and only for a pre-determined duration 440, the valves are switched to allow for the delivery of the pure compound 421 and 441 to the drop maker. During all other times the valve configuration sends all liquid coming from the auto sampler to the waste. The arrow at the right side indicates the direction of flow.

35

5

Reference Number List

	0	droplet encoding 0
10	1	droplet encoding 1
	15	cell inlet
	20	valve
	25	sample inlets
	27	sample inlet channel
15	29	sample channel
	30	waste outlet
	35	T-junction
	40	fluidic resistor
	42	immiscible phase fluidic resistor
20	50	immiscible phase inlet
	60	outlet channel
	80	droplet channel
	85	immiscible phase
	90	fusion chamber
25	100	substrate droplet maker
	110	fusion electrodes
	120	additional immiscible phase inlets
	130	connection port for droplet fusion
	140	mineral oil
30	150	signal read-out
	200	spacer
	230	droplet encoding end of sequence
	300	open valve
	310	closed valve
35	320	first sample
	321	droplet of first sample
	330	second sample
	331	droplet of second sample
	340	mixture of first and second sample
40	341	droplet of mixture of first and second sample
	350	immiscible phase
	400	auto sample
	410	valve control
	421	droplet first sample
45	430	delay t_w
	440	delivery second sample t_d
	441	droplet second sample
	450	electrical signal serving as an internal reference point

50

5

Claims

1. A microfluidic device for producing droplets of at least one sample into an immiscible phase,
10 the device comprising a droplet maker connecting an immiscible phase channel and a sample
channel having at least one sample inlet connected to at least one sample inlet channel inject-
ing the at least one sample into the sample channel, wherein the injection of the at least one
sample is controlled by at least one sample valve, so that the at least one sample flows either
15 towards a sample waste outlet or into the at least one sample inlet channel, wherein different
sample inlet channel of the at least one sample inlet channel have the same hydrodynamic re-
sistance resulting from the length, height and width of each sample inlet channel upstream of
the droplet maker.
2. The microfluidic device of claim 1, wherein the at least one sample inlet channel has a sample
20 fluidic resistor to adjust its length.
3. The microfluidic device of one of claims 1 or 2, further comprising an immiscible phase fluid-
ic resistor of the immiscible phase channel upstream of the droplet maker to ensure a higher
resistance of the immiscible phase channel than the resistance of the sample channel to avoid
25 that the at least one sample can enter the immiscible phase channel.
4. The microfluidic device of one of claims 1 to 3, wherein the sample droplets flow into an out-
let channel or a read-out channel.
- 30 5. The microfluidic device of one of claim 1 to 4, comprising additional immiscible phase inlets
directly at a transition point where samples are flushed out of at least one sample storage res-
ervoir into a second microfluidic device.
6. The microfluidic device of claim 5, wherein the diameter of the at least one sample storage
35 reservoir is at least twice of the diameter of the read-out channel.

- 5 7. The microfluidic device of one of claims 5 or 6, wherein the additional immiscible phase inlets are additional outer channels or channels arranged coaxially with the sample storage.
8. A method for providing a sequence of droplets of at least one sample, the method comprising:
- providing at least two compounds to a microfluidic device;
 - 10 - producing at least one combinatorial sample out of the at least two compounds having a specific mixture of the at least two compounds;
 - injecting the at least one combinatorial sample into a microfluidic device;
 - generating at least one droplet of the at least one combinatorial sample in an immiscible phase; and
 - 15 - separating the at least one droplet with at least one immiscible phase;
 - providing at least one priming droplet in front of the first of the at least one droplet of the at least one combinatorial sample.
- 20 9. The method of claim 8, wherein the at least one combinatorial sample comprises preferably one prokaryotic or eukaryotic cell.
10. The method of one of claims 8 or 9, wherein at least one compound of the at least two compounds is aspirated or transferred from a storage reservoir.
- 25 11. The method of one of claims 8 to 10, wherein a combinatorial sample is transferred from a storage reservoir into a read-out channel having a diameter, which is no more than half of the diameter of the storage reservoir.
- 30 12. The method of one of claims 8 to 11, wherein the droplets are produced with a significantly smaller diameter than the outlet channel or reservoir and wherein the droplets are confined or separated from droplets containing a different sample composition using plugs of a third immiscible phase having a diameter significantly above the diameter of the reservoir to space out the droplets.
- 35 13. The method of one of claims 8 to 12, wherein directly at the transition point from one microfluidic device to a second microfluidic device, additional immiscible phase inlets are

- 5 used to flush the at least one sample out of at least one sample storage reservoir into the second microfluidic device.
14. The method of one of claims 8 to 13, wherein aspirating the at least one compound is syn-
chronized with the valves of the microfluidic device so that only a medium section of the
10 aspirated at least one compound is used for droplet making.
15. The method of one of claims 8 to 14, wherein an optical identifier is generated between op-
tical barcodes, wherein optical barcode comprises sequential droplet sequences using dif-
ferent properties of the droplets and wherein the end of each optical barcode is marked by
15 droplets having a unique composition.
16. The method of one of the claims 8 to 15, wherein prior to injecting the at least one combi-
natorial sample into a microfluidic device the remains of a previous combinatorial sample
are flushed into the droplet maker using the following combinatorial sample to produce a
20 waste plug followed by transferring all aqueous liquids to the waste while the immiscible
phase is still injected into the droplet maker so that a spacer of the immiscible phase sepa-
rates the waste plug from the following combinatorial sample.

Figure 2

5

10

15

20


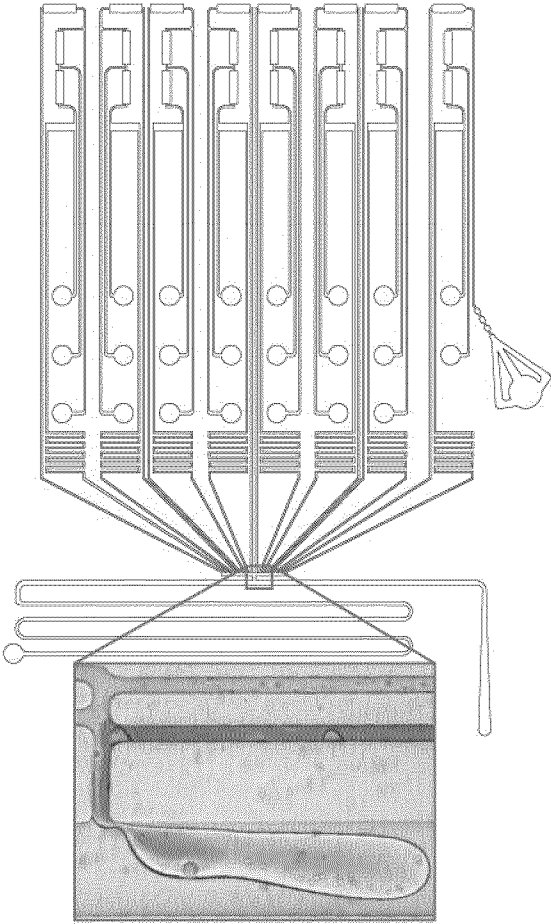



Figure 3

5

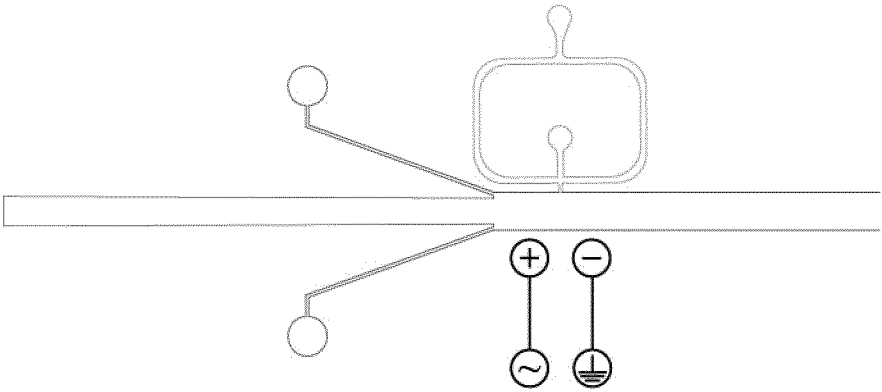

10

15

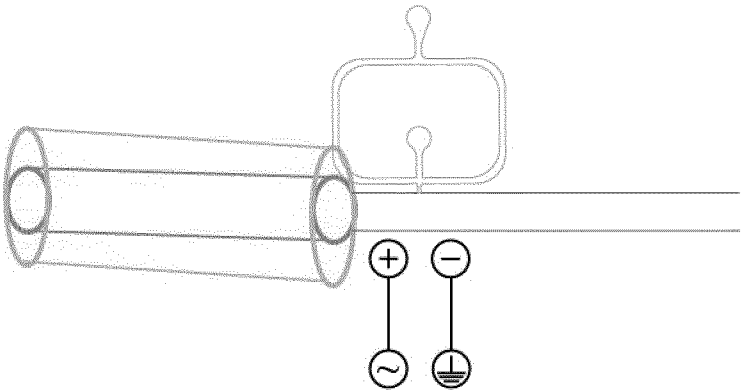

20

Figure 4

5

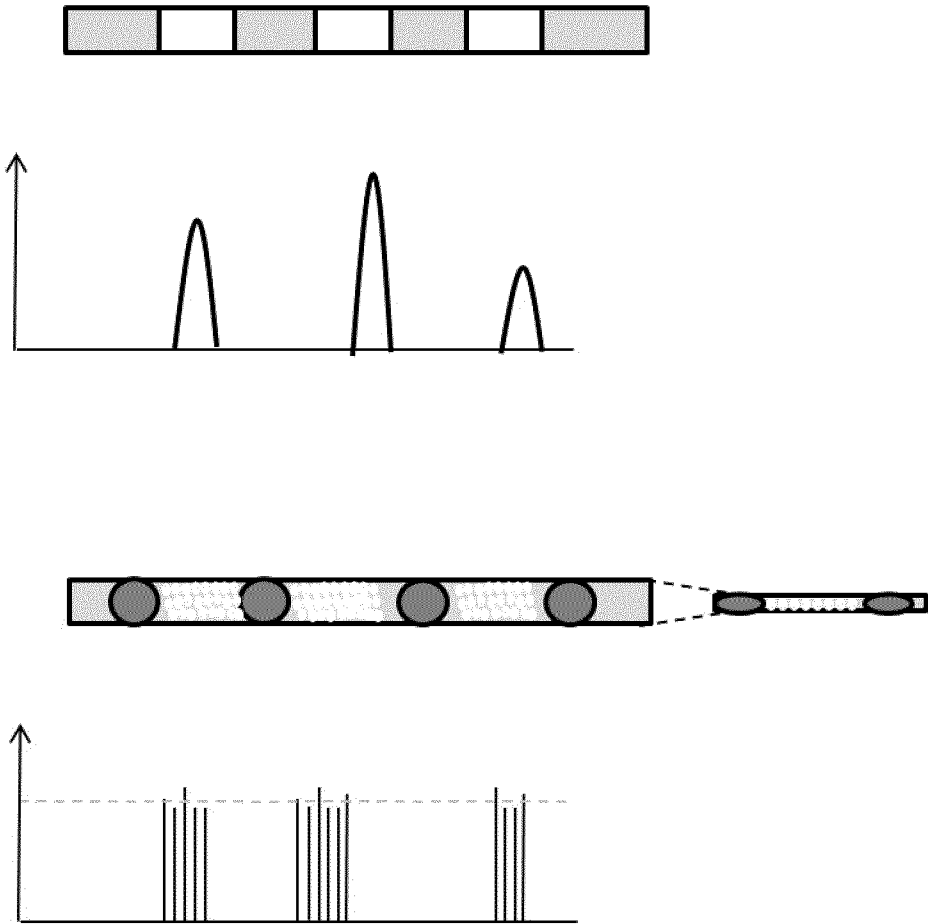


Figure 5

5

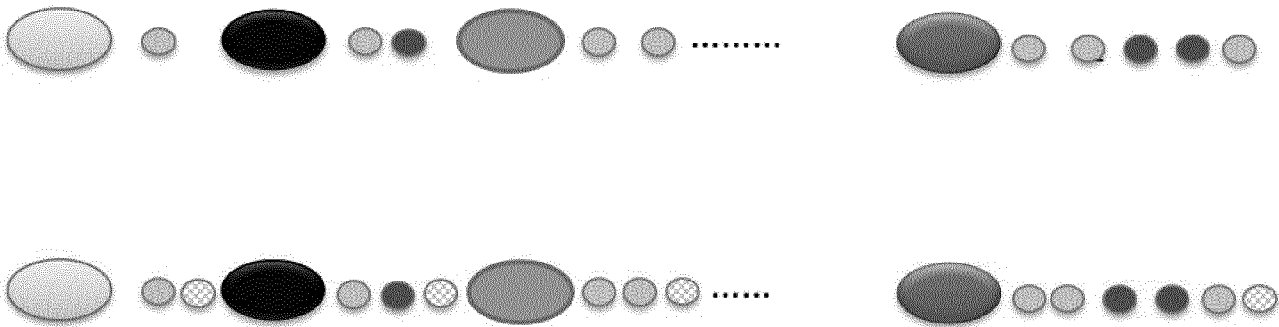


Figure 6


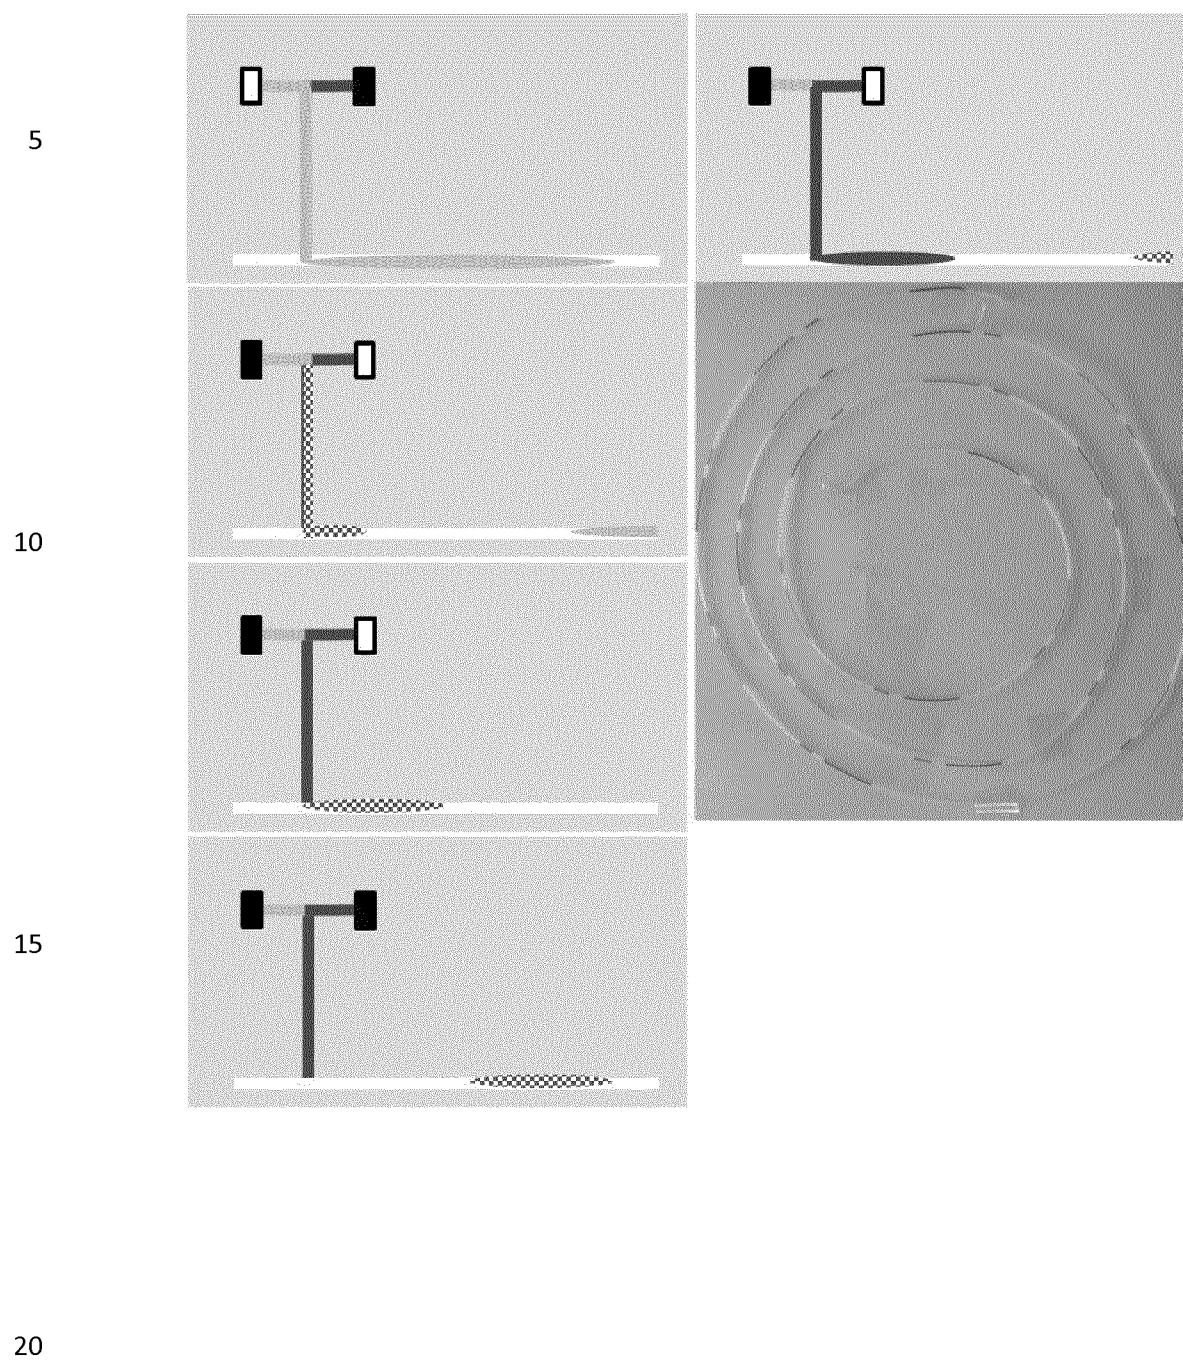


Figure 7

5

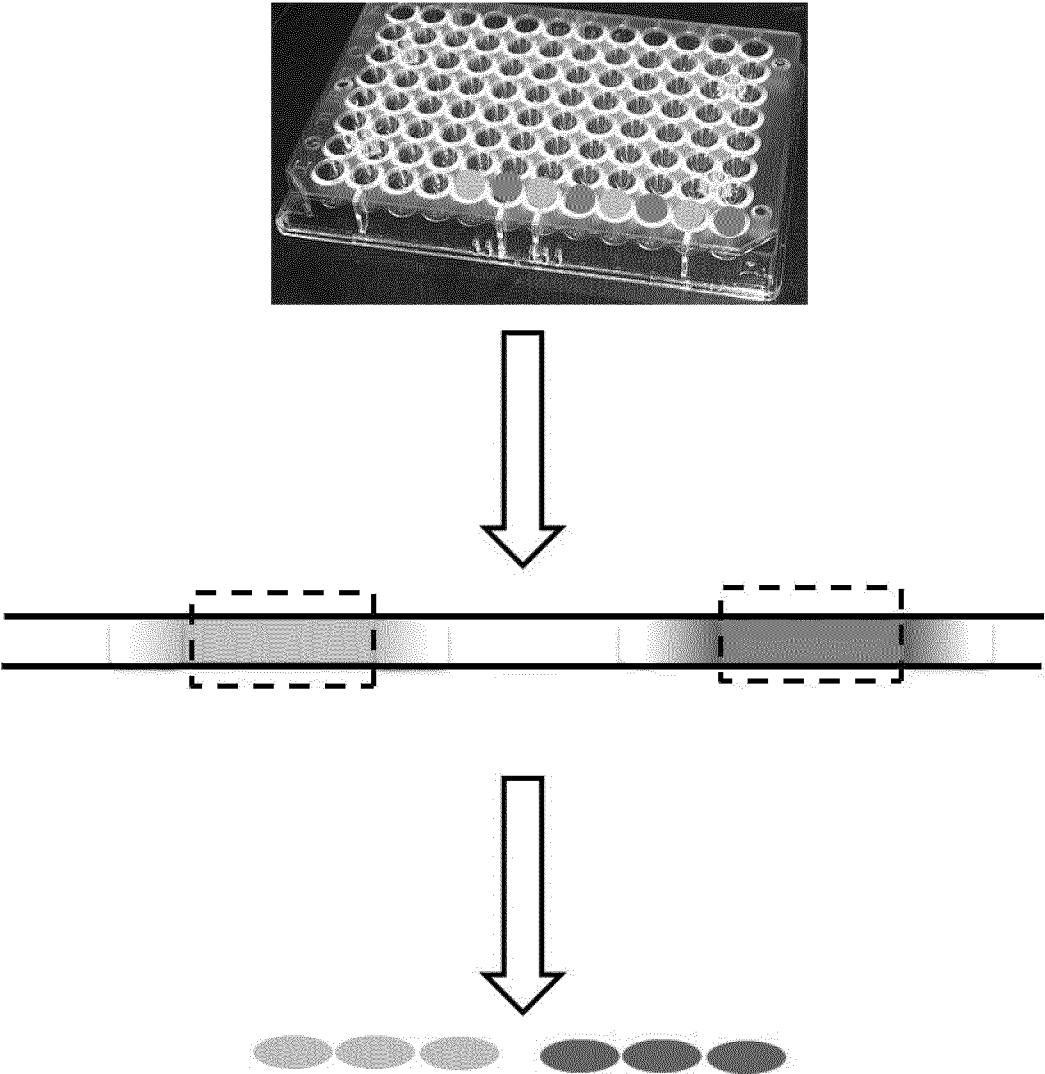

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/070400

A. CLASSIFICATION OF SUBJECT MATTER

INV. B01L3/00 B01F5/04 B01F13/00 B01F3/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B01L B01F B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/037962 A2 (EUROPE MOLECULAR BIOLOGY LAB [DE]; UTHARALA RAMESH [DE]; MERTEN CHRIST) 21 March 2013 (2013-03-21)	1,4-16
Y	paragraphs [0003], [0008] - [0010], [0013], [0017], [0031], [0033], [0034], [0039], [0044] - paragraphs [0047], [0060] figures 1-3, 5	1-3
Y	US 2007/227591 A1 (WISSINK JEROEN [NL] ET AL) 4 October 2007 (2007-10-04) paragraphs [0001], [0046] figure 14	1-3
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 October 2015

Date of mailing of the international search report

28/10/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Bischoff, Laura

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/070400

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 922 591 A (ANDERSON ROLFE C [US] ET AL) 13 July 1999 (1999-07-13) column 2, line 20 - line 23 column 27, line 8 - line 57 figure 6A -----	1,2
A	US 2005/087122 A1 (ISMAGLIOV RUSTEM F [US] ET AL) 28 April 2005 (2005-04-28) the whole document -----	1-16
A	US 2012/283108 A1 (SAMPAS NICHOLAS M [US]) 8 November 2012 (2012-11-08) the whole document -----	1-16
A	KRZYSZTOF CHURSKI ET AL: "High-throughput automated droplet microfluidic system for screening of reaction conditions", LAB ON A CHIP, ROYAL SOCIETY OF CHEMISTRY - CAMBRIDGE, GB, vol. 10, 16 February 2010 (2010-02-16), pages 816-818, XP007912320, ISSN: 1473-0197, DOI: 10.1039/B925500A the whole document -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/070400

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013037962	A2	21-03-2013	CA 2844544 A1 21-03-2013 EP 2755765 A2 23-07-2014 US 2014332083 A1 13-11-2014 WO 2013037962 A2 21-03-2013
US 2007227591	A1	04-10-2007	AT 473801 T 15-07-2010 CN 1968737 A 23-05-2007 DK 1755773 T3 01-11-2010 EP 1755773 A1 28-02-2007 ES 2348954 T3 17-12-2010 NL 1026261 C2 28-11-2005 US 2007227591 A1 04-10-2007 WO 2005115599 A1 08-12-2005
US 5922591	A	13-07-1999	AT 235559 T 15-04-2003 AT 386590 T 15-03-2008 AU 6404996 A 05-02-1997 DE 69626988 D1 30-04-2003 DE 69626988 T2 04-03-2004 DE 69637443 T2 12-06-2008 EP 0843734 A1 27-05-1998 EP 1304388 A2 23-04-2003 JP H11509094 A 17-08-1999 US 5856174 A 05-01-1999 US 5922591 A 13-07-1999 US 6043080 A 28-03-2000 US 6197595 B1 06-03-2001 US 6326211 B1 04-12-2001 US 2001036672 A1 01-11-2001 US 2005250199 A1 10-11-2005 WO 9702357 A1 23-01-1997
US 2005087122	A1	28-04-2005	US 2005087122 A1 28-04-2005 US 2010233026 A1 16-09-2010 US 2011142734 A1 16-06-2011 US 2011174622 A1 21-07-2011 US 2011176966 A1 21-07-2011 US 2011177494 A1 21-07-2011 US 2011177586 A1 21-07-2011 US 2011177609 A1 21-07-2011 US 2012329171 A1 27-12-2012 US 2013101995 A1 25-04-2013
US 2012283108	A1	08-11-2012	NONE