



(86) Date de dépôt PCT/PCT Filing Date: 2007/01/02
(87) Date publication PCT/PCT Publication Date: 2007/08/02
(45) Date de délivrance/Issue Date: 2012/03/27
(85) Entrée phase nationale/National Entry: 2008/07/23
(86) N° demande PCT/PCT Application No.: EP 2007/050013
(87) N° publication PCT/PCT Publication No.: 2007/085503
(30) Priorité/Priority: 2006/01/25 (EP06100823.1)

(51) Cl.Int./Int.Cl. *C01B 33/12* (2006.01),
C08K 3/36 (2006.01), *C09C 1/30* (2006.01)


(72) Inventeurs/Inventors:
FRIEHMELT, RAINER, DE;
FROEHLICH, JOACHIM, DE;
NIEDERMEIER, WERNER, DE;
HOFMANN, RALPH, DE;
SCHACHTELY, UWE, DE

(73) Propriétaire/Owner:
EVONIK DEGUSSA GMBH, DE

(74) Agent: MARKS & CLERK

(54) Titre : PROCEDE DE PREPARATION DE MELANGES DE CAOUTCHOUC RENFERMANT DU DIOXYDE DE SILICIUM

(54) Title: PROCESS FOR PREPARATION OF RUBBER MIXTURES CONTAINING SILICON DIOXIDE

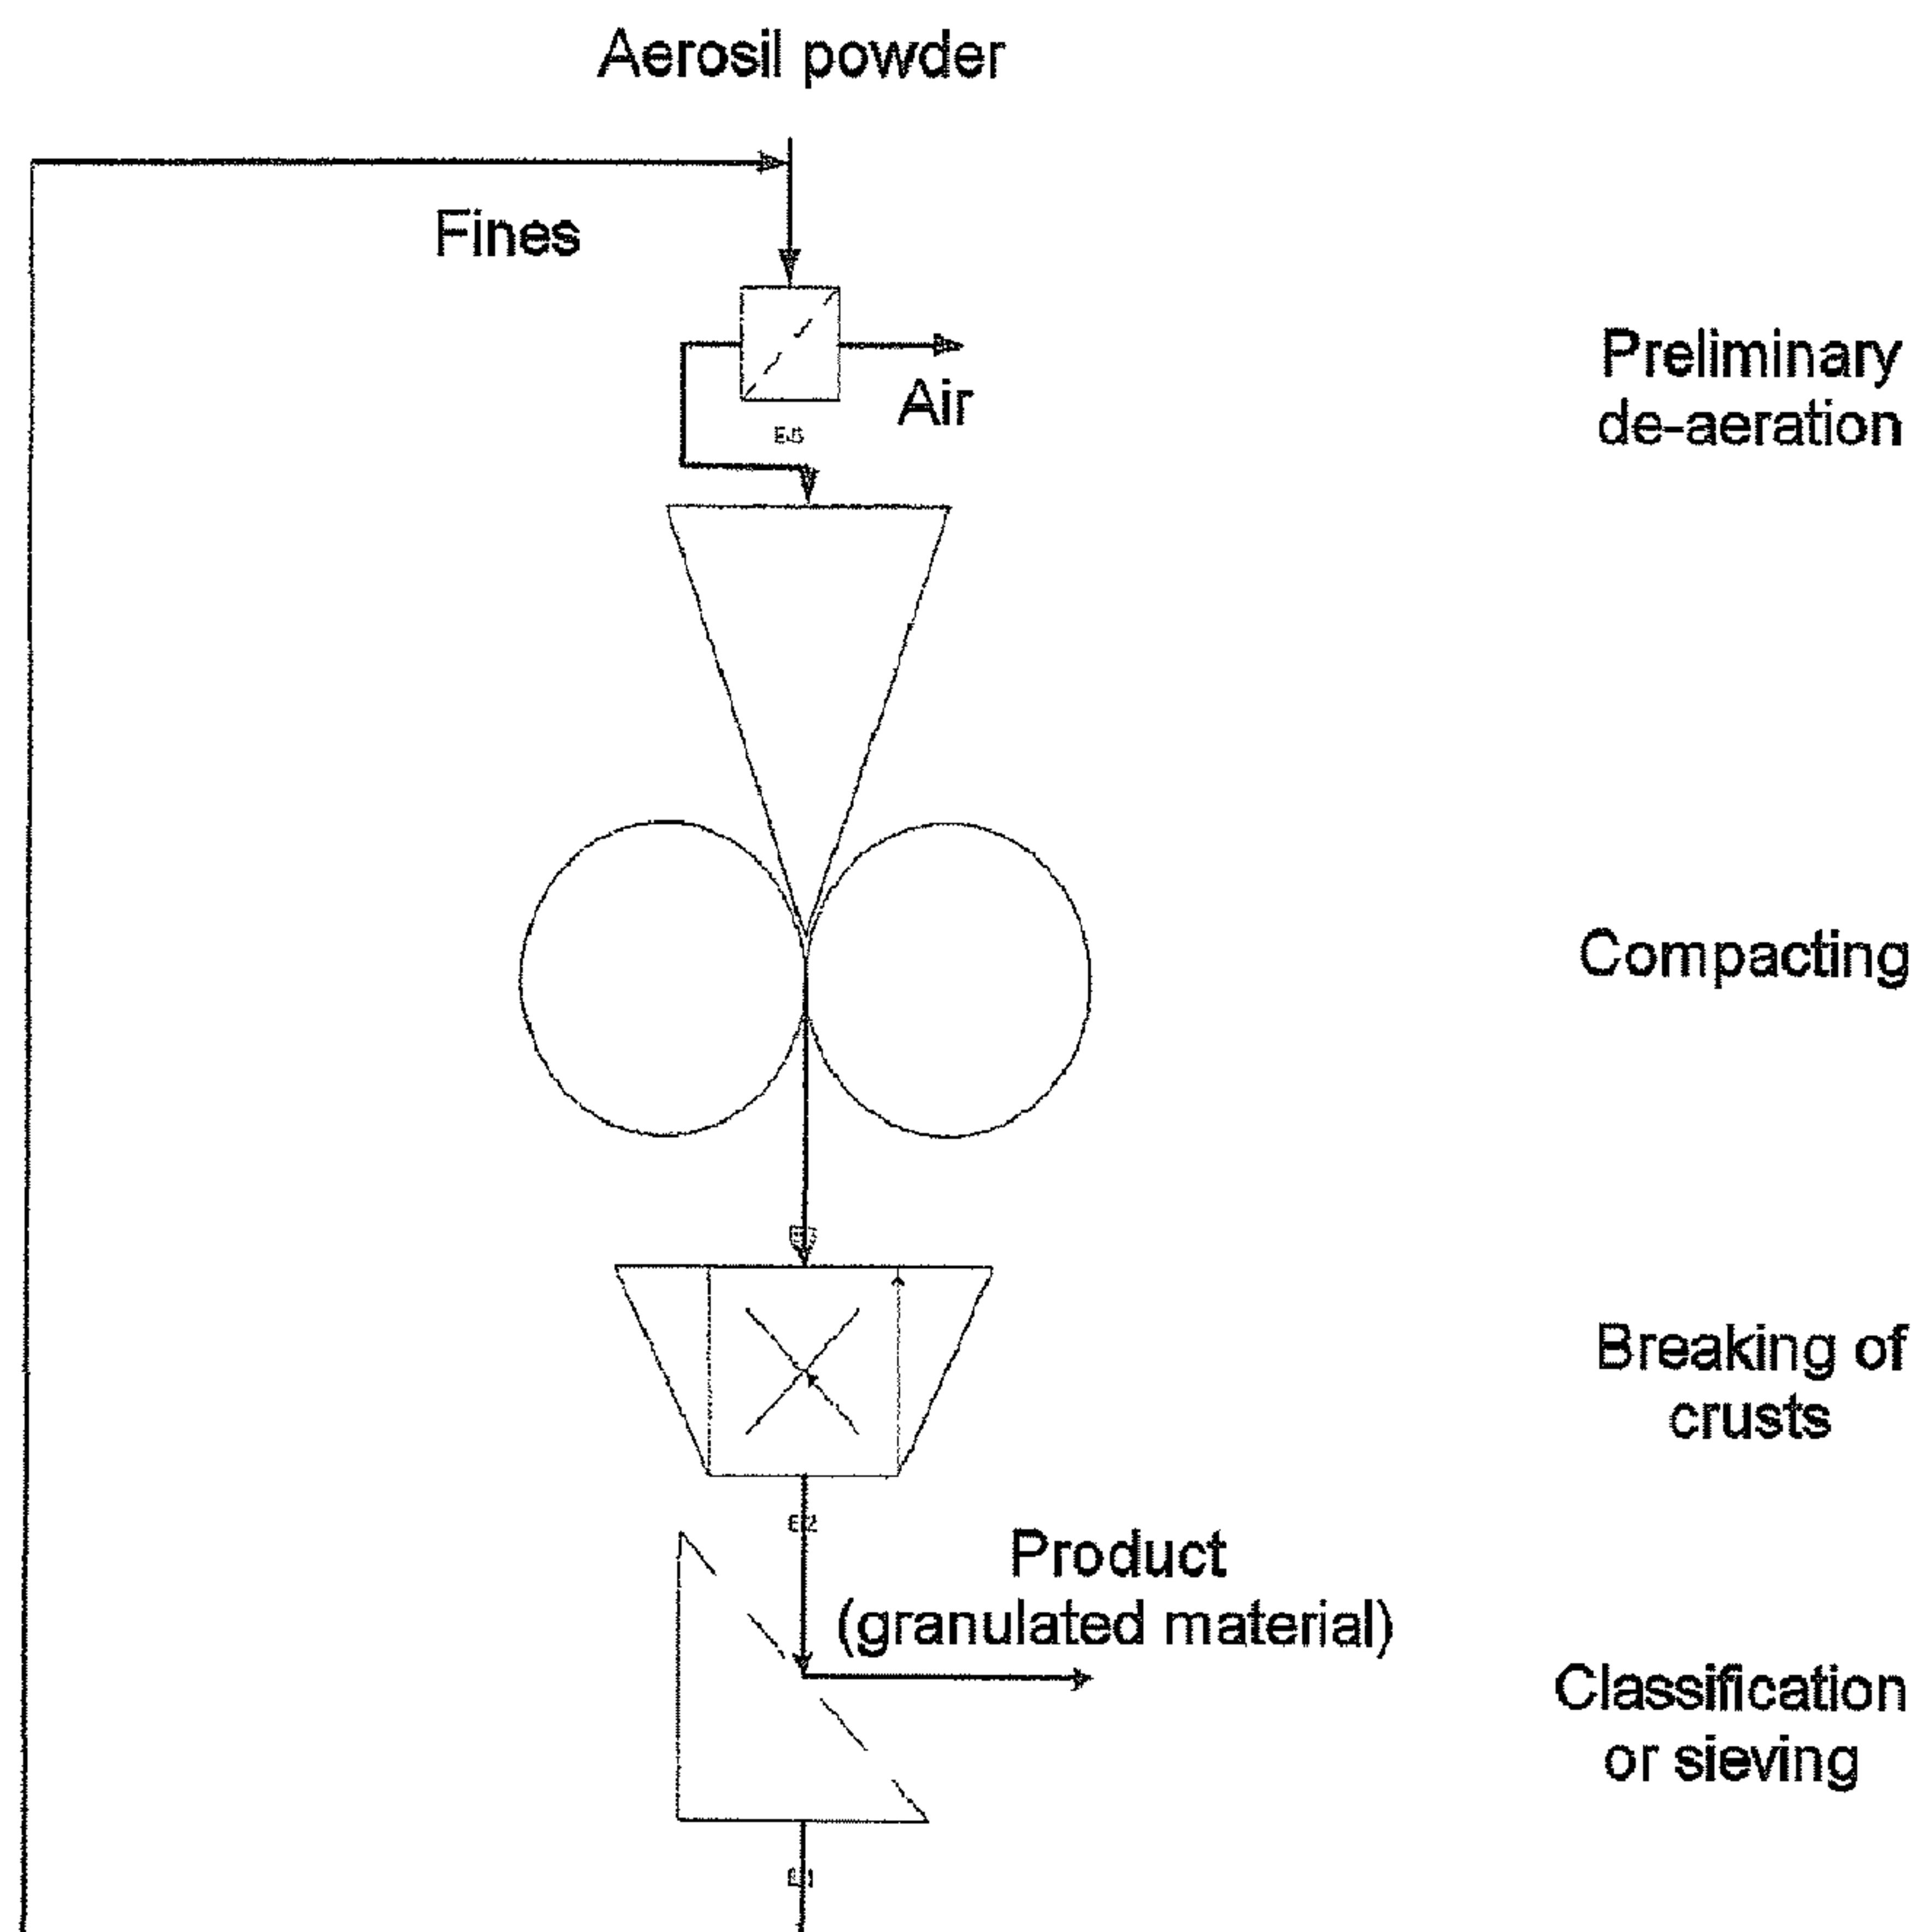

(57) Abrégé/Abstract:

Rubber mixtures are prepared by using, alongside the other constituents, pyrogenically prepared silicon dioxide in the form of crusts whose tamped bulk density (to DIN EN ISO 787-11) is from 185 to 700 g/l.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
2 August 2007 (02.08.2007)

PCT

(10) International Publication Number
WO 2007/085503 A1

(51) International Patent Classification:

C01B 33/12 (2006.01) **C08K 3/36** (2006.01)
C09C 1/30 (2006.01)

(21) International Application Number:

PCT/EP2007/050013

(22) International Filing Date: 2 January 2007 (02.01.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

06100823.1 25 January 2006 (25.01.2006) EP

(71) Applicant (for all designated States except US): **DE-GUSSA GMBH** [DE/DE]; Bennigsenplatz 1, 40474 Düsseldorf (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FRIEHMELT, Rainer** [DE/DE]; Barbarastr. 15b, 61169 Friedberg (DE). **FRÖHLICH, Joachim** [DE/DE]; Kräwinkel 1, 53332

Bornheim (DE). **NIEDERMEIER, Werner** [DE/DE]; Gartenstr. 24, 50321 Brühl (DE). **HOFMANN, Ralph** [DE/DE]; Allensteiner Strasse 6, 74722 Buchen (DE). **SCHACHTELY, Uwe** [DE/DE]; Ostring 18, 63796 Kahl Am Main (DE).


(74) Common Representative: **DEGUSSA GMBH**; S-IPM-PAT, Postcode 84/339, Rodenbacher Chaussee 4, 63457 Hanau (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: PROCESS FOR PREPARATION OF RUBBER MIXTURES CONTAINING SILICON DIOXIDE

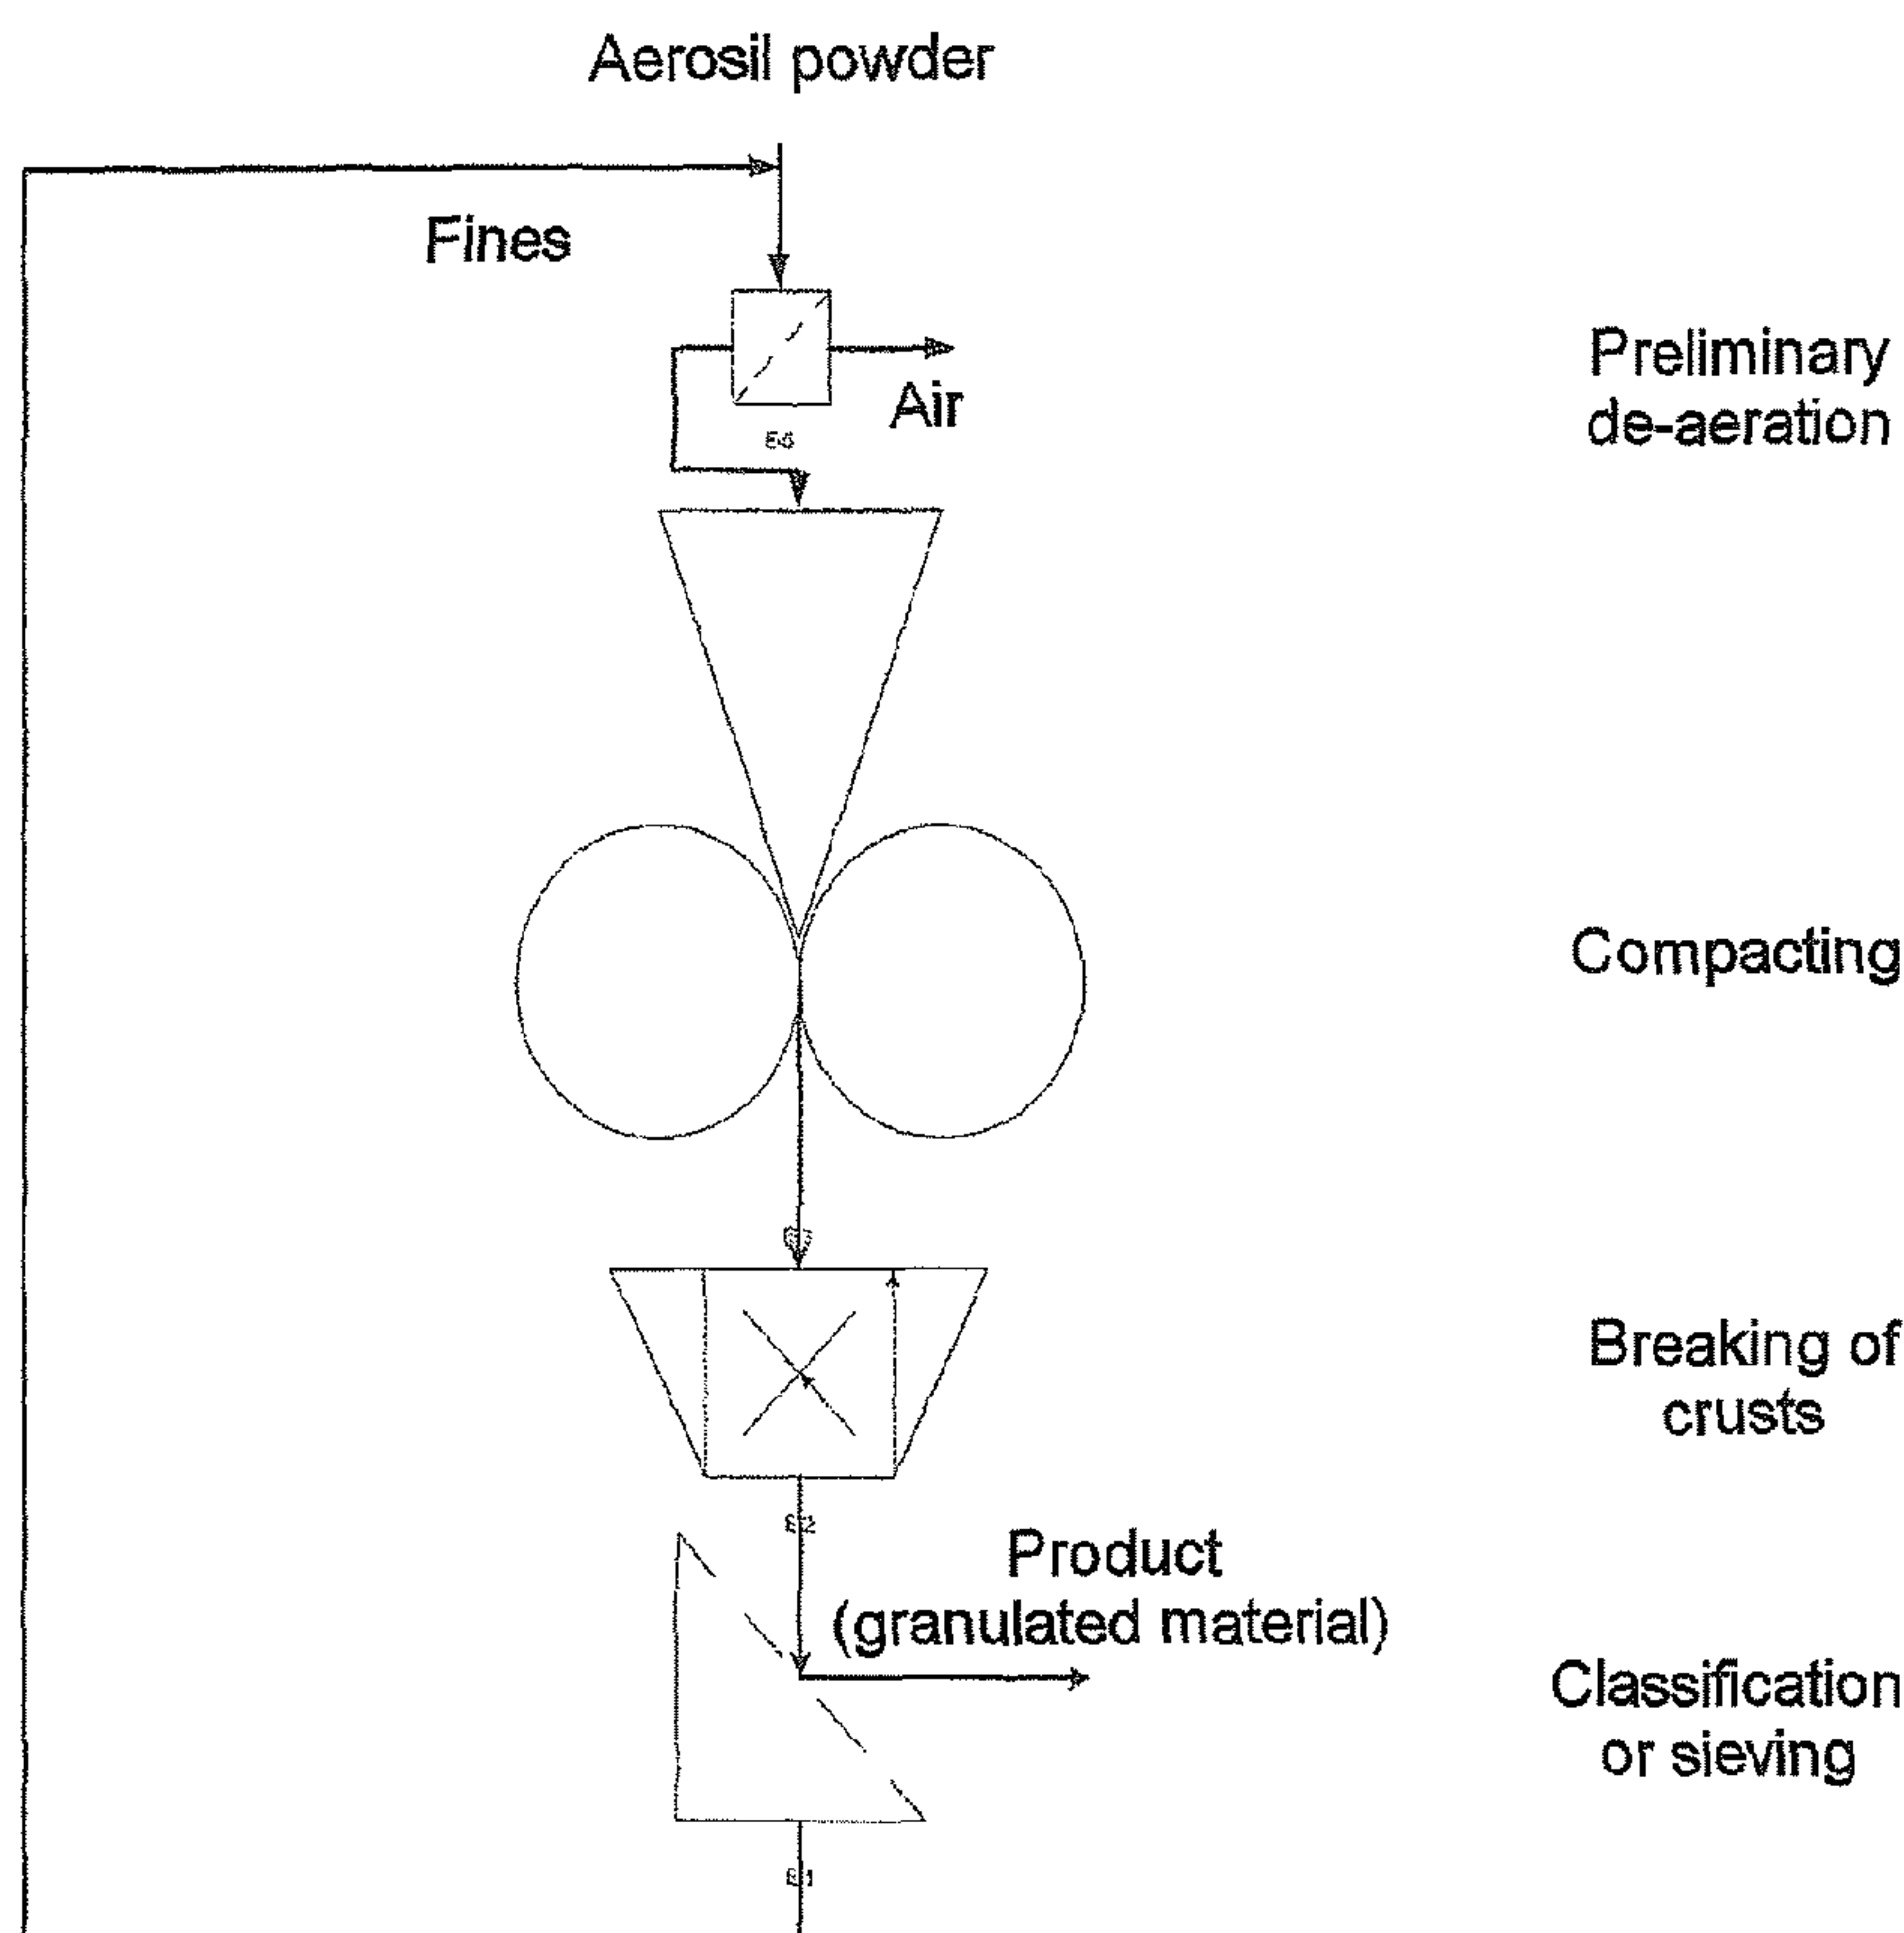

(57) Abstract: Rubber mixtures are prepared by using, alongside the other constituents, pyrogenically prepared silicon dioxide in the form of crusts whose tamped bulk density (to DIN EN ISO 787-11) is from 185 to 700 g/l.

WO 2007/085503 A1

WO 2007/085503 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

PROCESS FOR PREPARATION OF RUBBER MIXTURES CONTAINING SILICON DIOXIDE

The invention relates to a process for preparation of rubber mixtures.

5 Rubber mixtures are widely used. The best-known process uses rubber mixtures for production of tyres. These tyre rubber mixtures comprise, alongside various rubber components, reinforcing fillers, such as carbon black and/or amorphous silicon dioxide.

10

The amorphous silicon dioxide used comprises mainly precipitated silica. Alongside this, pyrogenically prepared silicon dioxide is also used.

15 By way of example, US 6,455,613 B1 discloses use of pyrogenically prepared silicon dioxide in tyre rubber mixtures. The bulk density of this pyrogenically prepared silicon dioxide is from 40 to 60 g/l (pour density, ASTM D1513).

20

Use of pyrogenically prepared silicon dioxide together with a silane coupling agent in the rubber mixtures is known (US 5,430,087 and US 5,294,253).

25 A disadvantage of the known processes is that the pyrogenically prepared silicon dioxide is used in powder form and therefore dust contamination has to be considered. Because the bulk density is low, furthermore, a plurality of steps is needed for
30 addition of the pulverulent, pyrogenically prepared silicon dioxide, the result being an increase in mixing time. Known processes in which the bulk density is increased and dust contamination is reduced can impair dispersibility. Other processes involving an increase
35 in bulk density cannot simultaneously avoid dust contamination.

- 2 -

An object of the invention is to develop a process for preparation of rubber mixtures in which these disadvantages do not occur.

5 The invention provides a process for preparation of rubber mixtures by admixing pyrogenically prepared silicon dioxide alongside other constituents, characterized in that the pyrogenically prepared silicon dioxide is used in the form of crusts whose
10 tamped bulk density (to DIN EN ISO 787-11) is from 185 to 700 g/l.

The tamped bulk density can be from 191 to 700 g/l, preferably from 200 to 700 g/l.

15

According to one aspect of the invention there is provided a process for the preparation of a rubber mixture, the process comprising:

roll compacting pyrogenically prepared silicon
20 dioxide between two rolls to form crusts; and
admixing the pyrogen prepared silicon dioxide with rubber;

wherein a tamped bulk density pursuant to DIN EN ISO 787-11 of the pyrogenically prepared silicon is
25 from 200 to 700 g/l.

30

In one particularly preferred embodiment of the invention, the tamped bulk density of the crusts (to DIN EN ISO 787-11) can be from 200 to 450 g/l.

35

According to the invention, the tamped bulk density of a hydrophilic pyrogenically prepared silicon dioxide compacted to give crusts can preferably be from 191 to 700, in particular from 200 to 700, and also from 200
to 450 g/l.

The tamped bulk density of a hydrophobic pyrogenically prepared silicon dioxide compacted to give crusts can be from 210 to 700 g/l, preferably from 210 to 700 g/l, especially preferred from 210 to 450 g/l.

- 2a -

Crusts is the term used for the somewhat strip-like intermediate products which are produced by pressure on the starting material during roll compacting. They are comminuted in a second step.

5

The properties of the crusts can be influenced via the process variables, e.g. the process control system provided, the compacting force, the width of the gap

between the two rolls and the pressure retention time, which is adjusted via an appropriate alteration in the rotation rates of the compression rolls.

5 Compacting means achievement of a bulk-density increase by mechanical means without addition of binders. In one particular embodiment of the invention, the crusts have a clearly defined shape, and the size distribution here can be adjusted by means of sieving.

10

The inventively used pyrogenically prepared silicon dioxide compacted to give crusts is very stable during transport.

15 In the production of the crusts used according to the invention and composed of pyrogenically prepared silicon dioxide whose tamped bulk density (to DIN EN ISO 787-11) is from 185 to 700 g/l, pyrogenically prepared silicon dioxide is subject to preliminary de-
20 aeration and, respectively, to preliminary bulk-density increase, and is compacted to give crusts, and the crusts are broken and, if appropriate, classified.

Figure 1 is a diagram of the process.

25

According to Figure 1, the pyrogenically prepared silicon dioxide is subject to preliminary bulk-density increase or is de-aerated by means of known methods and apparatuses in the "preliminary de-aeration" step. This
30 step is needed if pyrogenically prepared silicon dioxide is used which is not subject to bulk-density increase, possibly having been freshly prepared.

If a pyrogenically prepared silicon dioxide is used
35 which has been previously subject to preliminary bulk-density increase, this preliminary de-aeration step can be omitted.

The pyrogenically prepared silicon dioxide which has been subject to preliminary de-aeration is subject to bulk-density increase (compacted) to the desired tamped bulk density in the "compacting" step.

5

After compacting, the crusts are broken. Classification or sieving can then be carried out, if appropriate.

10 The fines produced during sieving can be returned to the preliminary de-aeration step.

15 The starting material for preliminary de-aeration can comprise a silicon dioxide which has not been subject to bulk-density increase, or which has been subject to preliminary bulk-density increase.

The preliminary de-aeration process can be carried out prior to transport or during transport to the compacting process.

20

Prior to transport to the compacting process, the preliminary de-aeration process can be carried out by means of a pipe to which vacuum is applied and which is composed of a sintered material, e.g. sintered metal.

25

The preliminary de-aeration process can moreover be carried out in the transport screw, and the transport screw here may be downstream of the apparatus which encompasses a pipe to which vacuum is applied.

30

In another embodiment of the invention, the transport screw can be used as the sole apparatus for the preliminary de-aeration process.

35 The preliminary de-aeration process can moreover be carried out by means of a transport screw arranged within a pipe to which vacuum is applied. The pipe to which vacuum is applied can be composed of a sintered

material, e.g. sintered metal.

If the apparatus is composed of a preliminary de-aeration pipe, e.g. of a pipe to which vacuum is applied, and of a downstream transport screw, the preliminary de-aeration process can be carried out in the pipe, if a silicon dioxide is used which has not been subject to bulk-density increase.

10 If a silicon dioxide which has been subject to preliminary bulk-density increase is used, the preliminary de-aeration process can likewise be carried out in the pipe. It is also possible to omit this preliminary de-aeration step.

15 If exclusively the transport screw is used for the preliminary de-aeration process, it is necessary to use silicon dioxide which has been subject to preliminary bulk-density increase.

20 If the preliminary de-aeration process uses the apparatus which has a transport screw within a pipe to which vacuum is applied, it is possible to use either silicon dioxide which has not been subject to bulk-density increase or else silicon dioxide which has been subject to preliminary bulk-density increase.

The preliminary de-aeration of the pyrogenically prepared silicon dioxide can moreover take place by means of filtration on a filter medium, e.g. a cloth or sintered material, e.g. sintered metal, sintered plastic, sintered ceramic, porous glass, with continuous filtercake removal via, for example, a conveying screw or a scraper. In one embodiment, a sintered metal pipe can be used with a metering screw.

The preliminary de-aeration can moreover take place by means of sedimentation, where the break-up of solid

bridges is promoted via additional use of vibration or sound or via slow stirring.

The starting material used can be a hydrophilic,
 5 pyrogenically prepared silicon dioxide or a hydrophobic, pyrogenically prepared silicon dioxide.

The hydrophobic pyrogenically prepared silicon dioxide can be prepared by means of surface modification.

10

One or more compounds from the following group can be used for the surface modification process:

15 a) organosilanes of the type $(RO)_3Si(C_nH_{2n+1})$ and $(RO)_3Si(C_nH_{2n-1})$

R = alkyl, e.g. methyl, ethyl, n-propyl, iso-propyl, butyl

n = from 1 to 20

20 b) organosilanes of the type $R'_x(RO)_ySi(C_nH_{2n+1})$ and $R'_x(RO)_ySi(C_nH_{2n-1})$

R = alkyl, e.g. methyl, ethyl, n-propyl, iso-propyl, butyl

25 R' = alkyl, e.g. methyl, ethyl, n-propyl, iso-propyl, butyl

R' = cycloalkyl

n = from 1 to 20

x+y = 3

x = 1, 2

30 y = 1, 2

c) haloorganosilanes of the type $X_3Si(C_nH_{2n+1})$ and $X_3Si(C_nH_{2n-1})$

X = Cl, Br

35 n = from 1 to 20

d) haloorganosilanes of the type $X_2(R')Si(C_nH_{2n+1})$ and $X_2(R')Si(C_nH_{2n-1})$

- 7 -

- X = Cl, Br
 R' = alkyl, e.g. methyl, ethyl, n-propyl, iso-propyl, butyl
 R' = cycloalkyl
 5 n = from 1 to 20
- e) haloorganosilanes of the type $X(R')_2Si(C_nH_{2n+1})$ and $X(R')_2Si(C_nH_{2n-1})$
 X = Cl, Br
 10 R' = alkyl, e.g. methyl, ethyl, n-propyl, iso-propyl, butyl
 R' = cycloalkyl
 n = from 1 to 20
- 15 f) organosilanes of the type $(RO)_3Si(CH_2)_m-R'$
 R = alkyl, e.g. methyl, ethyl, propyl
 m = 0, from 1 to 20
 R' = methyl, aryl (e.g. $-C_6H_5$, substituted phenyl radicals)
 20 $-C_4F_9$, $OCF_2-CHF-CF_3$, $-C_6F_{13}$, $-O-CF_2-CHF_2$
 $-NH_2$, $-N_3$, $-SCN$, $-CH=CH_2$, $-NH-CH_2-CH_2-NH_2$,
 $-N-(CH_2-CH_2-NH_2)_2$
 $-OOC(CH_3)C=CH_2$
 $-OCH_2-CH(O)CH_2$
 25 $-NH-CO-N-CO-(CH_2)_5$
 $-NH-COO-CH_3$, $-NH-COO-CH_2-CH_3$, $-NH-(CH_2)_3Si-(OR)_3$
 $-S_x-(CH_2)_3Si(OR)_3$, where X = from 1 to 10 and R can be alkyl, e.g. methyl, ethyl, propyl,
 30 butyl
 $-SH$
 $-NR'R''R'''$ (R' = alkyl, aryl; R'' = H, alkyl, aryl; R''' = H, alkyl, aryl, benzyl, $C_2H_4NR''''R'''''$, where R'''' = A, alkyl and
 35 R''''' = H, alkyl)
- g) organosilanes of the type $(R'')_x(RO)_ySi(CH_2)_m-R'$
 R'' = alkyl $x+y = 2$

- 8 -

= cycloalkyl x = 1, 2
 y = 1, 2
 m = 0, from 1 to 20

R' = methyl, aryl (e.g. -C₆H₅, substituted phenyl
 5 radicals)

-C₄F₉, -OCF₂-CHF-CF₃, -C₆F₁₃, -O-CF₂-CHF₂,
 -NH₂, -N₃, -SCN, -CH=CH₂, -NH-CH₂-CH₂-NH₂,
 -N-(CH₂-CH₂-NH₂)₂
 -OOC(CH₃)C=CH₂
 10 -OCH₂-CH(O)CH₂
 -NH-CO-N-CO-(CH₂)₅
 -NH-COO-CH₃, -NH-COO-CH₂-CH₃, -NH-(CH₂)₃Si-
 (OR)₃

-S_x-(CH₂)₃Si(OR)₃, where X = from 1 to 10 and
 15 R can be methyl, ethyl, propyl, butyl

-SH-NR'R''R''' (R' = alkyl, aryl; R'' = H,
 alkyl, aryl; R''' = H, alkyl, aryl, benzyl,
 C₂H₄NR''''R''''', where R'''' = A, alkyl and
 R'''''' = H, alkyl)

20 h) haloorganosilanes of the type X₃Si(CH₂)_m-R'

X = Cl, Br

m = 0, from 1 to 20

R' = methyl, aryl (e.g. -C₆H₅, substituted phenyl
 25 radicals)


-C₄F₉, -OCF₂-CHF-CF₃, -C₆F₁₃, -O-CF₂-CHF₂
 -NH₂, -N₃, -SCN, -CH=CH₂,
 -NH-CH₂-CH₂-NH₂
 -N-(CH₂-CH₂-NH₂)₂
 30 -OOC(CH₃)C=CH₂
 -OCH₂-CH(O)CH₂
 -NH-CO-N-CO-(CH₂)₅
 -NH-COO-CH₃, -NH-COO-CH₂-CH₃, -NH-(CH₂)₃Si-
 (OR)₃

-S_x-(CH₂)₃Si(OR)₃, where X = from 1 to 10 and
 35 R can be methyl, ethyl, propyl, butyl

-SH

- i) haloorganosilanes of the type $(R)X_2Si(CH_2)_m-R'$
 $X = Cl, Br$
 $R =$ alkyl, e.g. methyl, ethyl, propyl
 $m =$ 0, from 1 to 20
5 $R' =$ methyl, aryl (e.g. $-C_6H_5$, substituted phenyl radicals)
 $-C_4F_9, -OCF_2-CHF-CF_3, -C_6F_{13}, -O-CF_2-CHF_2$
 $-NH_2, -N_3, -SCN, -CH=CH_2, -NH-CH_2-CH_2-NH_2,$
 $-N-(CH_2-CH_2-NH_2)_2$
10 $-OOC(CH_3)C=CH_2$
 $-OCH_2-CH(O)CH_2$
 $-NH-CO-N-CO-(CH_2)_5$
 $-NH-COO-CH_3, -NH-COO-CH_2-CH_3, -NH-(CH_2)_3Si-$
 $(OR)_3,$
15 where R can be methyl, ethyl, propyl, butyl
 $-S_x-(CH_2)_3Si(OR)_3,$ where R can be methyl, ethyl, propyl, butyl and X can be from 1 to 10
 $-SH$
20
- j) haloorganosilanes of the type $(R)_2XSi(CH_2)_m-R'$
 $X = Cl, Br$
 $R =$ alkyl, e.g. methyl, ethyl, propyl, butyl
 $m =$ 0, from 1 to 20
25 $R' =$ methyl, aryl (e.g. $-C_6H_5$, substituted phenyl radicals)
 $-C_4F_9, -OCF_2-CHF-CF_3, -C_6F_{13}, -O-CF_2-CHF_2$
 $-NH_2, -N_3, -SCN, -CH=CH_2, -NH-CH_2-CH_2-NH_2,$
 $-N-(CH_2-CH_2-NH_2)_2$
30 $-OOC(CH_3)C=CH_2$
 $-OCH_2-CH(O)CH_2$
 $-NH-CO-N-CO-(CH_2)_5$
 $-NH-COO-CH_3, -NH-COO-CH_2-CH_3, -NH-(CH_2)_3Si-$
 $(OR)_3$
35 $-S_x-(CH_2)_3Si(OR)_3,$ where X = from 1 to 10 and R can be methyl, ethyl, propyl, butyl
 $-SH$

k) silazanes of the type $R'R_2Si-N-SiR_2R'$




R = alkyl

5 R' = alkyl, vinyl


l) cyclic polysiloxanes of the type D 3, D 4, D 5,
where D 3, D 4 and D 5 are cyclic polysiloxanes
having 3, 4 or 5 units of the type $-O-Si(CH_3)_2-$.

10 For example, octamethylcyclotetrasiloxane = D 4

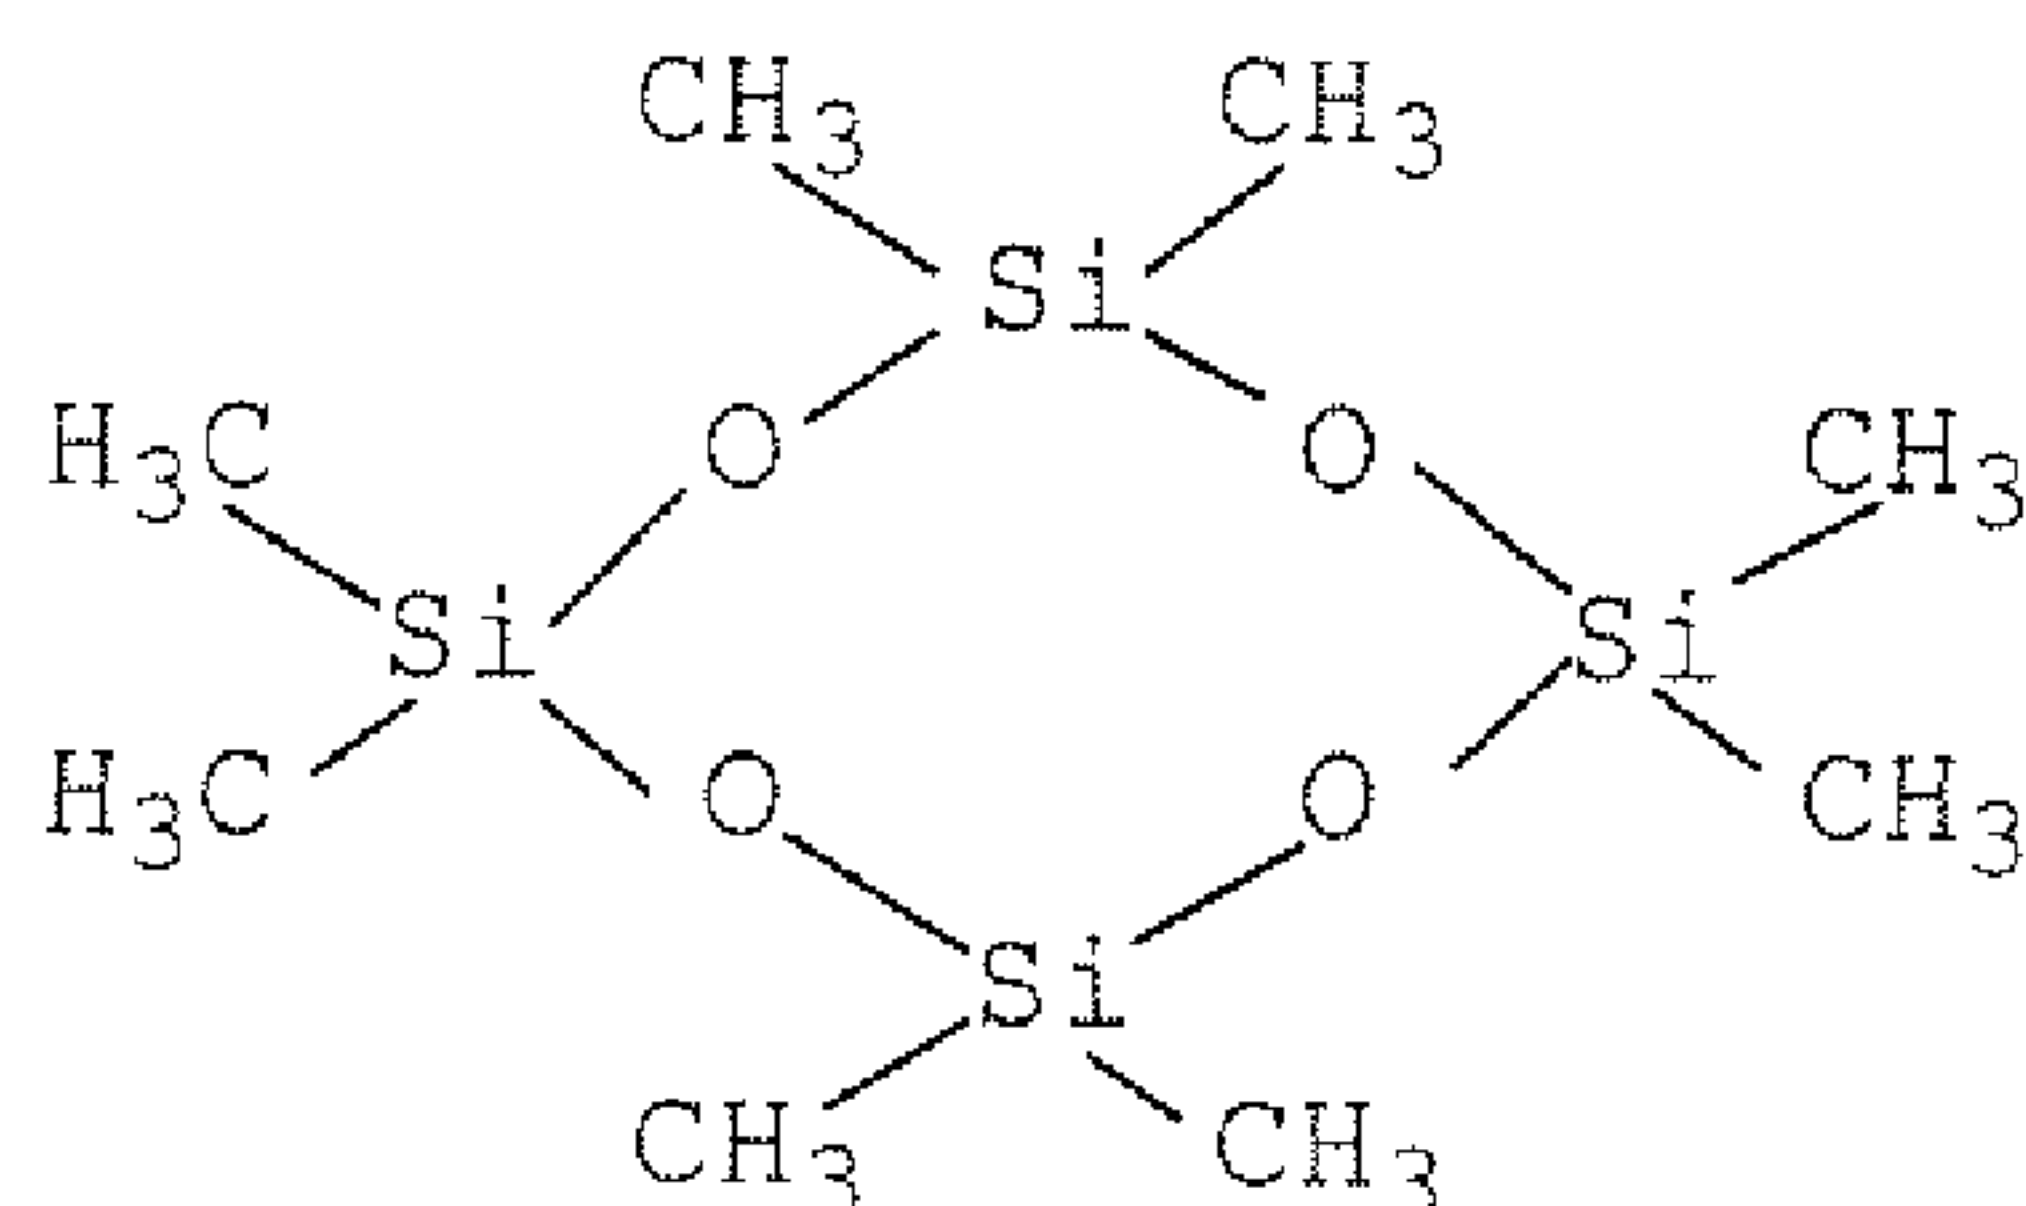

m) polysiloxanes or silicone oils of the type

15

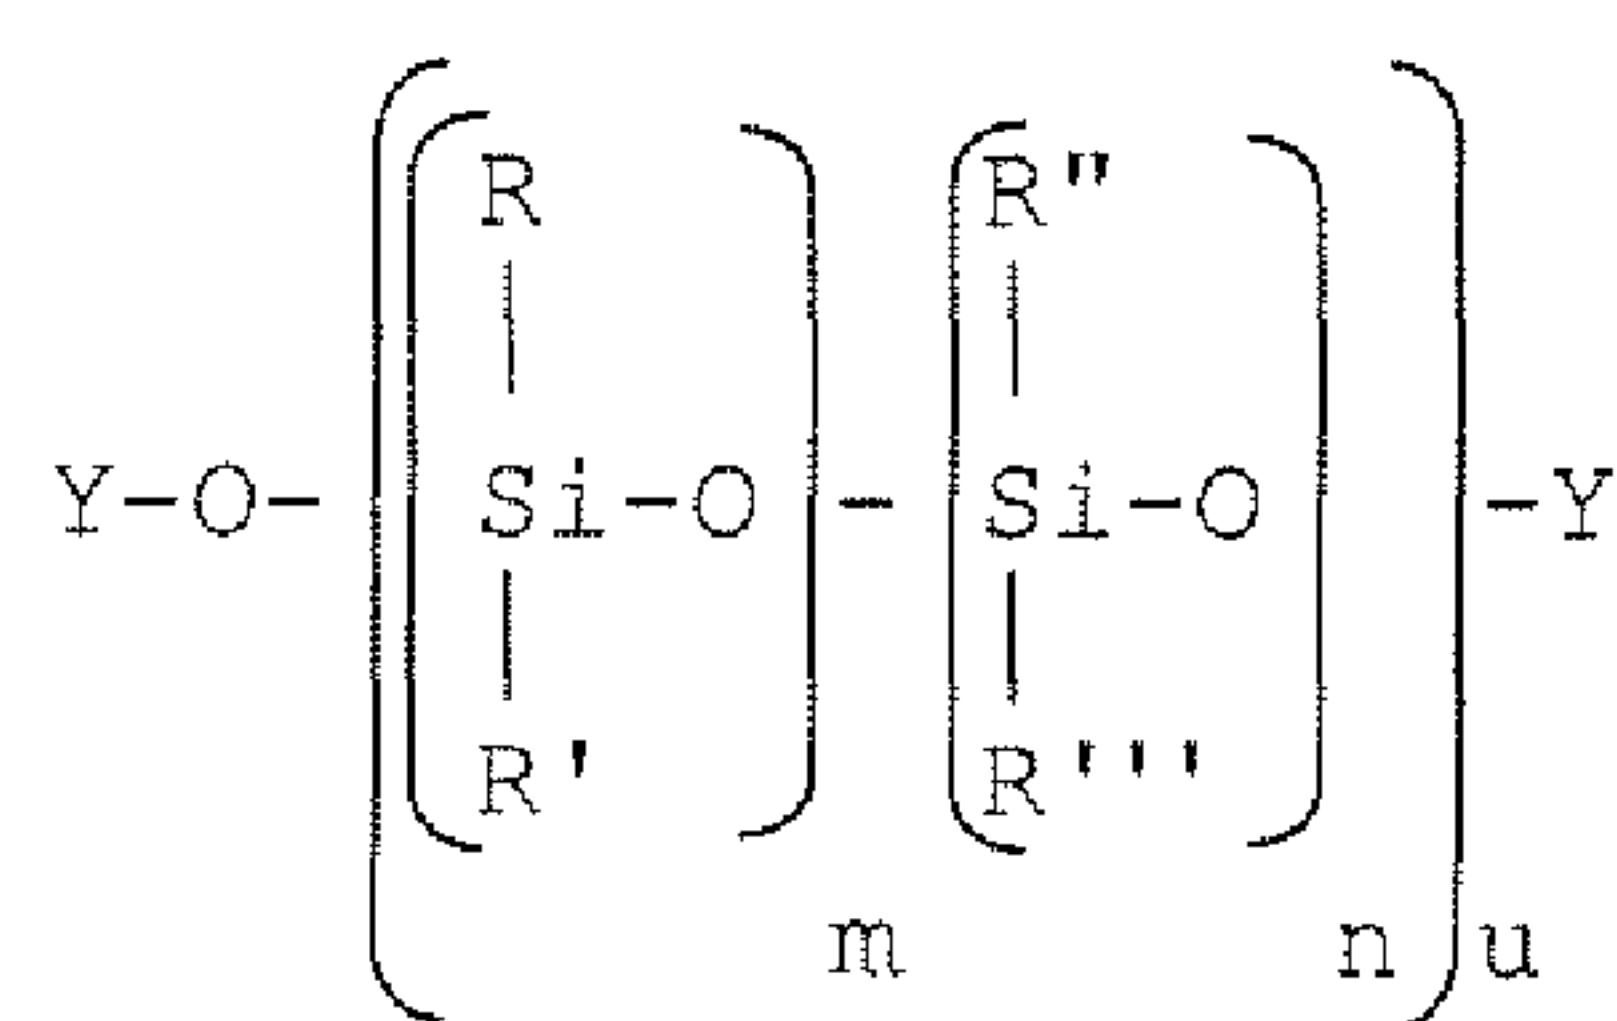

$m = 0, 1, 2, 3, \dots \infty$

$n = 0, 1, 2, 3, \dots \infty$

$u = 0, 1, 2, 3, \dots \infty$

20

$Y = CH_3, H, C_nH_{2n+1} \quad n=1-20$

$Y = Si(CH_3)_3, Si(CH_3)_2H$

$Si(CH_3)_2OH, Si(CH_3)_2(OCH_3)$

$Si(CH_3)_2(C_nH_{2n+1}) \quad n=1-20$

R = alkyl, e.g. C_nH_{2n+1} , where n = from 1 to 20,
25 aryl,

e.g.

phenyl and substituted phenyl radicals, $(CH_2)_n-$
 NH_2, H

R' = alkyl, e.g. C_nH_{2n+1} , where n = from 1 to 20,
30 aryl,

e.g.

phenyl and substituted phenyl radicals, $(\text{CH}_2)_n\text{-NH}_2$, H
R'' = alkyl, e.g. $\text{C}_n\text{H}_{2n+1}$, where n = from 1 to 20,
aryl,
5 e.g.
phenyl and substituted phenyl radicals, $(\text{CH}_2)_n\text{-NH}_2$, H
R''' = alkyl, e.g. $\text{C}_n\text{H}_{2n+1}$, where n = from 1 to 20,
aryl,
10 e.g.
phenyl and substituted phenyl radicals, $(\text{CH}_2)_n\text{-NH}_2$, H.

In one embodiment, the starting material used can
15 comprise a pyrogenically prepared silicon dioxide
subject to preliminary bulk-density increase.

When the pyrogenically prepared silicon dioxide used is
not subject to bulk-density increase its tamped bulk
20 density (to DIN EN ISO 787-11) can be smaller than
50 g/l, preferably from 20 to 30 g/l. The pyrogenically
prepared silicon dioxide used which is subject to pre-
liminary bulk-density increase can have a tamped bulk
density (to DIN EN ISO 787-11) of from 50 to 190 g/l,
25 preferably from 100 to 150 g/l, and the tamped bulk
density here (to DIN EN ISO 787-11) of a hydrophobic
pyrogenically prepared silicon dioxide subject to
preliminary bulk-density increase can be from 90 to
120 g/l.

30 In the state not subject to bulk-density increase, the
hydrophilic silicon dioxide used can have a tamped bulk
density (to DIN EN ISO 787-11) smaller than 50 g/l,
preferably from 20 to 30 g/l.

35 In the state subject to preliminary bulk-density
increase, the hydrophilic silicon dioxide can have a
tamped bulk density (to DIN EN ISO 787-11) of from 50

to 190 g/l, preferably from 100 to 150 g/l.

In the state subject to preliminary bulk-density increase, the hydrophobic silicon dioxide can have a
5 tamped bulk density (to DIN EN ISO 787-11) of from 50 to 190 g/l, preferably from 90 to 120 g/l.

The primary particle size of the pyrogenically prepared silicon dioxide used can be from 5 to 50 nm and its BET
10 surface area can be from 40 to 400 m²/g, preferably from 100 to 250 m²/g.

The water content of the pyrogenically prepared silicon dioxide used can be smaller than 1% by weight.

15

The pyrogenically prepared silicon dioxide can be subject to preliminary bulk-density increase by means of known processes and apparatuses. By way of example, the apparatuses according to US 4,325,686,
20 US 4,877,595, US 3,838,785, US 3,742,566, US 3,762,851, US 3,860,682 can be used.

It is moreover possible to use a pyrogenically prepared silicon dioxide subject to preliminary bulk-density
25 increase by means of a pressure-belt filter according to EP 0280851 B1 or US 4,877,595.

By way of example, the transport of the pyrogenically prepared silicon dioxide to the compacting process can
30 take place by means of a screw.

This transport consists in forcing the pyrogenically prepared silicon dioxide into the nip of the compacting rolls. If a conveying screw is not used, it is
35 necessary to use a pyrogenically prepared silicon dioxide which has been subject to preliminary bulk-density increase.

If a conveying screw is used, the pyrogenically prepared silicon dioxide may not be subject to preliminary bulk-density increase, because preliminary de-aeration takes place here.

5

In order to achieve high bulk densities of the crusts, it is possible to use a conveying screw and a pyrogenically prepared silicon dioxide subject to preliminary bulk-density increase.

10

The conveying screw used can comprise a screw with decreasing volume or with increasing pitch or with decreasing diameter.

15 Surrounding the conveying screw there can be a pipe to which vacuum is applied. This pipe can be composed of a sintered jacket. The preliminary de-aeration of the silicon dioxide takes place here in the transport screw simultaneously with the transport into the nip.

20

Compacting to give crusts can take place by means of two rolls, of which one, or else both simultaneously, can have a de-aerating function.

25 It is preferable to use two compacting rolls, which can be smooth. They can also have a profile. The profile can be present either only on one compacting roll or else on both compacting rolls.

30 The profile can be composed of grooves parallel to the axis. As an alternative, it can be composed of recesses (depressions) of any desired shape, arranged in any desired manner.

35 In another embodiment of the invention, at least one of the rolls can be a vacuum roll. In this embodiment, the roll can have been covered with sintered metal.

In order to bring about the de-aeration function, the roll can have been produced from sintered metal or can have been covered with a filter medium, for example with a cloth.

5

If de-aeration of the pyrogenically prepared silicon dioxide is possible by means of the rolls, it is possible to omit the additional preliminary de-aeration which can take place in the conveying screw or in the
10 feed pipe.

If the roll is used for preliminary de-aeration, the roll can have a smooth or profiled surface, and this surface can be only slightly grooved, in order to
15 improve take-up of the product.

The compacting process should ensure uniform compression of the pyrogenically prepared silicon dioxide, in order to give crusts with uniform density.

20

Apparatus as shown in Figure 2 can be used to carry out the compacting process.

According to Figure 2, the pyrogenically prepared
25 silicon dioxide is introduced by means of the screw 1 into the chamber 2 between the two rolls 3 and is pressed between the two rolls to give crusts.

The process can moreover be carried out by using an
30 apparatus as described in the document DE B 1807714.

It is preferable to use smooth rolls in the compacting process, in order to avoid grit. It is moreover possible to use one or two rolls composed of sintered
35 material, e.g. sintered metal or sintered ceramic, by way of which de-aeration can take place.

After the compacting process, the crusts are broken. A

sieving granulator can be used for this purpose, and its sieve mesh width prescribes the grain size. The mesh width can be from 250 μm to 20 mm.

- 5 For breaking of the crusts it is moreover possible to use an apparatus with two counter-rotating rolls with a defined gap, or a toothed roll.

The broken crusts can be classified by means of a
10 sifter, a sieve or a classifier. The fines (particles smaller than 200 μm) can thereby be removed.

Sifters that can be used are cross-flow sifters, countercurrent baffle-type sifters, etc.

15

A cyclone can be used as classifier.

The fines (particles smaller than 200 μm) removed during classification can be returned to the process.

20

Determination of tamped bulk density

Tamped bulk density was measured to DIN EN ISO 787-11. Prior to the measurements, the specimens were passed
25 through a 5 mm sieve in order to break up large agglomerates and obtain reproducible measurements.

Determination of dust content

30 Dust content is determined to DIN 55992-2.

The comparative pyrogenic silica products subject to bulk-density increase by the apparatus according to EP 0 280 851 A1, and the inventive crusts, were passed
35 through a 5 mm sieve prior to the measurements, in order to break up large agglomerates and obtain reproducible measurements.

Figure 3 shows a diagram of the test device for determination of dust content.

To determine dust content, a weighed-out amount (3 g) of the inventive crusts or of the comparative product according to EP 0 280 851 A1 is charged to a feed system at the upper end of the vertical pipe. This has been sealed below by flaps prior to the start of the test. The end of the vertical pipe has been sealed. At the start of the test, this flap is opened for a certain period so that the specimen can drop into the vertical pipe. The specimen dissipates dust into the air during the drop and on impact on the base of the vertical pipe. Air turbulence during the drop provides uniform distribution of the dust in the pipe. Sedimentation of the suspended materials then begins. The light extinction brought about by the suspended material at the lower end of the vertical pipe is measured via a photometric sensor. The sedimentation curve is indicated by a PC as extinction as a function of time. Extinction is a measure of relative particle concentration.

From the curve of extinction as a function of time it is possible to determine the cumulative dust values. The cumulative dust values are determined as follows from the sedimentation curve measured from an initial time t_a to the end of the test after 30 s:

$$I(t_a) = \int_{t_a}^{30s} E(t) dt \quad \text{where } t_a = 1s, 2s, 4s, 8s, 16s \quad (1)$$

30

These cumulative dust values describe the amount of dust liberated. The cumulative dust value from 16 s to 30 s is also termed the "dust value". It contains information on fine dust or is a measure of fine dust content.

35

The cumulative dust value from 1 s to 30 s describes the total amount of dust, composed of coarse dust and fine dust.

5

The inventive crusts of a pyrogenic silica differ in these two values from pyrogenic silica subject to bulk-density increase by an apparatus according to EP 0 280 851 A1.

10

Example

Comparison of the dust performance of pyrogenic silica subject to bulk-density increase in an apparatus according to EP 0 280 851 A1 with the inventive crusts of a pyrogenic silica. The BET surface area of both specimens is 150 m²/g.

Figure 7 shows the curve of extinction as a function of time or of relative dust concentration during the determination described above of dust content of the two specimens. This curve shows that the inventive compactates sediment substantially more rapidly and that after 16 s there is less fine dust remaining in suspension than with pyrogenic silica subject to bulk-density increase according to EP 0 280 851 A1. Over the entire duration of the test, the inventive crusts liberate substantially less dust than does the pyrogenic silica subject to bulk-density increase according to EP 0 280 851 A1. Extinction assumes markedly lower numeric values in Figure 7 for the inventive crusts.

Table 1: Comparison of total dust contents and fine dust contents (dust values = cumulative dust value from 1 s to 30 s and from 16 s to 30 s)

5

	Dust value* I (1 s) (from eq. 1) [rel. conc. * s]	Dust value* I (16 s) (from eq. 1) [rel. conc. * s]
Pyrogenic silica, subject to bulk- density increase by apparatus according to EP 0 280 851 A1	207	62
Inventive crusts of a pyrogenic silica	113	40

* The statistical independence of the dust values of the two experimental products was demonstrated via the T test. 12 replicating experiments were carried out from each specimen.

The cumulative dust values in the determination described above of dust contents differ markedly from one another. Firstly, pyrogenic silica subject to bulk-density increase according to EP 0 280 851 A1 generates, with a I(1s) value of 207, significantly more coarse and fine dust than the inventive crusts with a I(1s) value of 113. Furthermore, the crusts have a fine dust value (I(16s)) of 40, whereas pyrogenic silica subject to bulk-density increase by an apparatus according to EP 0 280 851 A1 has a substantially higher dust value: 62. That means that the inventive compacting process to give crusts can significantly reduce not only the total dust content but also the fine dust content when comparison is made with bulk-density increase according to EP 0 280 851 A1.

Figure 4 compares the fine dust content of the

pyrogenically prepared silicon dioxide compacted to give crusts and the fine dust contents of pyrogenic silicon dioxide subject to bulk-density increase in a known manner.

5

Starting materials used for the process for producing the crusts comprise a pyrogenically prepared silicon dioxide subject to bulk-density increase by means of the pressure-belt filter according to EP 0 280 851 B1.

10

Figure 4 shows a measure of the particle size distribution and the average particle size of the loose powder and, respectively, of the loose crusts. It is apparent here that the crusts used according to the invention and composed of the pyrogenically prepared silicon dioxide sediment significantly better and generate significantly less dust than the granulated material according to EP 0 725 037 A1.

20

Figure 4 moreover shows a measure of content of fine or suspended dust. It is apparent here that the content of suspended dust can be drastically reduced for the crusts used according to the invention. In the case of granulated material according to EP 0 725 037 A1, a large proportion remains suspended for a very long time.

25

Figure 5 shows the cumulative distribution (Q-3 distribution) of granulated materials according to EP 0 725 037 A1 and according to the invention.

30

The crusts used according to the invention where $X < 250 \mu\text{m}$ have the same average particle size in laser diffraction spectroscopy as the granulated material according to EP 0 725 037 A1. In both cases it is $\sim 35 \mu\text{m}$.

35

The crusts used according to the invention generate

significantly less dust, however.

The fractions of the crusts were prepared via sieving granulation using a sieve of mesh width 500 μm and
5 subsequent sieving on a 250 μm sieve. The fraction $x < 250 \mu\text{m}$ was the fine product in the sieving process. The fraction whose particle size was from 250 to 500 μm was the coarse product.

10 Figure 6 shows the granulated form after breaking and sieving of the pyrogenically prepared silicon dioxide compacted to give crusts and used according to the invention. It has an angled shape.

15 The granulated materials according to DE 19601415 have spherical appearance.

In one preferred embodiment of the invention, the tamped bulk density (to DIN EN ISO 787-11) of the
20 crusts obtained is from 210 to 450 g/l. These crusts then have the necessary strength not to break apart again in the subsequent steps. However, they can be dispersed again readily.

25 The crusts obtained are moreover porous.

The crusts used according to the invention have an advantageously low dust content after breaking, even without sieving or classification.

30

The agglomerate hardness of the crusts used according to the invention is smaller than 50N, measured by ERWEKA 30.

35 The pyrogenically prepared silicon dioxide compacted to give crusts has, after sieving, no fines content with diameter smaller than 200 μm .

The pyrogenically prepared silicon dioxide compacted to give crusts and used according to the invention has a low dust level which is advantageous for all applications. It can be incorporated in mixtures
5 without losses and without dust contamination.

Although the pyrogenically prepared silicon dioxide has been compacted, the inventive crusts have adequate redispersibility in rubber mixtures. But the
10 redispersibility is not sufficient for silicon rubber.

The pyrogenically prepared silicon dioxide compacted according to the invention to give crusts comprises no binder.
15

The use of silicas as reinforcing filler in the type of rubber mixtures used inter alia for production of pneumatic tyres and of technical rubber items is subject to stringent requirements. The materials are
20 intended to be lightweight and capable of good incorporation and dispersion within the rubber and of undergoing, in conjunction with a coupling reagent, preferably a bifunctional organosilicon compound, a chemical reaction with the rubber which leads to the
25 desired high level of reinforcement of the rubber mixture. The reinforcing property can in particular be associated with high static stress values and a low abrasion value. Particular factors of decisive importance for the reinforcing property of silicas are
30 the particle size, their surface and morphology, surface activity, and also the capability for binding of the coupling reagent.

Another factor known to the person skilled in the art
35 is that low-molecular-weight compounds, e.g. the bifunctional organosilicon compounds and vulcanization accelerators, can be involved in physi- and chemisorption processes in the pores of the microporous

- 22 -

silica, the result being only limited residual capability for exerting their function as rubber coupling agents or vulcanization accelerators for the crosslinking of the rubber.

5

Another factor known to the person skilled in the art is that the coupling reagent, usually a bifunctional organosilicon compound known from, for example, S. Wolff "Chemical Aspects of Rubber Reinforcement by
10 Fillers", Rubber Chem. Technol. 69, 325 (1996), is intended to maximize the homogeneity and quantitateness of modification of the surface having activity with respect to the rubber. The modification can take place via precoating of the bulk silica or in
15 solution/suspension (ex-situ) (U. Görl, R. Panenka, "Silanisierte Kieselsäuren - Eine neue Produktklasse für zeitgemäße Mischungsentwicklung", Kautsch. Gummi Kunstst. 46, 538 (1993)) [Silanized silicas - a new class of product for contemporary mixture development],
20 or else during the mixing process (in-situ) (H.-D. Luginsland, "Processing of silica/silane-filled tread compounds", paper No. 34 presented at the ACS Meeting, April 4-6, 2000, Dallas, Texas/USA), in-situ modification being the process that is preferable and
25 is also conventionally used.

The silica used according to the invention can optionally be modified with linear, cyclic and/or branched silanes, silazanes, siloxane compounds and/or
30 organosilicon compounds. The substituents can be composed, for example, of -SCN, -SH, -Cl, -NH₂, -OC(O)CH=CH₂, -OC(O)C(CH₃)=CH₂, -S, -S₂, -S₃, -S₄, aliphatics, olefins, aromatics, arylaromatics with or without hydroxy, amino, alkoxy, silanol, cyanide, thio-
35 cyanide, halogen, sulphonic acid, sulphonic ester, thiol, benzoic acid, benzoic ester, carboxylic acid, carboxylic ester, acrylate, methacrylate and/or organo-silane radicals.

It is preferable to use bifunctional silanes, these firstly permitting coupling to the filler containing silanol groups and secondly permitting coupling to the
5 polymer. Examples of these organosilicon compounds are:

bis(3-triethoxysilylpropyl)tetrasulphane, bis(3-triethoxysilylpropyl)disulphane, vinyltrimethoxysilane, vinyltriethoxysilane, 3-mercaptopropyltrimethoxysilane,
10 3-mercaptopropyltriethoxysilane, 3-aminopropyltrimethoxysilane, 3-aminopropyltriethoxysilane. Other organosilicon compounds which can be used are described in WO 99/09036, DE 10163945, DE 10223658. The content of the patent specifications mentioned is expressly
15 incorporated by way of reference into the content of the present application. In one preferred embodiment of the invention, bis(3-triethoxysilylpropyl)polysulphane or bis(3-triethoxysilylpropyl)disulphane can be used as silane.

20

The term "parts" is hereinafter used for proportions by weight.

The modification of the silicon dioxide in crust form
25 with one or more of the compounds mentioned can take place in mixtures of from 0.5 to 50 parts, based on 100 parts of precipitated silica, in particular from 1 to 15 parts and very particularly from 1 to 10 parts, based on 100 parts of silicon dioxide, where the
30 reaction between silicon dioxide and the compounds mentioned can be carried out during preparation of the rubber mixture (in situ) or externally via spray-application and then conditioning of the silicon dioxide precoated with one or more of the compounds
35 mentioned.

The carbon content of the modified silica can amount to from 0.1 to 20% by weight, preferably from 0.1 to 10%

by weight and particularly preferably from 0.5 to 5% by weight.

According to the invention, the silicon dioxides
5 compacted to give crusts can be used in elastomer mixing, vulcanizates, e.g. tyres, among which are pneumatic tyres, tyre treads, cable sheathing, hoses, drive belts, conveyor belts, V-belts, roll coverings, shoe soles, gaskets and damping elements.

10

According to the invention, the silicon dioxides compacted to give crusts can be incorporated by mixing into elastomer mixtures, tyres or vulcanizable rubber mixtures in the form of reinforcing filler in amounts
15 of from 5 to 200 parts, based on 100 parts of rubber, either modified or else without modification.

For the purposes of the present invention, rubber mixtures and elastomer mixtures are to be considered
20 equivalent.

Alongside mixtures in which the only fillers present are the silicon dioxide compacted to give crusts and used according to the invention with or without the
25 organic post-treatment mentioned, the elastomer mixtures or rubber mixtures can also have been filled with one or more fillers of relatively high or relatively low reinforcing capability.

30 The following materials can be used as further fillers:

Carbon blacks: the carbon blacks to be used here have been prepared by the flame-black process, furnace-black process or gas-black process, and have BET surface
35 areas of from 20 to 200 m²/g, examples being SAF, ISAF, HSAF, HAF, FEF or GPF carbon blacks. The carbon blacks can also, if appropriate, contain heteroatoms, such as silicon.

Fine-particle pyrogenic silicas prepared, for example, via flame hydrolysis of silicon halides can be present in the form of mixed oxides with other metal oxides, e.g. Al, Mg, Ca, Ba, Zn and titanium oxides.

Further commercial silicas prepared in a precipitation process with BET surface areas of from 20 to 400 m²/g.

10 Synthetic silicates, such as aluminium silicate, alkaline earth metal silicates, such as magnesium silicate or calcium silicate, with BET surface areas of from 20 to 400 m²/g and primary particle diameters of from 10 to 400 nm.

15 Synthetic or natural aluminium oxides and the corresponding hydroxides.

Natural silicates, such as kaolin and other naturally occurring silicon dioxide compounds.

Glass fibre and glass fibre products (mats, strands) or glass microbeads.

25 Starch and modified types of starch.

Natural fillers, e.g. clays and siliceous chalk.

The blending ratio here depends again on the property profile to be achieved in the finished rubber mixture. A ratio of from 5 to 95% between the silicon dioxide compacted to give crusts and used according to the invention and the other abovementioned fillers (including those in the form of a mixture) is conceivable and also feasible for this purpose.

In one particularly preferred embodiment, preparation of the mixtures can use from 10 to 150 parts by weight

of silicon dioxide, entirely or to some extent composed of the silicon dioxide compacted to give crusts and used according to the invention, if appropriate together with from 0 to 100 parts by weight of carbon
5 black, or can use from 1 to 10 parts by weight of an organosilicon compound, in each case based on 100 parts by weight of rubber.

Alongside the silicon dioxide compacted according to
10 the invention to give crusts, the organosilanes and other fillers, the polymers form a further important constituent of the rubber mixture. Mention may be made here of natural and synthetic polymers, oil-extended or not, in the form of individual polymer or blend with
15 other rubbers, examples being natural rubbers, polybutadiene (BR), polyisoprene (IR), styrene-butadiene copolymers having styrene contents of from 1 to 60% by weight, preferably from 2 to 50% by weight (SBR) in particular prepared by means of the solution
20 polymerization process, butyl rubbers, isobutylene-isoprene copolymers (IIR), butadiene-acrylonitrile copolymers having acrylonitrile contents of from 5 to 60% by weight, preferably from 10 to 50% by weight (NBR), partially hydrogenated or fully hydrogenated NBR
25 rubber (HNBR), ethylene-propylene-diene copolymers (EPDM), and also mixtures of these rubbers.

The following additional rubbers can moreover be used for rubber mixtures with the rubbers mentioned: carboxy
30 rubbers, epoxy rubbers, trans-polypenteneamer, halogenated butyl rubbers, rubbers composed of 2-chlorobutadiene, ethylene-vinyl acetate copolymers, ethylene-propylene copolymers, and, if appropriate, also chemical derivatives of natural rubber; and also
35 modified natural rubbers.

Examples of preferred synthetic rubbers are described in W. Hofmann, "Kautschuktechnologie" [Rubber

technology], Genter Verlag, Stuttgart 1980.

For production of the inventive tyres, anionically polymerized S-SBR rubbers (solution SBR) whose glass
5 transition temperature is above -50°C , and also their mixtures with diene rubbers, are of particular interest.

The method of incorporating the silicon dioxide
10 compacted to give crusts and of preparing the mixtures comprising this silicon dioxide is conventional in the rubber industry in an internal mixer or on a roll mill preferably at from 80 to 200°C .

15 The inventive rubber vulcanizates can comprise the usual dosages of further rubber auxiliaries, examples being reaction accelerators, antioxidants, heat stabilizers, light stabilizers, antiozonants, processing aids, plasticizers, tackifiers, blowing
20 agents, dyes, pigments, waxes, extenders, organic acids, retarders, metal oxides, and also activators, such as triethanolamine, polyethylene glycol and/or hexanetriol. These compounds are known in the rubber industry.

25 The amounts used of the rubber auxiliaries can be the known amounts which depend inter alia on the intended use. Examples of conventional amounts are amounts of from 0.1 to 50% by weight, based on rubber.

30 The crosslinking agents used can comprise sulphur or sulphur-donor substances, or other crosslinking systems known in the rubber industry.

35 The inventive rubber mixtures can moreover comprise vulcanization accelerators, used in the form of main accelerator and co-accelerator.

Examples of suitable main accelerators are mercapto-benzothiazoles, sulphenamides, thiurams, and dithiocarbamates in amounts of from 0.5 to 3% by weight.

- 5 Examples of co-accelerators are guanidines, thioureas and thiocarbamates in amounts of from 0.5 to 5% by weight. Sulphur can usually be used in amounts of from 0.1 to 10% by weight, preferably from 1 to 3% by weight, based on rubber.

10

The silicon dioxide compacted to give crusts and used according to the invention can be used in rubbers which are crosslinkable with accelerators and/or sulphur, or else peroxidically crosslinkable.

15

The vulcanization of the inventive rubber mixtures can take place at temperatures of from 100 to 200°C, preferably from 130 to 180°C, if appropriate under pressure of from 10 to 200 bar. The blending of the
20 rubbers with the filler and, if appropriate with rubber auxiliaries and the organosilicon compound, can be carried out in/on known mixing assemblies, e.g. rolls, internal mixers and mixing extruders.

- 25 The inventive rubber mixtures are suitable for production of mouldings, e.g. for production of pneumatic tyres, tyre treads for summer, winter and all-year-round tyres, car tyres, tyres for utility vehicles, motorcycle tyres, tyre subcomponents, cable
30 sheathing, hoses, drive belts, conveyor belts, roll coverings, shoe soles, gasket rings and damping elements.

- The inventive rubber mixtures are particularly suitable
35 for production of car tyre treads and motorcycle tyre treads, but also of tyres for utility vehicles with reduced rolling resistance together with good abrasion resistance and good winter performance.

The inventive rubber mixtures are moreover suitable without addition of organosilicon compounds in a blend with a typical tyre-tread carbon black for improvement of the cut & chip performance of tyres for construction machinery, tyres for agricultural machinery and tyres for mining machinery. (For definition and further details, see "New insights into the tear mechanism" and references therein, presented by Dr. W. Niedermeier at Tire Technology 2003 in Hamburg, Germany.)

The physical tests used in the following examples are shown in Table 1.

15 *Determination of dispersion coefficient*

Dispersion coefficient can be determined by means of a topographic method, described in: "Entwicklung eines Verfahrens zur Charakterisierung der Füllstoffdispersion in Gummimischungen mittels einer Oberflächentopographie" [Development of a method for characterizing filler dispersion in rubber mixtures by means of surface topography] A. Wehmeier; degree thesis, 1998, at the Technical University of Münster, Steinfurt site, Chemical Engineering Department, and "Filler Dispersion Analysis by Topography Measurements" Degussa AG, Applied Technology Advanced Fillers, Technical Report TR 820.

30 As an alternative, dispersion coefficient can also be measured by means of the DIAS method (optically) at the Deutsches Institut für Kautschuktechnologie in Hanover, Germany (see H. Geisler, DIK aktuell, 1st edition (1997) and Medalia, Rubber Age, April 1965).

35

The best degree of dispersion achievable is 100%, and accordingly the worst will theoretically be 0%. Silicas whose dispersion coefficient is greater than or equal

to 90% are regarded as highly dispersible (HD).

Explanation of determination of dispersion coefficient
by means of surface topography:

5

$$\text{Dispersion coefficient} = 100\% - \frac{(\text{Total of areas underlying peaks}) * 10000\% * \text{Medalia factor}}{\text{Filler volume} * (\text{total area tested})} \%$$

$$\text{Medalia factor} = \frac{\frac{\text{Filler volume}}{100\%}}{2} + 0.78$$

dispersion coefficient in %

10 total of areas underlying peaks (measure of roughness)
in mm²

filler volume in %

total area tested in mm²

Table 1: Physical test methods

Physical testing	Standard/Conditions
Vulcameter testing, 165°C, 0.5° deflection MDR rheometer M_H (dNm) $M_H - M_L$ (dNm) $t_{10\%}$ (min) $t_{90\%}$ (min) $t_{80\%} - t_{20\%}$ (min)	DIN 53529/3, ISO 6502
Ring tensile test, 23°C Stress value (MPa) Tensile strain at break (%)	DIN 53504, ISO 37
Shore A hardness, 23°C (SH)	DIN 53 505
Ball rebound (%), 60°C	DIN EN ISO 8307, drop height 500 mm, steel ball, d = 19 mm, 28 g
DIN abrasion, force: 10 N (mm³)	DIN 53 516
Dispersion coefficient (%)	see text
Viscoelastic properties, Initial force 50 N and amplitude force 25 N, Conditioning time 5 min, Test value recorded after 30 s of test time Complex modulus E^* (MPa) Loss factor $\tan \delta$ (-)	DIN 53 513, ISO 2856
Compression flexometer, 23°C Needle temperature (°C) Residual deformation (%)	DIN 53 533, ASTM D 623 A duration 30 min stroke 0.225 inch

Example 1

- 5 Preparation of Br/S-SBR rubber mixtures and vulcanizates using AEROSIL® 150

General method specification:

- 10 The mix (green tyre) used for the rubber mixtures is stated in Table 2 below. The unit "phr" here means

proportions by weight, based on 100 parts by weight of the crude rubber used.

The polymer VSL 5025-1 is a solution-polymerized SBR copolymer from Bayer AG (now Lanxess Europe GmbH & Co. KG) with styrene content (by means of UV spectroscopy) of about 25% by weight (from 23% by weight to 27% by weight) and vinyl content (by means of IR spectroscopy) of about 50% by weight (from 46% by weight to 54% by weight). The copolymer comprises about 27% by weight of aromatic mineral oil (from 25.8% by weight to 28.8% by weight) and its Mooney viscosity (ASTM D1646) is about 50 MU (from 45 MU to 55 MU).

The polymer Buna CB 24 is a cis-1,4-polybutadiene (titanium type) from Bayer AG (now Lanxess Europe GmbH & Co. KG) with cis-1,4 content (by means of IR spectroscopy) of at least 96% by weight and Mooney viscosity (DIN 53523) of about 45 MU (from 39 MU to 49 MU).

Table 2: Green tyre mix

Green Tyre			
Substance	phr	Name of item	Company
1st stage		Preparation of parent mixture	
Buna VSL 5025-1	96	S-SBR; oil-extended (see text)	Lanxess Europe GmbH & Co. KG; 51369 Leverkusen; Germany
Buna CB 24	30	cis-1,4-BR (see text)	Lanxess Europe GmbH & Co. KG; 51369 Leverkusen; Germany
Silica (sil)	80		
X 50-S	11.64	Si 69 (bis(3-triethoxysilyl-propyl)tetrasulphane)/ Type N carbon black 330: 50%/50%	Degussa AG; Frankfurt am Main; Germany
ZnO; RS RAL 844 C	3	ZnO	Arnsperger Chemikalien GmbH; 50858 Cologne; Germany

EDENOR ST1 GS	2	Palmitic-stearic acid; stearin "iodine number 1"	Caldic Deutschland GmbH & Co. KG; 40231 Düsseldorf; Germany
Naftolen ZD	10	Aromatic plasticizer oil	Chemetall GmbH; 60487 Frankfurt a.M.; Germany
Vulkanox 4020 / LG	1.5	N-(1,3-Dimethylbutyl)- N'-phenyl-p-phenylene- diamine (6PPD)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Protektor G 3108	1	Mixture of refined hydrocarbon waxes	Paramelt BV; 706875 Paramelt BV; NL 1704 RJ Heerhugowaard; Netherlands
2nd stage		Pinch/remill stage	
Stage 1 batch			
3rd stage		Final mixing	
Stage 2 batch			
Vulkacit D	2	N,N'-Diphenylguanidine (DPG)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Vulkacit CZ/EG-C	1.5	N-Cyclohexyl-2-benzo- thiazolesulphenamide (CBS)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Perkacit TBZTD-C	0.2	Tetrabenzylthiuram disulphide (TBzTD)	Flexsys N.V./S.A., Woluwe Garden; B-1932 St. Stevens Woluwe; Belgium
Ground sulphur	1.5	Fine-particle sulphur Ph Eur, BP	Merck KGaA; 64271 Darmstadt; Germany

The general process for preparation of rubber mixtures and their vulcanizates is described in the following book: "Rubber Technology Handbook", W. Hofmann, Hanser Verlag 1994. Table 3 describes the mixing specification and mixing conditions for the green tyre mixture used here.

Table 3: Mixing specification and mixing conditions for green tyre mixtures

1st stage	GK 1.5N internal mixer, fill level 0.73,		
	70 rpm, chamber temperature 70°C,		
	ram pressure 5.5 bar		
0.0' - 0.5'	Polymers		
0.5' - 1.5'	1/3 sil, X 50-S; purge at 1.5'		
1.5' - 2.5'	1/3 sil; purge at 2.5'		
2.5' - 3.5'	1/3 sil, remaining constituents of 1st stage; purge at 3.5'		
3.5' - 5.0'	Mixing, if appropriate rotation rate variation required		
	in order to achieve discharge temperature		
5.0'	Discharge batch (batch temperature 145°C - 155°C)		
	and transfer to roll system:		
	peel milled sheet away		
24 h of intermediate storage at room temperature for stage 2			
2nd stage	GK 1.5N internal mixer, fill level 0.71,		
	80 rpm, chamber temperature 80°C,		
	ram pressure 5.5 bar		
0.0' - 2.0'	Plasticize stage 1 batch		
2.0' - 5.0'	Maintain 150°C batch temperature via rotation rate variation		
5.0'	Discharge batch (batch temperature 145°C - 155°C)		
	and transfer to roll system:		
	peel milled sheet away		
4 h of intermediate storage at room temperature for stage 3			
3rd stage	GK 1.5N internal mixer, fill level 0.69,		
	40 rpm, chamber temperature 50°C,		
	ram pressure 5.5 bar		
0.0' - 2.0'	Stage 2 batch, accelerator, sulphur		
2.0'	Discharge batch (batch temperature 90°C - 110°C)		
	and transfer to roll system:		
	cut and displace the material 3 times toward the left, 3 times toward the right,		
	fold the material over 5 times narrow, 5 times wide,		
	peel milled sheet away		
12 h of intermediate storage at room temperature prior to start of tests			

The vulcanization time for the test specimens is in each case 17 min at 165°C for Example 1.

- 5 Table 4 states the results of vulcanizate testing. All three samples involve AEROSIL® 150, differently post-treated: sample A is subject to preliminary bulk-density increase according to EP0280851, samples B and C have been compacted according to the invention as
10 shown diagrammatically in Figure 1. Starting material for sample B is sample A, and for sample C it is an AEROSIL® 150 not subject to preliminary bulk-density increase.
- 15 All three of the samples show comparable vulcanizate properties and are regarded as highly dispersible.

The according to the invention used crusts do not show any negative effect to the rubber mixtures.

Table 4: Results of vulcanizate testing for Example 1

Green tyre		Sample A Subject to preliminary bulk- density increase according to EP 0 280 851	Sample B Inventive crusts	Sample C Inventive crusts
Filler: AEROSIL ^R A 150				
Tamped bulk density	g/l	121	282	249
<i>MDR: 165°C; 0.5°</i>				
M _H	dNm	24.0	24.2	25.0
M _H - M _L	dNm	20.8	20.9	21.9
t 10%	min	0.9	0.8	0.7
t 90%	min	4.9	4.9	5.3
t 80% - t 20%	min	1.8	1.8	2.0
Stress value (300%)	MPa	10.7	10.8	11.7
Tensile strain at break	%	370	385	345
Shore A hardness	SH	69	70	69
DIN abrasion, 10 N	mm ³	84	84	87
Ball rebound, 23°C	%	30.5	29.2	29.8
Ball rebound, 60°C	%	55.2	56.5	56.6
<i>Dispersion</i>				
Dispersion coefficient	%	98	94	99

Example 2

Preparation of Br/S-SBR rubber mixtures and
vulcanizates using various types of granulated AEROSIL®
5 materials

The mix for Example 2 corresponds to Example 1, and
only the amount of X 50-S was raised, to 12.8 phr.
Table 5 states the mixing specification and mixing
10 conditions and Table 6 states the results of physical
testing. The vulcanization time for the test specimens
is in each case 30 min at 165°C for Example 2.

Sample D is an AEROSIL® 200 granulated according to
15 EP 0 725 037 A1, sample E is AEROCAT®, Degussa AG
(granulated AEROSIL® 200) without any dust and sample C
is described in Example 1.

Sample D exhibits a higher level of reinforcement than
20 sample C, due to higher specific surface area. Both
samples are regarded as highly dispersible, but sample
D exhibits a higher level of dust contamination (cf.
Figure 4). The known sample E does not achieve the
values of the two other samples either in terms of
25 reinforcement or in terms of dispersion coefficient, it
does not achieve the values of the invention, too.

Table 5: Mixing specification and mixing conditions for Example 2

1st stage	Brabender 350 S internal mixer, fill level 0.73,		
	70 rpm, chamber temperature 80°C,		
	ram pressure 5 bar		
0.0' - 0.5'	Polymers		
0.5' - 1.5'	1/3 sil, X 50-S; purge at 1.5'		
1.5' - 2.5'	1/3 sil; purge at 2.5'		
2.5' - 3.5'	1/3 sil, remaining constituents of 1st stage; purge at 3.5'		
3.5' - 5.0'	Mixing, if appropriate rotation rate variation required		
	in order to achieve discharge temperature		
5.0'	Discharge batch (batch temperature 145°C - 155°C)		
	and transfer to roll system:		
	peel milled sheet away		
24 h of intermediate storage at room temperature for stage 2			
2nd stage	Brabender 350 S internal mixer, fill level 0.71,		
	80 rpm, chamber temperature 90°C,		
	ram pressure 5 bar		
0.0' - 2.0'	Plasticize stage 1 batch		
2.0' - 5.0'	Maintain 150°C batch temperature via rotation rate variation		
5.0'	Discharge batch (batch temperature 145°C - 155°C)		
	and transfer to roll system:		
	peel milled sheet away		
4 h of intermediate storage at room temperature for stage 3			
3rd stage	Brabender 350 S internal mixer, fill level 0.69,		
	50 rpm, chamber temperature 60°C,		
	ram pressure 5 bar		
0.0' - 2.0'	Stage 2 batch, accelerator, sulphur		
2.0'	Discharge batch (batch temperature 90°C - 110°C)		
	and transfer to roll system:		
	cut and displace the material 3 times toward the left, 3 times toward the right,		
	fold the material over 5 times narrow, 5 times wide,		
	peel milled sheet away		
12 h of intermediate storage at room temperature prior to start of tests			

Table 6: Results of vulcanizate testing for Example 2

Green tyre Filler: AEROSIL^R	Sample D Granulated according to EP 0725037A1	Sample E AEROCAT[®]	Sample C Inventive crusts
Tensile strength MPa	17.0	13.8	15.6
Tensile strain at break %	350	240	290
Shore A hardness SH	77	86	74
DIN abrasion, 10 N mm ³	93	89	90
<i>Dispersion</i> Dispersion coefficient %	97	69	98

Example 3

5 Preparation of NR rubber mixtures and vulcanizates using AEROSIL[®] 150

The specimens from Example 1 were incorporated by mixing according to the mixing specification shown in
 10 Table 8 for the mix shown in Table 7 based on a lorry tyre tread.

Table 9 collates the results of vulcanizate testing. The vulcanization time for the test specimens is in
 15 each case 40 min at 150°C for Example 3. The powder subject to preliminary bulk-density increase and the crusts compacted according to the invention deliver comparable results. All three of the specimens are

regarded as highly dispersible. The according to the invention used crusts do not have any negative effect to the rubber.

5 Table 7: Mix for natural rubber mixture for Example 3

NR			
Substance	phr	Name of item	Company
1st stage		Preparation of parent mixture	
SVR 10	100	Polyisoprene	Nordmann, Rassmann GmbH 20459 Hamburg; Germany
Silica (sil)	52		Degussa AG; Frankfurt am Main; Germany
Si 266	3.46	Si 266 (bis(3-triethoxy- silylpropyl)disulphane)	Degussa AG; Frankfurt am Main; Germany
ZnO; RS RAL 844 C	3	ZnO	Arnsperger Chemikalien GmbH; 50858 Cologne; Germany
EDENOR ST1 GS	3	Palmitic-stearic acid; stearin "iodine number 1"	Caldic Deutschland GmbH & Co. KG; 40231 Düsseldorf; Germany
Vulkanox 4020 / LG	1	N-(1,3-Dimethylbutyl)- N'-phenyl-p-phenylene- diamine (6PPD)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Vulkanox HS/LG	1	2,2,4-Trimethyl-1,2-dihydro- quinoline	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Protektor G 3108	1	Mixture of refined hydrocarbon waxes	Paramelt BV; 706875 Paramelt BV; NL 1704 RJ Heerhugowaard; Netherlands
2nd stage		Pinch/remill stage	
Stage 1 batch			
3rd stage		Final mixing	
Stage 2 batch			

Rhenogran DPG-80	1.18	80% -N,N'-diphenyl-guanidine (DPG)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Rhenogran TBBS-80	2	80% -N-tert-butyl-2-benzothiazolesulphenamide (TBBS)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Ground sulphur	1.5	Fine-particle sulphur Ph Eur, BP	Merck KGaA; 64271 Darmstadt; Germany

Table 8: Mixing specification and mixing conditions for Example 3

1st stage	GK 1.5N internal mixer, fill level 0.73,		
	45 rpm, chamber temperature 70°C,		
	ram pressure 5.5 bar		
0.0' - 1.0'	Polymers		
1.0' - 2.0'	1/2 sil, silane		
2.0' - 4.0'	1/2 sil, remaining constituents for stage 1		
4.0'	Purge		
4.0' - 5.0'	Mixing, if appropriate rotation rate variation required		
	in order to achieve discharge temperature		
5.0'	Discharge batch (batch temperature 145°C - 155°C)		
	and transfer to roll system:		
	peel milled sheet away		
24 h of intermediate storage at room temperature for stage 2			
2nd stage	GK 1.5N internal mixer, fill level 0.71,		
	70 rpm, chamber temperature 90°C,		
	ram pressure 5.5 bar		
0.0' - 1.0'	Plasticize stage 1 batch		
1.0' - 3.5'	Maintain 145°C - 150°C batch temperature via rotation rate variation		
3.5'	Discharge batch (batch temperature 145°C - 150°C)		
	and transfer to roll system:		
	peel milled sheet away		
4 h of intermediate storage at room temperature for stage 3			

3rd stage	GK 1.5N internal mixer, fill level 0.69,	
	50 rpm, chamber temperature 70°C,	
	ram pressure 5.5 bar	
0.0' - 2.0'	Stage 2 batch, accelerator, sulphur	
2.0'	Discharge batch (batch temperature 100°C - 110°C)	
	and transfer to roll system:	
	cut and displace the material 3 times toward the left, 3 times toward the right,	
	fold the material over 5 times narrow, 5 times wide,	
	peel milled sheet away	
12 h of intermediate storage at room temperature prior to start of tests		

Table 9

Results of vulcanizate testing for Example 3

Natural rubber		Sample A	Sample B	Sample C
Filler: AEROSIL ^R A 150		Subject to preliminary bulk- density increase according to EP0280851	Inventive crusts	Inventive crusts
Tamped bulk density	g/l	121	282	249
<i>MDR: 165 °C; 0.5°</i>				
M _H	dNm	16.8	17.5	17.2
M _H - M _L	dNm	14.8	15.4	15.0
t 10%	min	10.2	11.0	11.0
t 90%	min	22.6	22.8	22.0
t 80% - t 20%	min	6.1	5.7	5.2
Stress value (300 %)	MPa	9.2	8.6	8.5
Tensile strain at break	%	555	580	570

Shore A hardness	SH	64	65	64
DIN abrasion, 10 N	mm ³	117	121	117
<i>Dispersion</i>				
Dispersion coefficient	%	98	98	98

Example 4

Preparation of EPDM rubber mixtures and vulcanizates using AEROSIL® R 972

5

Table 10 shows the mix for Example 4. Table 5 states the general mixing specification and mixing conditions and Table 6 states the results of physical testing. The vulcanization time for the test specimens is in each case 20 min at 170°C for Example 4.

As is known to the person skilled in the art, it is impossible to comply with the mixing specification for products with low tamped bulk density and high dust generation. The powder then has to be added in a plurality of steps. Accordingly, in the case of sample G(3x) the silica was divided into five equal parts, these being added in succession. The result is that the mixing time is longer when comparison is made with the inventive crusts.

The both samples are highly dispersible. Sample G(5x) delivering somewhat lower values for tensile strength, tensile strain at break and ball rebound.

25

Table 10: Mix for EPDM rubber mixture for Example 4

EPDM			
Substance	phr	Name of item	Company
1st stage		Preparation of parent mixture	
Buna EP G 5455	150	Copolymer of propene, ethene and ethylidene-norbornene (EPDM)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Silica (sil)	80		Degussa AG; Frankfurt am Main; Germany
ZnO; RS RAL 844 C	4	ZnO	Arnsperger Chemikalien GmbH; 50858 Cologne; Germany
EDENOR ST1 GS	2	Palmitic-stearic acid; stearin "iodine number 1"	Caldic Deutschland GmbH & Co. KG; 40231 Düsseldorf; Germany
Plasticizer NS	30	Mineral oil raffinate	Fuchs Mineralöl Eschweiler; 52249 Eschweiler; Germany
Vulkanox MB/MG	1	2-Mercaptobenzimidazole (MBI)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
2nd stage		Final mixing	
Stage 1 batch			
Rhenocure TP/S	2	67% zinc salt of a dithiophosphoric ester	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Vulkacit Mercapto C	1	2-Mercaptobenzothiazole (MBT)	Bayer Material Science AG; 51358 Leverkusen; Germany
Vulkacit D	1.5	N,N'-Diphenylguanidine (DPG)	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Rhenogran S-80	2	Sulphur/polymer binder: 80%/20%	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany
Vulkazit ZBEC	0.8	Zinc dibenzyl-dithiocarbamate	Rhein Chemie Rheinau GmbH; 68219 Mannheim Rheinau; Germany

Table 11: Mixing specification and mixing conditions for Example 4

1st stage	GK 1.5N internal mixer, fill level 0.73,
	60 rpm, chamber temperature 50°C,
	ram pressure 5.5 bar
0.0' - 1.0'	Polymers
1.0' - 3.0'	sil and other constituents of stage 1
3.0'	Purge
3.0' - 4.0'	Mixing, if appropriate rotation rate variation required,
	in order to achieve discharge temperature
4.0'	Discharge batch (batch temperature 90°C - 130°C)
	and transfer to roll system:
	peel milled sheet away
24 h of intermediate storage at room temperature for stage 2	
2nd stage	GK 1.5N internal mixer, fill level 0.71,
	50 rpm, chamber temperature 40°C,
	ram pressure 5.5 bar
0.0' - 1.0'	Stage 1 batch
1.0' - 2.0'	Sulphur, accelerator
2.0'	Discharge batch (batch temperature 80°C - 100°C)
	and transfer to roll system:
	fold the material over 3 times narrow, 3 times wide,
	peel milled sheet away
24 h of intermediate storage at room temperature prior to start of tests	

Table 12: Results of vulcanizate testing for Example 4

EPDM Filler: AEROSIL ^R R 972 (hydrophobic)		Sample F Inventive crusts	Sample G(5x) Subject to preliminary bulk- density increase according to EP0280851
Tamped bulk density	g/l	378	115
<i>MDR: 165°C; 0.5°</i>			
M _H	dNm	14.5	15.5
M _H - M _L	dNm	12.1	12.6
t 10 %	min	0.5	0.6
t 90 %	min	9.8	9.9
t 80 % - t 20 %	min	5.3	5.3
Tensile strength	MPa	9.5	7.7
Tensile strain at break	%	650	580
Shore A hardness	SH	49	53
Ball rebound, 23°C	%	49.2	48.0
<i>Dispersion</i>			
Dispersion coefficient	%	90	92

Example 5Formulation

5 Stage 1

100 parts, 400 g, of Silopren VS silicone polymer
(Bayer AG)

40 parts, 160 g, of synthetic silica

10 6 parts, 24 g, of VP AC 3031 silicone oil processing
aid (Bayer AG)

Stage 2

15 0.5% of Interrox DCLBP-50-PSI bis(2,4-dichlorobenzoyl)
peroxide (Peroxid-Chemie GmbH)

Mixing specification (Carried out at room tempera-
ture)

20

Polymix 200 U two-roll mill from Schwabenthan

Roll diameter: 200 mm

Roll length: 400 mm

Nip: 0.9 ± 0.05 mm

25 Rotation rate: 20 rpm, friction: 1:1.3

Stage 1

30 400 g of silicone polymer are added to the two-roll
mill.

As soon as a homogeneous milled sheet has formed on the
operator roll (faster-running roll), the filler can be
added. The silica is added slowly and in portions
35 between the two rolls. After about 50% of filler
addition, the compounded material is removed from the
roll by the scraper and turned.

- 48 -

For the formulation with processing aid, this is now added to the two-roll mill in the form of a mixture of 24 g of processing aid in about 10 g of the silica (somewhat mixed by a spatula). The remaining 50% of the amount of filler are then added.

For dispersion and homogenization of the silica, milling is continued for a further 5 min after incorporation of the filler. During the process the mixture is turned 5 more times. The mixtures thus prepared are stored for 1 week to permit continued wetting of the silica. For this purpose, the compounded materials are wrapped in PE film.

Stage 2

For plastification, the compounded material is mixed on the roll mill until a homogeneous milled sheet is produced. The previously weighed-out amount of peroxide is then administered with a spatula (made of wood or plastic). Milling is continued for a further 8 min for dispersion and homogenization of the peroxide, the scraper being used here to remove the mixture from the roll and turn it 8 times.

Storage for 24 hours at room temperature (advantageously in PE film) then again follows.

Prior to vulcanization, the compounded material is again plasticized on the two-roll mill.

Vulcanization

The heating press is preheated to: 140°C

Silicone sheets of thickness 2 mm (pressing time 7 min) and 6 mm (pressing time 10 min) are vulcanized in the preheated press between chromed steel plates.

In order to remove cleavage products of the peroxide, the sheets are post-vulcanized at 200°C for 6 hours in a hot-air oven. In the 1st hour the oven door is opened
 5 for 60 seconds about every 10 minutes. In the 2nd and 3rd hour, every 30 minutes. Not more than 1200 g of vulcanizates are suspended in the ovens, whose volume is 0.125 m³.

10 Table 13: Dispersion coefficients for Example 5, determined by means of surface topography

Silicone rubber	Sample H	Sample H	Sample J	Sample J
Filler:				
AEROSIL^R 200	Inventive crusts	Inventive crusts	Subject to preliminary bulk-density increase according to EP0280851	Subject to preliminary bulk-density increase according to EP0280851
	1st measurement	2nd measurement	1st measurement	2nd measurement
<i>Dispersion</i>				
Dispersion coefficient %	72	73	96	97

It is apparent that the inventive crusts cannot be
 15 sufficiently dispersed in silicone polymer. They have relatively high strength.

Figure 8 shows the dispersion experiments in silicone polymer. Photographic-quality visualization of surface topography (described in: "Entwicklung eines Verfahrens zur Charakterisierung der Füllstoffdispersion in Gummimischungen mittels einer Oberflächentopographie" [Development of a method for characterizing filler dispersion in rubber mixtures by means of surface topography] A. Wehmeier; degree thesis 1998 at Münster Technology University, Steinfurt Division, Department of Chemical Engineering) for Example 5.

- 51 -

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A process for the preparation of a rubber mixture, the process comprising:

roll compacting pyrogenically prepared silicon dioxide between two rolls to form crusts; and

admixing the pyrogen prepared silicon dioxide with rubber;

wherein a tamped bulk density pursuant to DIN EN ISO 787-11 of the pyrogenically prepared silicon is from 200 to 700 g/l.

2. A process according to claim 1, wherein the tamped bulk density is from 200 to 450 g/l.

3. A process according to claim 1 or 2, wherein the pyrogenically prepared silicon dioxide is a hydrophilic pyrogenically prepared silicon dioxide.

4. A process according to claim 1, wherein the pyrogenically prepared silicon dioxide is a hydrophobic pyrogenically prepared silicon dioxide, and wherein the tamped bulk density is from 210 to 700 g/l.

5. A process according to claim 4, wherein the tamped bulk density is from 210 to 450 g/l.

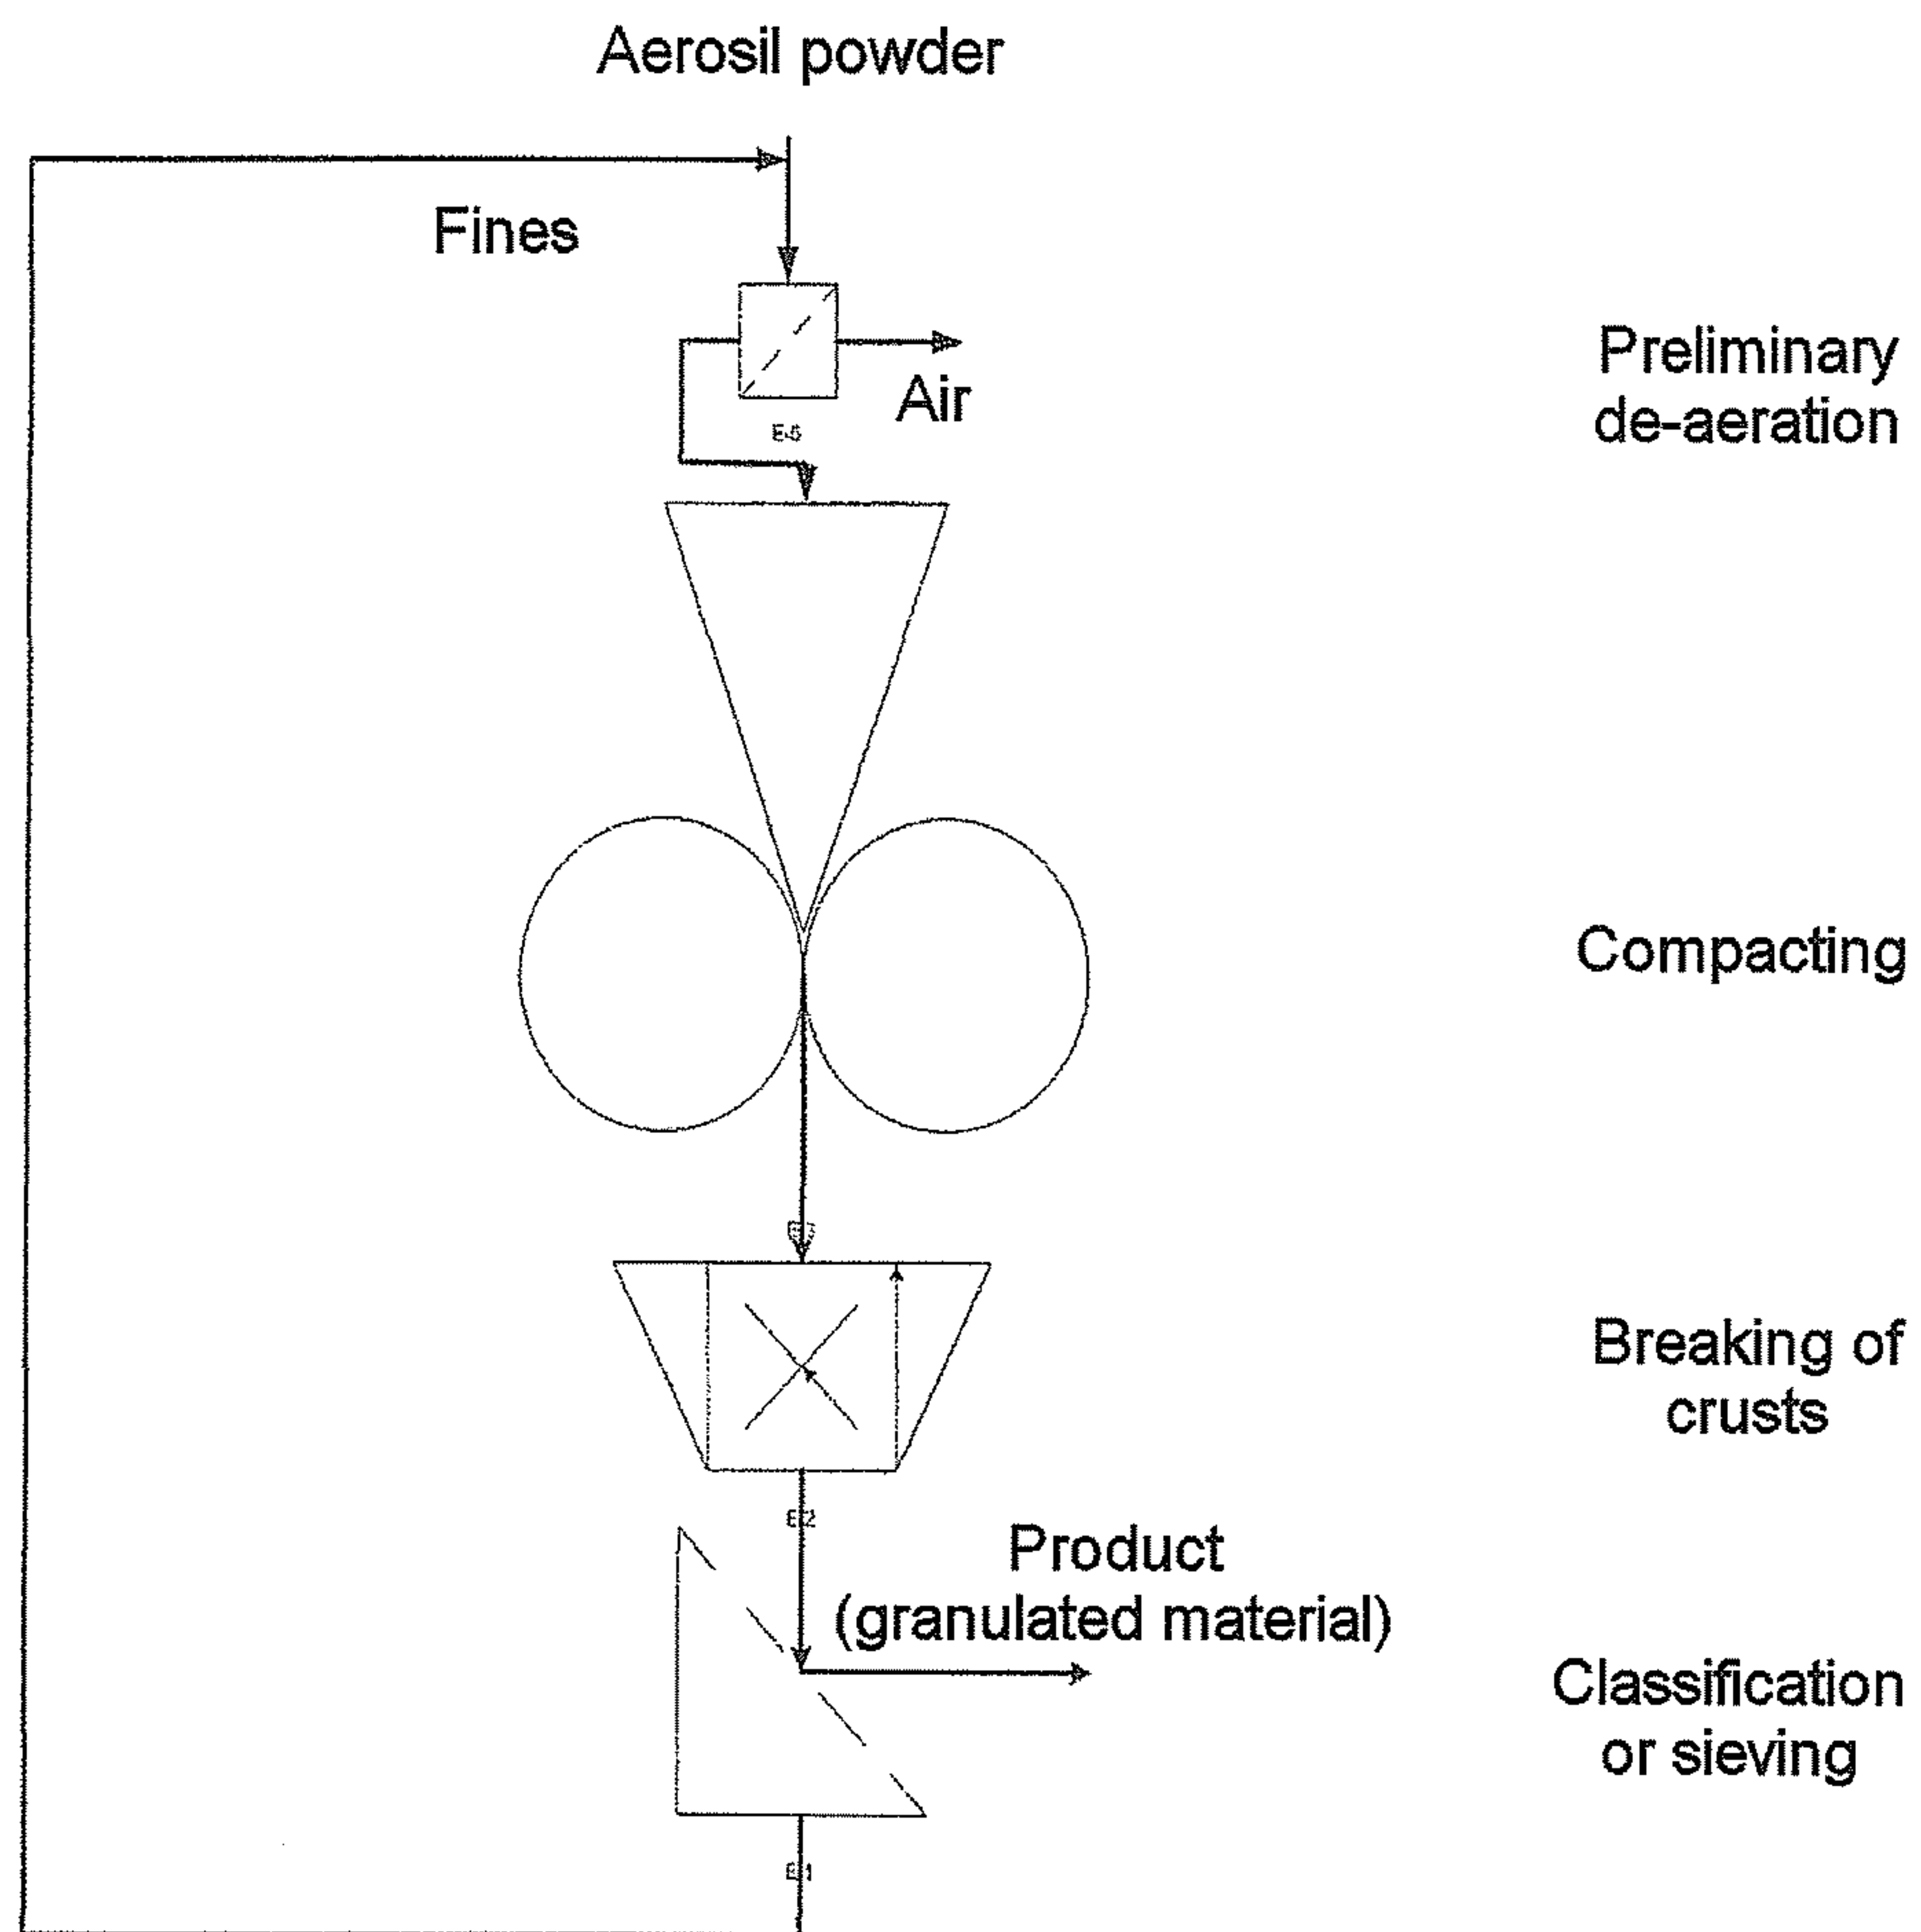


Figure 1

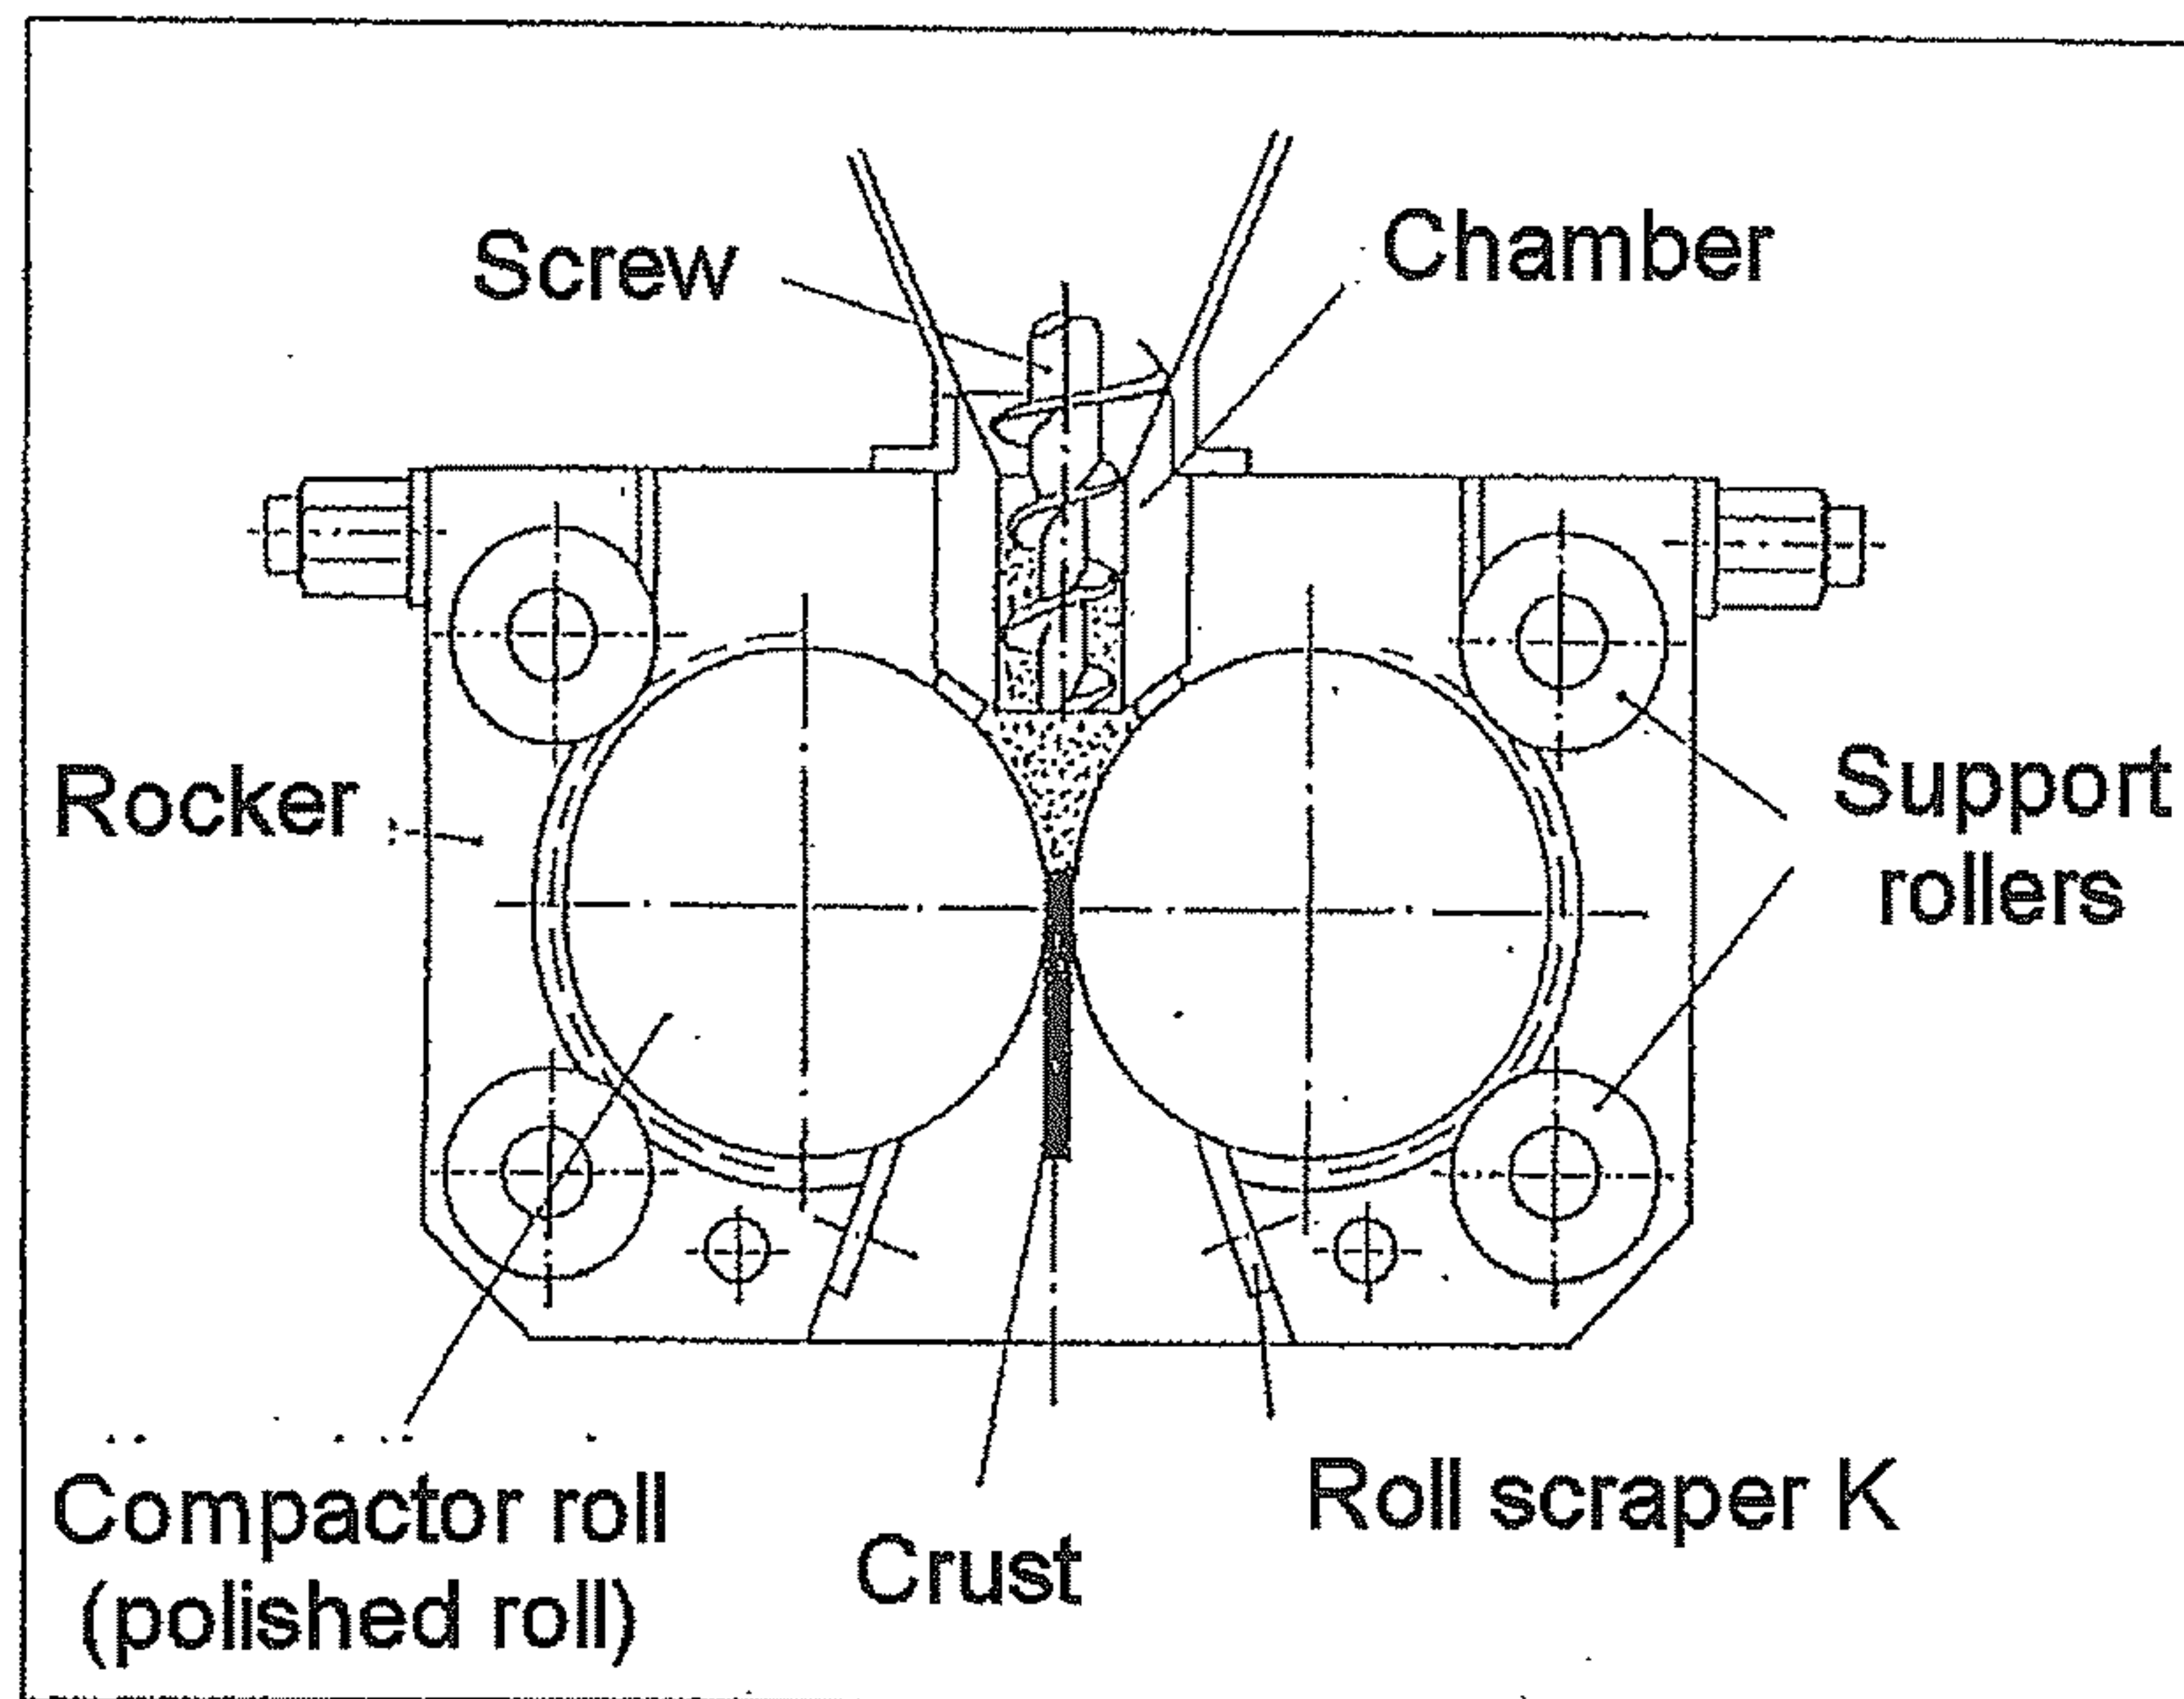


Figure 2

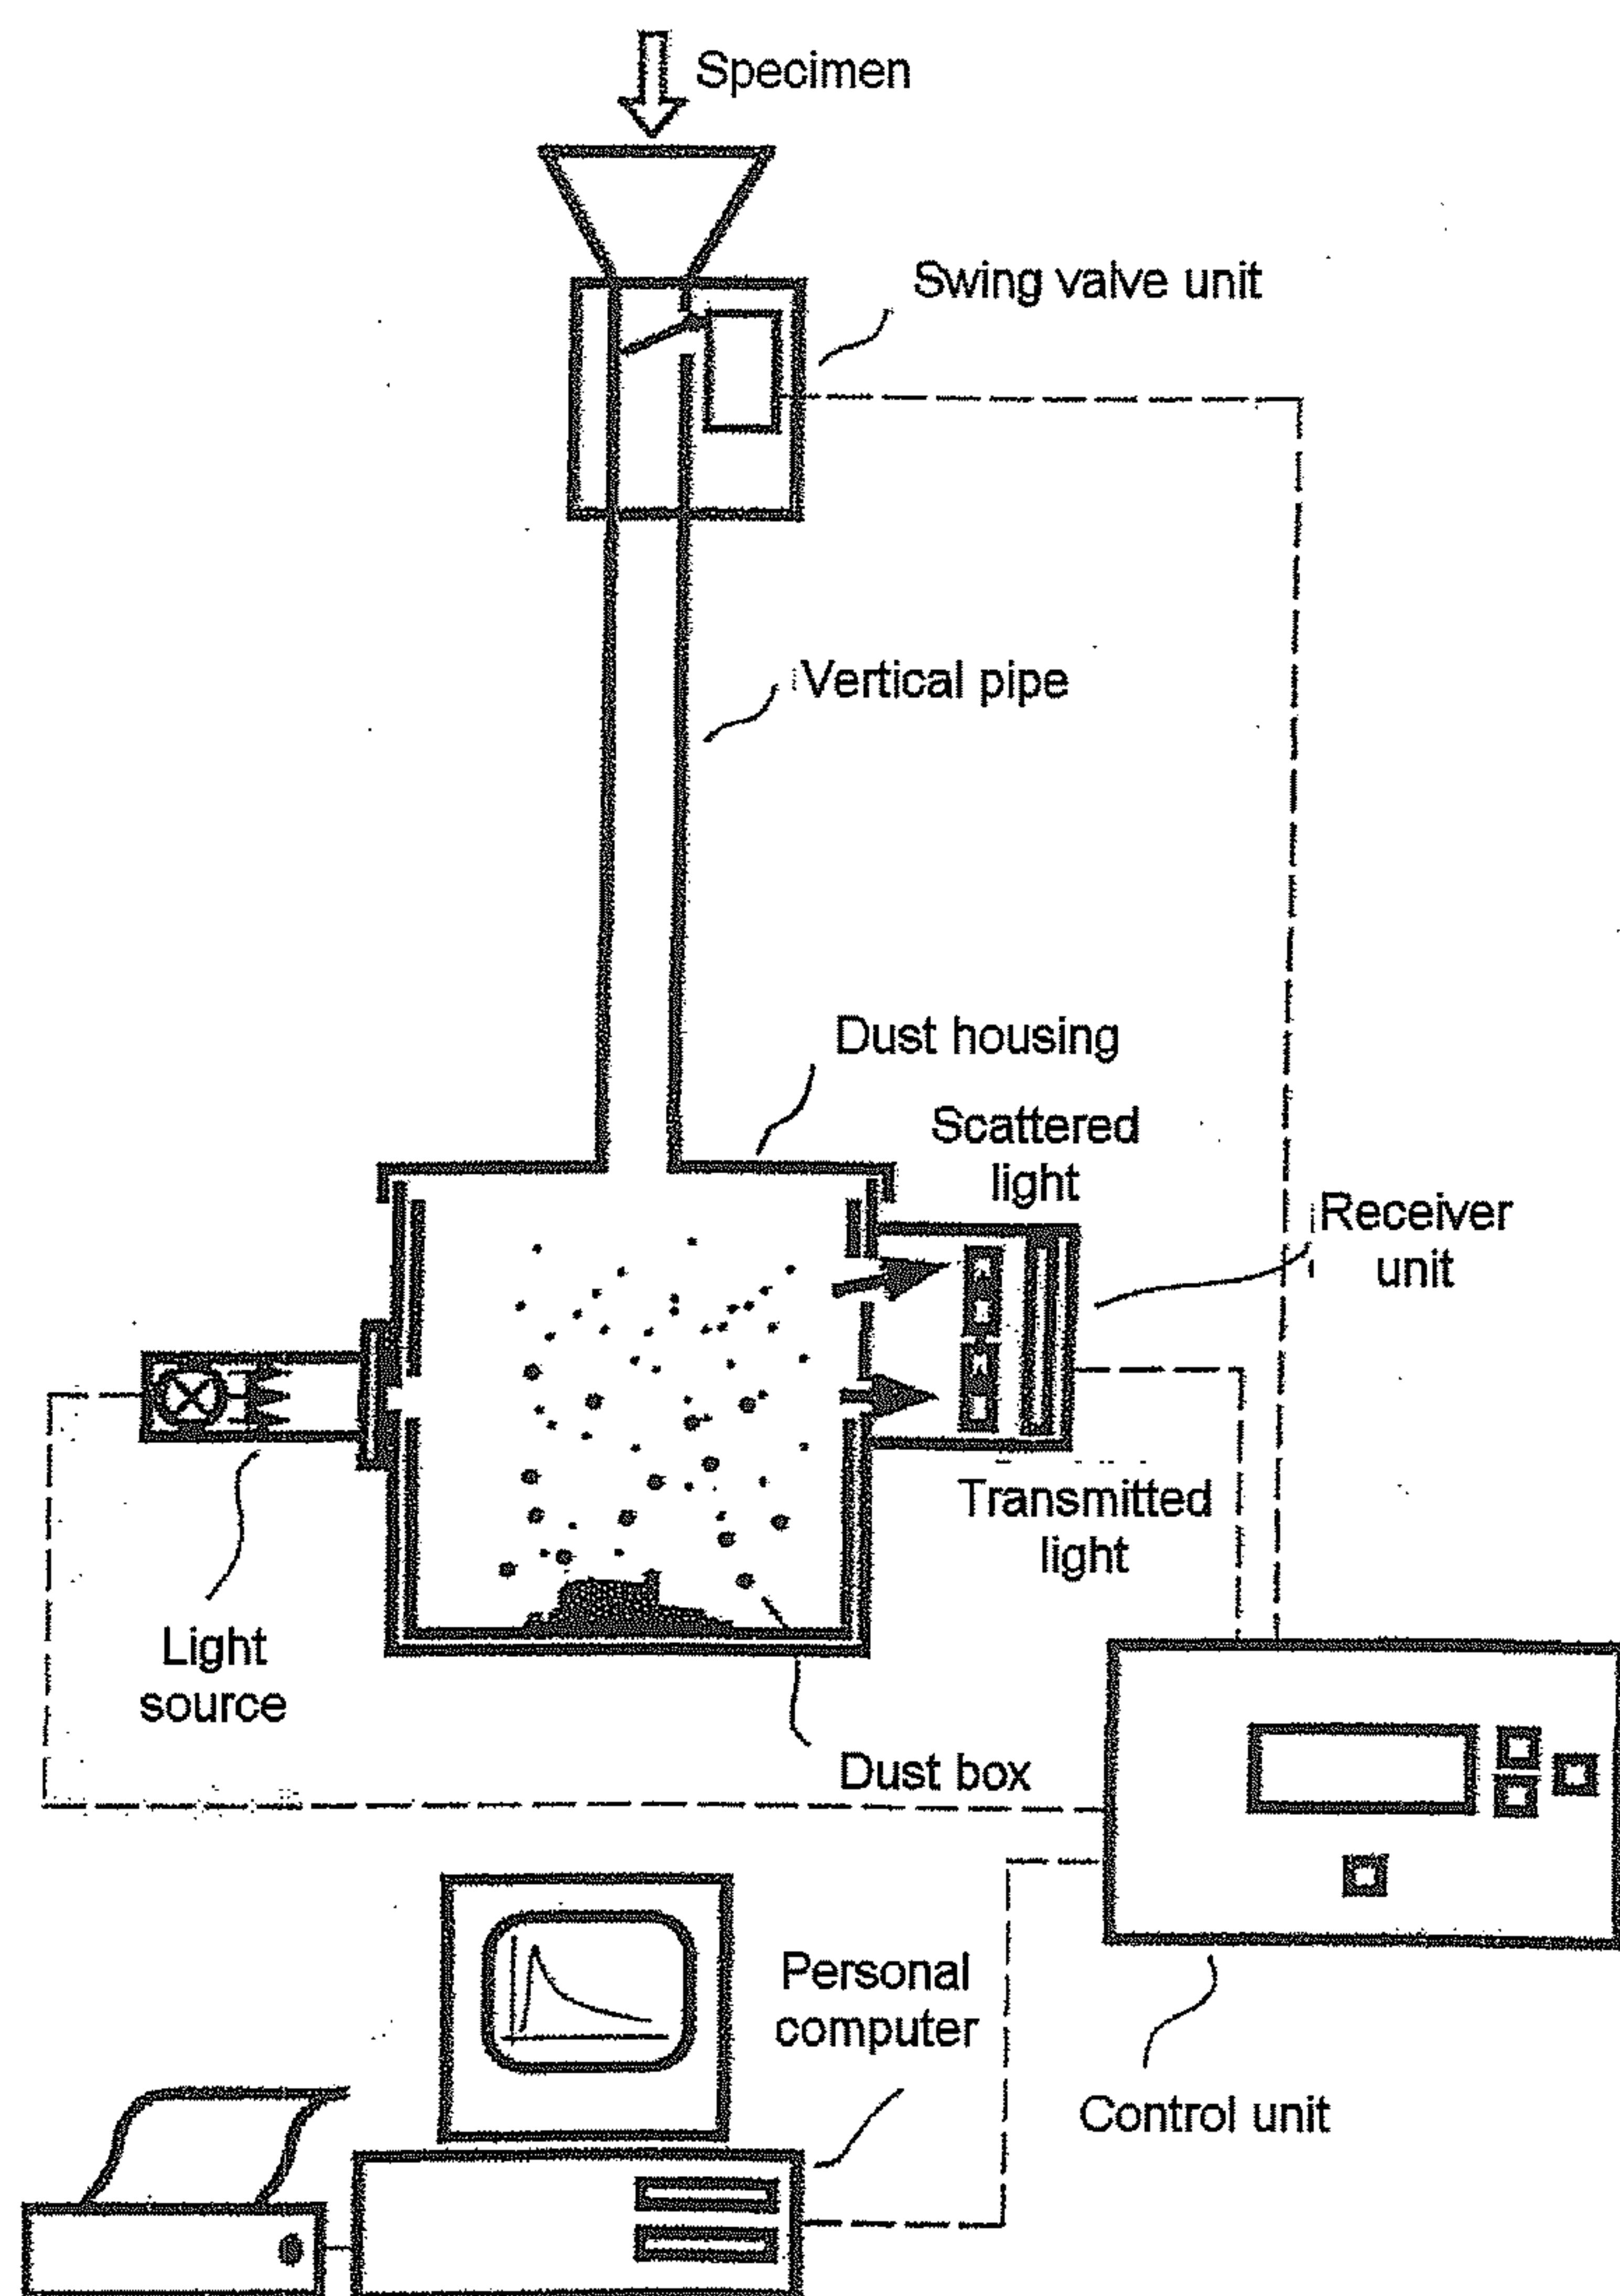


Diagram of dust sedimentation tester

Figure 3

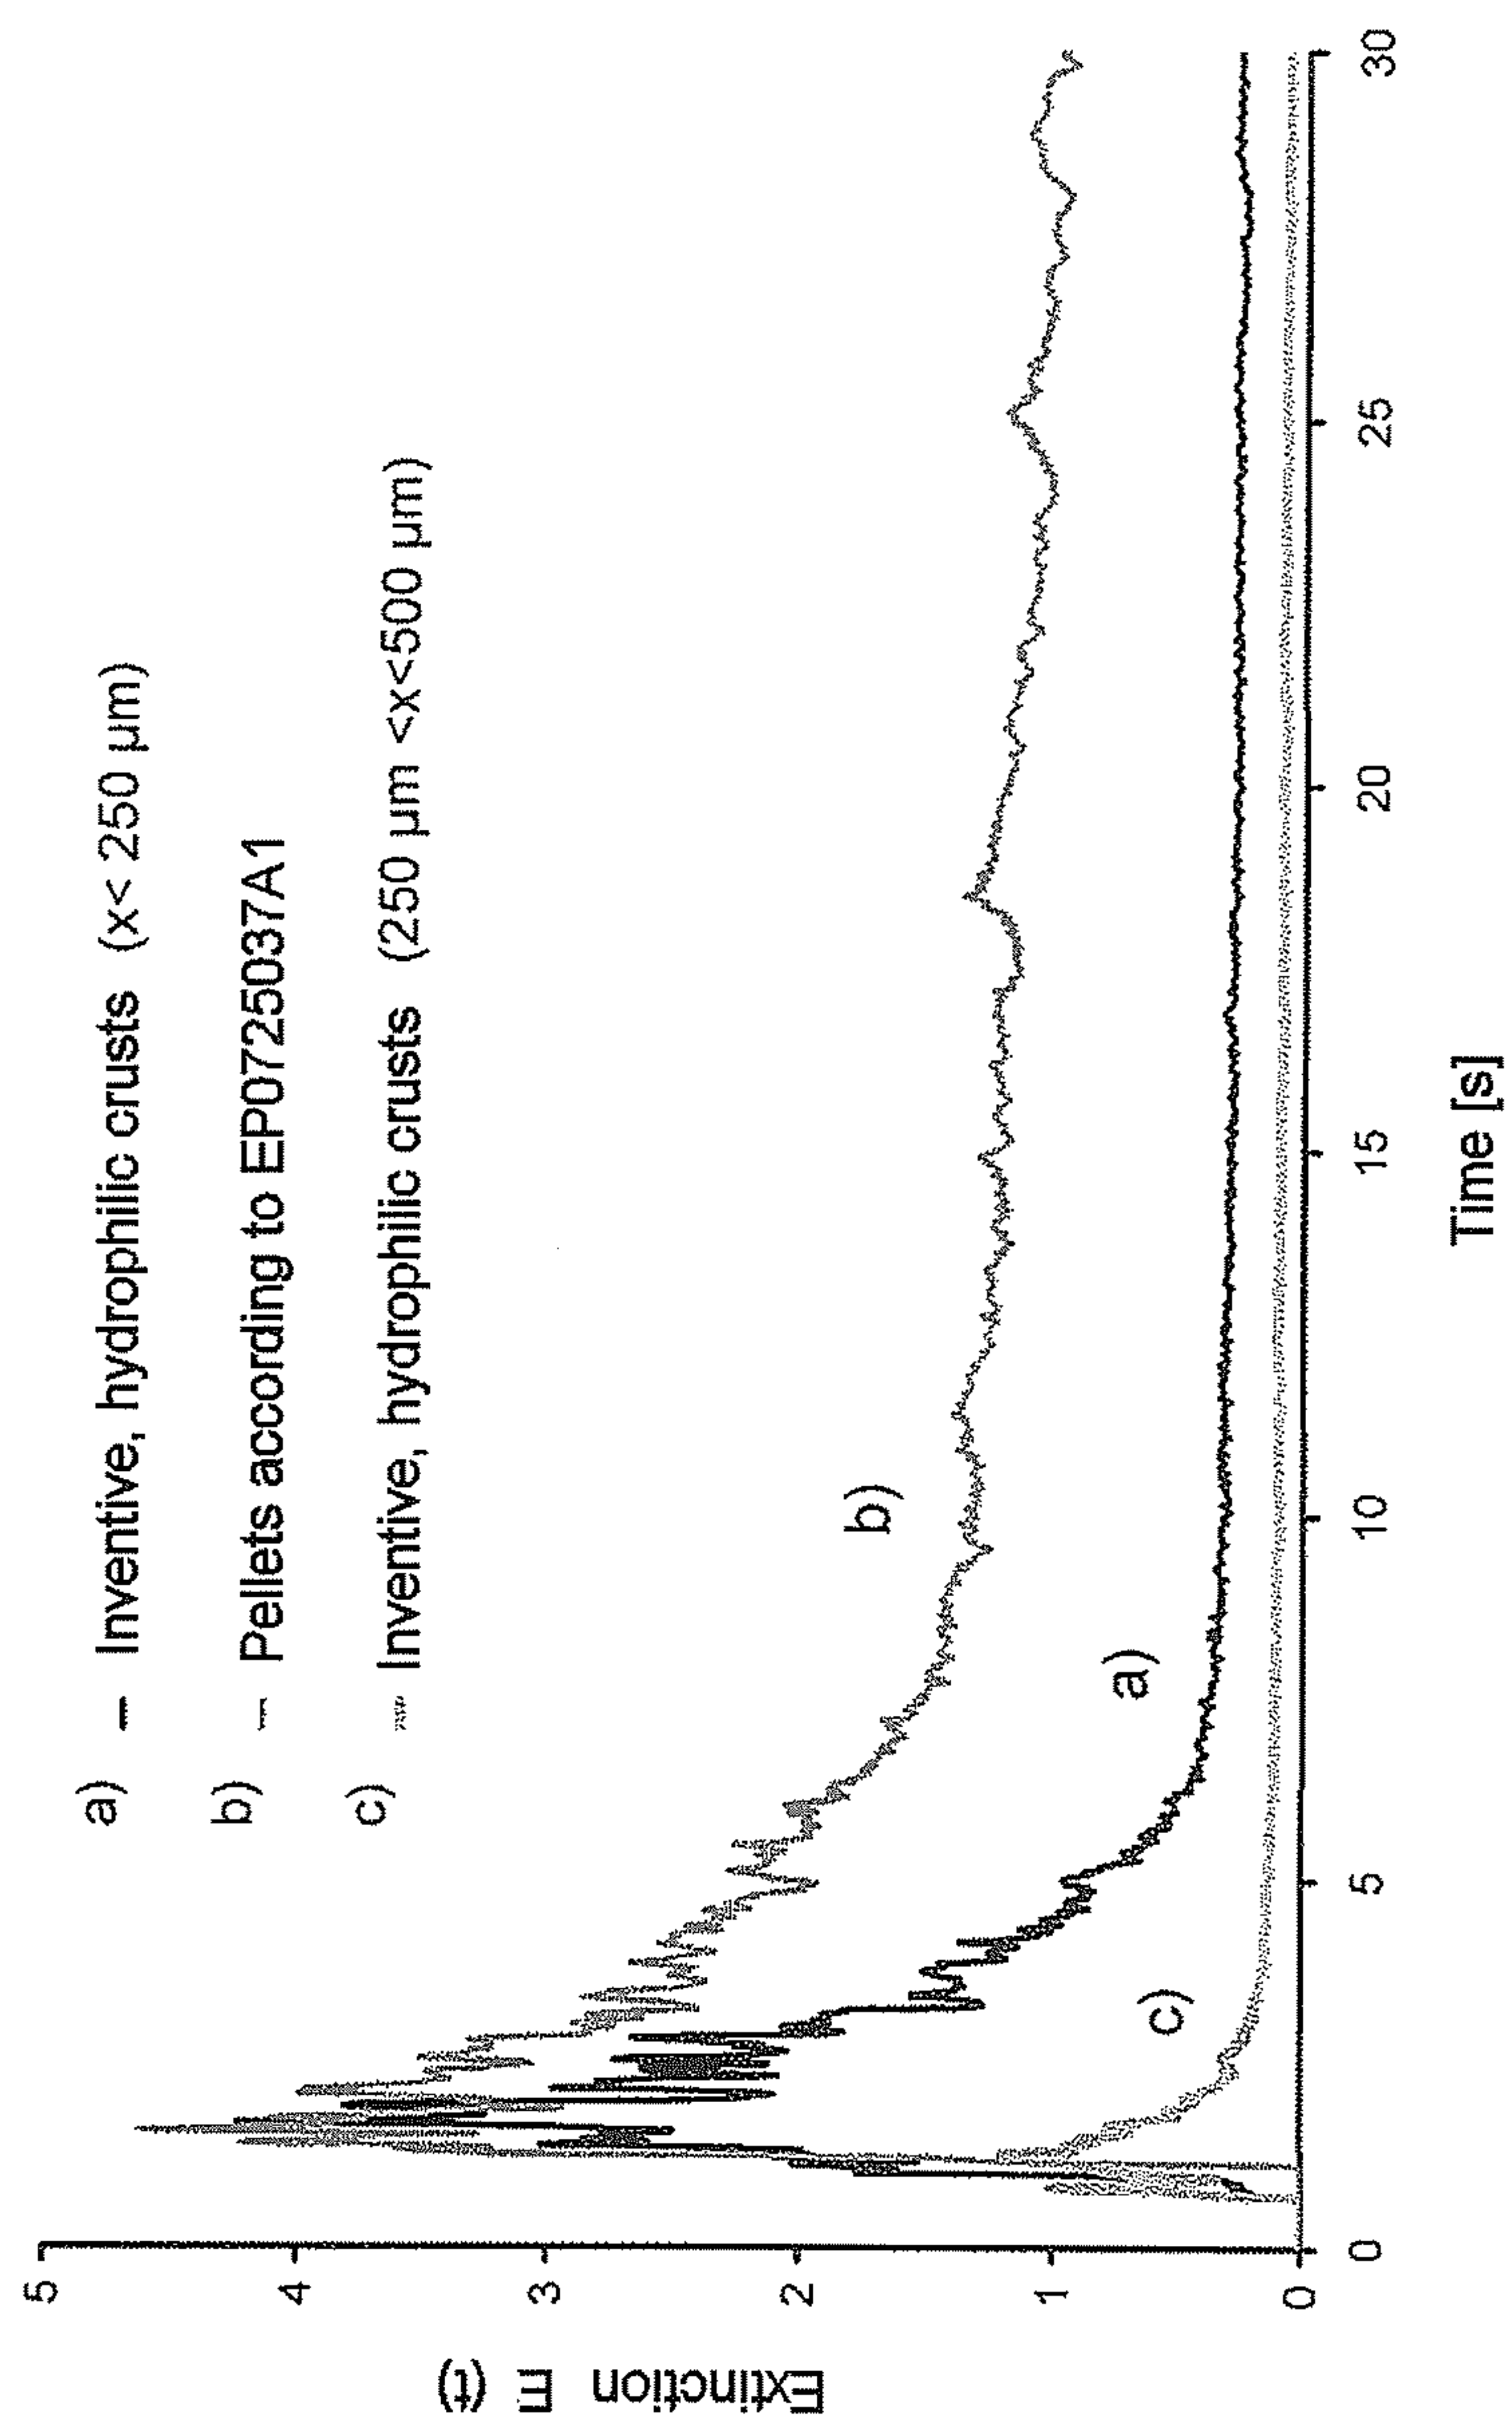


Figure 4

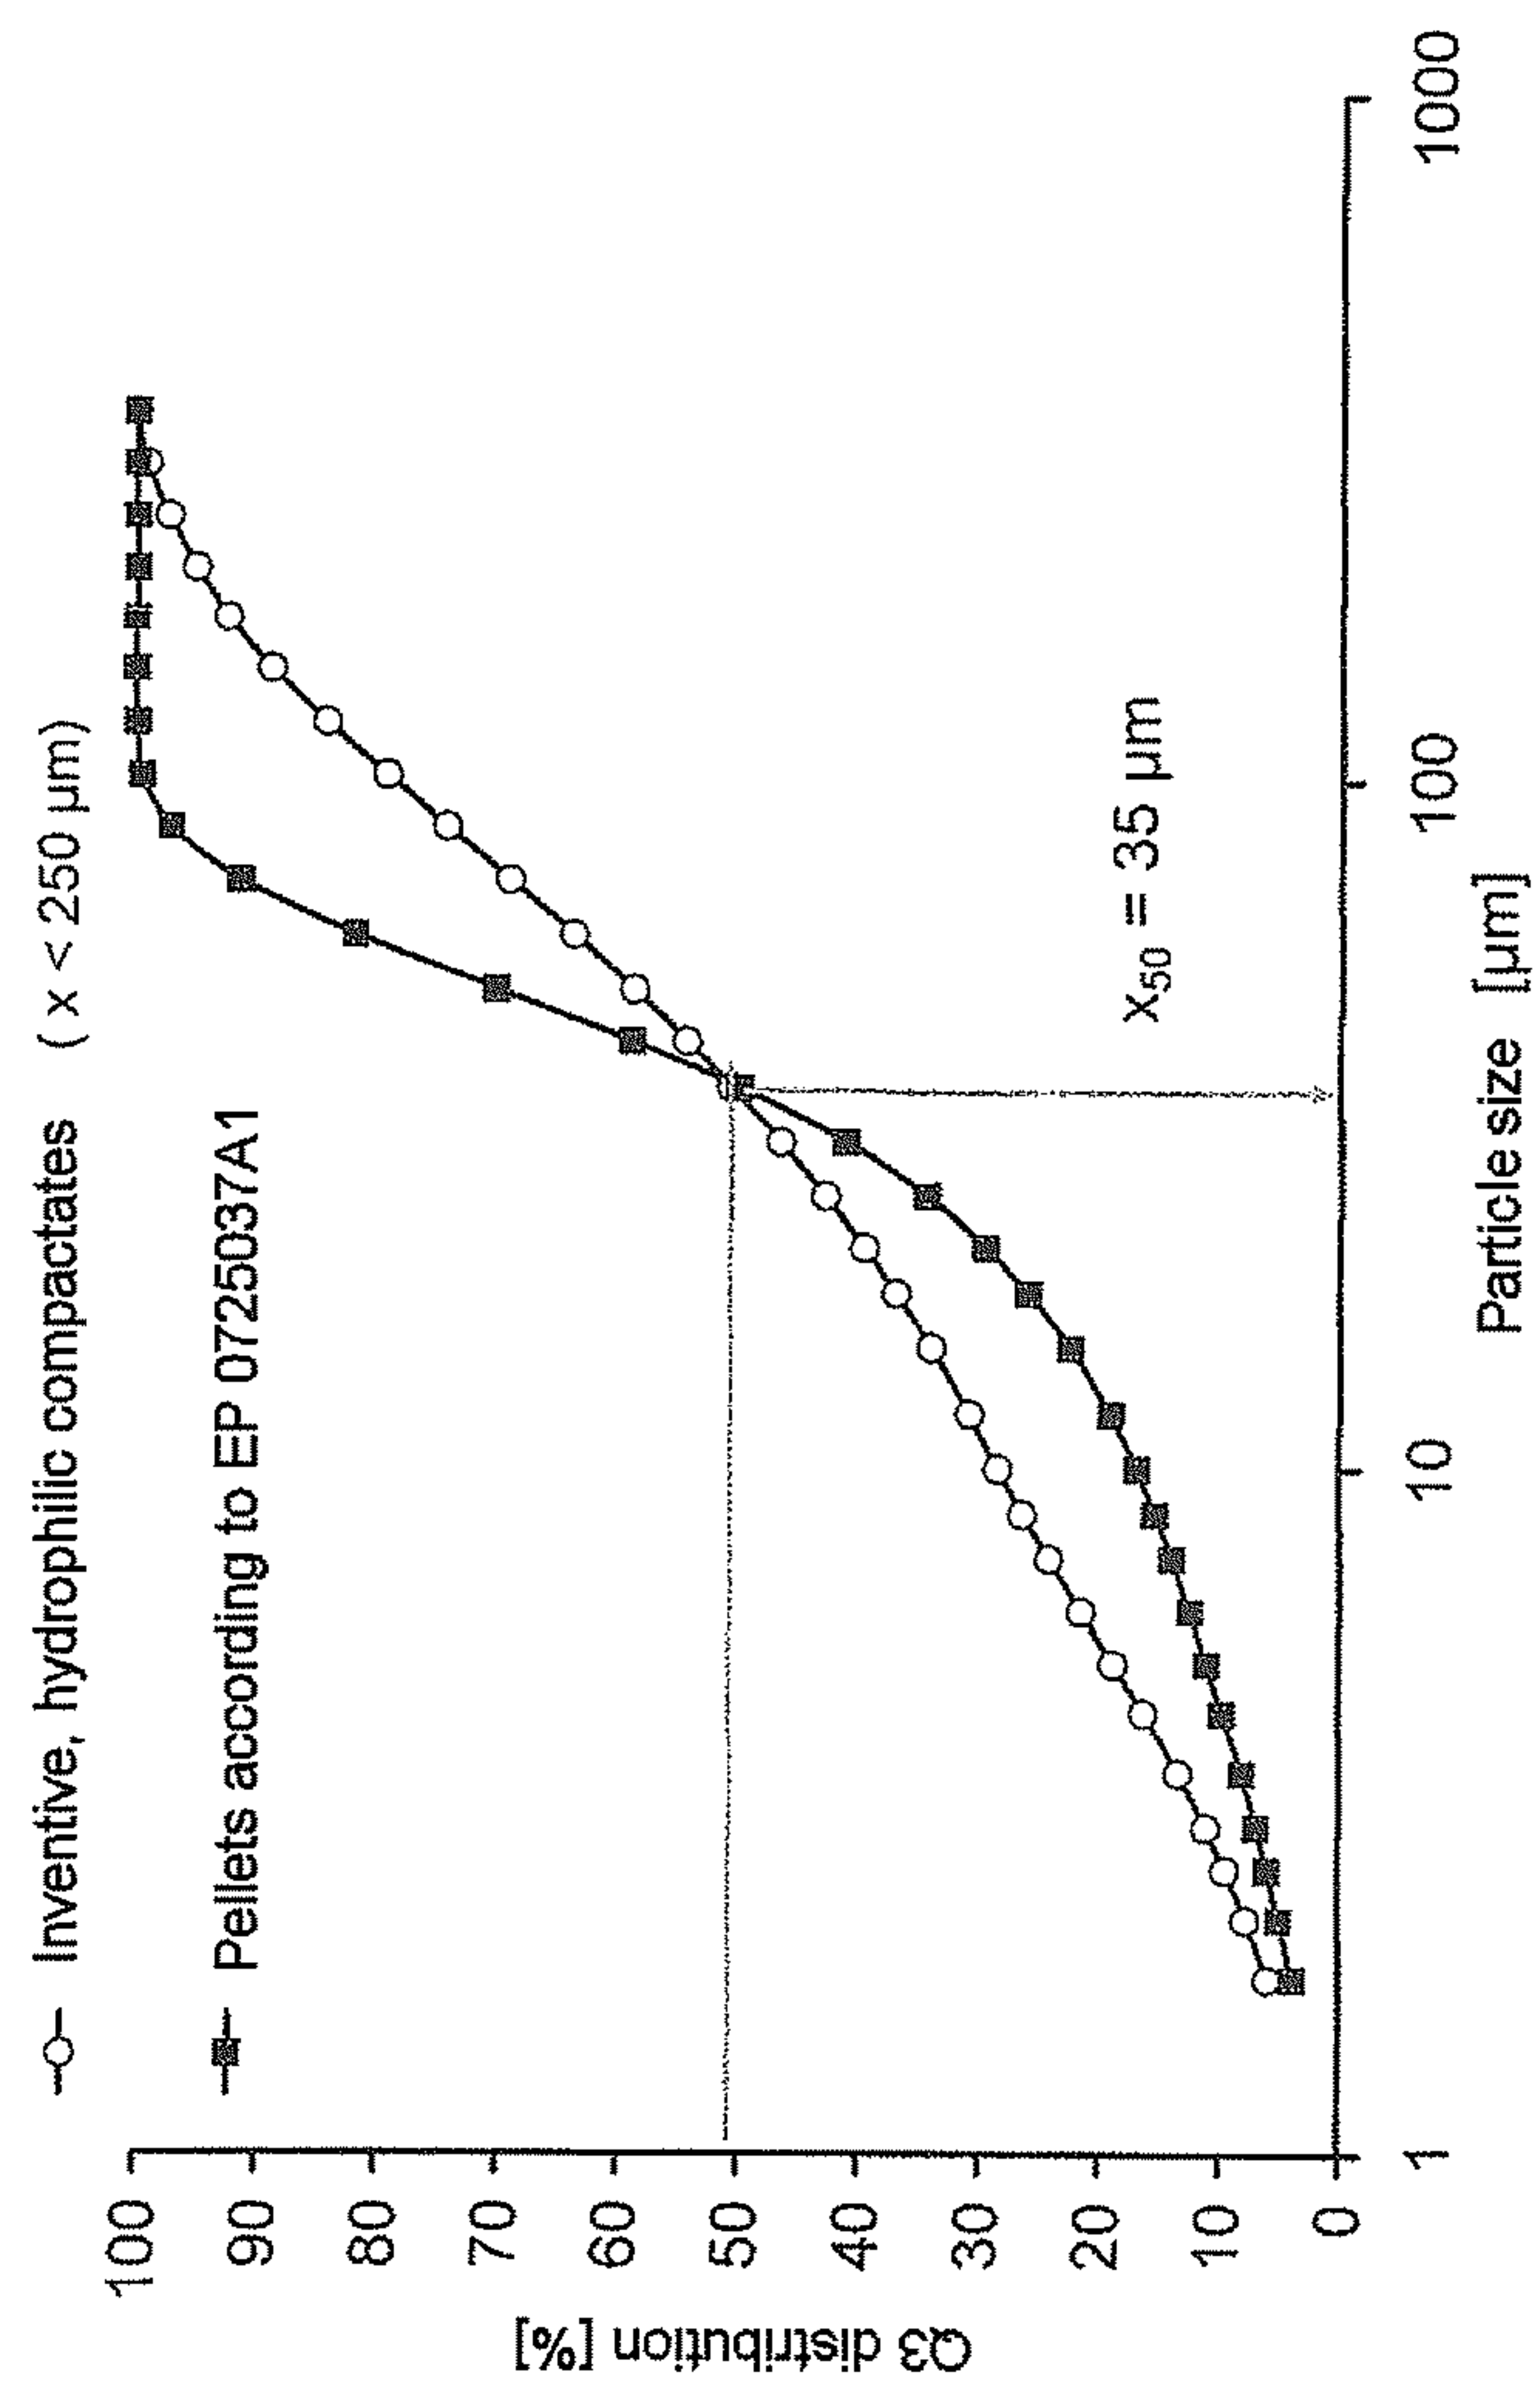


Figure 5


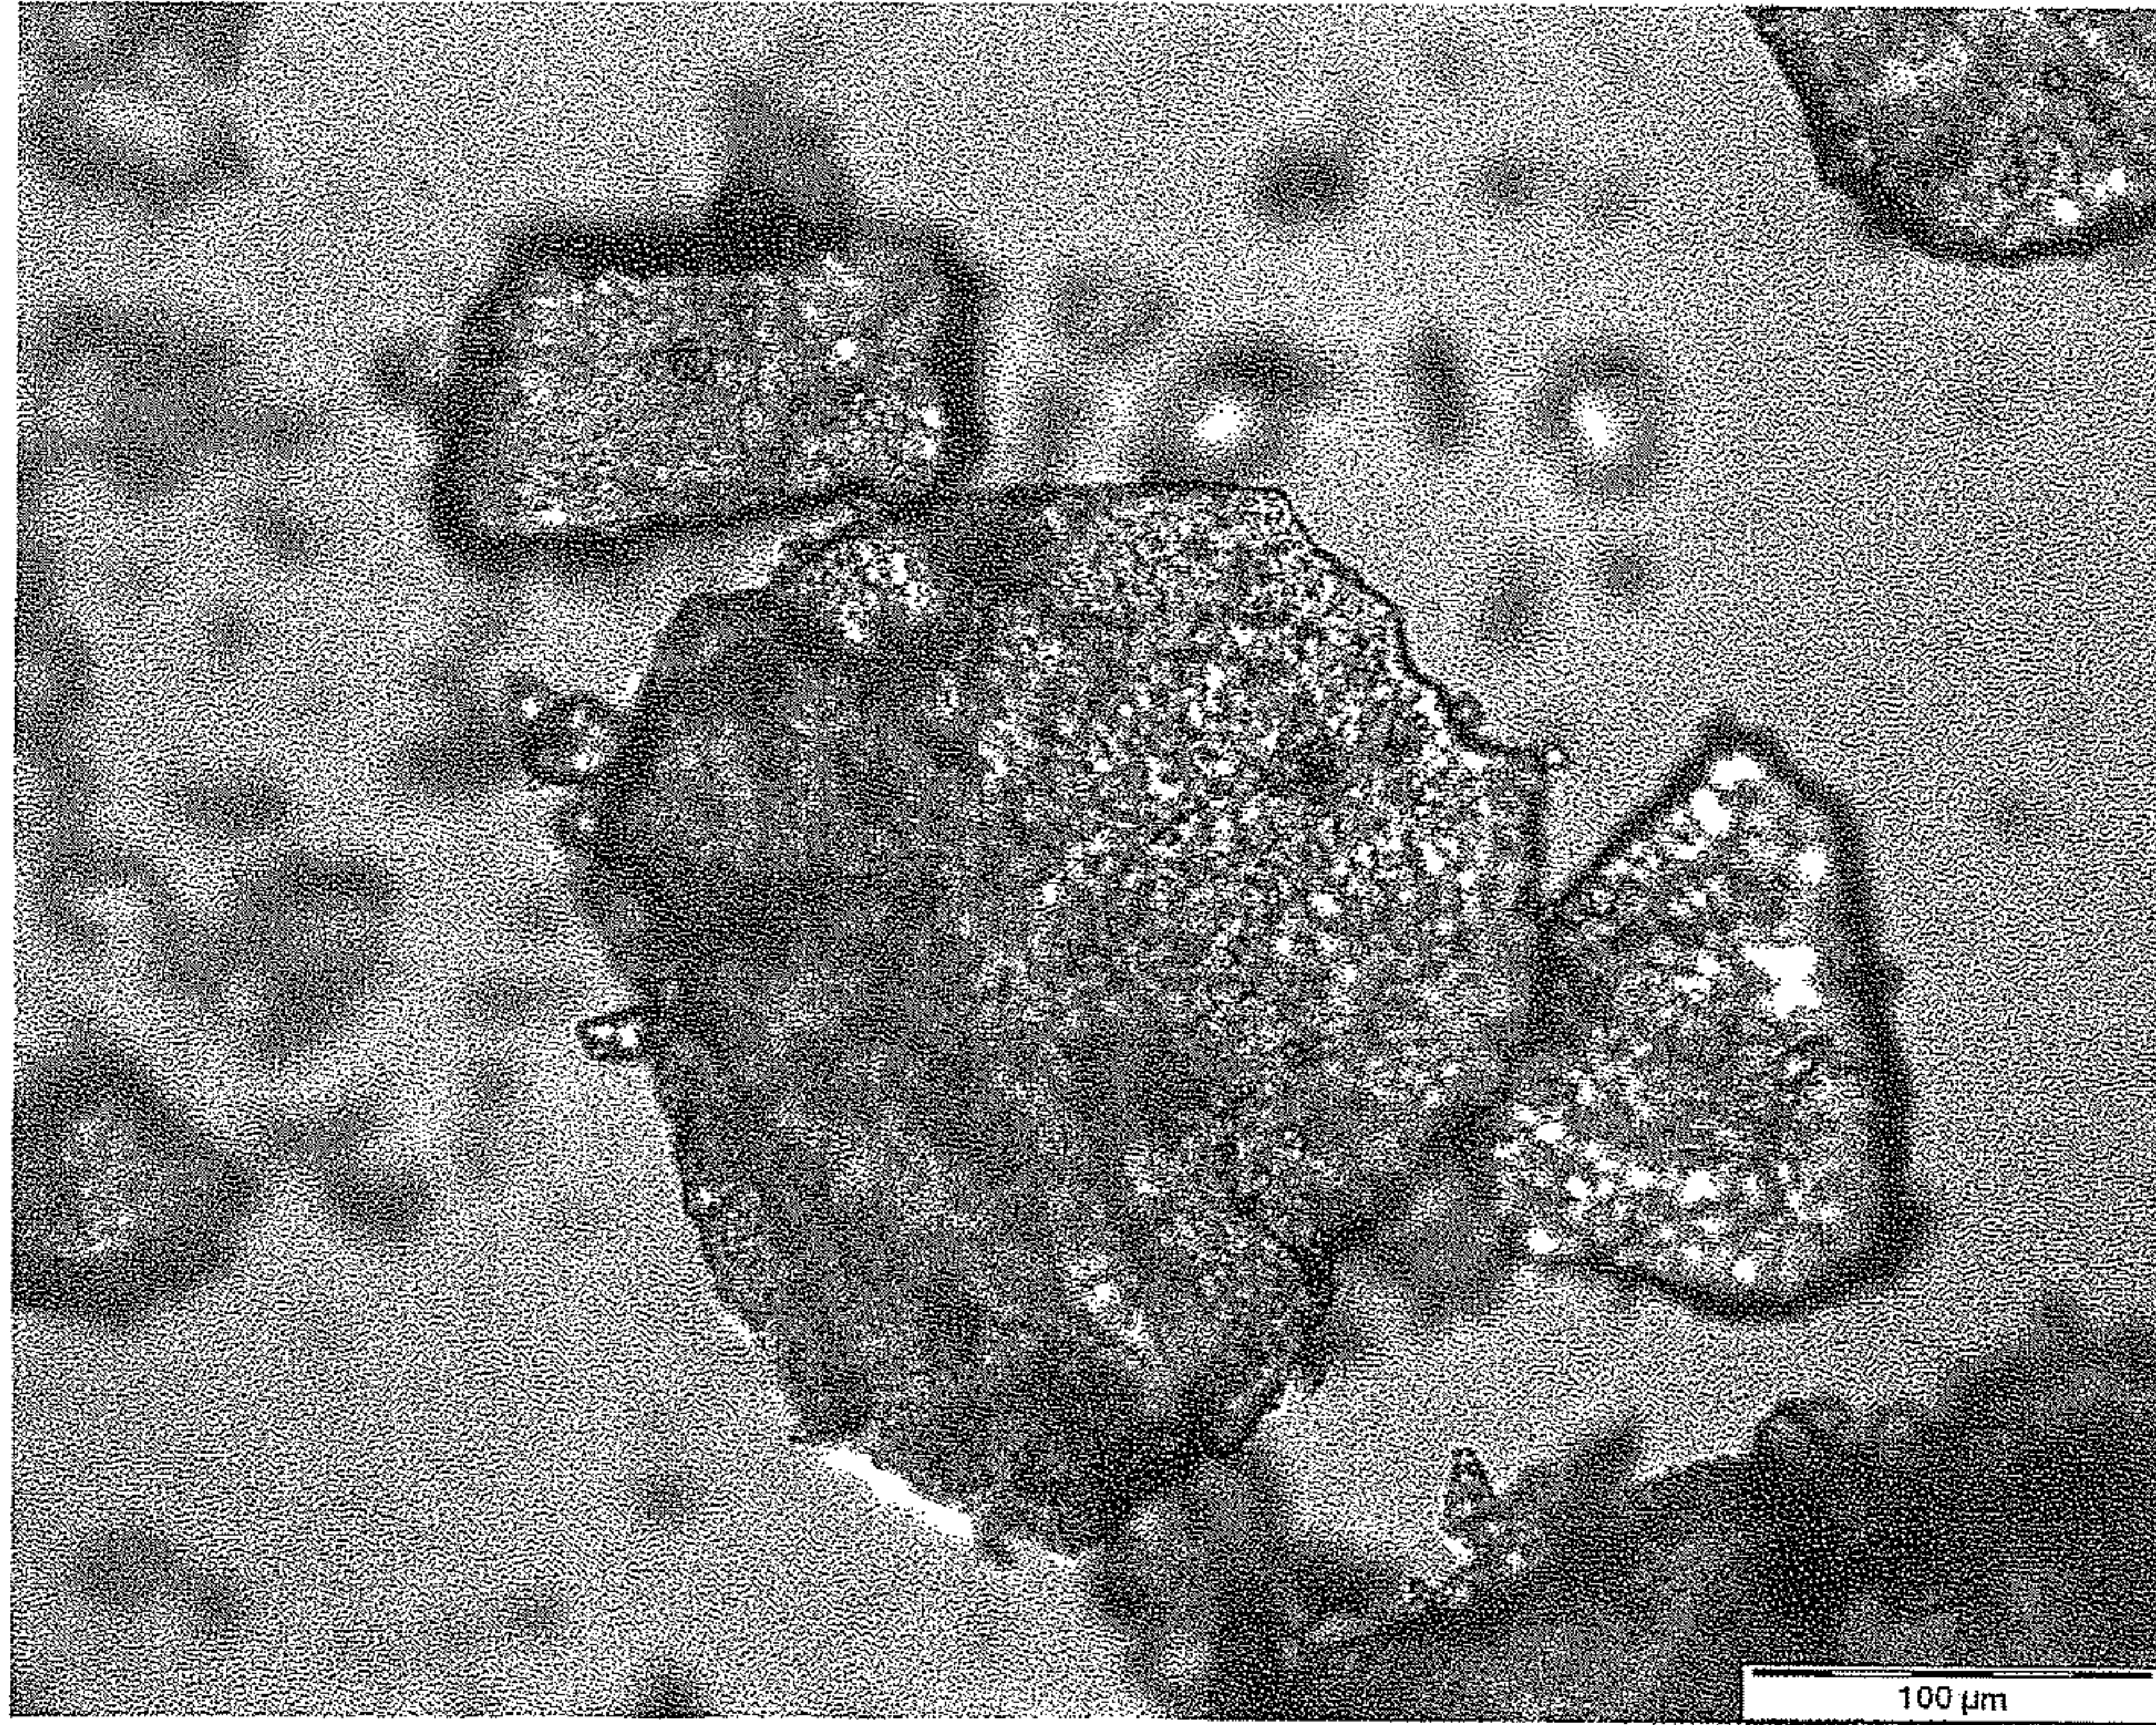


Figure 6




Comparison of sedimentation curves of the two specimens in the vertical pipe

Figure 7

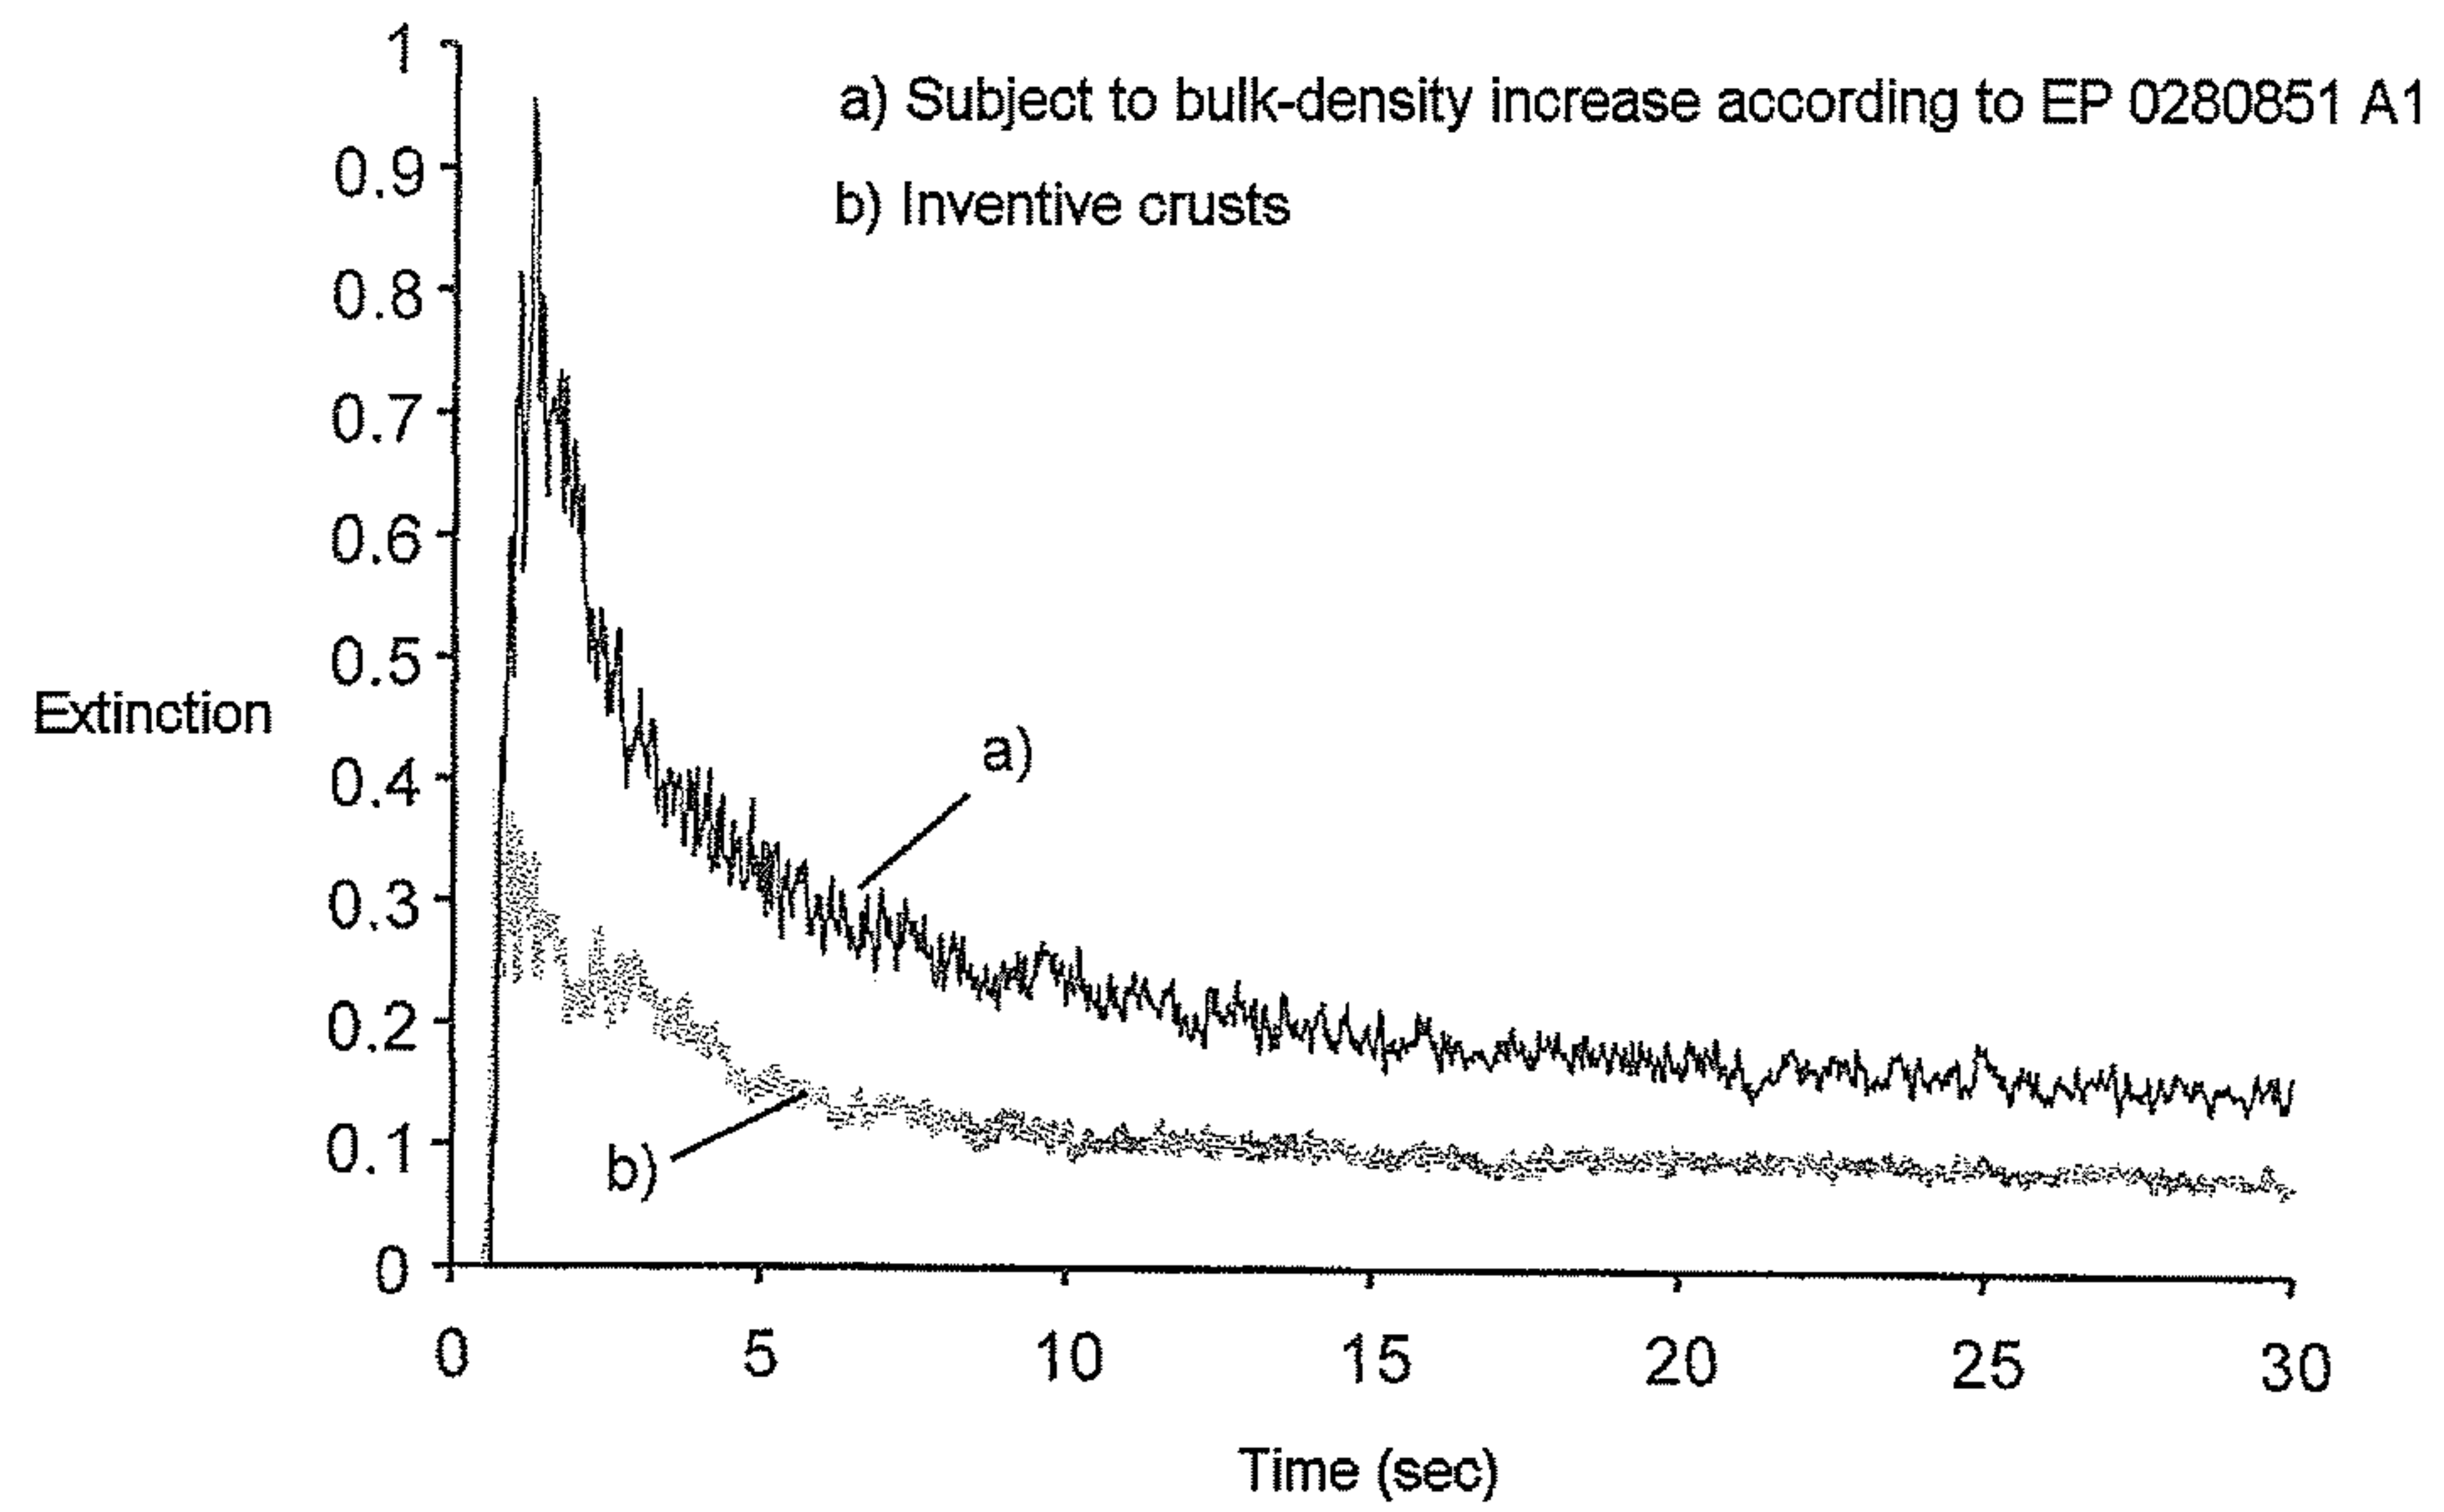

Sample H: Inventive crusts

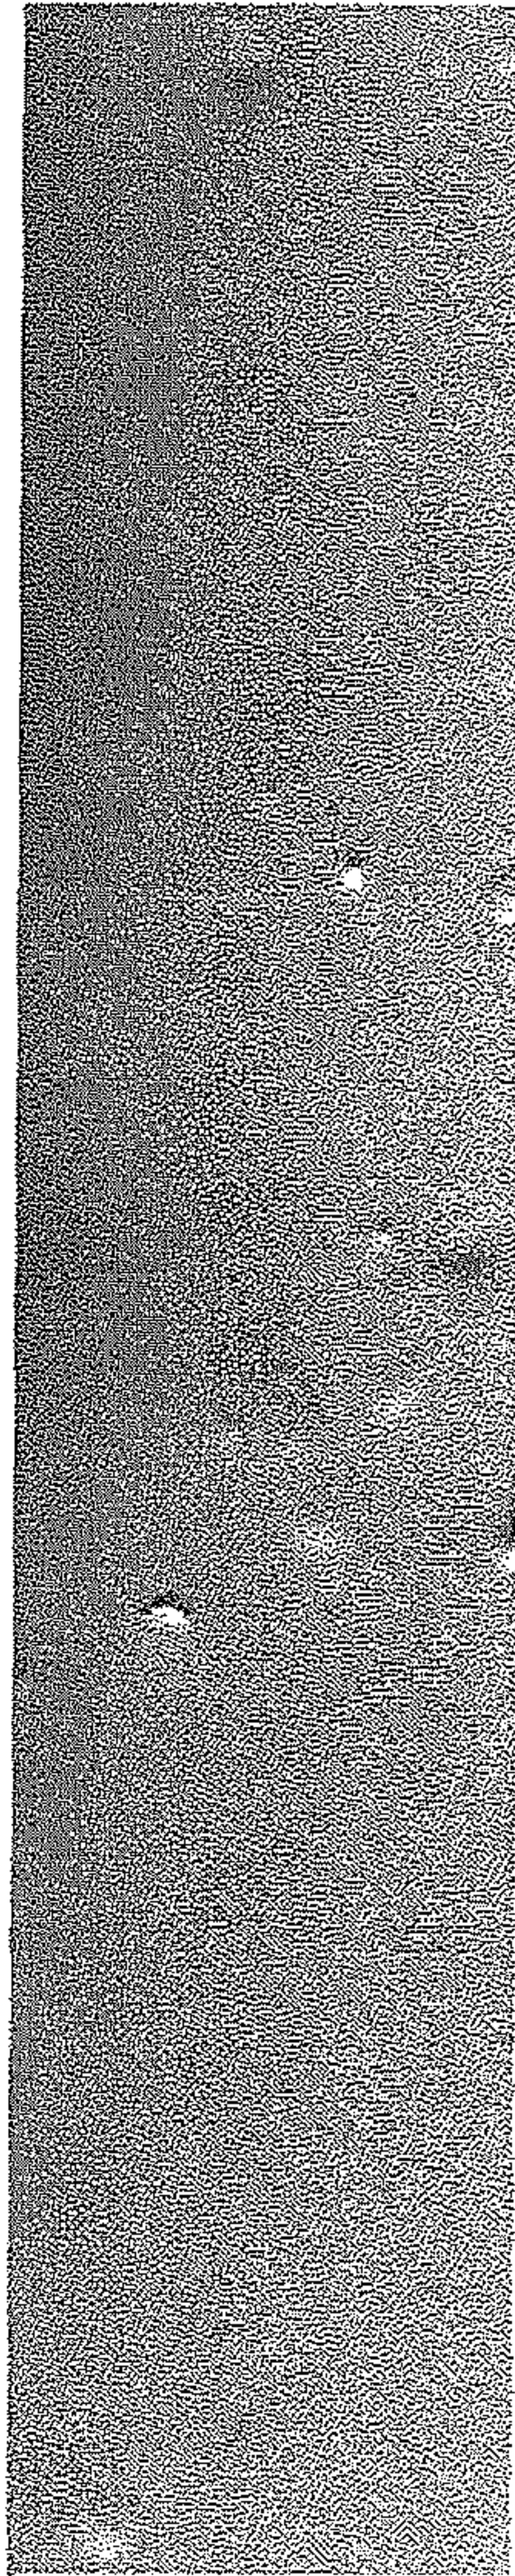

Sample J: Subject to preliminary bulk-density increase according to EP 0 280 851

Figure 8

Aerosil powder


Fines



E-5

Air

Preliminary
de-aeration

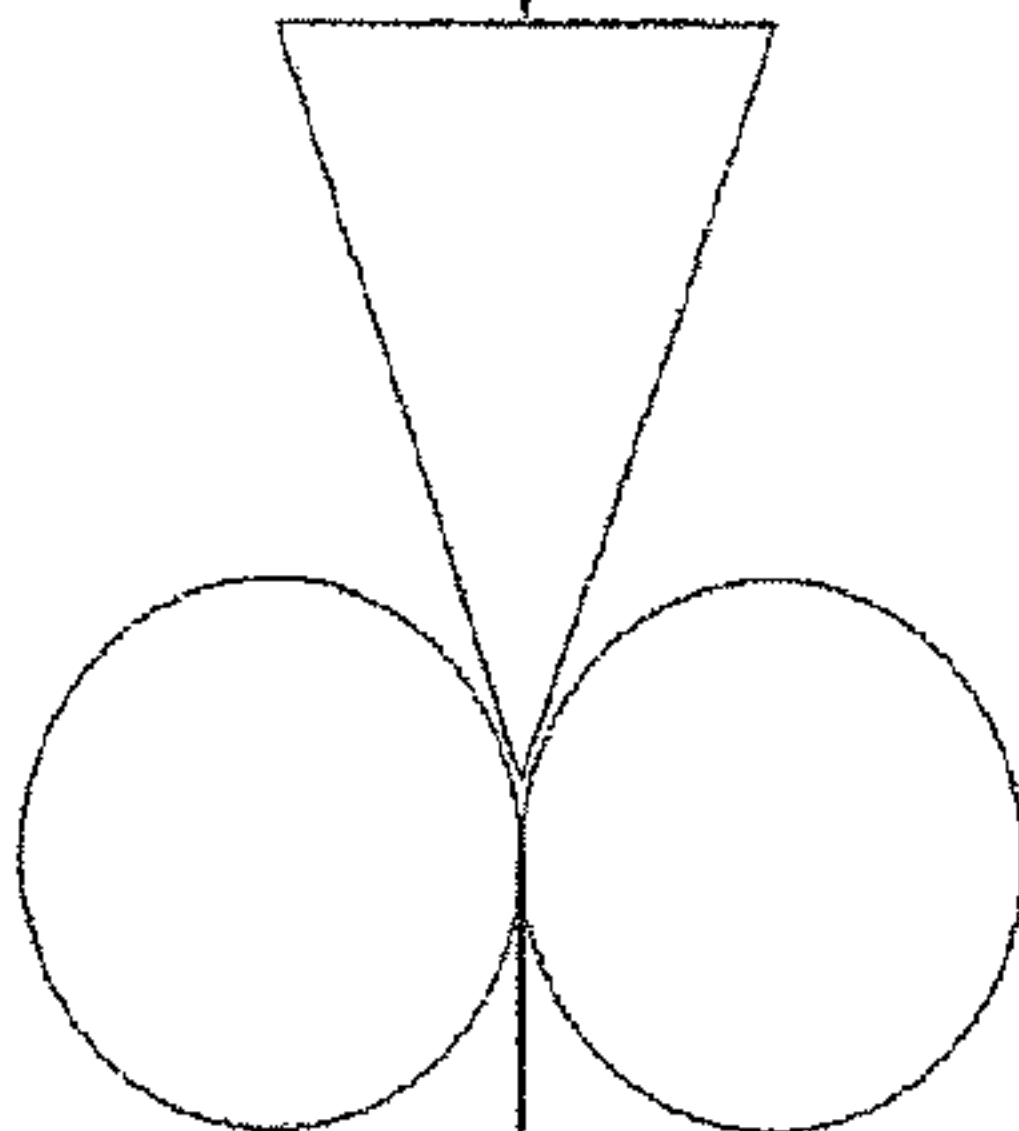

Compacting

Breaking of
crusts

Product
(granulated material)

Classification
or sieving



E-2

E-1