



(51) International Patent Classification:
G03G 5/06 (2006.01) *G03G 5/14* (2006.01)

(21) International Application Number:
PCT/US2009/036994

(22) International Filing Date:
12 March 2009 (12.03.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):
HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; 11445 Compaq Center Drive West,
Houston, TX 77707 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NAUKA, Krzysztof**
[US/US]; 1501 Page Mill Rd., Palo Alto, CA 94304-1100

(US). **SHENG, Xia** [CN/US]; 1501 Page Mill Rd., Palo
Alto, CA 94304-1100 (US). **NG, Hou, T.** [SG/US]; 1501
Page Mill Rd., Palo Alto, CA 94304-1100 (US).

(74) Agents: **DAKIN, Lloyd, E.** et al.; Hewlett-packard Com-
pany, Intellectual Property Administration, P.O. Box
272400 Mailstop 35, Fort Collins, CO 80527-2400 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: PHOTOCONDUCTOR FOR ELECTROPHOTOGRAPHY



FIG. 1A

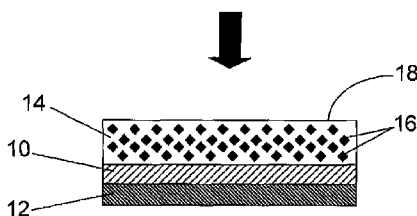


FIG. 1B

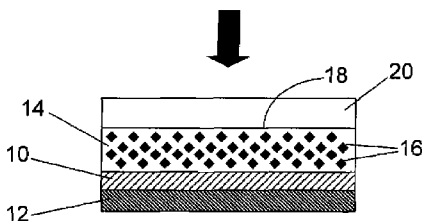


FIG. 1C

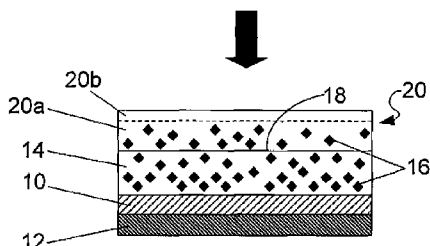


FIG. 1D

(57) Abstract: A method for making a photoconductor for electrophotography can comprise depositing a charge generating layer on an electrode; depositing a charge transfer layer on the charge generating layer, where a plurality of charge transfer molecules are disposed within the charge transfer layer; depositing a film of non-conducting material onto the surface of the charge-transfer layer; heating the film and the surface to cause a subset of the charge transfer molecules to move into the non-conducting material, creating in the film a conducting sub-layer and an insulating sub-layer, where the insulating sub-layer is substantially free of charge transfer molecules.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

5 **PHOTOCONDUCTOR FOR ELECTROPHOTOGRAPHY**

BACKGROUND

10 Liquid electrophotography (LEP) platforms use electrostatic charge to selectively place charged colorant to create offset images. Liquid electrophotography typically involves uniformly charging a photoconductive surface by depositing electrically charged, energetic atomic and molecular species, and then selectively exposing the surface to light which either imparts or dissipates the electrostatic charge in the exposed areas so that these areas define an image. A liquid toner is then applied to either the
15 charged or uncharged areas to create a toner image which may then be transferred to a print medium to create a printed image.

 This printing technique may rely in part on the persistent ability of the photoconductor to present electrostatic charge to its surface. This in turn is based on the availability of charge carrying species in the photoconductor. Therefore, the availability
20 of charge carriers can be a significant factor in the service life of LEP systems. Fabrication and usage approaches that preserve the functionality of LEP photoconductors can enhance the value of these platforms.

25 **BRIEF DESCRIPTION OF THE DRAWINGS**

 Features and advantages of the invention will be apparent from the detailed description which follows, taken in conjunction with the accompanying drawings, which together illustrate, by way of example, features of the invention; and, wherein:

30 FIGS. 1A through 1D show cross-sectional schematic diagrams of certain layers of a photoconductor prepared in steps in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

Before the present invention is disclosed and described, it is to be understood that this disclosure is not limited to the particular process steps and materials disclosed herein
5 because such process steps and materials may vary somewhat. It is also to be understood that the terminology used herein is used for the purpose of describing particular embodiments only. The terms are not intended to be limiting because the scope of the present invention is intended to be limited only by the appended claims and equivalents thereof.

10 It must be noted that, as used in this specification and the appended claims, the singular forms "a," "an," and "the" include plural referents unless the context clearly dictates otherwise.

The term "liquid electro printing" or "liquid electrophotographic printing" (LEP) refers to the printing a liquid toner through an electric field onto a surface to form an
15 electrostatic pattern. The pattern can be transferred to at least one intermediate surface and then to a printing surface or substrate.

As used herein, "liquid electrophotographic ink" or "LEP ink" generally refers to an ink including a liquid vehicle, a colorant, and a charging component. The colorant can be a dye and/or a pigment. The pigment can be a standard pigment colorant or a self-
20 dispersed pigment, such as an encapsulated pigment, a small-molecule modified pigment, or a polymer-attached pigment, as is known in the art. The liquid vehicle can be a fluid in which the colorant of the present disclosure can be dispersed to form an ink. Typical liquid vehicles can include but are not limited to a mixture of a variety of different agents, such as surfactants, co-solvents, buffers, biocides, sequestering agents, compatibility
25 agents, antifoaming agents, oils, emulsifiers, viscosity modifiers, etc. in some embodiments, the LEP ink can include a binder.

The term "substantially" when referring to a structure that is "substantially free of" or "substantially absent" of a specific material indicates that the structure is either completely devoid of that specific material, or there are only residual amounts of that
30 specific material present. For example, when referring to an insulating sub-layer that is substantially free of charge transfer molecules, it is not required that the insulating sub-layer include absolutely no charge transfer molecules. Rather, if any residual

concentration of molecules is present, they would have no impact on the insulating properties of the insulating sub-layer, e.g. perhaps a few residual numbers of molecules spaced sufficiently apart so that they do not provide conductive properties. That being stated, in one embodiment the charge transfer molecules can be completely absent in the
5 insulating sub-layer.

As used herein, the modifier “non-conducting” or “non-conductive” refers to materials that have little or no intrinsic capacity to transmit electric or electronic current. Conversely, the modifier “conducting” may be used to refer not only to highly conductive materials (e.g. metals, alloys) but also to more semiconducting materials which may
10 comprise a non-conducting matrix that is sufficiently doped with charge-carrier transferring molecules so as to be capable of passing electronic current. For example, a sub-layer of non-conductive material that includes a sufficient number of molecules capable of transmitting electrons or holes may be considered a conducting sub-layer.

As used herein, the term “about” is used to provide flexibility to a numerical range
15 endpoint by providing that a given value may be “a little above” or “a little below” the endpoint. The degree of flexibility of this term can be dictated by the particular variable and would be within the knowledge of those skilled in the art to determine based on experience and the associated description herein.

As used herein, a plurality of items, structural elements, compositional elements,
20 and/or materials may be presented in a common list for convenience. However, these lists should be construed as though each member of the list is individually identified as a separate and unique member. Thus, no individual member of such list should be construed as a de facto equivalent of any other member of the same list solely based on their presentation in a common group without indications to the contrary.

25 Concentrations, amounts, and other numerical data may be expressed or presented herein in a range format. It is to be understood that such a range format is used merely for convenience and brevity and thus should be interpreted flexibly to include not only the numerical values explicitly recited as the limits of the range, but also to include all the individual numerical values or sub-ranges encompassed within that range as if each
30 numerical value and sub-range is explicitly recited. As an illustration, a numerical range of “about 1 wt% to about 5 wt%” should be interpreted to include not only the explicitly recited values of about 1 wt% to about 5 wt%, but also include individual values and sub-

ranges within the indicated range. Thus, included in this numerical range are individual values such as 2, 3.5, and 4 and sub-ranges such as from 1-3, from 2-4, and from 3-5, etc. This same principle applies to ranges reciting only one numerical value. Furthermore, such an interpretation should apply regardless of the breadth of the range or the
5 characteristics being described.

It is noted that when discussing the present devices or methods, each of these discussions can be considered applicable to each of these embodiments, whether or not they are explicitly discussed in the context of that embodiment. Thus, for example, in discussing a film in a device, such a film can also be used in the method and is thus
10 applicable to that embodiment, and *vice versa*.

With these definitions in mind, a method of making a photoreceptor for electrophotography can comprise depositing a charge generating layer on an electrode, depositing a charge transfer layer onto the charge generating layer, depositing a film comprising a non-conducting material onto the surface, and heating the film and the
15 surface for a time and at a temperature. The charge generating layer can comprise a material that generates charge carriers (e.g. electron-hole pairs) upon exposure to light. The charge transfer layer can have disposed therein a plurality of charge transfer molecules capable of accepting and delivering charge carriers, and the charge transfer layer can have a surface. Further, the heating can cause a subset of the charge transfer
20 molecules to move into the non-conducting material to create within the film a conducting sub-layer adjacent to the charge transfer layer and an insulating sub-layer situated distally with respect to the charge transfer layer. Also, the insulating sub-layer can be substantially free of charge transfer molecules.

In another embodiment, a photoconductor for electrophotography can comprise a
25 charge generating layer disposed on an electrode, a charge transfer layer disposed on the charge generating layer, and a film of non-conducting material disposed on the charge transfer layer and comprising a conducting sub-layer adjacent to the charge transfer layer and an insulating sub-layer situated distally to the charge transfer layer. Additionally, a plurality of charge transfer molecules can be distributed within the charge transfer layer
30 and the conducting sub-layer while being substantially absent from the insulating sub-layer.

In further detail, organic photoconductors (OPCs) used in LEP systems often comprise a flexible substrate supporting a stack of thin layers of material that provide transient electrostatic functionality. These layers may include an electrode, a charge generating layer, and a charge transfer layer. The electrode can be operably connected to an electrical source and thereby provide the underlying electrical potential for operation of photoconductor. The charge generating layer and charge transfer layer are disposed on the electrode and collectively serve to produce and transmit charge between the electrode and the surface in response to light. The charge generating layer, which can be disposed on the electrode itself, serves to generate charge carriers of a polarity (i.e. electrons or holes) in response to exposure to light. The charge transfer layer may be disposed on the charge generating layer and may comprise a matrix of non-conductive material that is doped with charge transfer molecules (CTMs). The charge transfer molecules are molecules that are capable of transferring a charge of a desired polarity across the charge transfer layer so that the overall charge of the OPC surface is modified. This charge movement is used to pattern a toner applied to the surface, and thereby create an image.

Over the course of repeated use, exposure to energetic charged atomic and molecular species providing the surface charging, as well as to the liquid toner can degrade the electrical quality of the photoconductor region adjacent to the surface and render the charge transfer layer less effective. Without being bound to a single particular theory, it has been found that degradation of the electrical quality of the top surface region can result from complex interactions involving constituent materials in the charge transfer layer, (i.e. the non-conductive matrix material and CTMs), as well as the toner chemicals and energetic charged particles delivering charges to the surface. One approach to reducing this effect can be to place a protective film on the OPC surface to prevent interaction between toner chemicals and CTMs. Such a protective film may be a non-conductive material that exhibits minimal reactivity with chemicals typically used in LEP. Due to the non-conductive properties of the film, it can be beneficial to utilize a very thin protective film, e.g. on the order of tens of nanometers in order to preserve the electrical response profile of the surface. However, deposition of a film this thin can present significant technical challenges. In contrast, readily available techniques for applying suitable materials are typically more suited to producing coatings well over a micron thick. This can be particularly true for organic materials, where techniques for laying

submicron coatings can be costly and not readily amenable to conventional fabrication processes. Thicker coatings, while possibly protective, can also severely reduce the functionality of the underlying photoconductor layers by greatly increasing the electrical resistance of the OPC surface.

5 Accordingly, the method and device disclosed herein can provide an improvement of these older systems, making a photoconductor that provides protection to the charge transfer layer while largely preserving its electrical properties. As illustrated in FIGS. 1A through 1D, a general embodiment of the method can comprise assembling the constituent layers of the photoconductor. More specifically, as shown in FIGS. 1A and
10 1B, this method can more comprise depositing a charge generating layer 10 on an electrode 12 and then depositing a charge transfer layer 14 on the charge generating layer, wherein a plurality of charge transfer molecules (CTMs) 16 are distributed within the charge transfer layer. While the CTMs may be distributed throughout the depth of the layer, they may be also disposed adjacent to the surface 18 of the layer. Fabrication and
15 deposition of these layers may be accomplished through conventional techniques used in the art.

Turning to FIG. 1C, the method also comprises depositing a film 20 of non-conducting material onto the surface 18 of the charge transfer layer 14. The non-conducting material can comprise a material that is suitable for protection of the
20 underlying layer under sustained operating conditions, that is, the material may be one that is both non-conducting and relatively inert with respect to chemicals used in LEP printing. In a particular embodiment, the material may be of a same type as the matrix material of the charge transfer layer, or at least share a number of properties with that material. In a more particular embodiment, the non-conducting material may be the same
25 material as used in the charge transfer layer. For example, the non-conducting material used for the film may be the non-conducting matrix material of the charge transfer layer. Therefore, the non-conducting material can include a polymer known to be suitable for fabricating charge transfer layers, such as polycarbonates. Other non-limiting examples of suitable material for the film include poly(ether sulfone), poly(phenylene oxide),
30 polystyrenes, poly(methyl methacrylate), and poly(ethylene naphthalate). Alternatively, this material may comprise non-polymeric insulating organic species or non-conductive non-organic species.

The physical arrangement of the material in the film may also be selected so as to allow for a desired mobility of CTMs. For example, in a crystalline material diffusion of CTMs may be affected by lattice structure or may largely be limited to grain boundaries in the case of polycrystalline material. Such structural organization issues may therefore
5 be taken into account in choosing a film material, depending on the rate and manner of diffusion desired. Alternatively, an amorphous material may be selected so as to impact diffusion to a lesser degree. Accordingly, in a particular embodiment, the non-conducting material may be an amorphous material.

As shown in FIG. 1D, the method may then comprise heating the film and/or the
10 underlying layer(s) until they reach a temperature at which some of the CTMs move from the charge transfer layer into the non-conducting material. More specifically, the elevated temperature can allow diffusion of a subset of CTMs outward for some distance into the overlying film. Generally only a subset of the total number of CTMs in the charge transfer layer will diffuse into the overlying film. More specifically, most of the CTMs
15 that diffuse out of the charge transfer layer may be those situated adjacent to the surface of that layer. The number of CTMs that diffuse may constitute a small fraction of the total number of CTMs in the charge transfer layer when deposited. Therefore, the diffusion of CTMs into the non-conducting material can have a significant effect on the electrical properties of that material, while having a negligible effect on the properties of
20 the charge transfer layer.

In a particular embodiment, a heating time and temperature is utilized that produce sufficient heating in the film and the underlying layer so that CTMs freely move within the materials, while not reaching a degree of heating that would degrade the film material or CTMs. As such, one aspect of the non-conducting material chosen may be
25 that it can withstand a temperature at which the CTMs diffuse well without itself losing significant integrity. In one aspect, a non-conducting material may be chosen that has a relatively high glass transition temperature or decomposition temperature.

In another aspect, CTMs may be chosen that exhibit a high rate of diffusion at relatively low temperatures. Some non-limiting examples of suitable CTMs for use in
30 photoconductors include hole transporters such as arylalkanes, arylamines, hydrazones, poly(phenylenevinylene)s, polysilylenes, poly(N-vinylcarbazole)s and its derivatives, and pyrazolines, as well as electron dopants such as diphenoquinones, and complexes of

poly(N-vinylcarbazole) and 2,4,7-trinitro-9-fluorene. However, it will be understood that a suitable CTM according to the present embodiment can depend at least partly on the non-conducting film material into which it is to diffuse.

Therefore, in accordance with the present method a suitable combination of non-conducting material and CTMs may be selected based on known properties of each. Likewise, the time and temperature may be selected based on these characteristics so as to achieve a desired concentration profile of CTMs within the film. In a particular aspect, the resulting profile includes CTMs that are distributed within the film but have stopped diffusing short of the surface of the film. In such a profile, two zones or sub-layers effectively exist within the film: a conducting sub-layer 20a adjacent to the charge transfer layer and containing the diffused CTMs and therefore capable of conducting charge to or from underlying layers of the OPC; and a thin sub-layer at the surface of the film that is substantially free of CTMs and therefore largely insulating. In FIG. 1D, the boundary between these sub-layers are represented by a dotted line, with the conducting sub-layer 20a shown below the dotted line and the insulating sub-layer 20b is shown above the dotted line. It should be noted that this representation is provided mainly to illustrate the existence of the two regions, rather than to characterize the shape of the regions or any boundary between them. As these sub-layers arise from molecular motion, it will be appreciated that the sub-layers may exhibit a degree of irregularity in form.

With further reference to the CTM profile within the film, and in view of the discussion above, it has been found that diffusing CTMs well into the protective film while maintaining a substantially CTM-free zone at the surface can provide certain useful qualities. One aspect of such an arrangement is that by maintaining some distance between the furthest diffused CTMs and the film surface (now the working surface of the OPC), deleterious interaction of the photoconductor materials with toner or other printing chemicals may be reduced or eliminated. This can significantly enhance the useful life of the OPC. Another aspect is that by making the distance between the furthest diffused CTMs and the film surface quite small, the protection referred to above may be achieved without greatly changing the ability of the surface to be charged or discharged. It may be appreciated therefore, that the present method may involve selecting some balance point between these two aspects. As such, a particular embodiment can involve heating the film and underlying layer(s) so that CTMs diffuse as far into the protective film as

possible while still leaving enough depth of CTM-free at the surface so as to effectively protect the CTMs in the film from degrading forces.

In accordance with the above, a more particular embodiment of the method can comprise heating the film and underlying layer(s) at a time and a temperature so as to cause the CTMs to diffuse to a specific extent. In a particular aspect of this, the heating parameters may be chosen so that the insulating sub-layer that remains after diffusion has a particular thickness. In a more specific embodiment, the resulting insulating sub-layer has a thickness of less than about 50 nm. In a still more specific embodiment, the insulating sub-layer has a thickness of less than about 10 nm.

In another aspect, the heating parameters also be chosen to shape the concentration profile of the charge transfer molecules in the conducting sub-layer. For example, diffusion of the CTMs at a particular rate and for a particular time may produce a concentration gradient in the sub-layer. In one embodiment, the concentration gradient may be such that CTM concentration is highest adjacent to the charge transfer layer and gradually decreases outward toward the film surface. Furthermore, the non-conducting material, the CTM, heating parameters, or any combination of these may be selected so as to impart a particular rate of change in CTM concentration along the gradient. For example, the resulting gradient may exhibit a linear rate of change in concentration, and the rate may be rapid or quite gradual. Alternatively, the resulting gradient may exhibit a non-linear (e.g. logarithmic) rate of change in concentration. These exemplary concentration profiles and others may be available based on the knowledge in the art concerning the diffusion kinetics of the charge transfer molecules and the material properties.

The present method provides a way to make a photoconductor with a protective layer that is thin enough to preserve the charging properties of the photoconductor. While a microns-thick layer may readily be deposited by straightforward techniques, deposition of a sufficiently thin (e.g. tens of nanometers) presents a significantly greater technical challenge. However, the present approach for creating a thin insulating layer allows one to deposit a relatively thick layer of material. Accordingly, in a particular embodiment, the film of non-conducting material may be deposited at a thickness of from about 0.5 μm to about 5 μm .

Summarizing and reiterating to some extent, a photoconductor for electrophotography and method of making a photoconductor for electrophotography has been developed which provides a protective film over charge transfer molecules. The film can include a thin sub-layer that is substantially free of charge transfer molecules. In particular, the method allows the generation of a thin protective layer from the deposition of a relatively thick layer of non-conducting material. This may prove particularly useful in increasing the service life of LEP photoconductors.

While the forgoing examples are illustrative of the principles of the present invention in one or more particular applications, it will be apparent to those of ordinary skill in the art that numerous modifications in form, usage and details of implementation can be made without the exercise of inventive faculty, and without departing from the principles and concepts of the invention. Accordingly, it is not intended that the invention be limited, except as by the claims set forth below.

What is claimed is:

CLAIMS

1. A method of making a photoreceptor for electrophotography, comprising:
depositing a charge generating layer on an electrode;
5 depositing a charge transfer layer on the charge generation layer, said charge transfer layer having a plurality of charge transfer molecules disposed therein, and said charge transfer layer having a surface;
depositing a film comprising a non-conducting material onto the surface;
heating the film and the surface for a time and at a temperature, wherein the
10 heating causes a subset of the charge transfer molecules to move into the non-conducting material to create within the film a conducting sub-layer adjacent to the charge transfer layer and an insulating sub-layer situated distally with respect to the charge transfer layer, and wherein the insulating sub-layer is substantially free of charge transfer molecules.
- 15 2. The method of claim 1, wherein the heating results in a concentration gradient of the charge transfer molecules within the conducting sub-layer.
3. The method of claim 1 or 2, wherein the film is deposited at a thickness of from about 0.5 μm to about 5 μm .
20
4. The method of one of claims 1 to 3, wherein the time is sufficient to create the insulating sub-layer at a thickness of less than about 50 nm.
5. The method of one of claims 1 to 4, wherein the non-conducting material is
25 also present in the charge transfer layer.
6. The method of one of claims 1 to 5, wherein the heating comprises a plurality of heating steps, wherein the temperature and time are changed in at least one heating step.
30
7. The method of one of claims 1 to 6, wherein the non-conducting material comprises polymer selected from poly(ether sulfone), poly(phenylene oxide),

polystyrenes, polycarbonates, poly(methyl methacrylate), poly(ethylene naphthalate), and combinations thereof.

8. The method of one of claims 1 to 7, wherein the charge transfer molecules are
5 selected from the group consisting of arylalkanes, arylamines, hydrazones,
poly(phenylenevinylene)s, polysilylenes, poly(N-vinylcarbazole)s, pyrazolines,
diphenoquinones, derivatives, combinations, and complexes thereof.

9. The method of one of claims 1 to 8, wherein the temperature is from about 80
10 °C to about 110 °C.

10. A photoconductor for electrophotography, comprising:
a charge generating layer disposed on an electrode;
a charge transfer layer disposed on the charge generating layer;
15 a film of non-conducting material disposed on the charge transfer layer and
comprising a conducting sub-layer adjacent to the charge transfer layer and an insulating
sub-layer situated distally to the charge transfer layer;
a plurality of charge transfer molecules distributed within the charge transfer layer
and the conducting sub-layer while being substantially absent from the insulating sub-
20 layer.

11. The photoconductor of claim 10, wherein a concentration gradient of the
charge transfer molecules exists within the conducting sub-layer.

12. The photoconductor of claim 10 or 11, wherein the insulating sub-layer has a
25 thickness of less than about 50 nm.

13. The photoconductor of one of claims 10 to 12, wherein the non-conducting
material is also present in the charge transfer layer.

14. The photoconductor of one of claims 10 to 13, wherein the non-conducting
30 material comprises a polymer selected from poly(ether sulfone), poly(phenylene oxide),

polystyrenes, polycarbonates, poly(methyl methacrylate), poly(ethylene naphthalate) and combinations thereof.

15. The photoconductor of one of claims 10 to 14, wherein the charge transfer
5 molecules are selected from the group consisting of arylalkanes, arylamines, hydrazones, poly(phenylenevinylene)s, polysilylenes, poly(N-vinylcarbazole)s, pyrazolines, diphenoquinones, derivatives, combinations, and complexes thereof.

1/1

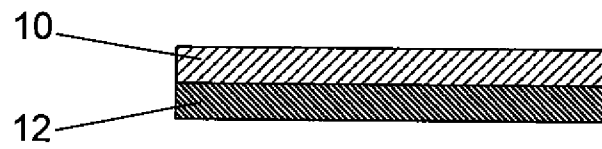


FIG. 1A

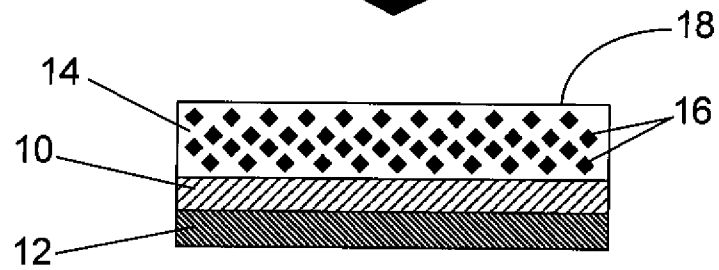


FIG. 1B

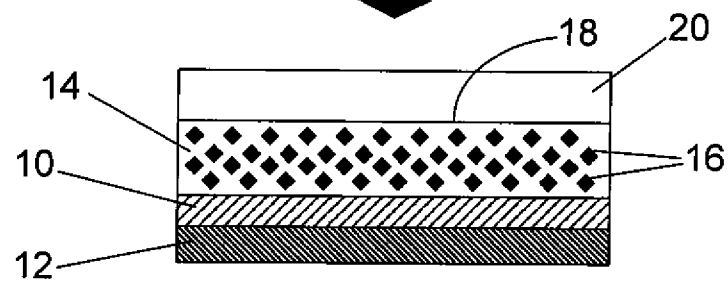


FIG. 1C

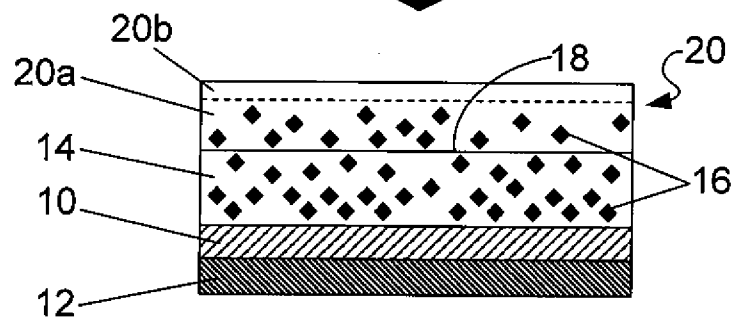


FIG. 1D

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2009/036994**A. CLASSIFICATION OF SUBJECT MATTER****G03G 5/06(2006.01)i, G03G 5/14(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G03G 5/06; B41J 2/41; G03G 5/047; G03G 9/097

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models since 1975.
Japanese utility models and applications for utility models since 1975.Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: "photoreceptor", "electrophotography", "charge", "deposit", "transfer"**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003-0186146 A1 (TOYOKO SHIBATA et al.) 02 October 2003 See sections [0323] to [0347]	1-3,10-12
A	US 2001-0005568 A1 (JEFFREY H. SOKOL et al.) 28 June 2001 See sections [0039] to [0044]	1-3,10-12
A	US 2003-0210318 A1 (ROBERT, H. DETIG) 13 November 2003 See sections [0126] to [0153]	1-3,10-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 DECEMBER 2009 (10.12.2009)

Date of mailing of the international search report

14 DECEMBER 2009 (14.12.2009)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Young Jae

Telephone No. 82-42-481-8305



INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2009/036994**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 4-9 and 13-15
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2009/036994

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003-0186146 A1	02.10.2003	US 6919155 B2	19.07.2005
US 2001-0005568 A1	28.06.2001	US 6214507 B1	10.04.2001
		US 6379856 B2	30.04.2002
US 2003-0210318 A1	13.11.2003	US 6781612 B1	24.08.2004
		US 6876370 B2	05.04.2005