



(12) **DEMANDE DE BREVET CANADIEN**  
**CANADIAN PATENT APPLICATION**


(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/03/08  
(87) Date publication PCT/PCT Publication Date: 2017/09/14  
(85) Entrée phase nationale/National Entry: 2018/07/05  
(86) N° demande PCT/PCT Application No.: EP 2017/055472  
(87) N° publication PCT/PCT Publication No.: 2017/153486  
(30) Priorité/Priority: 2016/03/08 (US15/063,900)


(51) Cl.Int./Int.Cl. **A24F 47/00 (2006.01)**  
(71) **Demandeur/Applicant:**  
PHILIP MORRIS PRODUCTS S.A., CH  
(72) **Inventeurs/Inventors:**  
ROSTAMI, ALI, US;  
TUCKER, CHRISTOPHER S., US;  
KANE, DAVID, US;  
LIPOWICZ, PETER, US;  
KARLES, GEORGIOS, US;  
KOBAL, GERD, US;  
PITHAWALLA, YEZDI, US  
(74) **Agent:** RIDOUT & MAYBEE LLP

(54) Titre : CARTOUCHE COMBINEE POUR DISPOSITIF DE VAPOTAGE ELECTRONIQUE  
(54) Title: COMBINED CARTRIDGE FOR ELECTRONIC VAPING DEVICE


**FIG. 1A**

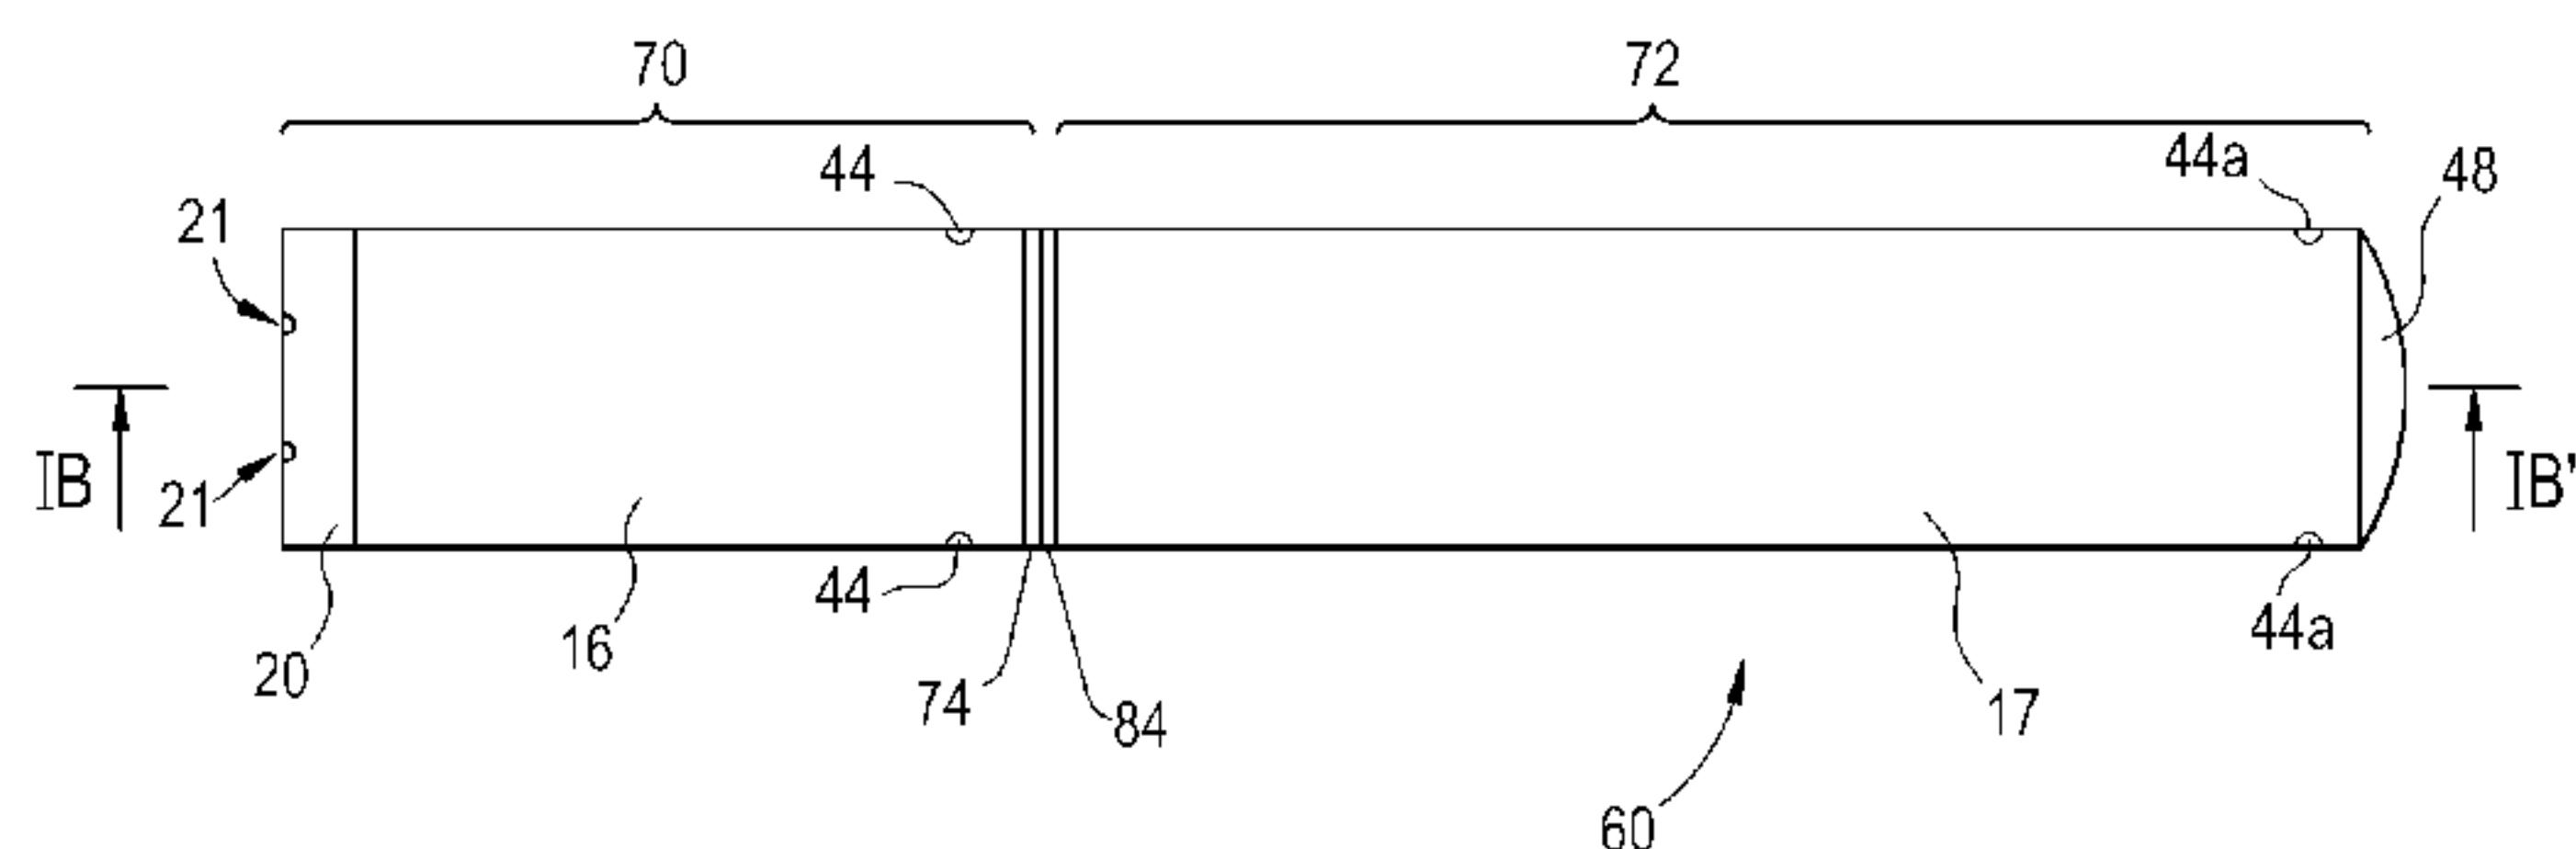

**FIG. 1B**

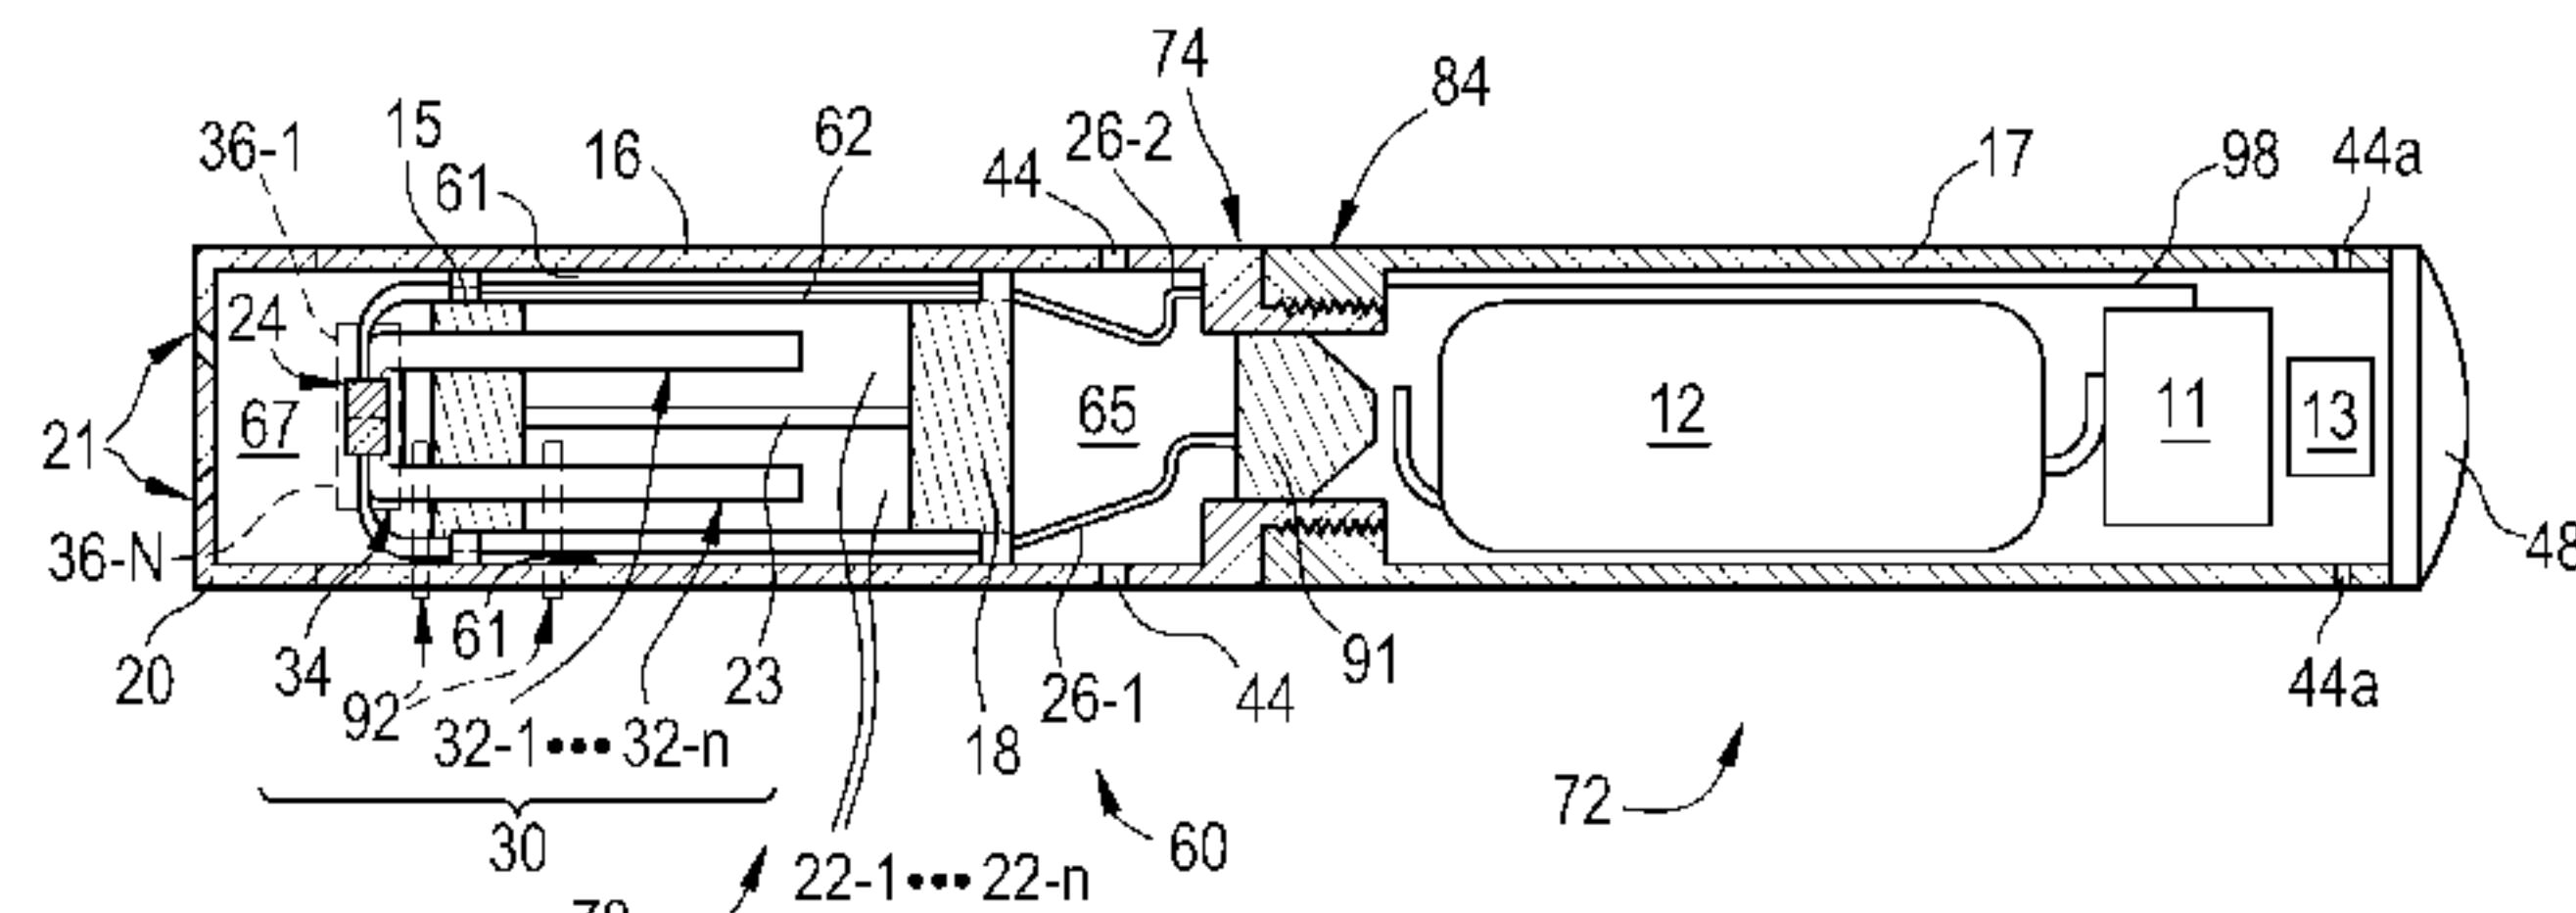

**FIG. 1C**

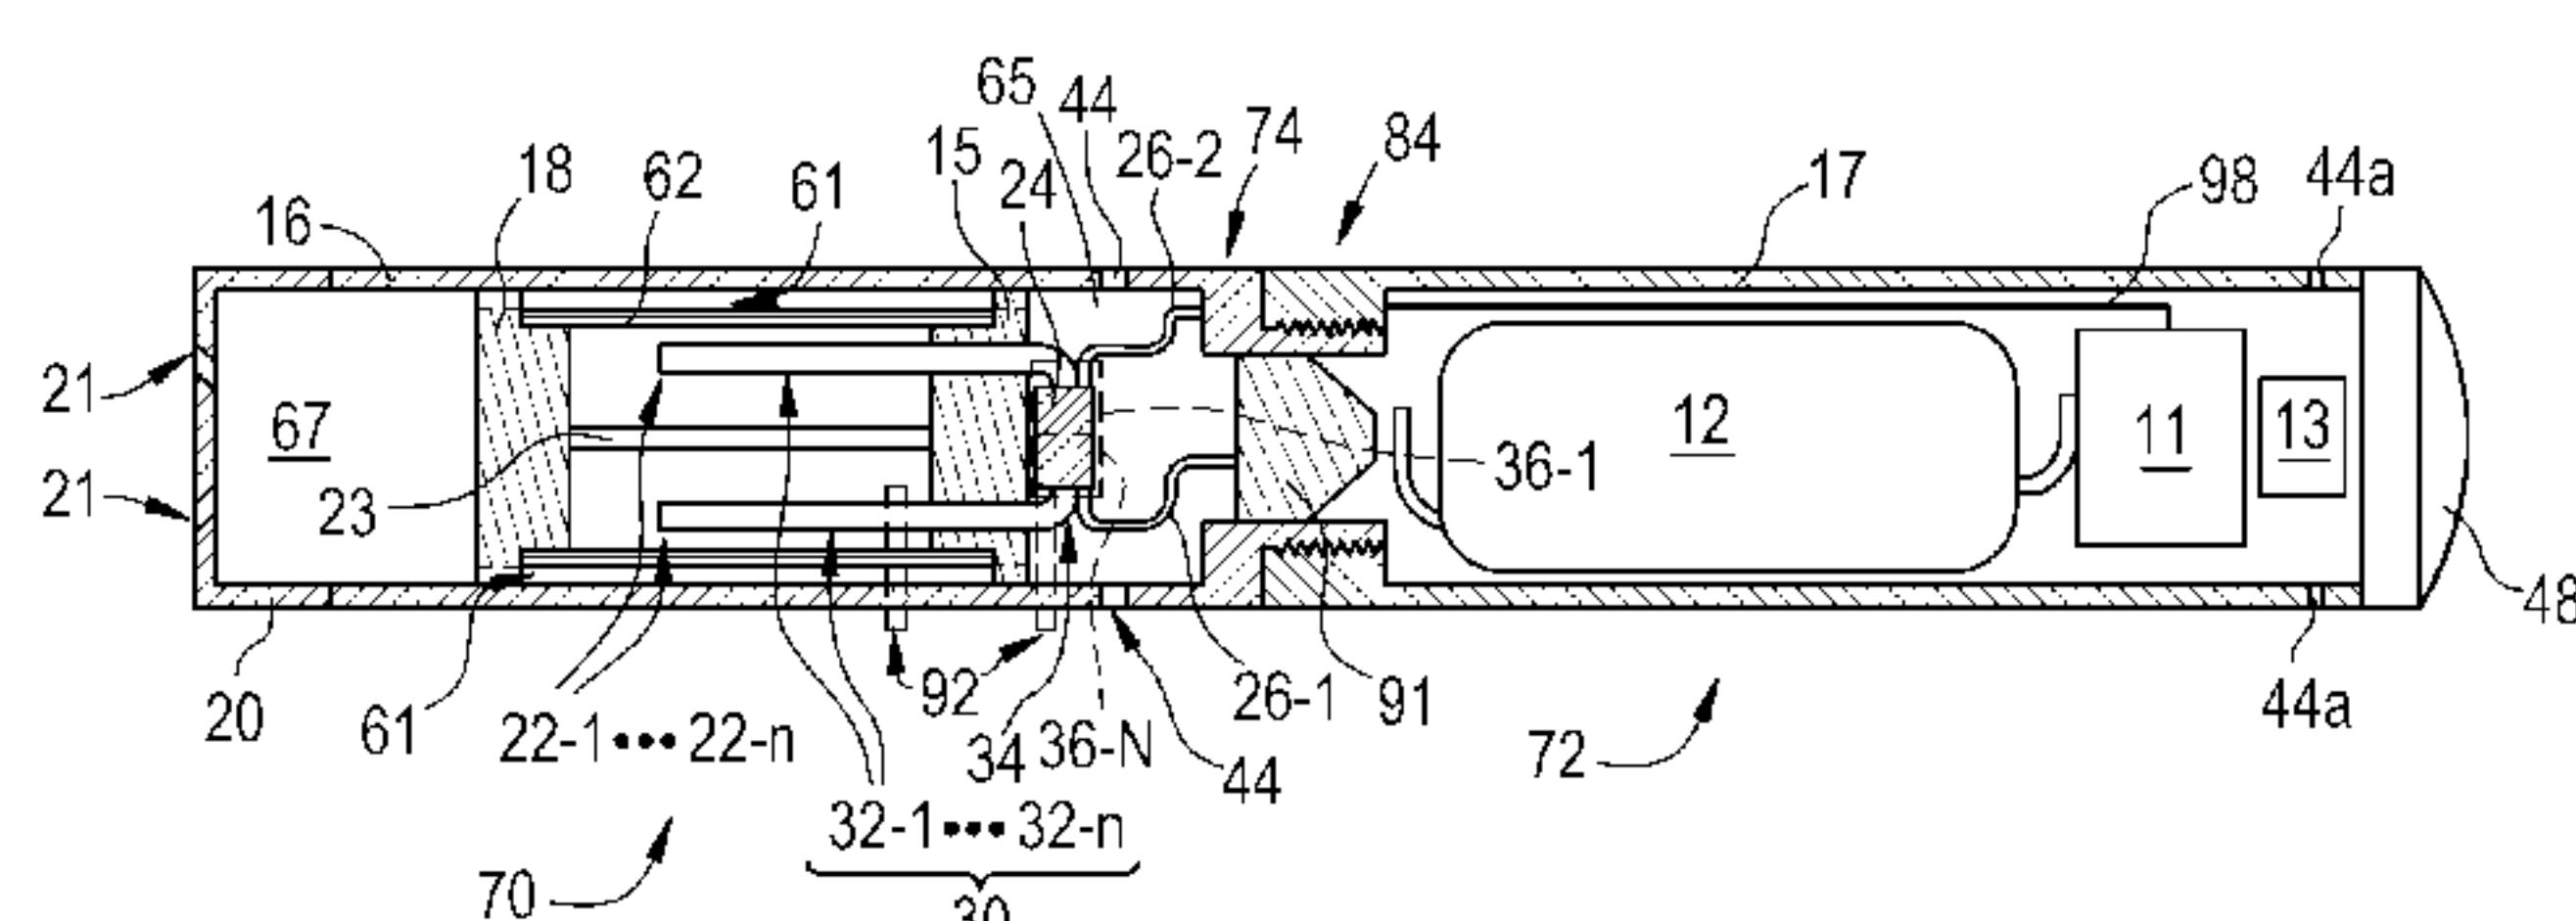

(57) Abrégé/Abstract:

A cartridge (70) for an e-vaping device (60) enables simultaneous vaporization of different pre-vapor formulations to form a vapor for vaping by an adult vaper. The cartridge (70) includes a dispensing interface (30) coupled to a plurality of reservoirs (22-1 to 22-

## (57) Abrégé(suite)/Abstract(continued):

N) and a heater (24) coupled to the dispensing interface (30) in a housing (16). The dispensing interface (30) may include a trunk (34) and separate roots (32-1 to 32-N) extending into separate reservoirs, such that the dispensing interface (30) draws different pre-vapor formulations from the reservoirs to the trunk (34) via the separate roots. The heater (24) is coupled to the trunk (34), such that the heater (24) is operable to simultaneously vaporize the different pre-vapor formulations drawn into the trunk (34).



WO 2017/153486 A1



**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## COMBINED CARTRIDGE FOR ELECTRONIC VAPING DEVICE

Example embodiments relate to electronic vaping or e-vaping devices, and cartridges for e-vaping devices.

5 E-vaping devices, also referred to herein as electronic vaping devices (EVDs) may be used by adult vapers for portable vaping. An e-vaping device may vaporize a pre-vapor formulation to form a vapor. The e-vaping device may include a reservoir that holds a pre-vapor formulation and a heater that vaporizes the pre-vapor formulation.

10 In some cases, an e-vaping device may include multiple pre-vapor formulations. However, in some cases the separate pre-vapor formulations may react with each other when held in a reservoir of an e-vaping device. Such reactions may result in the degradation of one or more of the pre-vapor formulations, formation of one or more reaction products, thereby reducing a shelf-life of a portion of the e-vaping device.

15 In some cases, an individual pre-vapor formulation may include multiple elements that may react with each other, resulting in a degradation of the individual pre-vapor formulation and thereby reducing a shelf-life of a portion of an e-vaping device holding the individual pre-vapor formulation.

20 According to a first aspect of the present invention, a cartridge for an e-vaping device may include a housing, a plurality of reservoirs positioned within the housing, a dispensing interface coupled to the plurality of reservoirs, and a heater coupled to the dispensing interface. The plurality of reservoirs may be configured to hold different pre-vapor formulations. The dispensing interface may be configured to draw the different pre-vapor formulations from the plurality of reservoirs. The heater may be configured to simultaneously vaporize the different pre-vapor formulations to form a vapor.

25 In some example embodiments, the dispensing interface may include a trunk and a plurality of separate roots, the separate roots extending from the trunk into separate, respective reservoirs of the plurality of reservoirs. The heater may be coupled to the trunk.

30 In some example embodiments, the trunk may include separate portions coupled to separate roots such that the portions are configured to hold different pre-vapor formulations drawn from separate roots. The heater may be configured to heat the separate portions of the trunk at different rates simultaneously.

In some example embodiments, the heater may include a plurality of heating elements, each separate heating element being coupled to a separate portion of the trunk, each separate heating element being configured to generate a different magnitude of heat.

35 In some example embodiments, the cartridge may include a constrictor coupled to at least one root of the dispensing interface. The constrictor may be configured to adjustably control a

rate of transport at which the at least one root draws at least one pre-vapor formulation based on adjustably constricting at least a portion of the at least one root.

In some example embodiments, the separate roots may include different porosities.

5 In some example embodiments, the different pre-vapor formulations may include different viscosities at a common temperature.

In some example embodiments, the dispensing interface may be configured to simultaneously draw the different pre-vapor formulations to the trunk at a common rate of transport.

10 In some example embodiments, the dispensing interface may include a plurality of wicks coupled together to form the trunk, and separate wicks of the plurality of wicks include separate roots of the plurality of separate roots.

In some example embodiments, the separate wicks may include different wicking materials.

15 In some example embodiments, the cartridge may include a divider assembly partitioning at least two separate wicks of the plurality of wicks. The divider assembly may be configured to mitigate pre-vaporization mixing of separate pre-vapor formulations drawn to the trunk via the at least two separate wicks.

In some example embodiments, the housing may include first and second ends and the trunk may be positioned proximate to the first end.

20 According to a second aspect of the present invention, an e-vaping device may include a cartridge and a power supply section. The cartridge may include a housing, a plurality of reservoirs positioned within the housing, a dispensing interface coupled to the plurality of reservoirs, and a heater coupled to the dispensing interface. The plurality of reservoirs may be configured to hold different pre-vapor formulations. The dispensing interface may be configured to draw the different pre-vapor formulations from the plurality of reservoirs. The heater may be operable to simultaneously vaporize the different pre-vapor formulations to form a vapor. The power supply section may be configured to selectively supply power to the heater.

25 The cartridge may be a cartridge according to the first aspect of the present invention in accordance with any of the embodiments described herein.

30 In some example embodiments, the dispensing interface may be configured to simultaneously draw the different pre-vapor formulations at a common rate of transport.

In some example embodiments, the dispensing interface may be configured to draw at least one pre-vapor formulation at an adjustable rate of transport.

35 In some example embodiments, the dispensing interface includes a trunk and a plurality of separate roots, the separate roots extending from the trunk into separate, respective reservoirs of the plurality of reservoirs; and the heater may be coupled to the trunk.

In some example embodiments, the dispensing interface may include a plurality of wicks coupled together, the plurality of wicks including separate roots of the plurality of separate roots.

In some example embodiments, the housing may include first and second ends, the first end is distal from a housing opening, and the second end may be proximate to the housing opening. The dispensing interface may be positioned proximate to the first end of the housing.

In some example embodiments, the power supply section may include a rechargeable battery, the power supply section being removably coupled to the cartridge.

According to a third aspect of the present invention, a method includes configuring a cartridge to vaporize different pre-vapor formulations simultaneously within a housing of the cartridge, the cartridge being for use in an e-vaping device. The configuring may include coupling a dispensing interface to a plurality of reservoirs within the housing, the plurality of reservoirs configured to hold different pre-vapor formulations, the dispensing interface configured to draw the different pre-vapor formulations from the plurality of reservoirs. The coupling may include coupling a heater to the dispensing interface, such that the heater is operable to simultaneously vaporize the different pre-vapor formulations drawn from the plurality of reservoirs.

The cartridge configured by the method according to the present invention may be a cartridge according to the first aspect of the present invention in accordance with any of the embodiments described herein.

In some example embodiments, the different pre-vapor formulations include different viscosities at a common temperature.

In some example embodiments, the dispensing interface may include a trunk and a plurality of separate roots, the separate roots extending from the trunk into separate, respective reservoirs of the plurality of reservoirs. Coupling the heater to the dispensing interface may include coupling the heater to the trunk.

In some example embodiments, the method may include fabricating the dispensing interface prior to coupling the dispensing interface to the plurality of reservoirs, the fabricating including coupling a plurality of separate wicks together to establish the trunk.

In some example embodiments, coupling the plurality of separate wicks together to establish the trunk may include inserting a heater divider assembly between at least two separate wicks of the plurality of separate wicks to configure the dispensing interface to mitigate pre-vaporization mixing of separate pre-vapor formulations.

The various features and advantages of the non-limiting embodiments herein become more apparent upon review of the detailed description in conjunction with the accompanying drawings. The accompanying drawings are merely provided for illustrative purposes and should not be interpreted to limit the scope of the claims. The accompanying drawings are not to be

considered as drawn to scale unless explicitly noted. For purposes of clarity, various dimensions of the drawings may have been exaggerated.

FIG. 1A is a side view of an e-vaping device according to some example embodiments.

FIG. 1B is a cross-sectional view along line IB – IB' of the e-vaping device of FIG. 1A.

5 FIG. 1C is a cross-sectional view along line IB – IB' of the e-vaping device of FIG. 1A.

FIG. 2A is a dispensing interface according to some example embodiments.

FIG. 2B is a dispensing interface according to some example embodiments.

FIG. 3 is a flowchart illustrating a method for configuring an e-vaping device to provide a combined vapor, according to some embodiments.

10 FIG. 4 is a flowchart illustrating a method for configuring a cartridge, according to some example embodiments.

Some detailed example embodiments are disclosed herein. However, specific structural and functional details disclosed herein are merely representative for purposes of describing example embodiments. Example embodiments may, however, be embodied in many alternate forms and should not be construed as limited to only the example embodiments set forth herein.

15 Accordingly, while example embodiments are capable of various modifications and alternative forms, example embodiments thereof are shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that there is no intent to limit example embodiments to the particular forms disclosed, but to the contrary, example embodiments are to cover all modifications, equivalents, and alternatives falling within the scope of example embodiments. Like numbers refer to like elements throughout the description of the figures.

20 It should be understood that when an element or layer is referred to as being "on," "connected to," "coupled to," or "covering" another element or layer, it may be directly on, connected to, coupled to, or covering the other element or layer or intervening elements or layers may be present. In contrast, when an element is referred to as being "directly on," "directly connected to," or "directly coupled to" another element or layer, there are no intervening elements or layers present. Like numbers refer to like elements throughout the specification.

25 It should be understood that, although the terms first, second, third, and so forth may be used herein to describe various elements, regions, layers or sections, these elements, regions, layers, or sections should not be limited by these terms. These terms are only used to distinguish one element, region, layer, or section from another element, region, layer, or section. Therefore, a first element, region, layer, or section discussed below could be termed a second element, region, layer, or section without departing from the teachings of example 30 embodiments.

35

Spatially relative terms (for example, "beneath," "below," "lower," "above," "upper," and the like) may be used herein for ease of description to describe one element or feature's relationship to another element or feature as illustrated in the figures. It should be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Therefore, the term "below" may encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

The terminology used herein is for the purpose of describing various example embodiments only and is not intended to be limiting of example embodiments. As used herein, the singular forms "a," "an," and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "includes," "including," "comprises," and "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, or elements, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, or groups thereof.

Example embodiments are described herein with reference to cross-sectional illustrations that are schematic illustrations of idealized embodiments (and intermediate structures) of example embodiments. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques or tolerances, are to be expected. Therefore, example embodiments should not be construed as limited to the shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which example embodiments belong. It will be further understood that terms, including those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

FIG. 1A is a side view of an e-vaping device 60 according to some example embodiments. FIG. 1B is a cross-sectional view along line IB – IB' of the e-vaping device of FIG. 1A according to some example embodiments. FIG. 1C is a cross-sectional view along line IB – IB' of the e-vaping device of FIG. 1A according to some example embodiments. The e-vaping device 60 may include one or more of the features set forth in U.S. Patent Application Publication No. 2013/0192623 to Tucker et al. filed January 31, 2013 and U.S. Patent Application Publication No. 2013/0192619 to Tucker et al. filed January 14, 2013, the entire contents of which are

incorporated herein by reference thereto. As used herein, the term “e-vaping device” is inclusive of all types of electronic vaping devices, regardless of form, size or shape.

Referring to FIG. 1A, FIG. 1B, and FIG. 1C, an e-vaping device 60 includes a replaceable cartridge (or first section) 70 and a reusable power supply section (or second section) 72. The 5 first and second sections 70, 72 may be removably coupled together at complimentary interfaces 74, 84 of the respective sections 70, 72.

In some example embodiments, the interfaces 74, 84 are threaded connectors. However, it should be appreciated that each interface 74, 84 may be any type of connector, including a snug-fit, detent, clamp, bayonet, clasp and combinations thereof. One or more of the interfaces 10 74, 84 may include a cathode connector, anode connector, some combination thereof, and so forth to electrically couple one or more elements of the cartridge 70 to one or more power supplies 12 in the power supply section 72 when the interfaces 74, 84 are coupled together.

As shown in FIG. 1A, FIG. 1B, and FIG. 1C, in some example embodiments, an outlet end insert 20 is positioned at an outlet end of the cartridge 70. The outlet end insert 20 includes at 15 least one outlet port 21 that may be located off-axis from the longitudinal axis of the e-vaping device 60. One or more of the outlet ports 21 may be angled outwardly in relation to the longitudinal axis of the e-vaping device 60. Multiple outlet ports 21 may be uniformly or substantially uniformly distributed about the perimeter of the outlet end insert 20 so as to substantially uniformly distribute vapor drawn through the outlet end insert 20 during vaping. 20 Therefore, as a vapor is drawn through the outlet end insert 20, the vapor may move in different directions.

The cartridge 70 includes an outer housing 16 extending in a longitudinal direction and an inner tube 62 coaxially positioned within the outer housing 16. The power supply section 72 includes an outer housing 17 extending in a longitudinal direction. In some example 25 embodiments, the outer housing 16 may be a single tube housing both the cartridge 70 and the power supply section 72 and the entire e-vaping device 60 may be disposable. The outer housings 16, 17 may each have a generally cylindrical cross-section. In some example embodiments, the outer housings 16, 17 may each have a generally triangular cross-section along one or more of the cartridge 70 and the power supply section 72. In some example 30 embodiments, the outer housing 17 may have a greater circumference or dimensions at a tip end than a circumference or dimensions of the outer housing 16 at an outlet end of the e-vaping device 60.

At one end of the inner tube 62, a nose portion of a gasket (or seal) 18 is fitted into an end portion of the inner tube 62. An outer perimeter of the gasket 18 provides at least a partial seal 35 with an interior surface of the outer housing 16. In some example embodiments, the gasket 18 includes conduits extending through the gasket 18 between the housing 16 and the inner tube 62. The exterior of the inner tube 62 and the outer housing 16 at least partially define an

annular channel 61. One or more conduits through an annular portion of the gasket 18 may assure communication between the annular channel 61 and a space 65 defined between the gasket 18 and a connector element 91. The connector element 91 may be included in the interface 74.

5 In some example embodiments, a nose portion of another gasket 15 is fitted into another end portion of the inner tube 62. In some example embodiments, the gasket 15 includes conduits extending through the gasket 15 between the housing 16 and the inner tube 62. One or more conduits through an annular portion of the gasket 15 may assure communication between the annular channel 61 and an interior 67 of the outlet end insert 20.

10 In some example embodiments, at least one air inlet port 44 is formed in the outer housing 16, adjacent to the interface 74 to minimize the chance of an adult vaper's fingers occluding one of the ports and to control the resistance-to-draw (RTD) during vaping. In some example embodiments, the air inlet ports 44 may be machined into the outer housing 16 with precision tooling such that their diameters are closely controlled and replicated from one e-15 vaping device 60 to the next during manufacture.

In a further example embodiment, the air inlet ports 44 may be drilled with carbide drill bits or other high-precision tools or techniques. In yet a further example embodiment, the outer housing 16 may be formed of metal or metal alloys such that the size and shape of the air inlet ports 44 may not be altered during manufacturing operations, packaging, and vaping. 20 Therefore, the air inlet ports 44 may provide consistent RTD. In yet a further example embodiment, the air inlet ports 44 may be sized and configured such that the e-vaping device 60 has a RTD in the range of from about 60 millimetres of water to about 150 millimetres of water.

25 Referring to FIG. 1A, FIG. 1B, and FIG. 1C, the cartridge 70 includes a set of separate reservoirs 22-1 to 22-N. "N" may be an integer equal to 2 or greater. The space defined between the gaskets 18 and 15 and the inner tube 62 may establish the confines of the reservoirs 22-1 to 22-N. The space may be partitioned by one or more dividers 23 into multiple separate reservoirs 22-1 to 22-N. The separate reservoirs 22-1 to 22-N may be separate and unconnected reservoirs 22-1 to 22-N.

30 In some example embodiments, the separate reservoirs 22-1 to 22-N are configured to hold separate pre-vapor formulations. The separate pre-vapor formulations may be different pre-vapor formulations. For example, the separate reservoirs 22-1 to 22-N may include different sets of storage media, where the different sets of storage media are configured to hold different pre-vapor formulations.

35 The cartridge 70 includes a dispensing interface 30 coupled to the separate reservoirs 22-1 to 22-N. The dispensing interface 30 is configured to draw separate pre-vapor formulations from the separate reservoirs 22-1 to 22-N.

In some example embodiments, the dispensing interface 30 may include a trunk and multiple roots extending from the trunk. The roots may be separately coupled to separate reservoirs 22-1 to 22-N, such that the separate roots extend into the separate reservoirs. For example, as shown in FIG. 1B and FIG 1C, the dispensing interface 30 includes a trunk 34 and separate roots 32-1 to 32-N extending from the trunk 34 into separate reservoirs 22-1 to 22-N. The dispensing interface 30 may draw the pre-vapor formulations from the separate reservoirs 22-1 to 22-N into the trunk 34 via the separate roots 32-1 to 32-N.

In some example embodiments, dispensing interface 30 includes at least one of a ceramic material extending into one or more reservoirs 22-1 to 22-N, a dispensing interface that includes 10 a porous material extending into one or more reservoirs 22-1 to 22-N, some combination thereof, and so forth.

The cartridge 70 includes a heater 24 that is coupled to the dispensing interface 30. The heater 24 may heat the separate pre-vapor formulations drawn by the dispensing interface 30 to simultaneously vaporize the separate pre-vapor formulations. As shown in the example 15 embodiments illustrated in FIG. 1B and FIG. 1C, the heater 24 may be coupled to the dispensing interface 30 at the trunk 34 and may simultaneously vaporize the different pre-vapor formulations drawn to the trunk 34 via the roots 32-1 to 32-N, thereby forming a combined vapor from the different pre-vapor formulations.

In the example embodiment illustrated in FIG. 1B, the heater 24 extends transversely 20 across the interior 67 of the outlet end insert 20. In the example embodiment illustrated in FIG. 1C, the heater 24 extends transversely across the space 65. In some example embodiments, the heater 24 may extend parallel to a longitudinal axis of the annular channel 61.

In some example embodiments, the dispensing interface 30 includes an absorbent material. The absorbent material may be arranged in fluidic communication with the heater 24. 25 The absorbent material may include a wick having an elongated form and arranged in fluidic communication with at least one reservoir of the plurality of reservoirs.

In some example embodiments, the dispensing interface 30 includes a porous material. For example, the dispensing interface 30 may include at least one ceramic rod configured to 30 direct pre-vapor formulation from at least one of the reservoirs 22-1 to 22-N through an interior of the at least one ceramic rod. In another example, the dispensing interface 30 may include at least one wick material, that is configured to direct pre-vapor formulation through an interior of the at least one wick material. A wick material may be a flexible wick material.

In some example embodiments, the dispensing interface 30 includes a nonporous material. For example, the dispensing interface 30 may include a channel apparatus that 35 includes a conduit, where the channel apparatus is configured to direct a pre-vapor formulation from a reservoir 22-1 to 22-N through the conduit. In another example, the dispensing interface 30 may include a drip action apparatus. In another example, the dispensing interface 30 may

include a valve configured to direct pre-vapor formulation from at least one of the reservoirs 22-1 to 22-N based on actuation of the valve.

In some example embodiments, the dispensing interface 30 is configured to draw different pre-vapor formulations from the separate reservoirs 22-1 to 22-N to a common location where the pre-vapor formulations may be simultaneously vaporized by a heater 24. The dispensing interface 30 may include multiple roots 32-1 to 32-N extending from a common trunk 34 into separate reservoirs 22-1 to 22-N. Each root 32-1 to 32-N may draw a different pre-vapor formulation from a separate reservoir to the trunk 34.

During vaping, different pre-vapor formulations held in the separate reservoirs 22-1 to 22-N may be transferred from at least one of the reservoirs 22-1 to 22-N and storage medium to the trunk 34 via capillary action of the separate roots 32-1 to 32-N extending into the separate reservoirs 22-1 to 22-N. The heater 24 may at least partially surround a portion of the trunk 34 such that when the heater 24 is activated, the different pre-vapor formulations drawn to the trunk 34 from the separate reservoirs 22-1 to 22-N are simultaneously vaporized by the heater 24 to form a combined vapor. In some example embodiments, including the example embodiments illustrated in FIG. 1B and FIG. 1C, the heater 24 completely surrounds the trunk 34.

Such a combined vapor, formed via simultaneous vaporization of different pre-vapor formulations at the trunk 34, may provide a combined vapor, where the combined vapor includes different vaporized pre-vapor formulations without mixing the pre-vapor formulations prior to forming the vapor. Therefore, a probability of chemical reactions between the pre-vapor formulations prior to forming the vapor may be mitigated. Mitigation of a probability of such chemical reactions may enhance a sensory experience provided by the e-vaping device to an adult vaper during vaping. Mitigation of a probability of such chemical reactions may increase one or more of stability of one or more pre-vapor formulations and shelf life of the one or more pre-vapor formulations.

In some example embodiments, the dispensing interface 30 is configured to draw different pre-vapor formulations from the separate reservoirs 22-1 to 22-N to the trunk 34 at a common rate of transport, such that the different pre-vapor formulations drawn from the reservoirs 22-1 to 22-N arrive at a common location in the dispensing interface 30 simultaneously. In some example embodiments, the dispensing interface 30 is configured to draw different pre-vapor formulations from the separate reservoirs 22-1 to 22-N to the trunk 34 at different respective rates of transport.

In some example embodiments, the separate roots 32-1 to 32-N have different properties that enable the separate roots 32-1 to 32-N to be configured to draw different pre-vapor formulations at a common rate of transport, where the different pre-vapor formulations have different properties. For example, the separate roots 32-1 to 32-N may have different porosities,

so that the separate roots 32-1 to 32-N are configured to transport different pre-vapor formulations having different viscosities at a common rate of transport. In some example embodiments, the separate roots 32-1 to 32-N are configured to draw different pre-vapor formulations at different respective rates of transport. In another example, the separate roots 5 32-1 to 32-N may include separate wicking materials. The separate wicking materials may be different wicking materials.

In some example embodiments, a dispensing interface 30 includes a constrictor 92 coupled to at least one of the roots 32-1 to 32-N, where the constrictor 92 is configured to controllably adjust the rate of transport at which the at least one of the roots 32-1 to 32-N draws 10 one or more pre-vapor formulations. The constrictor 92 may be configured to controllably adjust the rate of transport at which the at least one of the roots 32-1 to 32-N draws one or more pre-vapor formulations based on adjustably constricting the at least one of the roots 32-1 to 32-N. In some example embodiments, the constrictor 92 may controllably adjust the rate of transport 15 at which the at least one of the roots 32-1 to 32-N draws one or more pre-vapor formulations based on adjusting a porosity of at least one of the roots 32-1 to 32-N. Adjusting the porosity of a root may include adjusting a diameter of the root. For example, the constrictor 92 may adjustably constrict a diameter of at least one of the roots 32-1 to 32-N to adjustably control a rate at which the at least one of the roots 32-1 to 32-N transports one or more pre-vapor 20 formulations. The constrictor 92 may be configured to be controllably adjusted by one or more of an adult vaper, control circuitry 11, some combination thereof, or the like.

For example, in the example embodiments illustrated in FIG. 1B and FIG. 1C, one or more constrictors 92 extend from root 32-N to an exterior of the outer housing 16, such that the constrictor 92 is configured to be controlled by an adult vaper to adjustably control the constriction of the root 32-N. In some example embodiments, an e-vaping device 60 may 25 include a constrictor 92 coupled with a root 32-N within a reservoir 22-N, in one of the space 65 and interior 67 outside of the reservoir 22-N, or some combination thereof. Adjustable control of the rate of transport at which at least one of the roots 32-1 to 32-N draws a pre-vapor formulation enables control of one or more of flavor intensity of a vapor provided by the e-vaping device 60, a quality of the vapor provided by the e-vaping device 60, some combination 30 thereof, and so forth.

In some example embodiments, as discussed further below, the dispensing interface 30 includes multiple separate wicks, where the wicks are coupled together to form the trunk 34 and the separate wicks extend from the trunk 34 into separate reservoirs 22-1 to 22-N as separate roots 32-1 to 32-N. Separate wicks may include separate materials, such that the separate 35 wicks are configured to draw different pre-vapor formulations at a common rate of transport to the trunk 34. In some example embodiments, the separate wicks are configured to draw different pre-vapor formulations at different respective rates of transport to the trunk 34.

In some example embodiments, the cartridge 70 includes first and second ends. The first and second ends may be opposite ends of the cartridge 70. The dispensing interface 30 may be coupled to the separate reservoirs proximate to a particular end of first and second ends, such that the dispensing interface 30 is positioned proximate to the particular end. The dispensing interface 30 may draw different pre-vapor formulations from the different reservoirs 22-1 to 22-N towards the particular end. The heater 24 may vaporize the different pre-vapor formulations at a location that is closer to the particular end of the cartridge 70 than an opposite end of the first section. As described further below, the first and second ends of the first section are referred to as an outlet end proximate to the outlet end insert 20 and a tip end proximate to the interface 74. However, it will be understood that the first and second ends may refer to any set of opposite ends in any order or arrangement.

For example, as shown in FIG. 1B, the dispensing interface 30 may be coupled to the reservoirs 22-1 to 22-N at respective ends of the reservoirs 22-1 to 22-N proximate to the outlet end (first end) of the cartridge 70. The dispensing interface 30 extends from the reservoirs 22-1 to 22-N into the interior 67 of the outlet end insert, and the heater 24 is coupled to the trunk 34 in the interior 67. Electrical leads 26-1, 26-2 extend between the heater 24 and respective ones of the connector element 91 and interface 74 to electrically couple the heater 24 to the power supply 12 when interfaces 74, 84 are coupled together. Air entering the cartridge 70 through air inlet ports 44 may pass to the interior 67 via the annular channel 61. Air entering the interior 67 from the channel 61 may draw vapors formed at the trunk 34 to the outlet ports 21 of the outlet end insert.

In another example, as shown in FIG. 1C, the dispensing interface 30 may be coupled to the reservoirs 22-1 to 22-N at respective ends of the reservoirs 22-1 to 22-N proximate to the tip end (second end) of the cartridge 70. The dispensing interface 30 extends from the reservoirs 22-1 to 22-N into the space 65 between the gasket 18 and the connector element 91, and the heater 24 is coupled to the trunk 34 in the space 65. Electrical leads 26-1, 26-2 extend between the heater 24 and respective ones of the connector element 91 and the interface 74 through the space 65 to electrically couple the heater 24 to the power supply 12 when interfaces 74, 84 are coupled together. Air entering the cartridge 70 through air inlet ports 44 may draw vapors formed at the trunk 34 to the outlet ports 21 of the outlet end insert via the channel 61 and the interior 67.

In some example embodiments, the vapor exiting the e-vaping device via the outlet end insert 20 may be cooler or warmer based on the end of the cartridge 70 to which the dispensing interface 30 is more closely positioned. For example, vapors formed in the space 65 proximate to the tip end of the cartridge 70, as shown in FIG. 1C, may be cooler than vapors formed in the interior 67 proximate to the outlet end of the first section, as shown in FIG. 1B. Vapors passing through the annular channel 61 to the interior may cool prior to reaching the outlet ports 21,

while vapors formed in the interior 67 may not cool as much. A vapor provided to an adult vaper may provide a different sensory experience based on the temperature of the vapor. As a result, the e-vaping device 60 may provide the adult vaper with a unique sensory experience based on the configuration of the dispensing interface 30 in the cartridge 70.

5 Still referring to FIG. 1A, FIG. 1B, and FIG. 1C, the cartridge 70 includes a connector element 91 configured to at least partially establish electrical connections between elements in the cartridge 70 with one or more elements in the power supply section 72. In some example embodiments, the connector element 91 includes an electrode element configured to electrically couple at least one electrical lead to the power supply 12 in the power supply section when 10 interfaces 74, 84 are coupled together. In the example embodiments illustrated in FIG. 1A, FIG. 1B, and FIG. 1C, for example, electrical lead 26-1 is coupled to connector element 91. An electrode element may be one or more of a cathode connector element and an anode connector element. When interfaces 74, 84 are coupled together, the connector element 91 may be coupled with at least one portion of the power supply 12, as shown in FIG. 1B and FIG. 15 1C.

In some example embodiments, one or more of the interfaces 74, 84 include one or more of a cathode connector element and an anode connector element. In the example embodiments illustrated in FIG. 1B and FIG. 1C, for example, electrical lead 26-2 is coupled to the interface 74. As further shown in FIG. 1B and FIG. 1C, the power supply section 72 includes a lead 98 that couples the control circuitry 11 to the interface 84. When interfaces 74, 20 84 are coupled together, the coupled interfaces 74, 84 may electrically couple leads 26-2 and 98 together.

When an element in the cartridge 70 is coupled to both leads 26-1 and 26-2, an electrical circuit through the cartridge 70 and power supply section 72 may be established. The 25 established electrical circuit may include at least the element in the cartridge 70, control circuitry 11, and the power supply 12. The electrical circuit may include leads 26-1 and 26-2, lead 98, and interfaces 74, 84.

In the example embodiments illustrated in FIG. 1A, FIG. 1B, and FIG. 1C, heater 24 is coupled to interface 74 and connector element 91, such that the heater 24 may be electrically coupled to the power supply 12 via interface 74 and connector element 91 when interfaces 74, 30 84 are coupled together.

The control circuitry 11, described further below, is configured to be coupled to the power supply 12, such that the control circuitry 11 may control the supply of electrical power from the power supply 12 to one or more elements of the cartridge 70. The control circuitry 11 may 35 control the supply of electrical power to the element based on controlling the established electrical circuit. For example, the control circuitry 11 may selectively open or close the electrical circuit, adjustably control an electrical current through the circuit, and so forth.

Still referring to FIG. 1A, FIG. 1B, and FIG. 1C, the power supply section 72 includes a sensor 13 responsive to air drawn into the power supply section 72 via an air inlet port 44a adjacent to a free end or tip end of the e-vaping device 60, a power supply 12, and control circuitry 11. The power supply 12 may include a rechargeable battery. The sensor 13 may be 5 one or more of a pressure sensor, a microelectromechanical system (MEMS) sensor, and so forth.

In some example embodiments, the power supply 12 includes a battery arranged in the e-vaping device 60 such that the anode is downstream of the cathode. A connector element 91 contacts the downstream end of the battery. The heater 24 is connected to the battery by two 10 spaced apart electrical leads 26-1, 26-2 coupled to respective ones of a connector element 91 and interface 74.

The power supply 12 may be a Lithium-ion battery or one of its variants, for example a Lithium-ion polymer battery. Alternatively, the power supply 12 may be a nickel-metal hydride battery, a nickel cadmium battery, a lithium-manganese battery, a lithium-cobalt battery or a fuel 15 cell. The e-vaping device 60 may be usable by an adult vaper until the energy in the power supply 12 is depleted or in the case of lithium polymer battery, a minimum voltage cut-off level is achieved.

Further, the power supply 12 may be rechargeable and may include circuitry configured to allow the battery to be chargeable by an external charging device. To recharge the e-vaping 20 device 60, a Universal Serial Bus (USB) charger or other suitable charger assembly may be used.

Upon completing the connection between the cartridge 70 and the power supply section 72, the at least one power supply 12 may be electrically connected with the heater 24 of the cartridge 70 upon actuation of the sensor 13. Air is drawn primarily into the cartridge 70 through 25 one or more air inlet ports 44. The one or more air inlet ports 44 may be located along the outer housing 16, 17 of the first and second sections 70, 72 or at one or more of the interfaces 74, 84.

The sensor 13 may be configured to sense an air pressure drop and initiate application of voltage from the power supply 12 to the heater 24. As shown in the example embodiments illustrated in FIG. 1B and FIG. 1C, some example embodiments of the power supply section 72 30 include a heater activation light 48 configured to glow when the heater 24 is activated. The heater activation light 48 may include a light emitting diode (LED). Moreover, the heater activation light 48 may be arranged to be visible to an adult vaper during vaping. In addition, the heater activation light 48 may be utilized for e-vaping system diagnostics or to indicate that recharging is in progress. The heater activation light 48 may also be configured such that the 35 adult vaper may activate, deactivate, or activate and deactivate the heater activation light 48 for privacy. As shown in FIG. 1A, FIG. 1B, and FIG. 1C the heater activation light 48 may be

located on the tip end of the e-vaping device 60. In some example embodiments, the heater activation light 48 may be located on a side portion of the outer housing 17.

In addition, the at least one air inlet port 44a may be located adjacent to the sensor 13, such that the sensor 13 may sense air flow indicative of vapor being drawn through the outlet end, and activate the power supply 12 and the heater activation light 48 to indicate that the heater 24 is working.

Further, the control circuitry 11 may control the supply of electrical power to the heater 24 responsive to the sensor 13. In one example embodiment, the control circuitry 11 may include a maximum, time-period limiter. In another example embodiment, the control circuitry 11 may include a manually operable switch for manually initiating vaping. The time-period of the electric current supply to the heater 24 may be pre-set (for example, prior to controlling the supply of electrical power to the heater 24) depending on the amount of pre-vapor formulation desired to be vaporized. In some example embodiments, the control circuitry 11 may control the supply of electrical power to the heater 24 as long as the sensor 13 detects a pressure drop.

To control the supply of electrical power to a heater 24, the control circuitry 11 may execute one or more instances of computer-executable program code. The control circuitry 11 may include a processor and a memory. The memory may be a computer-readable storage medium storing computer-executable code.

The control circuitry 11 may include processing circuitry including, but not limited to, a processor, Central Processing Unit (CPU), a controller, an arithmetic logic unit (ALU), a digital signal processor, a microcomputer, a field programmable gate array (FPGA), a System-on-Chip (SoC), a programmable logic unit, a microprocessor, or any other device capable of responding to and executing instructions in a defined manner. In some example embodiments, the control circuitry 11 may be at least one of an application-specific integrated circuit (ASIC) and an ASIC chip.

The control circuitry 11 may be configured as a special purpose machine by executing computer-readable program code stored on a storage device. The program code may include at least one of program or computer-readable instructions, software elements, software modules, data files, data structures, and the like, capable of being implemented by one or more hardware devices, such as one or more of the control circuitry mentioned above. Examples of program code include both machine code produced by a compiler and higher level program code that is executed using an interpreter.

The control circuitry 11 may include one or more storage devices. The one or more storage devices may be at least one of tangible or non-transitory computer-readable storage media, such as random access memory (RAM), read only memory (ROM), a permanent mass storage device (such as a disk drive), solid state (for example, NAND flash) device, and any other like data storage mechanism capable of storing and recording data. The one or more

storage devices may be configured to store computer programs, program code, instructions, or some combination thereof, for at least one of one or more operating systems and for implementing the example embodiments described herein. The computer programs, program code, instructions, or some combination thereof, may also be loaded from a separate computer readable storage medium into at least one of the one or more storage devices and the one or more computer processing devices using a drive mechanism. Such separate computer readable storage medium may include at least one of a USB flash drive, a memory stick, a Blu-ray/DVD/CD-ROM drive, a memory card, and other like computer readable storage media. The computer programs, program code, instructions, or some combination thereof, may be loaded into at least one of the one or more storage devices and the one or more computer processing devices from a remote data storage device via a network interface, rather than via a local computer readable storage medium. Additionally, the computer programs, program code, instructions, or some combination thereof, may be loaded into at least one of the one or more storage devices and the one or more processors from a remote computing system that is configured to transfer, distribute, or transfer and distribute the computer programs, program code, instructions, or some combination thereof, over a network. The remote computing system may transfer, distribute, or transfer and distribute the computer programs, program code, instructions, or some combination thereof, via at least one of a wired interface, an air interface, and any other like medium.

The control circuitry 11 may be a special purpose machine configured to execute the computer-executable code to control the supply of electrical power to the heater 24. Controlling the supply of electrical power to the heater 24 may be referred to herein interchangeably as activating the heater 24.

Still referring to FIG. 1A, FIG. 1B, and FIG. 1C, when the heater 24 is activated, the activated heater 24 may heat a portion of the coupled dispensing interface 30 for less than about 10 seconds. Therefore, the power cycle (or maximum vaping length) may range in period from about 2 seconds to about 10 seconds (for example, about 3 seconds to about 9 seconds, about 4 seconds to about 8 seconds or about 5 seconds to about 7 seconds). In some example embodiments, a portion of the dispensing interface 30 that is surrounded by the heater 24 is the trunk 34.

In some example embodiments, separate portions of the heater 24 may be configured to heat different portions 36-1 to 36-N of the trunk 34 at different rates. The different portions 36-1 to 36-N of the trunk 34 may be coupled to different roots 32-1 to 32-N. The different portions 36-1 to 36-N of the trunk 34 may hold different pre-vapor formulations drawn from different reservoirs 22-1 to 22-N through the different roots 32-1 to 32-N. The heater 24 may be configured to vaporize the different pre-vapor formulations held in the different portions 36-1 to

36-N of the trunk 34 at different rates simultaneously based on applying different magnitudes of heat to the different portions 36-1 to 36-N of the trunk 34 simultaneously.

In some example embodiments, the heater 24 may be configured to vaporize the different pre-vapor formulations at a common rate simultaneously, based on applying different magnitudes of heat to the different portions 36-1 to 36-N of the trunk 34 simultaneously. For example, different pre-vapor formulations drawn to different portions 36-1 to 36-N of the trunk 34 from different roots 32-1 to 32-N may have different properties, including at least one of different heat capacities and different heats of vaporization.

In some example embodiments, the heater 24 includes multiple separate heating elements coupled to separate portions 36-1 to 36-N of the trunk 34. The separate heating elements may be configured to apply different magnitudes of heat to the separate portions 36-1 to 36-N of the trunk 34 simultaneously. For example, the heater 24 may include multiple separate wire coils coupled to separate portions 36-1 to 36-N of the trunk 34. The separate wire coils may have one or more of different spacings, different materials, different electrical resistances, and so forth. The separate wire coils may be configured to provide different magnitudes of heat to the different portions 36-1 to 36-N of the trunk 34.

A pre-vapor formulation, as described herein, is a material or combination of materials that may be transformed into a vapor. For example, the pre-vapor formulation may be at least one of a liquid, solid or gel formulation including, but not limited to, water, beads, solvents, active ingredients, ethanol, plant extracts, natural or artificial flavors, pre-vapor formulations such as glycerin and propylene glycol, and combinations thereof. Different pre-vapor formulations may include different elements. Different pre-vapor formulations may have different properties. For example, different pre-vapor formulations may have different viscosities when the different pre-vapor formulations are at a common temperature. The pre-vapor formulation may include those described in U.S. Patent Application Publication No. 2015/0020823 to Lipowicz et al. filed July 16, 2014 and U.S. Patent Application Publication No. 2015/0313275 to Anderson et al. filed January 21, 2015, the entire contents of each of which is incorporated herein by reference thereto.

The pre-vapor formulation may include nicotine or may exclude nicotine. The pre-vapor formulation may include one or more tobacco flavors. The pre-vapor formulation may include one or more flavors that are separate from one or more tobacco flavors.

In some example embodiments, a pre-vapor formulation that includes nicotine may also include one or more acids. The one or more acids may be one or more of pyruvic acid, formic acid, oxalic acid, glycolic acid, acetic acid, isovaleric acid, valeric acid, propionic acid, octanoic acid, lactic acid, levulinic acid, sorbic acid, malic acid, tartaric acid, succinic acid, citric acid, benzoic acid, oleic acid, aconitic acid, butyric acid, cinnamic acid, decanoic acid, 3,7-dimethyl-6-octenoic acid, 1-glutamic acid, heptanoic acid, hexanoic acid, 3-hexenoic acid, trans-2-hexenoic

acid, isobutyric acid, lauric acid, 2-methylbutyric acid, 2-methylvaleric acid, myristic acid, nonanoic acid, palmitic acid, 4-penenoic acid, phenylacetic acid, 3-phenylpropionic acid, hydrochloric acid, phosphoric acid, sulfuric acid and combinations thereof.

At least one of the reservoirs 22-1 to 22-N may include a pre-vapor formulation, and 5 optionally a storage medium configured to store the pre-vapor formulation therein. The storage medium may include a winding of cotton gauze or other fibrous material about a portion of the cartridge 70.

The storage medium of one or more reservoirs 22-1 to 22-N may be a fibrous material including at least one of cotton, polyethylene, polyester, rayon and combinations thereof. The 10 fibers may have a diameter ranging in size from about 6 microns to about 15 microns (for example, about 8 microns to about 12 microns or about 9 microns to about 11 microns). The storage medium may be a sintered, porous or foamed material. Also, the fibers may be sized to be irrespirable and may have a cross-section that has a Y-shape, cross shape, clover shape or any other suitable shape. In some example embodiments, one or more reservoirs 22-1 to 22-N 15 may include a filled tank lacking any storage medium and containing only pre-vapor formulation.

At least one of the reservoirs 22-1 to 22-N may be sized and configured to hold enough pre-vapor formulation such that the e-vaping device 60 may be configured for vaping for at least about 200 seconds. The e-vaping device 60 may be configured to allow each vaping to last a maximum of about 5 seconds.

20 The dispensing interface 30 may include filaments (or threads) having a capacity to draw one or more pre-vapor formulations. For example, a dispensing interface 30 may be a bundle of glass (or ceramic) filaments, a bundle including a group of windings of glass filaments, and so forth, all of which arrangements may be capable of drawing pre-vapor formulation via capillary action by interstitial spacings between the filaments. The filaments may be generally aligned in 25 a direction perpendicular (transverse) to the longitudinal direction of the e-vaping device 60. In some example embodiments, the wick may include one to eight filament strands, each strand comprising a plurality of glass filaments twisted together. The end portions of the dispensing interface 30 may be flexible and foldable into the confines of one or more reservoirs 22-1 to 22-N. The filaments may have a cross-section that is generally cross-shaped, clover-shaped, Y- 30 shaped, or in any other suitable shape. In some example embodiments, the dispensing interface 30 includes multiple separate wicks coupled together. The coupled portions of the wicks may establish a trunk of a dispensing interface, and the non-coupled portions of the wicks extending away from the trunk may be one or more roots of a dispensing interface.

35 The dispensing interface 30 may include any suitable material or combination of materials, also referred to herein as wicking materials. Examples of suitable materials may be, but not limited to, glass, ceramic- or graphite-based materials. The dispensing interface 30 may have

any suitable capillarity drawing action to accommodate pre-vapor formulations having different physical properties such as density, viscosity, surface tension and vapor pressure.

In some example embodiments, the heater 24 may include a wire coil that at least partially surrounds the trunk 34 of at least one dispensing interface. The wire may be a metal wire. The 5 wire coil may extend fully or partially along the length of the trunk 34. The wire coil may further extend fully or partially around the circumference of the trunk 34. In some example embodiments, the wire coil may or may not be in contact with dispensing interface 30 to which the wire coil is coupled.

The heater 24 may be formed of any suitable electrically resistive materials. Examples of 10 suitable electrically resistive materials may include, but not limited to, titanium, zirconium, tantalum and metals from the platinum group. Examples of suitable metal alloys include, but not limited to, stainless steel, nickel, cobalt, chromium, aluminum-titanium-zirconium, hafnium, niobium, molybdenum, tantalum, tungsten, tin, gallium, manganese and iron-containing alloys, and super-alloys based on nickel, iron, cobalt, stainless steel. For example, the heater 24 may 15 be formed of nickel aluminide, a material with a layer of alumina on the surface, iron aluminide and other composite materials, the electrically resistive material may optionally be embedded in, encapsulated or coated with an insulating material or vice-versa, depending on the kinetics of energy transfer and the external physicochemical properties required. The heater 24 may include at least one material selected from the group including at least one of stainless steel, 20 copper, copper alloys, nickel-chromium alloys, super alloys and combinations thereof. In some example embodiments, the heater 24 may be formed of nickel-chromium alloys or iron-chromium alloys. In some example embodiments, the heater 24 may be a ceramic heater having an electrically resistive layer on an outside surface thereof.

The heater 24 may heat one or more pre-vapor formulations in the dispensing interface 30 by thermal conduction. Alternatively, heat from the heater 24 may be conducted to the one or 25 more pre-vapor formulations by a heat conductive element or the heater 24 may transfer heat to the incoming ambient air that is drawn through the e-vaping device 60 during vaping, which in turn heats the pre-vapor formulation by convection.

In some example embodiments, the cartridge 70 may be replaceable. In other words, 30 once the pre-vapor formulation of the cartridge 70 is depleted, only the cartridge 70 may be replaced. An alternate arrangement may include an example embodiment where the entire e-vaping device 60 may be disposed once one or more of the reservoirs 22-1 to 22-N are depleted.

In an example embodiment, the e-vaping device 60 may be about 80 millimetres to about 35 110 millimetres long and about 7 millimetres to about 8 millimetres in diameter. For example, in one example embodiment, the e-vaping device may be about 84 millimetres long and may have a diameter of about 7.8 millimetres.

FIG. 2A shows a dispensing interface 30 including a transverse divider according to some example embodiments. FIG. 2B shows a dispensing interface 30 including a parallel divider according to some example embodiments. The dispensing interfaces 30 shown in FIG. 2A and FIG. 2B may be included in any of the embodiments of dispensing interfaces 30 included herein, including the dispensing interfaces 30 shown in FIG. 1B and FIG. 1C.

In some example embodiments, a dispensing interface 30 includes multiple wicks coupled together to form a trunk. The dispensing interface 30 may include a divider partitioning separate wicks from direct contact with each other, so that different pre-vapor formulations drawn to the trunk via separate wicks are restricted from mixing prior to vaporization of the different pre-vapor formulations. As a result, a risk of chemical reactions between the pre-vapor formulations is mitigated.

In some example embodiments, the divider may extend transverse to the end surfaces of separate wicks at the trunk. Such a divider may be referred to herein as a transverse divider. As shown in FIG. 2A, a dispensing interface 30 includes separate wicks 42-1 to 42-N extending into separate reservoirs 22-1 to 22-N and are coupled at respective end surfaces to form the trunk 34 of the dispensing interface 30. As shown in FIG. 2A, a transverse divider 35A may interpose between the end surfaces of the wicks 42-1 to 42-N, so that the transverse divider 35A extends transverse to the wicks 42-1 to 42-N at the trunk 34 and mitigates mixing of different pre-vapor formulations drawn to the trunk 34 by the separate wicks 42-1 to 42-N. As further shown in FIG. 2A, a heater 24 may be wrapped around a portion of the trunk 34, so that the heater 24 is wrapped around the transverse divider 35A.

In the example embodiment illustrated in FIG. 2A, the heater 24 is a wire coil extending around the trunk 24 that includes portions of the separate wicks 42-1 to 42-N. The illustrated wire coil of heater 24 includes a spacing between each of adjacent windings of the coil around the trunk 34.

In some example embodiments, a heater 24 that includes a wire coil winding around the trunk 34 includes separate portions coupled to separate portions 36-1 to 36-N of the trunk 34 that are formed of separate wicks 42-1 to 42-N. The separate portions of the wire coil may have different spacings of the wire coil. The separate portions of the wire coil may be configured to provide different magnitudes of heating to the different portions 36-1 to 36-N of the trunk 34, based on the different spacings of the wire coil in the separate portions of the heater 24. When the different portions of the heater 24 are coupled to different wicks 42-1 to 42-N, the different portions of the heater 24 may vaporize different pre-vapor formulations in the different wicks 42-1 to 42-N at different rates.

In some example embodiments, the divider may extend parallel to the side surfaces of separate wicks at the trunk. Such a divider may be referred to herein as a parallel divider. As shown in FIG. 2B, a dispensing interface 30 includes separate wicks 42-1 to 42-N extending

into separate reservoirs 22-1 to 22-N and coupled at respective side surfaces to form the trunk 34. As shown in FIG. 2B, a parallel divider 35B may interpose between the side surfaces of the wicks 42-1 to 42-N, so that the parallel divider 35B extends in parallel to the wicks 42-1 to 42-N at the trunk 34 and mitigates mixing of different pre-vapor formulations drawn to the trunk 34 by the separate wicks 42-1 to 42-N. As further shown in FIG. 2B, a heater 24 may be wrapped around the trunk 34, so that the heater 24 is wrapped around the parallel divider 35B.

5 FIG. 3 is a flowchart illustrating a method for configuring an e-vaping device to provide a combined vapor, according to some embodiments. The configuring may be implemented with regard to any of the embodiments of e-vaping devices included herein. In some example 10 embodiments, one or more portions of the configuring are implemented by a configuror. The configuror may be one or more of a human operator, a machine, some combination thereof, and so forth. The machine may be a fabrication machine. The machine may be a special purpose machine configured to implement the configuring based on executing program code stored in a memory device.

15 Referring to FIG. 3, at 310, the configuror configures a cartridge (or first section) to provide a combined vapor based on simultaneous vaporization of different pre-vapor formulations at a common location within the cartridge. Such configuring is discussed in further detail below with regard to FIG. 4.

20 At 320, the configuror configures a power supply section (or second section) to provide electrical power. The configuring of the power supply section may include one or more of installing a power supply in the power supply section, charging a power supply in the power supply section, coupling a control circuitry to the power supply section, and so forth.

25 At 330, the configuror couples the cartridge and power supply section at complimentary interfaces, such that the power supply in the power supply section is electrically coupled to a heater included in the cartridge and may be operated to cause the heater to simultaneously heat different pre-vapor formulations drawn from separate reservoirs in the cartridge.

In some example embodiments, the cartridge may be replaced with a different cartridge, and the different cartridge may include a different set of pre-vapor formulations.

30 FIG. 4 is a flowchart illustrating a method for configuring a cartridge, according to some example embodiments. The configuring 310 may be implemented with regard to any of the embodiments of e-vaping devices included herein. Such configuring includes configuring elements of a cartridge as shown with regard to the cartridge 70 in FIG. 1A, FIG. 1B, and FIG. 1C. In some example embodiments, one or more portions of the configuring are implemented by a configuror. The configuror may be one or more of a human operator, a machine, some combination thereof, and so forth. The machine may be a fabrication machine. The machine may be a special purpose machine configured to implement the configuring based on executing program code stored in a memory device.

Referring to FIG. 4, at 410, the configuror provides multiple reservoirs within a housing of the cartridge. The reservoirs may be bounded by separate housings. The reservoirs may be provided via partitioning a portion of the housing.

At 420, the configuror couples a dispensing interface to the separate reservoirs in the housing of the cartridge. Coupling the dispensing interface to the reservoirs may include extending 430 separate roots of the dispensing interface into separate reservoirs via the portions of the cartridge. In some example embodiments, the dispensing interface is coupled to a gasket, where the gasket seals one end of the reservoirs, so that the separate roots extend into the separate reservoirs through an interior of the gasket.

At 440, the configuror couples a heater to the trunk of the dispensing interface. The heater may be coupled to a power supply section interface of the cartridge via one or more sets of electrical leads, so that the heater may receive electrical power from a power supply coupled to the power supply section interface.

While a number of example embodiments have been disclosed herein, it should be understood that other variations may be possible. Such variations are not to be regarded as a departure from the scope of the present disclosure, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

**Claims**

1. A cartridge for an e-vaping device, the cartridge comprising:
  - a housing;
  - 5 a plurality of reservoirs positioned within the housing, the plurality of reservoirs configured to hold different pre-vapor formulations;
    - a dispensing interface coupled to the plurality of reservoirs, the dispensing interface being configured to draw the different pre-vapor formulations from the plurality of reservoirs; and
    - 10 a heater coupled to the dispensing interface, the heater being configured to simultaneously vaporize the different pre-vapor formulations to form a vapor.
2. The cartridge of claim 1, wherein
  - the dispensing interface includes a trunk and a plurality of separate roots, the separate roots extending from the trunk into separate, respective reservoirs of the plurality of reservoirs;
  - 15 and
  - the heater is coupled to the trunk.
3. The cartridge of claim 2, wherein
  - the trunk includes separate portions coupled to separate roots such that the portions are configured to hold different pre-vapor formulations drawn from separate roots; and
  - 20 the heater is configured to heat the separate portions of the trunk at different rates simultaneously.
4. The cartridge of claim 3, wherein
  - 25 the heater includes a plurality of heating elements, each separate heating element being coupled to a separate portion of the trunk, each separate heating element being configured to generate a different magnitude of heat.
5. The cartridge of claim 2, 3 or 4, further comprising:
  - 30 a constrictor coupled to at least one root of the dispensing interface, the constrictor being configured to adjustably control a rate of transport at which the at least one root draws at least one pre-vapor formulation based on adjustably constricting at least a portion of the at least one root.
- 35 6. The cartridge of any of claims 2 to 5, wherein the separate roots include different porosities.

7. The cartridge of any of claims 2 to 6, wherein the different pre-vapor formulations include different viscosities at a common temperature.

8. The cartridge of claim 7, wherein the dispensing interface is configured to 5 simultaneously draw the different pre-vapor formulations to the trunk at a common rate of transport.

9. The cartridge of any of claims 2 to 8, wherein the dispensing interface includes a plurality of wicks coupled together to form the trunk, and separate wicks of the plurality of wicks 10 include separate roots of the plurality of separate roots.

10. The cartridge of claim 9, wherein the separate wicks include different wicking materials.

11. The cartridge of claim 9 or 10, further comprising:

15 a divider assembly partitioning at least two separate wicks of the plurality of wicks, the divider assembly being configured to mitigate pre-vaporization mixing of separate pre-vapor formulations drawn to the trunk via the at least two separate wicks.

12. The cartridge of any preceding claim, wherein 20 the housing includes first and second ends; and the trunk is positioned proximate to the first end.

13. An e-vaping device comprising: 25 a cartridge, including,

a housing; a plurality of reservoirs positioned within the housing, the plurality of reservoirs configured to hold different pre-vapor formulations;

a dispensing interface coupled to the plurality of reservoirs, the dispensing interface being configured to draw the different pre-vapor formulations from the plurality 30 of reservoirs; and

a heater coupled to the dispensing interface, the heater operable to simultaneously vaporize the different pre-vapor formulations to form a vapor; and a power supply section configured to selectively supply power to the heater.

35 14. The e-vaping device of claim 13, wherein the dispensing interface is configured to simultaneously draw the different pre-vapor formulations at a common rate of transport.

15. The e-vaping device of claim 13 or 14, wherein the dispensing interface is configured to draw at least one pre-vapor formulation at an adjustable rate of transport.

5 16. The e-vaping device of claim 13, 14 or 15, wherein the dispensing interface includes a trunk and a plurality of separate roots, the separate roots extending from the trunk into separate, respective reservoirs of the plurality of reservoirs; and

the heater is coupled to the trunk.

10 17. The e-vaping device of claim 16, wherein the dispensing interface includes a plurality of wicks coupled together, the plurality of wicks including separate roots of the plurality of separate roots.

15 18. The e-vaping device of any of claims 13 to 17, wherein the housing includes first and second ends, the first end is distal from a housing opening, the second end is proximate to the housing opening; and

the dispensing interface is positioned proximate to the first end of the housing.

20 19. The e-vaping device of any of claims 13 to 18, wherein the power supply section includes a rechargeable battery, the power supply section being removably coupled to the cartridge.

25 20. A method, comprising:

configuring a cartridge to vaporize different pre-vapor formulations simultaneously within a housing of the cartridge, the cartridge being for use in an e-vaping device, the configuring including,

coupling a dispensing interface to a plurality of reservoirs within the housing, the plurality of reservoirs configured to hold different pre-vapor formulations, the dispensing interface configured to draw the different pre-vapor formulations from the plurality of reservoirs; and

coupling a heater to the dispensing interface, such the heater is operable to simultaneously vaporize the different pre-vapor formulations drawn from the plurality of reservoirs.

30 35 21. The method of claim 20, wherein the different pre-vapor formulations include different viscosities at a common temperature.

22. The method of claim 20 or 21, wherein

the dispensing interface includes a trunk and a plurality of separate roots, the separate roots extending from the trunk into separate, respective reservoirs of the plurality of reservoirs;

5 and

coupling the heater to the dispensing interface includes coupling the heater to the trunk.


23. The method of claim 22, further comprising:

10 fabricating the dispensing interface prior to coupling the dispensing interface to the plurality of reservoirs, the fabricating including coupling a plurality of separate wicks together to establish the trunk.


15 24. The method of claim 23, wherein the coupling the plurality of separate wicks together to establish the trunk includes inserting a heater divider assembly between at least two separate wicks of the plurality of separate wicks to configure the dispensing interface to mitigate pre-vaporization mixing of separate pre-vapor formulations.

1/4


FIG. 1A

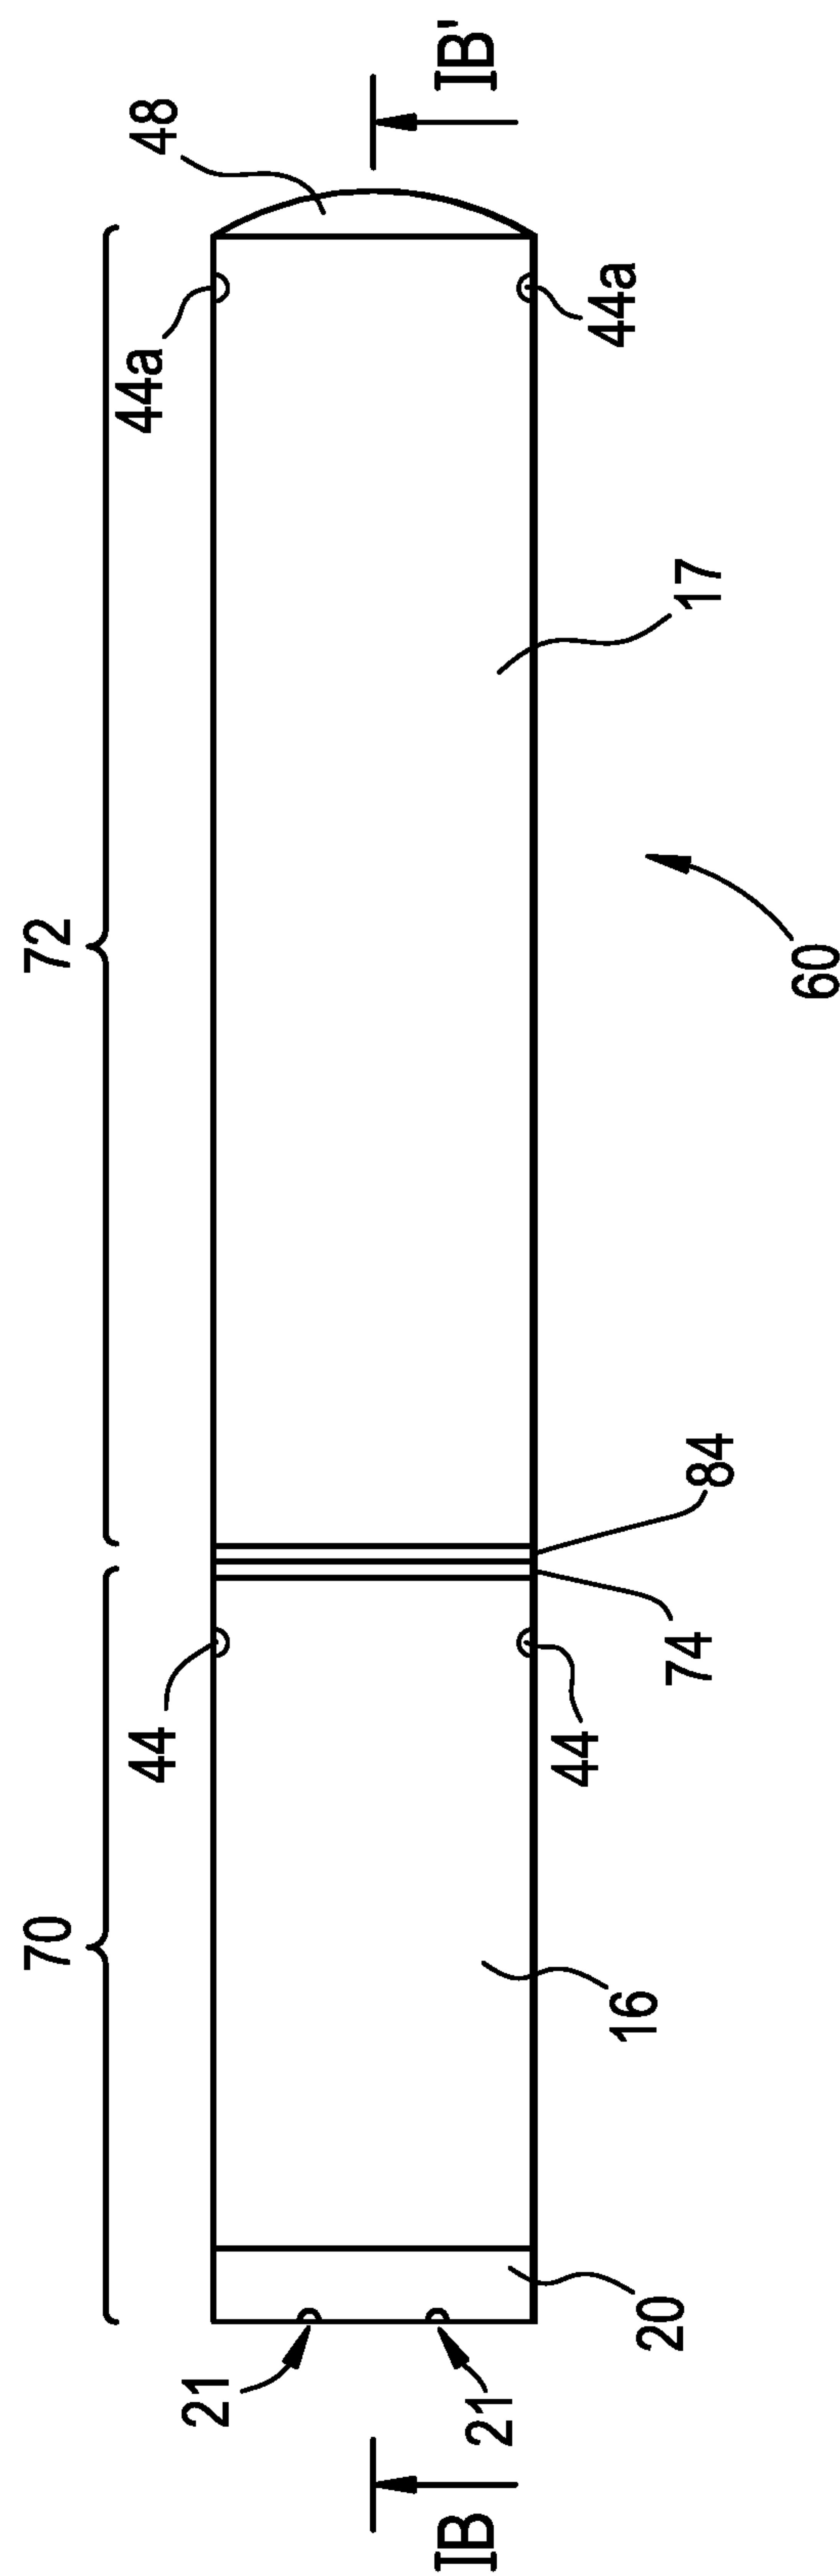

A decorative vertical element consisting of a central circular floral motif with a dot in the center, flanked by a stylized 'M' shape on the left and a stylized 'N' shape on the right, all rendered in black on a white background.

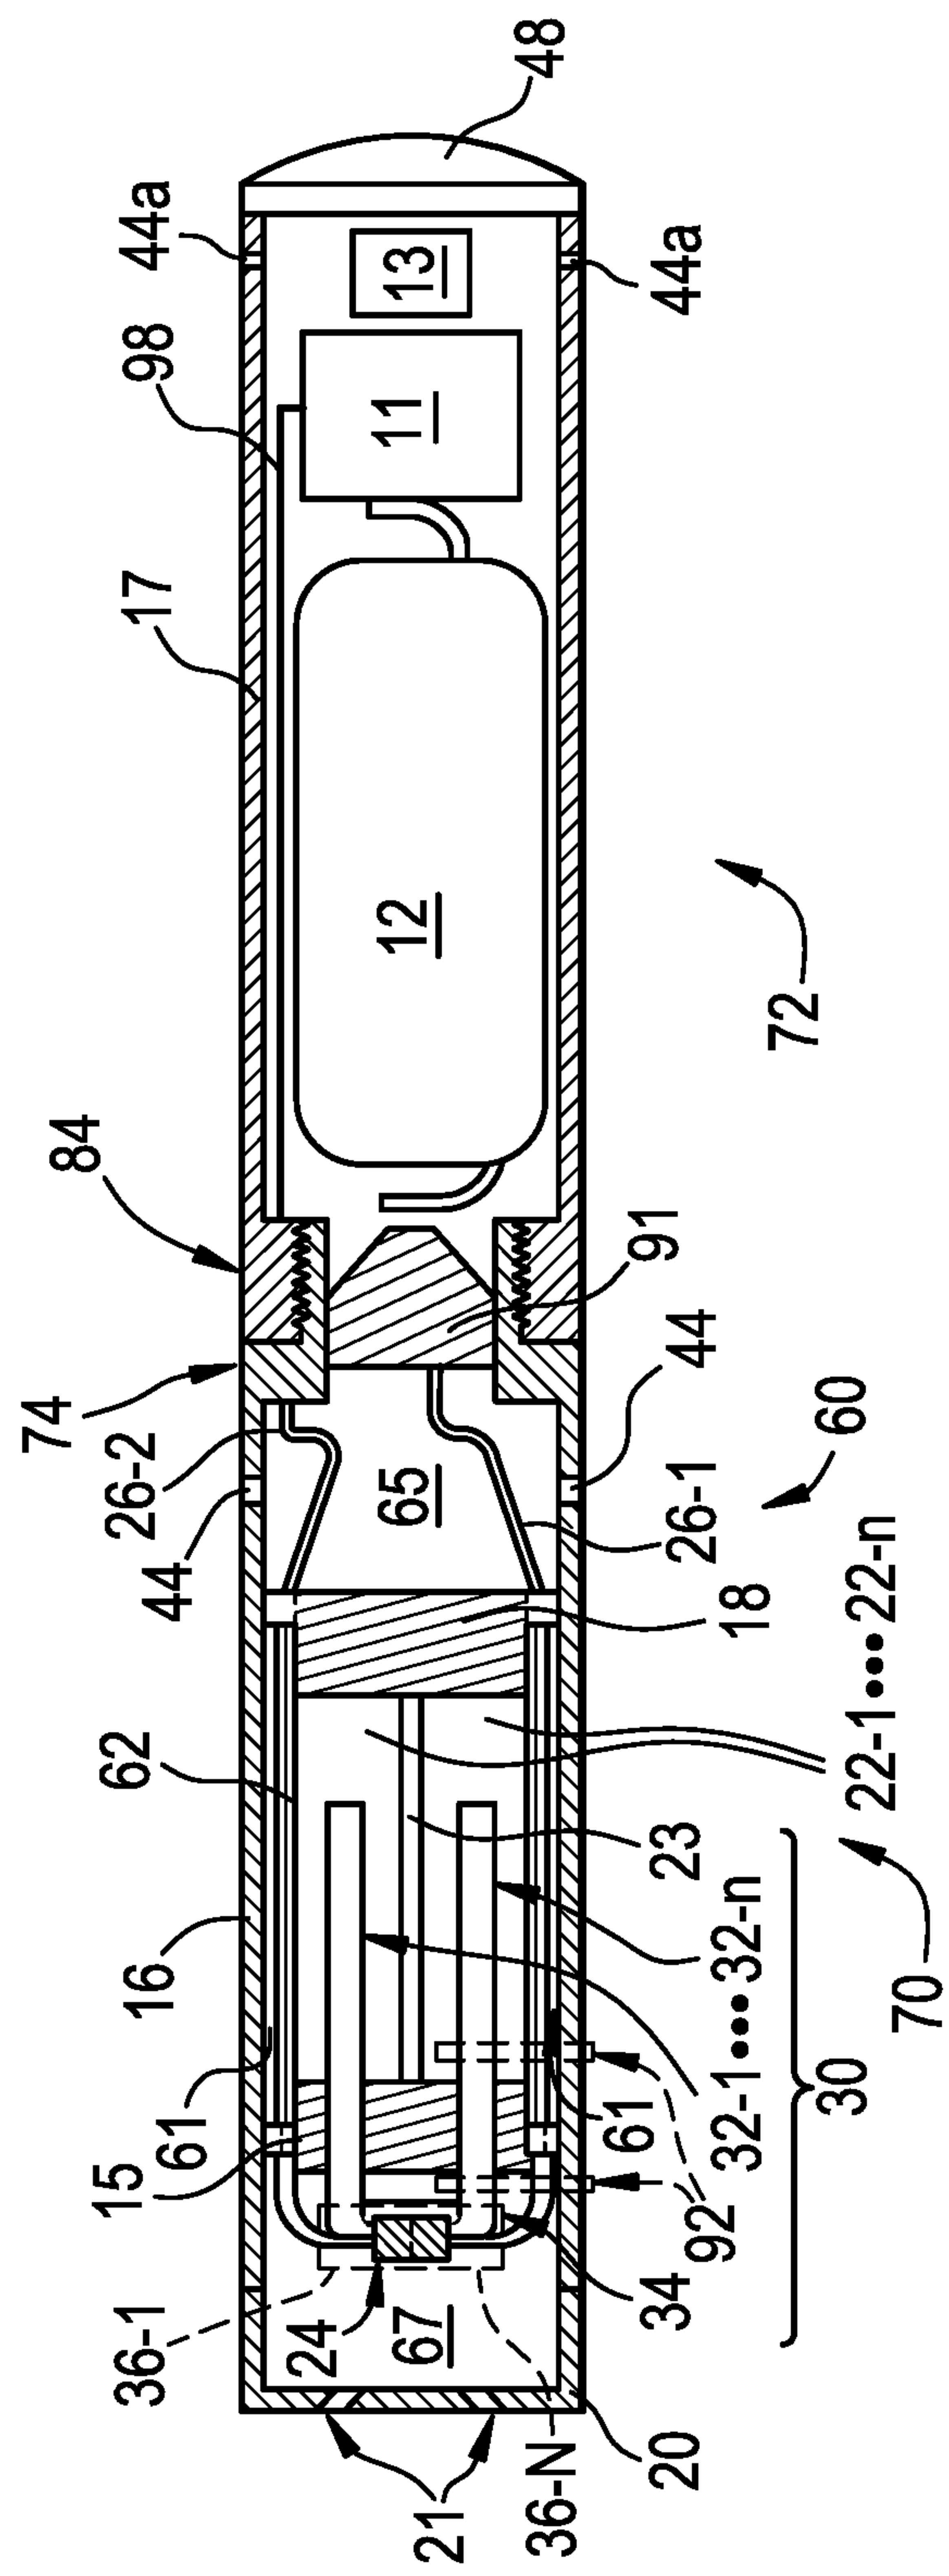

一  
二  
三  
四

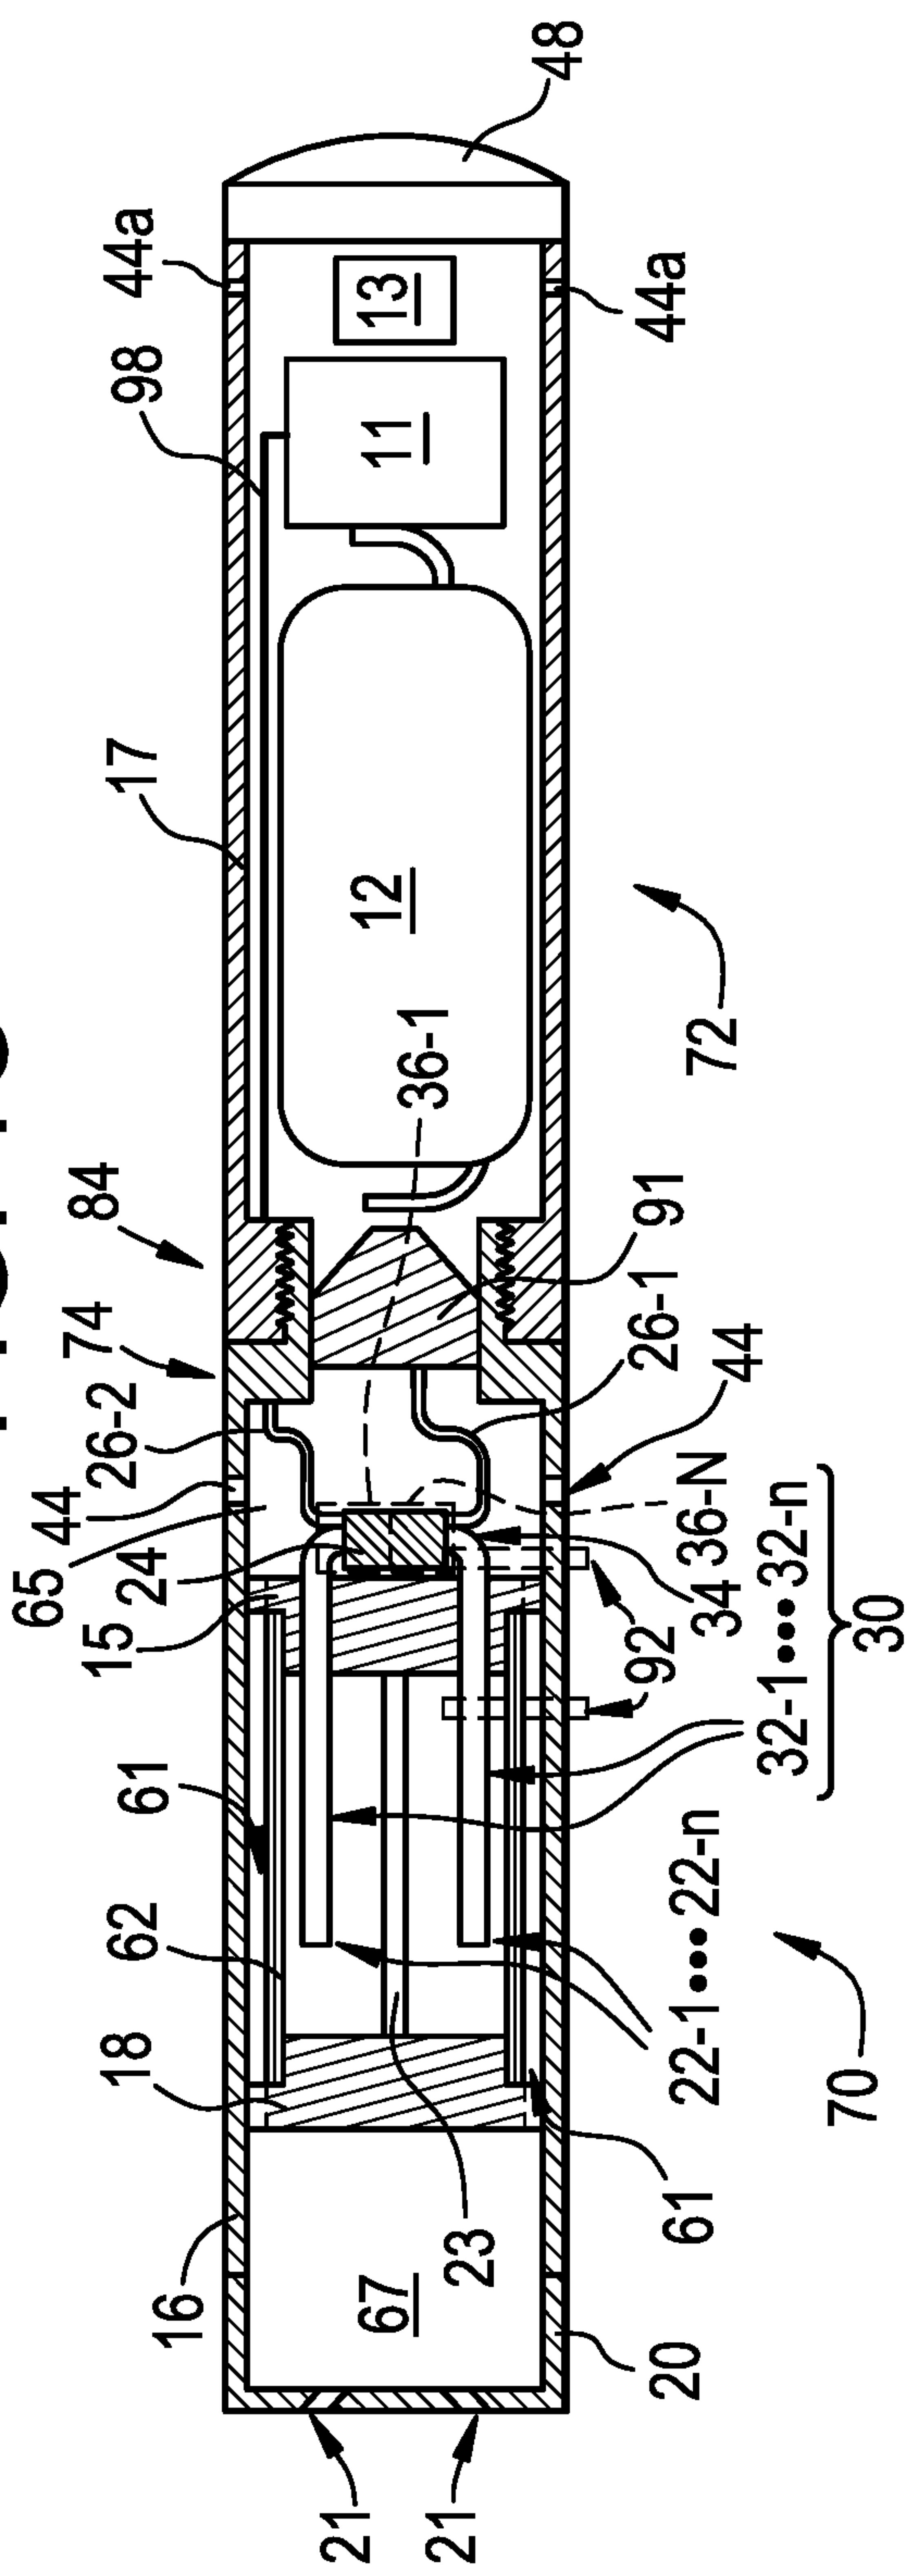

3/4

FIG. 2A





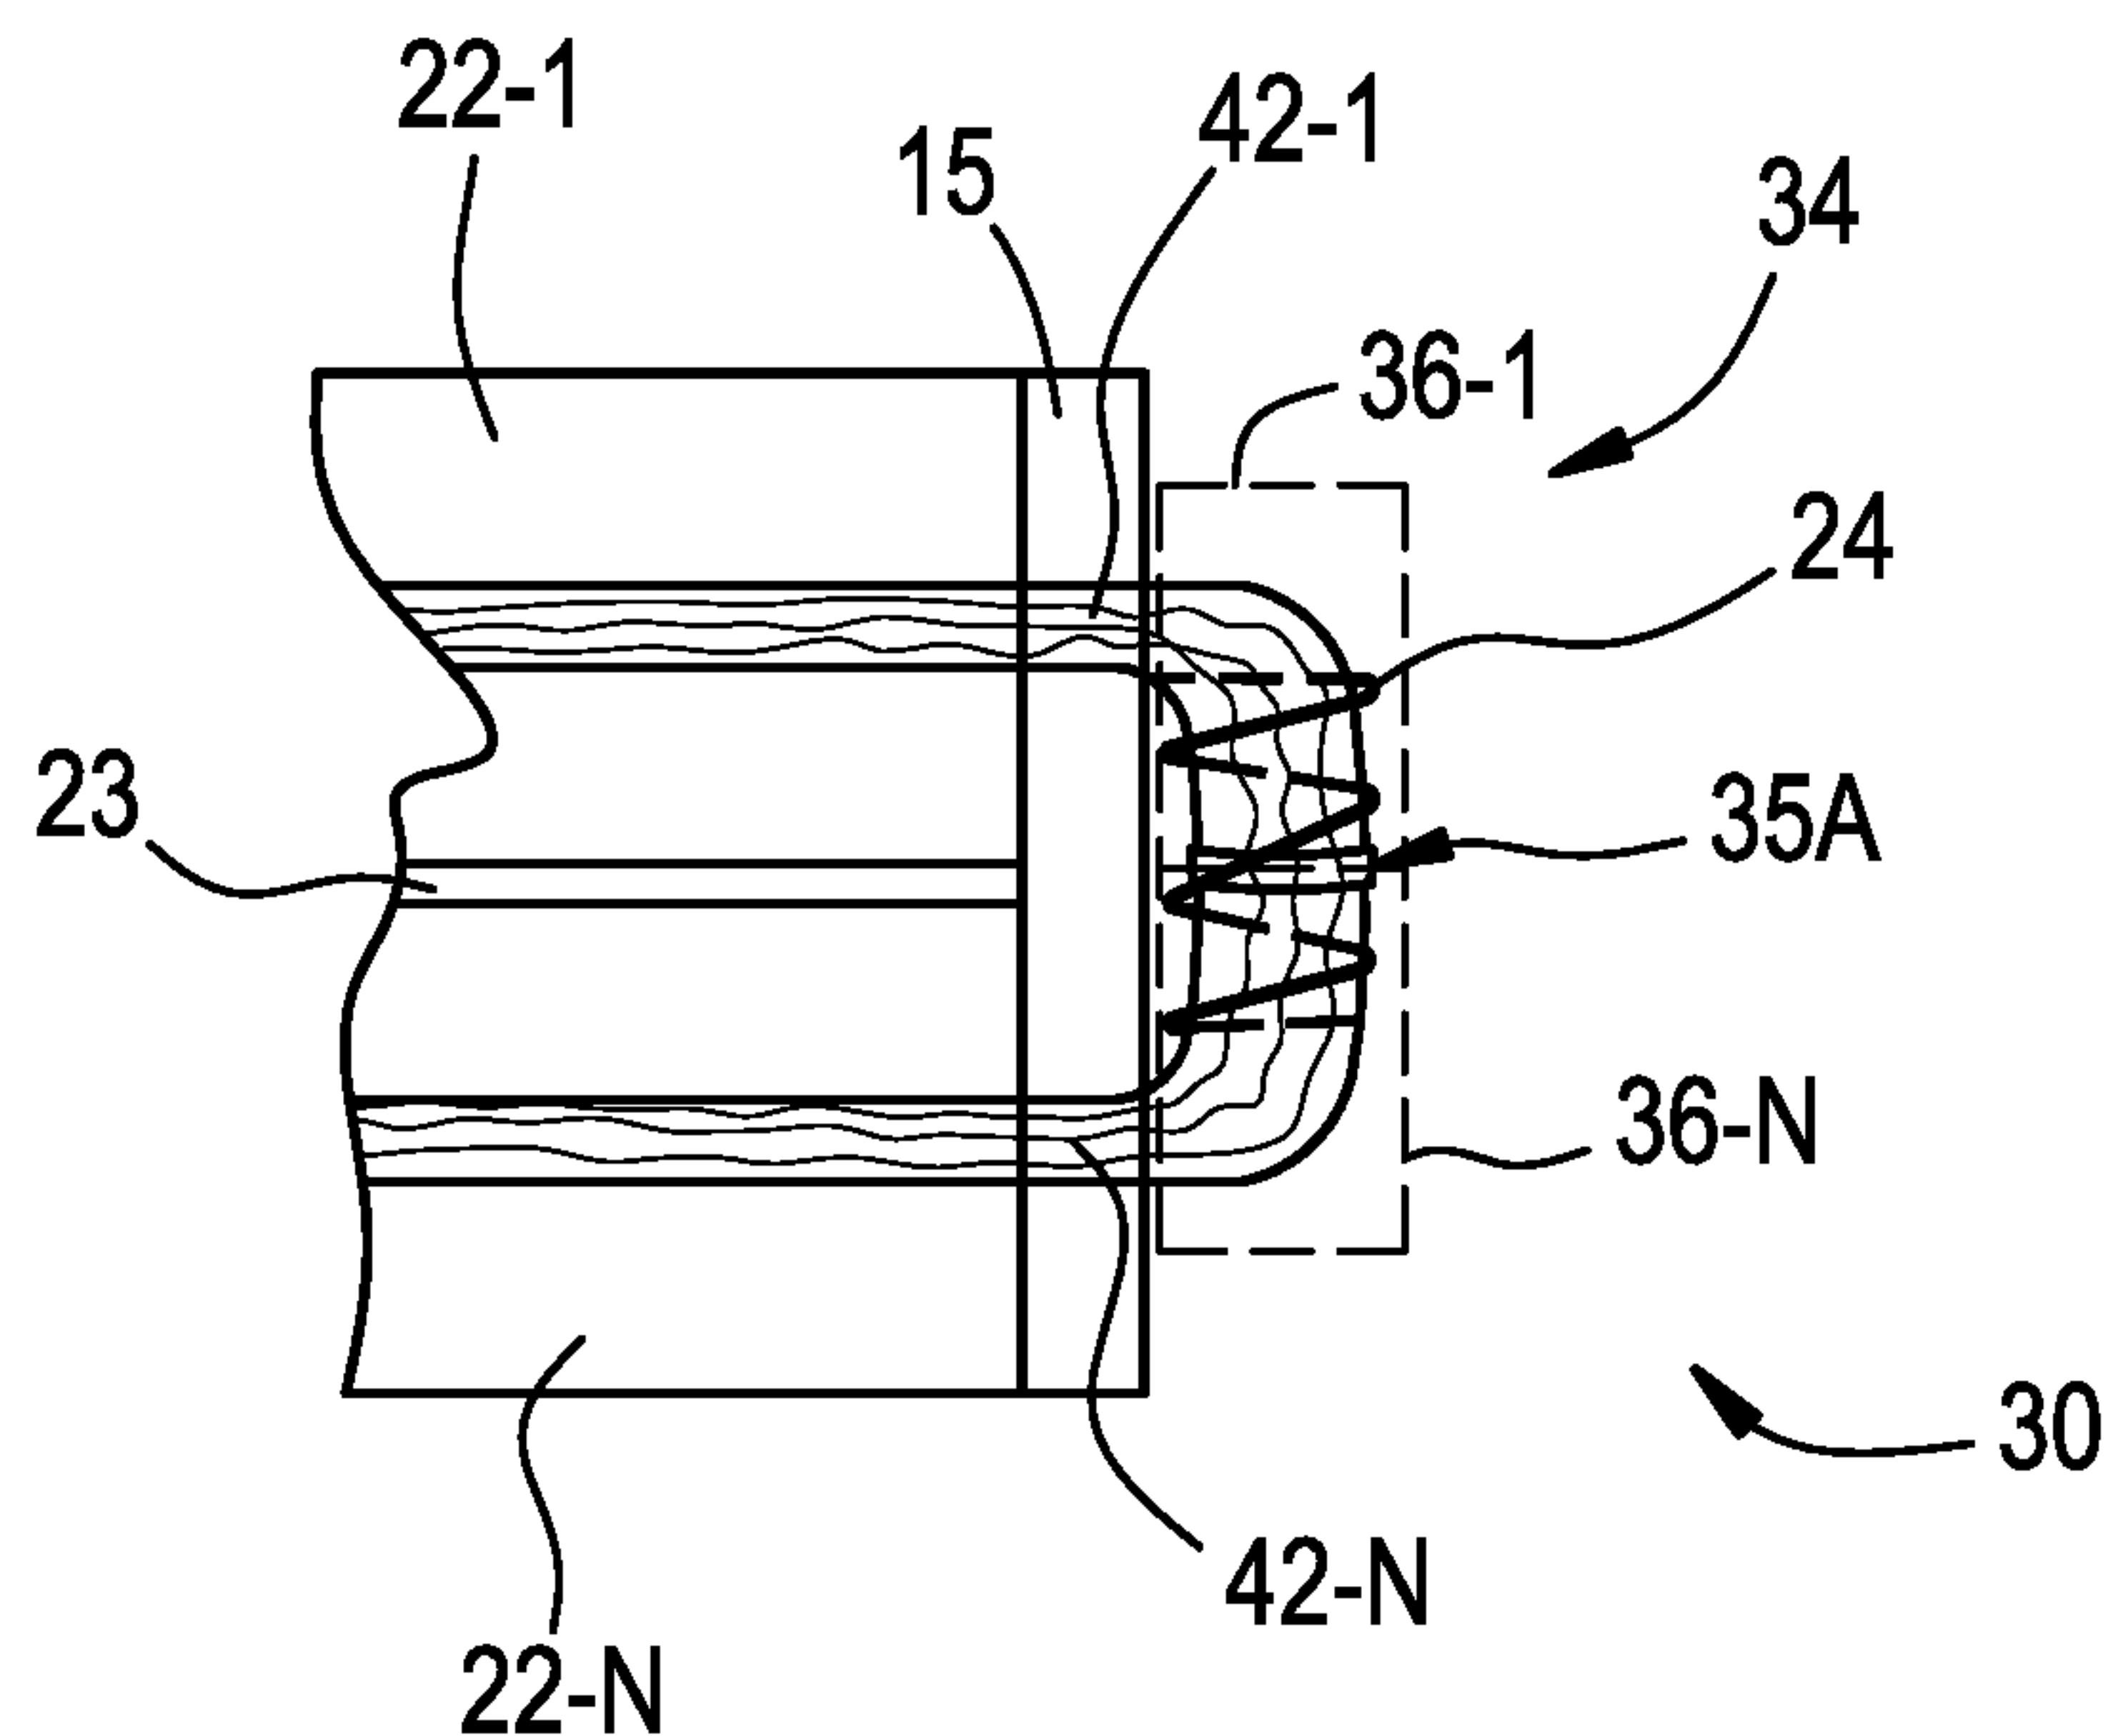


FIG. 2B

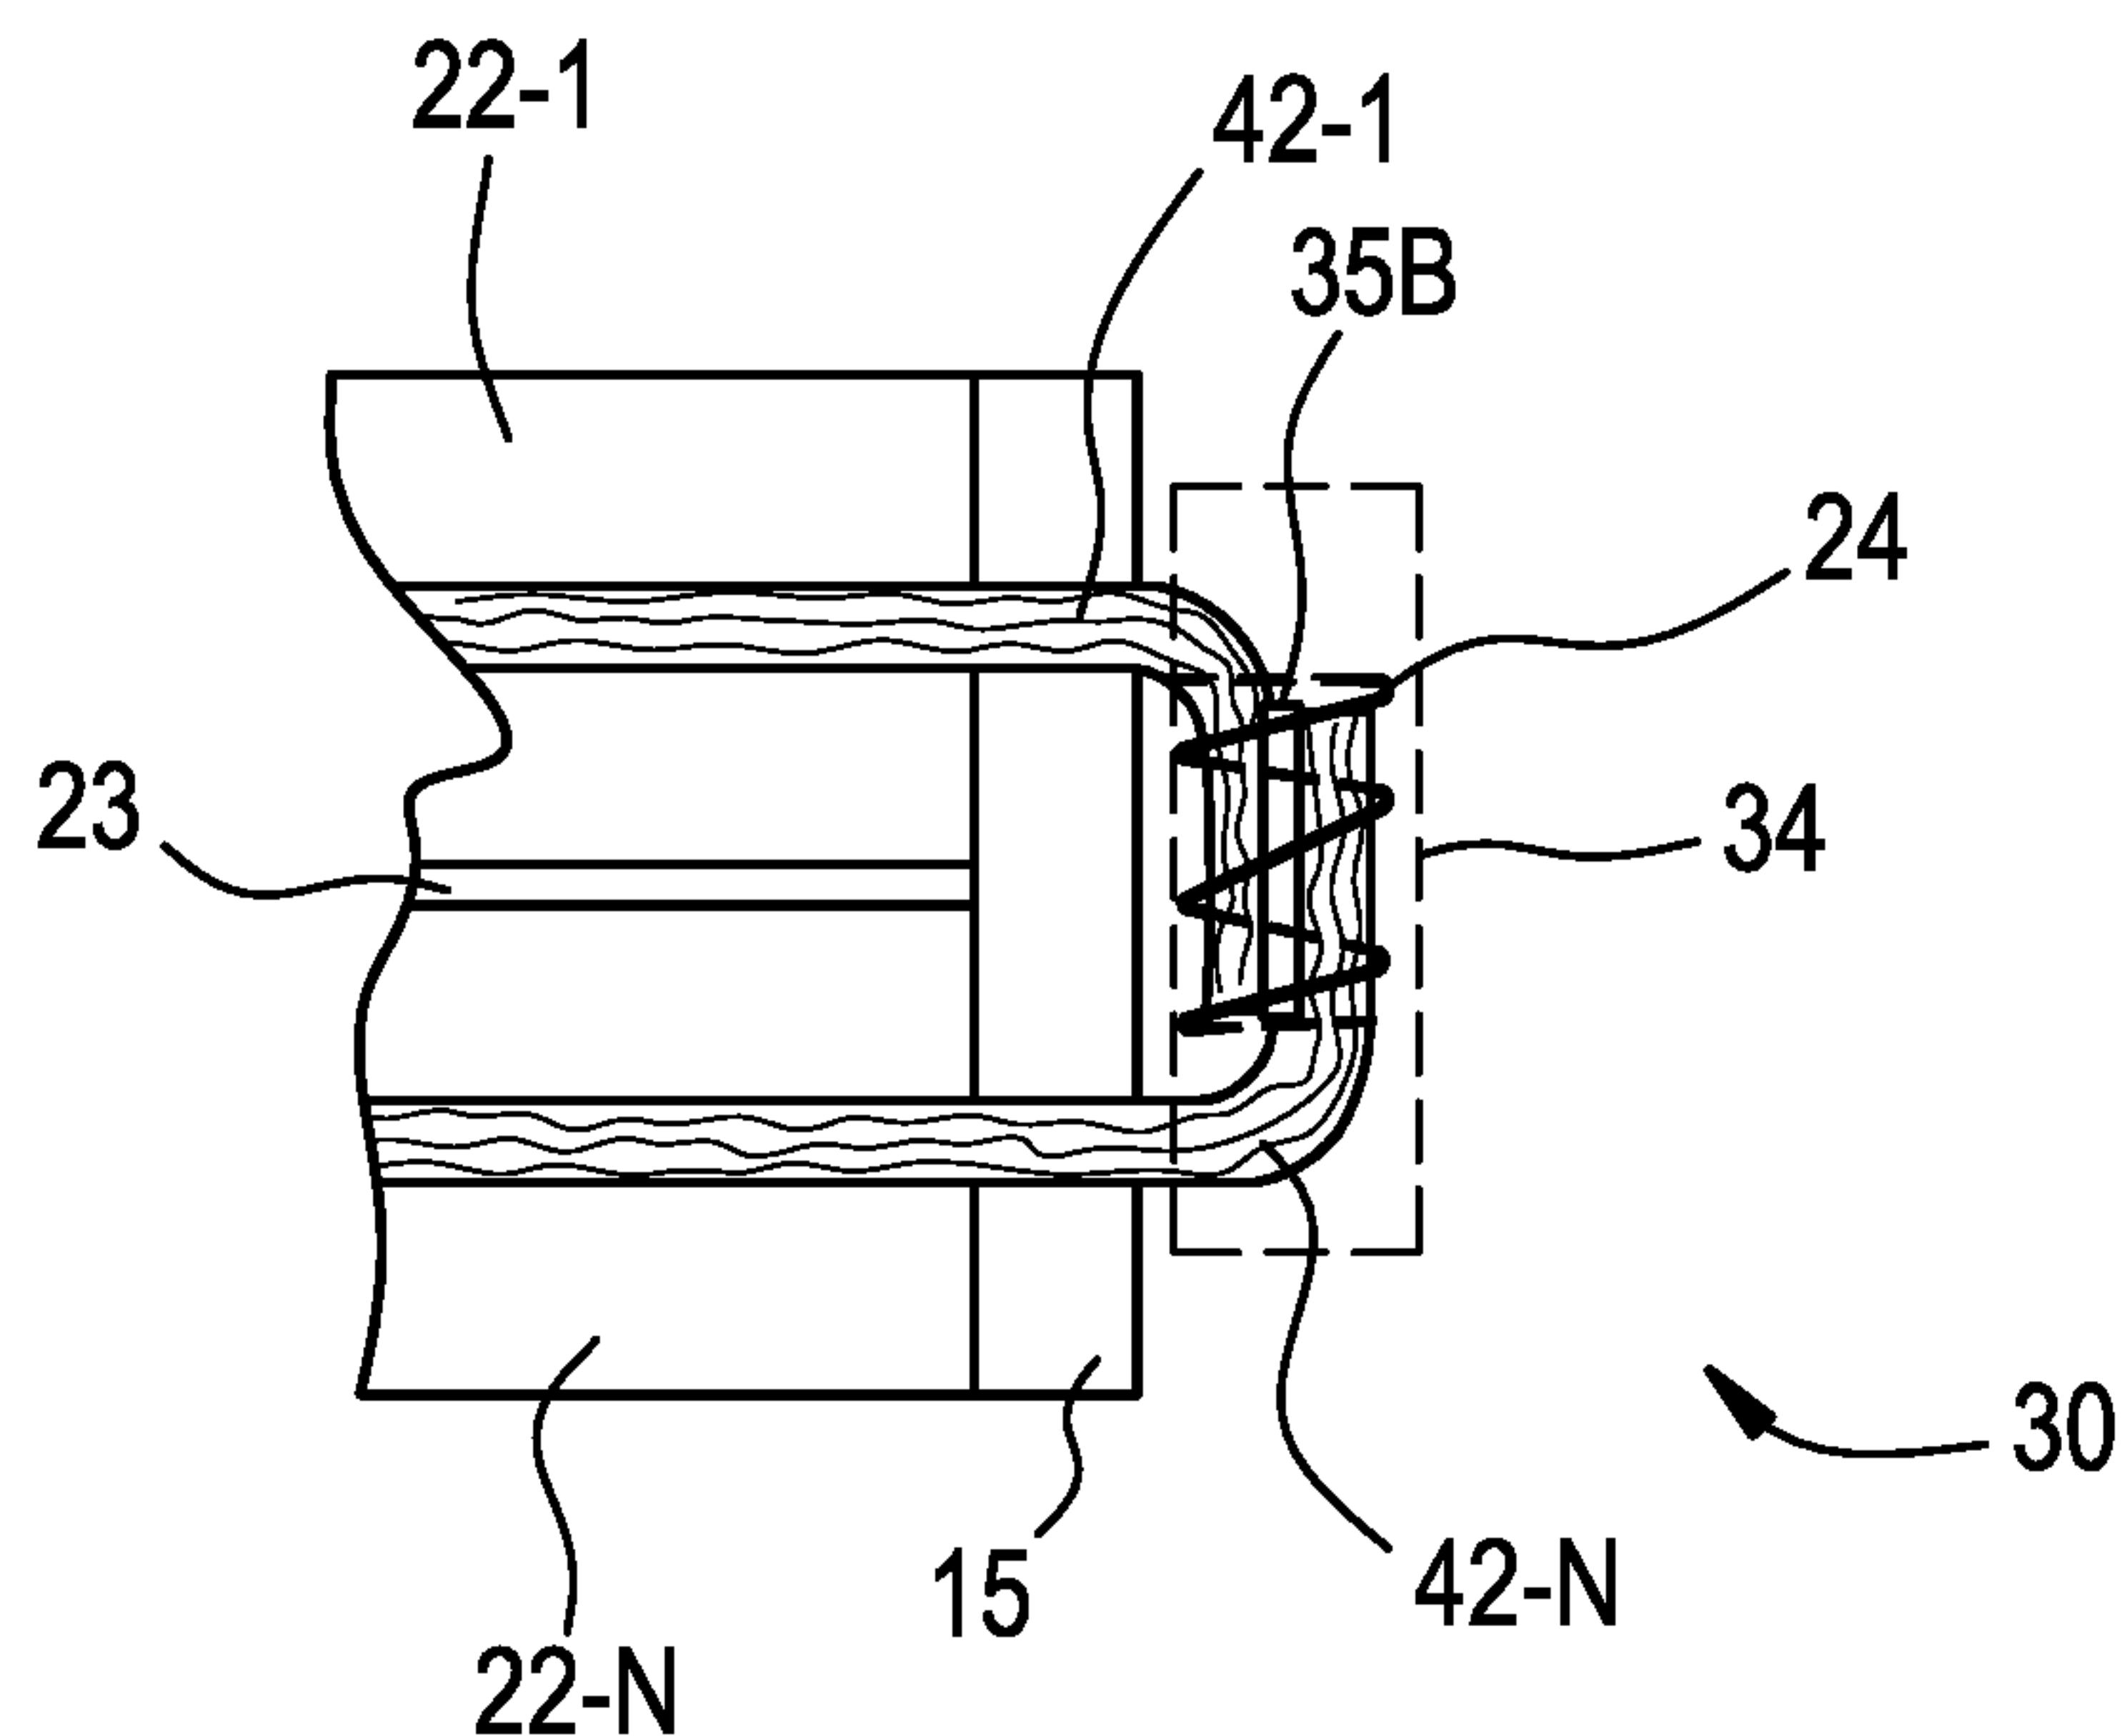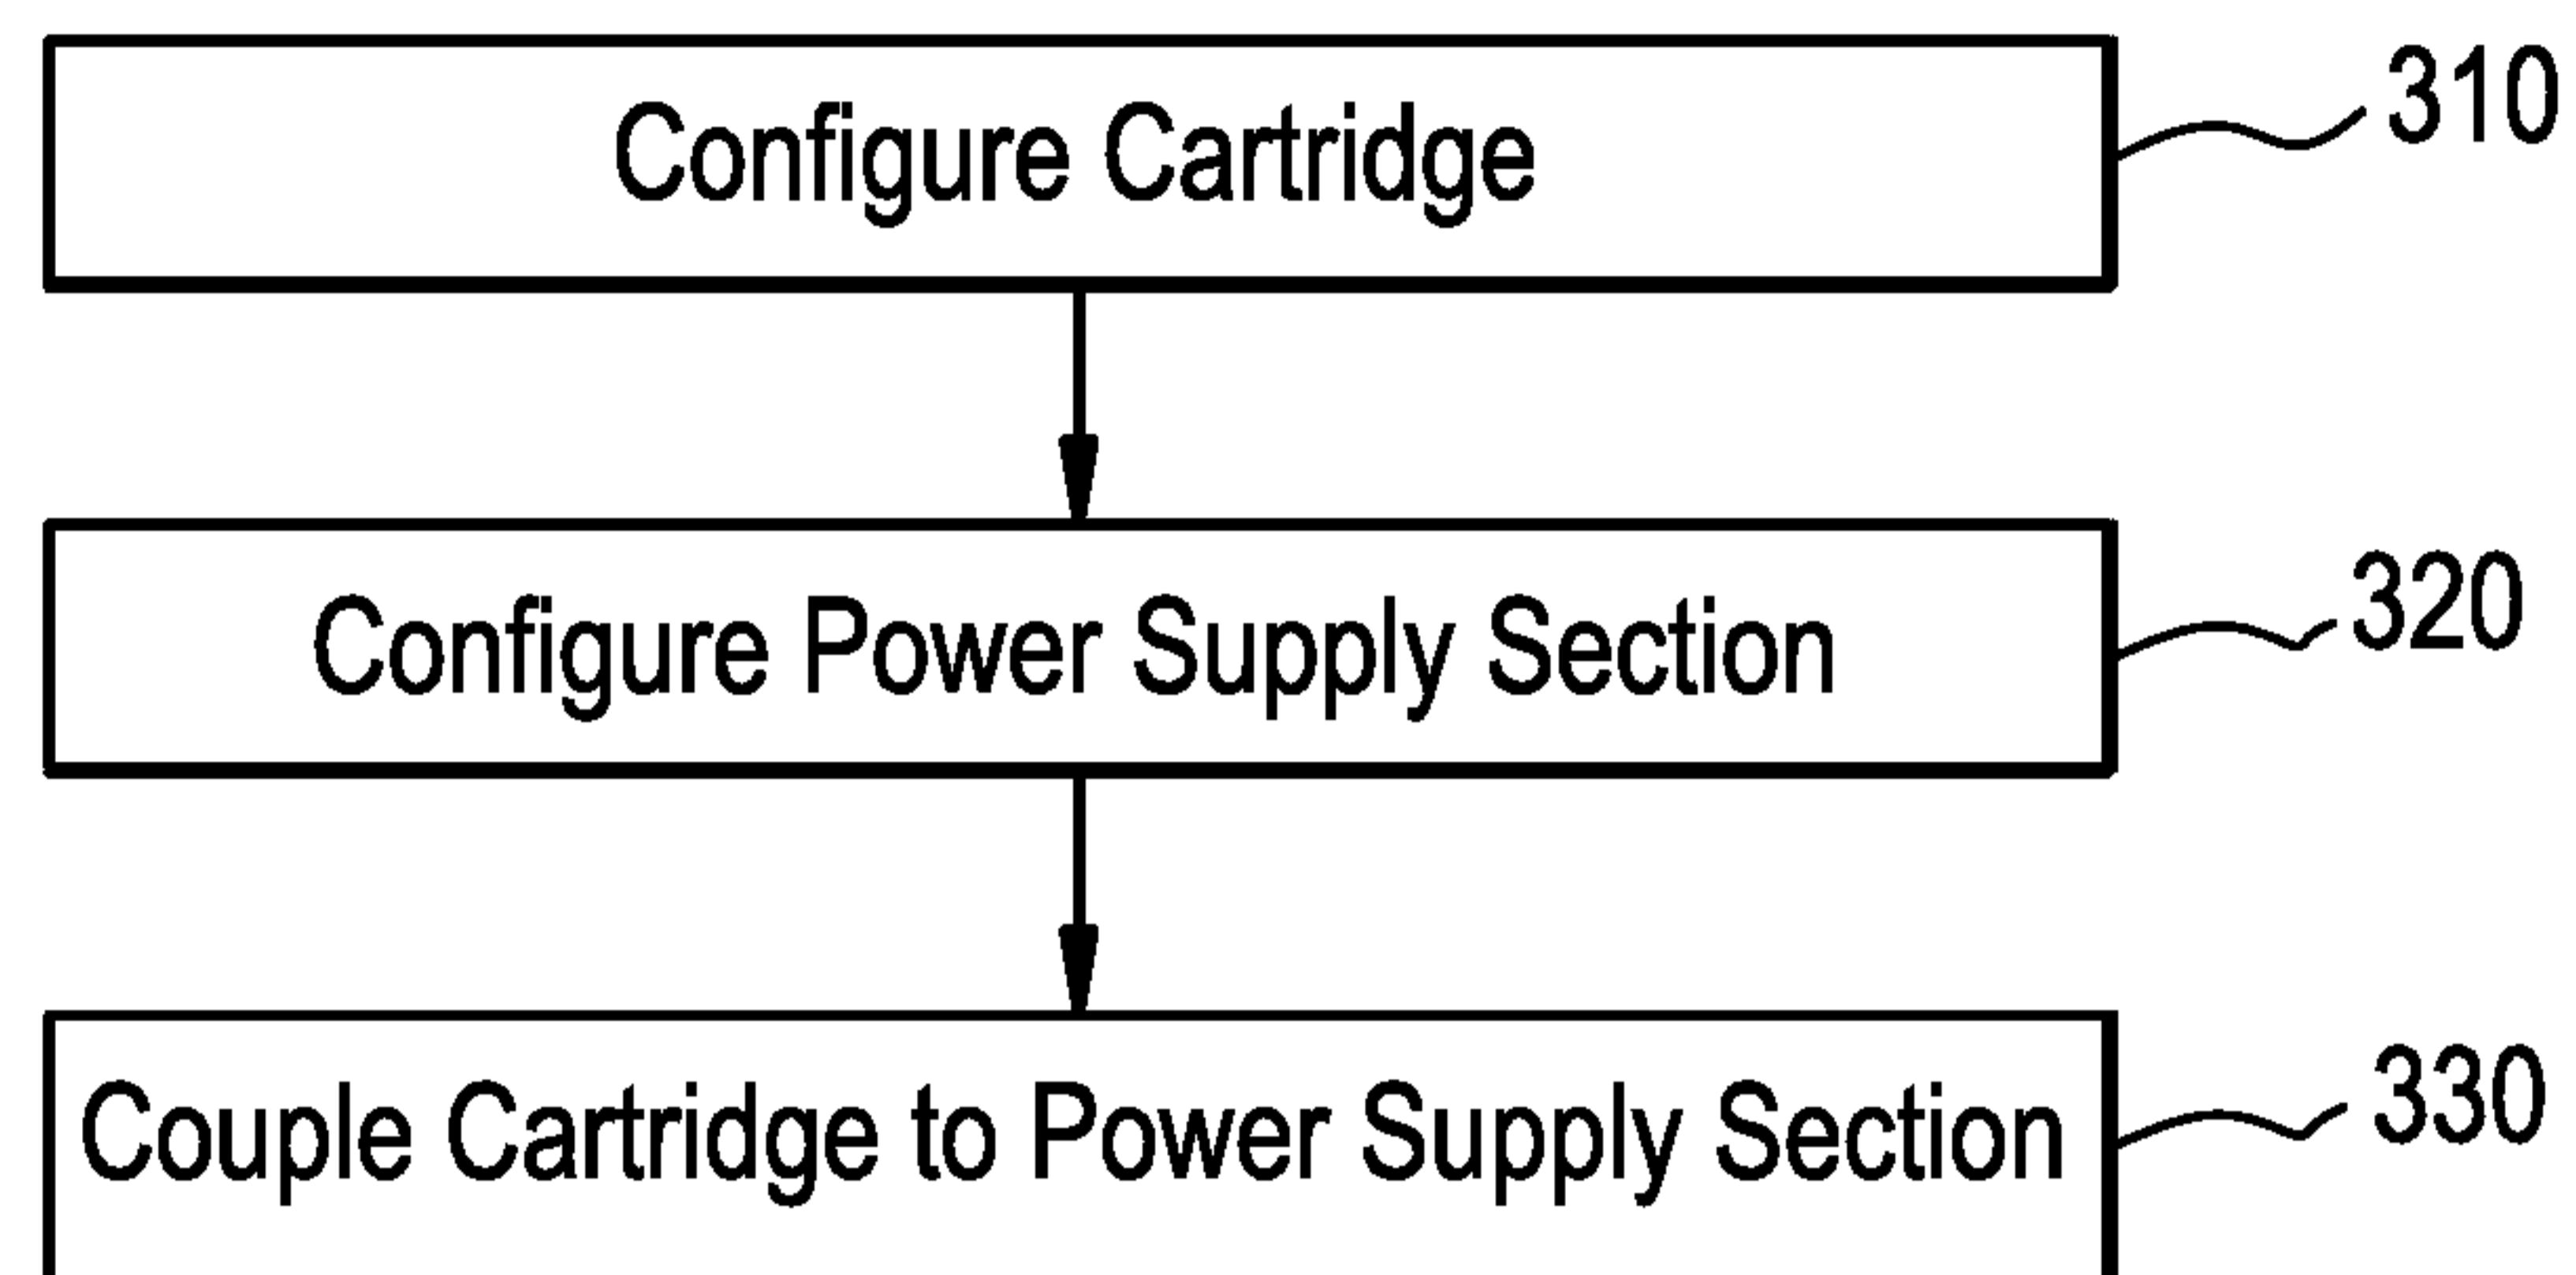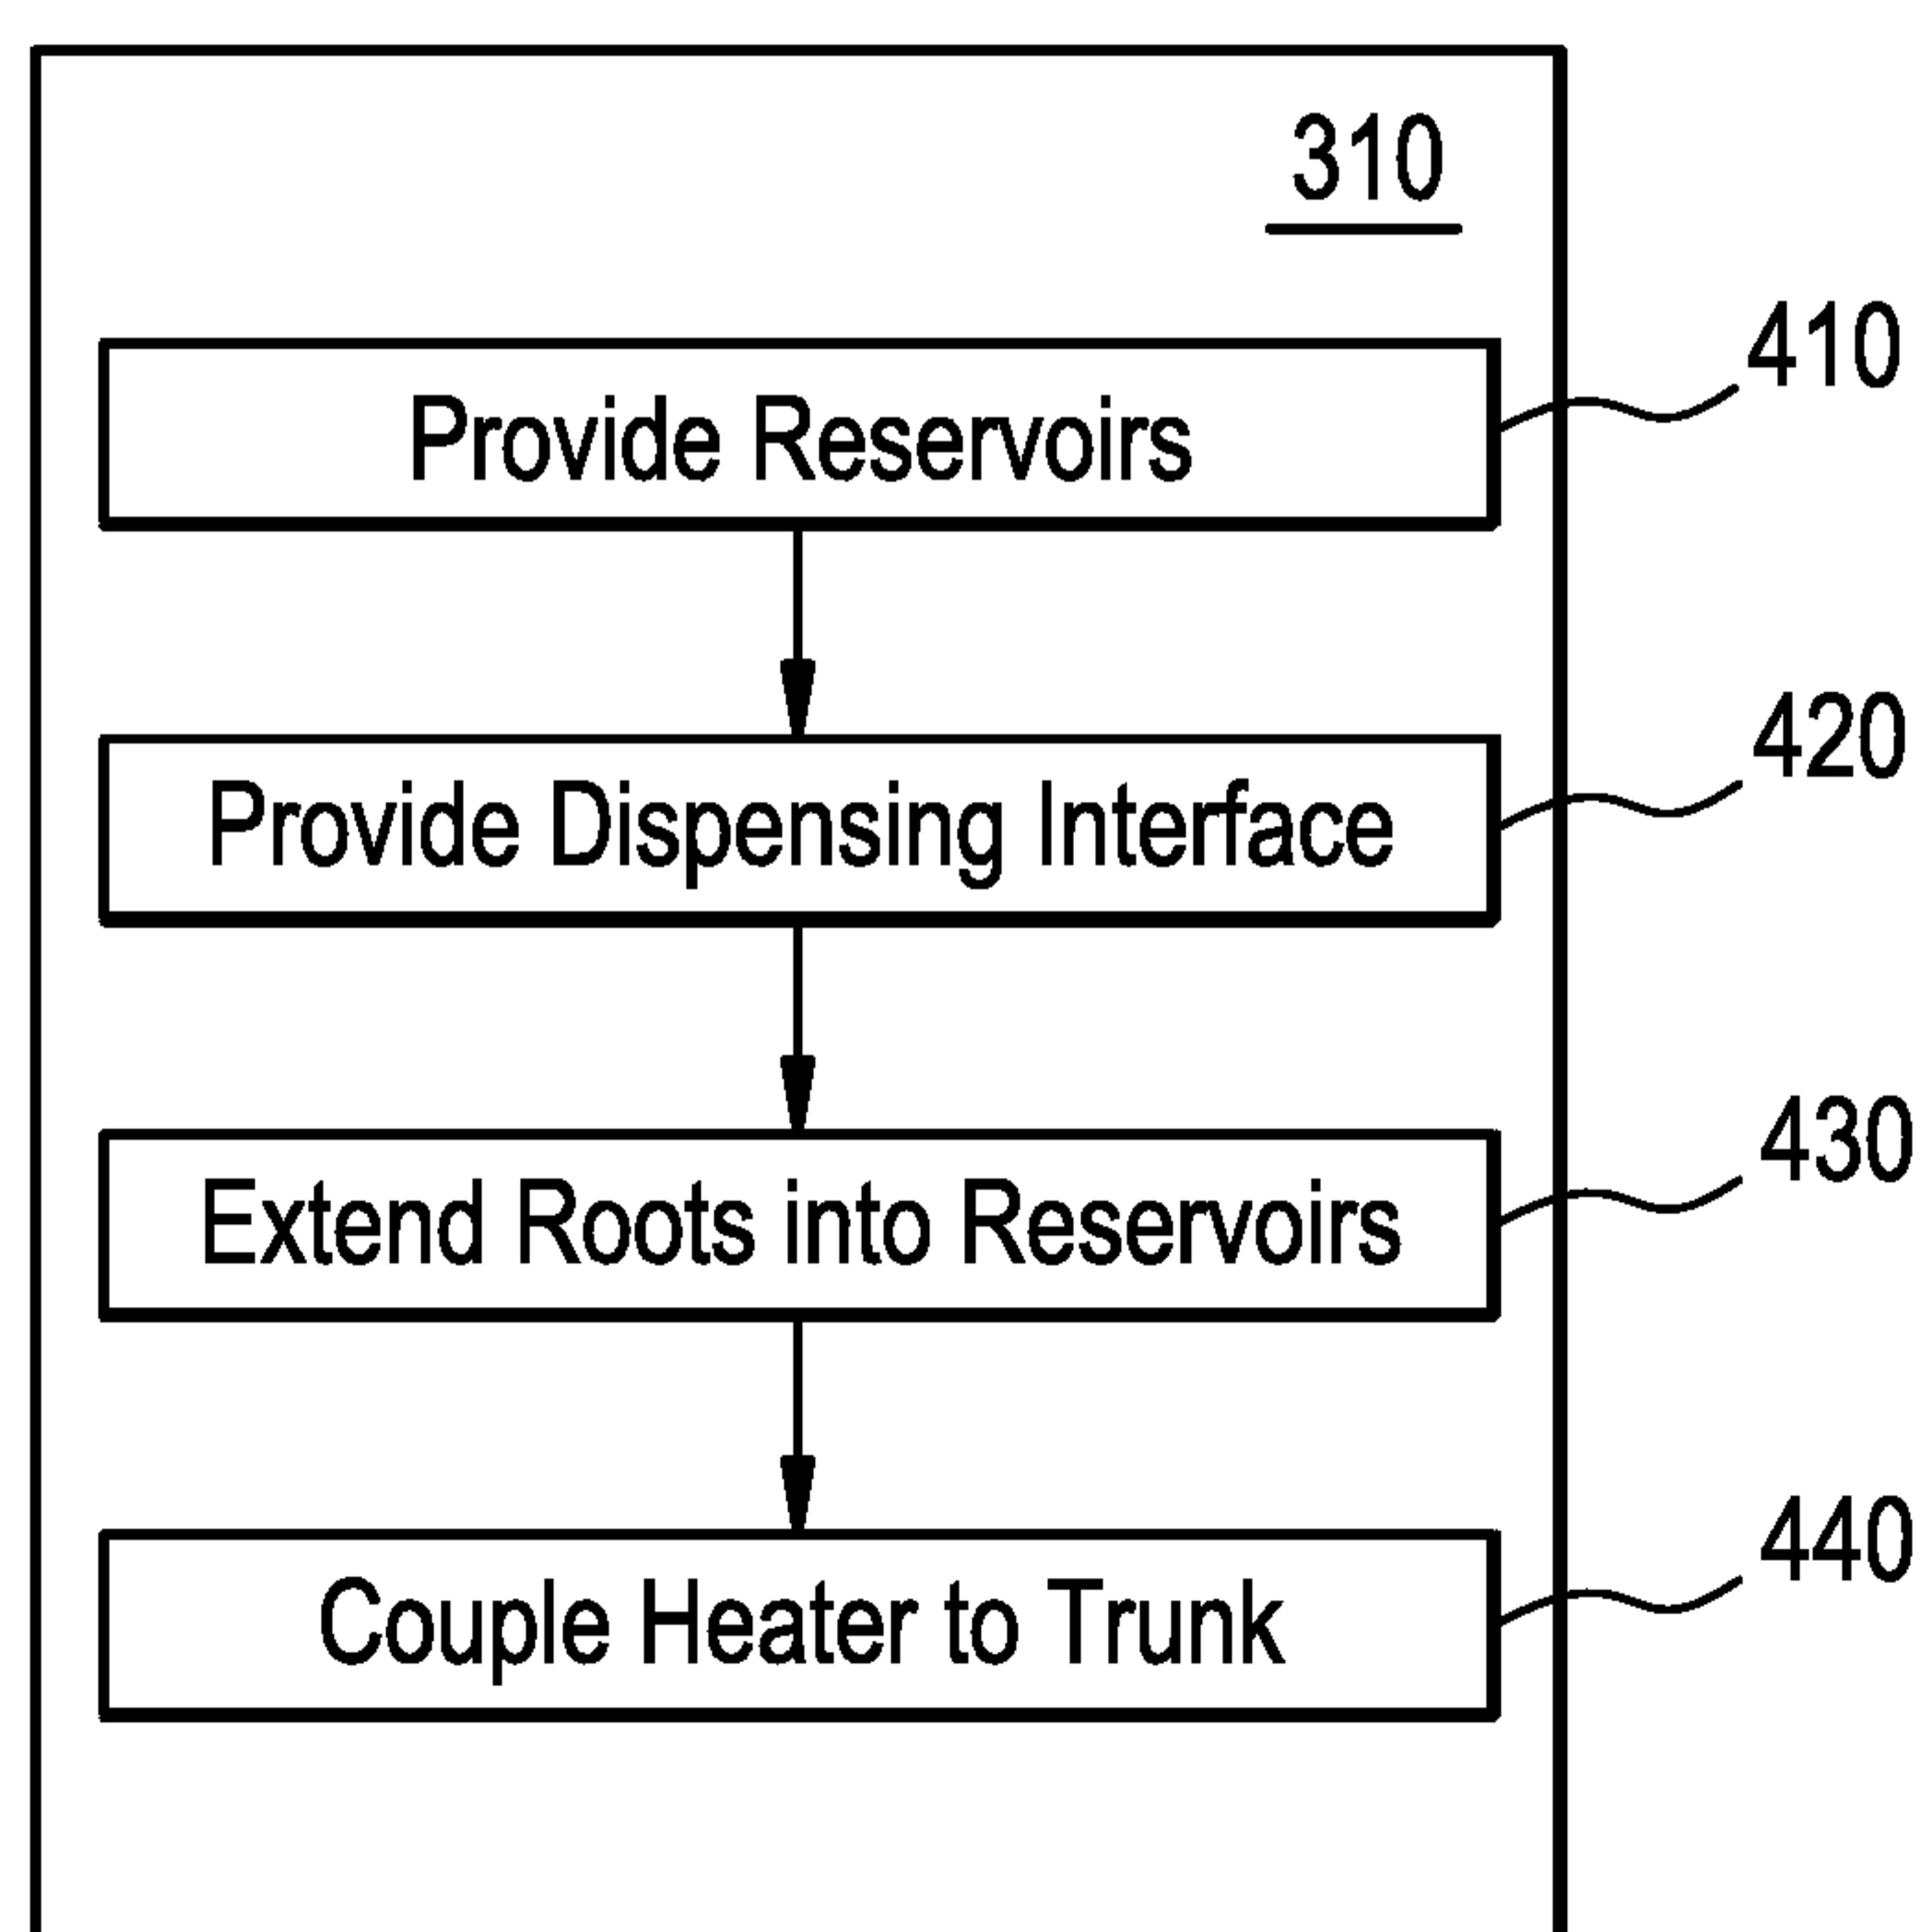


**FIG. 3****FIG. 4**

# FIG. 1A

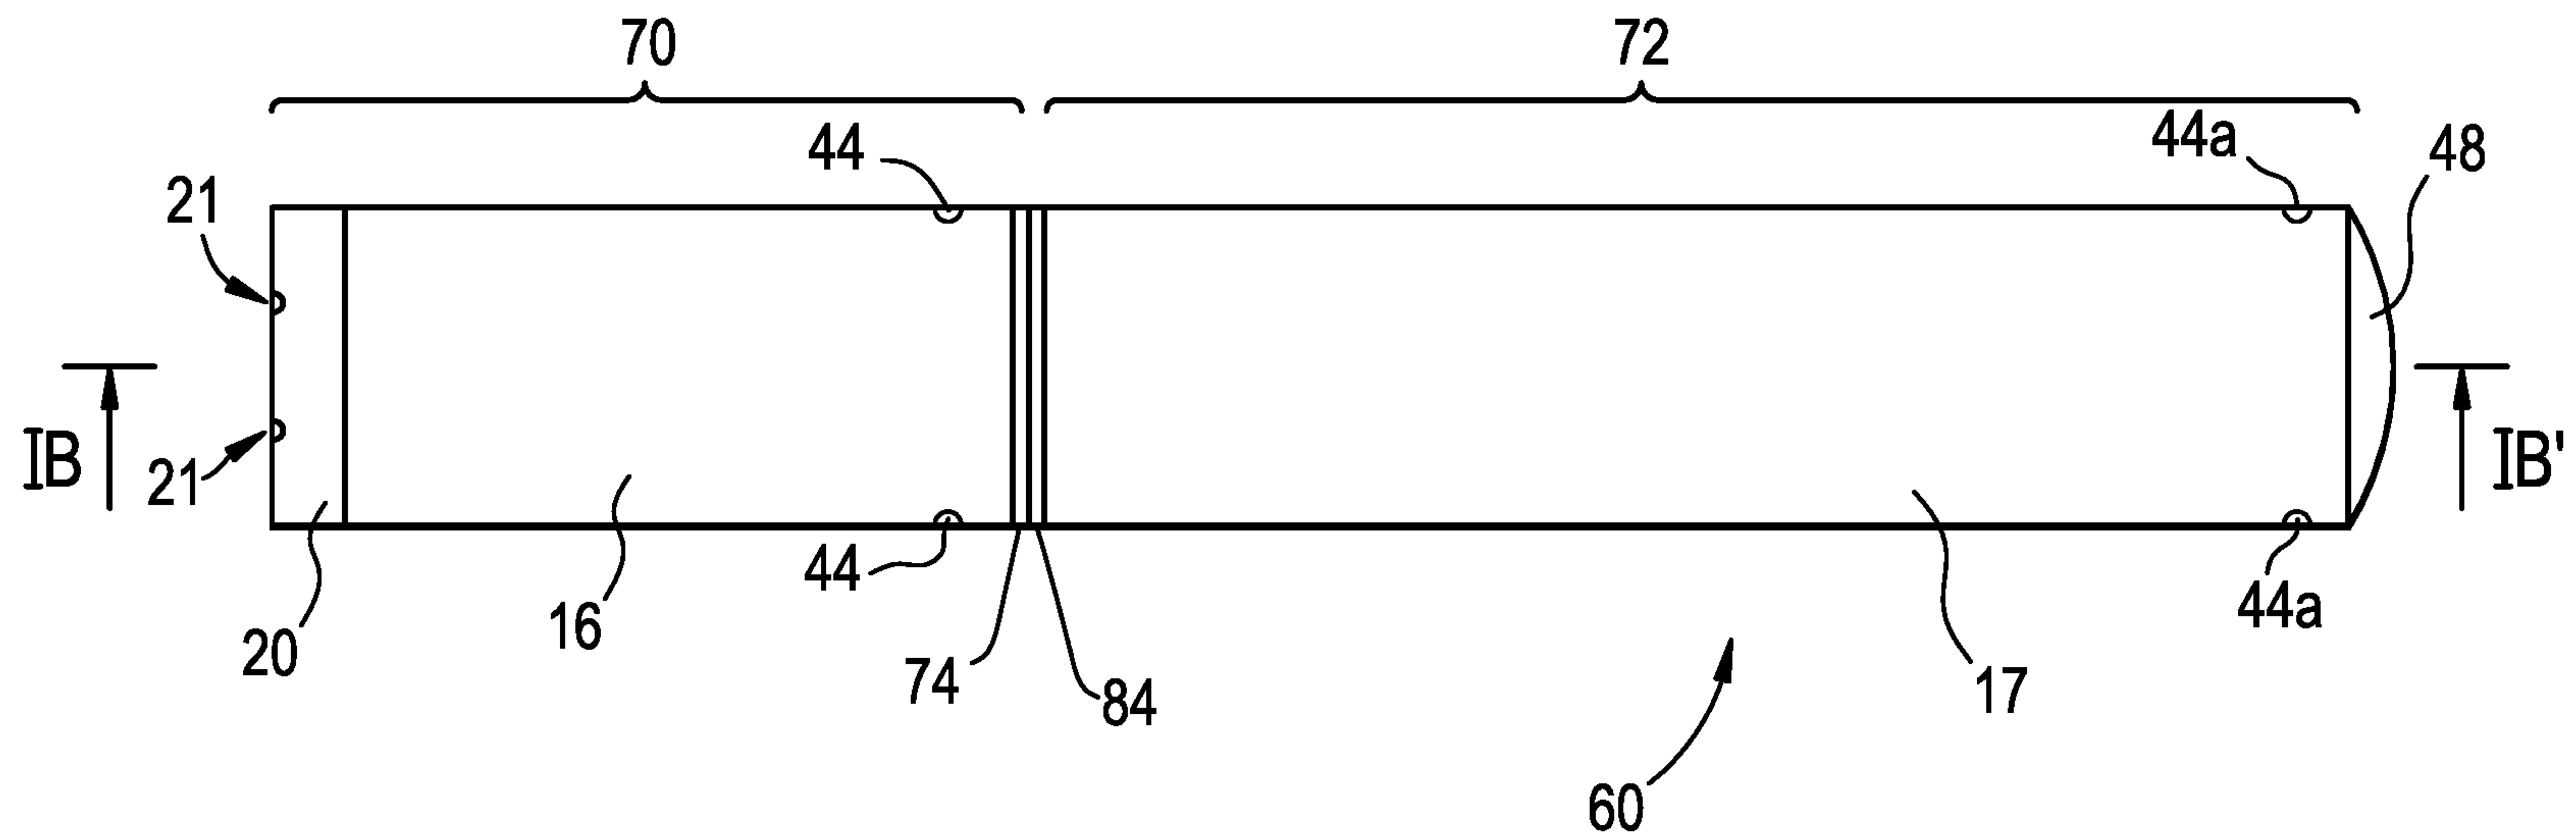

# FIG. 1B

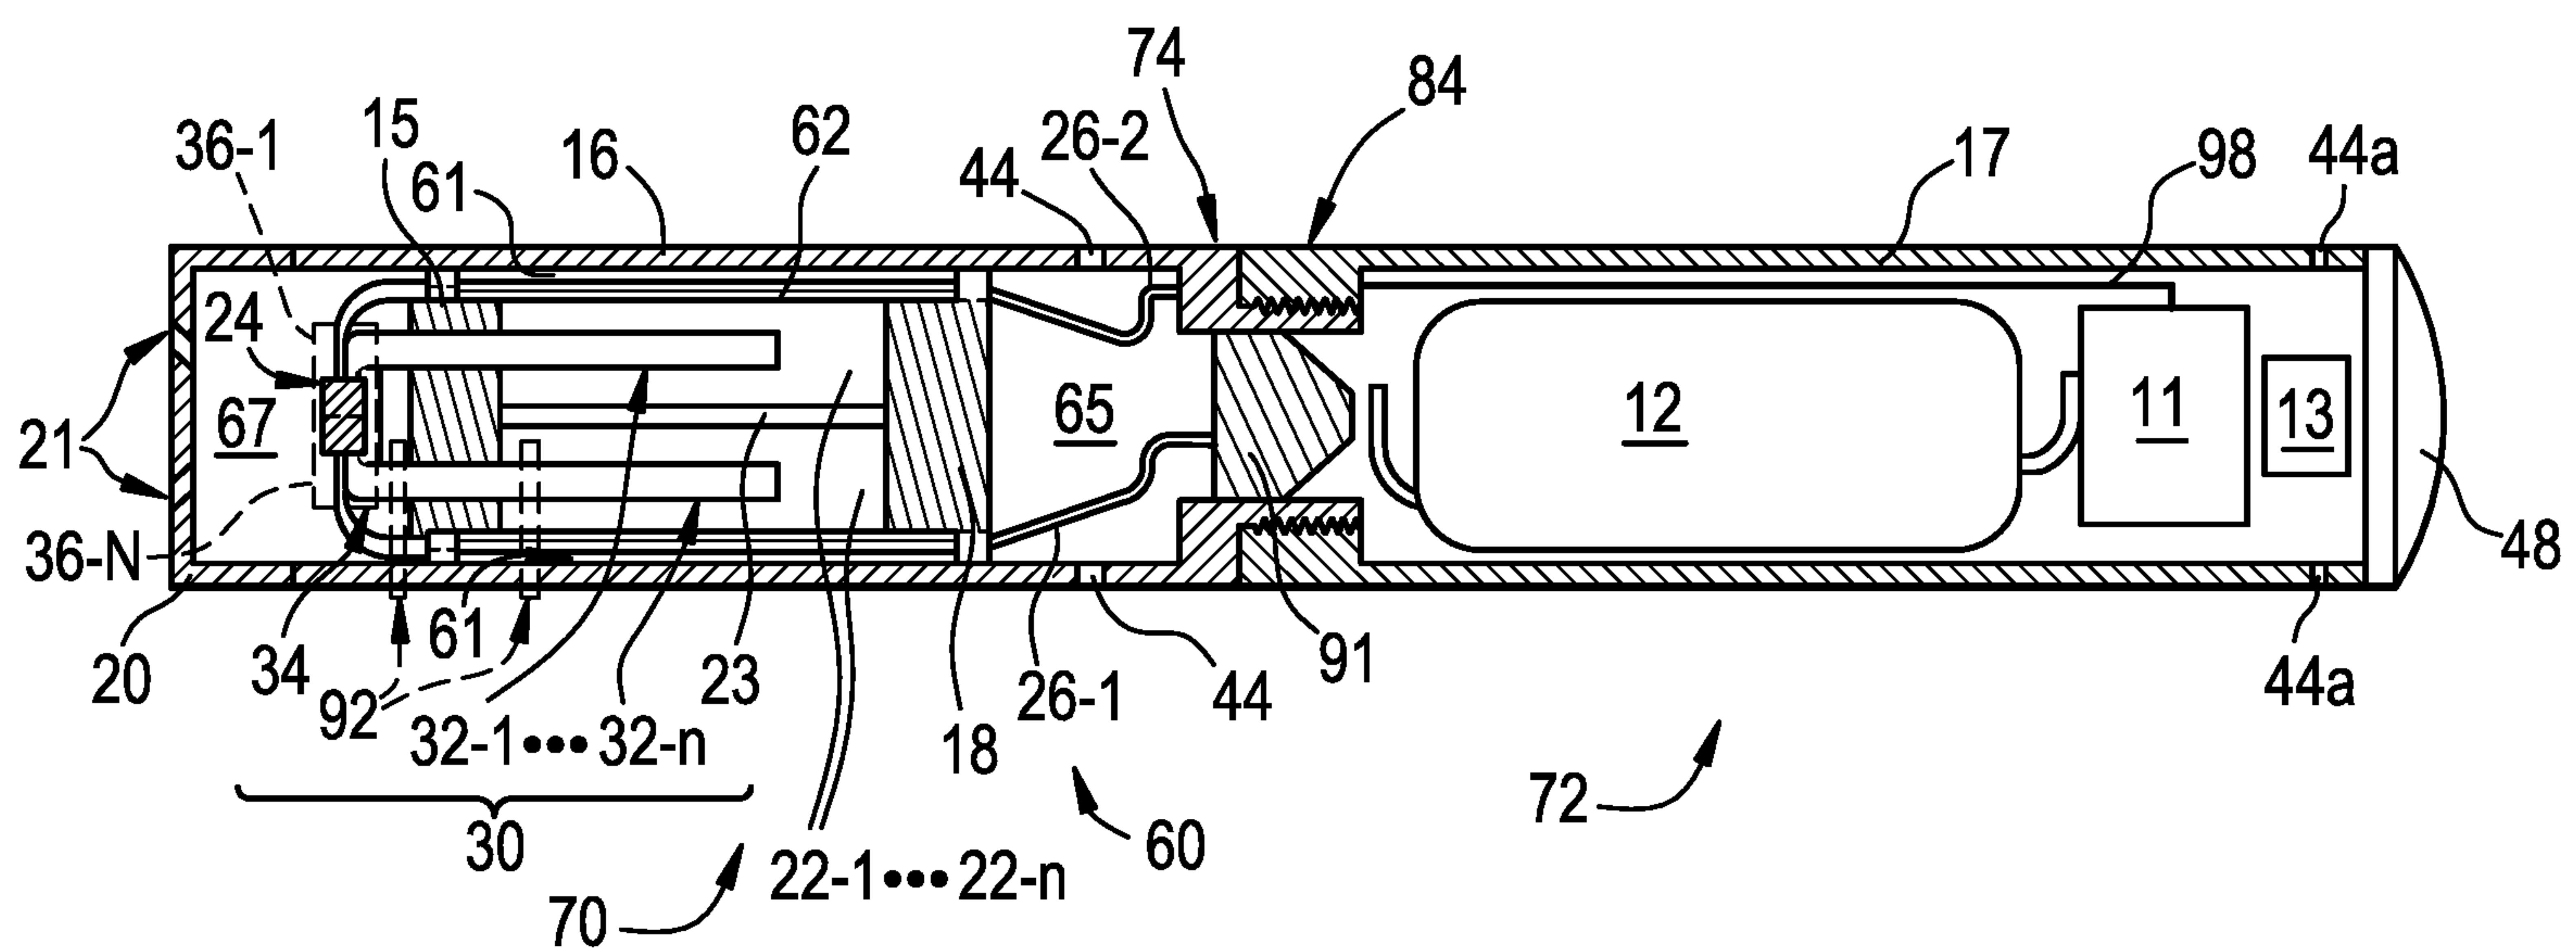

# FIG. 1C

