



- (51) International Patent Classification:
F24C 15/10 (2006.01)
- (21) International Application Number:
PCT/US2013/044777
- (22) International Filing Date:
7 June 2013 (07.06.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/657,323 8 June 2012 (08.06.2012) US
13/912,871 7 June 2013 (07.06.2013) US
- (71) Applicant: ELECTROLUX HOME PRODUCTS, INC.
[US/US]; 10200 David Taylor Drive, Charlotte, NC 28262 (US).
- (72) Inventors: WILCOX, John; 1100 Industrial Drive, Springfield, TN 37172 (US). SPECK, Scott; 1100 Industrial Drive, Springfield, TN 37172 (US). GREEN, Daniel; 1100 Industrial Drive, Springfield, TN 37172 (US).
- (74) Agents: GARVEY, Michael, W. et al.; Pearné & Gordon, LLP, 1801 East Ninth Street, Suite 1200, Cleveland, OH 44114-3108 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) Title: COOKTOP FOR GAS APPLIANCE

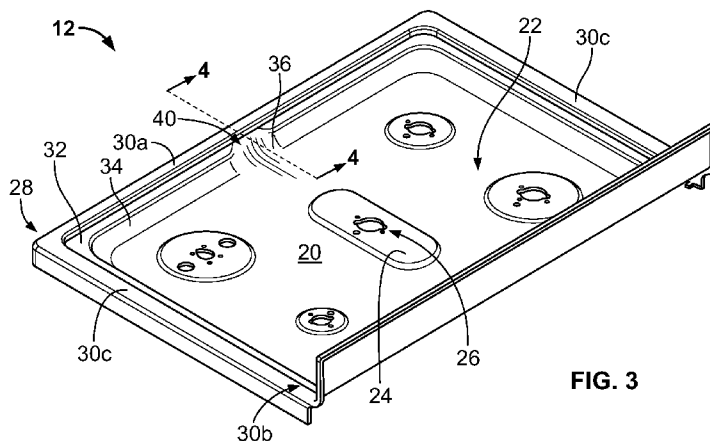


FIG. 3

(57) Abstract: A cooking appliance includes a cooktop and a grate. The cooktop includes a bottom surface on which at least one gas burner is mounted. The cooktop further includes a periphery and an inner recessed area. The inner recessed area is recessed relative to the periphery. The inner recessed area is substantially defined by the bottom surface. The cooktop further includes a transition extending between the periphery and the inner recessed area and a sweep section extending between the periphery and the inner recessed area. The inner recessed area is surrounded substantially by the transition except at the sweep section. The grate is configured to be placed on the cooktop. Each of the sweep section and the transition extends between the bottom surface and a predetermined elevation above the bottom surface. The sweep section reaches the predetermined elevation in a more gradual manner than the transition reaches the predetermined elevation.

WO 2013/185072 A1

COOKTOP FOR GAS APPLIANCE

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 61/657,323 filed on June 8, 2012, the entire disclosure of which is hereby incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure relates to a cooking appliance and, more particularly, to apparatuses and methods for cleaning a cooking appliance.

BACKGROUND

[0003] Certain cooking appliances are provided with a cooktop that has one or more burners for heating kitchen utensils. In certain types of burners, the burner projects from a surface on which the burner is mounted and food particles, dust or the like that fall onto the surface need to be removed therefrom. However, the geometry of the cooktop may make it difficult to remove gathered food particles from the surface. Specifically, the cooktop may have a recessed surface which may make it difficult to extract the food particles even after they are gathered.

SUMMARY

[0004] In a first example, a cooking appliance includes a cooktop and a grate. The cooktop includes a bottom surface on which at least one gas burner is mounted. The cooktop further includes a periphery and an inner recessed area. The inner recessed area is substantially defined by the bottom surface. The at least one gas burner is mounted on the inner recessed area. The cooktop further includes a transition extending between the periphery and the inner recessed area and a sweep section extending between the periphery and the inner recessed area. The inner recessed area is surrounded substantially by the transition except at the sweep section. The grate is configured to be placed on the cooktop. The sweep section extends between the bottom surface and a predetermined elevation which is on the periphery and is above the bottom surface. The transition extends between the bottom surface and the predetermined elevation. The sweep section is defined by a continuous surface and reaches the predetermined elevation in a more gradual manner than the transition reaches the predetermined elevation.

[0005] In one example aspect of the first example, the periphery includes an outer recessed area, and the outer recessed area is recessed relative to the periphery.

[0006] In another example aspect of the first example, the transition extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation, and the sweep section extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation.

[0007] In yet another example aspect of the first example, the periphery substantially surrounds the outer recessed area which substantially surrounds the inner recessed area.

[0008] In yet another example aspect of the first example, the grate is configured to be placed on the outer recessed area.

[0009] In yet another example aspect of the first example, the continuous surface forms a discontinuity in the outer recessed area.

[0010] In yet another example aspect of the first example, the discontinuity in the outer recessed area is concealed at least partially by the grate.

[0011] In yet another example aspect of the first example, the cooktop is substantially rectangular such that the periphery includes a proximal edge, a distal edge and lateral edges, and the sweep section intersects the proximal edge.

[0012] In a second example, a cooking appliance includes a cooktop and a grate. The cooktop includes a bottom surface on which at least one gas burner is mounted. The cooktop further includes a periphery and an inner recessed area. The inner recessed area is recessed relative to the periphery. The inner recessed area is substantially defined by the bottom surface. The cooktop further includes a transition extending between the periphery and the inner recessed area and a sweep section extending between the periphery and the inner recessed area. The inner recessed area is surrounded substantially by the transition except at the sweep section. A grate is configured to be placed on the cooktop. The sweep section extends between the bottom surface and a predetermined elevation which is on the periphery and is above the bottom surface. The transition extends between the bottom surface and the predetermined elevation. A cross-section of the sweep section is concavely curved. A cross-section of the transition is concavely curved. A radius of curvature of the sweep section is larger than a radius of curvature of the transition.

[0013] In one example aspect of the second example, the periphery includes an outer recessed area, and the outer recessed area is recessed relative to the periphery.

[0014] In another example aspect of the second example, the transition extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation. The sweep section extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation.

[0015] In yet another example aspect of the second example, the periphery substantially surrounds the outer recessed area which substantially surrounds the inner recessed area.

[0016] In yet another example aspect of the second example, the grate is configured to be placed on the outer recessed area.

[0017] In yet another example aspect of the second example, the continuous surface forms a discontinuity in the outer recessed area.

[0018] In yet another example aspect of the second example, the discontinuity in the outer recessed area is concealed at least partially by the grate.

[0019] In yet another example aspect of the second example, the cooktop is substantially rectangular such that the periphery includes a proximal edge, a distal edge and lateral edges, and the sweep section intersects the proximal edge.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] These and other aspects are better understood when the following detailed description is read with reference to the accompanying drawings, in which:

[0021] **FIG. 1** is a view of an example embodiment of a cooking appliance including an example cooktop with an example grate placed thereon;

[0022] **FIG. 2** is a front perspective view of the example cooktop in **FIG. 1** in an isolated state;

[0023] **FIG. 3** is a rear perspective view of the example cooktop in an isolated state; and

[0024] **FIG. 4** is a cross-sectional view of the example cooktop cut across a sweep section of the cooktop.

DETAILED DESCRIPTION

[0025] Examples will now be described more fully hereinafter with reference to the accompanying drawings in which example embodiments are shown. Whenever possible, the same reference numerals are used throughout the drawings to refer to the same or like parts. However, aspects may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0026] Referring now to **FIG. 1**, an example embodiment of a cooking appliance implemented with the features described below is illustrated. In the present embodiment, the cooking appliance **10** is a kitchen stove including a cooktop **12** with a set of burners **14** and an oven **16** below the cooktop **12**. A grate **18** may be mounted on the cooktop **12** to allow cooking utensils to be placed above the burners **14** to be heated thereon. However, the kitchen stove may be of various types such as slide-in, freestanding, etc. or, alternatively, the cooking appliance may be embodied in a significantly different configuration (e.g., a portable stove with a single burner on the cooktop and without an oven).

[0027] The cooking appliance **10** may provide heat using combustible gas and the cooktop **12** may include one or more gas burners **14** that are mounted on a bottom surface **20** of the cooktop **12**. As shown in **FIGS. 2-3**, in the present embodiment, the cooktop **12** includes an inner recessed area **22** and the bottom surface **20** substantially defines the inner recessed area **22**. The bottom surface **20** may be substantially flat but may include a plurality of areas that has raised portions **24** and apertures **26** such that the gas burners **14** can be mounted thereat. A periphery **28** of the cooktop **12** may have a substantially rectangular shape so as to include a front proximal edge **30a**, a rear distal edge **30b**, and lateral edges **30c**. The periphery **28** may be formed to include an outer recessed area **32** that is recessed relative to the periphery **28** and the inner recessed area **22** may be recessed relative to the outer recessed area **32**. The periphery **28** and the outer recessed area **32** may also be substantially flat. Moreover, the periphery **28** may substantially surround the outer recessed area **32** while the outer recessed area **32** may substantially surround the inner recessed area **22**. Thus, the inner recessed area **22** may take up the majority of a top surface of the cooktop **12** while the outer recessed area **32** and the periphery **28** are provided on the outskirts of the bottom surface **20**. The grate **18** may be placed on the cooktop **12** and may provide member-

like features to support the kitchen utensils. The grate **18** may include an outer frame **18a** that is shaped to be supported primarily by the outer recessed area **32**.

[0028] The inner recessed area **22** may be substantially surrounded by a transition **34** except at a sweep section **36** as shown in **FIGS. 2-3**. The transition **34** may be a substantially slanted surface that is linear, curvilinear or a combination of both configuration and extends between the inner recessed area **22** and the periphery **28** along the majority of the periphery **28**. As shown in **FIG. 4**, the transition **34** may be embodied as a concavely curved surface **34a**. The sweep section **36** may also be a substantially slanted surface that is linear, curvilinear or a combination of both configuration and extends between the inner recessed area **22** and the periphery **28**. In one embodiment, the sweep section **36** may be defined by a continuous, concavely curved surface **36a** as shown in **FIG. 4**. Both the transition **34** and the sweep section **36** may extend vertically from the bottom surface **20** to a predetermined elevation **38** above the bottom surface **20**. The predetermined elevation **38** may correspond to a level at which a part of the periphery **28** is located and possibly to the level of the plane over which the outer recessed area **32** extends. Thus, the sweep section **36** may extend horizontally from the bottom surface **20** to the outer recessed area **32** vertically between the bottom surface **20** and the predetermined elevation **38** while the transition **34** may extend horizontally from the bottom surface **20** to the inner recessed area **22** vertically between the bottom surface **20** and the predetermined elevation **38**. However, while the sweep section **36** and the transition **34** may extend over the same distance in a vertical direction or in height, the sweep section **36** may extend over a longer distance than the transition **34** in a horizontal direction or in length as shown in **FIG. 4**. The sweep section **36** may extend from an outer portion **22a** of the inner recessed area **22** to an outer portion **32a** of the outer recessed area **32** while the transition **34** may extend from an outer portion **22a** of the inner recessed area **22** to an inner portion **32b** of the outer recessed area **32** as shown in **FIG. 4**. In case both the sweep section **36** and the transition **34** are concavely curved, such a configuration may result in the radius of curvature of the sweep section **36** being larger than the radius of curvature of the transition **34**. As a result, the sweep section **36** reaches the predetermined elevation **38** in a more gradual manner than the transition **34** reaches the predetermined elevation **38**.

[0029] The sweep section **36** may be formed to intersect one of the edges of the periphery **28** as shown in **FIG. 3** such that the inner recessed area **22** is substantially surrounded by the transition **34** except at the sweep section **36**. In the present embodiment, the sweep section **36** is formed to intersect the proximal edge **30a** of the periphery **28** and the presence of the sweep section **36** on the cooktop **12** creates a discontinuity **40** in the outer recessed area **32** as shown in **FIGS. 2-3**. However, the discontinuity **40** may be at least partially concealed by the grate **18** when it is placed on the outer recessed area **32** such that the aesthetics of the cooktop **12** is not significantly affected by the sweep section **36**.

[0030] The sweep section **36** may facilitate cleaning of the cooktop **12** by allowing food particles to be removed using the sweep section **36**. Specifically, the food particles may be gathered and removed of the bottom surface **20** by wiping the particles out of the inner recessed area **22** along sweep section **36** using a piece of cloth or the like. Without the sweep section **36**, the cross-sectionally stepped configuration around the inner recessed area **22** due to the presence of the outer recessed area **32** would make it difficult to remove the food particles in this manner.

[0031] It will be apparent to those skilled in the art that various modifications and variations can be made without departing from the spirit and scope of the claimed apparatus or method.

CLAIMS

What is claimed is:

1. A cooking appliance including:
 - a cooktop including a bottom surface on which at least one gas burner is mounted, the cooktop further including a periphery and an inner recessed area, the inner recessed area substantially defined by the bottom surface, the at least one gas burner mounted on the inner recessed area, the cooktop further including a transition extending between the periphery and the inner recessed area and a sweep section extending between the periphery and the inner recessed area, the inner recessed area surrounded substantially by the transition except at the sweep section; and
 - a grate configured to be placed on the cooktop,
 - wherein the sweep section extends between the bottom surface and a predetermined elevation which is on the periphery and is above the bottom surface, the transition extends between the bottom surface and the predetermined elevation, and the sweep section is defined by a continuous surface and reaches the predetermined elevation in a more gradual manner than the transition reaches the predetermined elevation.
2. The cooking appliance of claim 1, wherein the periphery includes an outer recessed area, and the outer recessed area is recessed relative to the periphery.
3. The cooking appliance of claim 2, wherein the transition extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation, and the sweep section extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation.
4. The cooking appliance of claim 2, wherein the periphery substantially surrounds the outer recessed area which substantially surrounds the inner recessed area.
5. The cooking appliance of claim 4, wherein the grate is configured to be placed on the outer recessed area.
6. The cooking appliance of claim 4, wherein the continuous surface forms a discontinuity in the outer recessed area.

7. The cooking appliance of claim 6, wherein the discontinuity in the outer recessed area is concealed at least partially by the grate.
8. The cooking appliance of claim 2, wherein the cooktop is substantially rectangular such that the periphery includes a proximal edge, a distal edge and lateral edges, and the sweep section intersects the proximal edge.
9. A cooking appliance including:
 - a cooktop including a bottom surface on which at least one gas burner is mounted, the cooktop further including a periphery and an inner recessed area, the inner recessed area being recessed relative to the periphery, the inner recessed area substantially defined by the bottom surface, the cooktop further including a transition extending between the periphery and the inner recessed area and a sweep section extending between the periphery and the inner recessed area, the inner recessed area surrounded substantially by the transition except at the sweep section; and
 - a grate configured to be placed on the cooktop,
 - wherein the sweep section extends between the bottom surface and a predetermined elevation which is on the periphery and is above the bottom surface, the transition extends between the bottom surface and the predetermined elevation, a cross-section of the sweep section is concavely curved, a cross-section of the transition is concavely curved, and a radius of curvature of the sweep section is larger than a radius of curvature of the transition.
10. The cooking appliance of claim 9, wherein the periphery includes an outer recessed area, and the outer recessed area is recessed relative to the periphery.
11. The cooking appliance of claim 10, wherein the transition extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation, and the sweep section extends from the bottom surface to the outer recessed area between the bottom surface and the predetermined elevation.
12. The cooking appliance of claim 10, wherein the periphery substantially surrounds the outer recessed area which substantially surrounds the inner recessed area.
13. The cooking appliance of claim 12, wherein the grate is configured to be placed on the outer recessed area.

14. The cooking appliance of claim 12, wherein the continuous surface forms a discontinuity in the outer recessed area.
15. The cooking appliance of claim 14, wherein the discontinuity in the outer recessed area is concealed at least partially by the grate.
16. The cooking appliance of claim 10, wherein the cooktop is substantially rectangular such that the periphery includes a proximal edge, a distal edge and lateral edges, and the sweep section intersects the proximal edge.

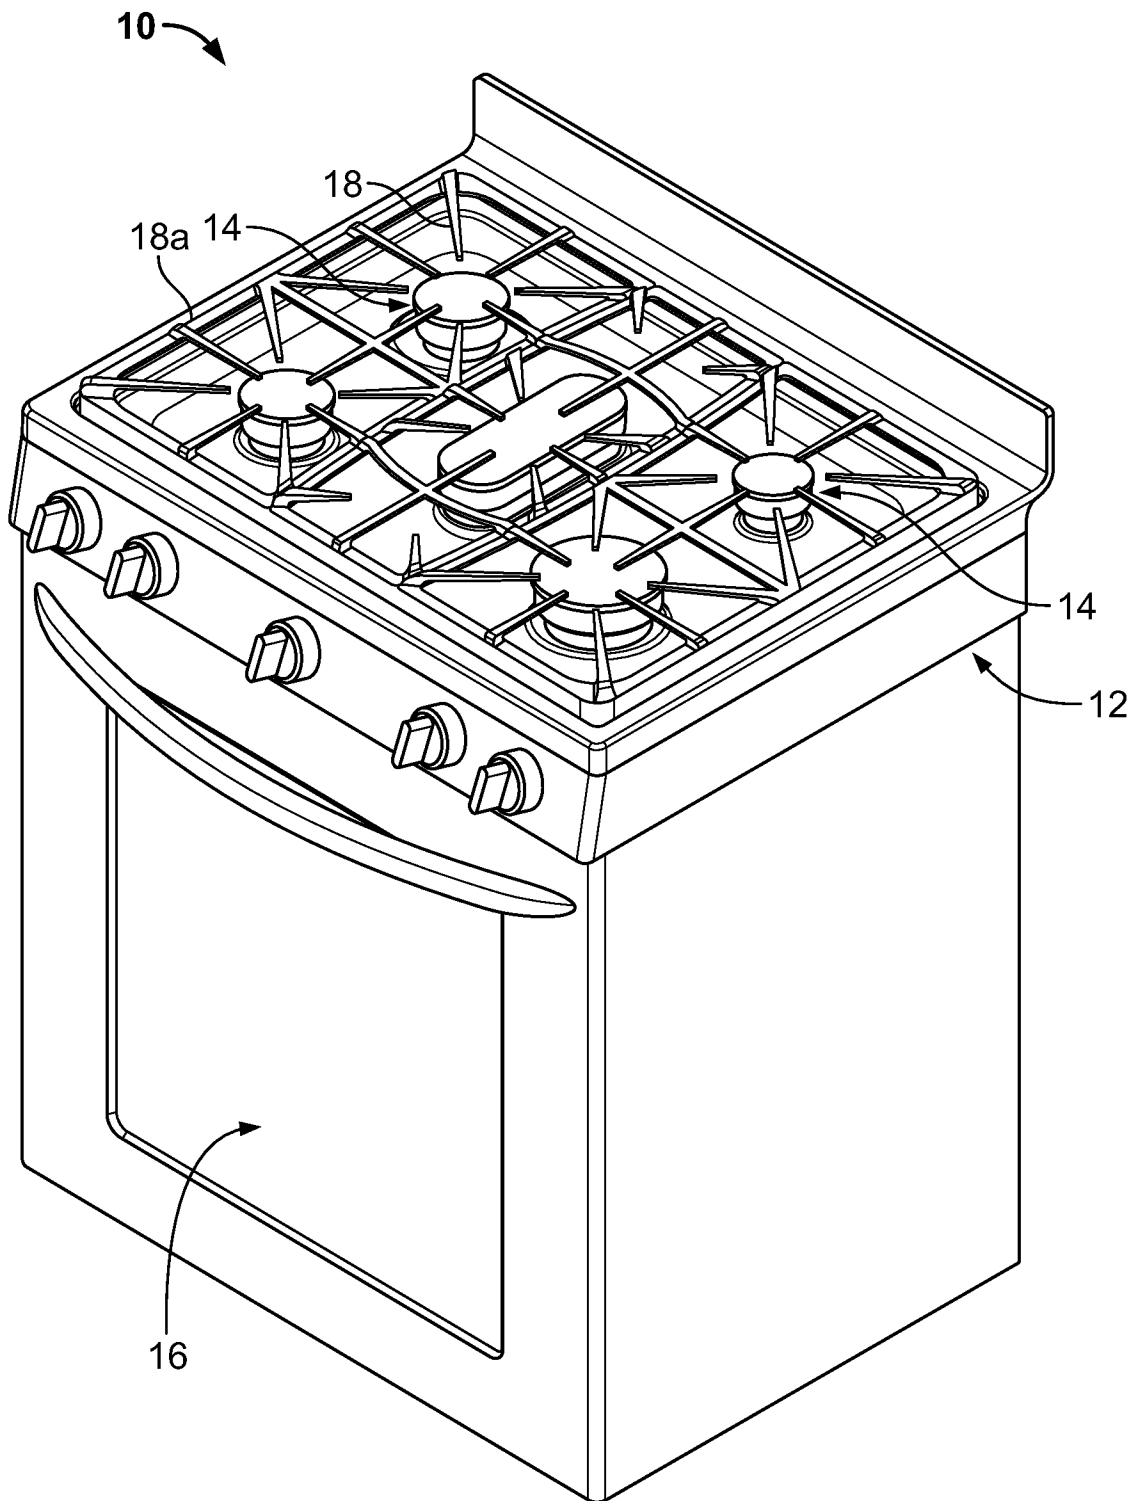
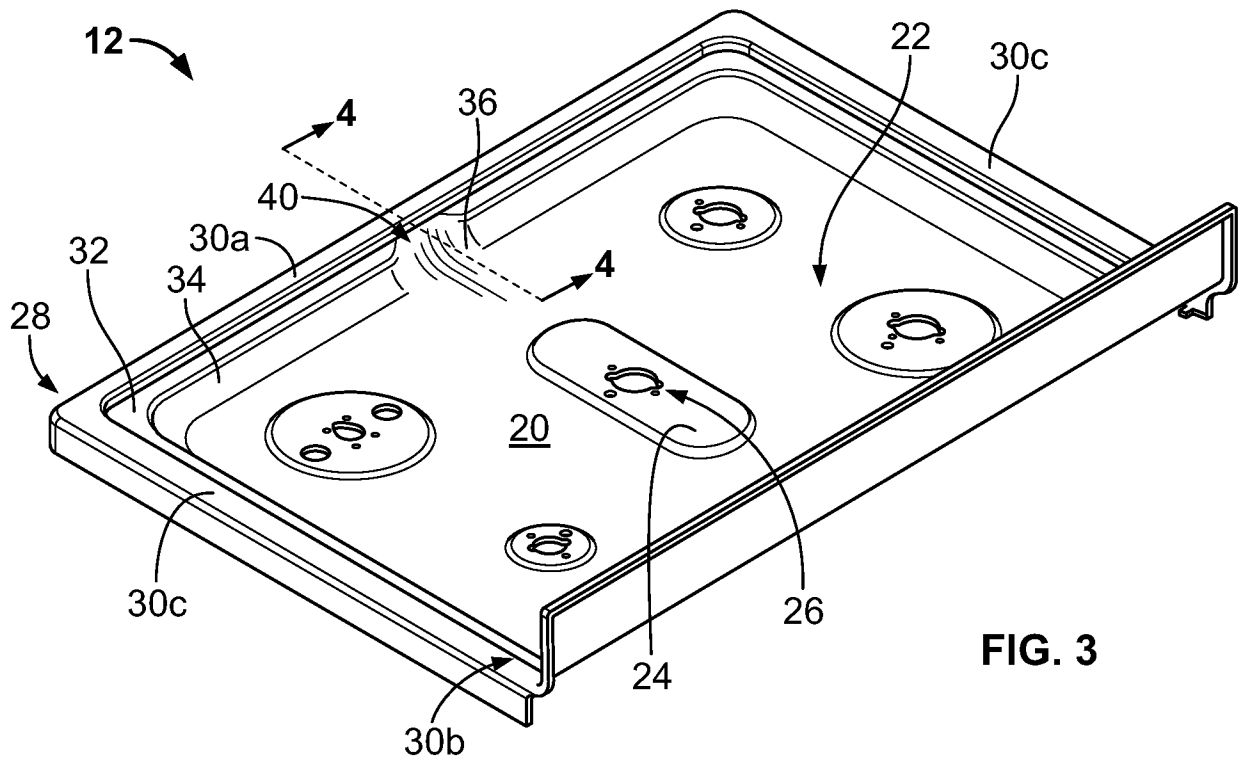
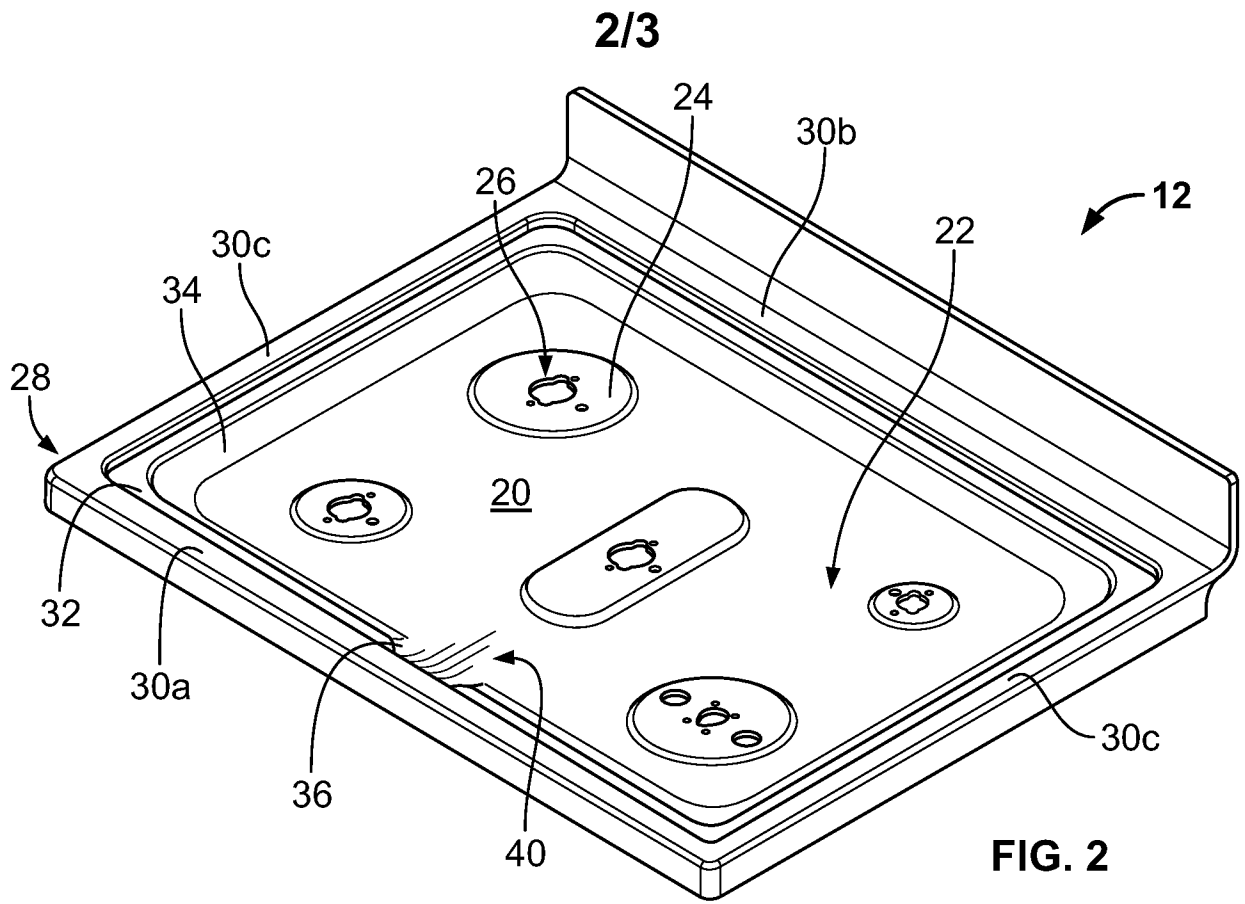


FIG. 1



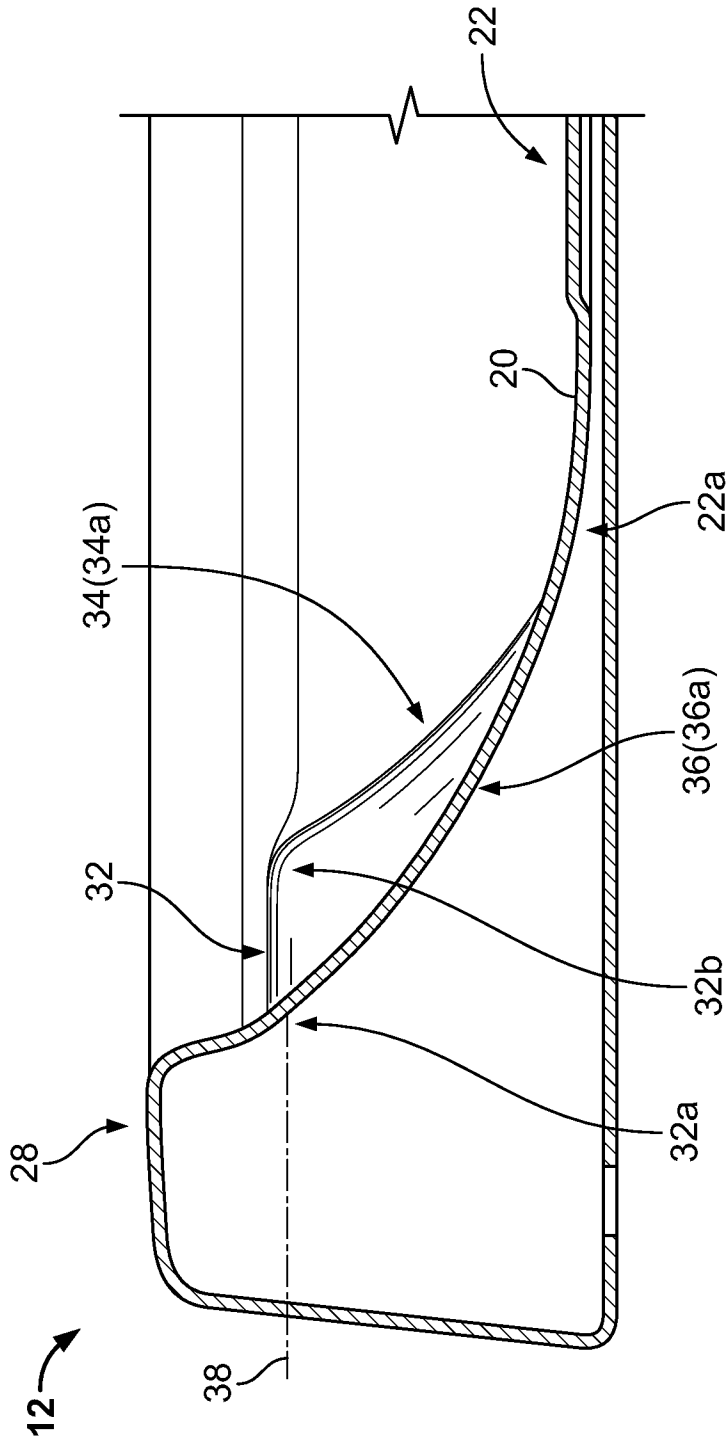


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/044777

A. CLASSIFICATION OF SUBJECT MATTER

INV. F24C15/10
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F24C A47J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2008/104832 A2 (INDESIT CO SPA [IT]; GASPARINI ALBERTO [IT]) 4 September 2008 (2008-09-04) page 2, line 28 - page 13; figure 1 -----	1-16
Y	CH 306 009 A (LE REVE SA [CH]) 31 March 1955 (1955-03-31) the whole document -----	1-16
A	JP S56 67047 U (RINNAI KK) 4 June 1981 (1981-06-04) the whole document -----	1-16
A	WO 03/060383 A1 (ARCELIK AS [TR]; BUEKUELMEZ BORA [TR]; YALCIN MUSTAFA [TR]) 24 July 2003 (2003-07-24) the whole document -----	1-16
	-/--	

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 August 2013

Date of mailing of the international search report

28/08/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Makúch, Milan

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/044777

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2005 291583 A (RINNAI KK) 20 October 2005 (2005-10-20) the whole document -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/044777

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008104832 A2	04-09-2008	EP 2122249 A2 US 2010326420 A1 WO 2008104832 A2	25-11-2009 30-12-2010 04-09-2008

CH 306009 A	31-03-1955	NONE	

JP S5667047 U	04-06-1981	NONE	

WO 03060383 A1	24-07-2003	AU 2002366991 A1 TR 200401375 T1 WO 03060383 A1	30-07-2003 22-11-2004 24-07-2003

JP 2005291583 A	20-10-2005	NONE	
