

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/014727 A1

(51) International Patent Classification⁷: **C09B 67/22**,
C08K 3/04, C09D 133/08, 5/36

(21) International Application Number:
PCT/EP2004/051374

(22) International Filing Date: 7 July 2004 (07.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/488,156 17 July 2003 (17.07.2003) US

(71) Applicant (for all designated States except US): **CIBA
SPECIALTY CHEMICALS HOLDING INC.** [CH/CH];
Klybeckstrasse 141, CH-4057 Basel (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BÄBLER, Fridolin**
[CH/BR]; Cond Vale dos Eucaliptos, Alameda Cedro 7,
25950-999 Quebra Frascos, Teresópolis RJ (BR).

(74) Common Representative: **CIBA SPECIALTY CHEM-
ICALS HOLDING INC.**; Patent Department, Klybeck-
strasse 141, CH-4057 Basel (CH).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: BLACK PIGMENT COMPOSITIONS



group of anthraquinone, perinone, perylene, diketopyrrolopyrrole, thioindigo, iminoisoindoline, iminoisoindolinone, quinacridone, 6,13-dihydroquinacridone, flavanthrone, dioxazine, indanthrone, anthrapyrimidine and quinophthalone, X is a cyclo hetero aliphatic group with at least one 5 or 6 atom ring or a hetero aromatic group with at least one 6 atom ring, M is hydrogen, a metal cation or nitrogen cation, k is 0 or 1, and m and n are each independently of the other from 0 to 4, wherein m and n are not simultaneously zero, which is useful for coloring high molecular weight material, like inks, plastics and in particular automotive coatings.

(57) Abstract: The present invention relates to black pigment compositions comprising (a) carbon black, and (b) a compound of the formula (1), wherein Q is a pigment or pigment intermediate radical selected from the

- 1 -

BLACK PIGMENT COMPOSITIONS

The present invention relates to black pigment compositions and a method of using the black compositions to color various substrates, such as high molecular weight material.

5

Carbon black is used in large quantities for the coloration and pigmentation of many substrates due to its strong color and relatively low cost. Carbon black can be produced by a number of different processes, for example, furnace black -, channel black-, gas black- or other thermal oxidative processes.

10

Such carbon black products are often tailor made for specific applications like plastics, automotive solvent or waterborne based paints or inks. These products can be lacking in ease of dispersibility. Furthermore, these products show a strong absorption in the near IR region. Thus, articles colored by carbon black heat up quickly when exposed to

15

sunlight, which is particularly problematic when used in car upholstery.

Another major drawback of carbon black is its color characteristics when used in different concentrations or in particular in combination with other organic, inorganic or effect pigments. Carbon black often tends to shift to an undesirable brownish hue. Thus, its

20

use for certain color styling is limited.

Black colored cars are popular worldwide. They are painted mainly with carbon black pigments. The main drawbacks of such pigments are their high viscosity and often poor gloss behavior.

25

Black organic pigments are known. For example, German Patent No. 2,451,780 describes N-substituted perylene tetracarboxylic acid diimides as black pigments for paints, plastics and inks.

- 2 -

Many patents also describe the use of pigment mixtures for the creation of black colorations. For example, U.S. Pat. No. 6,235,106 describes blue shade black pigment compositions useful in paints, inks and plastics, comprising a mixture of iron oxide, chromium oxide and manganese oxide. The iron oxide primarily contains yellow iron oxide while the manganese oxide contributes to the strength and blueness of the pigment.

Published Japanese Patent No. 04 -065,279 A2 describes lightfast black ink ribbons that are prepared from inks containing multiple light -resistant organic pigments. One such ink contains C.I. Pigment Yellow 123, C.I. Pigment Red 88, and C.I. Pigment Blue 15:6.

Published Japanese Patent No. 01 -074,277 describes a method of toning carbon black containing inks to reduce their reddish tint by mixing them with Cu phthalocyanine pigments obtained by treating phthalic acid and/or its derivatives, urea, and Cu or its compounds in organic solvents in the presence of catalysts and benzophenone -3,3',4,4'-tetracarboxylic acid, its anhydride, or imides.

Published Japanese Patent No. 10 -104,599A describes a method for coloring resin compositions for forming shading film for liquid crystal displays – consisting of a combination of organic pigments having the color yellow, blue and purple or the combination of organic pigments with yellow, red and blue color.

U.S. Pat. No. 5,546,998 describes colorant compositions containing at least two of 1) a red pigment, 2) an orange pigment, 3) a yellow pigment, 4) a green pigment, 5) a blue pigment and 6) a violet pigment. Each of the pigments must exhibit a particular reflectance. The colorant composition is described as being an achromatic black formed by additive mixing. An additive mixture of Pigment Green 7, Pigment Yellow 154 and Pigment Violet 19 is exemplified in Table 1.

- 3 -

U.S. Pat. No. 6,010,567 describes black -pigmented structured high molecular weight material for black matrixes for optical color filters. The patent relates to a black - pigmented high molecular weight organic material that is structured from a radiation -
5 sensitive precursor by irradiation. The pigmentation consists of colored organic pigments, at least one of which is in latent form before irradiation.

European Patent Application No. 23,318 describes gray to black colored thermoplastic film for laminated identity cards, containing white pigment and/or filler and a gray mixture
10 of colored organic pigments. The film is specified for the production of laminates for identity, checks or credit cards. It has an inconspicuous appearance and strong covering power, making it especially useful for purposes where forgery needs to be made difficult, but is easily detected. Preferred materials are (A) Sb oxide, kaolin, silica, chalk, Ba sulphate, Ti dioxide and ZnS; (B) mixtures of red and green pigments in 6 -12:10 weight
15 ratio; violet and green in 5-15:10 weight ratio; and violet, yellow and blue in 20 to 30 : 10 to 50 : 60 to 10 weight ratios.

Other patents describe the surface treatment of carbon black to improve the pigment properties for application in coatings and inks.

20

For example U.S. Pat. No. 5,922,118 describes ink jet compositions comprising an aqueous vehicle and a modified colored pigment comprising colored pigment having attached at least one organic group, the organic group comprising a) at least one aromatic group or a C₁-C₁₂alkyl group, and b) at least one ionic group, at least one
25 ionizable group, or a mixture of an ionic group and an ionizable group, wherein the at least one aromatic group or C₁-C₁₂alkyl group of the organic group is directly attached to the colored pigment and the organic group is present at a treatment level of from about 0.10 to about 4.0 micromoles/m² of the colored pigment used, based on the nitrogen surface area of the colored pigment, wherein said colored pigment comprises carbon,

- 4 -

anthraquinones, phthalocyanine blues, phthalocyanine greens, diazos, monoazos, pyranthrones, perylenes, heterocyclic yellows, quinacridones, (thio)indigoids and mixtures thereof. Such modified carbon products have better pigment properties when applied in ink jet systems, but they require sophisticated preparation procedures and
5 therefore are uneconomical.

U.S. Pat. No. 5,962,574 describes a primer coating composition capable of protecting a substrate susceptible to degradation by ultraviolet light, said composition serving as a primary coat on said substrate beneath a multi layer color base coat/clear top coat finish.
10 The UV light blocking pigments used are carbon black pigments surface modified with pigment derivative codispersant along with polymer dispersant. The pigment codispersant is a copper phthalocyanine derivative such as sulfonated copper phthalocyanine.

15 Sulfonated copper phthalocyanine can significantly improve the rheological properties of carbon black pigments when applied in conjunction with polymeric dispersants. However, sulfonated copper phthalocyanine has a very strong blue color and the addition of only small quantities can inopportunately shift the hue of the carbon black. Furthermore it is not sufficiently weather fast for employment in an automotive top coating, since the hue of
20 such a coating can change quickly on exposure.

The state of the art offers various ways for the generation of black colors. However, no carbon black compositions are described that show universal pigment properties for an application in a choice of substrates, in particular top automotive paint coatings.

25 Surprisingly, it has been found that novel and useful black pigment compositions can be prepared by mixing carbon black with particular organic pigment intermediates or pigment derivatives. Such black pigment compositions show a deep black color characteristic and

- 5 -

outstanding rheological and gloss behavior when employed in high molecular weight materials, in particular in paints and inks.

- 5 Accordingly, the present invention provides black pigment compositions, comprising
 (a) carbon black, and
 (b) a compound of the formula



- 10 wherein

Q is a pigment or pigment intermediate radical selected from the group consisting of anthraquinone, perinone, perylene, diketopyrrolopyrrole, thioindigo, iminoisoindoline, iminoisoindolinone, quinacridone, 6,13 -dihydroquinacridone, flavanthrone, dioxazine, indanthrone, anthrapyrimidine and quinophthalone,

- 15 X is a cyclo hetero aliphatic group or a hetero aromatic group with at least one 5 or 6 atom ring,

M is hydrogen, a metal cation or nitrogen cation,

k is 0 or 1, and

- m and n are each independently of the other from 0 to 4, wherein m and n are not equal
 20 to zero simultaneously.

- Carbon black pigments which come into consideration as component (a) are, for example, lamp or vegetable black, C.I. Pigment Black 6; bone or ivory black, C.I. Pigment Black 9; or furnace or channel black, C.I. Pigment Black 7; preferably C.I. Pigment Black
 25 7.

- 6 -


Generally, the carbon black is in a granulated or preferably a powder form of a high specific surface area in the range of at least 50 m²/g, preferably 100 to 600 m²/g and especially 150 to 600 m²/g as measured by the BET method. Such carbon black is known and manufactured in large quantities.

5


In a preferred embodiment of the present invention Q is a pigment or pigment intermediate radical selected from the group consisting of anthraquinone, perinone, perylene, diketopyrrolopyrrole, iminoisoindolinone, iminoisoindoline, 6,13 - dihydroquinacridone, quinacridone, dioxazine, flavanthrone or indanthrone.

10

In a particular preferred embodiment of the present invention Q is a pigment or pigment intermediate radical selected from the group consisting of 6,13 -dihydroquinacridone of formula

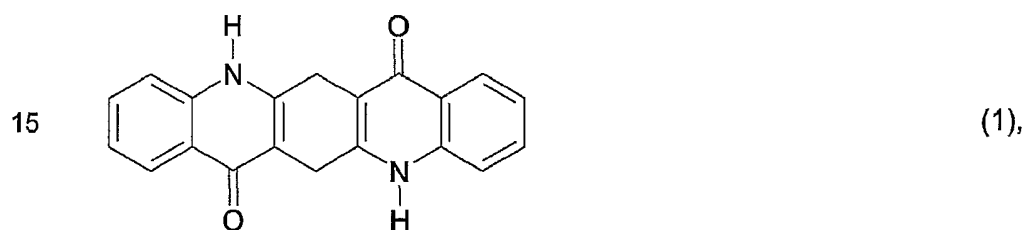


quinacridone of formula

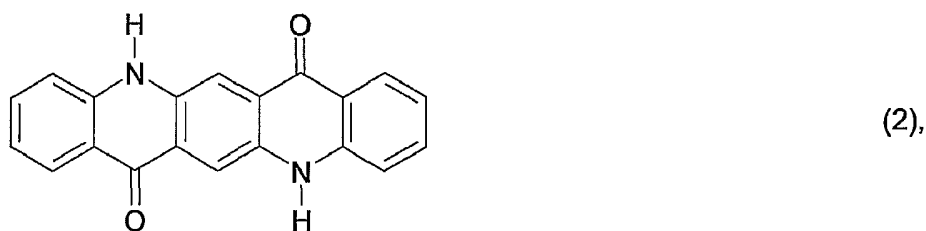

and indanthrone of formula

20

- 7 -

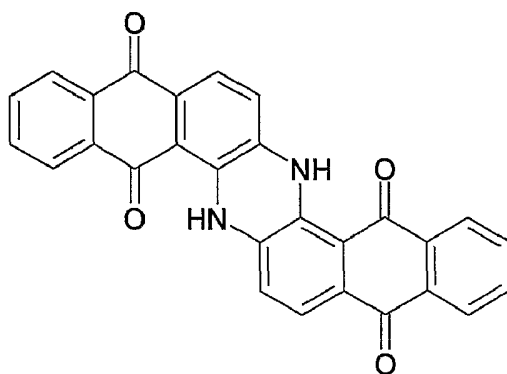

(3).

Especially Q is a pigment or pigment intermediate radical selected from the group of 6,13-dihydroquinacridone radical of formula (1) and quinacridone radical of formula (2).

5

Cyclo-hetero aliphatic groups X with at least one 5 or 6 atom ring are, for example, 3-pyrroline, pyrrolidine, imidazolidine, piperidine, piperazine, morpholine, indoline, barbituric acid, hydantoin, xanthine, melamine, phthalimido or benzosulfimido, preferably phthalimido or benzosulfimido.

10


Hetero aromatic groups with at least one 5 or 6 atom ring are, for example, pyrrole, furane, thiophene, oxazole, thiazole, imidazole, pyrazole, pyridine, pyrazine, pyrimidine, pyridazine, purine, indole, isoindole, quinoline, isoquinoline, carbazole, phenothiazine, benzothiazole, benzimidazole or benzimidazolone, preferably oxazole, thiazole,

15 imidazole, pyrazole, benzothiazole or benzimidazole, especially imidazole or pyrazole.

Especially preferred examples of a cyclo-hetero aliphatic group or a hetero aromatic group with at least one 5 or 6 atom ring linked to Q are

20 an imidazole of formula (X-1)


- 8 -

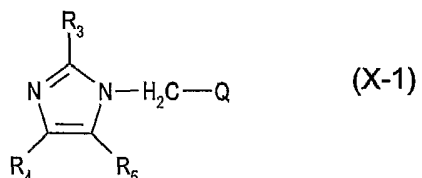

wherein R_3 , R_4 and R_5 are, each independently of the other, hydrogen, chlorine, bromine, fluorine, C_1 - C_6 alkyl, C_1 - C_6 alkoxy or an isocyclic or heterocyclic aromatic radical;


5

a pyrazole of formula (X-2)



10 wherein R_6 , R_7 and R_8 are, each independently of the other, hydrogen, chlorine, bromine, fluorine, C_1 - C_6 alkyl, C_1 - C_6 alkoxy or an isocyclic or heterocyclic aromatic radical;

a phthalimide of formula (X-3)

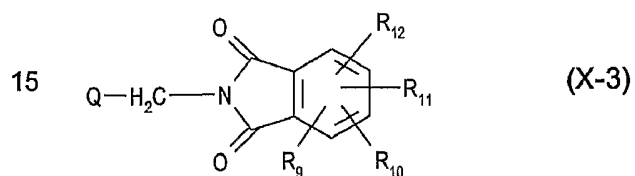


15

wherein R_9 , R_{10} , R_{11} and R_{12} are, each independently of the other, hydrogen, chlorine, bromine, fluorine, C_1 - C_6 alkyl, C_1 - C_6 alkoxy or an isocyclic or heterocyclic aromatic radical;

20 a compound of formula (X-4)


- 9 -

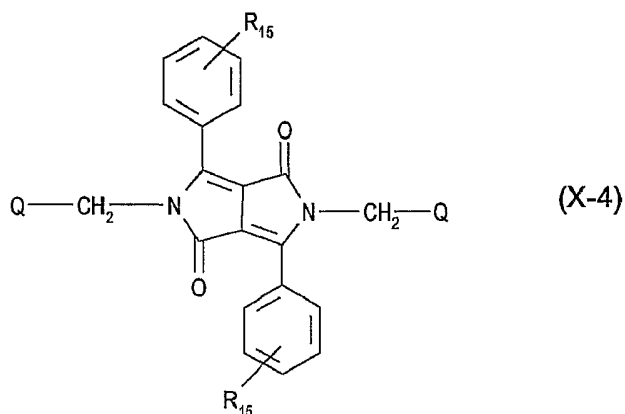

wherein R_{15} is hydrogen, chlorine, bromine, fluorine, C_1-C_6 alkyl, C_1-C_6 alkoxy, phenyl, di- C_1-C_6 alkylamino, C_1-C_6 alkylthio, phenylthio or phenoxy; and

5

an imidazole of the formula (X-5)



- 10 wherein R_{27} and R_{28} are, each independently of the other, hydrogen, chlorine, bromine, fluorine, C_1-C_6 alkyl, C_1-C_6 alkoxy or an isocyclic or heterocyclic aromatic radical.

The above exemplified cyclo-hetero aliphatic or hetero aromatic groups can optionally be substituted with one or more radicals selected from the group consisting of halogen, C_1-C_6 alkyl, C_1-C_6 alkoxy, C_6-C_{10} aryl, C_7-C_{16} aralkyl, C_5-C_7 cycloalkyl, cyano, carboxy, carbamoyl, hydroxyl and amino.

15

- 10 -

As C₁-C₆alkyl radicals there come into consideration straight-chained or branched radicals, for example, methyl, ethyl, n-propyl, iso-propyl, n-butyl, iso-butyl, sec-butyl and tert-butyl, n-pentyl, iso-pentyl and n-hexyl, preferably methyl and ethyl.

- 5 As C₁-C₆alkoxy radicals there come into consideration straight-chained or branched radicals, for example, methoxy, ethoxy, n-propoxy, isopropoxy, n-butoxy, sec-butoxy, tert-butoxy, isobutoxy, n-pentyloxy, iso-pentyloxy and n-hexyloxy, preferably methoxy and ethoxy.
- 10 As C₆-C₁₀aryl radicals there come into consideration, for example, phenyl, 1-naphthyl and 2-naphthyl which are unsubstituted or substituted by, for example, C₁-C₄alkyl, C₁-C₄alkoxy, cyano, nitro or halogen, such as fluoro, chloro or bromo.

- As C₇-C₁₆aralkyl radicals there come into consideration, for example, benzyl, phenethyl and naphthylmethyl, preferably benzyl, which are unsubstituted or substituted by, for example, C₁-C₄alkyl, C₁-C₄alkoxy, cyano, nitro or halogen, such as fluoro, chloro or bromo.
- 15

- As C₅-C₇cycloalkyl radicals there come into consideration, for example, cyclopentyl, cyclohexyl and cycloheptyl, preferably cyclohexyl, which are unsubstituted or substituted by, for example, C₁-C₄alkyl.
- 20

- The cyclo-hetero aliphatic or hetero aromatic group X can be bonded to the radical Q, or to the methylene bridge, either directly or, for example, via an oxygen, sulfur or nitrogen atom, or X is bonded to the radical Q, or to the methylene bridge, by a nitrogen atom being part of the cyclo-hetero aliphatic or hetero aromatic ring. Preferably X is bonded to the radical Q or to the methylene bridge by a nitrogen atom which is part of the cyclo-hetero aliphatic or hetero aromatic ring.
- 25


- 11 -

In a preferred embodiment of the present invention X is a radical selected from the group consisting of imidazolyl, 3,5 -dimethylpyrazol -1-yl-, phthalimido and benzosulfimido.

M as a nitrogen cation radical is, for example, represented by the formula $N^+(R)_4$,
 5 wherein each R independently of the other is hydrogen, C_7-C_{16} alkyl, C_1-C_{18} alkyl or phenyl which is unsubstituted or substituted by C_1-C_{18} alkyl.

Examples of nitrogen cations are:

- unsubstituted ammonium,
- 10 - mono-, di-, tri- or tetra- C_{1-4} alkylammonium, such as methylammonium, ethylammonium, 3-propylammonium, isopropylammonium, butylammonium, sec - butylammonium, isobutyl ammonium, 1,2-dimethylpropylammonium or 2 - ethylhexylammonium, dimethylammonium, diethylammonium, dipropylammonium, diisopropylammonium, dibutylammonium, diisobutyl ammonium, di-sec-
- 15 butylammonium, di-2-ethylhexylammonium, N-methyl-n-butylammonium or N-ethyl-n-butylammonium, trimethylammonium, triethylammonium, tripropylammonium, tributylammonium, N,N-dimethylethylammonium, N,N -dimethylisopropylammonium, N,N-dimethylbenzylammonium or trimethylcetylammmonium (trimethylhexadecylammonium), tributylbenzylammonium,
- 20



- mono-, di-, tri- or tetra- C_{8-16} alkylammonium, such as (notional representation of the ammonium cation of Primene 81R®), C_{1-4} alkoxy- C_{1-4} alkylammonium, such as 2-methoxyethylammonium, bis(2 - methoxyethyl)ammonium, 3-methoxypropylammonium or ethoxypropylammonium,
- 25 - mono-, di- or tri-(hydroxy- C_{1-4} alkyl)ammonium, such as mono -, di- or tri-ethanolammonium, mono-, di- or tri-isopropanolammonium, N-methyl- or N,N-dimethyl-ethanolammonium, -propanolammonium or -isopropanolammonium, N -methyl-diethanolammonium, -dipropanol ammonium or -diisopropylammonium, N -

- 12 -

ethyl-diethanolammonium, -dipropanolammonium or -diisopropylammonium, N-propyl-diethanolammonium, -dipropanolammonium or -diisopropylammonium,

Polyammonium cations, especially diammonium cations, are likewise suitable. Preferred
 5 diammonium cations are derived from the following amines: 1,2 -diaminoethane, 1,2-diamino-1-methylethane, 1,2-diamino-1,2-dimethylethane, 1,2-diamino-1,1-dimethylethane, 1,2-diaminopropane, 1,3-diaminopropane, 1,3-diamino-2-hydroxypropane, N-methyl-1,2-diaminoethane, 1,4-diazacyclohexane 1,2-diamino-1,1-dimethylethane, 2,3-diaminobutane, 1,4-diaminobutane, N-hydroxyethyl-1,2-
 10 diaminoethane, 1-ethyl-1,3-diaminopropane, 2,2-dimethyl-1,3-diaminopropane, 1,5-diaminopentane, 2-methyl-1,5-diaminopentane, 2,3-diamino-2,3-dimethylbutane, N-2-aminoethylmorpholine, 1,6-diaminohexane, 1,6-diamino-2,2,4-trimethylhexane, N,N-dihydroxyethyl-1,2-diaminoethane, N,N-dimethyl-1,2-diaminoethane, 4,9-dioxo-1,12-diaminododecane, 1,2-diaminocyclohexane, 1,3-diamino-4-methylcyclohexane, 1,2-
 15 diaminocyclohexane, 1-amino-2-aminomethyl-2-methyl-4,4-dimethylcyclohexane, 1,3-diaminomethylcyclohexane, N-2-aminoethylpiperazine, 1,1-di(4-amino-cyclohexyl)methane, 1,1-di(4-aminophenyl)methane, N,N'-diisopropyl-p-phenylene-diamine, N,N'-di-sec-butyl-p-phenylenediamine, N,N'-bis(1,4-dimethyl-pentyl)-p-phenylenediamine, N,N'-bis(1-ethyl-3-methyl-pentyl)-p-phenylenediamine, N,N'-bis(1-
 20 methyl-heptyl)-p-phenylenediamine, N,N'-dicyclohexyl-p-phenylenediamine, N,N'-diphenyl-p-phenylenediamine, N,N'-di(2-naphthyl)-p-phenylenediamine, N-isopropyl-N'-phenyl-p-phenylenediamine, N-(1,3-dimethyl-butyl)-N'-phenyl-p-phenylenediamine, N-(1-methyl-heptyl)-N'-phenyl-p-phenylenediamine, N-cyclohexyl-N'-phenyl-p-phenylendiamine and N,N'-dimethyl-N,N'-di-sec-butyl-p-phenylenediamine.

25

Especially preferred examples of the quaternary nitrogen cation are ammonium, trimethylcetylammmonium, tributylbenzyla mmonium.

- 13 -

As C₇-C₁₆alkyl radicals there come into consideration, for example, the radicals indicated above.

As C₁-C₁₈alkyl radicals there come into consideration straight-chained or branched radicals, for example, methyl, ethyl, n-propyl, iso-propyl, n-butyl, iso-butyl, sec-butyl and tert-butyl, n-pentyl, iso-pentyl, n-hexyl, n-heptyl, n-octyl, n-nonyl, n-decyl, n-undecyl, n-dodecyl, n-tetradecyl, n-hexadecyl and n-octadecyl.

M as a metal cation is, for example, a mono-, di- or trivalent metal cation, such as sodium, potassium, magnesium, calcium, strontium, barium, aluminum and zinc, preferably an alkali metal, an alkaline earth metal, zinc or aluminum cation.

In a preferred embodiment M is hydrogen, a mono-, di- or trivalent metal cation or nitrogen cation, especially hydrogen, an alkali metal, an alkaline earth metal, zinc or aluminum cation, in particular hydrogen, a sodium, calcium or aluminium cation, and most preferably an aluminium cation.

Preferably k is the number 1.

Preferably the sum of m and n is from 0.2 to 4.

In an interesting embodiment of the present invention component (b) is a compound of the formula



wherein

Q is a pigment or pigment intermediate radical selected from the group of quinacridone and 6,13-dihydroquinacridone,

- 14 -

X is a radical selected from the group of imidazolyl, 3,5 -dimethylpyrazol-1-yl-, phthalimido and benzo sulfimido,

k is 1, and

n is 1 or 2.

5

In another interesting embodiment of the present invention component (b) is a compound of the formula



wherein

10 Q is a pigment or pigment intermediate radical selected from the group of quinacridone and indanthrone,

M is a mono-, di- or trivalent metal cation or ammonium cation, and

m is from 0.5 to 2, preferably from 0.8 to 1.1.

15 M in the compound of formula (1b) has the preferred meanings given above.

The radical Q in the compound of formula (1b) is preferably unsubstituted, unsubstituted meaning that there is no substituent other than hydrogen. However, blue-colored, substituted, sulfonated indanthrones and red, magenta or violet colored, substituted

20 quinacridones are also effective in the inventive compositions. Thus, certain substituted indanthrones or quinacridones, especially those substituted in the phenyl rings by chlorine, bromine or C₁-C₄alkyl, such as methyl, can be used as component (b) of the inventive compositions.

25 Quinacridones and indanthrones are known as pigments. The sulfonated quinacridones and indanthrones utilized as component (b) are known as dyestuffs and as dyestuff intermediates and can be prepared by known methods, for example, by sulfonating the quinacridone or indanthrone by sulfonation procedures known in the art.

- 15 -

The pigment intermediate employed as component (b) preferably is a 6,13-dihydro-quinacridone derivative as described for example in U.S. patent No. 6,225,472 B.

5 Furthermore, quinacridone derivatives such as aromatic sulfonic acid methyl quinacridone derivatives crystal growth directors as described in U.S. patent No. 6,264,733 B1, benzothiazolyl or benzimidazolyl quinacridone derivatives described in U.S. patent No. 5,868,828; and particularly the pyrazolyl methyl quinacridone derivatives as described in U.S. Patent No. 5,334,727 are also suitable as a component (b), alone or
10 in mixture with the above mentioned pigment derivatives of formula (1b).

In general, the compositions contain from 50 to 95%, preferably 70 to 90%, especially 75 to 85% by weight of carbon black and from 5 to 50%, preferably 10 to 30%, especially 15 to 25% by weight of the compound of formula (1) as given above, based on the total
15 weight of carbon black and the compound of formula (1).

The compositions of the present invention are prepared by conventional methods, for example, by mixing the individual components in the desired ratio, preferably by dry mixing the corresponding components (a) and (b).

20

The dry mixing can be executed in any suitable equipment such as a closed container, which is rolled on a roller gear or shaken on a shaker. Suitable blenders also include the TURBULA mixer from W. Bachofen, Basel, Switzerland, or the P-K TWIN-SHELL INTENSIFIER BLENDER from Patterson-Kelley Division, East Stroudsburg, PA, or other
25 vertical or horizontal commercially available blenders.

The inventive pigment compositions are "uniform blends" of the carbon black and organic pigment derivative, a uniform blend being a physical mixture of the carbon black and

- 16 -

pigment derivative wherein the pigment derivative is evenly distributed in the carbon black.

For the preparation of the inventive carbon black compositions having the desirable outstanding pigment properties it is preferred that component (b) is in a dry powder form, which can be easily and effectively blended with a small particle size carbon black wherein the particle size has a surface area of about 50 m²/g or greater.

Typically the compound of formula (1) is prepared by reaction in concentrated sulfuric acid followed by precipitation in water or ice water. The resulting suspension is filtered, washed to a pH of 4.5 to 7.5 and dried.

Suitable drying equipment is for example spinflash-, luwa-, venvuleth- or tray dryer. The resulting product is micro pulverized, for example with a hammer mill, or air-jet milled. Or the washed aqueous presscake can be reslurried in water followed by spray drying.

To improve the dispersibility behavior of the compound of formula (1) a texture-improving agent is preferably incorporated during its synthesis or more preferably after its preparation into the aqueous acidic slurry prior to the filtration, or it can be mixed into the aqueous washed presscake, in an amount of from 0.05 to 20%, preferably 1 to 10% by weight, based on the weight of the compound of formula (1).

Texture-improving agents are especially useful as an additional component that improves the properties of the inventive pigment derivative. Suitable texture-improving agents include fatty acids having at least 12 carbon atoms, and amides, esters or salts of fatty acids.

Typical texture-improving agents are selected from the group consisting of fatty acids having at least 12 carbon atoms, fatty acid amides having at least 12 carbon atoms, fatty acid esters having at least 12 carbon atoms, salts of a fatty acid having at least 12 carbon

- 17 -

atoms and fatty amines having at least 12 carbon atoms, fatty alcohols having at least 12 carbon atoms, ethoxylated fatty alcohols having at least 12 carbon atoms, polyols, glycerol mono stearates, polyvinylalcohols, polyvinylpyrrolidones, epoxidized soy bean oils, waxes, resin acids and resin acid salts.

5

Furthermore it is possible to add other colorants like dyes, organic or inorganic pigments or effect pigments or additives such as surfactants, antifoaming agents, inorganic fillers such as talc or mica, UV-absorber, light stabilizers like the HALS before, during or after the isolation process of the pigment derivative. The amount of such colorants or
10 additives is 0 to 40 weight percent, preferably 0.1 to 20% by weight, based on the amount of the compound of formula (1).

Thus, the present invention relates to a process for the preparation of new strongly black pigment compositions, which offer the possibility of the creation of new color shades
15 when applied in mixture with other pigments, for example effect pigments.

The present black pigment composition is suitable as coloring matter for inorganic or organic substrates. It is highly suitable for coloring high molecular weight materials which can be processed to fibers, cast and molded articles or which are used in ink and coating
20 compositions such as solvent or water based coatings, which are conventionally employed in the automobile industry, especially in acrylic/ melamine resin, alkyd/melamine resin or thermoplastic acrylic resin systems, as well as in powder coatings and UV/EB cured coating systems.

25 Thus, the high molecular weight organic material is preferably an industrial paint, automotive paint, ink, powder coating, UV/EB cured coating or ink.

Suitable high molecular weight organic materials include thermoplastics, thermoset plastics or elastomers, natural resins or casein for example, cellulose ethers; cellulose

- 18 -

esters such as ethyl cellulose; linear or crosslinked polyurethanes; linear, crosslinked or unsaturated polyesters; polycarbonates; polyolefins such as polyethylene, polypropylene, polybutylene or poly-4-methylpent-1-ene; polystyrene; polysulfones; polyamides; polycycloamides; polyimides; polyethers; polyether ketones such as polyphenylene
5 oxides; and also poly-p-xylene; polyvinyl halides such as polyvinyl chloride, polyvinylidene chloride, polyvinylidene fluoride or polytetrafluoroethylene; acrylic polymers such as polyacrylates, polymethacrylates or polyacrylonitrile; rubber; silicone polymers; phenol/formaldehyde resins; melamine/formaldehyde resins; urea/formaldehyde resins; epoxy resins; styrene butadiene rubber; acrylonitrile-butadiene
10 rubber or chloroprene rubber; singly or in mixtures.

Generally, the inventive black pigment composition is used in an effective pigmentation amount, for example, of 0.01 to 30% by weight, preferably 0.1 to 10% by weight, based on the weight of the high molecular weight organic material to be pigmented. Thus, the
15 present invention also relates to a pigmented plastic composition which comprises a plastic material, and an effective pigmentation amount of a black pigment composition prepared according to a process of the present invention, and to a process for preparing said pigmented coating and plastic compositions.

20 Such products show outstanding pigment properties and, due to their unique black color, offer new styling opportunities. Due to their outstanding pigment properties, such as excellent dispersibility behavior, weatherability, high heat stability, excellent rheological properties, high color strength, high gloss behavior and jetness as well as migration, bleed and over spraying fastness properties, they can be used for a variety of
25 applications.

Without limiting this invention to any particular theory, it is believed that the inventive component (B) can be absorbed onto the carbon black particles during the dispersion

- 19 -

step. It therefore prevents flocculation and thus increases the wettability and compatibility to the polymeric binder system.

To obtain different shades, it is also possible to add inorganic or polymeric fillers or other
5 chromophoric components such as organic or inorganic pigments such as white, colored, effect, fluorescent or phosphorescent pigments, in any amount, to the high molecular weight organic compounds, in addition to the black pigment compositions of this invention.

10 The high molecular weight organic materials are pigmented with the pigments of the present invention by mixing the pigments, if desired in the form of a masterbatch, into substrates using high shear techniques including roll mills or a mixing or grinding apparatus. The pigmented material is then brought into the desired final form by known methods, such as calendaring, pressing, extruding, brushing, casting or injection molding.

15 Although the new black pigment compositions show good light and heat stability, it can be advantageous to apply the present compositions in the presence of commonly known and commercially available antioxidants, UV absorbers, light stabilizers, processing agents and so forth.

20 For pigmenting coatings, varnishes and printing inks, the high molecular weight organic materials and the inventive pigmentary compositions, together with optional additives such as fillers, other pigments, siccatives, light - or UV- stabilizers, are finely dispersed in a common organic solvent or mixture of solvents including water. The procedure may be
25 such that the individual components by themselves, or also several jointly, are dispersed or dissolved in the solvent and subsequently all the components are mixed.

The inventive black pigment compositions have good rheological properties, and are particularly suitable for preparing aqueous and solvent based coatings conventionally

- 20 -

employed in the ink-, industrial paint- or automotive industry, especially in acrylic/ -
melamine resin, alkyd/melamine resin or thermoplastic acrylic resin systems, as well as in
powder coatings and UV/EB cured coating systems. They can advantageously be
incorporated in paint system at a higher pigment loading as compared to the currently
5 available carbon black pigments.

Due to their outstanding heat stability the inventive black pigment compositions are
particularly appropriate for coloring thermoplastics including polypropylene, polyethylene,
soft, medium hard and hard polyvinyl chloride, ABS, P ES and nylon. For example in soft
10 and medium hard polyvinyl chloride very attractive, black, migration resistant colorations
can be generated.

The colorations obtained show unique reflection spectra and for example in plastics,
filaments, have good all -round fastness properties such as high migration resistance,
15 heat and light stability and weathering behavior.

The black pigment compositions of this invention are also suitable for use as colorants for
paper such as security paper, leather, solid or liquid polymeric material, mineral oil,
inorganic materials, seeds, and in cosmetics.

20

The following examples illustrate various embodiments of the invention, but the scope of
the invention is not limited thereto. In the examples, all parts are by weight unless
otherwise indicated. The coloristic data are obtained utilizing a CS -5 CHROMA
SENSOR spectrophotometer. The surface areas are measured by the BET method.

25

The following Examples illustrate the invention in more detail. They are not to be
construed as limiting the instant invention in any manner whatsoever. The invention is
declared to cover all changes and modifications of the specific examples that do not
constitute a departure from the spirit and scope of the invention.

- 21 -

PAGE INTENTIONALLY LEFT BLANK

- 22 -

Example 1

100 grams quinacridone mono sulfonic acid aluminum salt is prepared following Example II, U.S. Patent No. 3,386,843; however, instead of direct isolation in conventional fashion as described in Example II, 4 grams 1,2 -dodecanediol are added, the aqueous
5 suspension is stirred for 1 hour at 70 °C, cooled to 40 to 50 °C and filtered. The presscake is washed with water and dried. The dried 1,2 -dodecanediol treated presscake is micro pulverized on a BANTAM micro pulverizer using a 0.027 inch screen and 14000 RPM rotating speed yielding a powdery quinacridone mono sulfonic acid aluminum salt.

10

Example 2

Starting from quinacridone crude a 3,5 -dimethylpyrazol-1-methyl quinacridone derivative is prepared following the procedure of Example 1 in US Patent No 5,334,727. Instead of drying the presscake, the presscake is reslurried in water in the presence of 4 percent by
15 weight of 1,2-dodecanediol and stirred for 1 hour at 70 °C followed by filtering at 40 to 50 °C. The dried 1,2-dodecanediol treated presscake is micro pulverized on a BANTAM micro pulverizer using a 0.027 inch screen at 14000 RPM rotating speed yielding a powdery 3,5-dimethylpyrazol-1-methyl quinacridone derivative.

20 Example 3

Into a beaker equipped with a stirrer, a solution of 15 g X -Dresinate from HERCULES in 200 ml water is added, followed by 543 g of an aqueous presscake containing 75 grams 3,5-dimethylpyrazol-1-methyl quinacridone derivative and 487 g aqueous presscake containing 75 g quinacridone mono sulfonic acid. The mixture is stirred up and the
25 resulting suspension is stirred for 1 hour at 30 to 40 °C. The pH of the alkaline suspension is adjusted to 4 to 5 by the addition of acid, precipitating the resin. The red suspension is filtered. The press cake is washed with water and dried.

- 23 -

The dried presscake is micro pulverized on a BANTAM micro pulverizer using a 0.027 inch screen at 14000 RPM rotating speed, yielding a powdery resinated quinacridone mono sulfonic acid aluminum salt/3,5 -dimethylpyrazol-1-methyl quinacridone mixture.

5 Example 4

An aqueous presscake containing 50 g indanthrone sulfonic acid is reslurried in water in the presence of 2 g lauric acid. The suspension is stirred for 1 hour at 60 to 70 °C then filtered at 30 – 40 °C. The presscake is washed with water and dried followed by micro pulverization on a BANTAM micro pulverizer using a 0.027 inch screen at 14000 RPM
10 rotating speed yielding a powdery lauric acid treated indanthrone sulfonic acid.

Example 5

An aqueous presscake containing 50 g o -benzo sulfimido methyl 6,13 - dihydroquinacridone, which was prepared according to U.S. Patent No. 6,225,472 B1, is
15 reslurried in water in the presence of 2 g 1,2 -dodecandiol. The suspension is stirred for 1 hour at 60 to 70 °C then filtered at 30 – 40 °C. The presscake is washed with water and dried followed by micro pulverization on a BANTAM micro pulverizer using a 0.027 inch screen at 14000 RPM rotating speed yielding a powdery 1,2 -dodecandiol treated o -benzo sulfimido methyl 6,13 -dihydroquinacridone.

20

Example 6

40 g Color Black FW 200, C.I. Pigment Black 7, from DEGUSSE and 10 g quinacridone mono sulfonic acid aluminum salt as prepared according to Example 1 are added into a 18 oz flask and blended together by rolling the flask on a roller gear for 2 hours to form a
25 uniform blend. The resulting dark black pigment composition produces a strongly weather fast black colored coloration when applied in paints or plastics. Surprisingly, the inventive black pigment composition shows low viscosity, an excellent gloss, high jetness and outstanding rheological behavior when applied in paints. Additionally, it shows excellent heat stability when applied in high performance thermoplastics.

5 Example 7

Example 6 is repeated using instead of quinacridone mono sulfonic acid aluminum salt the 3,5-dimethylpyrazol-1-methyl quinacridone derivative as prepared according to Example 2, yielding a black pigment composition of similar good pigment properties.

10 Example 8

Example 6 is repeated using instead of quinacridone mono sulfonic acid aluminum salt the powdery resinated quinacridone mono sulfonic acid aluminum salt/3,5 - dimethylpyrazol-1-methyl quinacridone mixture as prepared according to Example 3, yielding a black pigment composition of similar good pigment properties.

15

Example 9

Example 6 is repeated using instead of quinacridone mono sulfonic acid aluminum salt the powdery lauric acid treated indanthrone sulfonic acid as prepared according to Example 4, yielding a black pigment composition of similar good pigment properties.

20

Example 10

Example 6 is repeated using instead of quinacridone mono sulfonic acid aluminum salt the powdery 1,2-dodecandiol treated o-benzo sulfimido methyl 6,13 -dihydroquinacridone as prepared according to Example 5, yielding a black pigment composition of similar

25

Example 11

- 25 -

Example 10 is repeated using instead of Color Black FW 200, (C.I. Pigment Black 7 from DEGUSSA), 40 g Monarch Carbon Black 4750, (C.I. Pigment Black 7 from CABOT Corporation), yielding a black pigment composition of outstanding pigment properties.

5 Example 12

Example 6 is repeated using instead of Color Black FW 200, 40 g Monarch Carbon Black 4750, yielding a black pigment composition of outstanding pigment properties.

Example 13

- 10 This example shows the incorporation of the inventive pigment black into an automotive solvent-based paint system.

Mill base formulation

- 15 A pint jar is charged with 30.0 grams high solids acrylic copolymer resin (68% solids) from DUPONT, 6.55 grams acrylic A-B dispersant resin consisting of (55% solids) from DUPONT, and 71.45 grams Solvesso 100 from American Chemical. 12 grams black pigment composition of Example 12 and 240 grams of glass beads are added. The mixture in the jar is shaken on a Skandex shaker for 4 hours. The black "mill base" contains 10.0 % pigment with a pigment/binder ratio of 0.5 and a solids content of 30 %.

20

Masstone color for spraying a panel

- 82.6 grams of the above millbase, 39.7 grams of a polyester acrylic urethane based solution of 47.8% solids, 17.7 grams of a melamine resin based solution (both solutions are from DUPONT) are mixed and diluted with a solvent mixture comprising 76 parts
25 xylene, 21 parts butanol and 3 parts methanol to a spray viscosity of 20 -22 seconds as measured by a #2 Fisher Cup.

The resin/pigment dispersion is sprayed onto a panel twice at 1½ minute intervals as basecoat. After 2 minutes, the clearcoat resin is sprayed twice at 1 1/2 minute intervals

- 26 -

onto the basecoat. The sprayed panel is then flashed with air in a flash cabinet for 10 minutes and then "baked" in an oven at 265° F (129° C) for 30 minutes, yielding a black colored panel.

5 Metallic dispersion

A quart can is charged with 405 grams aluminum paste (5245AR from Silberline), 315 grams non-aqueous dispersion resin and 180 grams acrylic urethane resin and stirred for 1 to 2 hours until lump free.

10 Metallic color for spraying panel (80/20 Al)

64.4 grams black "mill base", 5.8 grams "metallic dispersion", 41.8 grams polyester acrylic urethane based solution and 13 grams melamine based solution are mixed . The viscosity is reduced to 20 -22 seconds using a N2 Fisher device by a thinning solvent mixture of the following composition: 76 grams xylene, 21 grams butanol and 3 grams
15 methanol. The resin/pigment dispersion is sprayed onto a panel twice at one minute intervals as basecoat. After 3 minutes, clearcoat resin is sprayed twice at one minute intervals onto the basecoat. The sprayed panel is then flashed with air in a flash cabinet for 10 minutes and then "baked" in an oven at 265 °F (130 °C) for 30 minutes, yielding a black metallic colored panel with excellent weatherability. A microscopic evaluation
20 shows a homogeneous distribution of the pigment particles in the coating system.

Russet Mica Dispersion

The following ingredients are stirred together to provide a mica dispersion containing 27.9% pearlescent mica pigment and a total solid content of 69.1% solids:

25 251.1 grams of bright russet mica, EXTERIOR MEARLIN from The Mearl Corp.,
 315.0 grams of none aqueous dispersion resin, and
 180.0 grams of acrylourethane resin.

- 27 -

Russet Mica color for spraying paint

A 50/50 russet mica shade coating (for 25% pigment loading) is prepared by mixing the following ingredients:

- | | | |
|---|------------|--|
| 5 | 50.3 grams | of the black "mill base" dispersion |
| | 14.5 grams | of "russet mica dispersion" |
| | 44.1 grams | of a polyester acrylic urethane based solution |
| | 15.6 grams | of a melamine based solution |
- 10 The black pigment/pearlescent mica/resin dispersion, which has excellent rheological properties, is sprayed onto a primed panel 8 times (for complete hiding) at 1 minute intervals as basecoat. After 3 minutes, clear coat resin is sprayed twice at 1 minute intervals onto the basecoat. The sprayed panel is flashed with air in a flash cabinet for 10 minutes and then "baked" in an oven at 265°F (130°C). A black colored effect coating
- 15 with excellent weatherability is obtained. The black coating shows high gloss and a reddish flop.

Example 14

- 63.0 grams of polyvinyl chloride, 3.0 grams epoxidized soy bean oil, 2.0 grams of
- 20 barium/cadmium heat stabilizer, 32.0 grams dioctyl phthalate and 1.0 gram of the black pigment composition prepared according to Example 7 are mixed together in a glass beaker using a stirring rod. The mixture is formed into a soft PVC sheet with a thickness of about 0.4 mm by rolling for 8 minutes on a two roll laboratory mill at a temperature of 160°C, a roller speed of 25 rpm and friction of 1:1.2, by constant folding, removal and
- 25 feeding. The resulting soft PVC sheet is colored in an attractive black shade and has excellent fastness to heat, light and migration.

Example 15

- 28 -

Five grams of the black pigment composition prepared according to Example 6, 2.65 grams CHIMASORB 944LD (hindered amine light stabilizer), 1.0 gram TINUVIN 328 (benzotriazole UV absorber) and 2.0 grams IRGANOX B -215 Blend (anti-oxidant), all available from Ciba Specialty Chemicals, are mixed together with 1000 grams of high density polyethylene at a speed of 175 -200 rpm for 30 seconds after flux. The fluxed, pigmented resin is chopped up while warm and malleable, and then fed through a granulator. The resulting granules are molded on an injection molder with a 5 minute dwell time and a 30 second cycle time at a temperature of 200, 250 and 300 °C. Homogeneously colored chips, which show a black color with practically no color differences, are obtained. They have an excellent light stability.

- 29 -

CLAIMS:

1. A black pigment composition comprising
 (a) carbon black, and
 5 (b) a compound of the formula



wherein

- Q is a pigment or pigment intermediate radical selected from the group consisting of
 10 anthraquinone, perinone, perylene, diketopyrrolopyrrole, thioindigo, iminoisoindoline,
 iminoisoindolinone, quinacridone, 6,13 -dihydroquinacridone, flavanthrone, dioxazine,
 indanthrone, anthrapyrimidine and quinophthalone,
 X is a cyclo hetero aliphatic group or a hetero aromatic group with at least one 5 or 6
 atom ring,
 15 M is hydrogen, a metal cation or nitrogen cation,
 k is 0 or 1, and
 m and n are each independently of the other from 0 to 4, wherein m and n are not zero
 simultaneously.
- 20 2. A black pigment composition according to claim 1, wherein
 the carbon black is C.I. Pigment Black 6, C.I. Pigment Black 9 or C.I. Pigment Black 7,
 preferably C.I. Pigment Black 7.
3. A black pigment composition according to claim 1 or 2, wherein
 25 the carbon black has a specific surface area of at least 50 m²/g, preferably of from 100 to
 600 m²/g, and more preferably of from 150 to 600 m²/g.

- 30 -

4. A black pigment composition according to any of claims 1 to 3, wherein Q is a pigment or pigment intermediate radical selected from the group consisting of 6,13-dihydroquinacridone, quinacridone and indanthrone, preferably from the group consisting of 6,13-dihydroquinacridone and quinacridone.

5

5. A black pigment composition according to any of claims 1 to 4, wherein X is a radical selected from the group consisting of imidazolyl, 3,5 -dimethylpyrazol-1-yl-, phthalimido and benzosulfimido.

10 6. A black pigment composition according to claim 1, wherein component (b) is a compound of the formula



wherein

15 Q is a pigment or pigment intermediate radical selected from the group consisting of quinacridone and 6,13-dihydroquinacridone,
X is a radical selected from the group of imidazolyl, 3,5 -dimethylpyrazol-1-yl-, phthalimido and benzo sulfimido,
k is 1, and
20 n is from 0.5 to 4.

7. A black pigment composition according to claim 1, wherein component (b) is a compound of the formula



wherein

- 31 -

Q is a pigment or pigment intermediate radical selected from the group consisting of quinacridone and indanthrone,

M is a mono-, di- or trivalent metal cation or ammonium cation, and
m is from 0.5 to 2.

5

8. A black pigment composition according to any of claims 1 to 7, comprising from 50 to 95% by weight of carbon black and from 5 to 50% by weight of the compound of formula (1) according to claim 1, based on the total weight of carbon black and the compound of formula (1),

10 preferably comprising from 70 to 90% by weight of carbon black and from 10 to 30% by weight of the compound of formula (1), based on the total weight of carbon black and the compound of formula (1), and
more preferably comprising from 75 to 85% by weight of carbon black and from 15 to 25% by weight of the compound of formula (1), based on the total weight of carbon black and
15 the compound of formula (1).

9. A black pigment composition according to any of claims 1 to 8, wherein the compound of formula (1) contains 0.05 to 20% by weight of a texture-improving agent, based on the weight of the compound of formula (1).

20

10. A black pigment composition according to claim 9, wherein the texture-improving agent is at least one compound selected from the group consisting of fatty acids having at least 12 carbon atoms, fatty acid amides having at least 12 carbon atoms, fatty acid esters having at least 12 carbon atoms, salts of a fatty acid having at
25 least 12 carbon atoms and fatty amines having at least 12 carbon atoms, fatty alcohols having at least 12 carbon atoms, ethoxylated fatty alcohols having at least 12 carbon atoms, polyols, glycerol mono stearates, polyvinylalcohols, polyvinylpyrrolidones, epoxidized soy bean oils, waxes, resin acids and resin acid salts.

- 32 -

11. A process for the preparation of a black pigment composition, comprising blending carbon black in a granulated or powdery form with a powder form of the untreated or treated compound of the formula (1) according to any of claims 1 to 10 until a uniform blend is generated.

5

12. A process for coloring a solid or liquid material, comprising applying to said material an effective pigmenting amount of a black pigment composition according to any of claims 1 to 10.

10 13. A process according to claim 11, wherein said material is a high molecular weight organic material, preferably selected from the group consisting of cellulose ether, cellulose ester, natural resins, synthetic polymer, rubber, casein, silicone and silicone resin singly or in mixtures.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/051374

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C09B67/22 C08K3/04 C09D133/08 C09D5/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C09B C08K C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 601 914 A (YABUNO MICHIO ET AL) 11 February 1997 (1997-02-11) column 3, line 60 - column 4, line 2 column 4, line 28 - line 65; claim 8 column 6, line 48 - line 51 -----	1,4-6,8, 11-13
X	DATABASE WPI Section Ch, Week 200356 Derwent Publications Ltd., London, GB; Class E24, AN 2003-591562 XP002300664 -& JP 2003 171594 A (TOYO INK MFG CO LTD) 20 June 2003 (2003-06-20) abstract ----- -/--	1,2,4, 6-8, 11-13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

13 October 2004

Date of mailing of the international search report

25/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ketterer, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/051374

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Section Ch, Week 200176 Derwent Publications Ltd., London, GB; Class A60, AN 2001-658587 XP002300665 -& JP 2001 172530 A (DAINICHISEIKA COLOR & CHEM MFG CO LTD) 26 June 2001 (2001-06-26) abstract -----	1,2,6,8, 12,13
X	DATABASE WPI Section Ch, Week 198943 Derwent Publications Ltd., London, GB; Class A28, AN 1989-313707 XP002300666 -& JP 01 232524 A (TOYO INK MFG CO) 18 September 1989 (1989-09-18) page 6, dispersant No. 3 abstract -----	1,2,6,8, 12,13
X	DATABASE WPI Section Ch, Week 198928 Derwent Publications Ltd., London, GB; Class A11, AN 1989-204346 XP002300667 -& JP 01 144476 A (TOYO INK MFG CO) 6 June 1989 (1989-06-06) page 5, formulas abstract -----	1,4-6,8, 12,13
X	DATABASE WPI Section Ch, Week 198928 Derwent Publications Ltd., London, GB; Class A82, AN 1989-204345 XP002300668 & JP 01 144475 A (TOYO INK MFG CO) 6 June 1989 (1989-06-06) see page 5, formulas abstract -----	1,4-6,8, 12,13
A	US 5 922 118 A (BELMONT JAMES A ET AL) 13 July 1999 (1999-07-13) examples -----	1,3,12
A	US 4 250 079 A (BABLER FRIDOLIN) 10 February 1981 (1981-02-10) the whole document -----	1,9,10
A	EP 0 302 973 A (SANYO COLOR WORKS) 15 February 1989 (1989-02-15) examples -----	1,6,12, 13
	----- -/--	

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/051374

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DATABASE WPI Section Ch, Week 198345 Derwent Publications Ltd., London, GB; Class A60, AN 1983-812055 XP002300669 -& JP 58 167654 A (TOYO INK MFG CO) 3 October 1983 (1983-10-03) formulas abstract	1,6,8,12
A	----- US 5 334 727 A (CAMPBELL COLIN D) 2 August 1994 (1994-08-02) cited in the application same pigment derivatives combined to organic pigments; inorganic pigments resp. carbon black not mentioned the whole document	1,4,6, 11,13
A	----- US 3 386 843 A (JAFFE EDWARD E ET AL) 4 June 1968 (1968-06-04) cited in the application the whole document	1,4,7, 11,13
A	----- WO 99/51690 A (CABOT CORP) 14 October 1999 (1999-10-14) examples	1,12
A	----- DATABASE WPI Section Ch, Week 198450 Derwent Publications Ltd., London, GB; Class A23, AN 1984-309337 XP002300670 -& JP 59 193125 A (TOYO INK MFG CO) 1 November 1984 (1984-11-01) abstract -----	1,5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/051374

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5601914	A	11-02-1997	JP 7287835 A DE 19507834 A1 GB 2287202 A ,B	31-10-1995 31-08-1995 13-09-1995
JP 2003171594	A	20-06-2003	NONE	
JP 2001172530	A	26-06-2001	NONE	
JP 1232524	A	18-09-1989	JP 2602273 B2	23-04-1997
JP 1144476	A	06-06-1989	JP 2102706 C JP 8019367 B	22-10-1996 28-02-1996
JP 1144475	A	06-06-1989	JP 2102705 C JP 8019366 B	22-10-1996 28-02-1996
US 5922118	A	13-07-1999	US 5707432 A US 5803959 A AU 3307897 A AU 726728 B2 AU 3308697 A BR 9710977 A CA 2258188 A1 CN 1227584 A ,B DE 69706298 D1 DE 69706298 T2 DE 69707462 D1 DE 69707462 T2 EP 0904327 A1 EP 0910611 A1 ES 2165069 T3 ID 17319 A ID 18342 A JP 2000512670 T JP 2000512329 T KR 2000016667 A TW 457285 B WO 9747699 A1 WO 9747692 A1 US 5885335 A ZA 9705222 A ZA 9705224 A	13-01-1998 08-09-1998 07-01-1998 16-11-2000 07-01-1998 22-01-2002 18-12-1997 01-09-1999 27-09-2001 13-06-2002 22-11-2001 06-06-2002 31-03-1999 28-04-1999 01-03-2002 18-12-1997 02-04-1998 26-09-2000 19-09-2000 25-03-2000 01-10-2001 18-12-1997 18-12-1997 23-03-1999 14-01-1998 05-01-1998
US 4250079	A	10-02-1981	CH 632290 A5 DE 2919519 A1 GB 2021620 A ,B JP 1470734 C JP 54150437 A JP 63015308 B	30-09-1982 29-11-1979 05-12-1979 14-12-1988 26-11-1979 04-04-1988
EP 0302973	A	15-02-1989	US 4762569 A EP 0302973 A1	09-08-1988 15-02-1989
JP 58167654	A	03-10-1983	JP 1673631 C JP 3029829 B	26-06-1992 25-04-1991
US 5334727	A	02-08-1994	CA 2055019 A1 DE 69109057 D1	09-05-1992 24-05-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/051374

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5334727	A		DE 69109057 T2	21-09-1995
			EP 0485337 A1	13-05-1992
			ES 2071280 T3	16-06-1995
			JP 3096332 B2	10-10-2000
			JP 4285669 A	09-10-1992
			KR 166341 B1	15-01-1999
US 3386843	A	04-06-1968	DE 1619620 A1	04-09-1969
			FR 1504682 A	08-12-1967
			GB 1121030 A	24-07-1968
			GB 1121029 A	24-07-1968
WO 9951690	A	14-10-1999	AU 3471099 A	25-10-1999
			DE 69901944 D1	01-08-2002
			DE 69901944 T2	06-02-2003
			EP 1066352 A1	10-01-2001
			JP 2002510736 T	09-04-2002
			WO 9951690 A1	14-10-1999
			US 6336965 B1	08-01-2002
			US 2001003263 A1	14-06-2001
			US 2001004871 A1	28-06-2001
			US 2002056403 A1	16-05-2002
JP 59193125	A	01-11-1984	JP 1810464 C	27-12-1993
			JP 5021946 B	26-03-1993