



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2854239 C 2016/06/14

(11)(21) **2 854 239**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2012/11/21
(87) Date publication PCT/PCT Publication Date: 2013/05/30
(45) Date de délivrance/Issue Date: 2016/06/14
(85) Entrée phase nationale/National Entry: 2014/05/01
(86) N° demande PCT/PCT Application No.: EP 2012/073264
(87) N° publication PCT/PCT Publication No.: 2013/076158
(30) Priorités/Priorities: 2011/11/22 (US61/562,736);
2012/04/02 (FR1253023)


(51) Cl.Int./Int.Cl. *F16H 31/00* (2006.01),
B64C 13/24 (2006.01), *F16H 35/00* (2006.01)

(72) Inventeurs/Inventors:
SENEGAS, DAVID, FR;
MEHEZ, JEROME, FR;
JESTIN, MAXIME, FR;
SEVAGEN, BERTRAND, FR

(73) Propriétaire/Owner:
SAGEM DEFENSE SECURITE, FR

(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : ACTIONNEUR ELECTROMECANIQUE POUR UNE SURFACE DE COMMANDE D'AERONEF ET AERONEF EQUIPE D'UN TEL ACTIONNEUR
(54) Title: AN ELECTROMECHANICAL ACTUATOR FOR AN AIRCRAFT CONTROL SURFACE, AND AN AIRCRAFT PROVIDED WITH SUCH AN ACTUATOR

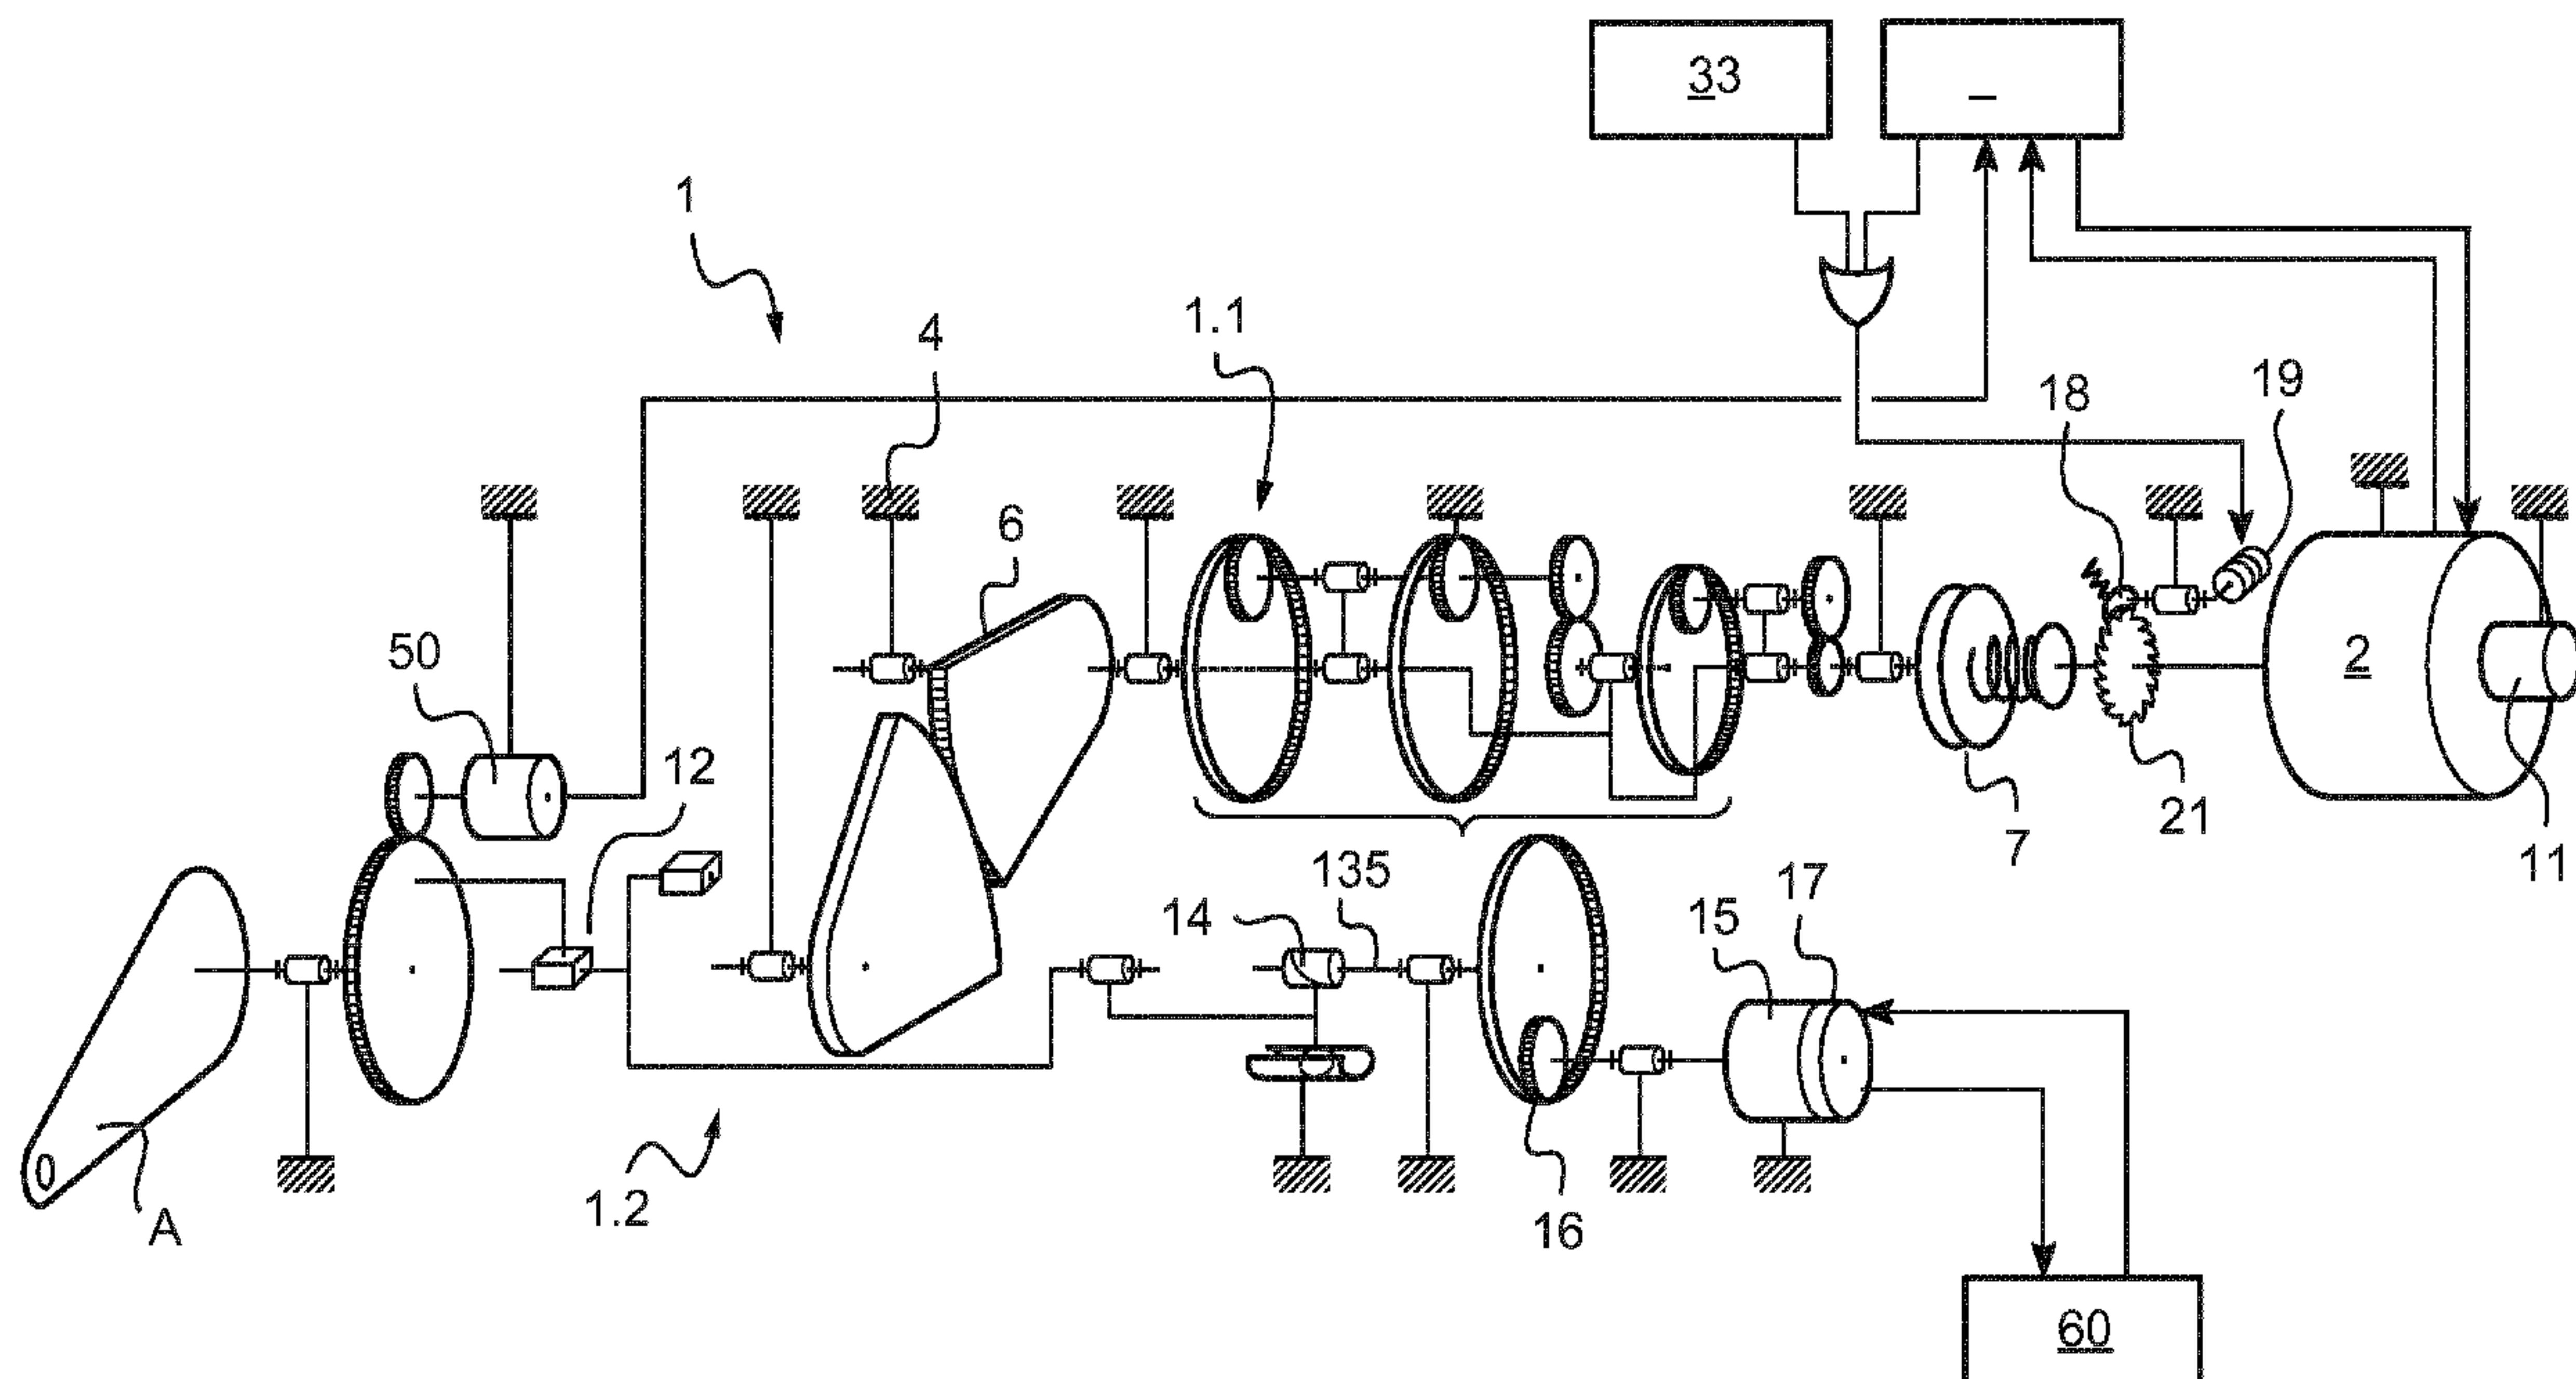

(57) Abrégé/Abstract:

An electromechanical actuator for a movable flight control surface of an aircraft, the actuator comprising an electric motor (2) having an outlet shaft (20) with first and second directions of rotation, a movement transmission (1) arranged to connect the outlet shaft of the motor to the movable flight control surface, and a control unit (3) for controlling the motor. The transmission incorporates a pawl device (18) arranged to oppose the transmission of movement in the first direction of rotation, and the control unit is connected to a pawl declutching member (19) for declutching the pawl and enabling movement to be transmitted in the first direction of rotation.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 May 2013 (30.05.2013)

(10) International Publication Number
WO 2013/076158 A1

(51) International Patent Classification:
F16H 31/00 (2006.01) **B64C 13/24** (2006.01)
F16H 35/00 (2006.01)

(74) Agents: **LAVIALLE, Bruno** et al.; Cabinet BOETTCHER, 16 rue Médéric, F-75015 Paris (FR).

(21) International Application Number:
PCT/EP2012/073264

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
21 November 2012 (21.11.2012)


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
61/562,736 22 November 2011 (22.11.2011) US
1253023 2 April 2012 (02.04.2012) FR

Published:

— with international search report (Art. 21(3))

(54) Title: AN ELECTROMECHANICAL ACTUATOR FOR AN AIRCRAFT CONTROL SURFACE, AND AN AIRCRAFT PROVIDED WITH SUCH AN ACTUATOR

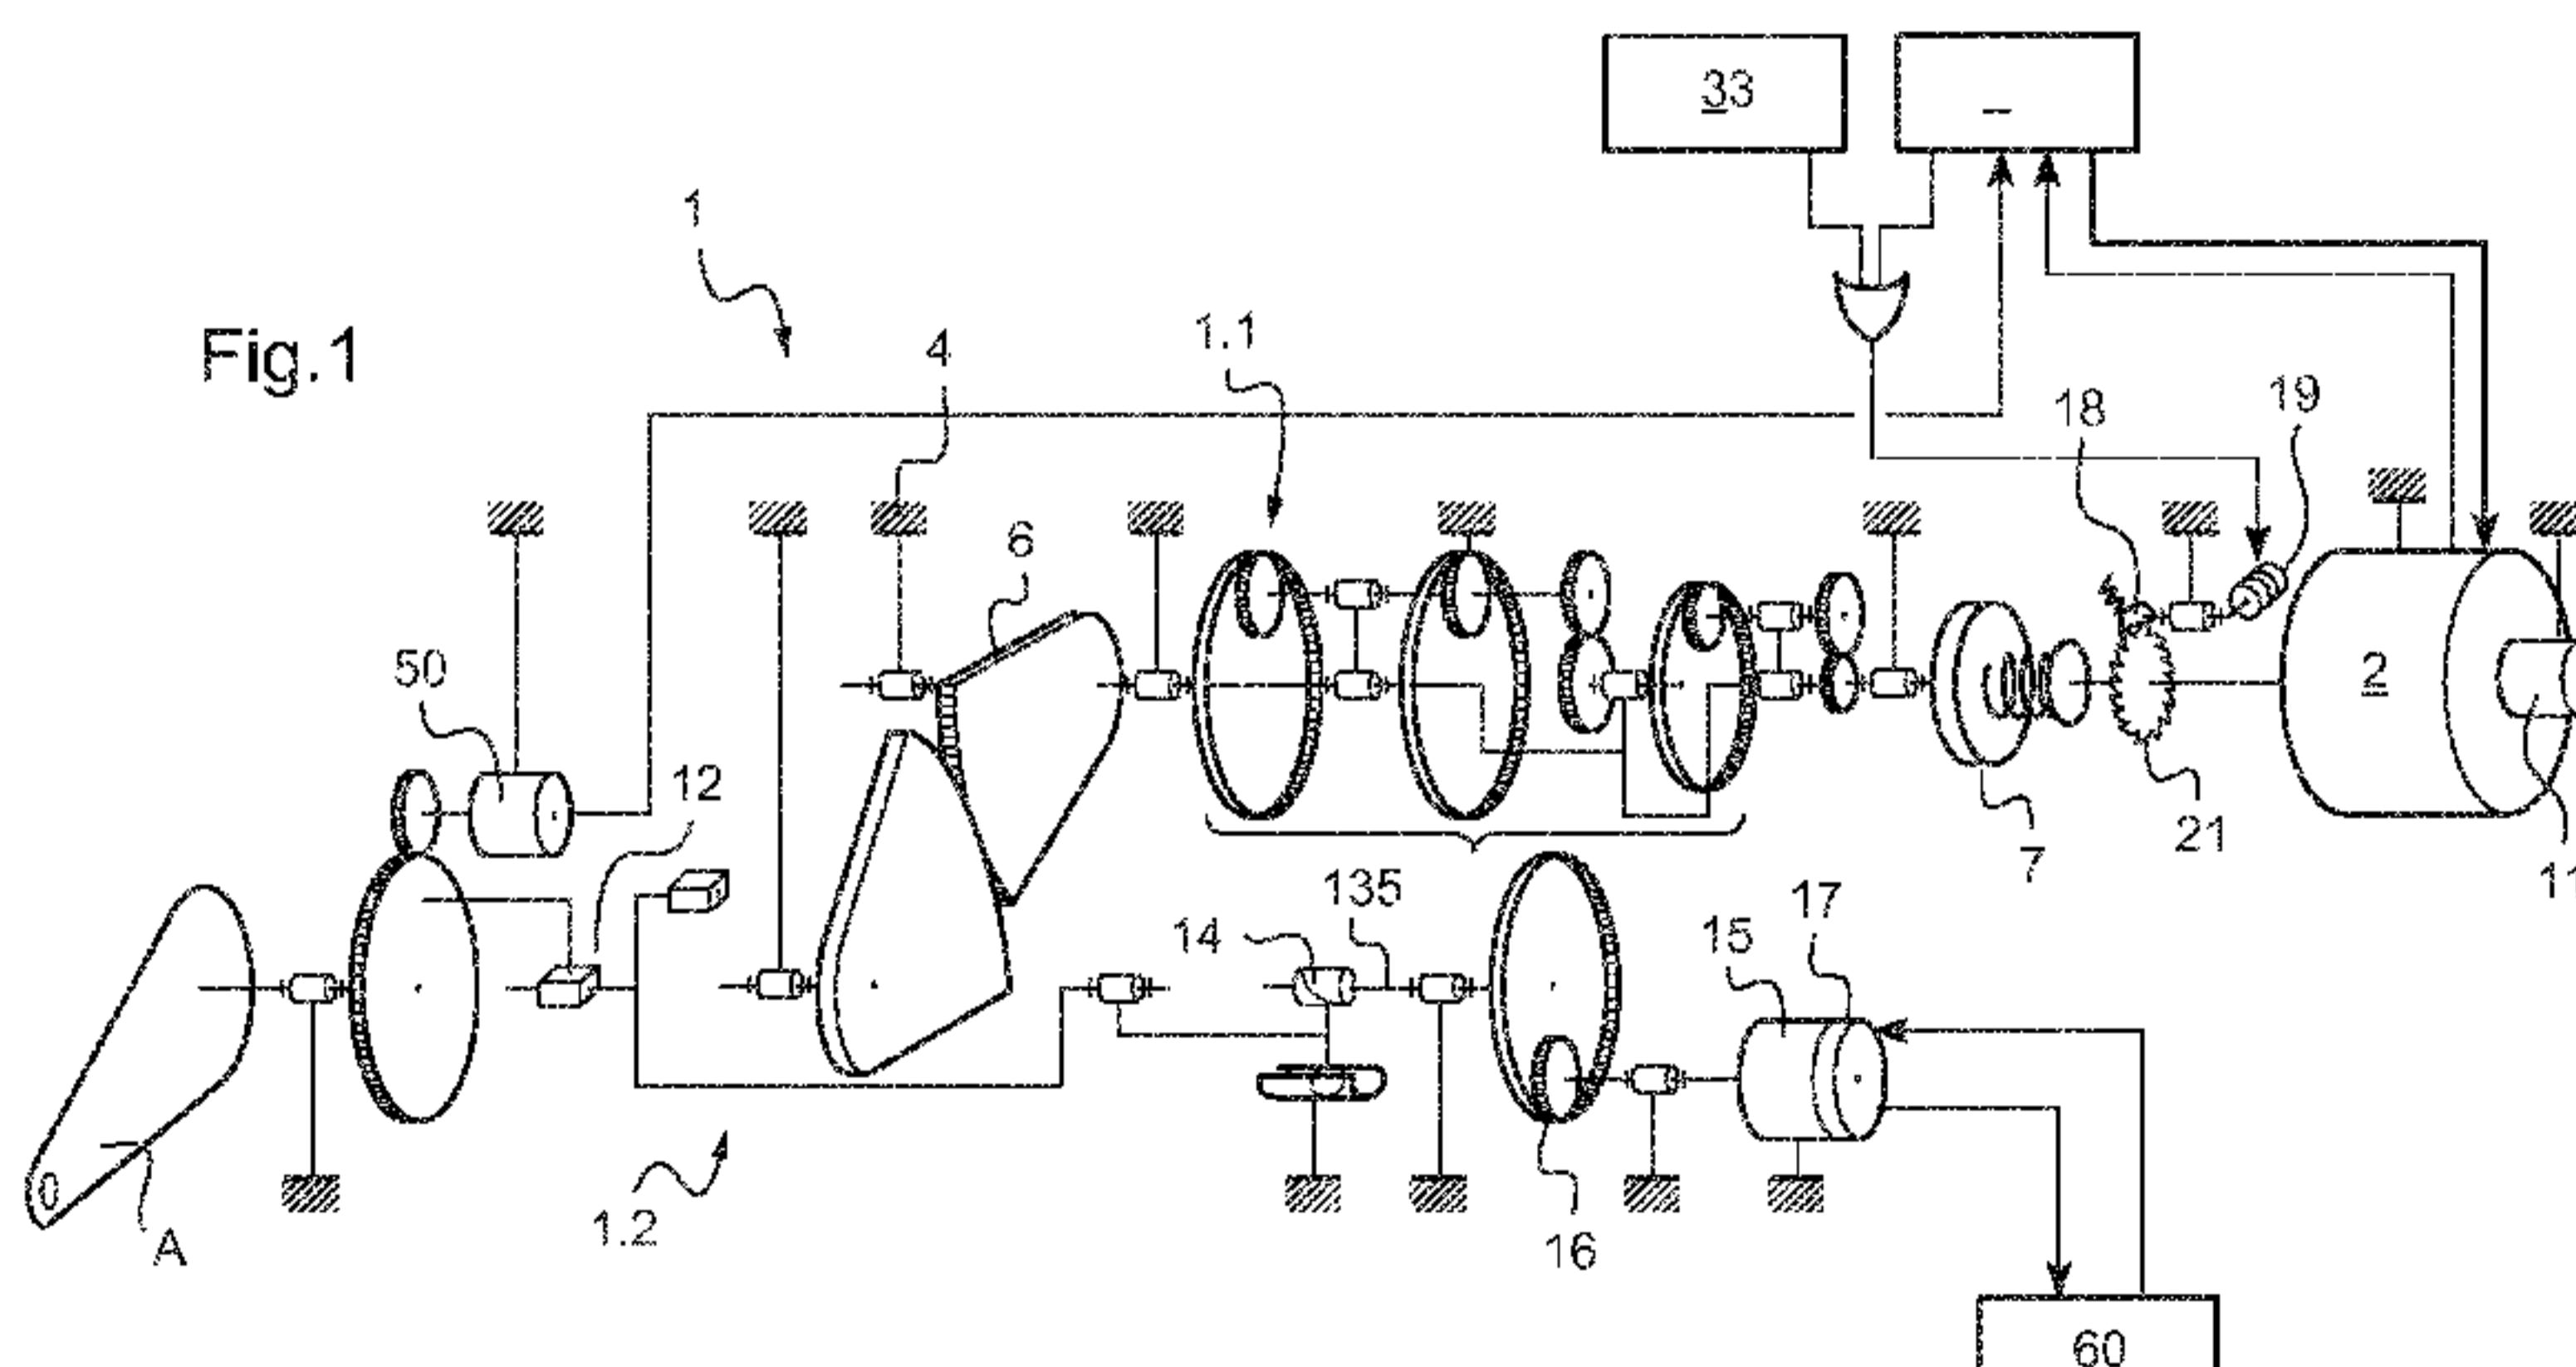

WO 2013/076158 A1

(57) Abstract: An electromechanical actuator for a movable flight control surface of an aircraft, the actuator comprising an electric motor (2) having an outlet shaft (20) with first and second directions of rotation, a movement transmission (1) arranged to connect the outlet shaft of the motor to the movable flight control surface, and a control unit (3) for controlling the motor. The transmission incorporates a pawl device (18) arranged to oppose the transmission of movement in the first direction of rotation, and the control unit is connected to a pawl declutching member (19) for declutching the pawl and enabling movement to be transmitted in the first direction of rotation.

AN ELECTROMECHANICAL ACTUATOR FOR AN AIRCRAFT CONTROL SURFACE, AND AN AIRCRAFT PROVIDED WITH SUCH AN ACTUATOR

The present invention relates to an electromechanical actuator of a movable flight control surface of an aircraft such as an airplane. By way of example, such a flight control surface is an aileron, an elevon, or a spoiler.

In general, an electromechanical actuator of a movable flight control surface of an aircraft comprises an electric motor having an outlet shaft with first and second directions of rotation, and a movement transmission arranged to connect the outlet shaft of the motor to the movable flight control surface. The motor is controlled by a control unit that receives commands from the flight control unit of the aircraft.

The loss of power to such actuators can lead to consequences that are catastrophic by allowing the aileron / elevon / spoiler to move in a way that risks unbalancing the aircraft, increasing its drag, or damaging its structure by the resulting vibration (a phenomenon known as "flutter").

An object of the invention is to provide means for remedying the above-mentioned drawback.

To this end, the invention provides an electromechanical actuator for a movable flight control surface of an aircraft, the actuator comprising an electric motor having an outlet shaft with first and second directions of rotation, a movement transmission arranged to connect the outlet shaft of the motor to the movable flight control surface, and a control unit for controlling the motor. The transmission incorporates a pawl device arranged to oppose the transmission of movement in the first direction of rotation, and the control unit is connected to a pawl declutching member for declutching the pawl and enabling movement to be transmitted in the first direction of rotation.

Thus, there is no need to power the motor in order to oppose movement in the first direction of rotation.

The invention also provides an aircraft having wings, each provided with at least one movable airfoil 5 surface of the aileron / elevon / spoiler type associated with at least one such actuator, the actuator being mounted so that the pawl opposes a deflection movement of the airfoil surface.

Other characteristics and advantages invention 10 appear on reading the following description of particular, nonlimiting embodiments of the invention.

Reference is made to the accompanying drawings, in which:

- Figure 1 is a kinematic diagram of an actuator in 15 a first embodiment;
- Figure 2 is a longitudinal section view of the Figure 1 actuator;
- Figure 3 is a kinematic diagram of an actuator in a second embodiment;
- Figure 4a and Figure 4b are respectively a longitudinal section view and a cross section view of the Figure 3 actuator;
- Figure 5 is a kinematic diagram of an actuator in a third embodiment; and
- Figure 6a and Figure 6b are respectively a longitudinal section view and a cross section view of the Figure 5 actuator.

With reference to the figures, the invention is described herein in its application to actuating an 30 aileron / elevon / spoiler that is movably mounted at the rear edge of an aircraft wing. The aileron / elevon / spoiler is secured to a crank or interface referenced A in the figures.

The actuator of the invention is of the electro- 35 mechanical type.

In outline, the crank A of the aileron / elevon / spoiler is actuated via a transmission given overall

reference 1 by an electric motor 2 that is controlled by two electronic control units 3 receiving signals from an angle position sensor 50. The presence of two identical control units 3 provides redundancy, enabling one of the 5 control units to take the place of the other in the event of the other unit failing.

In this example, the transmission 1 is split in two lines in order to limit its overall length so that it comprises a first line of shafts 1.1 and a second line of 10 shafts 1.2.

The first embodiment of the invention is described below with reference to Figures 1 and 2.

The actuator comprises a casing 4 forming a stationary structure, which casing is arranged to be 15 fastened in the wing of the aircraft, e.g. by bolts, and receives the motor 2 and the movement transmission 1.

The motor 2 is of the brushless type and has an outlet shaft 20 connected to the transmission 1. The motor 2 is arranged, when appropriately powered, to set 20 its outlet shaft 20 into rotation in either of two opposite directions of rotation that are referred to herein respectively as the first and second directions of rotation.

In known manner, the transmission 1 comprises a 25 succession of gear trains enabling a predetermined reduction ratio to be obtained for moving the aileron / elevon / spoiler under the conditions imposed for its operation. In this example, the gear trains comprise a group 5 of epicyclic gear trains in series referred to as 30 the "nested train", and a train of parallel gears 6. The train of parallel gears 6 transmits the movement of the first line of shafts 1.1 to the second line of shafts 1.2. The stationary outside rings of the epicyclic trains with inwardly-directed sets of teeth are secured 35 directly to the inside wall of the casing 4 so as to limit the overall size of the actuator and so as to simplify its structure. The torque and the speed of the

transmitted movement depend on the ratios of the numbers of teeth between the various gears. These gear trains are not described in detail herein.

A torque limiter 7 is located upstream from the 5 group 5. The torque limiter 7 is of the friction type and comprises two plates that are urged resiliently one against the other, namely an inlet plate constrained to rotate with the outlet shaft 20 of the motor 2, and an outlet plate constrained to rotate with the inlet gear of 10 the group 5. The torque limiter 7 provides passive torque limiting. A load sensor 8 is also provided that is connected to the control unit 3 controlling the motor 2 to ensure that the load exerted on the transmission 1 does not exceed a predetermined threshold. The load 15 sensor 8 generates a measurement signal representative of the twisting of the shaft of the transmission 1 relative to a pointer 9. The measurement signal is transmitted to a receiver 10 via a transformer to avoid using any loose wiring or slip rings.

20 The transmission 1 also includes a damper 11 that acts in the event of the electronic control unit 3 not being electrically powered. In this example, the damper 11 is located behind the motor 2 on the casing 4, and the outlet shaft 20 has an end that projects from the casing 25 4 and that is constrained to rotate with the damper 11.

The actuator includes a clutch 12 that is located in the vicinity of the outlet from the transmission on the second line of shafts 1.2, and that has an outlet that is connected to the crank A. The clutch 12 is actuated via 30 a linear actuator device comprising a screw-and-nut system 13, 14 connected to a rotary electric motor 15 via a set of gears 16. The position of the nut 14 of the actuator device for the clutch 12 is determined by a sensor 17. The rotary electric motor 15 is connected to 35 the flight control center (FCC) 60 of the aircraft in order to allow the crank A to move freely in the event of any of the elements of the actuator jamming.

The transmission 1 incorporates a pawl device 18 arranged to oppose the transmission of movement in the first direction of rotation, and the control unit 3 is connected to a pawl declutching member 19 for declutching 5 the pawl 18 so as to allow movement to be transmitted in the first direction of rotation. The pawl 18 has one end mounted to pivot in the casing 4 and a free end that is urged resiliently to bear against the teeth of a ratchet wheel 21 constrained to rotate with the outlet shaft 20 of the motor 2. The pawl declutching member 19 comprises 10 an electromagnet that, when powered, holds the free end of the pawl 18 apart from the teeth of the ratchet wheel 21. Thus, when the electromagnet is not powered (the declutching member is then deactivated), in particular 15 when the control unit 3 is not electrically powered (or all of the control units are powered if the aileron / elevon / spoiler in question is associated with a plurality of control units) the free end of the pawl 18 is returned resiliently against the teeth and prevents 20 movement being transmitted in the first direction of rotation.

The motor 2, the pawl device 18, the torque limiter 7, the damper 11, and the gear trains 5, 6, are mounted on the first line of shafts 1.1.

25 The clutch 12 is mounted on the second line of shafts 1.2, which is connected to the crank A. The angle position sensor 50, of the rotary variable differential transformer (RVDT) type, is mounted on the outlet shaft of the second line of shafts 1.2.

30 Elements identical or analogous to those described above are given identical numerical references in the description below of second and third embodiments of the invention.

35 In the embodiments of Figures 3 to 6, the transmission 1 is shown in simplified manner, in particular concerning its gear trains.

As above, the actuator comprises a casing 4 containing all of the components of the actuator. The actuator includes a secondary casing forming a support member 40 that receives the first line of shafts 1.1, 5 i.e. the motor 2, the torque limiter 7, the damper 11, the pawl device 18, the declutching member 19, and the ratchet wheel 21, and that is fastened via a hinge 27 in the casing 4. The arrangement of these elements is substantially the same as in the first embodiment.

10 The second line of shafts 1.2 and the clutch 12 are mounted in the casing 4 outside the support member 40.

Downstream from the pawl device and the torque limiter 7, the outlet from the first line of shafts 1.1 is connected to a member for transforming rotary movement 15 into movement in translation of a slide 22. In this example, the slide 22 is a threaded rod fitted in a nut secured to the outlet of the torque limiter 7. The slide 22 is connected by a connecting rod 23 to an eccentric portion 24 constrained to rotate with a shaft of the 20 second line of shafts 1.2 and thus with the aileron / elevon / spoiler.

The outlet shaft 20 of the electric motor 2 is parallel to a pivot axis of the aileron / elevon / 25 spoiler, and the connecting rod 23 extends in a direction substantially perpendicular to the pivot axis of the aileron / elevon / spoiler.

With reference to Figures 3 and 4, and in accordance with the second embodiment, the slide 22 is hinged to a 30 crank lever 25 for turning an eccentric crank pin 26 to which the connecting rod 23 is connected.

It can be understood that movement in translation of the slide 22 causes the crank and crank pin assembly 25 and 26 to pivot, thereby moving the connecting rod 23 in translation so as to push or pull the eccentric portion 35 24 and cause the outlet shaft of the second line of shafts 1.2 of the transmission 1 to pivot.

With reference to Figures 5 and 6, and in accordance with the third embodiment, the connecting rod 23 comprises a first segment 23.1 hinged to the eccentric portion 24 and to the slide 22, and a second segment 23.2 hinged to the casing 4 and to the slide 22 via hinge 27'.

It can be understood that moving the slide 22 in translation changes the angle between the connecting rod segments 23.1 and 23.2, and thus changes the spacing between the end of the segment 23.1 connected to the eccentric portion 24 and the end of the segment 23.2 connected to the casing 4. The end of the segment 23.1 connected to the eccentric portion 24 moves the eccentric portion 24 and causes the outlet shaft of the second line of shafts 1.2 of the transmission 1 to pivot.

Naturally, the invention is not limited to the embodiments described, but covers any variant coming within the ambit of the invention as defined by the claims.

In particular, the transmission may be of a structure different from that described. The positions of the clutch, of the torque limiter, of the pawl device, and of the gear trains may be modified. The transmission and the lines of shafts may comprise segments that are coaxial or parallel. The lines of shafts may be parallel or they may be inclined relative to each other.

It is possible to provide a pawl device for each direction of rotation.

In the second and third embodiments, the hinge 27 between the support member 40 and the casing 4 via a ball joint connection is optional, it being possible for such a connection to be incorporated in the first line of shafts.


It is also possible to avoid incorporating the actuator in a casing, or to incorporate only a portion of the actuator in a casing. The casing 4 may be replaced by a support structure.

The damper 11 may be mounted between the front end of the outlet shaft and the support member 40.

CLAIMS


1. An electromechanical actuator for a movable flight control surface of an aircraft, the actuator comprising an electric motor having an outlet shaft with first and second directions of rotation, a movement transmission mechanism arranged to connect the outlet shaft of the motor to the movable flight control surface, and a control unit for controlling the motor, wherein the transmission mechanism incorporates a pawl device arranged to oppose a transmission of movement in the first direction of rotation, wherein the control unit is connected to a pawl declutching member for declutching the pawl and enabling movement to be transmitted in the first direction of rotation, wherein the transmission mechanism includes, downstream from the pawl device, a member for transforming rotary movement into movement in translation of a slide connected by a connecting rod to an eccentric portion constrained to move in rotation with the movable flight control surface, and wherein the motor, an adjacent portion of the transmission mechanism as far as the slide, the pawl device, and the declutching member are mounted on a support member connected to a casing by a hinge.
2. The actuator according to claim 1, wherein the outlet shaft of the electric motor is parallel to a pivot axis of the movable flight control surface, and the connecting rod extends in a direction that is substantially perpendicular to the pivot axis of the movable flight control surface.
3. The actuator according to claim 1, wherein the slide is connected to a crank lever for pivoting an eccentric crank pin to which the connecting rod is connected.

4. The actuator according to claim 1, wherein the connecting rod comprises a first segment hinged to the movable flight control surface and to the slide, and a second segment hinged to the casing and to the slide.
5. The actuator according to claim 1, wherein the declutching member is deactivated in the event of a power supply failure to the control unit.
6. The actuator according to claim 1, received in full or in part in the casing provided with means for mounting it on an aircraft structure.
7. An aircraft having wings, each provided with at least one movable airfoil surface of the aileron / elevon / spoiler type associated with at least one actuator according to any one of claims 1 to 6, the actuator being mounted so that the pawl opposes a deflection movement of the airfoil surface.

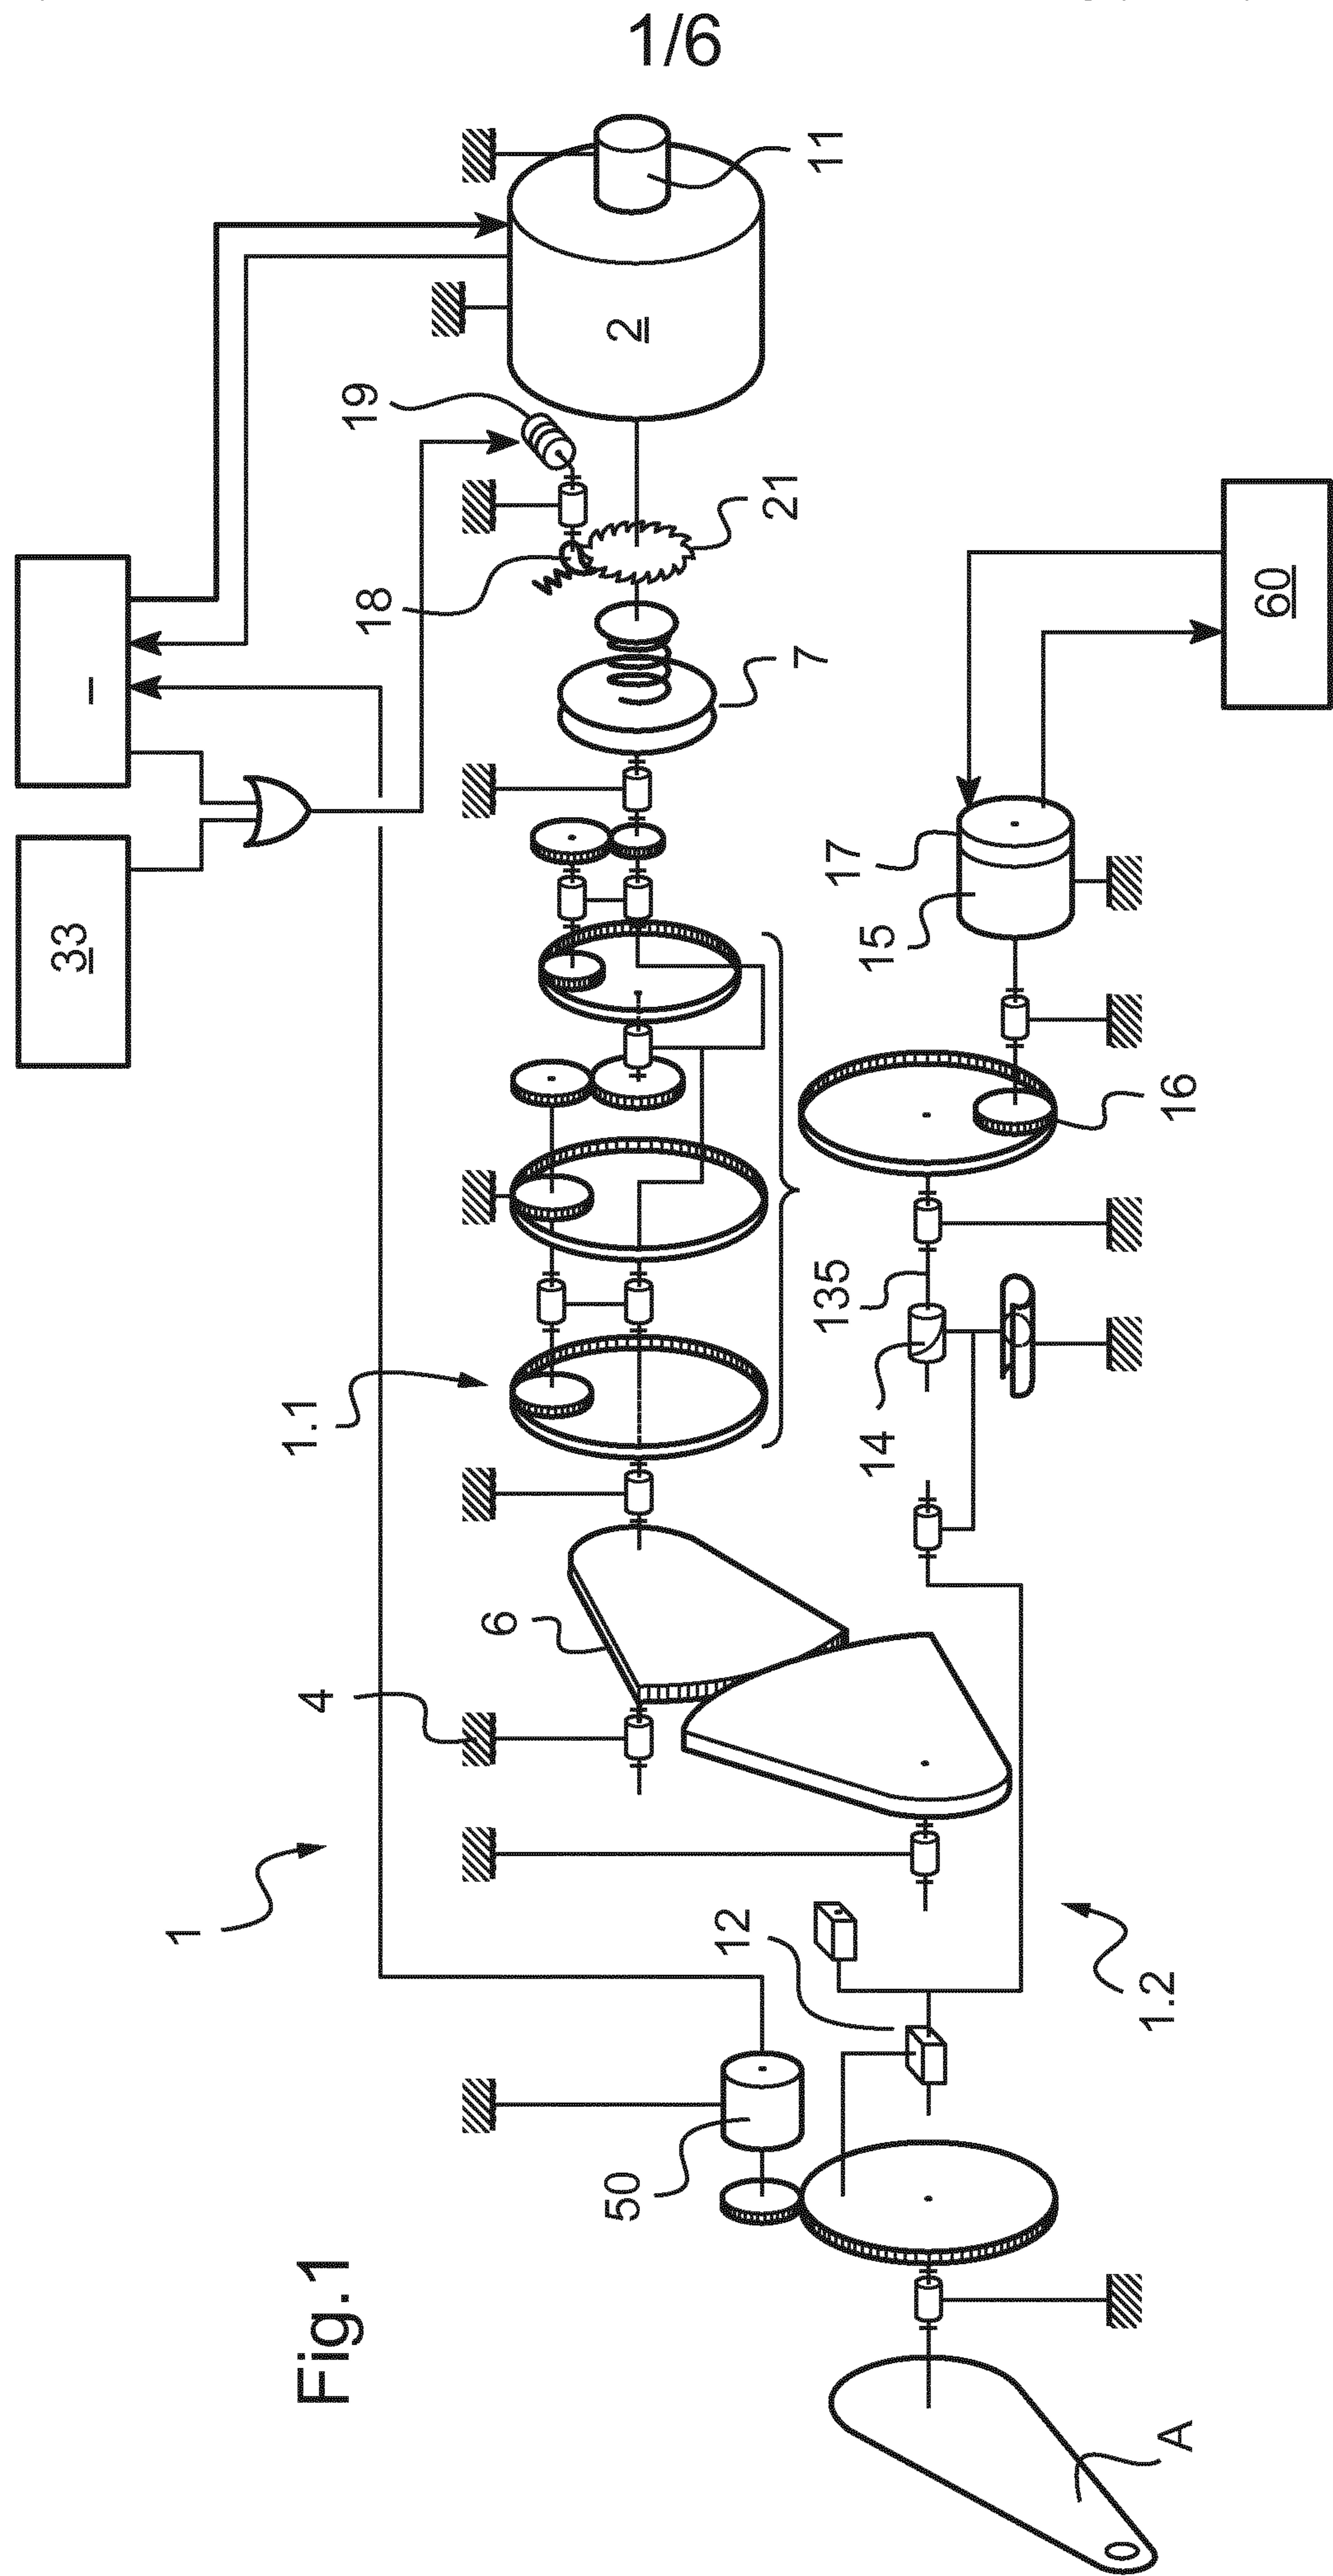


2/6


Fig.2

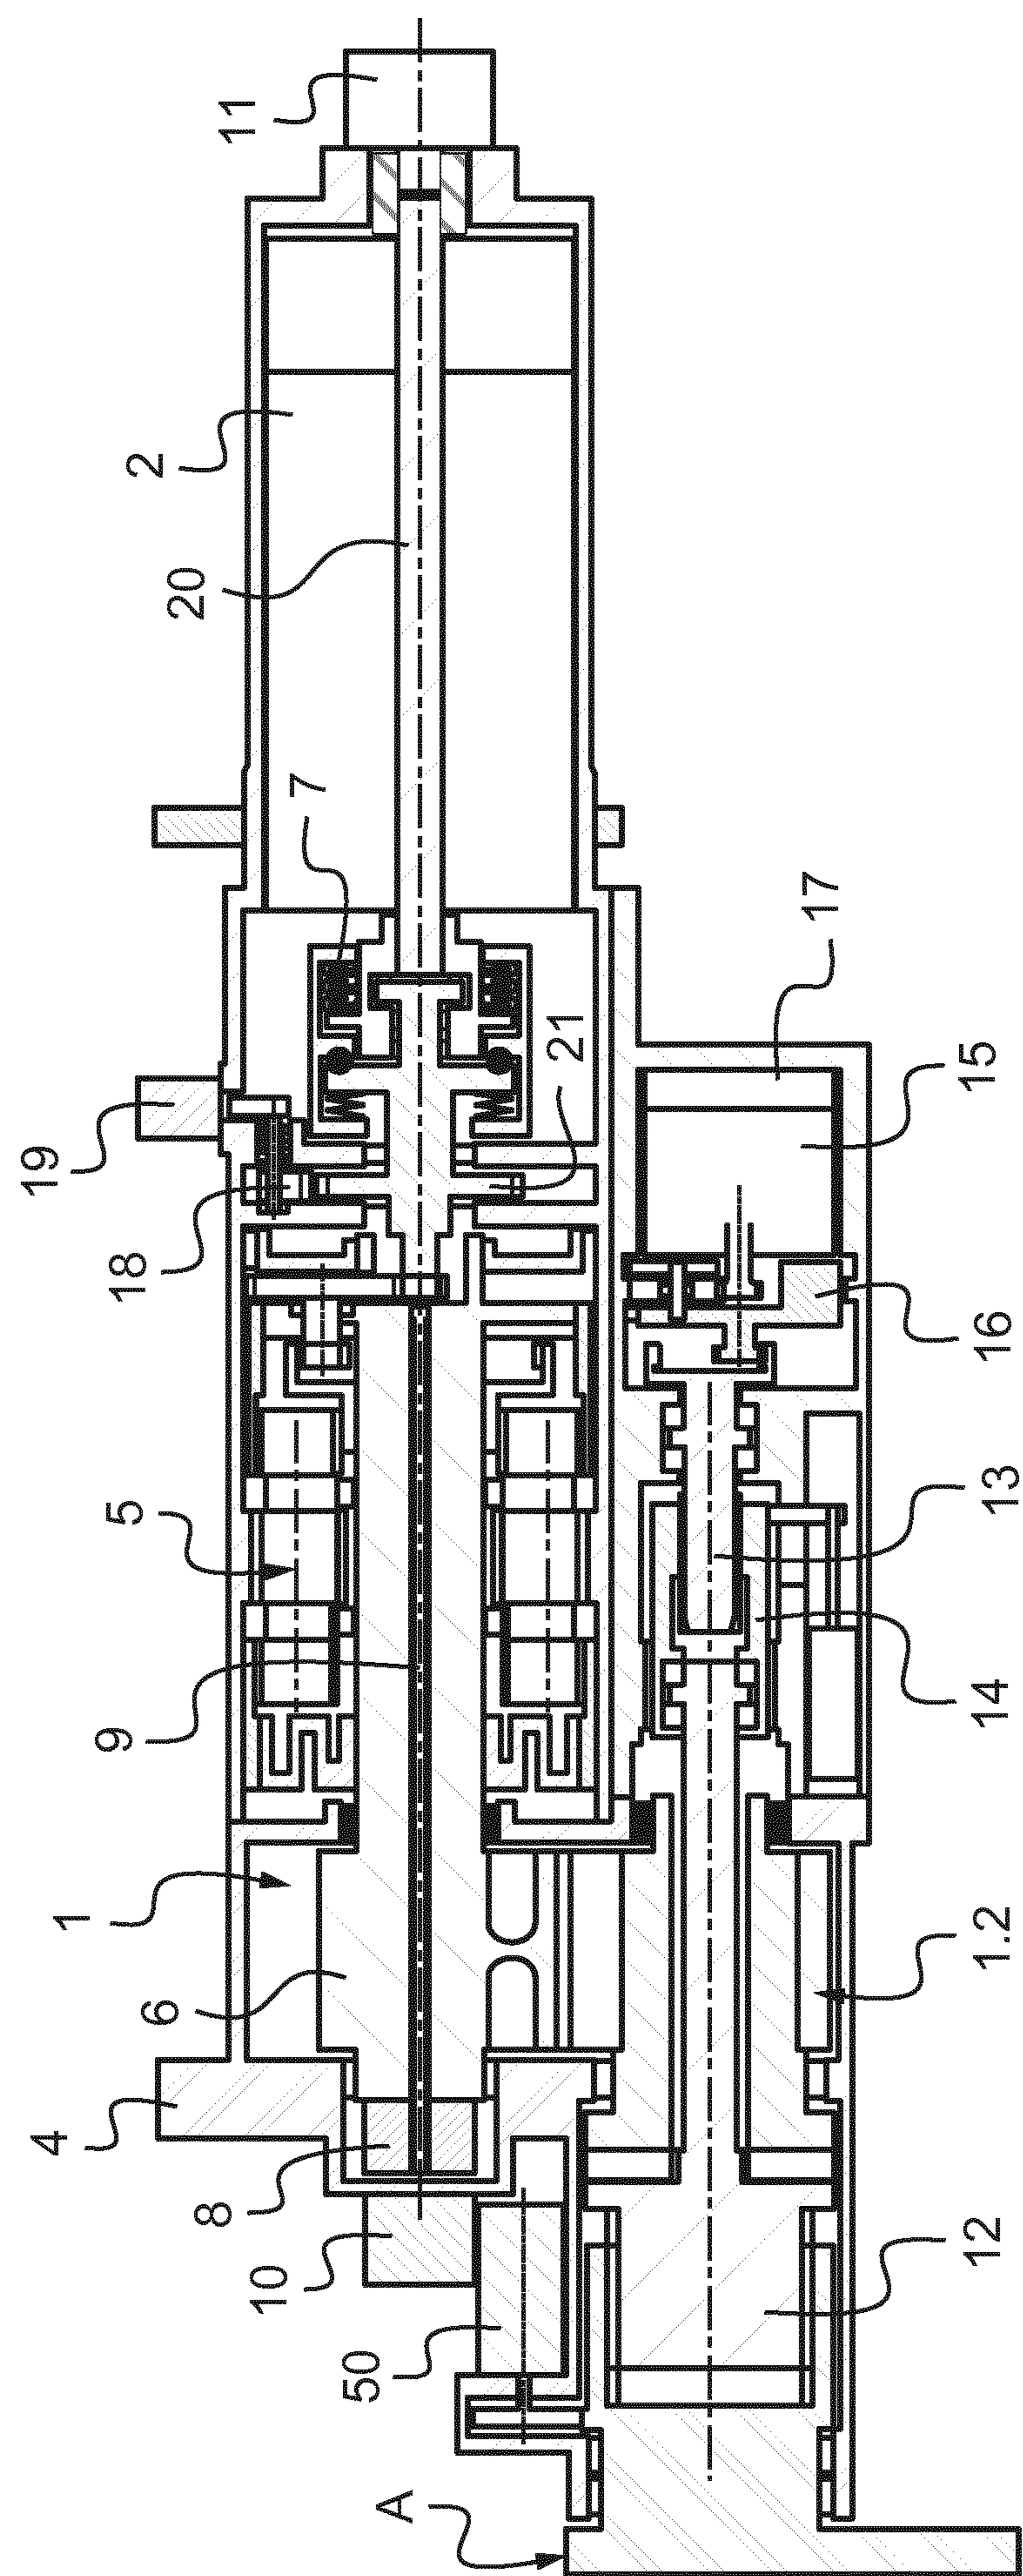

3/6

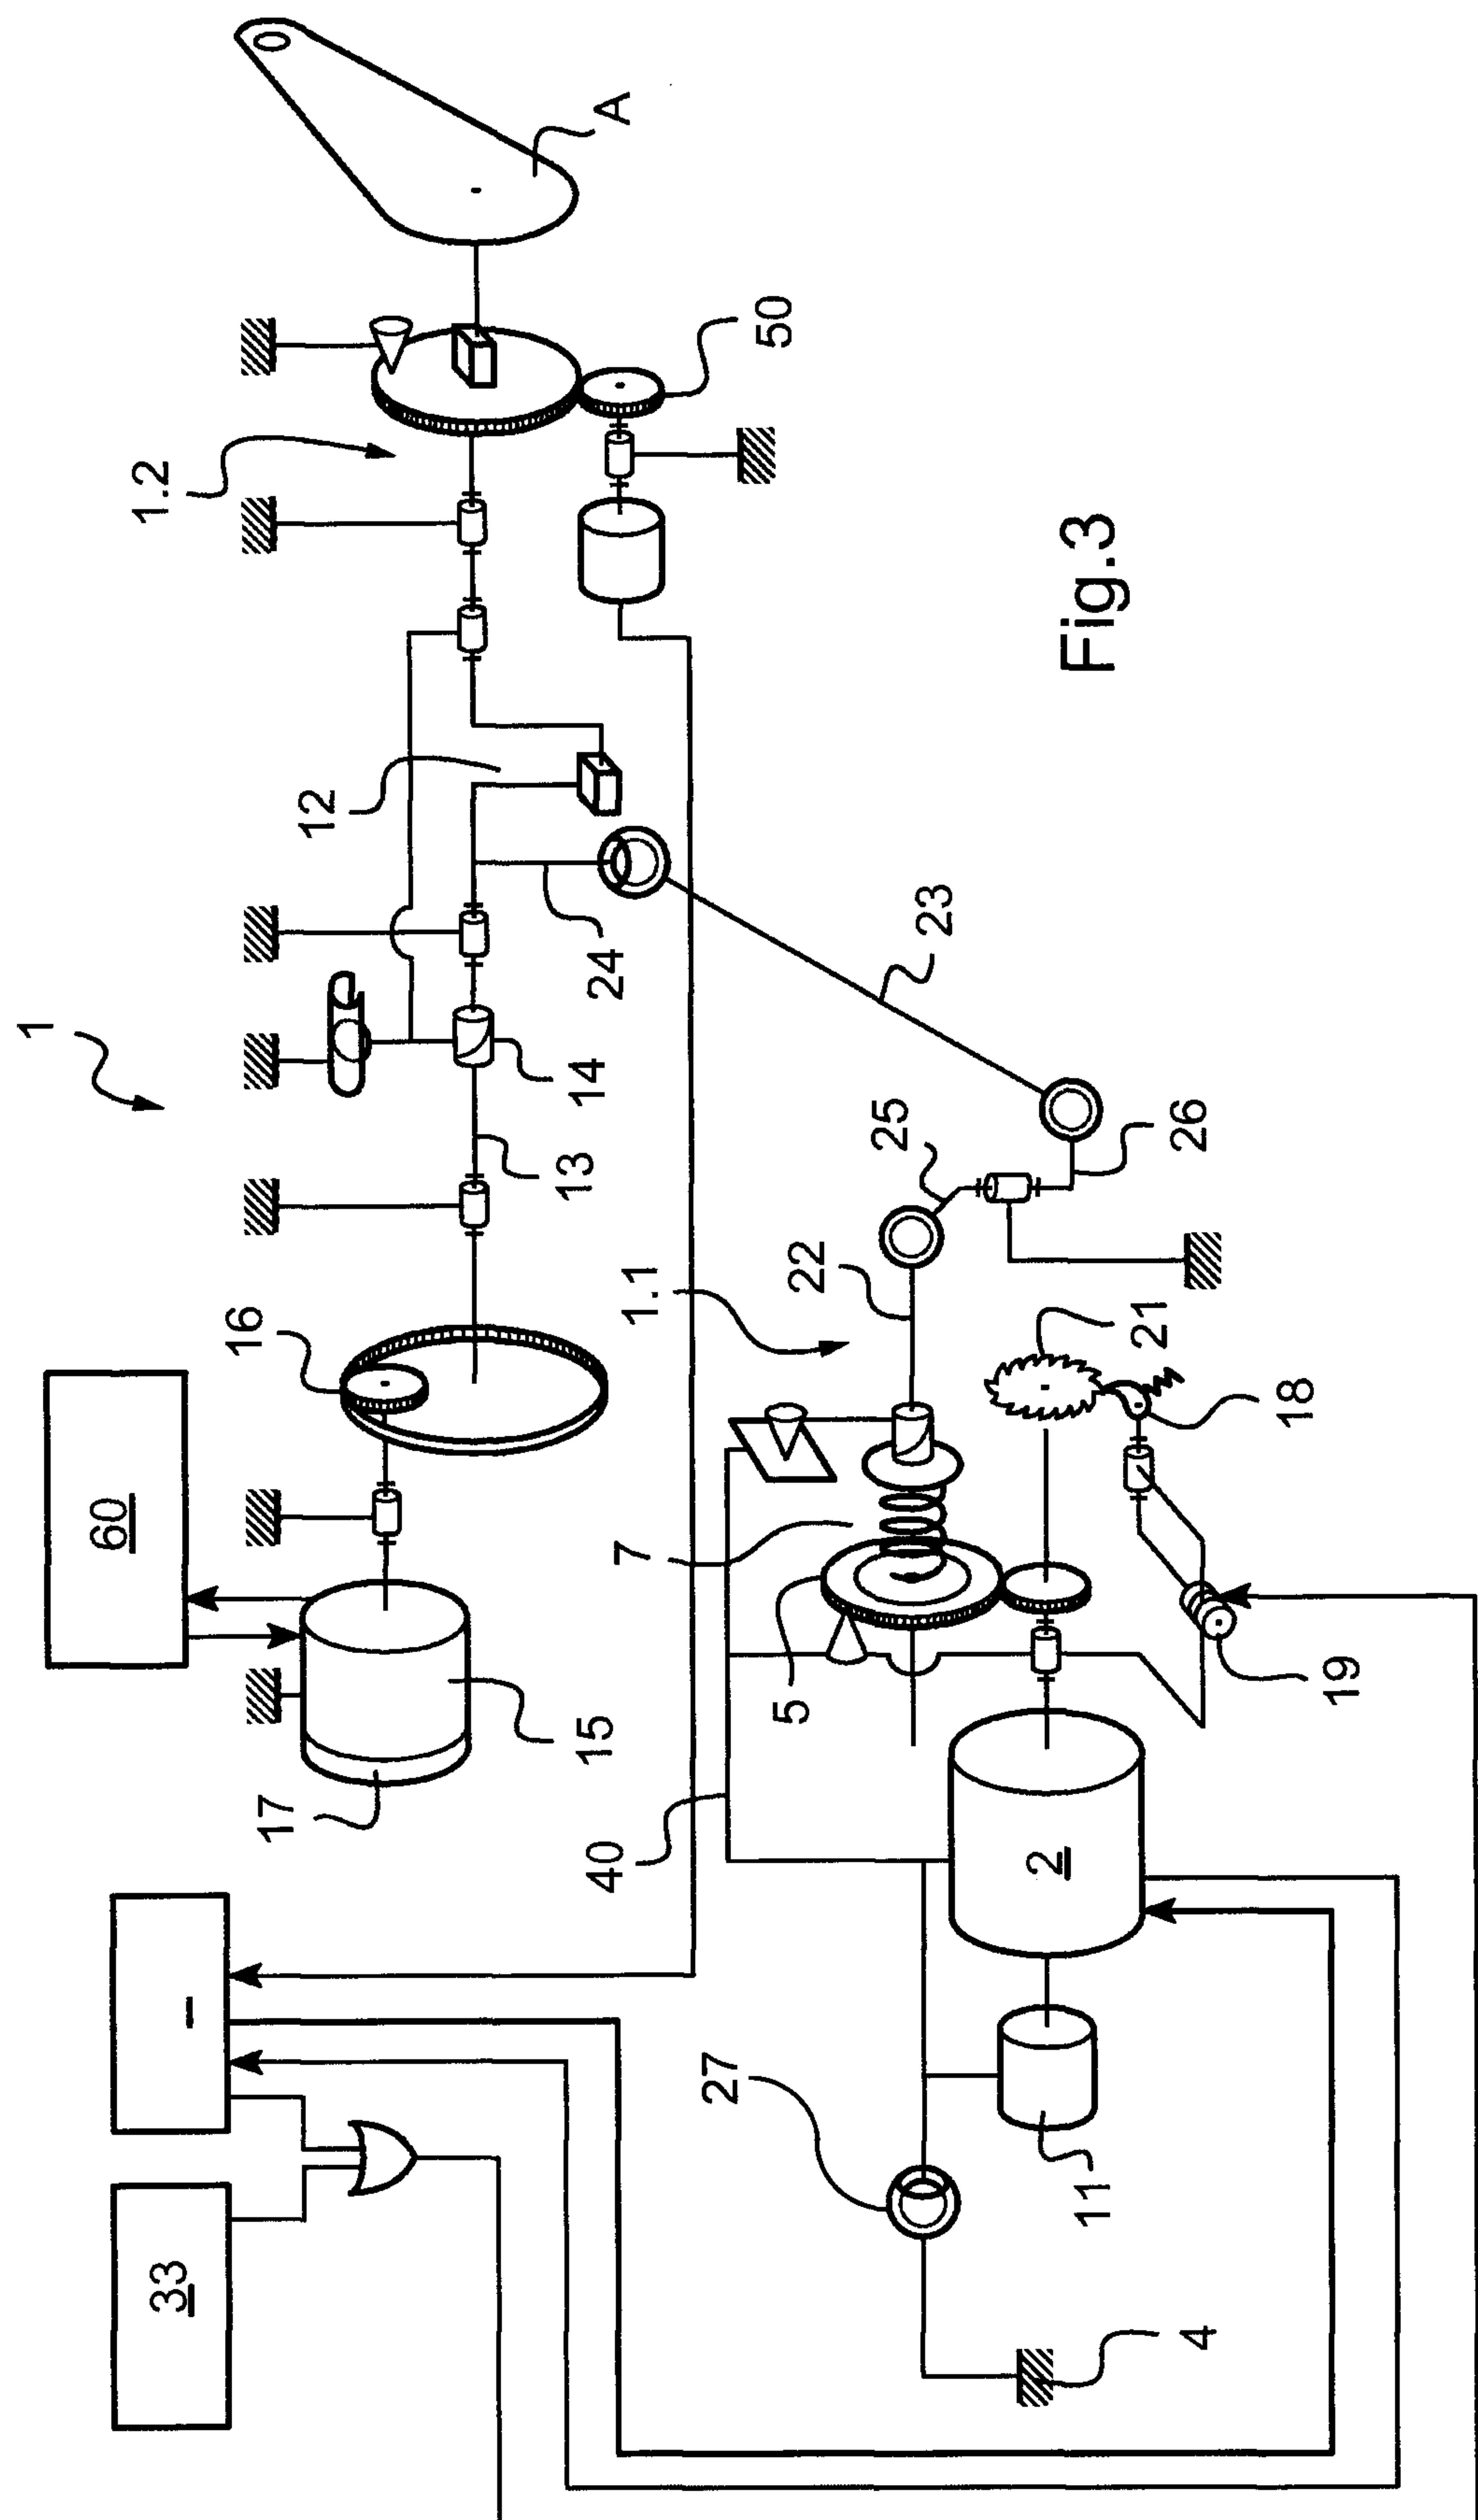

三
上

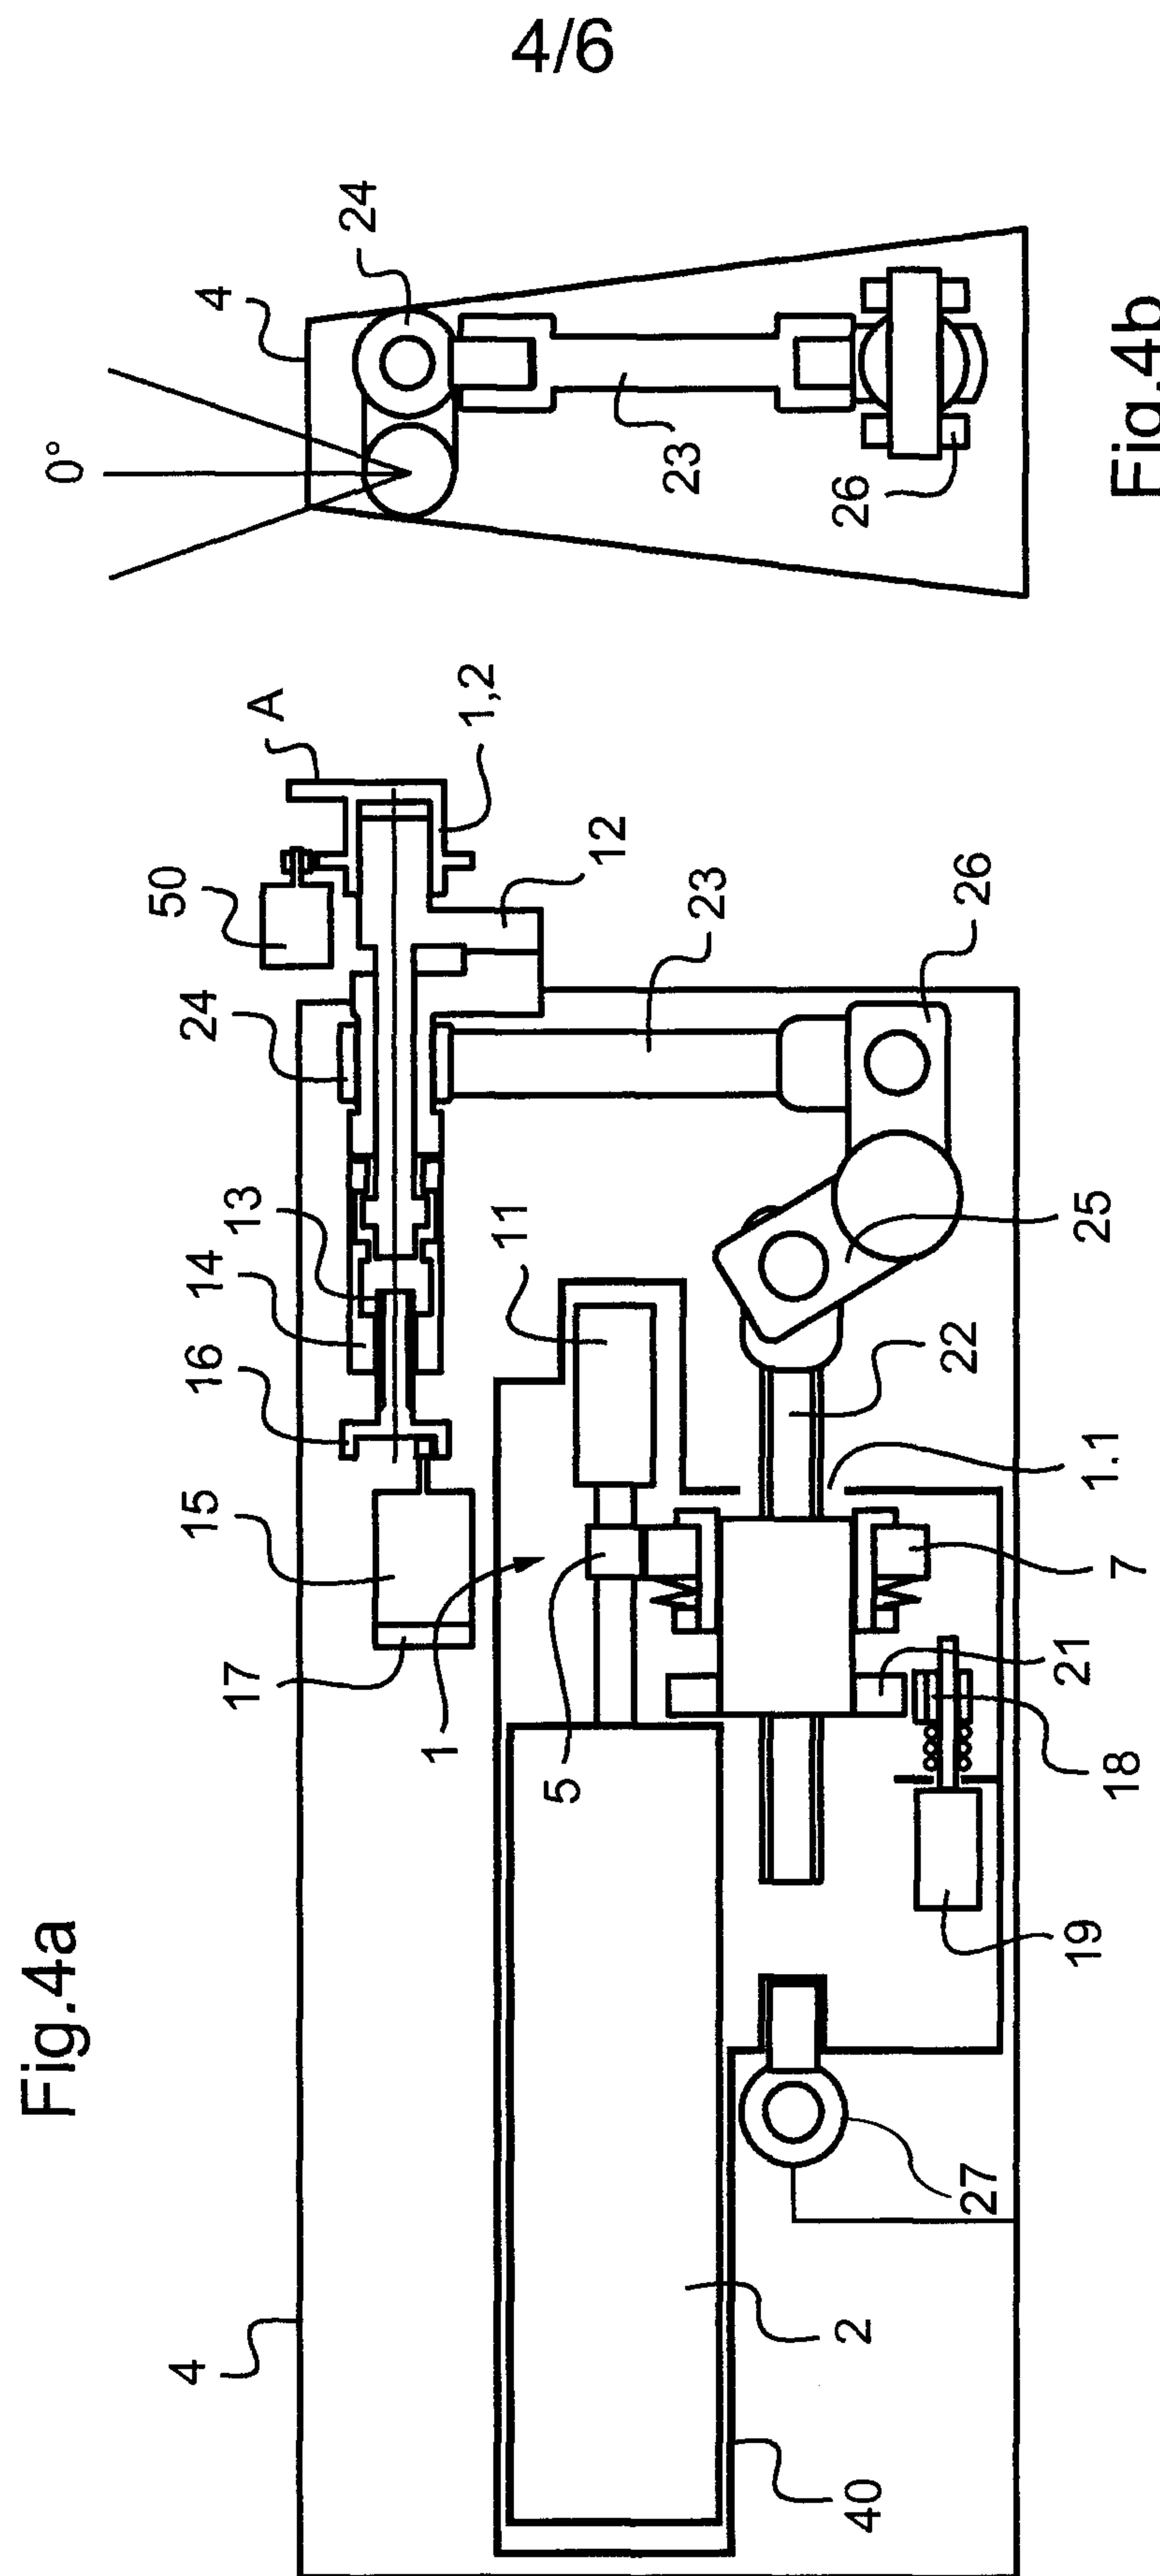

5/6

