Oct. 16, 1923. 1,470,639

C. PELLER

HOSE ATTACHMENT

Filed Nov. 23, 1922

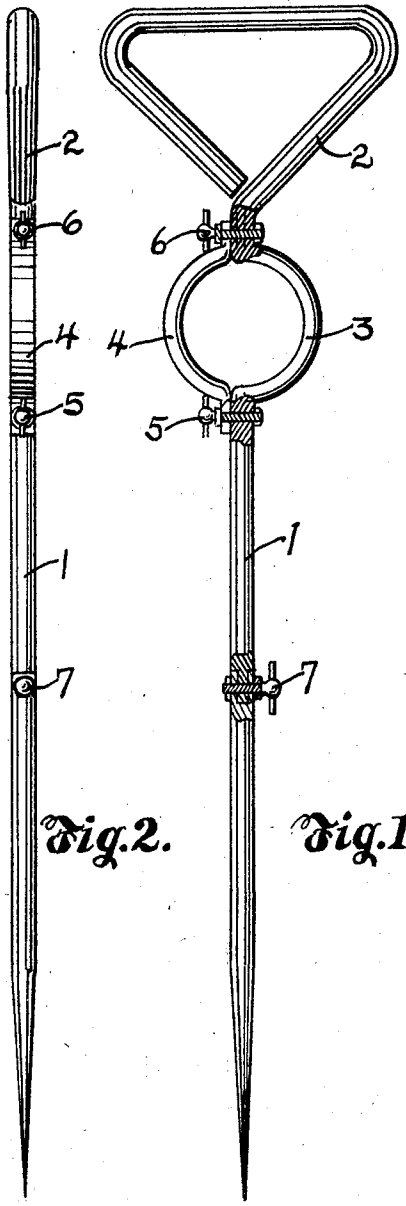


Fig.2. Fig.1.

Charles Peller
INVENTOR.

BY John M. Spellman
ATTORNEYS.

Patented Oct. 16, 1923. 1,470,639

UNITED STATES PATENT OFFICE.

CHARLES PELLER, OF OKMULGEE, OKLAHOMA.

HOSE ATTACHMENT.

Application filed November 23, 1922. Serial No. 602,898.

To all whom it may concern:

Be it known that I, CHARLES PELLER, a citizen of the United States, residing at Okmulgee, in the county of Okmulgee and State of Oklahoma, have invented certain new and useful Improvements in Hose Attachments, of which the following is a specification.

This invention relates to certain new and useful improvements in hose attachments, and relates more particularly to a hose supporter which is employed to support the hose so as to direct the stream or spray at any desired point.

The primary object of the invention is to provide a supporting device of this character which is of very simple and economical construction and which may be easily and quickly moved to various points about the surface to be watered.

In the drawings:

Figure 1 is a front elevation of the invention, parts being broken away and shown in section, and Figure 2, is a side elevation.

In proceeding in accordance with the present invention, a rod 1 is employed the lower end of which is pointed so as to be readily forced into the earth. If desired, the rod may be formed in sections, pivotally connected by a thumb screw or bolt 7, to allow the upper section of the rod to be inclined as desired.

The upper end portion of the rod is bent to provide a handle 2 and an intermediate semi-circular part 3 to form a rigid jaw.

The parts of the rod immediately adjacent to the ends of the jaw 3 are flat and disposed in alinement. A semi-circular movable jaw 4 is provided and has flat ends which extend outwardly therefrom and are engaged with the flat parts of the rod 1. Bolts are projected through the respective engaged flat parts of the jaws and are provided with wing nuts 5 and 6.

From the above it will be apparent that a simple compact and economical structure is afforded, and one in which but few parts are employed.

What is claimed is:—

In a hose supporter, a rod having its lower end pointed and formed to be forced into the earth, said rod having its upper end bent to have a handle and having an intermediate portion thereof bent into the form of a semi-circle to form a rigid jaw, the parts of the rod immediately adjacent to the ends of the jaw being flat and disposed in alinement, a movable jaw of semi-circular form having flat ends extending outwardly therefrom and engaged with said flat parts of the rod, bolts projected through the respective engaged flat parts of the jaws, and wing nuts on the bolts.

In testimony whereof I have signed my name to this specification.

CHAS. PELLER.