




(86) Date de dépôt PCT/PCT Filing Date: 2003/02/12
(87) Date publication PCT/PCT Publication Date: 2003/08/21
(45) Date de délivrance/Issue Date: 2008/01/29
(85) Entrée phase nationale/National Entry: 2004/08/11
(86) N° demande PCT/PCT Application No.: AU 2003/000151
(87) N° publication PCT/PCT Publication No.: 2003/068513
(30) Priorité/Priority: 2002/02/13 (AUPS0485)


(51) Cl.Int./Int.Cl. *B41J 2/165* (2006.01),
B41J 3/36 (2006.01)
(72) Inventeur/Inventor:
SILVERBROOK, KIA, AU
(73) Propriétaire/Owner:
SILVERBROOK RESEARCH PTY. LTD., AU
(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : IMPRIMANTE EQUIPEE D'UN DISPOSITIF DE PROTECTION
(54) Title: PRINTER WITH CAPPING DEVICE

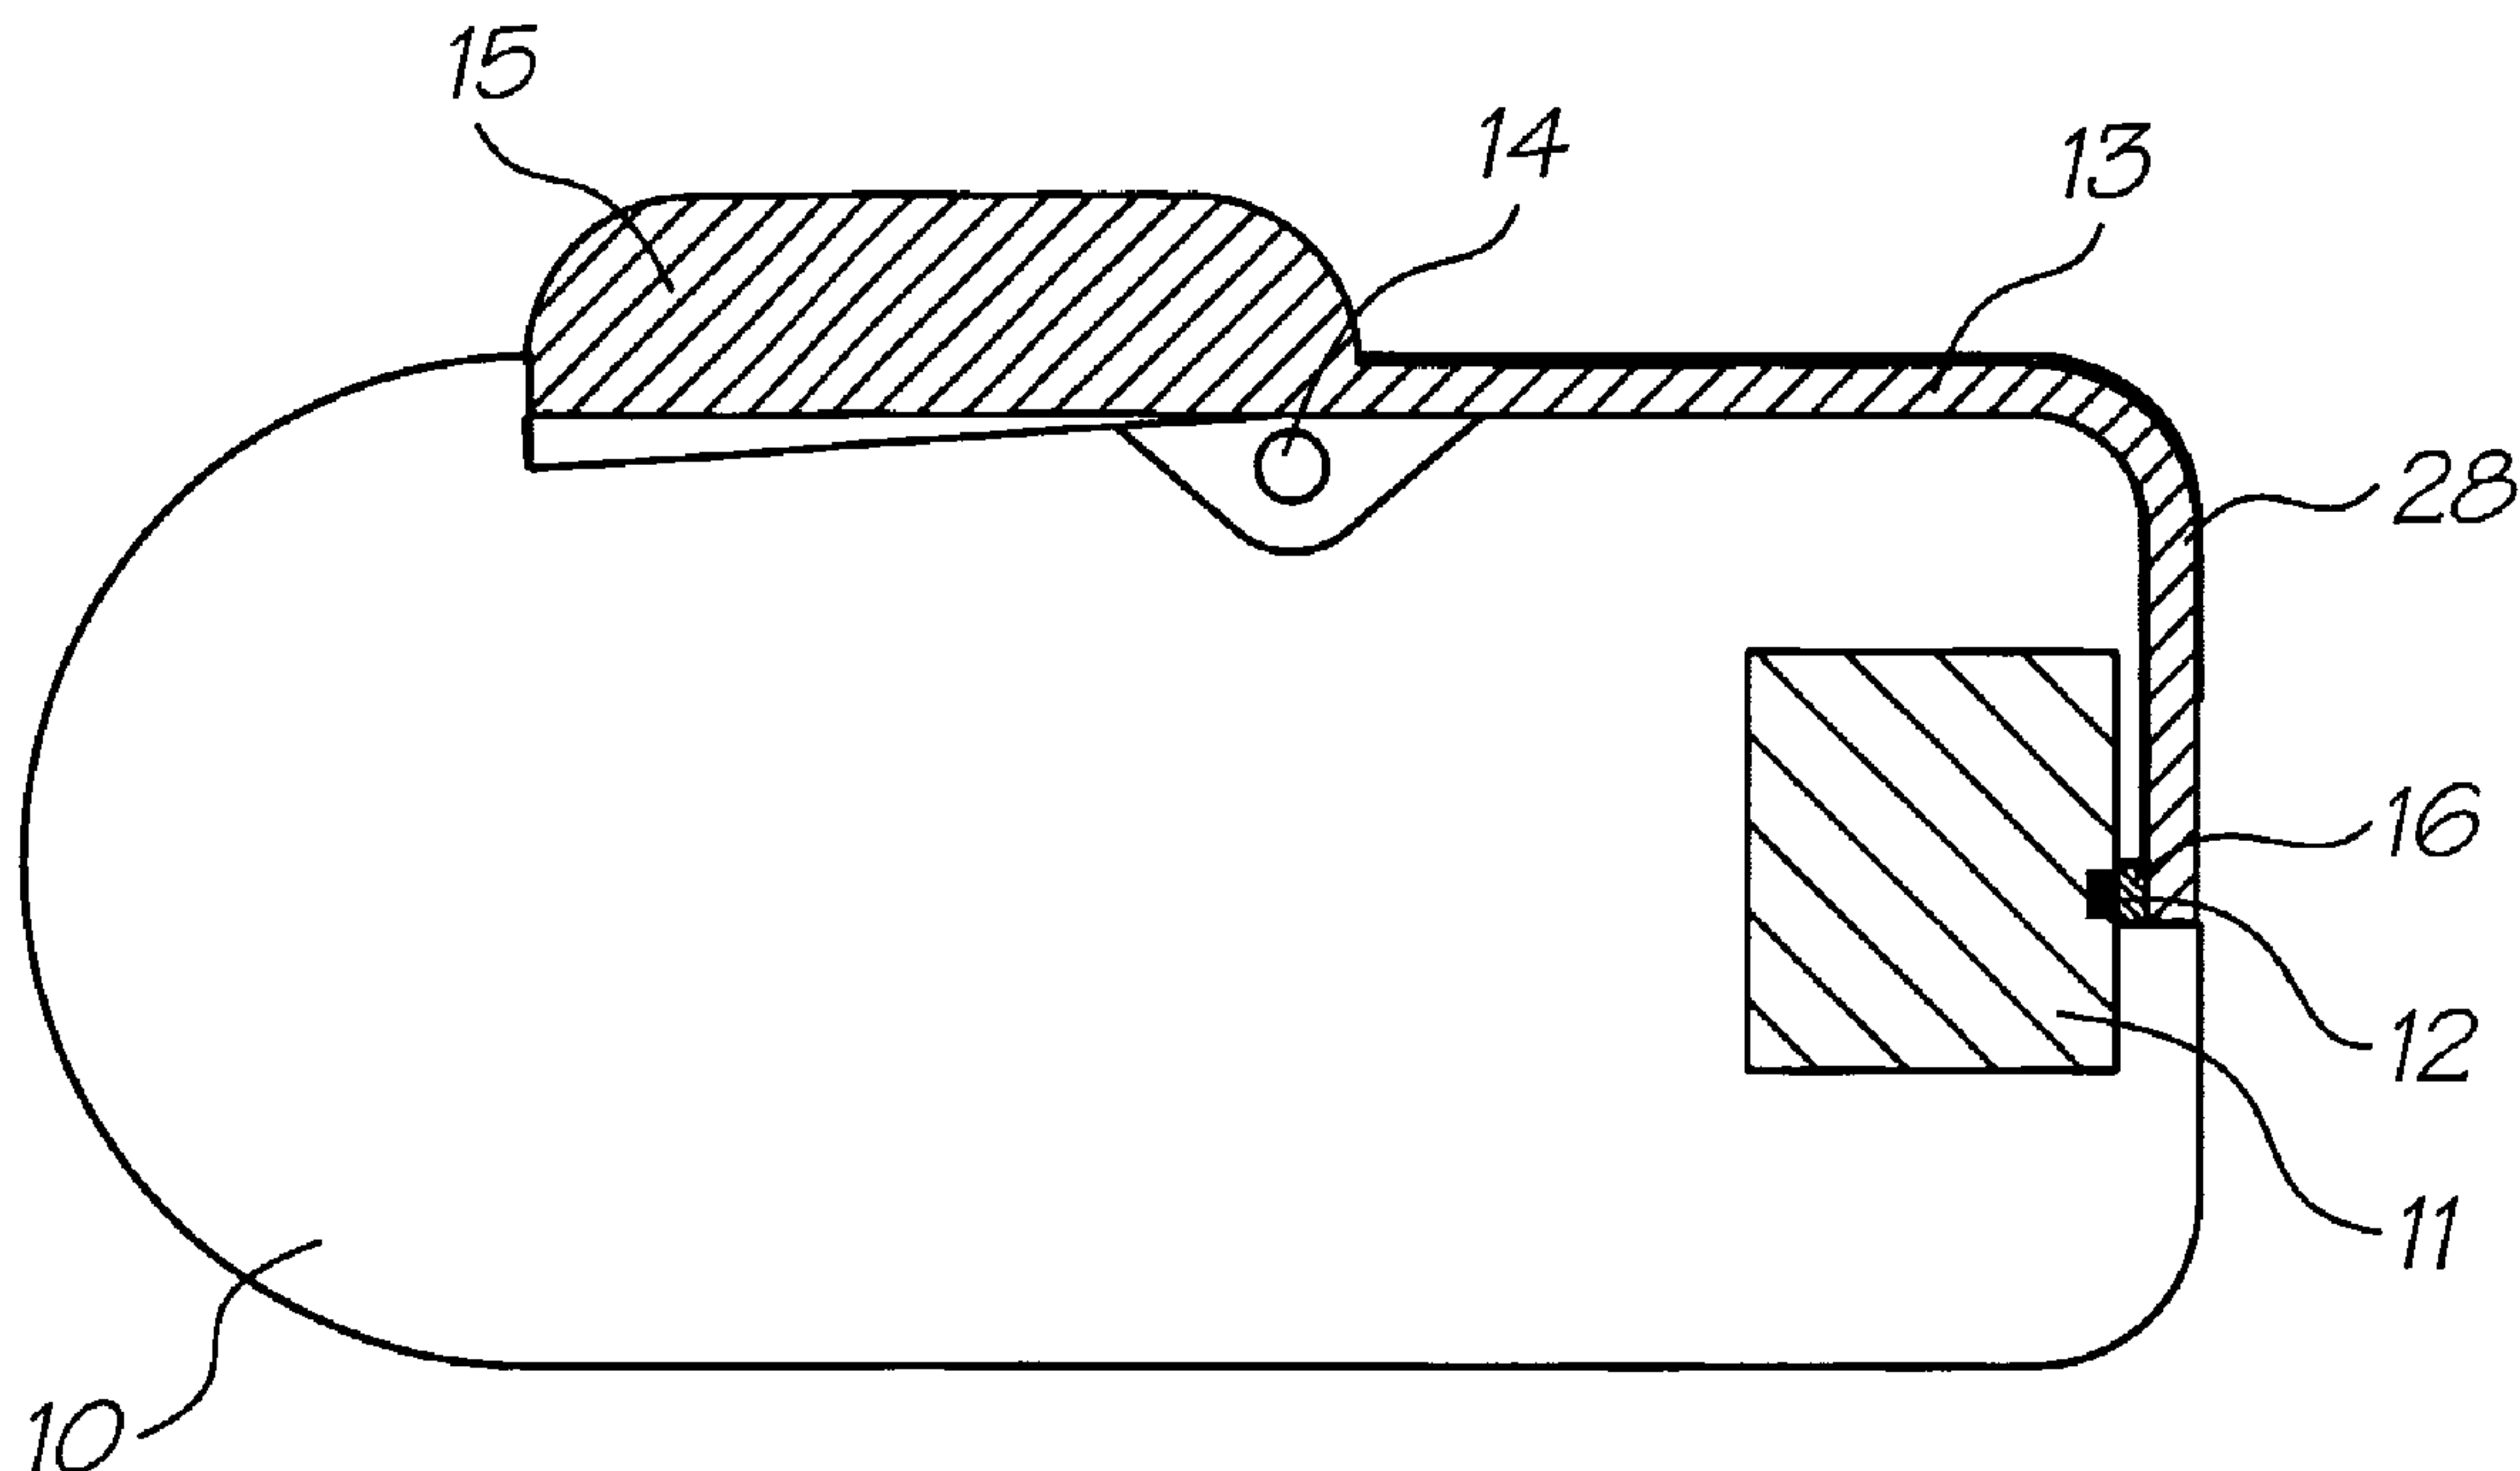

(57) Abrégé/Abstract:

A capping device seals against a print chip (12) of a printhead (11) fixed within a housing (10) of a hand-held portable printer. The capping device can be moved manually by a user or automatically by internal mechanisms to reveal the print chip for printing. The capping device includes a capper arm (13) with an activating region (15) and a perpendicular leg (28) with an elastomeric pad (16) that seals against the chip (12). The capping device can be moved by mechanisms such as a fulcrum or pivot point (14), a friction clutch (19) with peg (20), an eccentric cam (23) or an internal solenoid (26). The capper arm can be formed of a resilient, elastically deformable material such as metal or plastics. In a non-printing mode, the capping device seals the print chip to prevent evaporation of ink, drying or blockages.

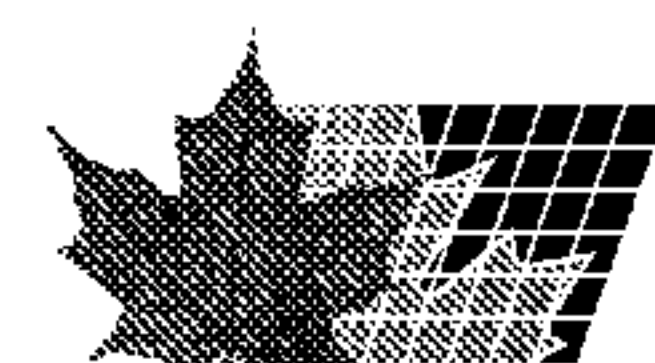

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/068513 A1(51) International Patent Classification⁷: **B41J 2/165**

(21) International Application Number: PCT/AU03/00151

(22) International Filing Date: 12 February 2003 (12.02.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
PS 0485 13 February 2002 (13.02.2002) AU(71) Applicant (for all designated States except US): **SILVERBROOK RESEARCH PTY. LTD.** [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SILVERBROOK, KIA** [AU/AU]; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).(74) Agent: **SILVERBROOK, KIA**; Silverbrook Research Pty Ltd, 393 Darling Street, Balmain, New South Wales 2041 (AU).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PRINTER WITH CAPPING DEVICE

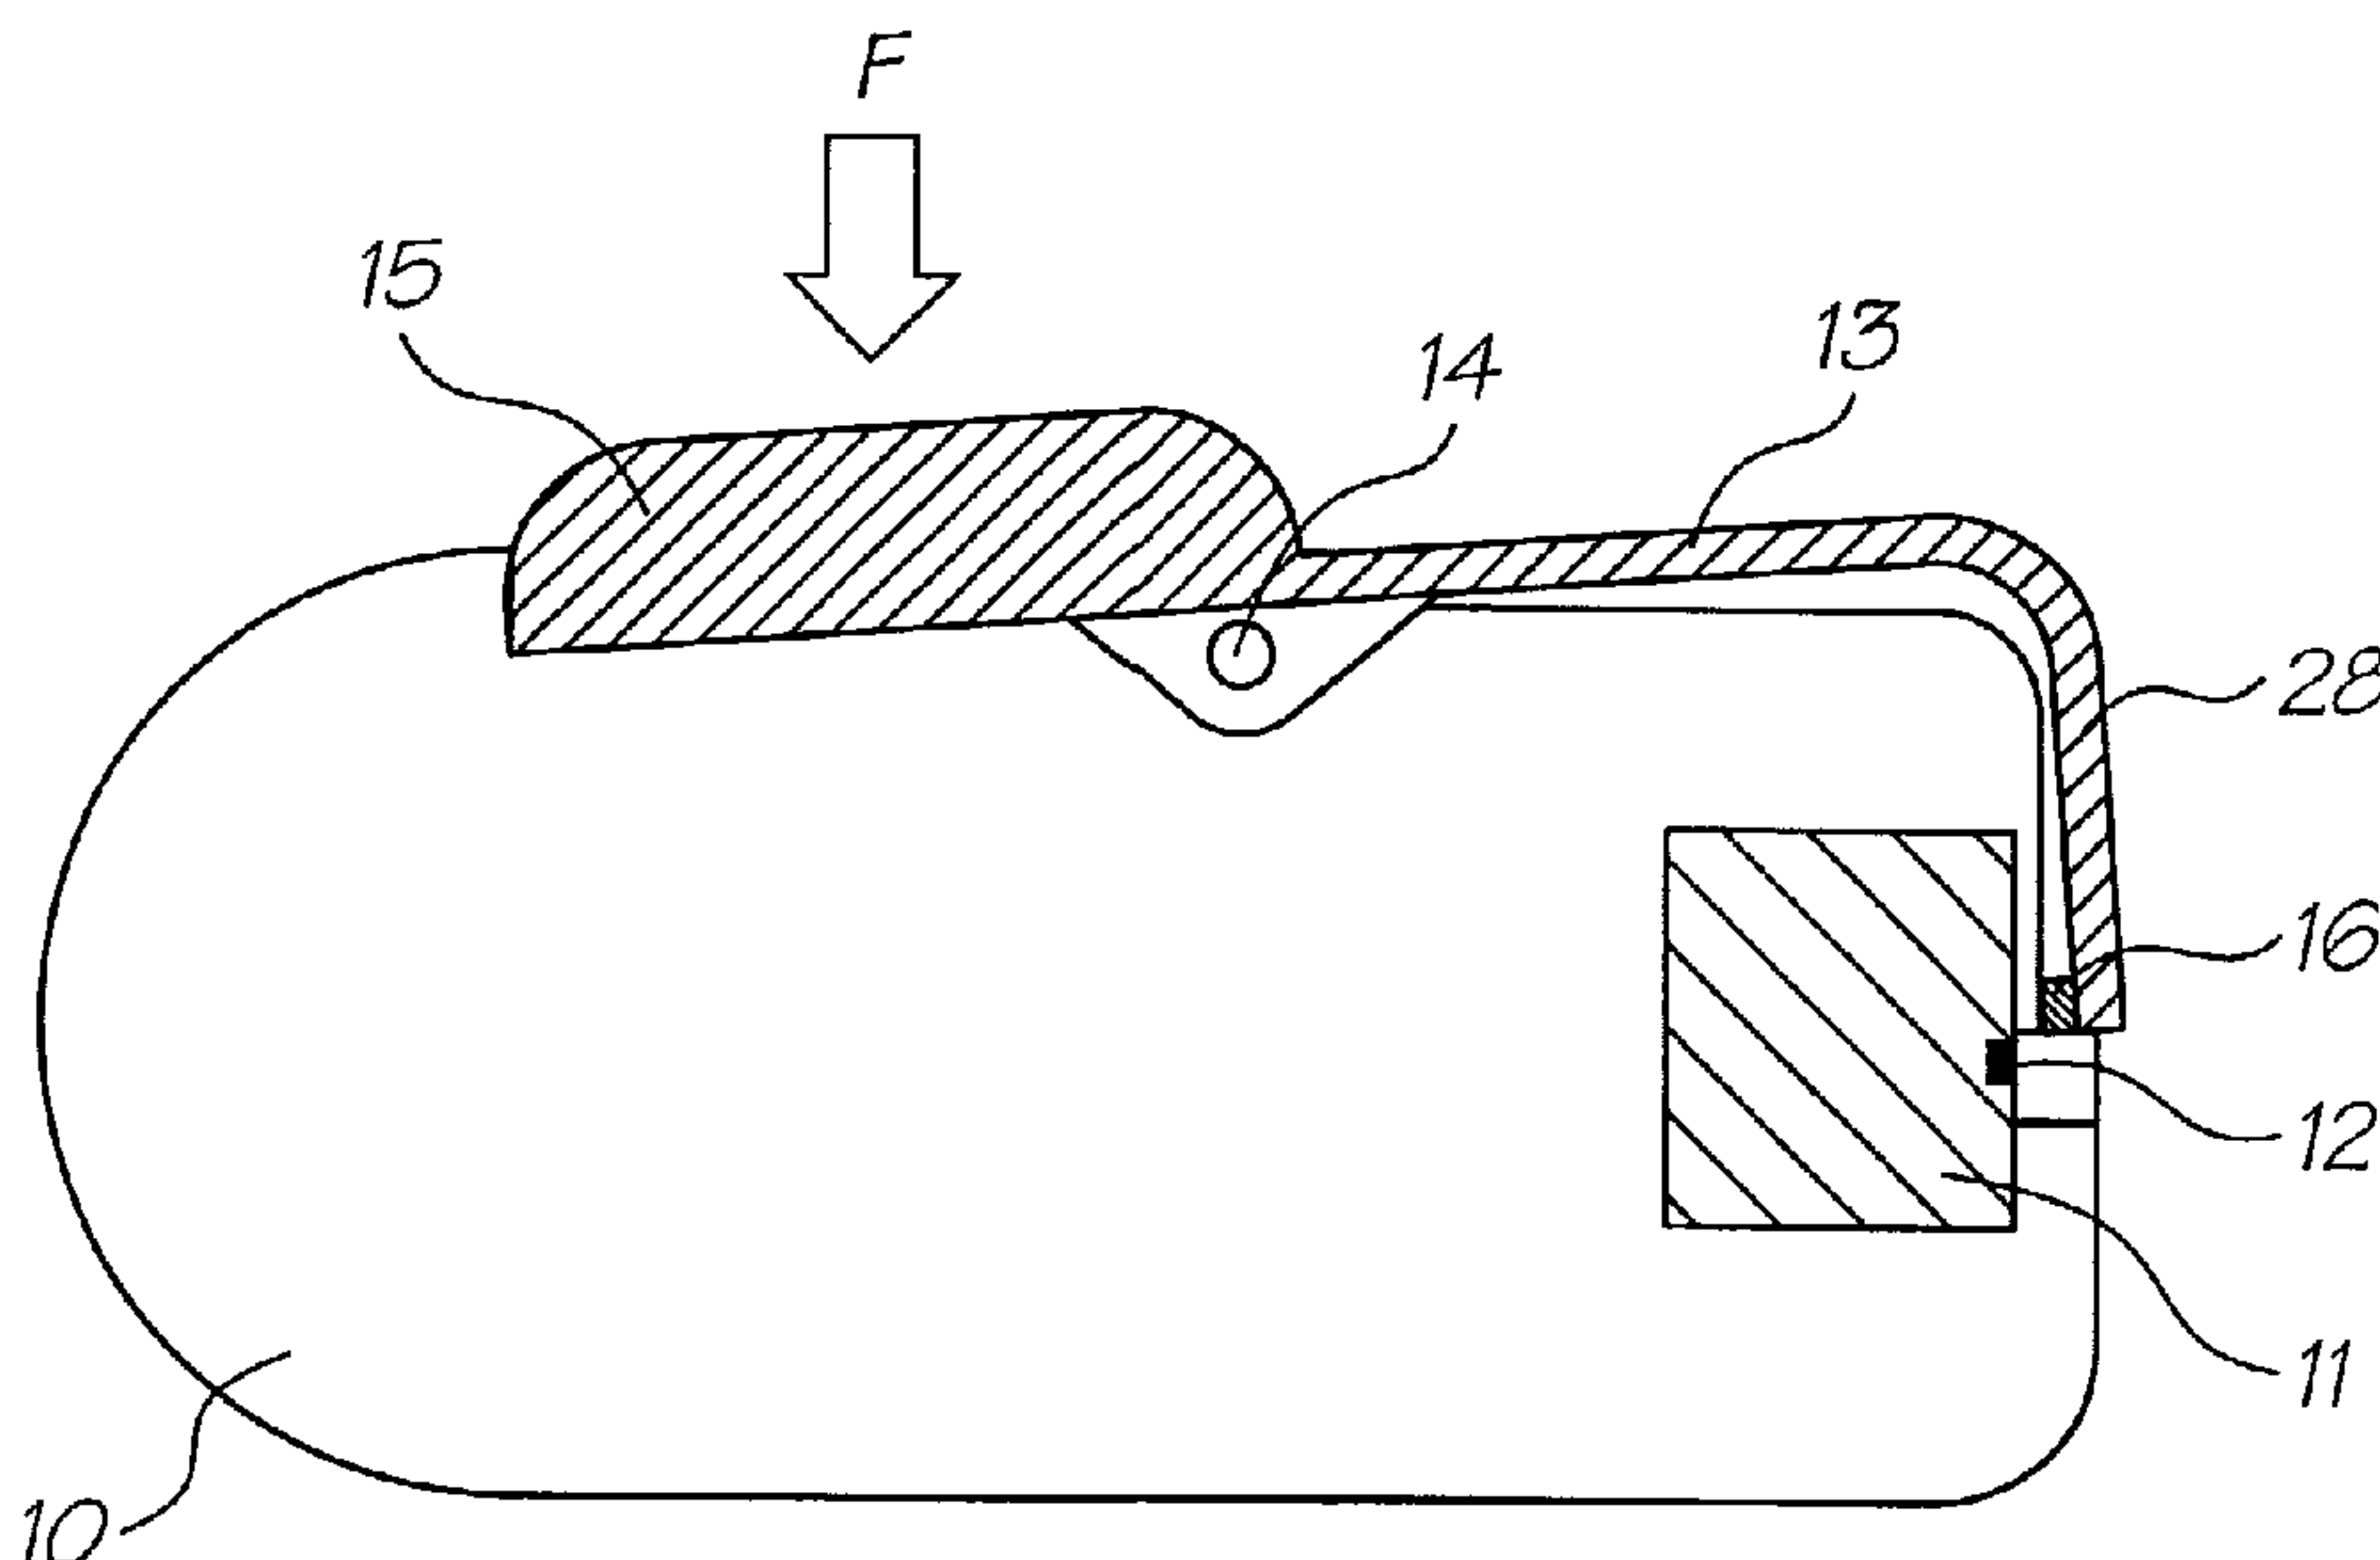

(57) **Abstract:** A capping device seals against a print chip (12) of a printhead (11) fixed within a housing (10) of a hand-held portable printer. The capping device can be moved manually by a user or automatically by internal mechanisms to reveal the print chip for printing. The capping device includes a capper arm (13) with an activating region (15) and a perpendicular leg (28) with an elastomeric pad (16) that seals against the chip (12). The capping device can be moved by mechanisms such as a fulcrum or pivot point (14), a friction clutch (19) with peg (20), an eccentric cam (23) or an internal solenoid (26). The capper arm can be formed of a resilient, elastically deformable material such as metal or plastics. In a non-printing mode, the capping device seals the print chip to prevent evaporation of ink, drying or blockages.



WO 03/068513 A1

WO 03/068513 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PRINTER WITH CAPPING DEVICE

FIELD OF THE INVENTION

The following invention relates to improvements in portable printer technology. More particularly, though not exclusively, the invention relates to a capping device for a hand-held drop-on-demand printer
 5 having a fixed printhead for ejecting droplets of ink onto a sheet of print media external to the printer.

BACKGROUND

Prior art drop-on-demand printers incorporate a supply of print media and employ a print media feed mechanism to transport the print media past the printhead or printheads to effect printing onto the print media. Applicant's "Manually Moveable Printer with Speed Sensor" discloses a portable, hand-held drop-on-demand
 10 inkjet printer having a fixed printhead. The printer can print an image onto a sheet external to the printer by passing the casing of the printer over and across the print media as the nozzles of the printhead eject ink.

During non-use periods of the printer, a capping device seals the printhead from the surrounding atmosphere to prevent evaporation of ink and the consequential blockage of the nozzles.

The present application is directed to specific capping arrangements for portable printers.

15 DISCLOSURE OF THE INVENTION

There is disclosed herein a portable printer comprising:

a housing,

a printhead affixed within the housing and including a plurality of ink ejection nozzles configured to eject droplets of ink toward a sheet of print media external to the housing in a printing operational mode, and

20 a capping device including an arm having a capping region that covers the ink ejection nozzles when the printer is in a non-printing operational mode and moves away from the nozzles to enable ejection of ink en route to a sheet of print media in said printing operational mode.

Preferably the arm is attached by a pivot to the housing.

25 Preferably the arm includes an activation region to one side of the pivot and a leg to the other side of the pivot, the leg extending in a direction substantially normal to the activation region and including said capping region.

Preferably an elastomeric pad is attached to the capping region.

Alternatively the arm is formed of a resilient, elastically deformable material being affixed at an end thereof to the housing.

30 In this alternative the housing can include a fulcrum and said arm includes an activation region to one side of said fulcrum and a leg to the other side of the fulcrum, the leg extending in a direction substantially normal to the activation region and including said capping region.

Alternatively again, the housing can have mounted thereto a wheel by which the housing rides over a sheet of print media in said printing operational mode, the wheel having associated therewith a friction clutch, the friction clutch including activation means for deflecting said capping region of the arm upon rotation of said wheel in said printing operational mode.

5 In this alternative said activation means can comprise a peg projecting from the friction clutch.

In this alternative the arm can be formed from an elastically deformable material including a deviation and wherein the peg bears against the deviation.

10 In a further alternative the arm can be attached to the housing by an integral spring and the printer further comprises an eccentric cam upon a shaft, the eccentric cam bearing against the arm and rotatable to deflect the arm so as to move said capping region away from the nozzles to enable ejection of ink in said printing operational mode.

In yet a further alternative, the printer can include a solenoid within the housing disposed with respect to the arm such that upon energization of the solenoid magnetic force draws the arm thereto so as to move said capping region away from the nozzles to enable ejection of ink in said printing operational mode.

15 In this alternative the arm can have attached thereto a metal plate to interact with the solenoid.

In this alternative the arm can include an integral spring interacting with the solenoid so as to bias the arm away from the solenoid.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Preferred forms of the present invention will now be described by way of example only with reference to the accompanying drawings wherein:

Figure 1 is a schematic cross-sectional end elevational view of a portable printer showing a first capping device in a capped position;

Figure 2 is a schematic cross-sectional end elevational view of the portable printer of Figure 1 with the first capping device shown in an uncapped position;

25 Figure 3 is a schematic cross-sectional end elevational view of a portable printer having a second type of capping device, in a capped position;

Figure 4 is a schematic cross-sectional end elevational view of the printer of Figure 3 with the second capping device, in an uncapped position;

30 Figure 5 is a schematic cross-sectional end elevational view of a portion of another printer having a third type of capping device, in a capped position;

Figure 6 is a schematic cross-sectional elevational view of a portion of the printer of Figure 5 with the third capping device in an uncapped position;

Figure 7 is a schematic front elevational view of a friction clutch used in the embodiment of Figures 5 and 6;

Figure 8 is a schematic cross-sectional end elevational view of a portion of a printer having a fourth type of capping device, in a capped position;

5 Figure 9 is a schematic cross-sectional end elevational view of a portion of the printer of Figure 8 with the fourth capping device shown in an uncapped configuration;

Figure 10 is a schematic cross-sectional end elevational view of a portion of a printer having a fifth type of capping device, in a capped configuration; and

10 Figure 11 is a schematic cross-sectional end elevational view of the portion of the printer of Figure 10 with the fifth capping device shown in an uncapped configuration.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the accompanying drawings there are schematically depicted a number of different capping configurations for a portable printer. The portable printer is intended to eject droplets of ink onto a sheet of print media as the printer is held by hand and moved across the sheet of print media.

15 In Figures 1 and 2 of the accompanying drawings there is schematically depicted in cross-section, a printer housing 10 having located therein a fixed printhead 11. The printhead 11 has a print chip 12 extending throughout its full width, that is, the width of an image to be printed. A first embodiment of a capper arm 13, which may be metallic or formed of other material such as plastics, is pivotally mounted at 14 to the printer housing 10. The capper arm 13 resides at the exterior of the housing 10 and includes a leg 28 to which there is
20 affixed an elastomeric pad 16 which seals against the chip 12 in the capped configuration depicted in Figure 1. The elastomeric pad 16 is moved away from the print chip 12 by leg 28 to enable printing in the configuration depicted in Figure 2.

The capper arm 13 includes an activating region 15 to which finger force can be applied as indicated by arrow F shown in Figure 2. The application of such finger force causes pivoting of the capper arm 13 about
25 pivot 14. A spring (not shown) can return the capper arm to the position shown in Figure 1.

A second embodiment of the capping device is depicted in Figures 3 and 4. In this embodiment, the capper arm 13 is formed of a resilient, elastically deformable material such as metal or plastics. In a particular preferred embodiment, the capper arm 13 is formed of stainless steel. The capper arm 13 is fixed at 17 to the printer housing 10 at one end thereof. A fulcrum 14 (depicted schematically) resides alongside the transition
30 of the capper arm 13 to the leg 29.

Upon the application of finger force F as indicated in Figure 4, the capper arm 13 deforms, resulting in the leg 29 moving to the position depicted in Figure 4 so as to draw the elastomeric pad 16 away from the print chip 12 for printing purposes. Upon release of the finger force F, the resilience of the capper returns it to the configuration depicted in Figure 3 wherein the elastomeric pad 16 seals against the print chip 12.

In the first and second embodiments of the capping device shown in Figures 1 to 4, a user grasps the printer housing 10 and in doing so, inherently applies a force F to the activation region 15 of the capper arm 13. There may be provided a switch within the printer housing and associated with the capper arm 13 such that application of finger force F depresses the switch to set the printhead 11 into a printing operational mode.

5 In Figures 5 to 7 of the accompanying drawings there is schematically depicted a third embodiment of a capping device incorporating a friction clutch. In this embodiment, the printer housing 10 has mounted thereto one or more wheels 18, at least one of which can be associated with an optical sensor. One of the wheels, ie. wheel 18 in this example, can have associated with it a friction clutch 19. Wheel 18 and clutch 19 can be mounted upon a common shaft 30 (Figure 7) and biased against each other such that rotation of wheel 10 18 causes rotation of clutch 19 until something stops the clutch 19 from spinning, whereupon wheel 18 continues to rotate with a dynamic frictional engagement between it and the non-rotating clutch 19. In the embodiment depicted, the friction clutch 19 has a peg 20 extending laterally from it. This peg 20 is received behind a deviated portion 21 of the capper arm 13. In this embodiment, the capper arm 13 is attached within the printer housing 10 such that portion 29 moves in a linear fashion, ie. it is guided to move in a straight line. 15 Upon rotation of friction clutch 19, the peg 20 bears against the deviated portion 21 of capper arm 13 to move it in the direction indicated by arrow C (Figure 6). This, in turn, draws the elastomeric pad 16 away from the chip 12. It should be appreciated in this regard that wheel 18 is riding upon the print media 22 to effect wheel rotation in the direction indicated by arrow W in Figure 6. When the printer housing 10 is lifted away from the print media 22, rotation W ceases, whereupon resilience of the capper arm 13 pushes the peg 20 back to 20 the position depicted at Figure 5 and at the same time returns the elastomeric pad 16 to seal the print chip 12 as shown in Figure 5.

In a fourth embodiment of the capping device shown in Figures 8 and 9, there is provided an internally driven camshaft 24 including an eccentric cam 23. Camshaft 24 might be selectively rotated by means of an electric motor for example. In this embodiment, the capper arm 13 is mounted to a pivot 14 and 25 is biased by an integral spring 25 against the eccentric cam 23. That is, the integral spring 25 biases the leg portion 28 of the capper arm 13 to the position depicted in Figure 8 whereat the elastomeric pad 16 seals over chip 12. When the camshaft 24 is rotated such that the eccentric cam rotates into the position depicted in Figure 9, the capper arm 13 deforms integral spring 25 while the elastomeric pad 16 moves away from the print chip 12.

30 In Figures 10 and 11 of the accompanying drawings, there is depicted a fifth embodiment of the capping device wherein the capper arm 13 is activated by an internal solenoid 26. In this embodiment, the capper arm 13 slides linearly between the positions depicted in Figures 10 and 11. The capper arm 13 includes an integral spring 25 that bears against solenoid 26. As an alternative, the spring 25 could bear against some other fixed internal structure of the printer housing 10. Attached to the capper arm 13 is a metallic plate 27 to 35 be attracted to the solenoid 26 by magnetic interaction therewith. Application of electric current to the solenoid 26 creates a magnetic field drawing the metal plate 27 thereto. This in turn draws the capper 13 to

the uncapped position where the elastomeric pad 16 has moved away from the print chip 12 to enable printing to commence.

When the solenoid is no longer receiving electric current, its magnetic field diminishes or ceases enabling the spring 28 to return the capper arm 13 to the capped position depicted in Figure 10.

- 5 It should be appreciated that modifications and alterations obvious to those skilled in the art are not to be considered as beyond the scope of the present invention. For example, the elastomeric pad need not be affixed to the capper arm itself. Instead, it might be attached to the printhead 11 so as to surround the print chip 12 and come into sealing contact with a smooth surface of leg 28 of capper arm 13.

WE CLAIM:

- 1 A portable printer comprising:
 - a housing adapted to be held by hand and moved manually across a sheet of print media,
 - 5 a printhead affixed within the housing and including a plurality of ink ejection nozzles configured to eject droplets of ink toward the sheet of print media external to the housing in a printing operational mode, and
 - a hand-activated capping device including an arm having a capping region that covers the ink ejection nozzles when the printer is in a non-printing operational mode and moves away from the nozzles to enable ejection of ink en route to a sheet of print media in said printing operational mode;
 - 10 wherein the housing has mounted thereto a wheel by which the housing rides over a sheet of print media in said printing operational mode, the wheel having associated therewith a friction clutch, the friction clutch including activation means for deflecting said capping region of the arm upon rotation of said wheel in said printing operational mode.
- 15 2. The printer of claim 1 wherein the arm is attached by a pivot to the housing.
3. The printer of claim 2 wherein the arm includes an activation region to one side of the pivot and a leg to the other side of the pivot, the leg extending in a direction substantially normal to the activation region and including said capping region.
- 20 4. The printer of claim 3 wherein an elastomeric pad is attached to the capping region.
5. The printer of claim 1 wherein the arm is formed of a resilient, elastically deformable material being affixed at an end thereof to the housing.
- 25 6. The printer of claim 5 wherein the housing includes a fulcrum and said arm includes an activation region to one side of said fulcrum and a leg to the other side of the fulcrum, the leg extending in a direction substantially normal to the activation region and including said capping region.
- 30 7. The printer of claim 5 wherein an elastomeric pad is attached to the capping region.
8. The printer of claim 1 wherein said activation means comprises a peg projecting from the friction clutch.
- 35 9. The printer of claim 8 wherein the arm is formed from an elastically deformable material including a deviation and wherein the peg bears against the deviation.

10. The printer of claim 1 wherein the arm is attached to the housing by an integral spring and the printer further comprises an eccentric cam upon a shaft, the eccentric cam bearing against the arm and rotatable to deflect the arm so as to move said capping region away from the nozzles to enable ejection of ink in said printing operational mode.

5

11. The printer of claim 1 including a solenoid within the housing disposed with respect to the arm such that upon energization of the solenoid magnetic force draws the arm thereto so as to move said capping region away from the nozzles to enable ejection of ink in said printing operational mode.

10

12. The printer of claim 11 wherein the arm has attached thereto a metal plate to interact with the solenoid.

13. The printer of claim 12 wherein the arm includes an integral spring interacting with the solenoid so as to bias the arm away from the solenoid.

15

1/5

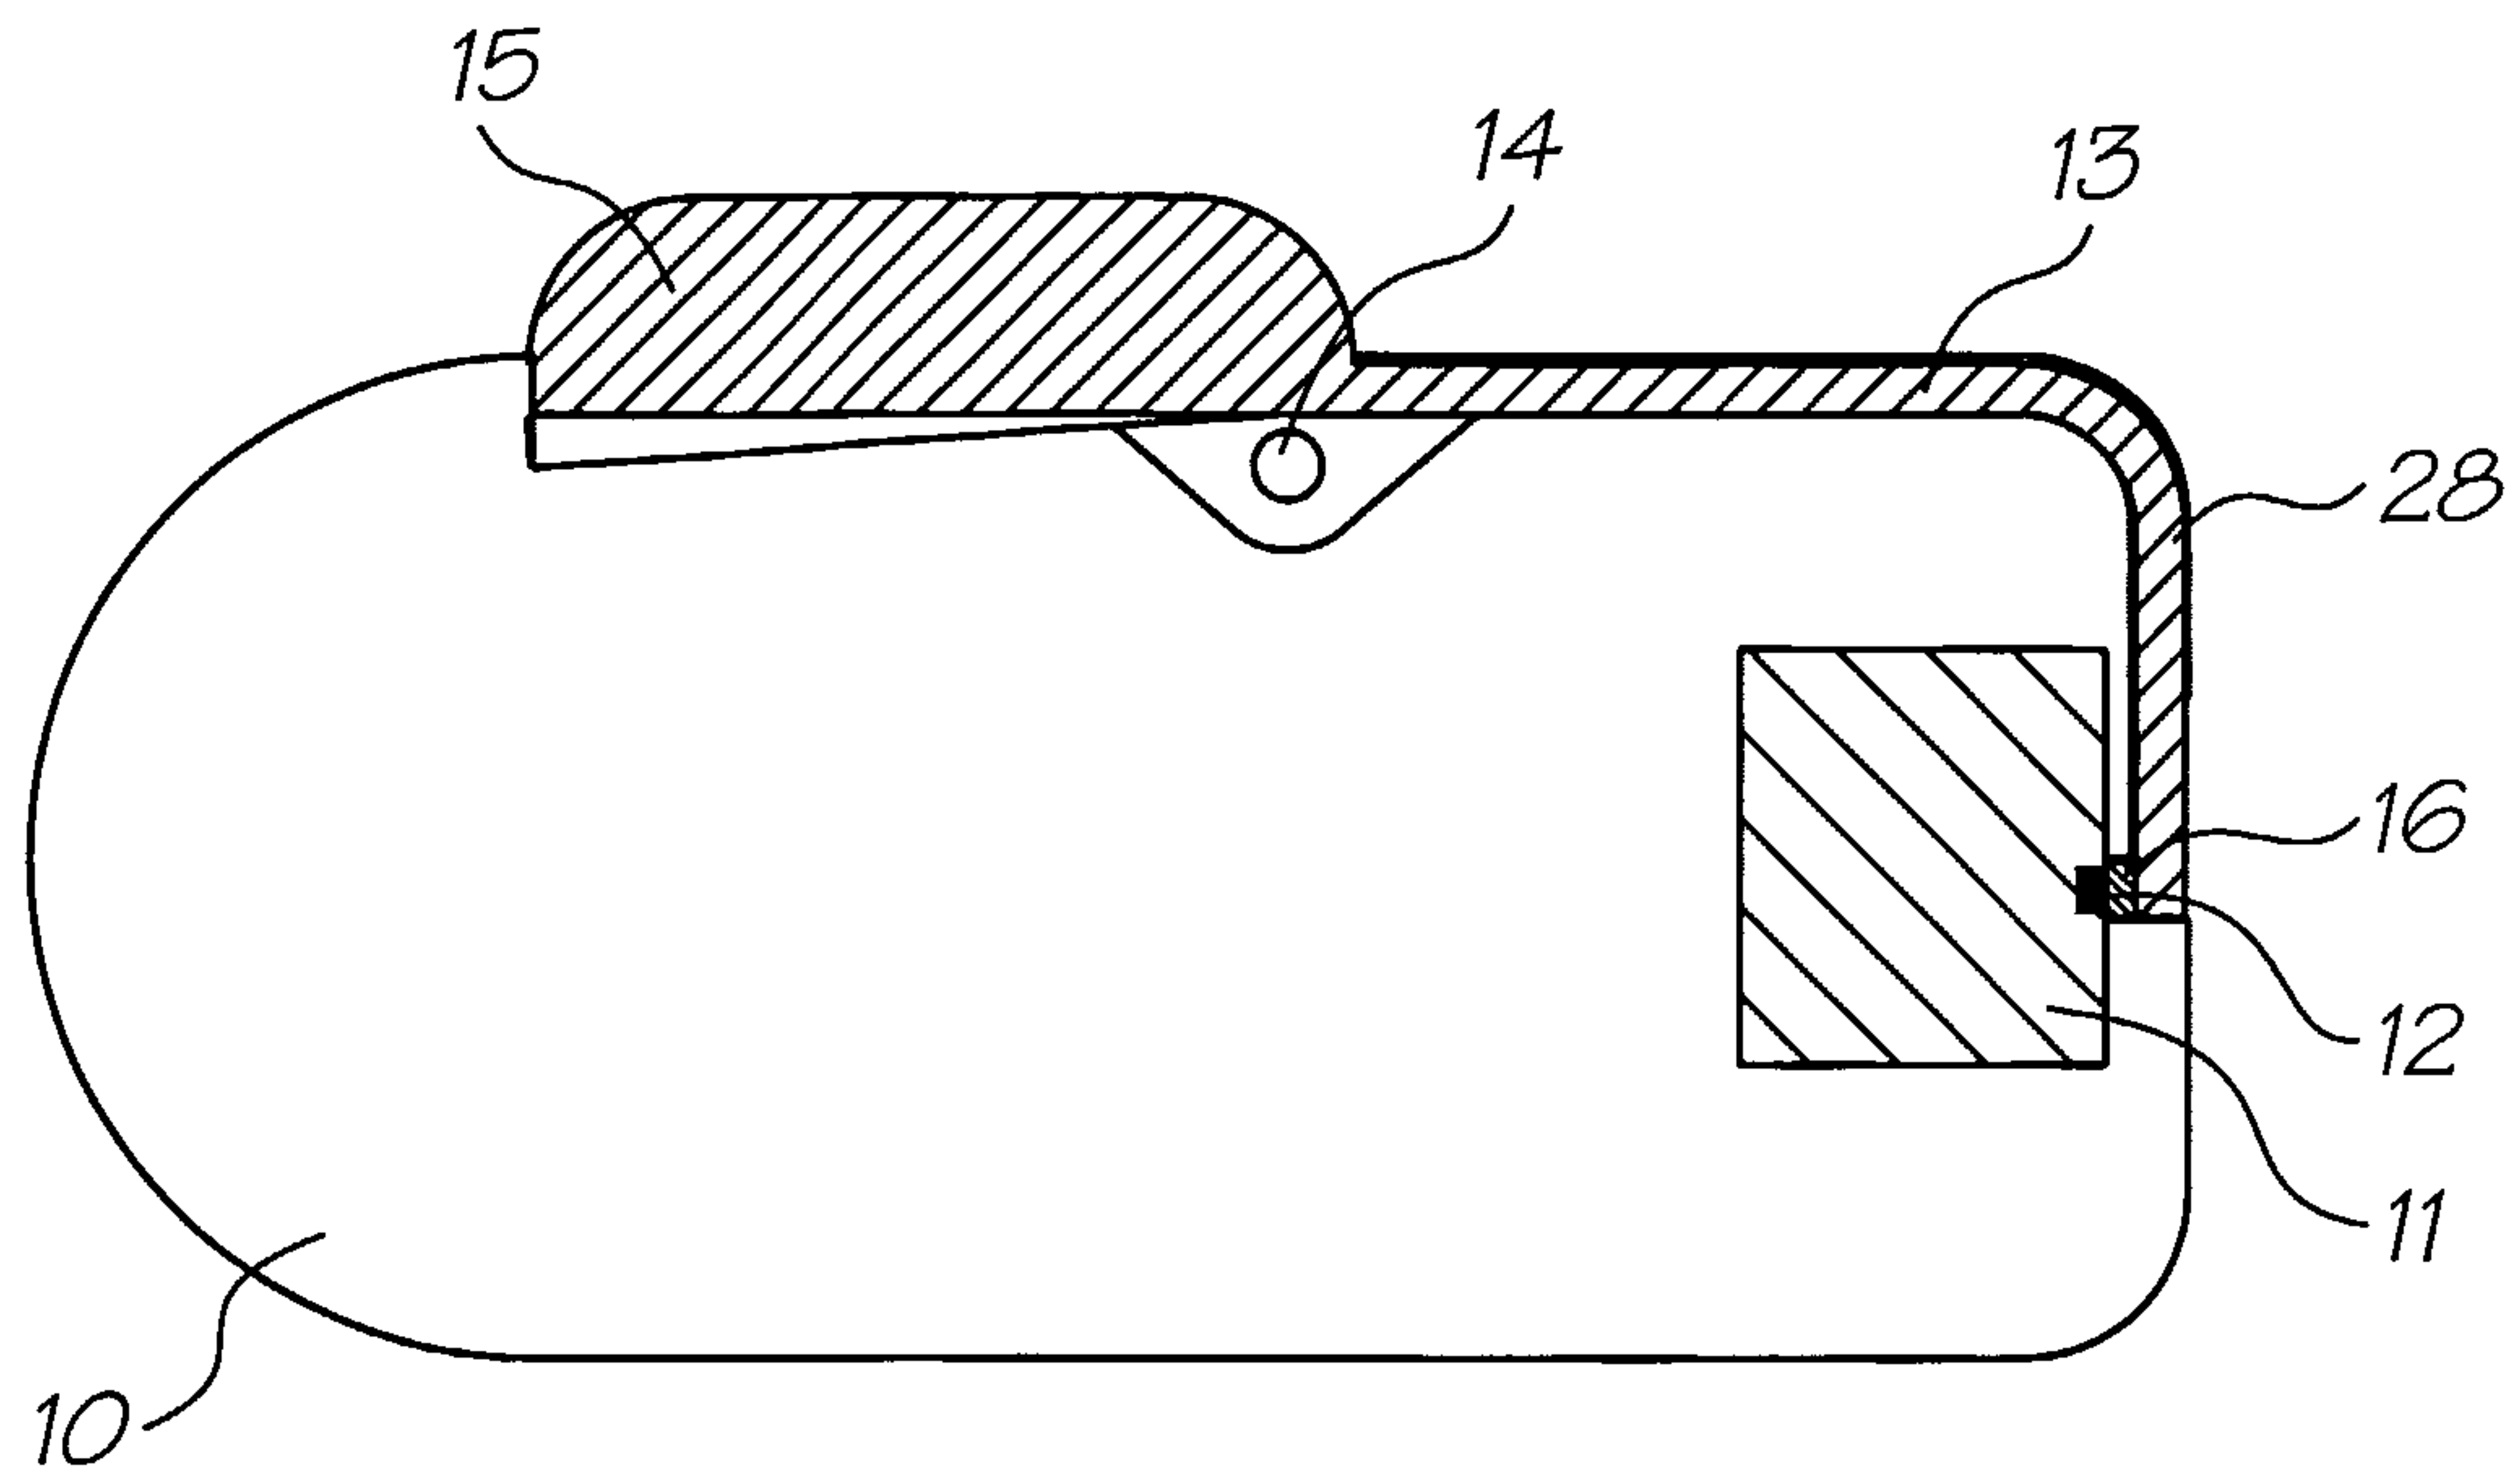


FIG. 1

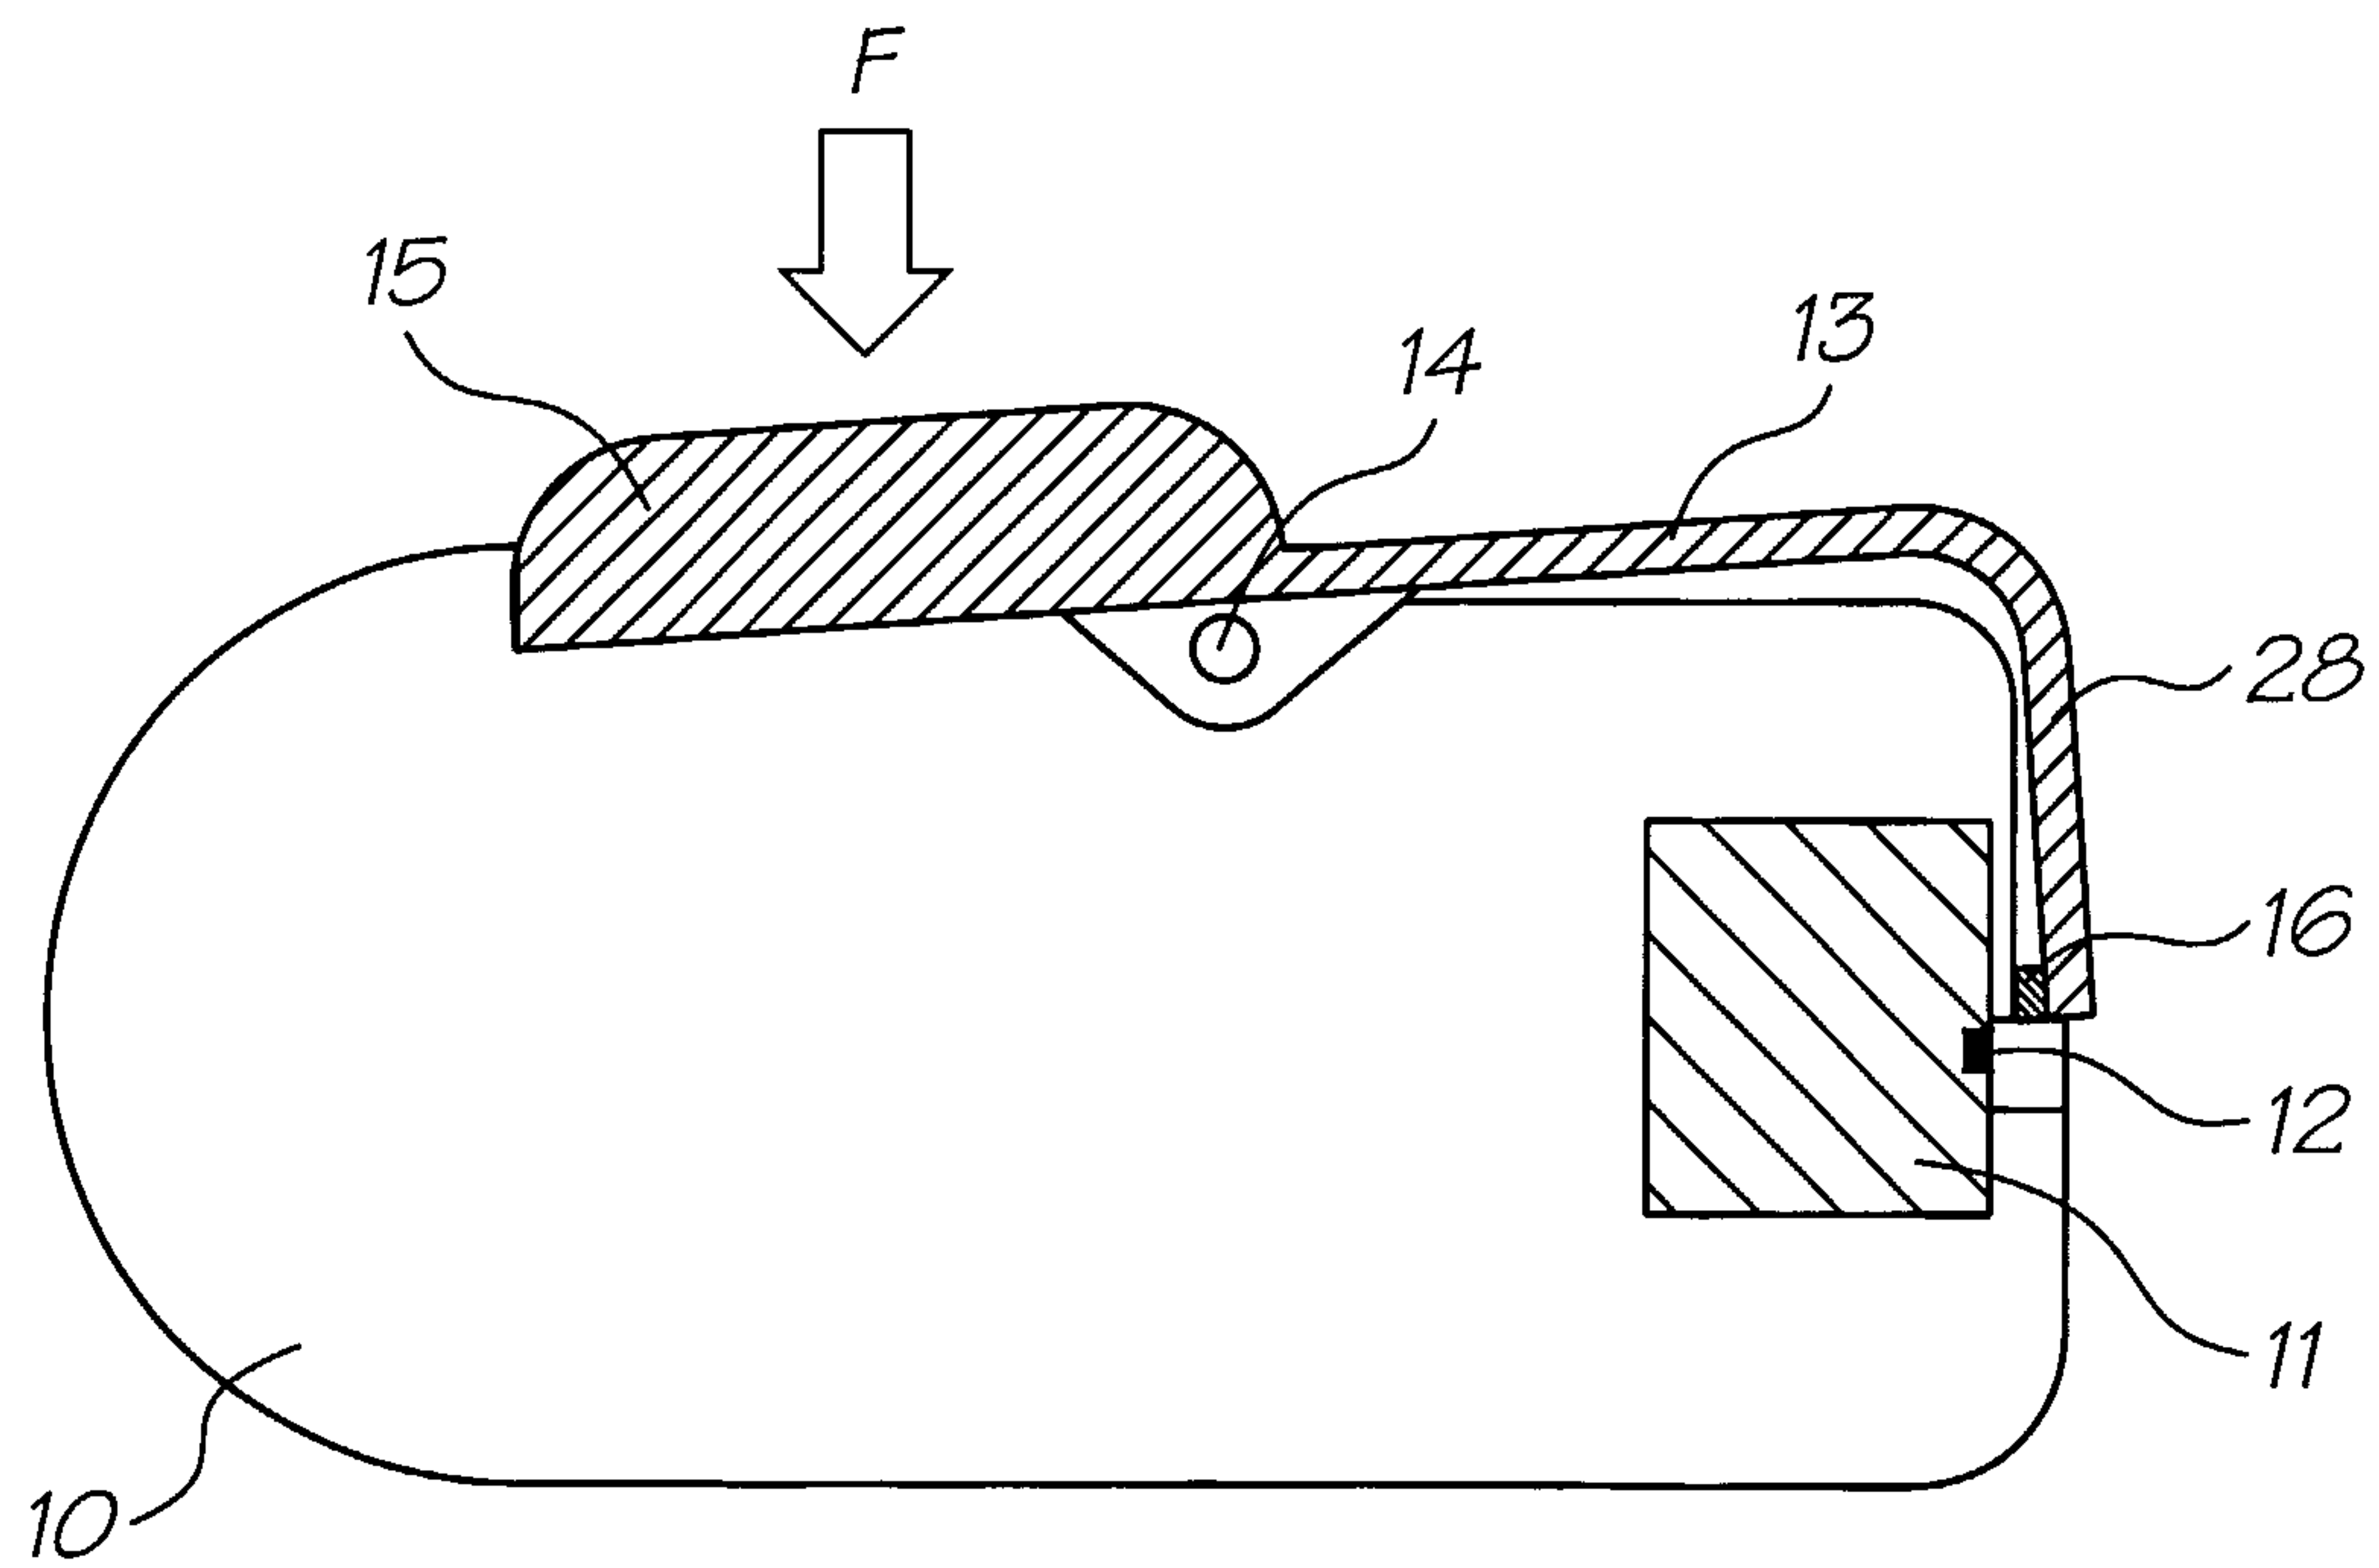


FIG. 2

2/5

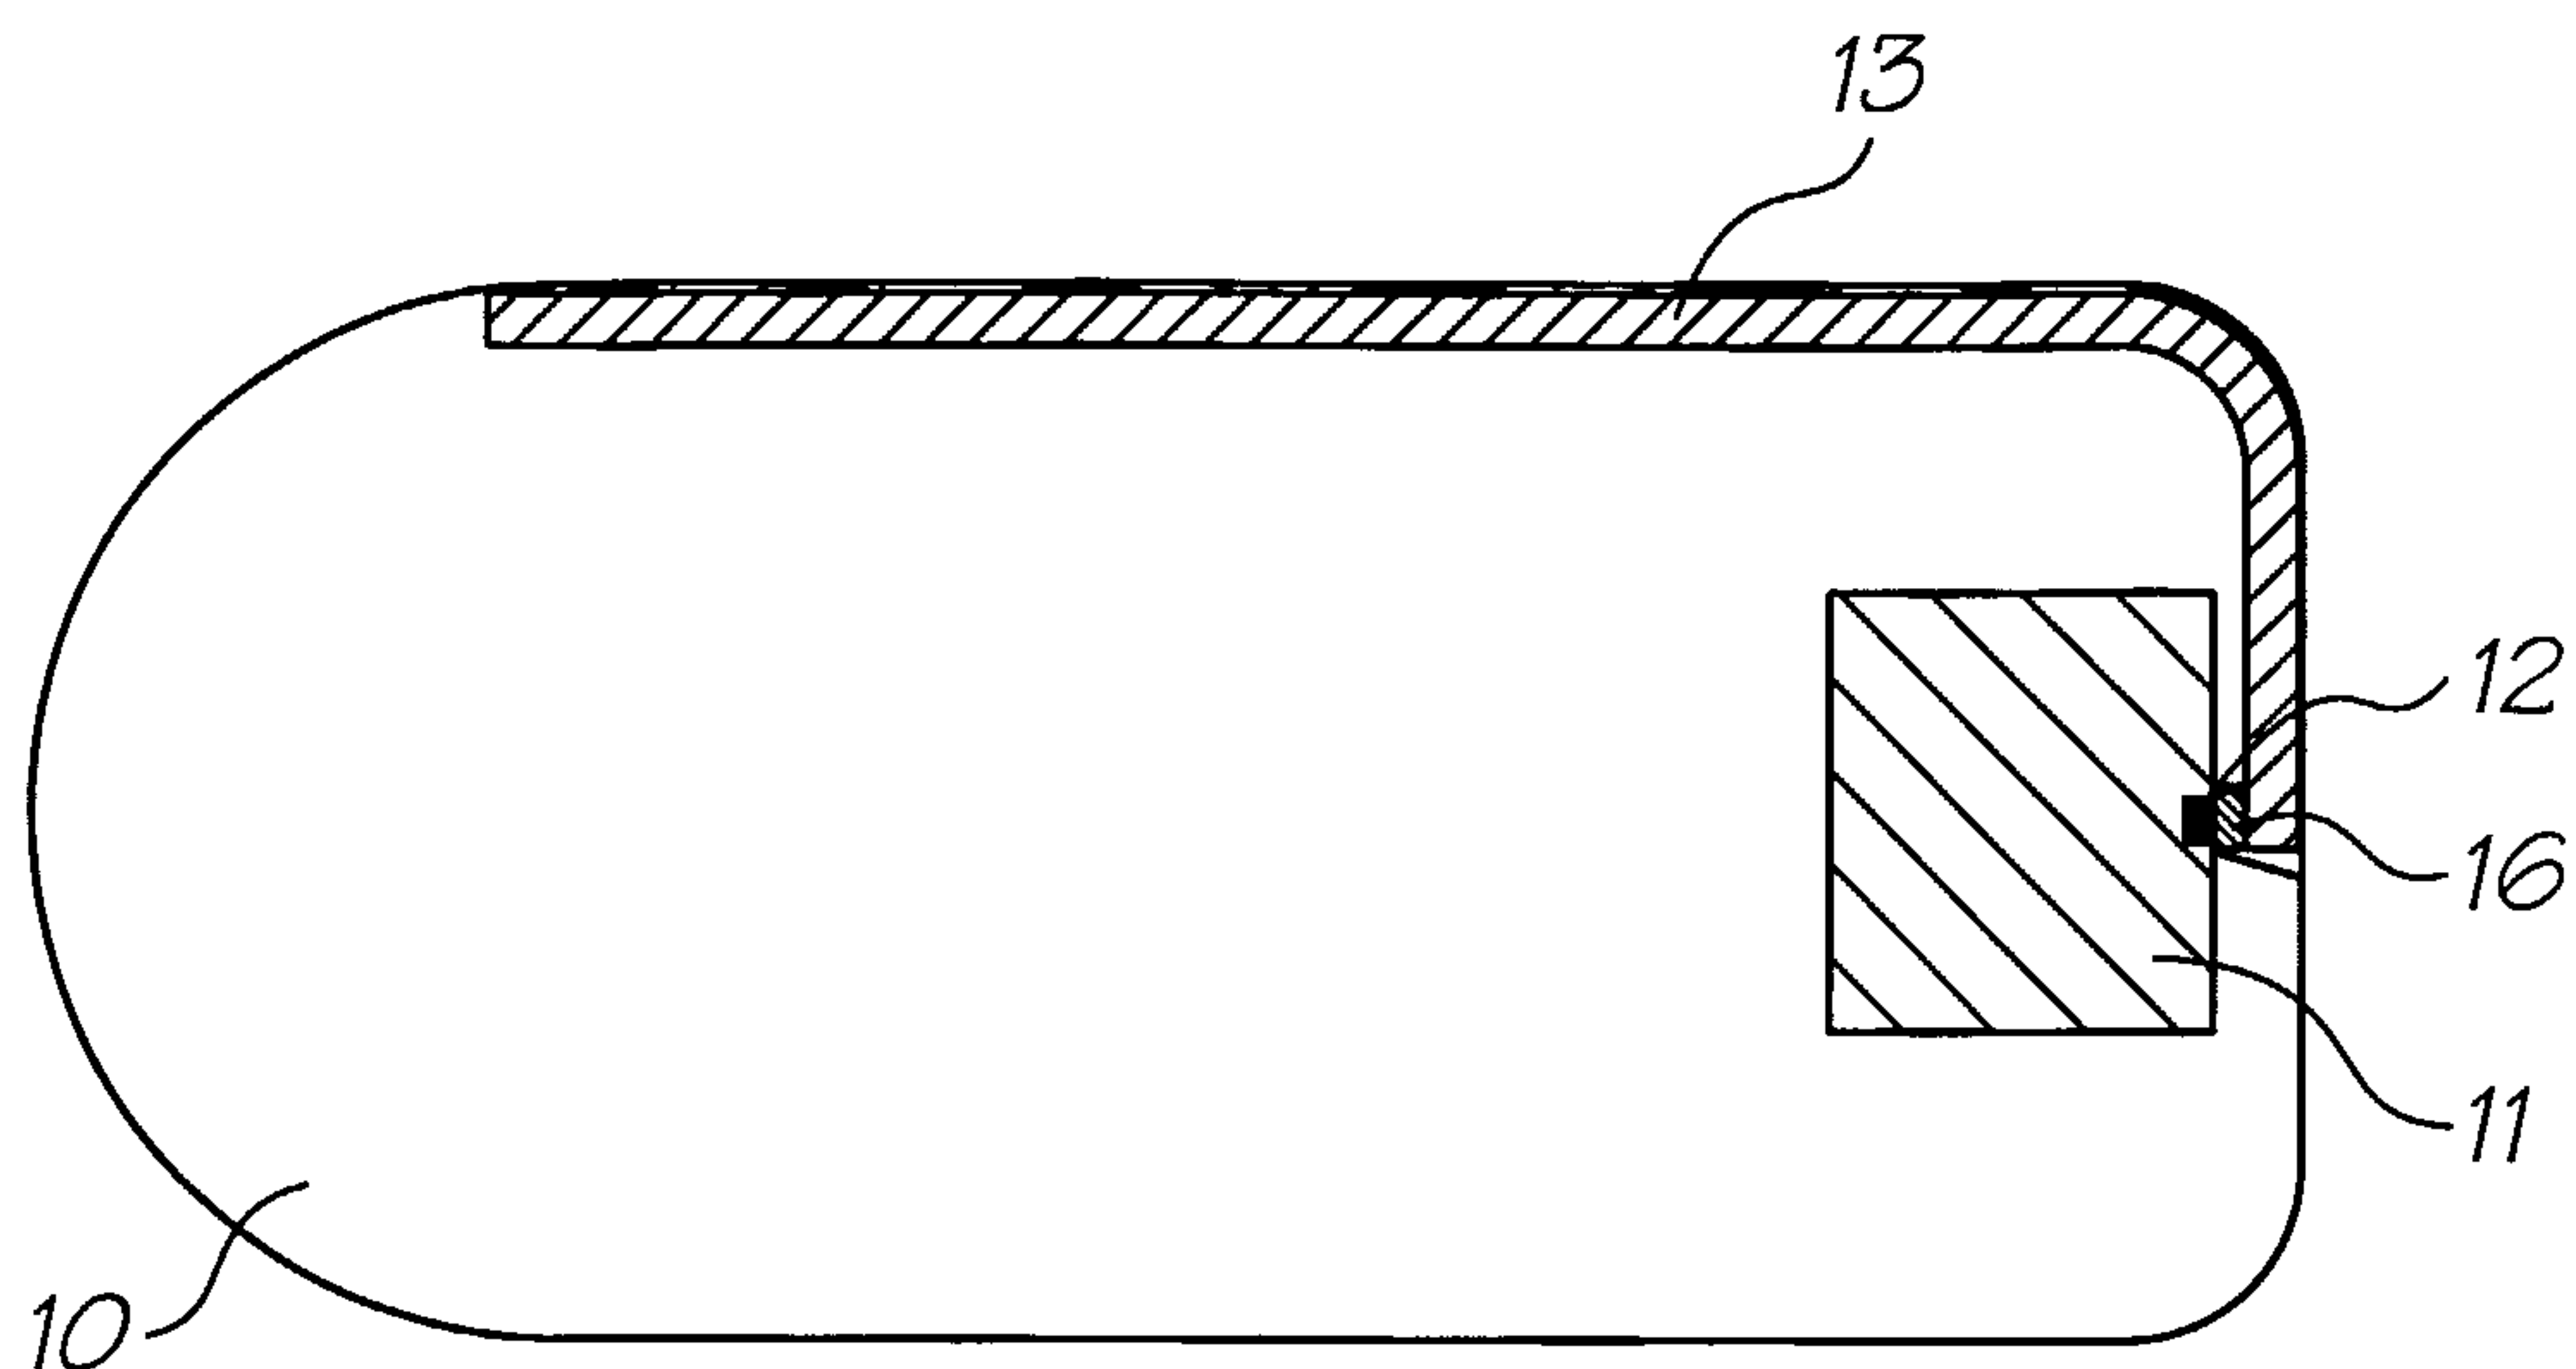


FIG. 3

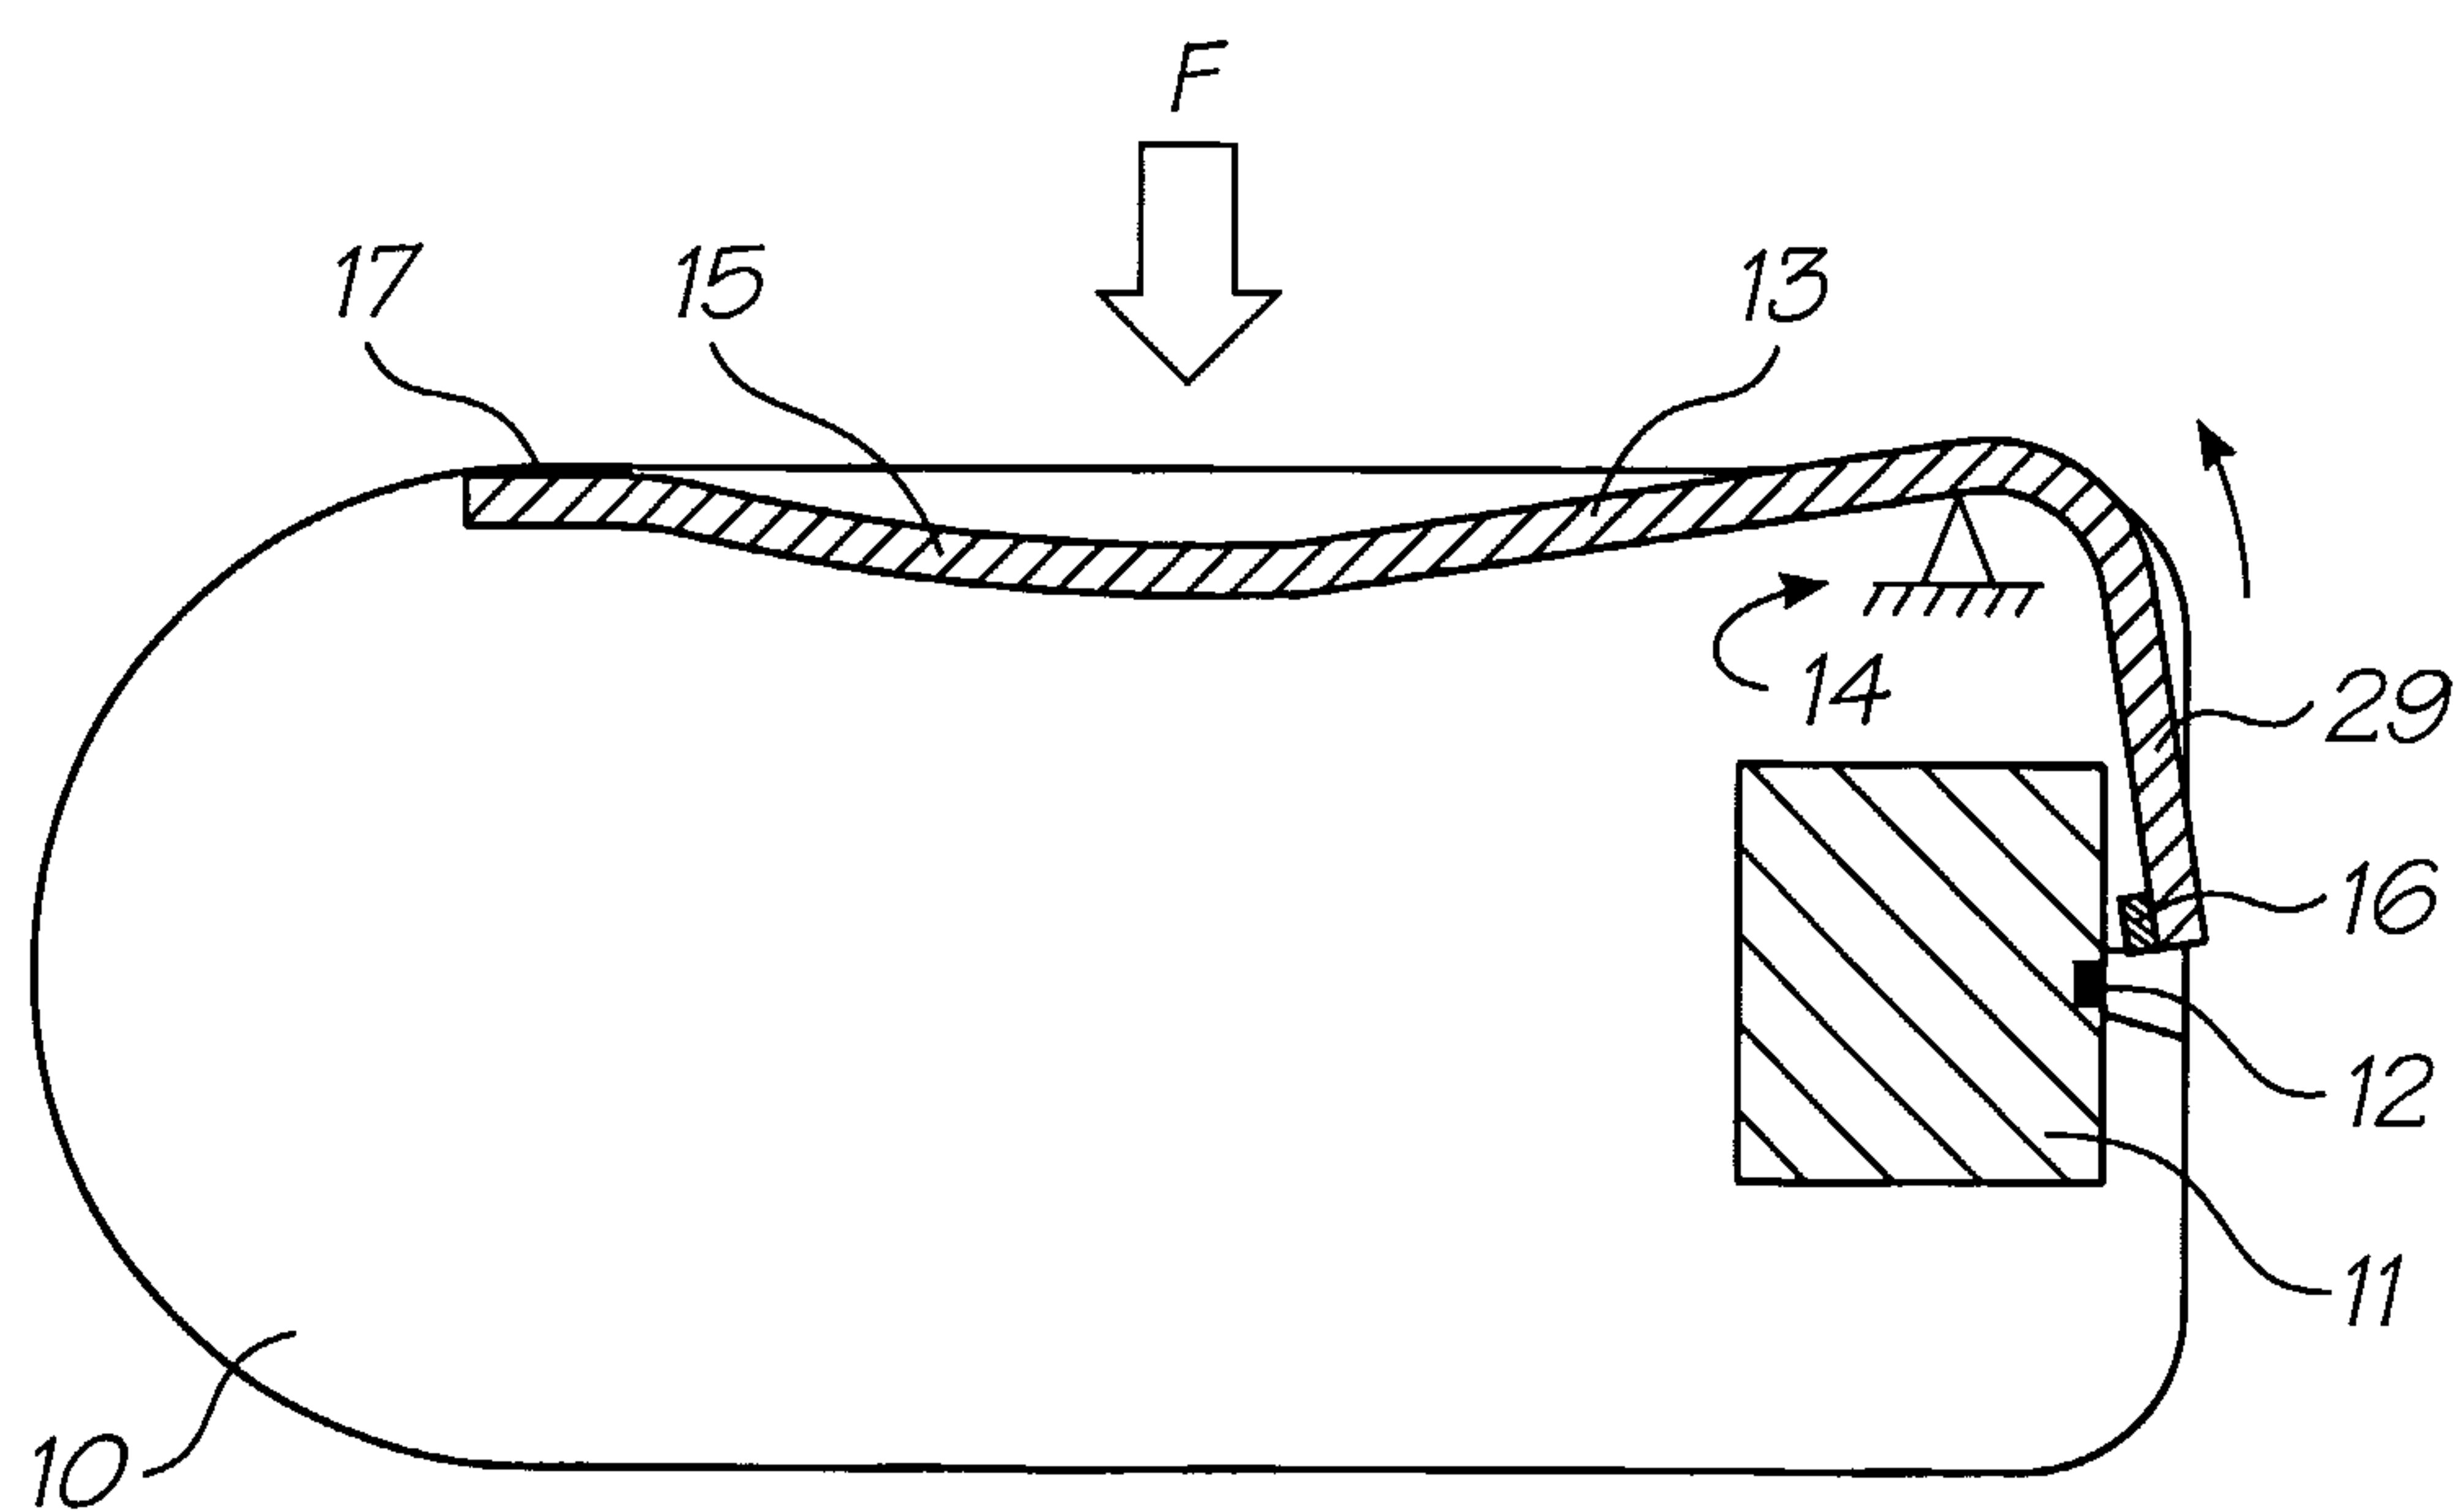


FIG. 4

3/5

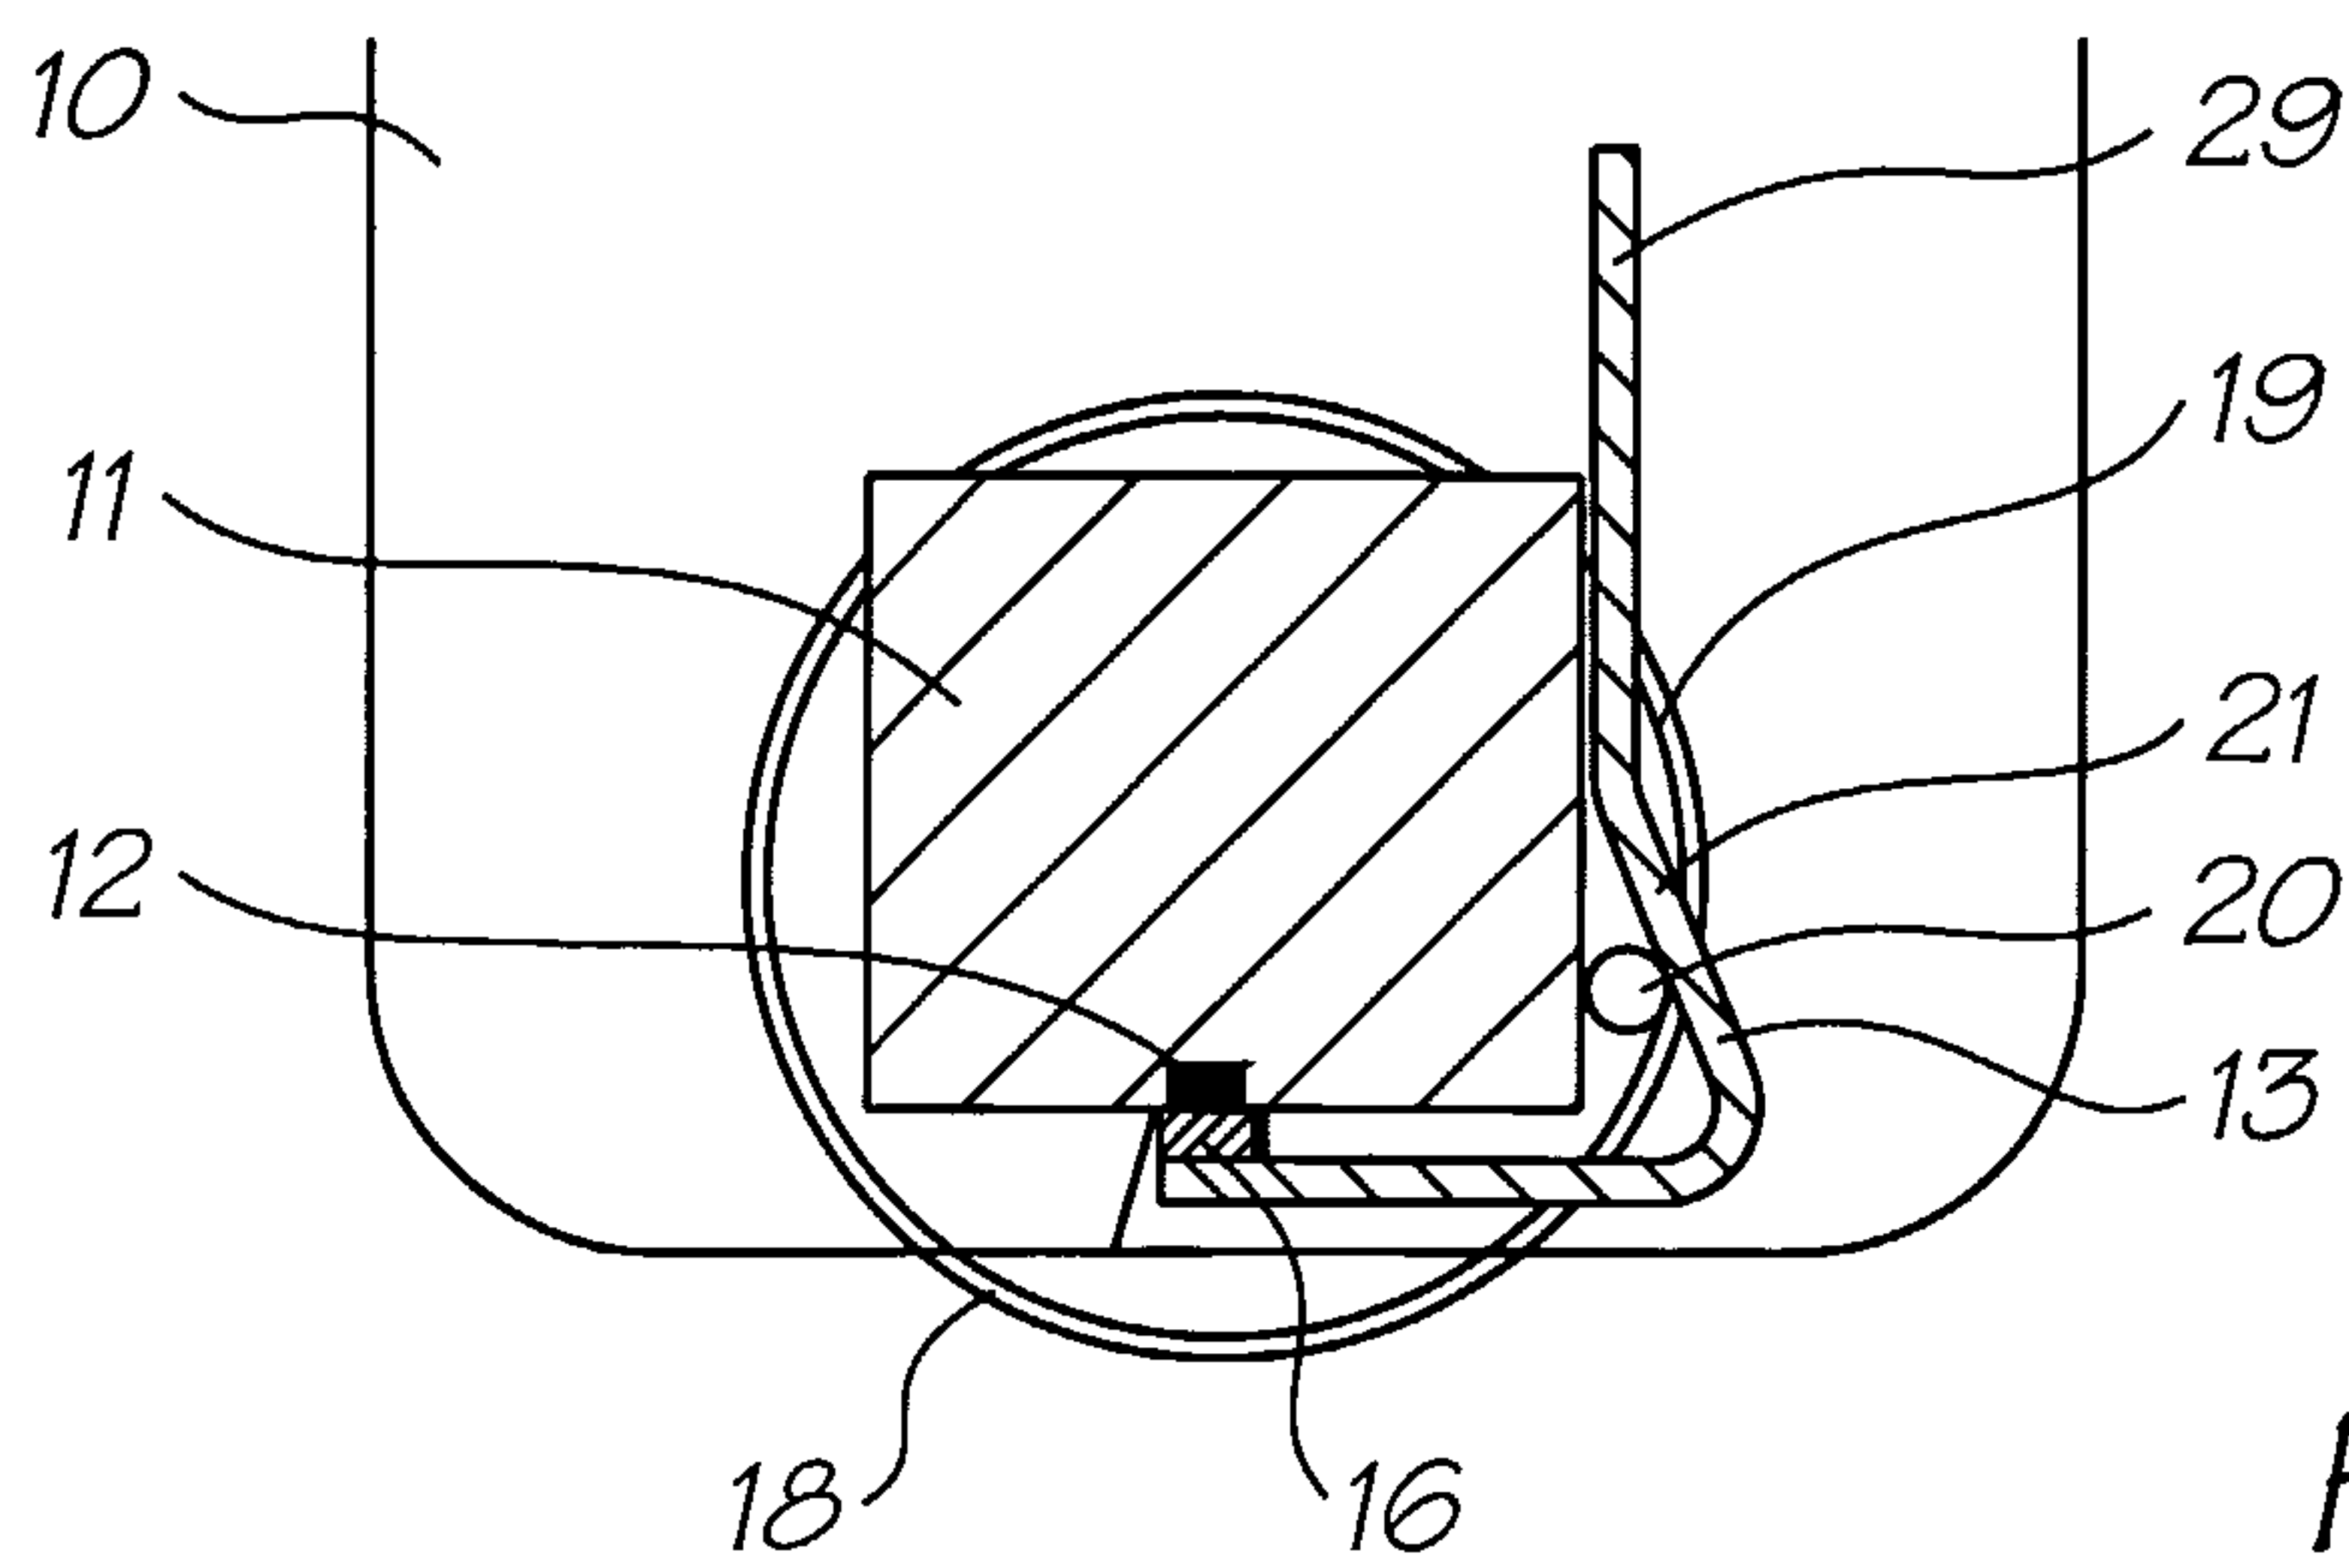


FIG. 5

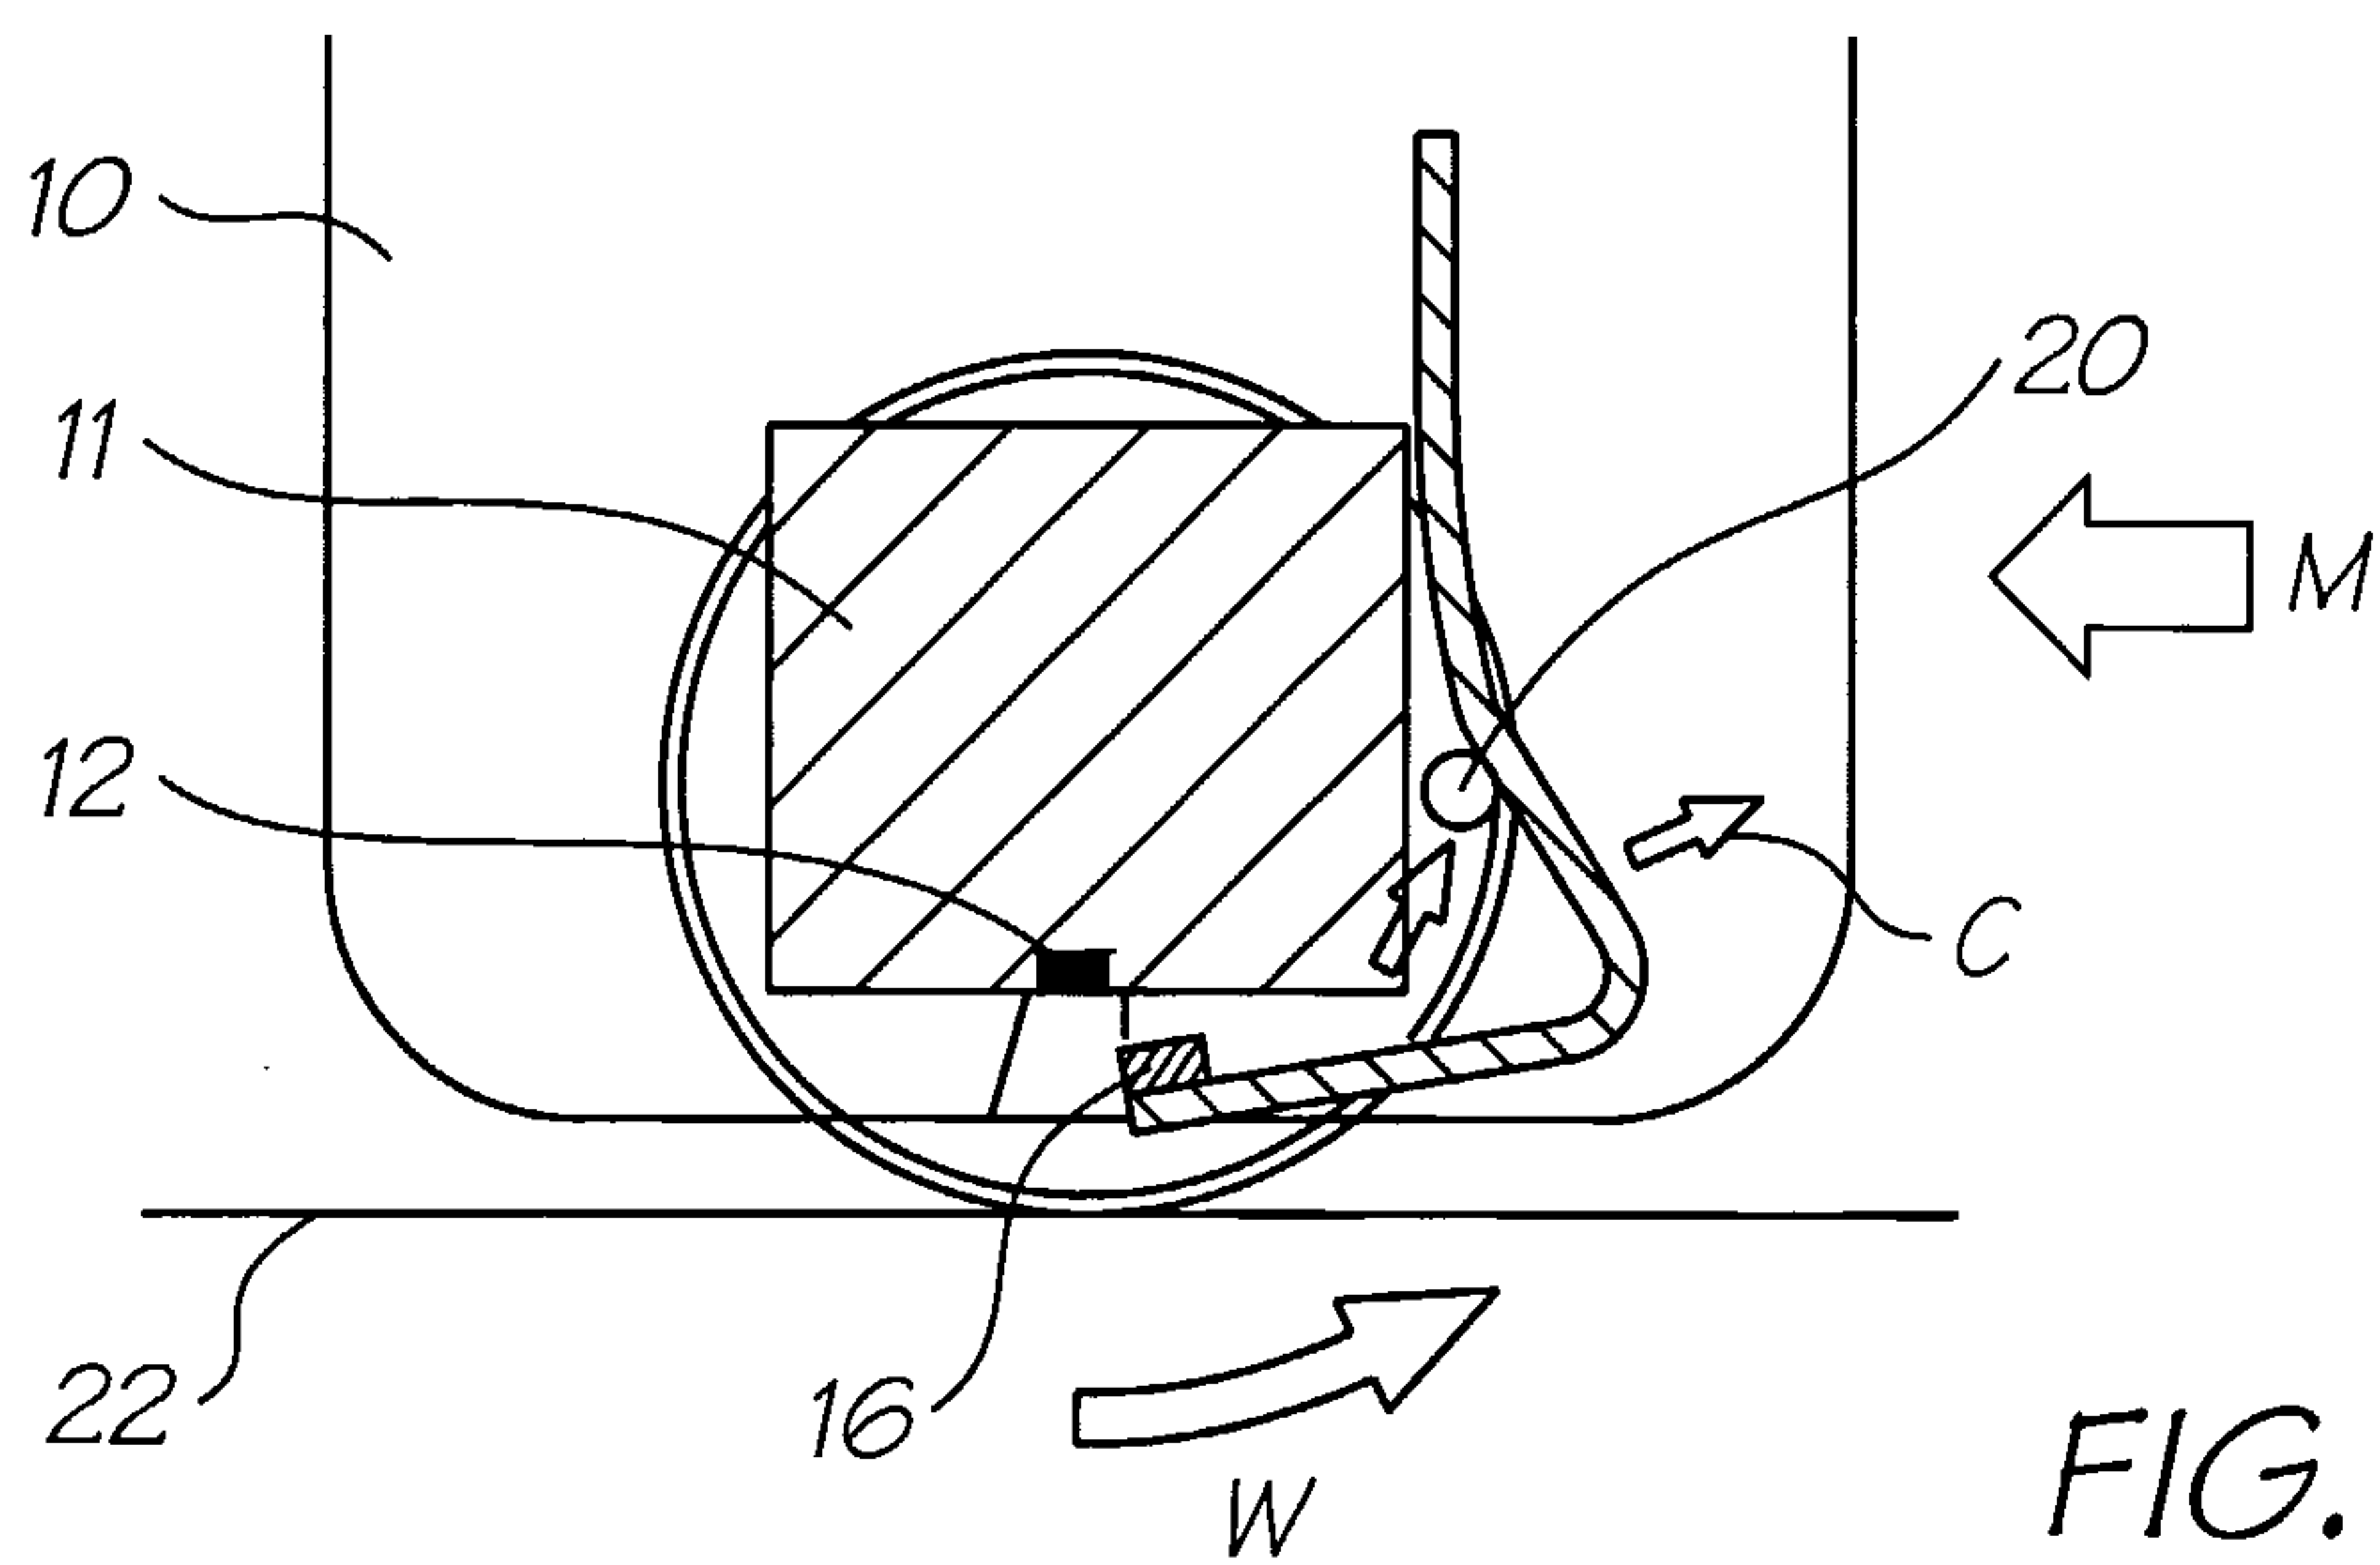


FIG. 6

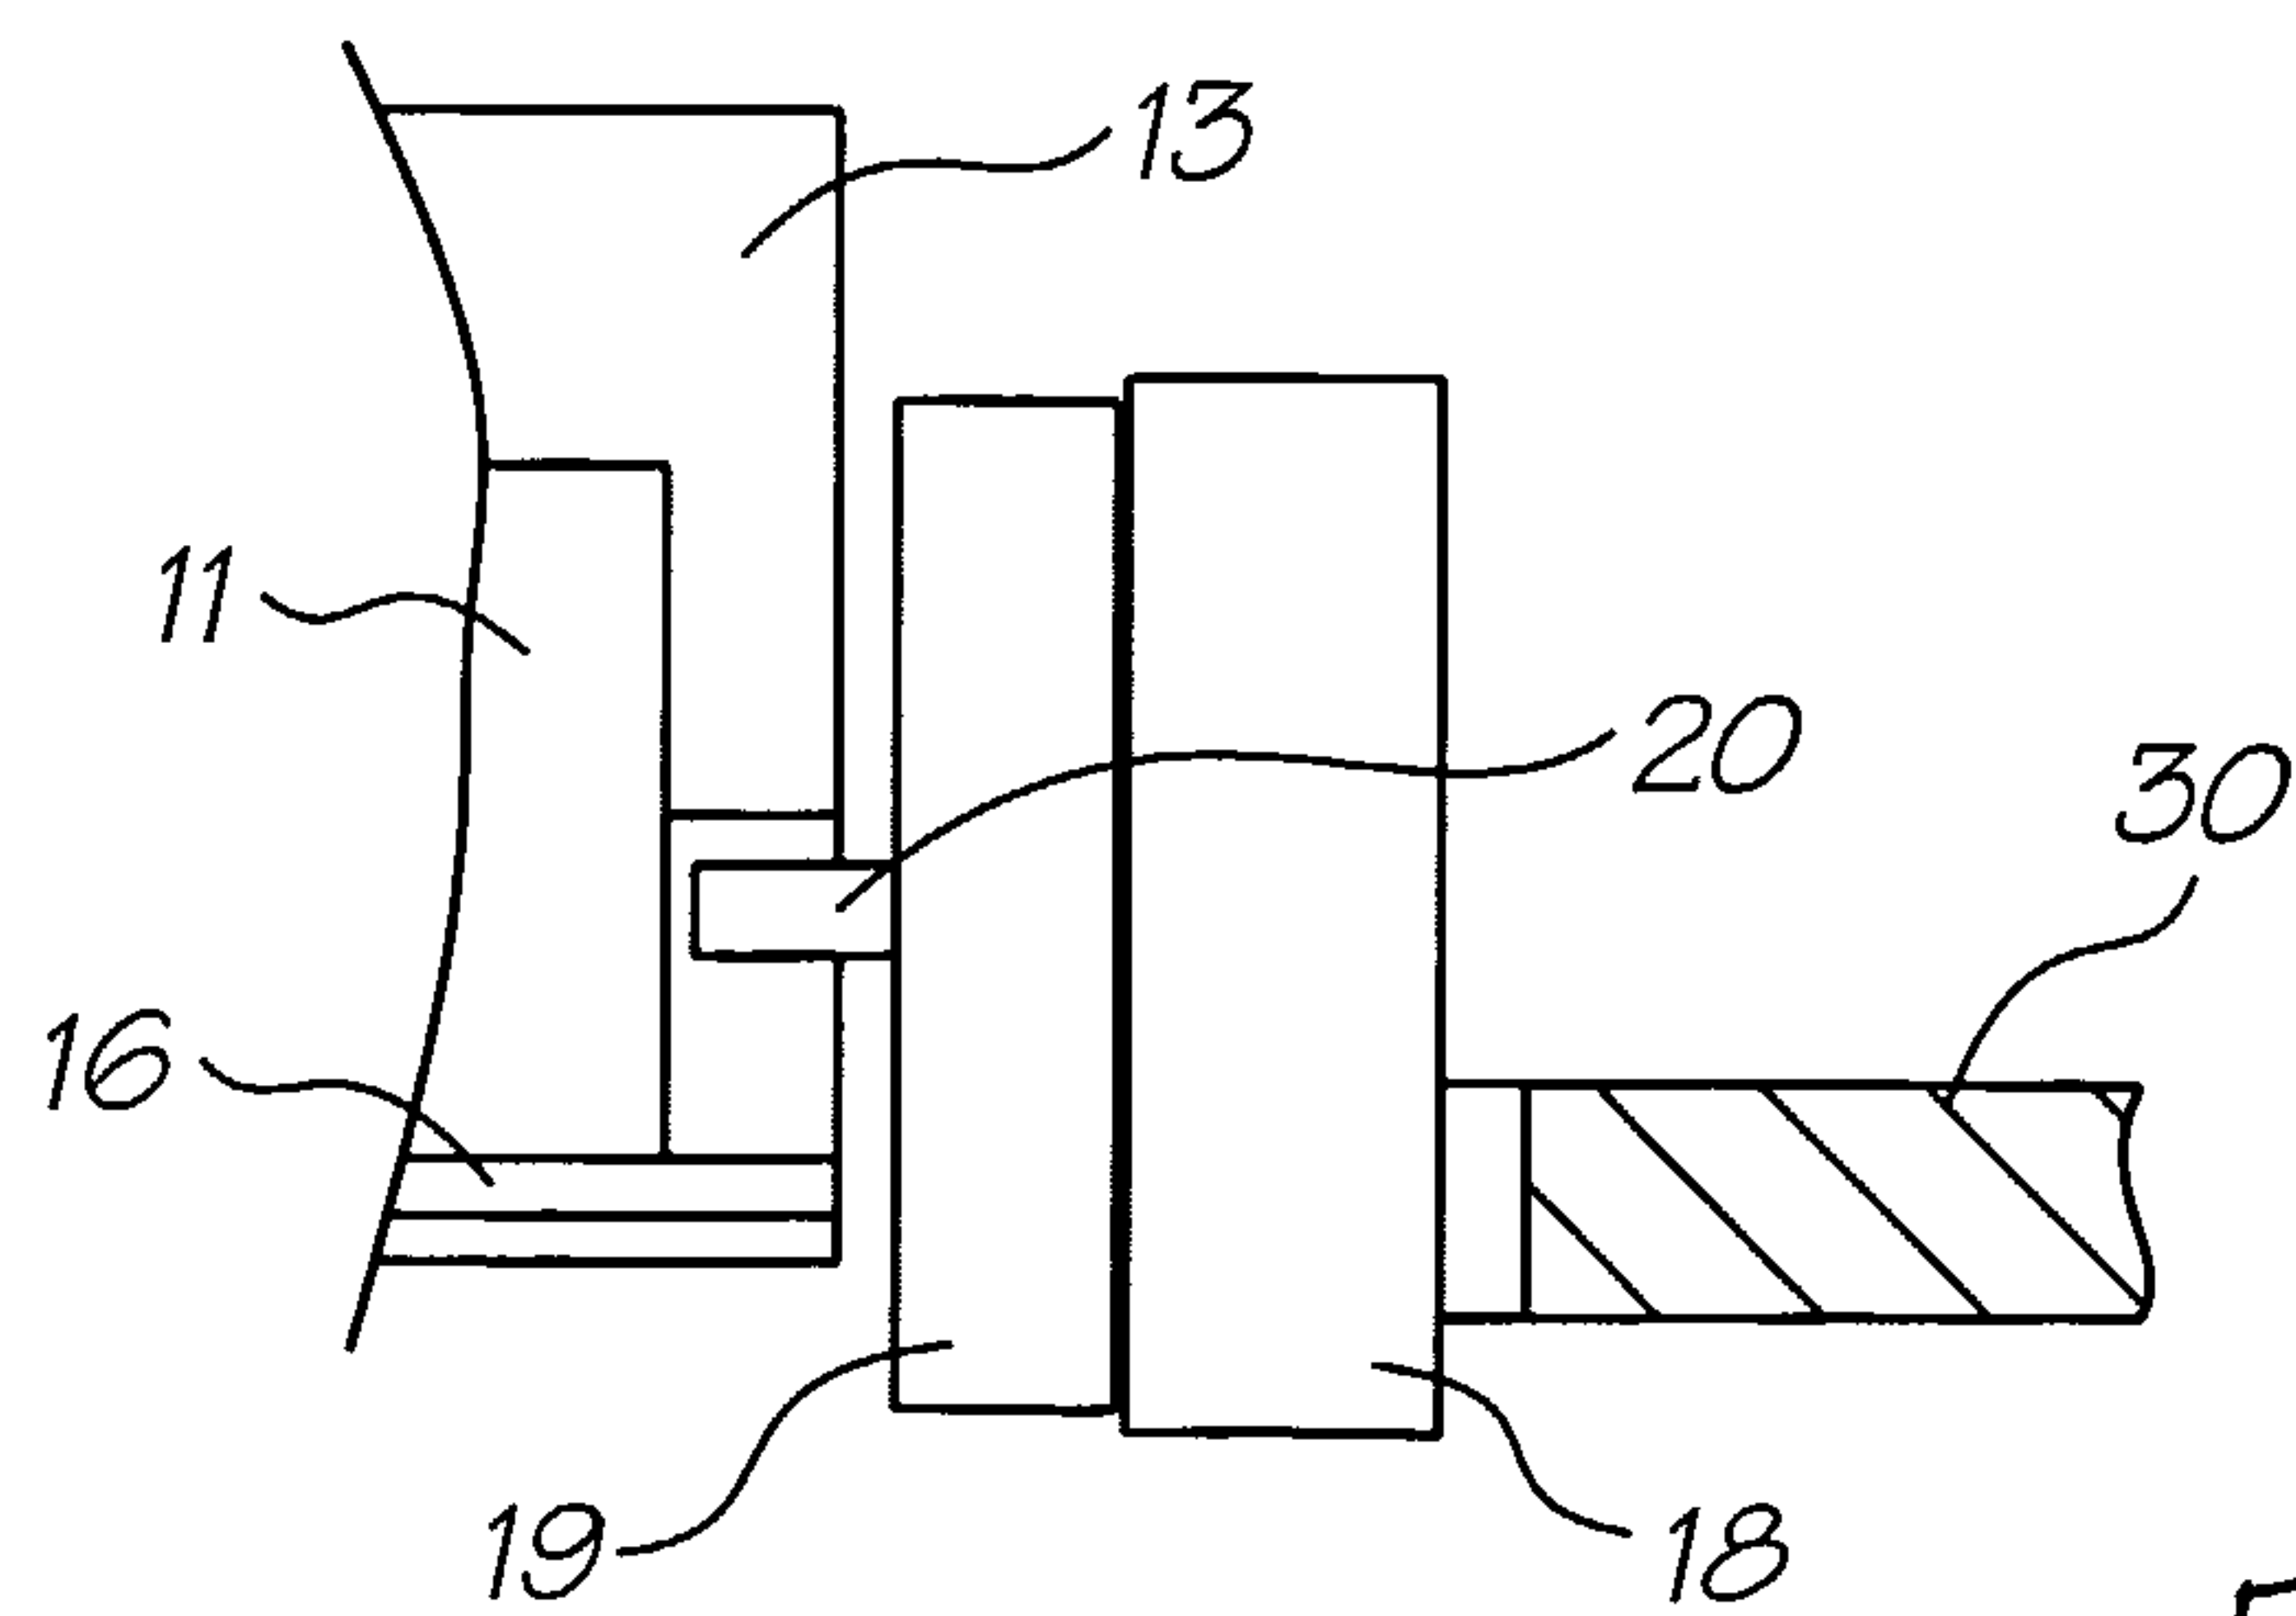


FIG. 7

4/5

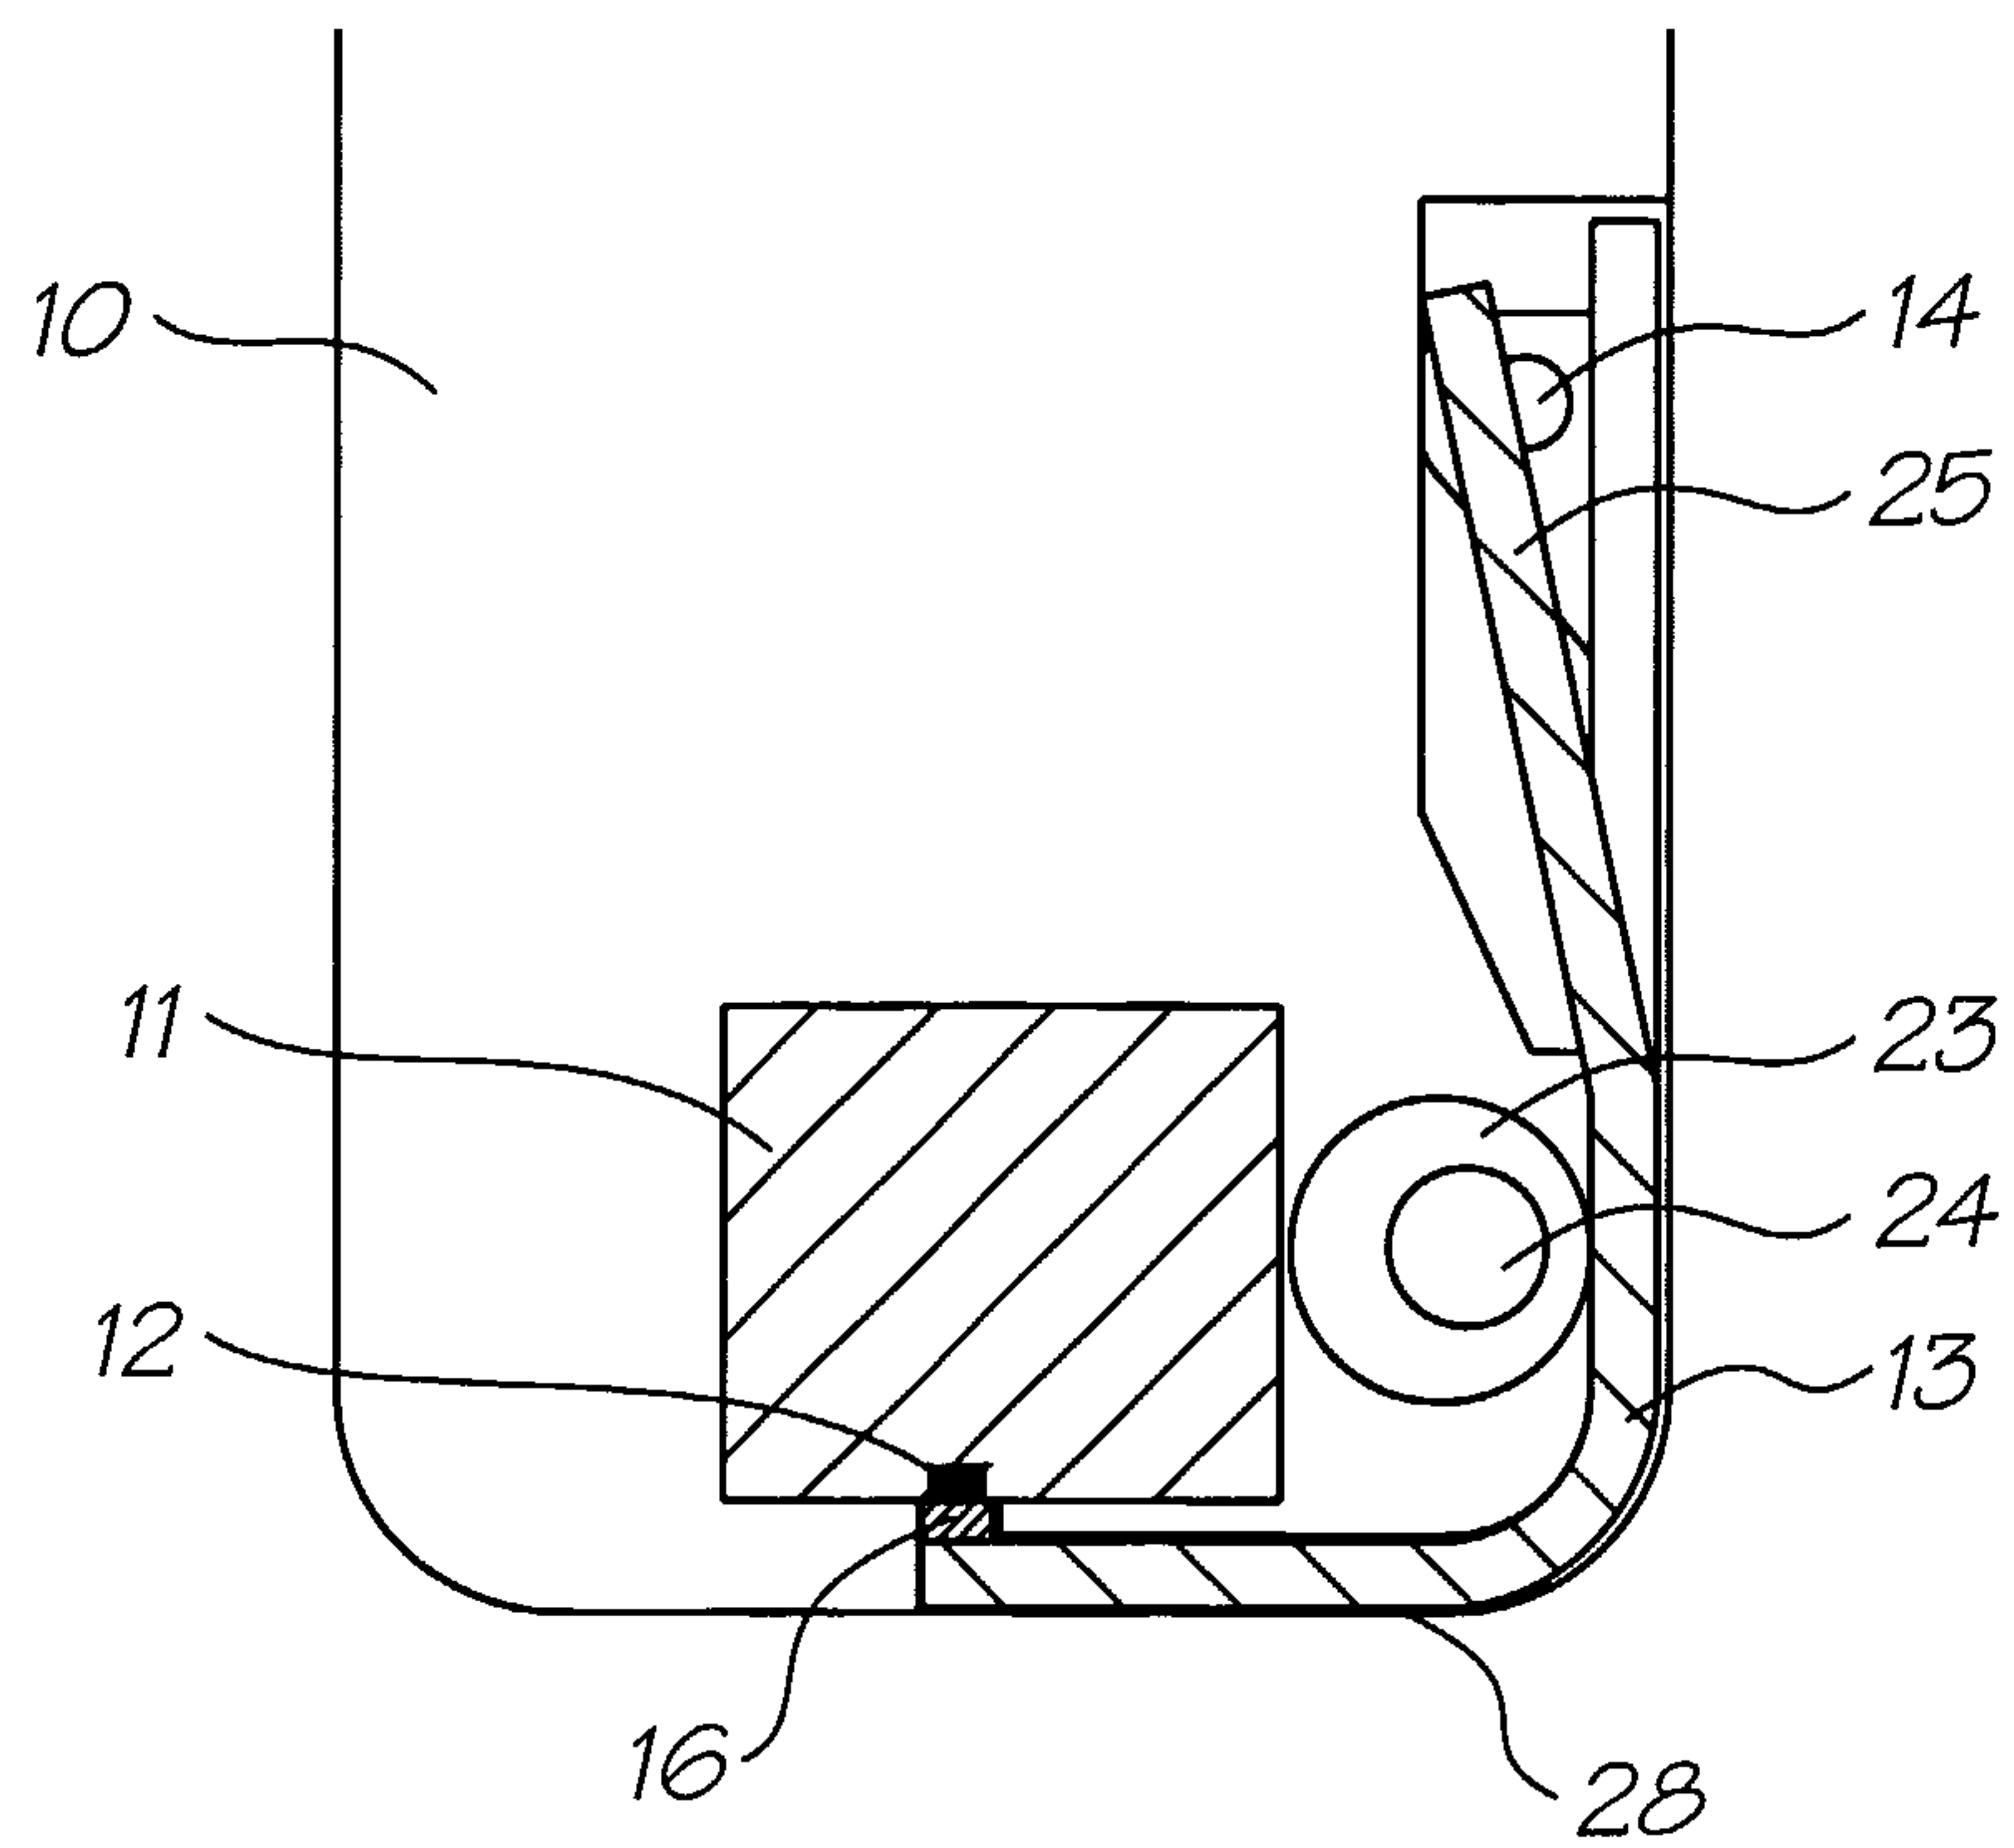


FIG. 8

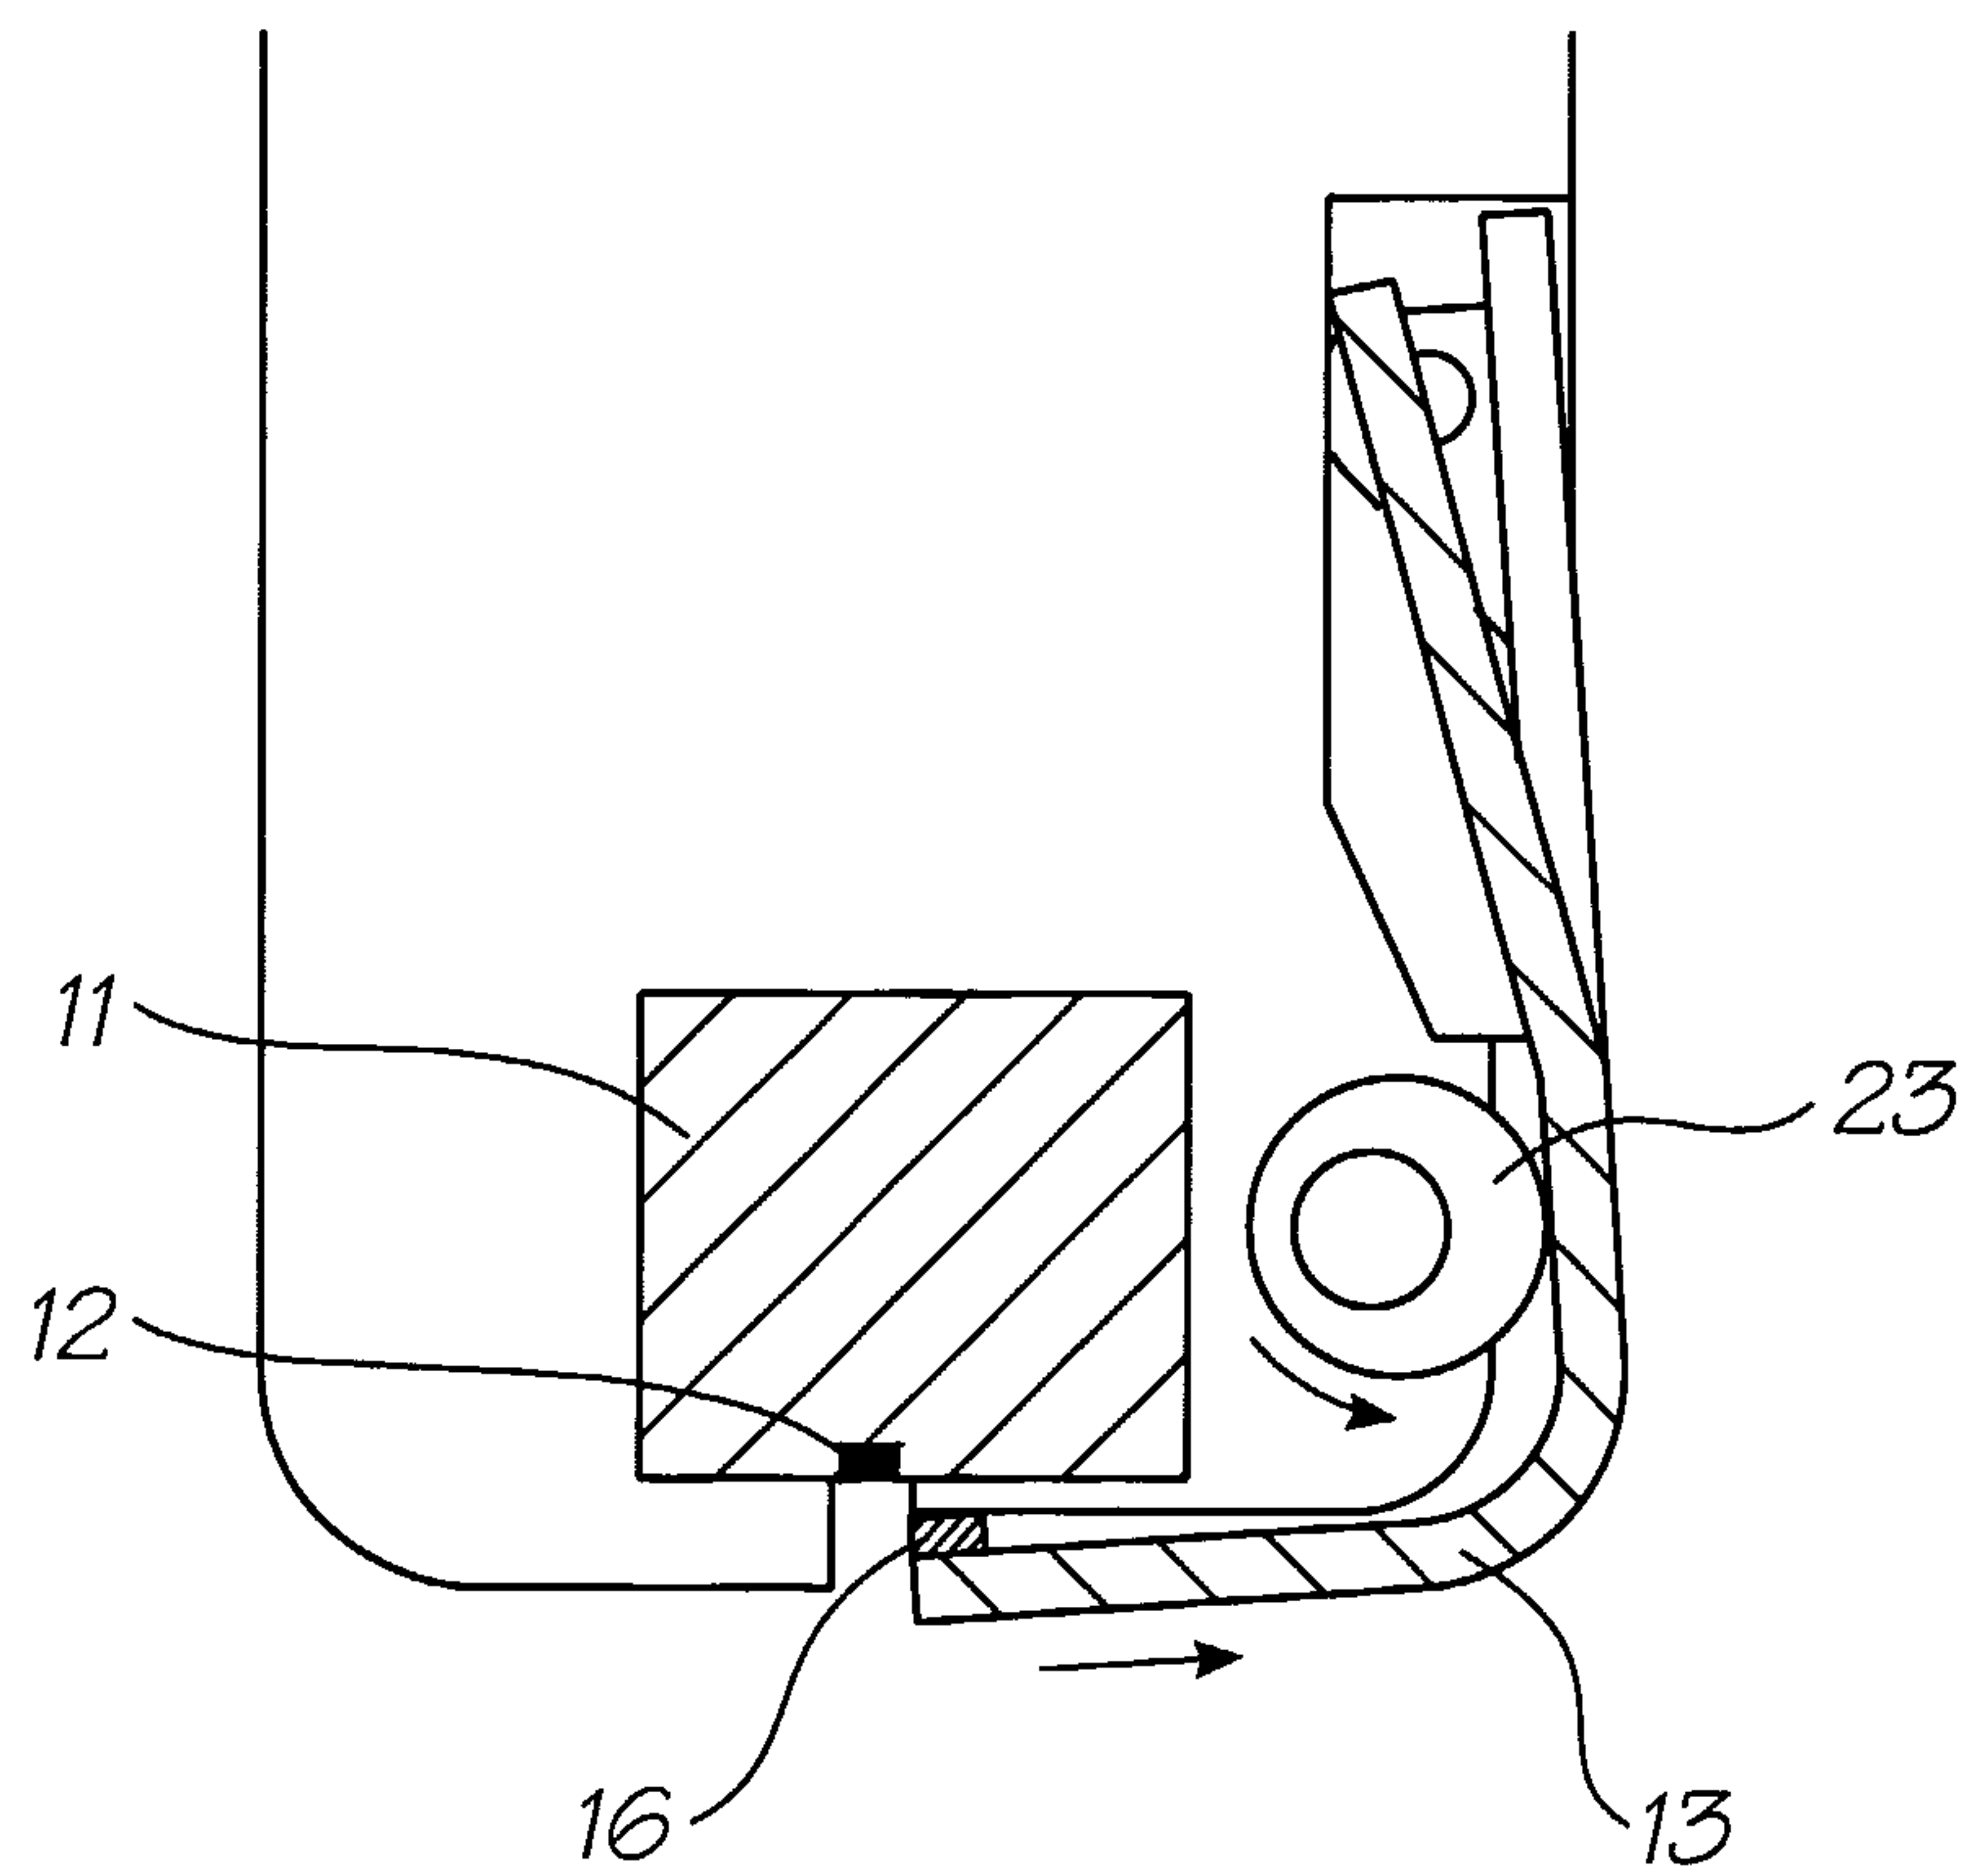


FIG. 9

5/5

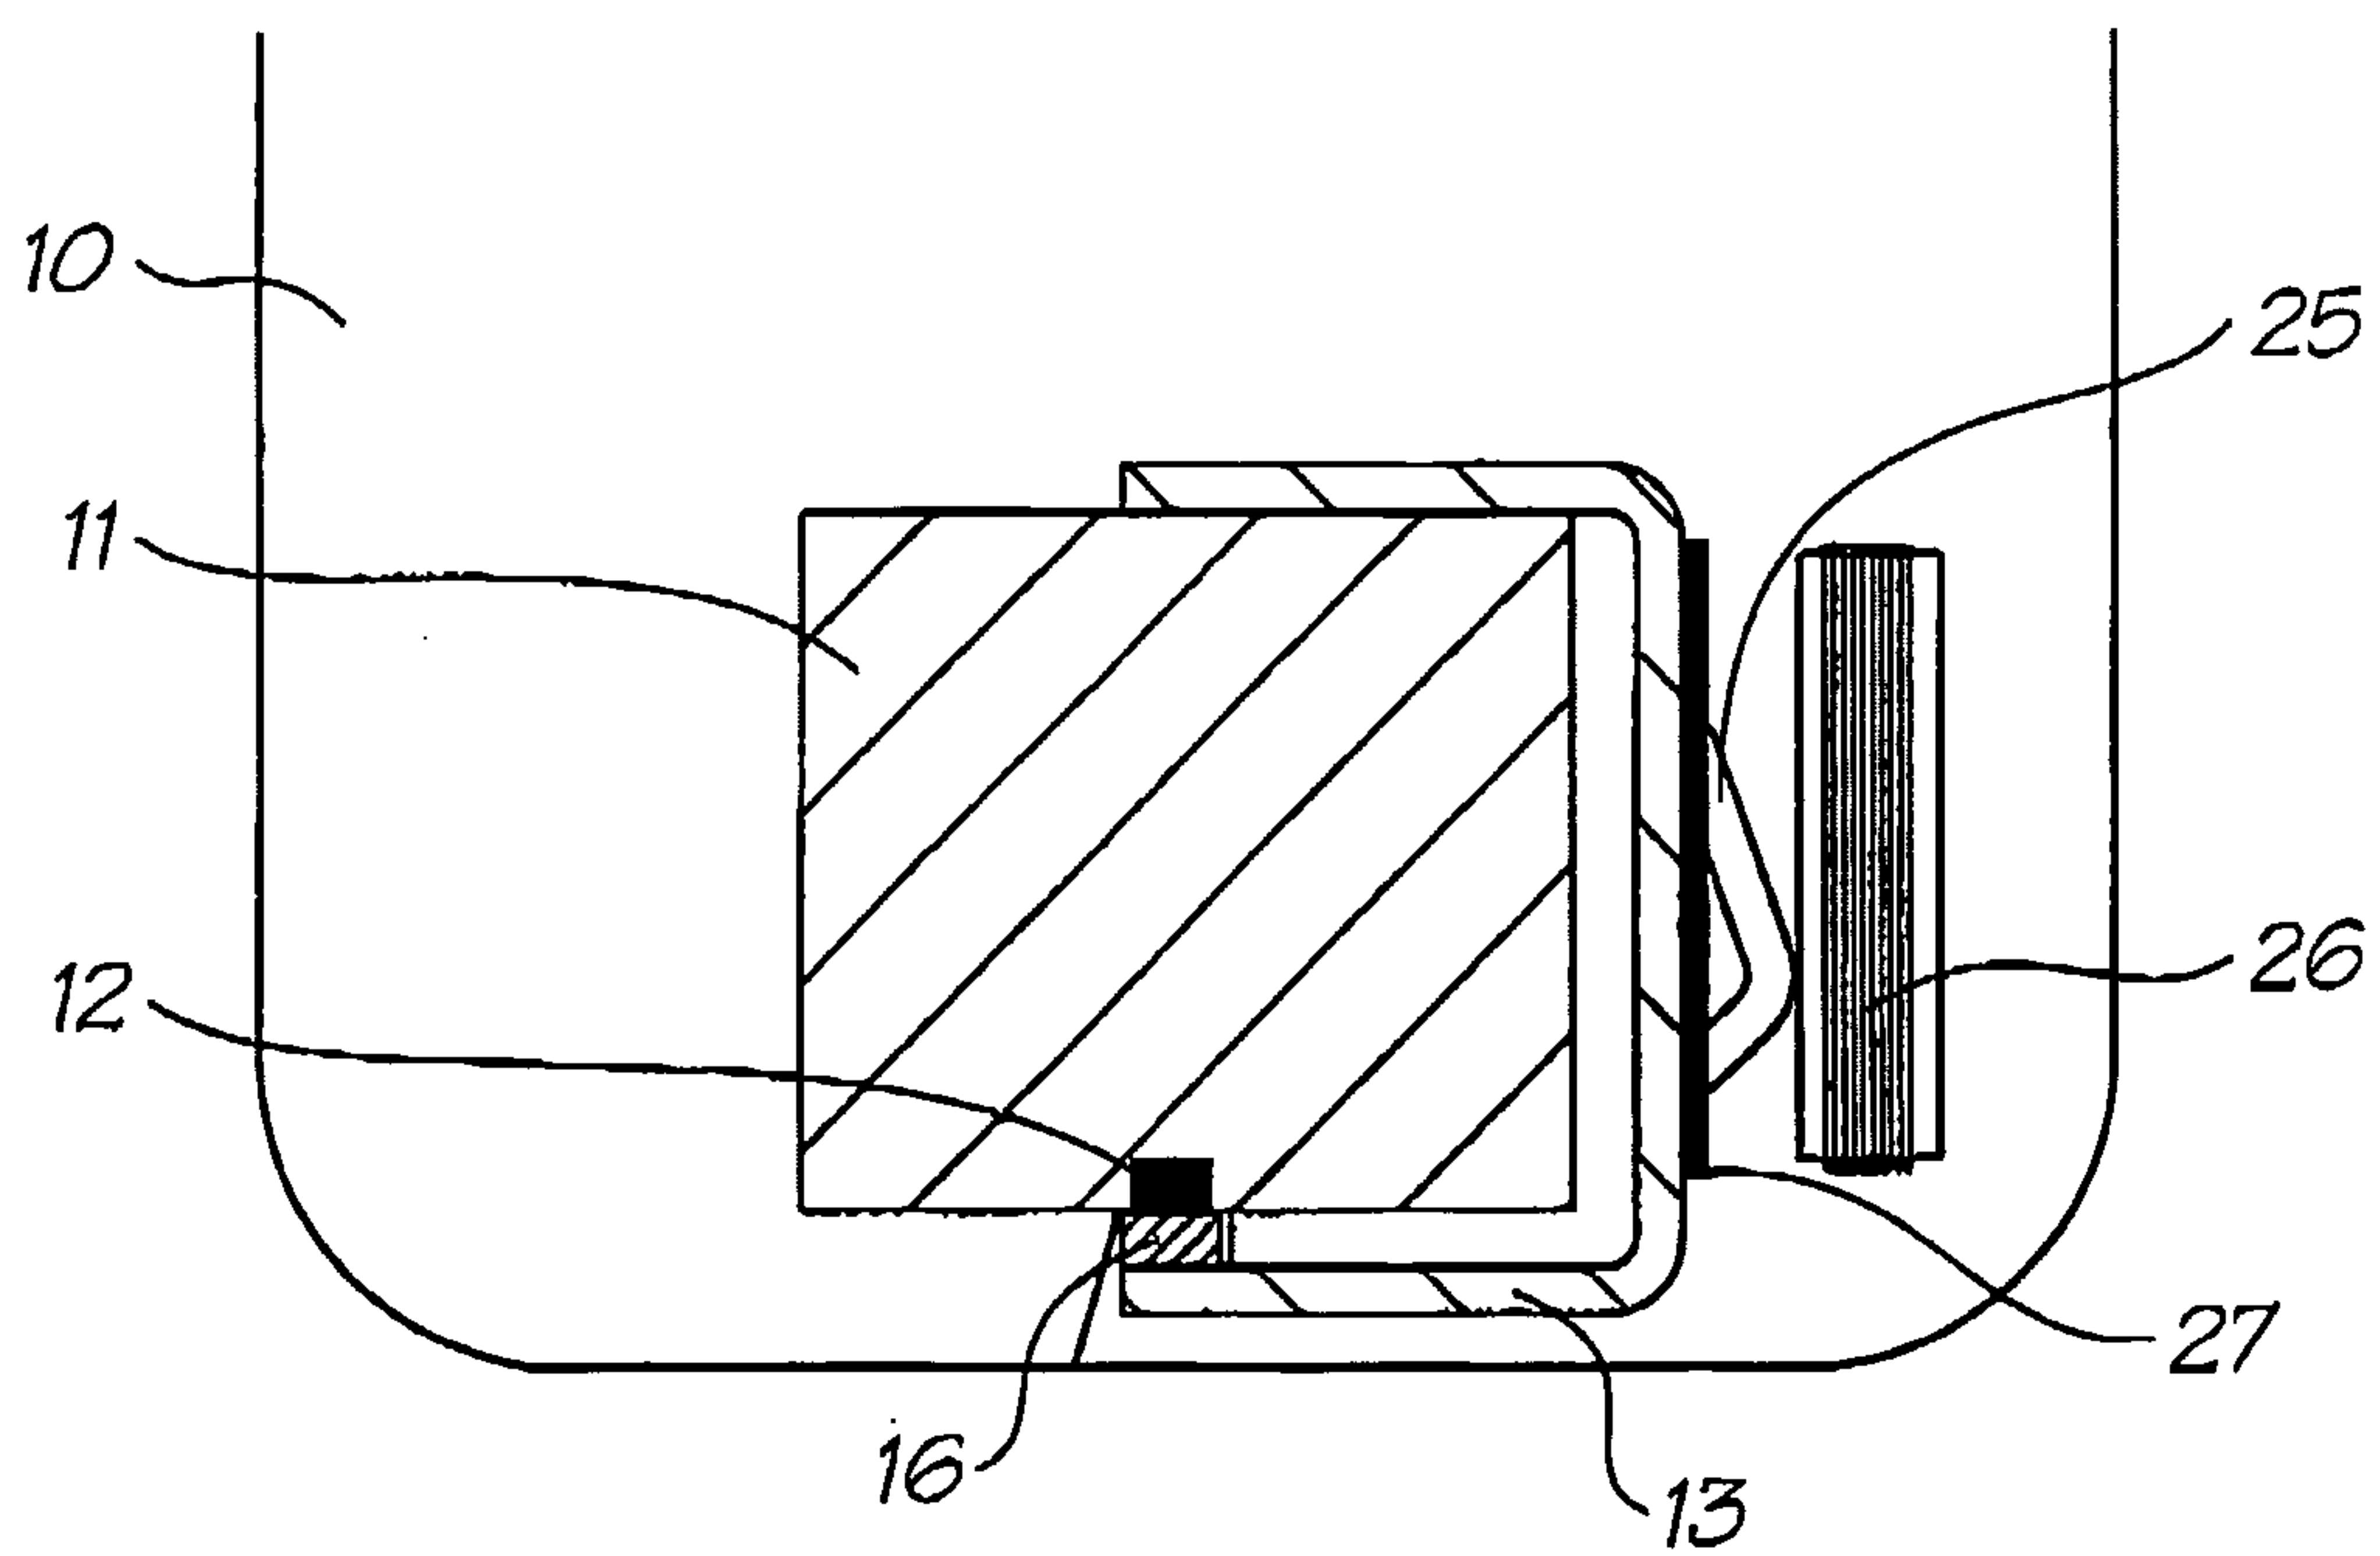


FIG. 10

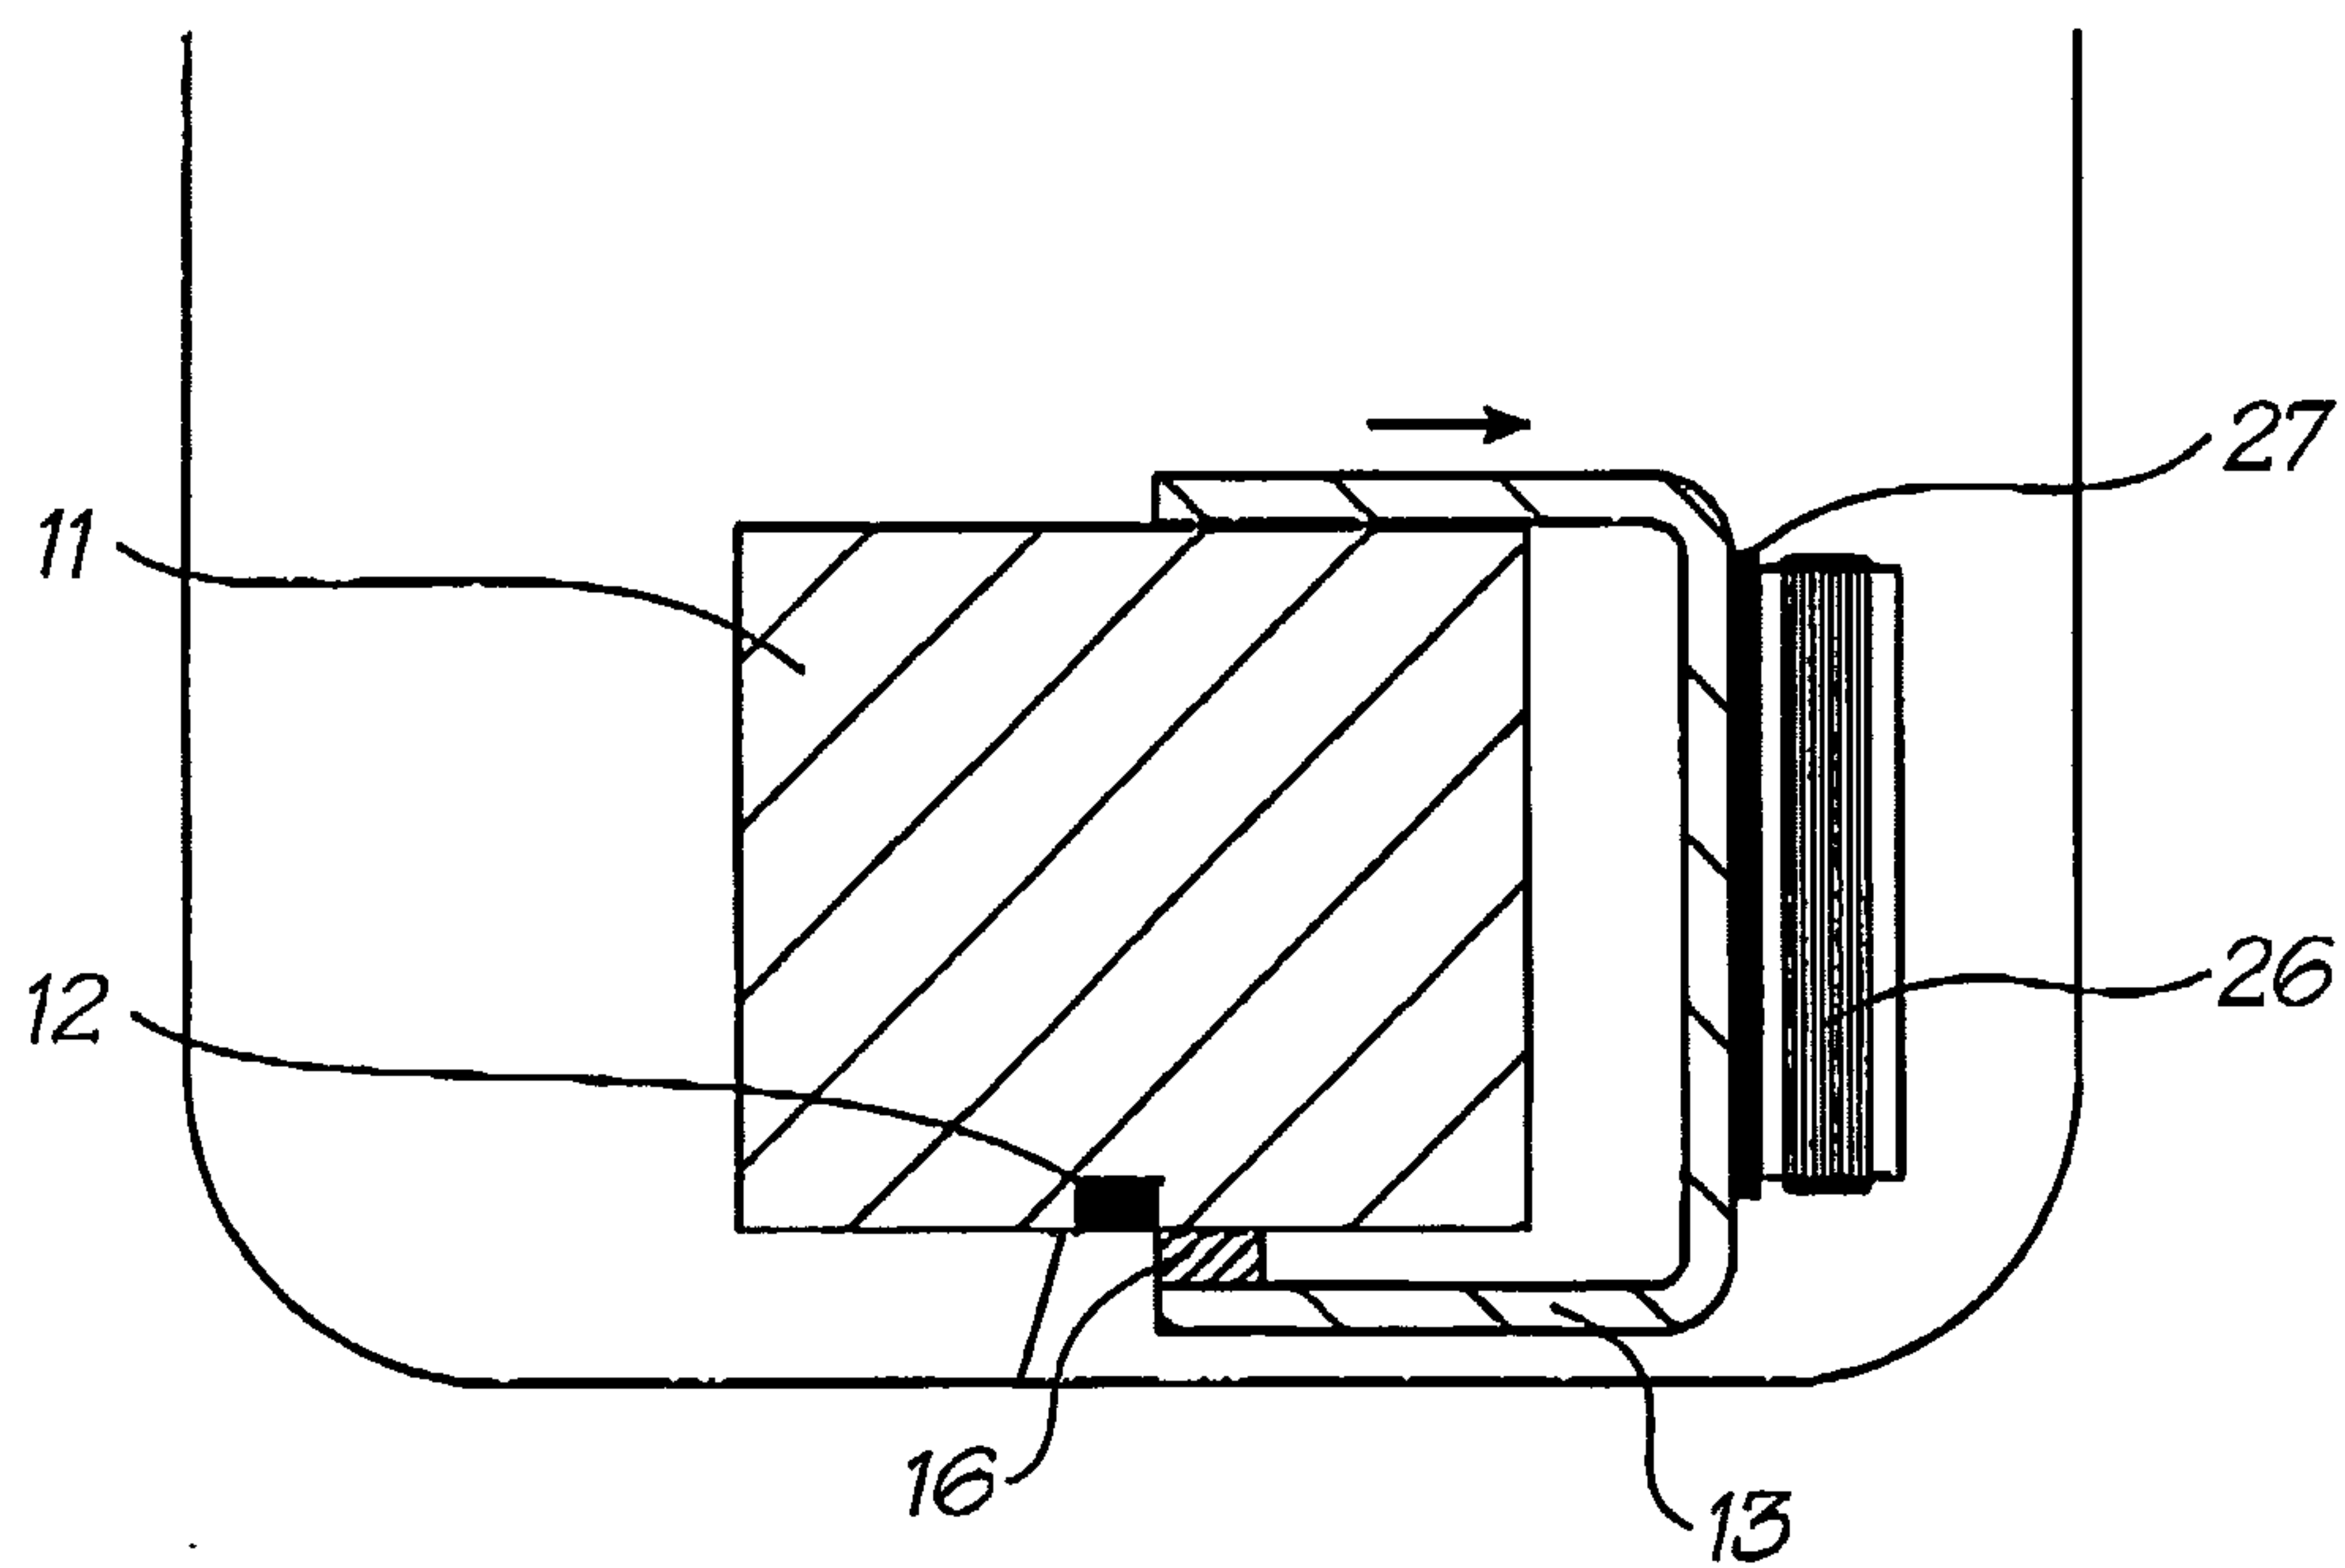


FIG. 11

