



(51) International Patent Classification:

D06F 58/04 (2006.01) **D06F 58/24** (2006.01)
D06F 58/16 (2006.01) **D06F 58/20** (2006.01)

(21) International Application Number:

PCT/EP2010/058963

(22) International Filing Date:

24 June 2010 (24.06.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

09164001.1 29 June 2009 (29.06.2009) EP

(71) Applicant (for all designated States except US): **ELECTROLUX HOME PRODUCTS CORPORATION N.V.** [—/BE]; Belgicastraat 17, B-1930 Zaventem (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DEL POS, Maurizio** [IT/IT]; Via Revedole 83, I-33170 Pordenone (PN) (IT). **PADOVAN, Loris** [IT/IT]; Via A. M. Cortinovis, 25/2, I-33079 Sesto Al Reghena (pn) (IT). **VIGNOCCHI, Massimiliano** [IT/IT]; Via Cansiglio, 7/a, I-33170 Pordenone (pn) (IT). **BISON, Alberto** [IT/IT]; Via Damiani, 4/B, I-33170 Pordenone (pn) (IT).

(74) Agents: **NARDONI, Andrea** et al.; c/o ELECTROLUX ITALIA S.P.A., Corso Lino Zanussi, 30, I-33080 Porcia (PN) (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

[Continued on next page]

(54) Title: APPLIANCE FOR DRYING LAUNDRY

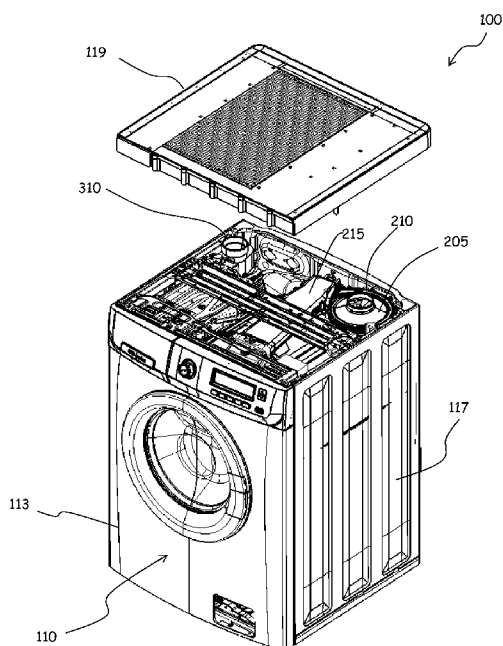


FIG. 2

(57) Abstract: A top (119) adapted to match and close from above a cabinet (110) of a laundry drying appliance (100). The top is formed as a ready-to-mount part ready to be mounted to the cabinet and forms a moisture condensing module for dehydrating drying air used to dry laundry within a drying drum of the laundry drying appliance. The top has a drying air inlet (510), a drying air outlet (515), fluid passageways defined therein from said drying air inlet to said drying air outlet for the passage of the drying air to be dehydrated and moisture condensing means arranged inside said fluid passageways.



— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

APPLIANCE FOR DRYING LAUNDRY

Background of the invention

Field of the invention

5 The present invention generally relates to the field of household appliances for laundry and garments treatment. In particular, the present invention relates to appliances for drying laundry, such as laundry dryers and combined washers/dryers.

Discussion of the related art

10 Appliances for drying laundry, are adapted to dry clothes, garments, laundry in general, by circulating hot, dry air within a tumbler or drum. The drum is rotatable within a tub, which is accommodated within a machine cabinet, and is designed to contain the articles to be dried. The rotation of the drum causes agitation of the articles to be dried, while they are hit by the drying air flow.

Combined laundry washer/dryer appliances combine the features of a washing machine with those of a dryer.

15 In a known type of laundry dryers and washers/dryers, also referred to as “condenser dryer”, the drying air flow is typically caused to pass through the drum, exiting therefrom from the front access opening, then it passes through a moisture condensing system, where the humid air is at least partially dehydrated, dried, and the dried air flow is heated up by means of a heating arrangement, like an electrical resistance; the heated drying air flow then passes again through the drum, and repeats the cycle.

The condensing system may be an air-air heat exchanger, exploiting air taken in from the outside. Examples of laundry dryers exploiting this type of condensing system are provided in EP 254018, EP 1584734, EP 2039819, GB 2075559.

25 Other known dryers and washers/dryers exploit a heat pump to dehydrate the drying air flow; in these dryers, the function of the heating arrangement may be performed by the heat pump itself, and the electrical resistance may thus not be provided for. Examples of laundry dryers exploiting a heat pump condenser are provided in JP2004135715, EP 1411163, EP 1634984.

Other known solutions exploit a water spray condenser for cooling the drying air. For example, EP 0552843 describes a washing and drying machine including, for the drying part, a

steam condenser communicating with the inside of the washing container to receive the steam emanated by the washed laundry contained in the drum and with a nozzle for spraying cold water for the condensation of said steam, an aspirator associated with said condenser for the aspiration of the condensed steam formed in said condenser and for its conveyance to a drying area for the formation of dry hot air and a recirculation conduit of dry hot air inside said container. A water spray condenser is also described in GB2248920.

For some household appliance manufacturers, it might be interesting to exploit the already existing design of a washer for producing and offering to the customers a washer/dryer. The addition of those components and parts, that are necessary for the laundry drying function, should have as low as possible impact on the already existing design; in particular, the additional components should be housed within the already existing washer cabinet. This may be a cumbersome task, because of space constraints.

Summary of the invention

The Applicant has faced the problem of how to reduce the encumbrance of the components necessary for the drying air circulation, particularly suitable for the implementation in a washer/dryer.

According to an aspect of the present invention, there is provided a top adapted to match and close from above a cabinet of a laundry drying appliance. The top is formed as a ready-to-mount part ready to be mounted to the cabinet and forming a moisture condensing module for dehydrating drying air used to dry laundry within a drying drum of the laundry drying appliance. The top has a drying air inlet, a drying air outlet, and fluid passageways defined therein from said drying air inlet to said drying air outlet for the passage of the drying air to be dehydrated. Moisture condensing means are arranged inside said fluid passageways.

The top has a top surface and a bottom surface, and said drying air inlet and said drying air outlet are provided on the bottom surface.

In an embodiment of the invention, the moisture condensing means comprises an air-air heat exchanger.

The air-air heat exchanger may comprise an undulated thermally-conductive part having undulations defining channels for the passage of the drying air on the underside, and channels for the passage of cooling air from the overside. The cooling air may be circulated by either a

tangential fan mounted to the top or a radial fan mounted to the top in correspondence of a cooling air discharge opening provided in the top.

5 The top may preferably comprise a top panel having perforations for the leakage of the cooling air, said top panel being adapted to lay thereon garments to cause drying thereof by means of the leaking cooling air.

In another embodiment of the invention, the moisture condensing means comprises an evaporator of a heat pump.

A heat pump condenser may also be accommodated inside the fluid passageways downstream said evaporator.

10 The heat pump is fluidly coupled or couplable to a compressor either attached to the top or being accommodated in correspondence of a basement of the laundry drying appliance.

The top may comprise a condense water drainage outlet for draining condense water released by the drying air upon passing through the moisture condensing means.

15 The fluid passageways for the drying air may comprise a first air path portion from the drying air inlet to the moisture condensing means, and a second air path portion from the moisture condensing system to the drying air outlet.

A defluff filter is preferably accommodated in the first air path portion.

20 Condense water droplets separator means are preferably provided in the second air path portion, for removing condense water droplets from the drying air before the drying air reaches the drying air outlet.

The water droplets separator means may comprise a sump and a baffle extending down the sump for defining a siphon.

The condense water drainage outlet may be fluidly connected to said sump.

25 The water droplets separator means may further comprise a condense water tank arranged at a lower quota, fluidly connected to the sump and to a point of said second path portion downstream the water droplets separator means.

Still according to the present invention, there is provided a top adapted to match and close from above a cabinet of a laundry drying appliance. The top is formed as a ready-to-mount part

ready to be mounted to the cabinet and forming a moisture condensing module for removing moisture from drying air used to dry laundry within a drying drum. The top has:

a drying air inlet couplable to an outlet of a drying air return duct rigidly fixed to the cabinet and through which drying air coming from drum flows,

5 a drying air outlet couplable to an inlet of an drying air delivery duct rigidly fixed to the cabinet and through which the demoisturized drying air is sent back to the drum,

fluid passageways defined thereinside for the passage of the drying air to be dehydrated coming from the drying drum and

moisture condensing means arranged inside the fluid passageways.

10 **Brief description of the drawings**

These and other features and advantages of the present invention will better appear by reading the following detailed description of some embodiments thereof, provided merely by way of non-limitative examples, description that should be read in conjunction with the attached drawings, wherein:

15 **Figure 1** is a perspective from the front of an appliance for drying laundry according to an embodiment of the present invention;

Figure 2 shows in perspective the appliance of **Figure 1** with a worktop unmounted;

Figure 3A shows in perspective from the rear the appliance of **Figure 2**, with lateral and rear walls of the cabinet removed;

20 **Figure 3B** shows a detail of **Figure 3A** from another point of view;

Figure 4 shows in enlarged scale a detail of a part of the appliance of **Figure 3A**;

Figure 5A shows in perspective exploded view a worktop of the appliance of **Figure 2**, in an embodiment of the present invention;

Figure 5B shows the worktop of **Figure 5A** from below;

25 **Figure 6** shows a detail of the worktop of **Figure 5A**;

Figures 7A and **7B** schematizes the path followed within the worktop of **Figure 5A** by

laundry drying air to be dehydrated, and by cooling air used to cool down the drying air so as to remove moisture therefrom;

Figure 8 shows another detail of the worktop of **Figure 5A**;

5 **Figure 9** shows still another detail of the worktop of **Figure 5A**, particularly an embodiment of mist separation means provided in the worktop;

Figure 10 shows a condense water drainage arrangement for draining condense water from the worktop of **Figures 5A** and **5B**;

Figure 11 schematically shows a detail of an alternative embodiment of the mist separation means of **Figure 9**;

10 **Figure 12** shows still another alternative embodiment of the mist separation means;

Figure 13 schematically shows an arrangement for exploiting condense water released by the drying air for generating steam used for refreshing the items to be dried;

15 **Figures 14A** and **15** shows a solution for generating refreshing steam, in an embodiment of the present invention; in addition, **Figure 14A** also shown an alternative construction of a drying air circulation fan and drying air conduit for delivering drying air to the drum;

Figure 14B shows a detail of the fixation of the drying air circulation fan of **Figure 14A** to the machine cabinet;

Figure 16 shows schematically an embodiment of the worktop of **Figure 5A** adapted to define a drying surface for laying garments to be dried gently;

20 **Figures 17** and **18** show an alternative construction of the worktop of **Figure 5A**;

Figures 19 and **20** show the implementation of the concept of **Figure 16** to the alternative worktop construction of **Figures 17** and **18**;

Figure 21 shows in exploded view a worktop according to another embodiment of the present invention, comprising a heat pump for dehydrating and then heating the drying air;

25 **Figure 22A** shows the worktop of **Figure 21** partially mounted, and schematizes the path followed by the drying air;

Figure 22B shows the worktop of **Figure 22A** from below;

Figure 23 shows the worktop of **Figure 21** partially sectioned, and also schematizes the path followed by the drying air;

Figure 24A shows a variant of the solution of **Figure 22**, with a compressor accommodated in the basement of the machine;

5 **Figure 24B** shows from below the worktop and compressor in the variant of **Figure 24A**;

Figure 25 shows a detail of the worktop of **Figure 21**;

Figure 26 shows an arrangement for draining condense water from the worktop of **Figure 25**; and

10 **Figure 27** shows a variant of the solution of **Figures 21 to 26**, with the heat pump accommodated in the basement of the appliance.

Detailed description of embodiments of the invention

With reference to the drawings, a laundry drying appliance, particularly a washer/dryer according to an embodiment of the present invention is depicted in **Figure 1** in perspective. The washer/dryer, globally denoted as **100**, comprises a drum **105** for the loading of the articles to be washed and/or dried, such as clothes, garments, linen, and similar articles. The drum **105** is a generically cylindrical body, for example made of stainless steel, and is rotatable within a tub housed in the machine casing or cabinet **110**.

20 The cabinet **110** is generically a parallelepiped in shape, and has a front wall **113**, two side walls **117**, a rear wall, a basement and a top **119**. The front wall **113** is provided with an opening for accessing the drum **105** and with an associated door **115** for closing the opening. In the upper part of the front wall **113**, a machine control panel **121** is located, and, aside the control panel **121**, a drawer **123**, part of a washing treatment products dispensing arrangement, for loading laundry washing treatment products like detergents and softeners. The top **119** closes the cabinet **110** from above, and defines a worktop.

25 In the washer/dryer **100**, when operated in dryer mode, drying air is typically caused to flow through the drum **105**, where the items to be dried are contained. After exiting the drum **105**, the flow of moisture-laden drying air passes through a moisture condensing system, where the humid drying air is at least partially dried, dehydrated, and the dehydrated air flow is then heated and caused to pass again through the drum **105**, and repeats the cycle.

In the following, two solutions (and some possible variants thereof) according to embodiments of the present invention will be presented; the two solutions mainly differ from each other for the type of moisture condensing system, which in one case comprises an air-air heat exchanger, whereas in the other case the condensing system comprises a heat pump.

5 **Figures 2 to 16** show, in different views, a solution according to a first embodiment of the present invention, in which the moisture condensing system comprises, as mentioned, an air-air heat exchanger, described in detail in the following.

As visible in particular in **Figures 2 and 3A, 3B**, a drying air circulation system is provided in the washer/dryer **100**. The drying air circulation system comprises a fan **205**, arranged at the rear
10 of the cabinet **110**, near the right-top corner thereof. The fan **205**, which is fixedly mounted to the cabinet **110**, for example by means of a bracket **340** so as to be rigidly connected to the cabinet **110**, has an air intake **210** facing upwards and which opens towards the top **119**. The fan **205** has an outlet coupled to an inlet of an air duct **215** that runs at the top of the cabinet **110** from the rear to the front thereof, and, through a bellow, conveys the drying air from the fan **205** into the tub **303**
15 and the drum **105** accommodated therein; in particular, the drying air enters the drum **105** in correspondence of the front thereof. An air heater is preferably accommodated within the air duct **215**, for example an electrical resistor, so as to heat up the drying air before it enters the drum **105**. The drying air circulation system further comprises a return air duct **305**, arranged at the rear of the cabinet **110**, near the left-top corner thereof and fixedly mounted to the cabinet **110**, for example by
20 means of a bracket **345**, so as to be rigidly connected to the cabinet **110**; the return air duct **305** receives the drying air exiting the drum **105** and the tub **303**, and has an outlet **310** that faces upwards and opens towards the top **119**; in particular, the drying air exits the drum **105** at the rear thereof, after having passed through the drum so as to hit the items to be dried that are present therein.

25 As visible in **Figures 3A, 3B and 4**, according to a preferred embodiment of the present invention, the return air duct **305** receives the drying air exiting the drum **105** and the tub **303** through an opening in the tub **303** already provided for feeding thereto the laundry washing treatment products (detergents, softeners) and the clean water used to wash the laundry when the washer/dryer is operated in washing mode. In particular, a manifold **315** is provided, coupled to the
30 opening in the tub **303**. The manifold **315** has an inlet pipe **320** that is coupled, by means of a bellow and a duct **323**, to an arrangement **325** for dispensing to the tub **303** the laundry washing treatment products (the dispensing arrangement comprising for example a detergent/softener

container, one or possibly two electrovalves for intaking cold and possibly hot water from water mains, possibly a mixing chamber for mixing treatment products and water). The manifold **315** has an outlet opening to which, by means of a bellow, the return air duct **305** is connected. Internally, the manifold **315** has a baffle **405** extending down from a top wall of the manifold **315** and defining a siphon: the siphon allows that part of the laundry washing treatment liquid (water mixed with the detergent of the softener, or, possibly, simply water) remains at the bottom of the manifold **315**, thereby preventing that, when the appliance is operated in drying mode, the drying air exiting the tub **303** leaks into the treatment products dispensing arrangement **325**, and that heat is lost, and, at the same time, that humid, moisture-laden air is released into the external environment, which is regarded as undesired because the washer/dryer is installed in-house.

Part of the drying air circulation system is entirely accommodated within the top **119**. As visible in the exploded view of **Figure 5A**, the top **119** comprises a base element **505**, visible from below in **Figure 5B**, having shape and size adapted to match and close from above the cabinet **110** when the top **119** is mounted thereto. Proximate to the two rear corners thereof, the base element **505** has two openings **510** and **515**; as better described in the following, when the top **119** is assembled and placed on top of the cabinet **110**, the opening **510** matches the outlet **310** of the return air duct **305**, whereas the opening **515** matches the air intake **210** of the fan **205**.

As visible in **Figures 5A, 6 and 7A, 7B**, an air path for the drying air is defined in the base element **505** by means of a series of walls. In particular, moisture-laden drying air, indicated by arrow **520** in **Figure 5A**, coming from the drum **105** and the tub **303** through the return air duct **305**, and entering into the top **119** through the opening **510**, initially is caused to flow essentially parallel to the left side **525** of the top **119**, from the rear to the front, and to pass through an air defluff filter that is removably accommodated within a respective filter seat **530** formed in the base element **505**. Upon exiting the defluff filter, the drying air passes (arrow **533**) through a moisture condenser comprising an air-air heat exchanger **535**, so as to be cooled down and release moisture in the form of condense water. Advantageously, the air-air heat exchanger **535** is fully accommodated within the top **119**, for example, as shown, in the central part thereof.

The air-air heat exchanger **535** comprises a corrugated sheet metal part **540**, the undulations of which define channels for the passage of air. The corrugated sheet metal part **540** rests, both at the front and at the rear edges thereof, on a pair of comb-like structures **705** and **710**, respectively arranged along a front wall **545** of the base element **505**, and along a rear wall **550** of the base element **505**. When assembled, the corrugated sheet metal part **540** is glued to the base

element **505** by means of glue in between the comb-like structures **705** and **710**. When the corrugated sheet metal part **540** rests on the comb-like structures **705** and **710**, the undulations define, on the underside of the sheet metal part **540**, channels for the flow of the drying air **533** to be cooled down, whereas on the upper side of the sheet metal part **540** the undulations define
5 channels for the flow of cooling air **555** that, in the embodiment here considered, is taken in from the outside environment by means of a tangential fan **560** mounted to the rear wall **550** of the base element **505**. The glue used to attach the corrugated sheet metal part **540** also seals the upper and lower channels for the cooling and drying air. In this way, the drying air **533** that, after passing through the defluff filter, enters the air-air heat exchanger and flows under the corrugated sheet
10 metal part **540**, releases heat to the cooling air **555** that flows above the corrugated sheet metal part **540**, and cools down, and the moisture present therein is condensed. The cooling air **555**, after passing through the air-air heat exchanger, exits from the front thereof, and is then discharged into the machine cabinet **110** through an aperture **570** provided in the base element **505**. In alternative to the tangential fan **560**, an axial fan might be provided in correspondence of the aperture **570** for
15 circulating the cooling air.

After passing through the air-air heat exchanger **535**, the cooled drying air **573** exits it from the right rear corner thereof, and then flows along a convoluted air path portion **575** to the opening **515** that is connected to the fan intake **210**. Along the convoluted air path portion **575**, mist/condense water droplets separation means are provided, for ensuring that mist, condense
20 water droplets are removed from the drying air before it reaches the air fan **205**.

As visible in **Figure 9**, in an embodiment of the invention, the mist/condense water droplets separation means comprises a condense water collecting tank **905** formed along the convoluted air path portion **575**; droplets of condense water released by the drying air upon passing through the air-air heat exchanger are drawn by the aspiration effect of the fan **205** to the convoluted air path
25 portion **575** and arrives at the tank **905**, where they are separated from the drying air and accumulate. At the bottom of the tank **905**, a condense water discharge conduit **910** is fluidly connected to the manifold **315**, by means of a piping **1005**, visible in **Figure 10**. In particular, the piping **1005** that connects the condense water discharge conduit **910** to the manifold **315** opens into the latter at a point below the free surface of the water that remains in the siphon defined by
30 the baffle **405**; in this way, it is ensured that the condense water is not aspirated by the fan **205**. When, due to the discharged condense water, the level of water in the manifold **315** raises excessively, the excess water is discharged into the tub **303**, in a position thereof such that the

water does not enter the drum, but is instead directly conveyed, via the tub, to a liquid discharge circuit, comprising a discharge pump, provided in the washer/dryer.

As an alternative to discharging the condense water into the manifold **315**, the condense water that accumulates in the tank **905** may be directly conveyed to the water discharge pump.

5 Preferably, as schematically depicted in **Figure 11**, in order to avoid that the depression generated by the fan **205** may suck condense water that deposits in the tank **905**, the discharge conduit **910** of the tank **905** is fluidly connected, by a conduit **1105**, to a lower tank **1110**, located at a suitable lower quota with respect to the top **119**, for example at or near the basement of the washer/dryer. The lower tank **1110** is further fluidly connected, through a conduit **1115**, to a point of
10 the convoluted air path portion **575** located downstream the tank **905**, for example close to the air intake **210** of the fan **205**. The bottom of the lower tank **1110** has a condense water discharge outlet **1120** that is fluidly connected to the water discharge circuit of the washer/dryer, and thus to the discharge pump.

A baffle **915** is preferably provided in the tank **905**, the baffle **915** defining a siphon; the
15 presence of the baffle **915**, forming as barrier for the drying air flow, facilitates that water droplets that are transported by the flow of drying air fall into the tank **905**, preventing them from reaching the fan **205**.

As an alternative to the provision of the baffle **915** shown in **Figures 9** and **11**, a mist separator element **1205** may be accommodated in the tank **905**, as depicted in **Figure 12**, for
20 promoting the removal of moist droplets from the drying air. The mist separator element **1205** may for example be formed of a plurality of metal or plastic plates bent to define a winding path. Also in this case, the lower tank **1110** may be provided.

The path followed in the top **119** by the moisten-laden drying air is also schematized in **Figure 7A**, and indicated therein as **700**. The drying air passes through the defluff filter vertically,
25 from the top to the bottom filter surfaces, and exits the filter seat **530** (for then entering into the air-air heat exchanger) passing through an opening **701** formed along a bottom of a side wall of the filter seat **530**. In **Figure 7B**, there is instead schematized (reference **701**) the path followed by the cooling air.

The condense water that accumulates in the tank **905** may be exploited for generating
30 steam used for refreshing the items to be dried during the drying cycle. As schematized in **Figures**

13 and 14A, the tank 905 may be shaped so as to have a deeper portion 1305, defining a reservoir for water used to generate steam. A pump 1310 has an inlet connected to the tank deeper portion 1305; the pump 1310 has an outlet fluidly connected to a nozzle 1405 arranged to spray inside the air duct 215, preferably in a point thereof where there is the electrical resistor provided for heating the drying air; in this way, the heat generated by the resistor cause the water sprayed by the pump 1305 to vaporize, and steam is generated that is useful for refreshing the items being dried. The resistor may be mounted internally or externally to the air duct 215; in case the resistor is mounted within the air duct 215, an armoured resistor should be used. For a more efficient operation, as depicted in Figure 15, the drying air heating resistor 1505 may be associated with a heat dissipater/radiator 1510 having fins, that is accommodated within the air duct 215. In this way, the effect of drying air heating and of vaporisation of the water sprayed by the pump 1310 is enhanced.

In Figures 14A and 14B there is also shown a variant of the construction of the fan 205 and air duct 215, in which the air duct 215 is shaped so as to also define a housing for the fan 205; the air duct is made of two half-shells, and is fixedly, rigidly mounted to the cabinet 110 by means of the bracket 340, as visible in Figure 14B.

Referring back to Figure 5A, a pair of panels 580 and 585 are provided in the top 119 for closing from above the air path defined in the base element 505 for the drying air. The top 119 is completed by a further panel 590, having also aesthetic function, that is superimposed to the two panels 580 and 585 and that also covers the corrugated sheet metal plate 540, and by a frame 595 (the panel 590 and the frame 595 are not depicted in Figure 2). The panels 580, 585 and 590 are secured to the base element 505 for example by means of screws.

In an embodiment of the present invention, shown in Figure 16 (and similarly in Figures 19 and 20, although the latter drawings relate to a variant of the top here described, that will be described later on), the panel 590 has an elongated aperture 1605 extending parallelly to the front of the top 119, from which opening 1605 the cooling air 555, after having passed through the air-air heat exchanger 535, exits. Above the panel 590, a perforated panel 1610 rests, slightly spaced apart from the panel 590, so as to leave an air gap between the two panels 590 and 1610. The cooling air 555, heated by the heat released by the drying air 533, exits from the perforations in the panel 1610. In this way, the top 119 may be exploited for laying thereon delicate garments to be dried that, due to their nature, cannot be dried within the tumbling drum without being damaged. The top 119 thus defines thereinside a path for the drying air to be cooled down, and another path for the cooling air which is also exploited for drying delicate garments by laying them on the

perforated surface of the panel **1610**.

The top **119**, once assembled, forms a unit that is ready to be mounted to the cabinet **110**, simply by placing it in the correct alignment, so that the openings **510** and **515** matches the outlet **310** of the return air duct **305** and, respectively, the intake **210** of the air circulation fan **205**. As mentioned in the foregoing, both the return air duct **305** and the fan **205** are fixed, rigidly connected to the machine cabinet **110**; in this way, the outlet **310** of the return air duct **305** and the air intake **210** of the air circulation fan **205** act as automatic positioning and centering means for the top **119**, thereby greatly simplifying the mounting thereof. The operation of mounting of the top onto the cabinet simply consists in laying the top **119** on the cabinet properly positioning it with the help of the self-centering action achieved by the matching of the openings **510** and **515** with the outlet **310** and air intake **210**; in this way, all the necessary connections for the drying air circulation circuit are completed, and there is no necessity to perform any additional connection (exception made for the connection of the condense water discharge piping **1005**). The top **119** may then be secured to the cabinet **110** by conventional means. Thanks to the fact that several components of the drying air circulation system, particularly the moisture condensing system, are accommodated within the top **119**, several problems of space within the cabinet **110** are overcome; essentially, only the fan **205**, the air duct **215**, and the return air duct **305** need to be accommodated within the cabinet **110**. This reduces problems of space within the cabinet **110**, and makes it easier to exploit an already existing design of a washing machine to transform it into a washer/dryer, without having to make substantial changes.

A top **119** according to a variant of the embodiment just described is depicted in **Figures 17 - 20**. In this case, the drying air to be cooled down for releasing the moisture and be dehydrated passes through the air-air heat exchanger twice, once going from the front towards the rear, and then back towards the front, as schematized in **Figure 18**. This double passage improves the action of cooling of the drying air by the cooling air, and thus improves the release of moisture. In particular, the drying air, entering into the top **119** through the opening **510**, flows along a substantially rectilinear path **1705** defined in the base element along the left side thereof, from the back to the front, and then enters a defluff filter **1710**, which in this alternative is accommodated along the front side of the base element **505**. The drying air passes through the defluff filter (from the top to the bottom thereof), and then enters the air-air heat exchanger. As in the previously described embodiment, the air-air heat exchanger comprises a corrugated sheet metal part **1805**, the undulations defining channels for the passage of the drying air (under the corrugated sheet

metal part **1805**) and for the cooling air (above the corrugated sheet metal part **1805**). The region of the base element **505** destined to accommodating the corrugated sheet metal part **1805** is divided in two parts **1810a**, **1810b**, separated by a wall **1815** extending parallelly to the side walls of the base element **505**. The drying air passes from the filter to the air-air heat exchanger flowing through a passage **1820** formed at the bottom of a wall **1825** that separates the filter lodging from the region of the air-air heat exchanger, said passage being located on the left side of the base element. The drying air flows under the corrugated sheet metal part **1805** in the first part **1810a** of the base element **505**, then, at the rear of the base element **505**, the drying air passes to the second part **1810b** of the base element passing through a passage **1830** formed at the bottom of the wall **1815**. The drying air then flows under the corrugated sheet metal part **1805** in the second part **1810b** of the base element **505** to the front, and exits the air-air heat exchanger passing through an aperture **1835** below a lateral wall **1840** of the base element **505** that delimits the region thereof accommodating the corrugated sheet metal part **1805**. The cooled drying air thus exits the air-air heat exchanger from the front-right corner thereof, then the drying air flows along an essentially straight air path **1845** towards the opening **515**, where there is the intake **210** of the fan **205**. For the discharge of the condense water that is released by the drying air, solutions similar to those described above are exploitable. As shown in **Figures 19** and **20**, the top panel **1905** of the top **119** may also in this case be perforated, for the passage of the cooling air, so as to provide a working surface for lying delicate garments that are not suitable to be dried by putting them into the tumbling drum of the machine. The top **119** defines thereinside a path for the drying air **1910** to be cooled down, and another path for the cooling air **2005** which is also exploited for drying delicate garments by laying them on the perforated surface of the panel **1905**.

Figures 21 to **26** show, in different views, a solution according to a second embodiment of the present invention, in which the condensing system is almost completely accommodated within the top **119** and comprises, as mentioned, a heat pump, instead of an air-air heat exchanger.

Also in this case, the top **119** comprises a base element **2105**, which has two openings **2205** and **2210**, the former in correspondence of the outlet **310** of the return air duct **305**, the latter in correspondence of the intake **210** of the fan **205**. In the region of the base element **2105** near the front-left corner thereof, a defluff filter arrangement **2110** is located, for example in the form of a drawer hinged at one end to the base element **2105** and pivotable so as to allow its extraction for cleaning purposes. The defluff filter may comprises a couple of superimposed meshes that can be separated for being cleaned.

In the central region of the base element **2105**, there is accommodated a moisture condensing system comprising an evaporator **2115** part of a heat pump that further comprises a condenser **2120**. The evaporator **2115** has the function of dehydrating the drying air, by cooling it down; the condenser **2120** has instead the function of heating the dehydrated drying air. A compressor **2125** for the heat pump is attached to the base element **1405** in correspondence of the front-right corner thereof, the compressor body protruding from below the base element **2105**. In an alternative embodiment, shown in **Figures 24A** and **24B**, the compressor **2125** may be located in the bottom of the cabinet, attached to the basement, and be fluidly connected to the moisture condensing system accommodated in the top **119** by means of flexible pipes **2405** than run along a rear corner of the cabinet **110**.

The base element **2105** is covered by a first panel **2130**, that covers essentially just the evaporator **2115**, and a second panel **2135**, that also covers the condenser **2120** and the filter **2110**. The top **119** is completed by the top panel **590** and the frame **595**. The base element **2105** and the two panels **2115** and **2135** define a first air path that conveys the drying air coming from the return air duct **305** to the defluff filter, preventing the drying air from entering the evaporator, and a second air path that, from the defluff filter, goes to the condenser passing through the evaporator.

The drying air passes through the filter **2110** from the top to the bottom of it, and then enters the evaporator **2115**. The panel **2130** has, along an edge thereof that runs along the border between the filter **210** region and the evaporator **2115** region, a downwardly projecting lip **2135** that prevents the drying air to enter the evaporator region from above the filter **2110**.

In the region of the base element **2105** under the evaporator **2115**, there are provided mist/condense water droplets separation means; in particular, the base element **2105** is slanted towards a baffle **2305** that separates the area of the base element **2105** where the evaporator **2115** is accommodated, from the area where the condenser **2120** is placed. The baffle **2305** forms a barrier for the condense water that drops from the drying air when it passes through the evaporator **2115**. Preferably, transversal channels **2505** are formed in the base element in the area corresponding to the evaporator **2115**, to facilitate the drainage of the condense water. A condense water drainage hole **2510** is formed in the area of the base element corresponding to the evaporator **2115**; the drainage hole **2510** is fluidly connected, through a conduit **2605**, to the manifold **315**, for discharging the condense water. The conduit **2605** opens into the manifold **315** at a point below the surface of the water that remains in the manifold **315**, for avoiding that, due to the

depression created by the fan **205**, the condense water is aspirated back. Also in this case, the excess condense water that accumulates in the manifold **315** discharges into the tub, in a manner such as not to enter into the drum, and then goes to the water discharge circuit of the machine. Alternatively the drainage hole **2510** may be fluidly connected to the water discharge circuit directly.

5 Also in this second embodiment, the top **119**, once assembled, forms a unit that is ready to be mounted to the cabinet **110**, simply by placing it in the correct alignment, so that the openings **2205** and **2210** matches the outlet **310** of the return air duct **305** and, respectively, the intake **210** of the fan **205**. The top **119** may then be secured to the cabinet **110** by conventional means. No further connections need to be made, exception made for the connection of the drainage hole **2510**
10 to the manifold **315**; in the variant having the compressor located in the basement, the top **119** may be preassembled with the pipes **2405** attached to the heat pump; after placing the top on the cabinet, the pipes **2405** are connected to the compressor.

The solution exploiting an air-air-heat exchanger as a condensing means for removing moisture from the drying air achieves a significant saving of water compared to the solutions known
15 in the art exploiting a water spray condenser; in fact, water spray condensers waste several liters of waters, that is taken in from the water main.

The solution exploiting the heat pump, in addition to achieving a saving of water as that exploiting the air-air-heat exchanger, also allows saving electrical energy, because the electrical resistor for heating the drying air may be dispensed for; in any case, nothing prevent from providing
20 also in this embodiment the resistor air heater: for example, it may be useful for the starting phases of the drying cycle, where the condenser in the heat pump is not yet reached the full working temperature, or for the generation of steam for refreshing the items being dried, as in the solution described above.

Finally, in **Figure 27** there is shown a variant of the heat pump solution in which the heat
25 pump **2705**, instead of being accommodated within the top **119**, is placed at the base of the cabinet (also the compressor being in this accommodated in the bottom of the machine); air ducts **2710** and **2715** extending along the rear wall of the cabinet are provided for conveying the drying air exiting the drum to the heat pump, and for conveying back the demoisturized drying air to an air intake of the air circulation fan **205**. Also in this case, the heat pump may be realized in the form of
30 an assembly ready to be mounted.

Several modifications to the embodiments described in the foregoing can be envisaged.

For example, the rotary defluff filter described in connection with the second embodiment could be implemented as well in the first embodiment.

CLAIMS

1. A top (119) adapted to match and close from above a cabinet (110) of a laundry drying appliance (100), the top being formed as a ready-to-mount part ready to be mounted to the cabinet and forming a moisture condensing module for dehydrating drying air used to dry laundry within a drying drum of the laundry drying appliance, the top having:

a drying air inlet (510),

a drying air outlet (515),

fluid passageways defined thereinside from said drying air inlet to said drying air outlet for the passage of the drying air to be dehydrated and

moisture condensing means arranged inside said fluid passageways.

2. The top of claim 1, having a top surface and a bottom surface, and wherein said drying air inlet and said drying air outlet are provided on the bottom surface.

3. The top of claim 1 or 2, wherein the moisture condensing means comprises an air-air heat exchanger.

4. The top of claim 3, wherein the air-air heat exchanger comprises an undulated thermally-conductive part (540;1805), having undulations defining channels for the passage of the drying air on the underside, and channels for the passage of cooling air from the overside, said cooling air being circulated by one among a tangential fan (560) mounted to the top and a radial fan mounted to the top in correspondence of a cooling air discharge opening (570) provided in the top.

5. The top of claim 4, wherein the top comprises a top panel (1610;1905) having perforations for the leakage of the cooling air, said top panel being adapted to lay thereon garments to cause drying thereof by means of the leaking cooling air.

6. The top of claim 1 or 2, wherein the moisture condensing means comprises an evaporator (2115) of a heat pump.

7. The top of claim 6, further comprising a heat pump condenser (2120) accommodated inside the fluid passageways downstream said evaporator.

8. The top of claim 6 or 7, wherein the heat pump is fluidly coupled or couplable to a compressor (2125), said compressor being either attached to the top or being accommodated in

correspondence of a basement of the laundry drying appliance.

9. The top of any one of the preceding claims, comprising a condense water drainage outlet (910;2510) for draining condense water released by the drying air upon passing through the moisture condensing means.

5 10. The top of any one of the preceding claims, wherein said fluid passageways for the drying air comprise a first air path portion from the drying air inlet to the moisture condensing means, and a second air path portion from the moisture condensing system to the drying air outlet.

11. The top of claim 10, comprising a defluff filter accommodated in the first air path portion.


10 12. The top of claim 10 or 11, comprising condense water droplets separator means (905;915;1205;1105-1115) provided in the second air path portion, for removing condense water droplets from the drying air before the drying air reaches the drying air outlet.


13. The top of claim 12, wherein the water droplets separator means comprises a sump (905) and a baffle (915) extending down the sump for defining a siphon.


15 14. The top of claim 13 as depending on claim 9, wherein said condense water drainage outlet (910) is fluidly connected to said sump.

15. The top of claim 13 or 14, wherein the water droplets separator means further comprises a condense water tank (1110) fluidly connected to the sump and to a point of said second path portion downstream the water droplets separator means.

1/18

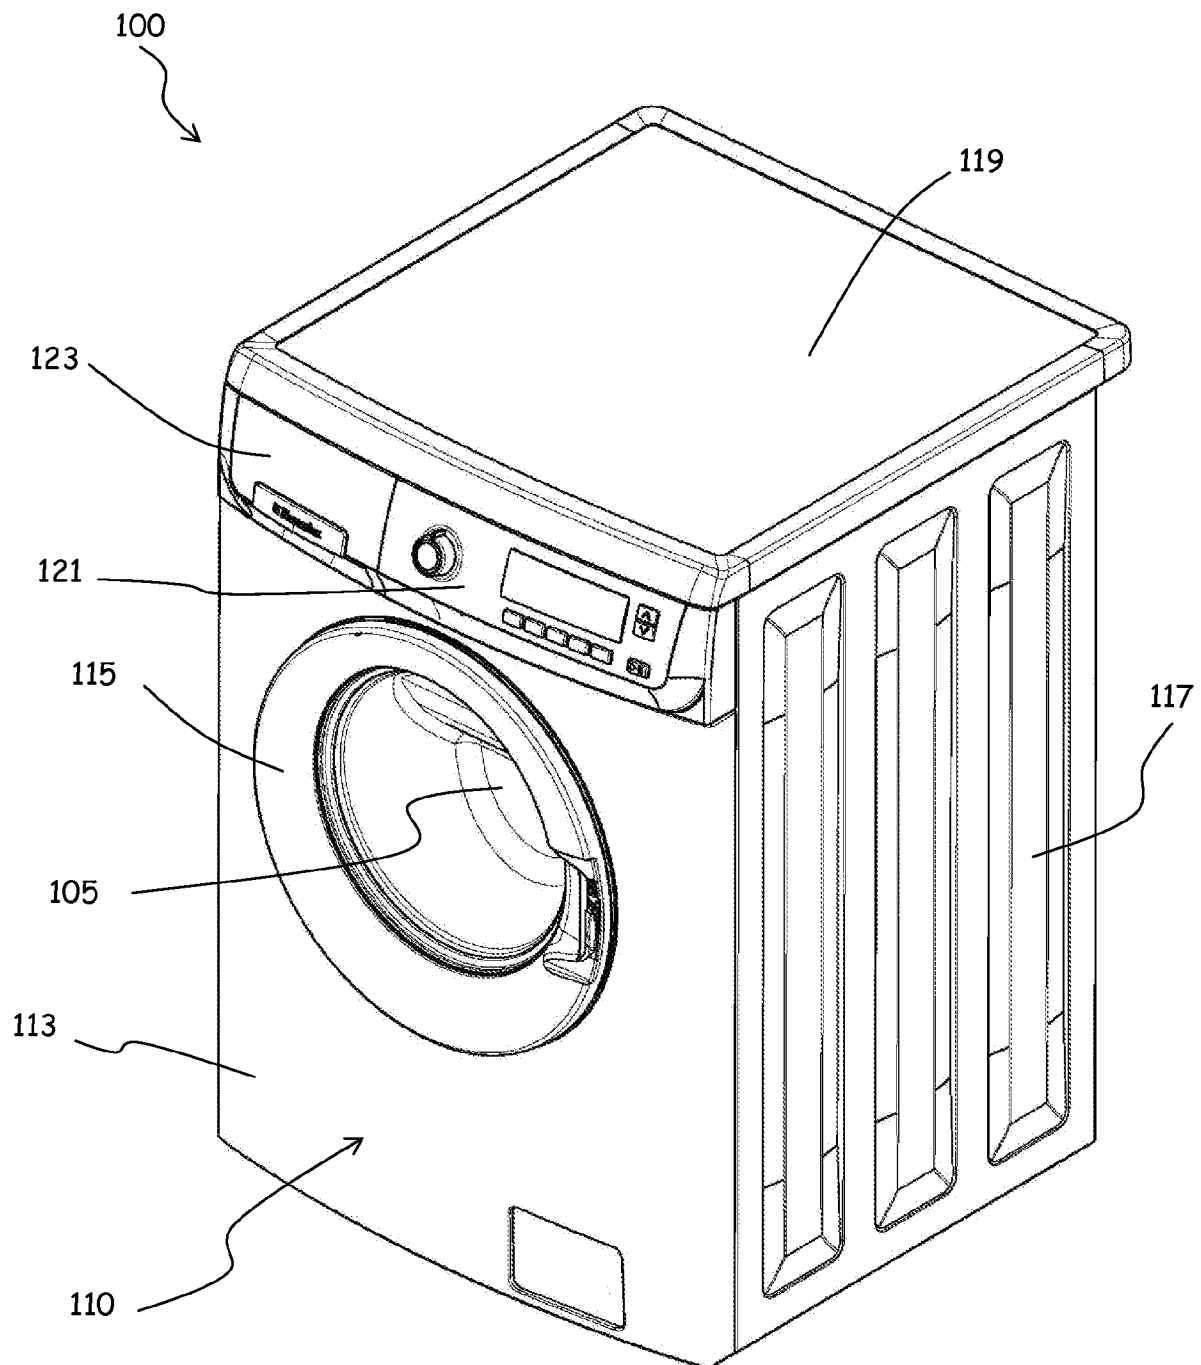FIG. 1

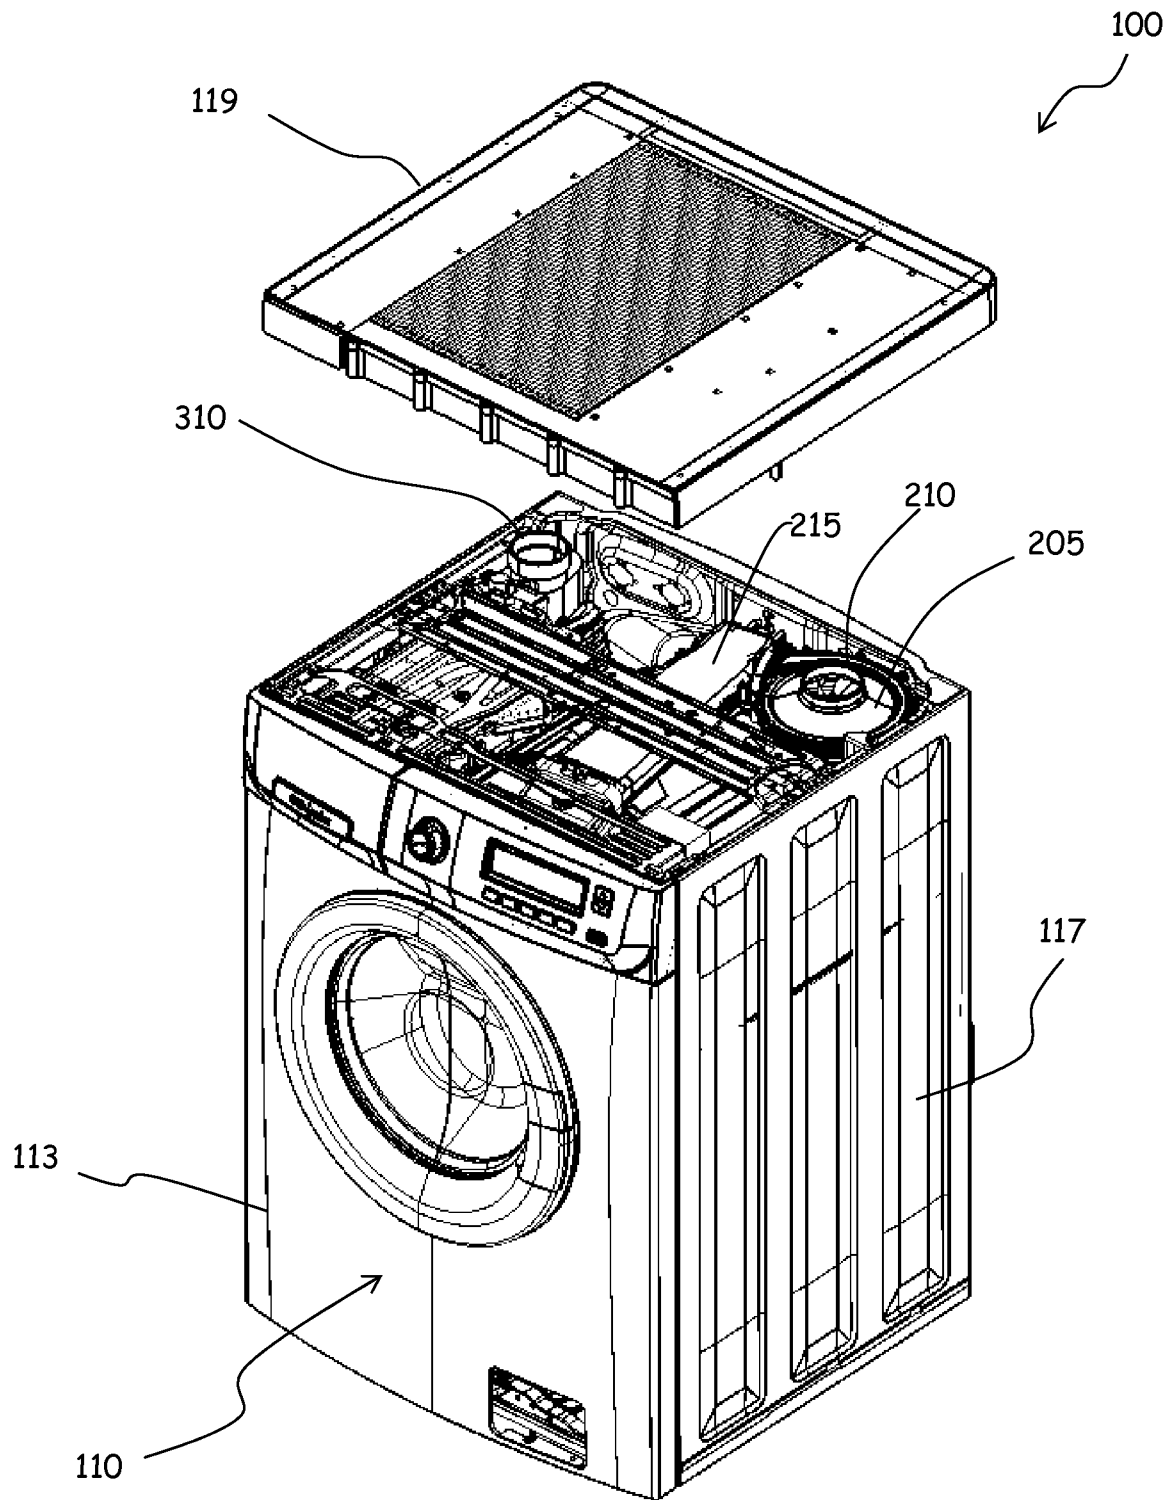FIG. 2

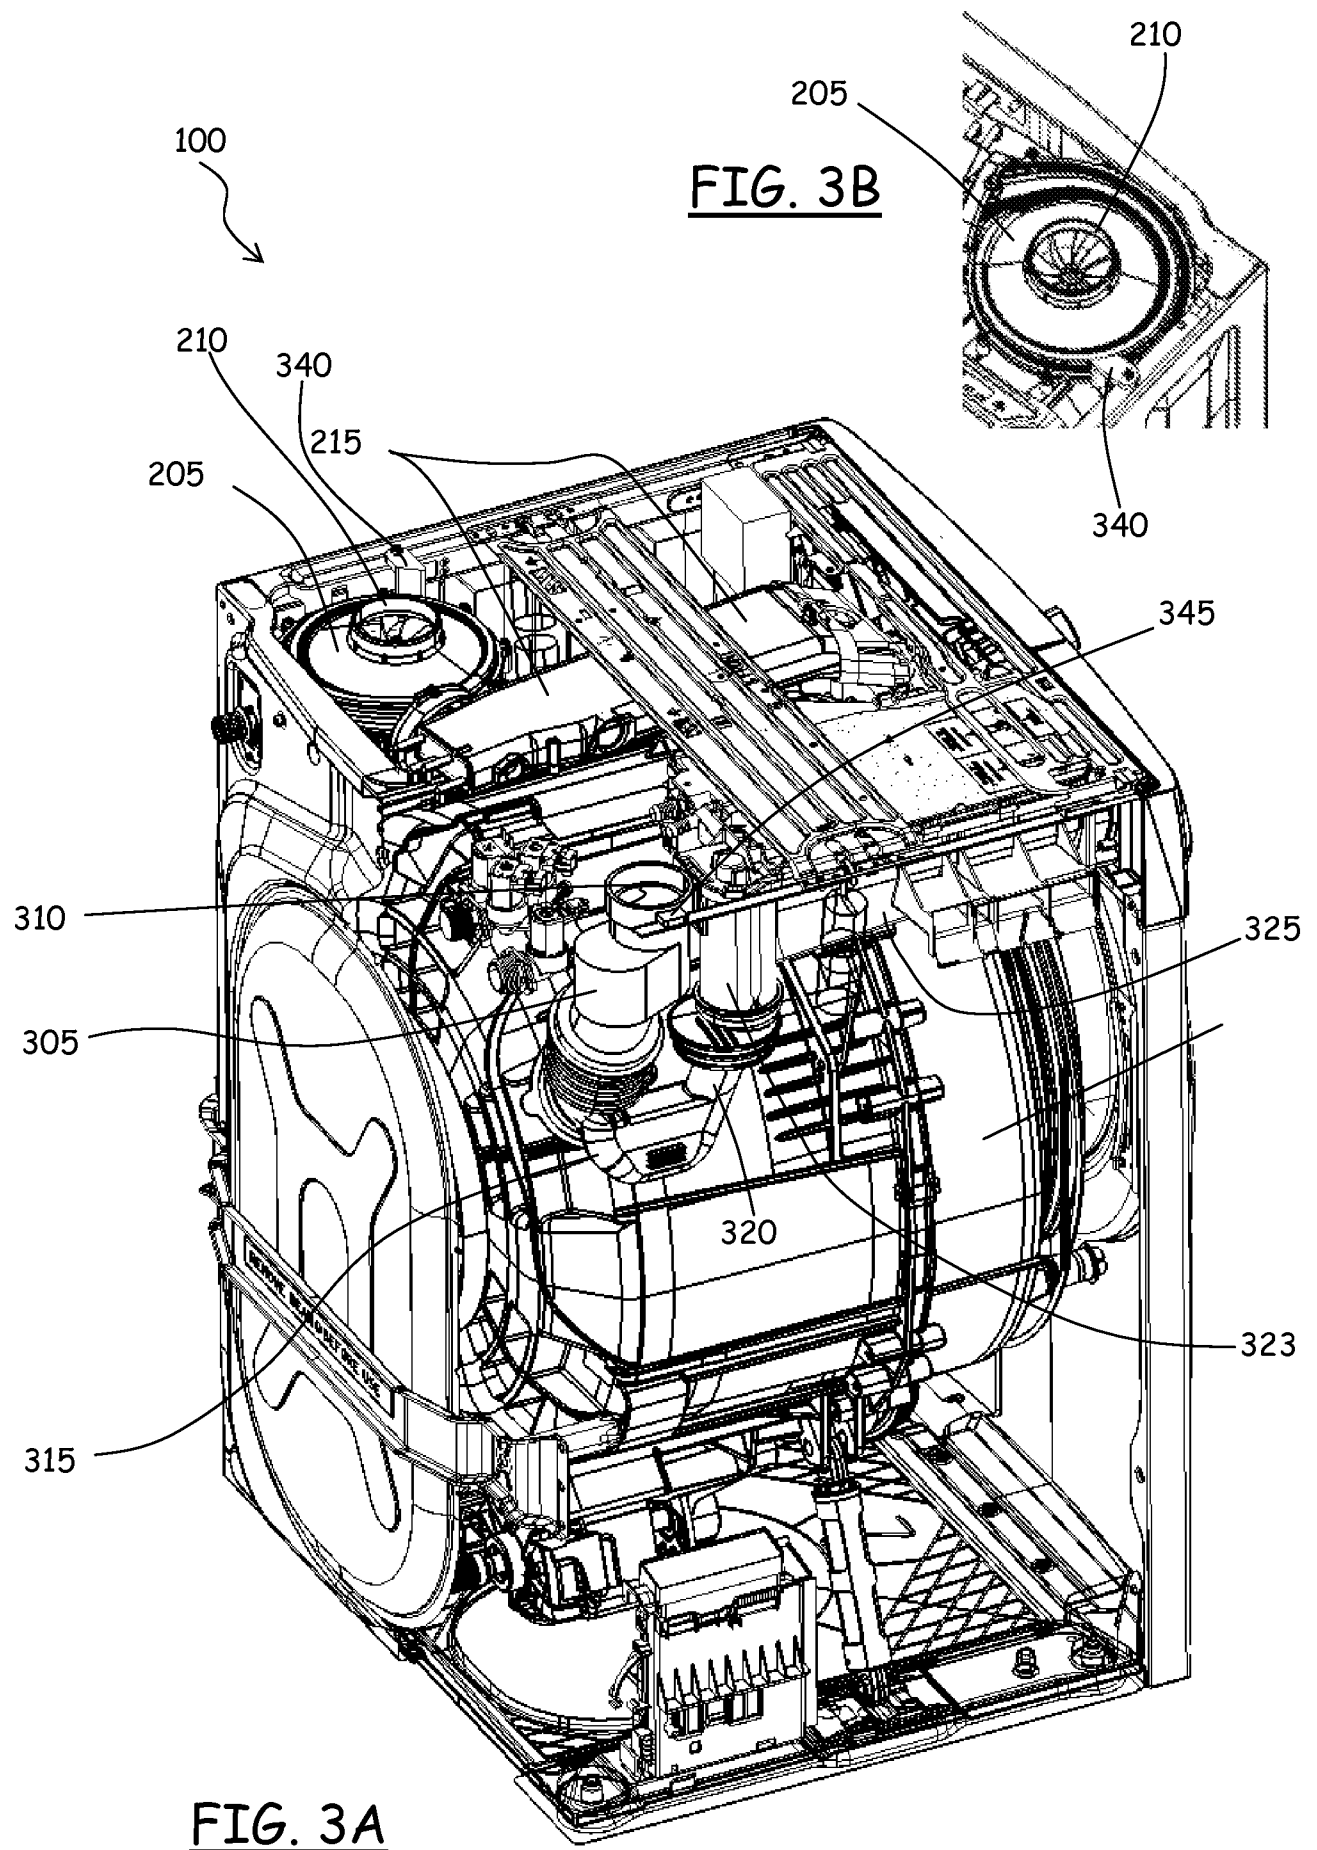

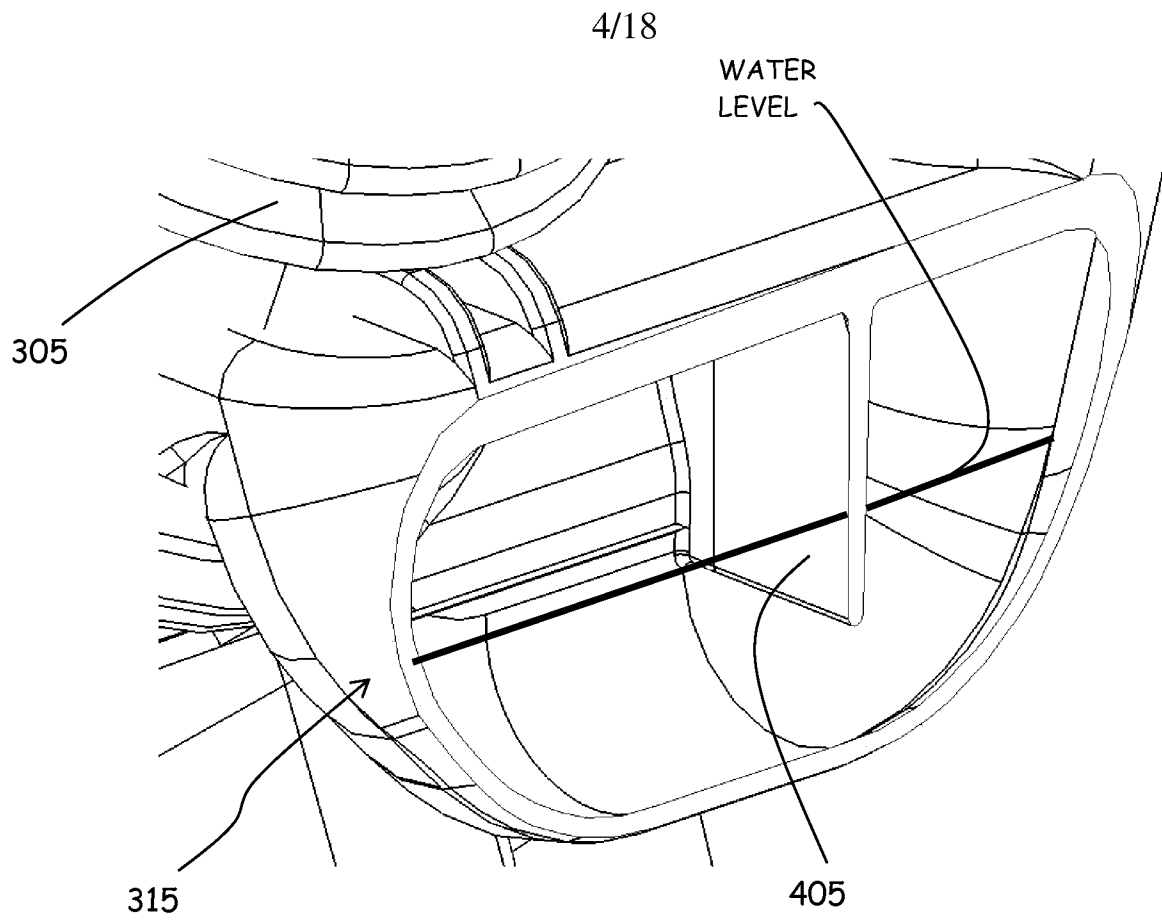


FIG. 4

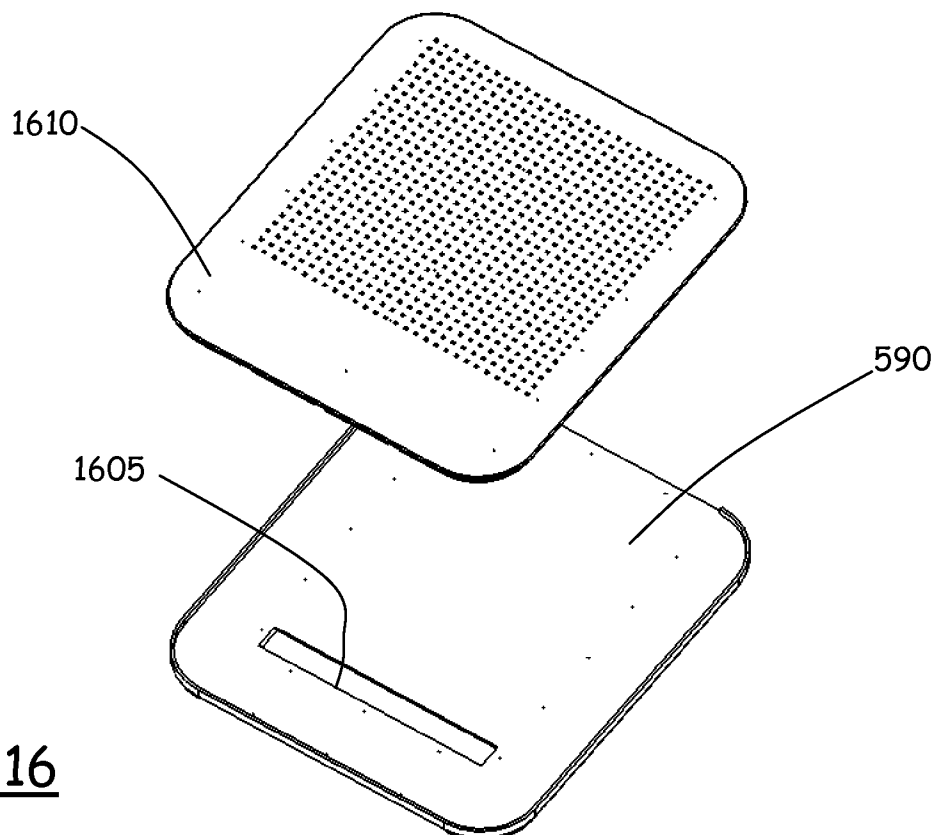


FIG. 16

5/18

FIG. 5A






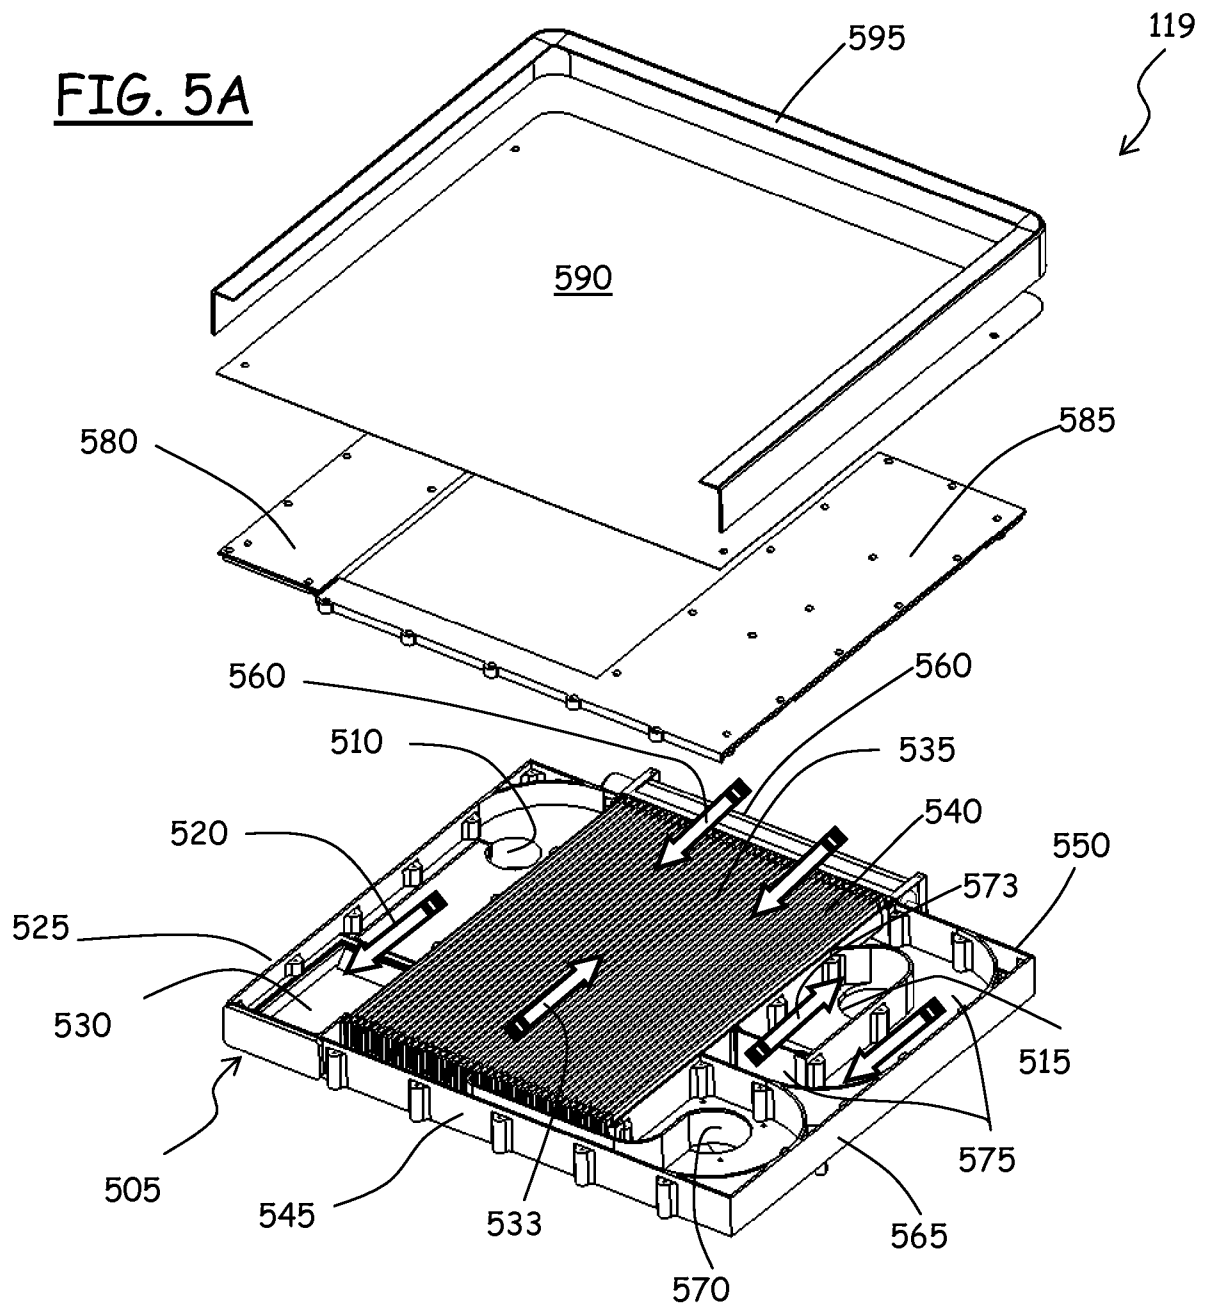




FIG. 6

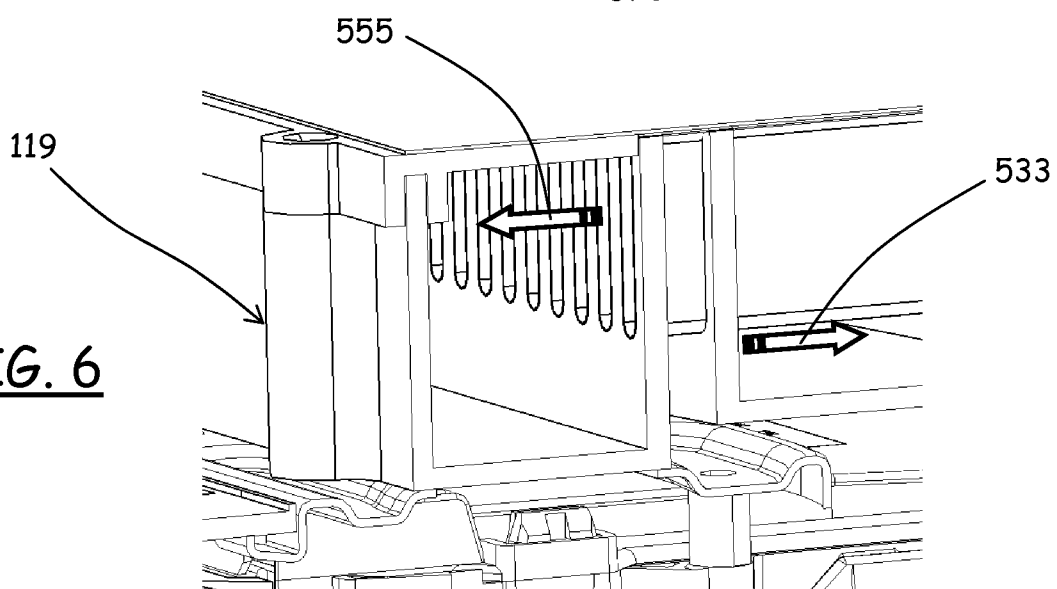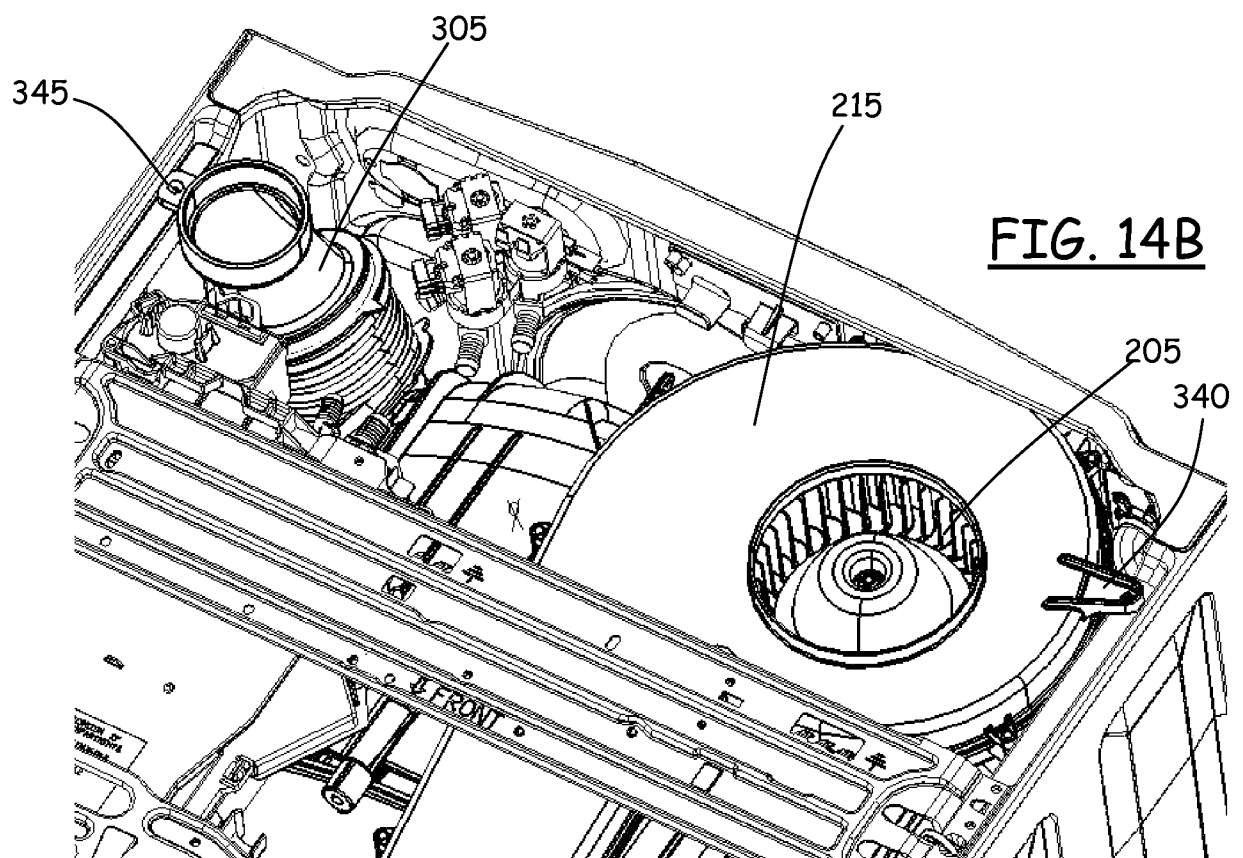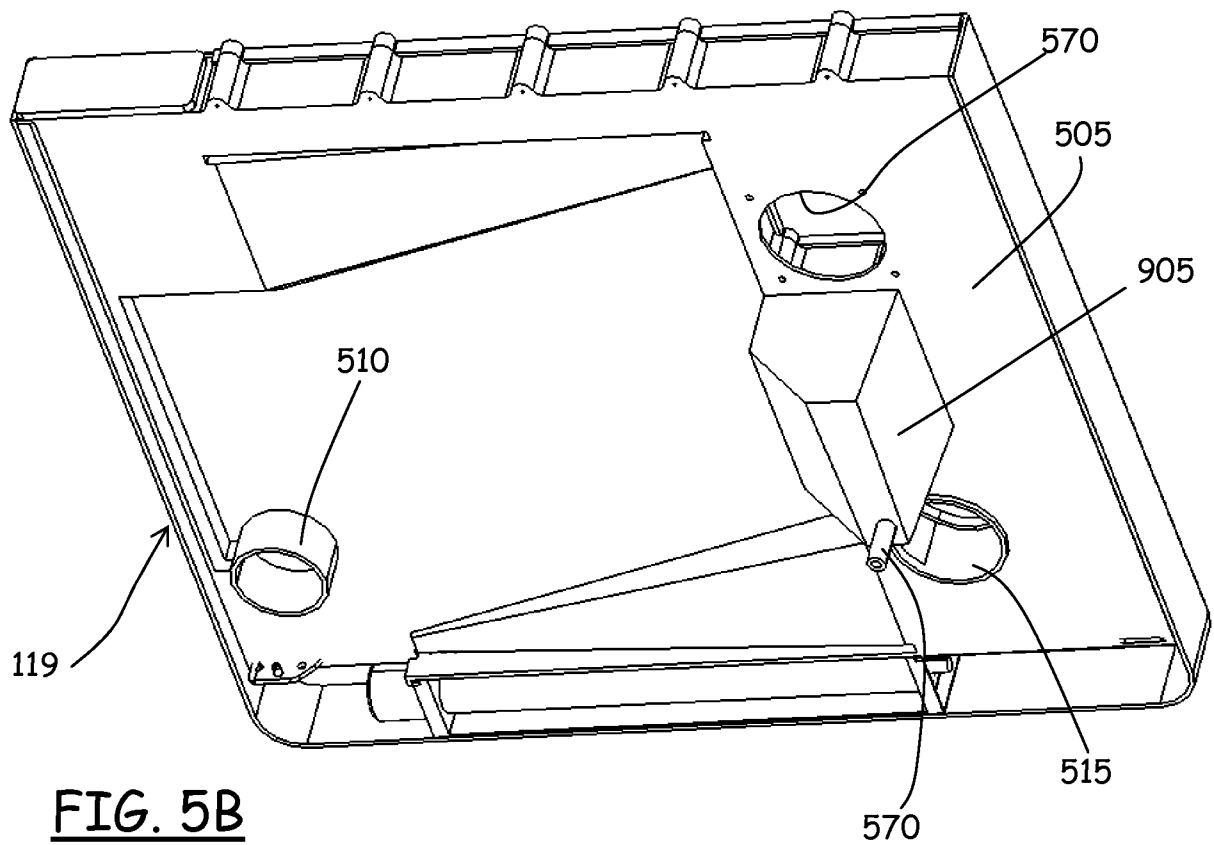

6/18

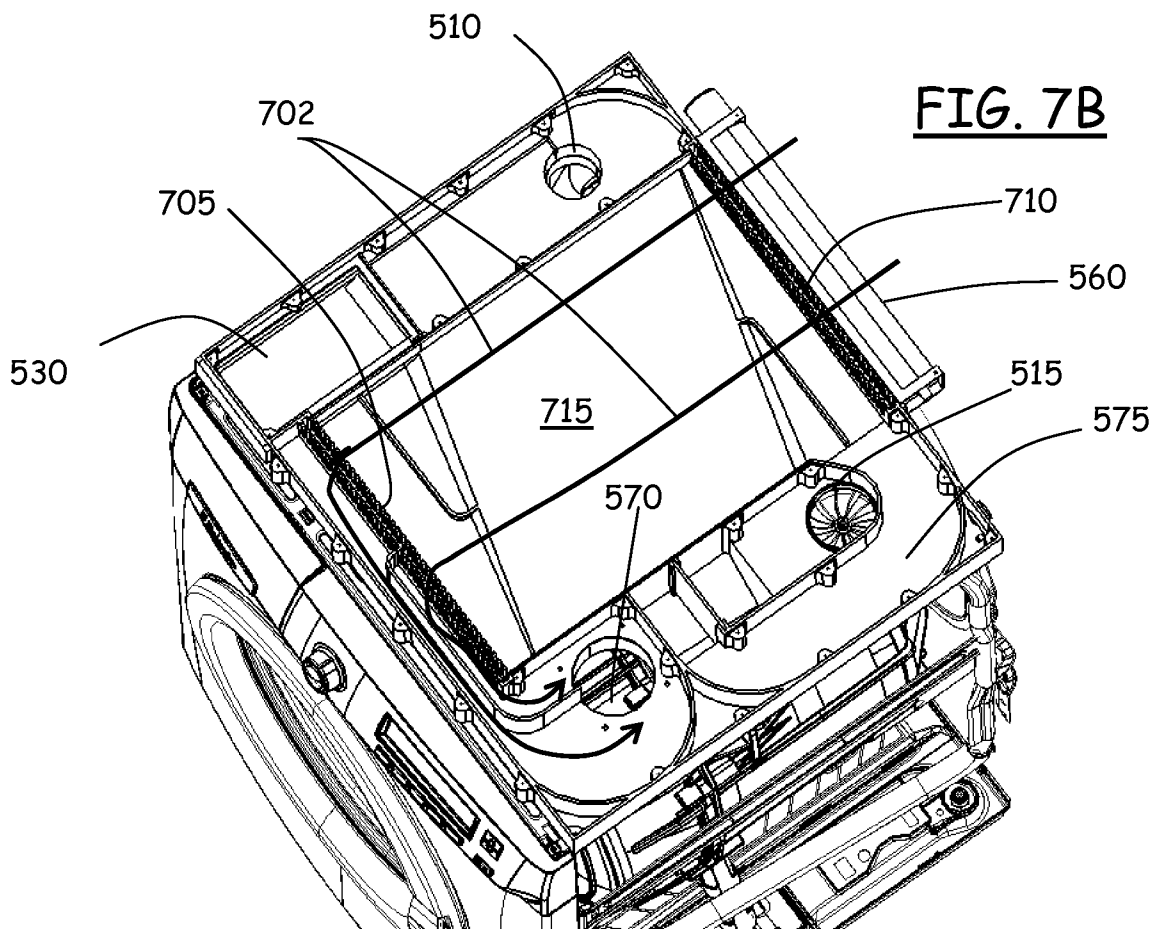

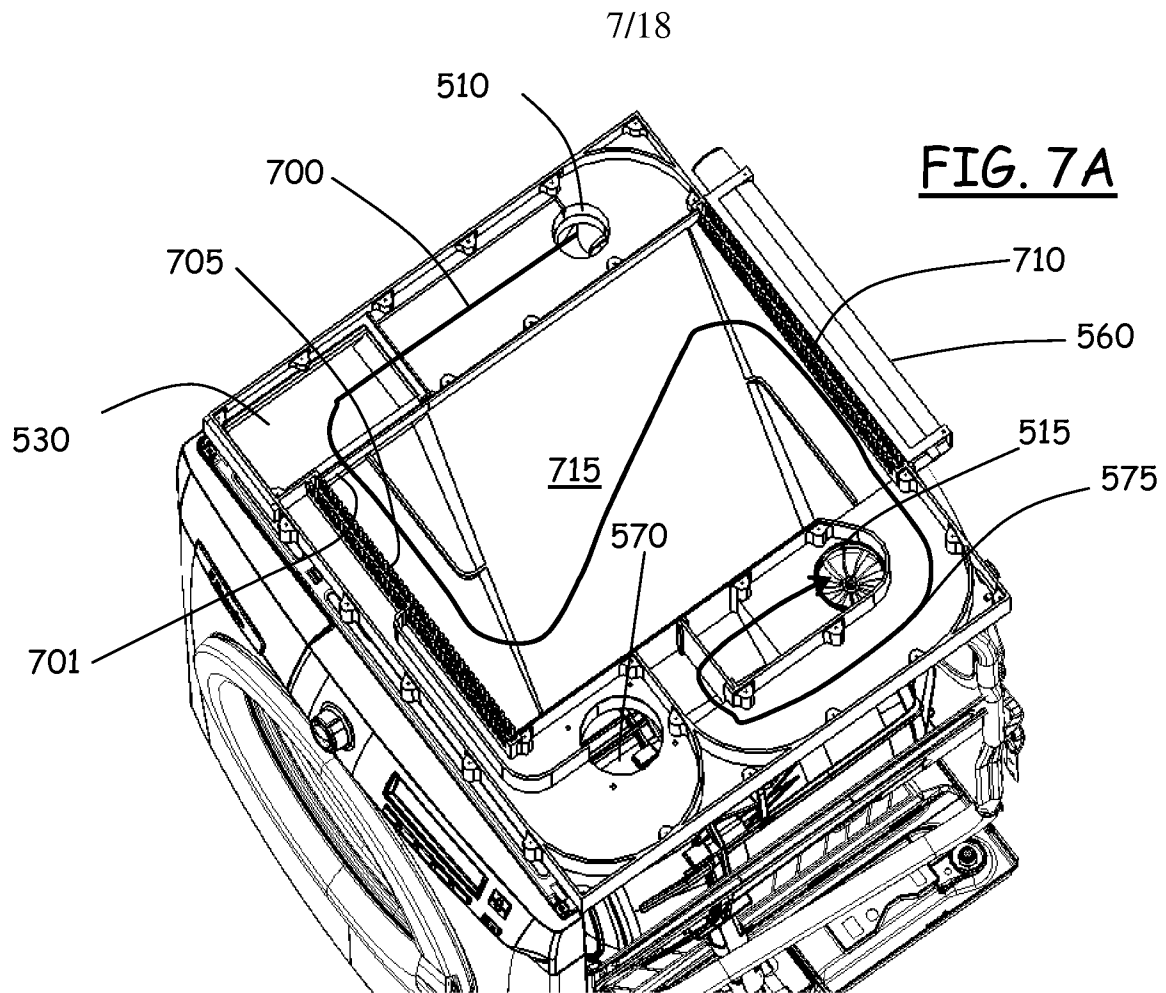

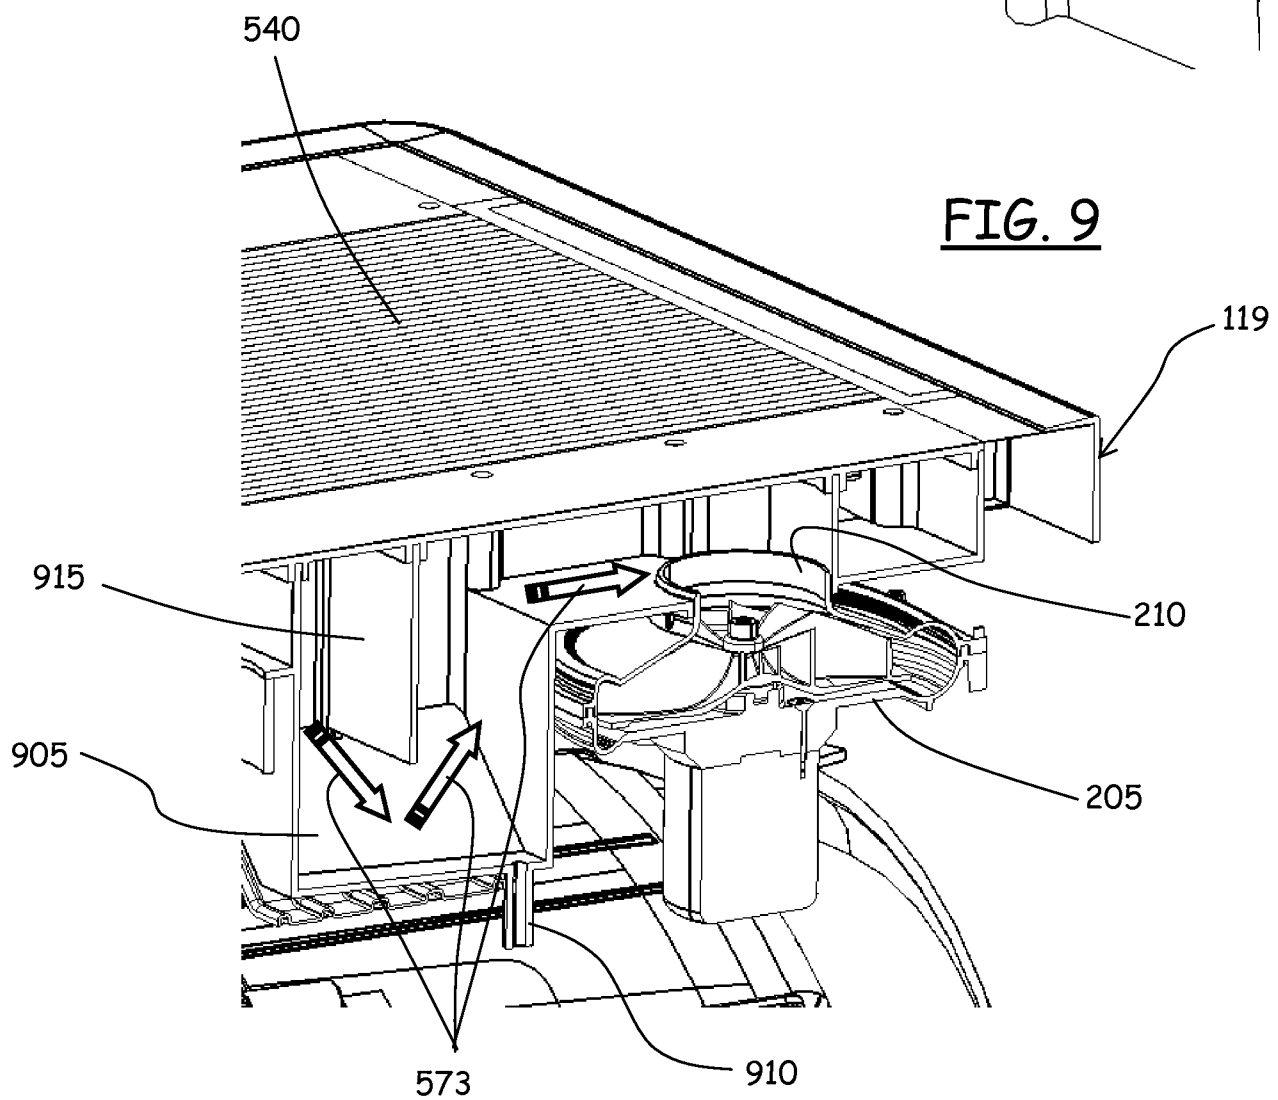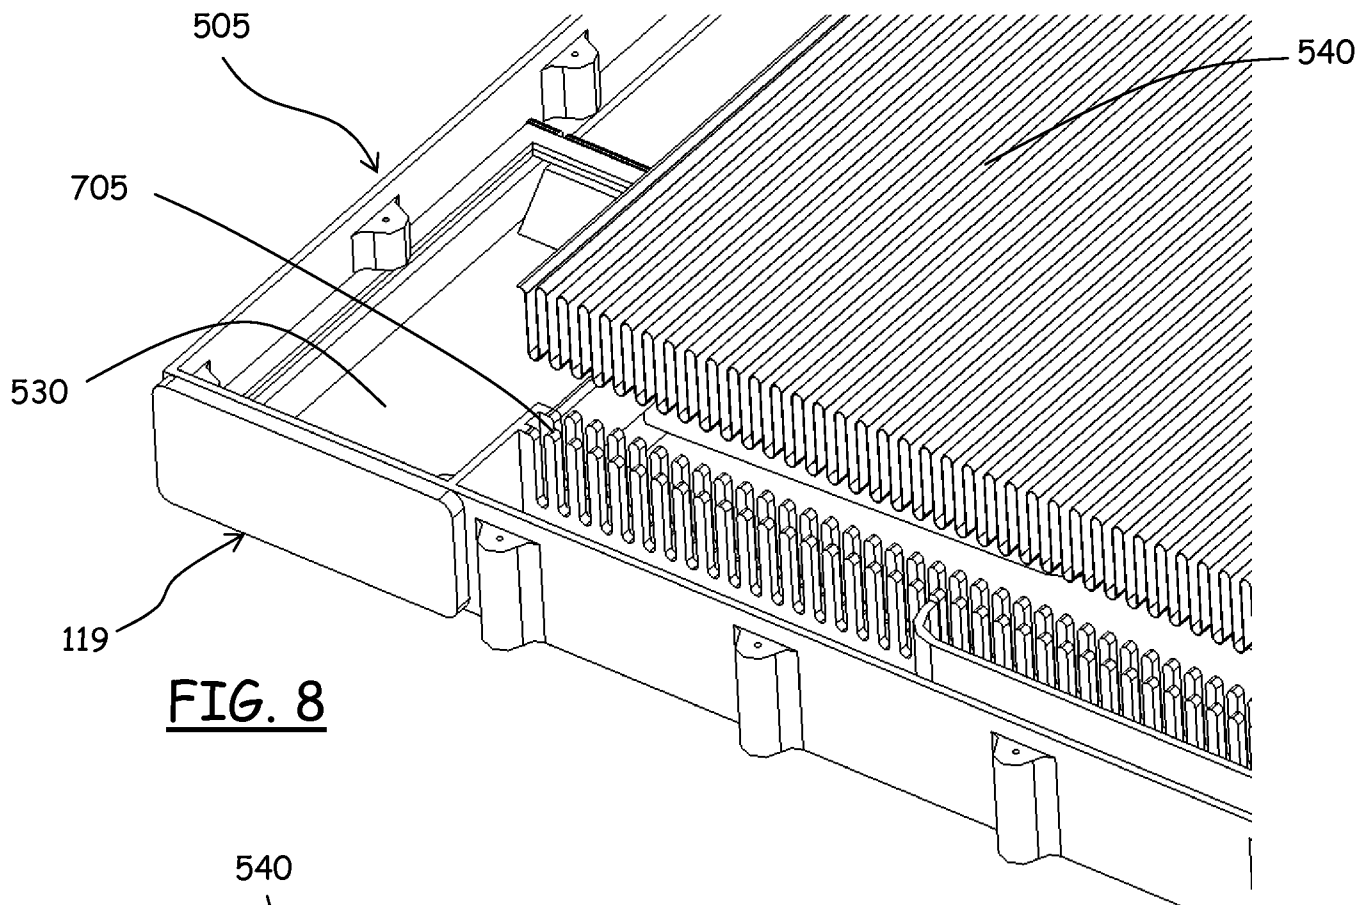

9/18

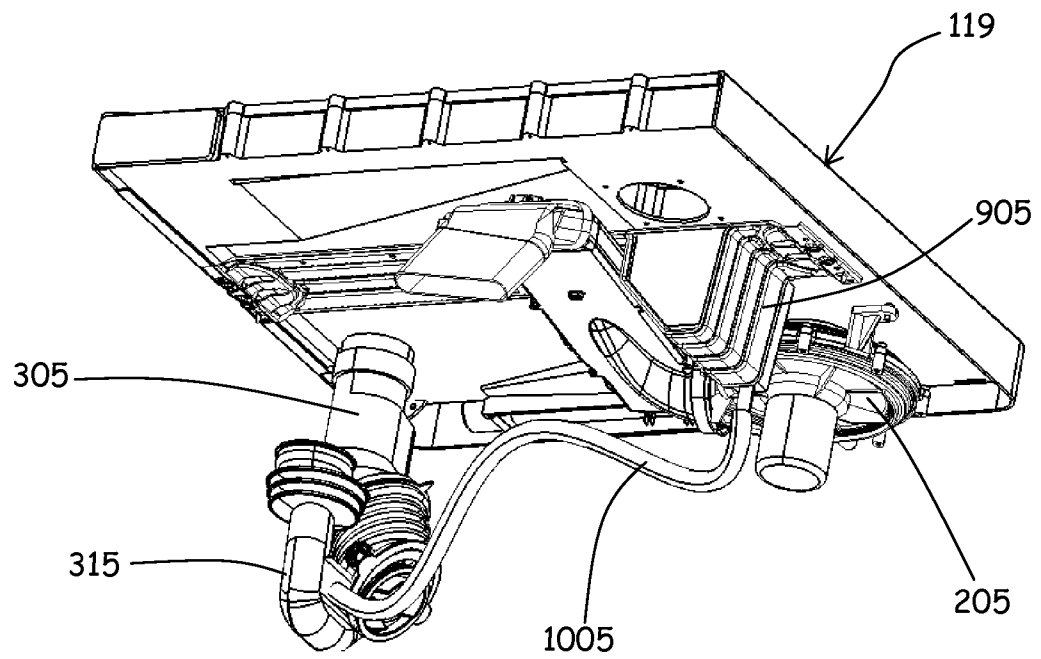


FIG. 10

FIG. 12




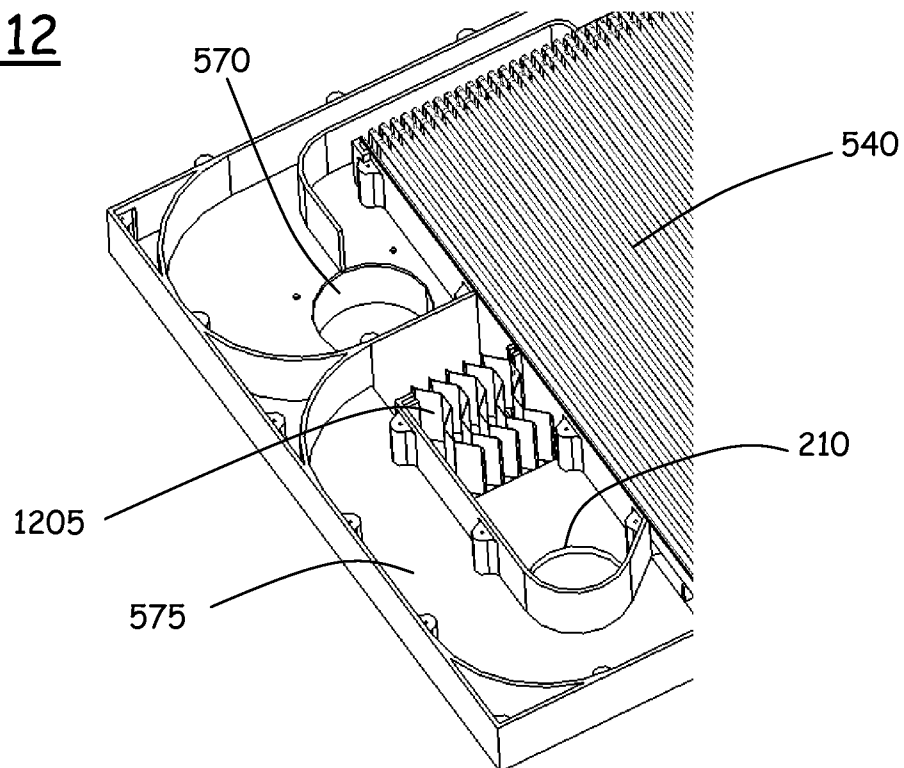


FIG. 11

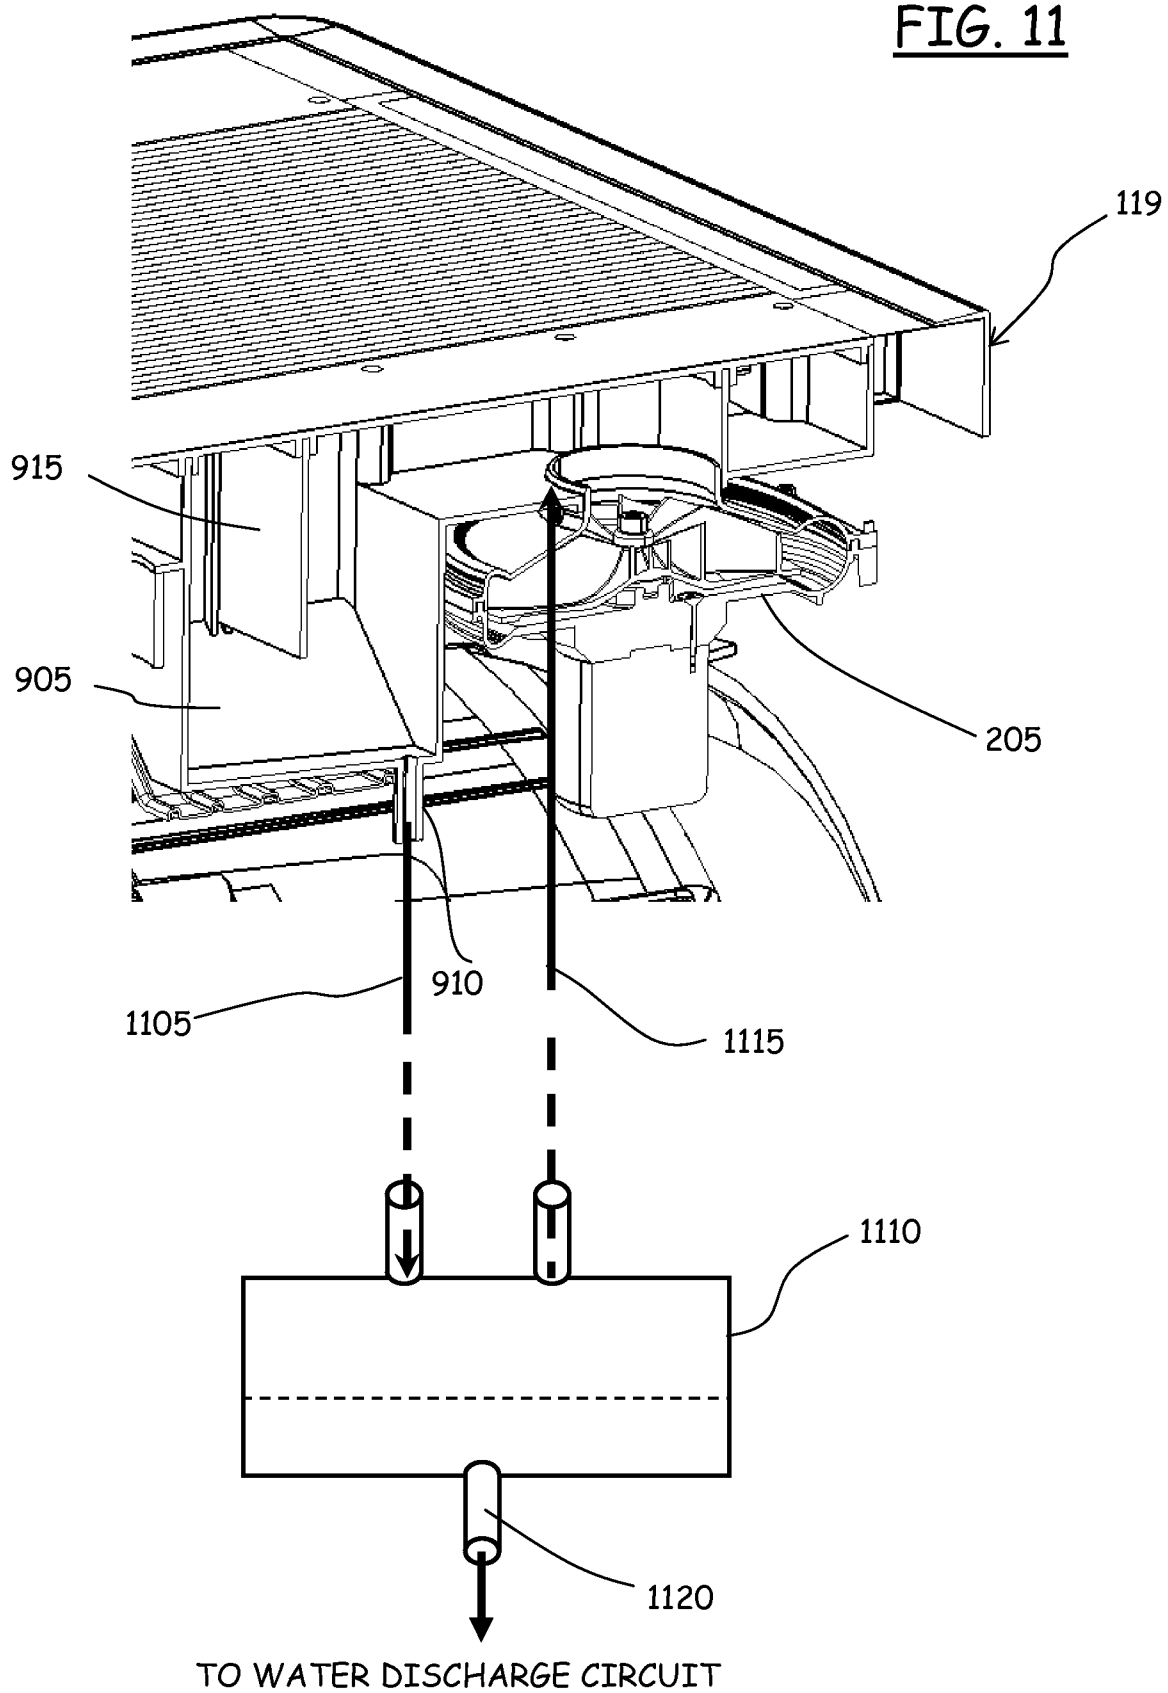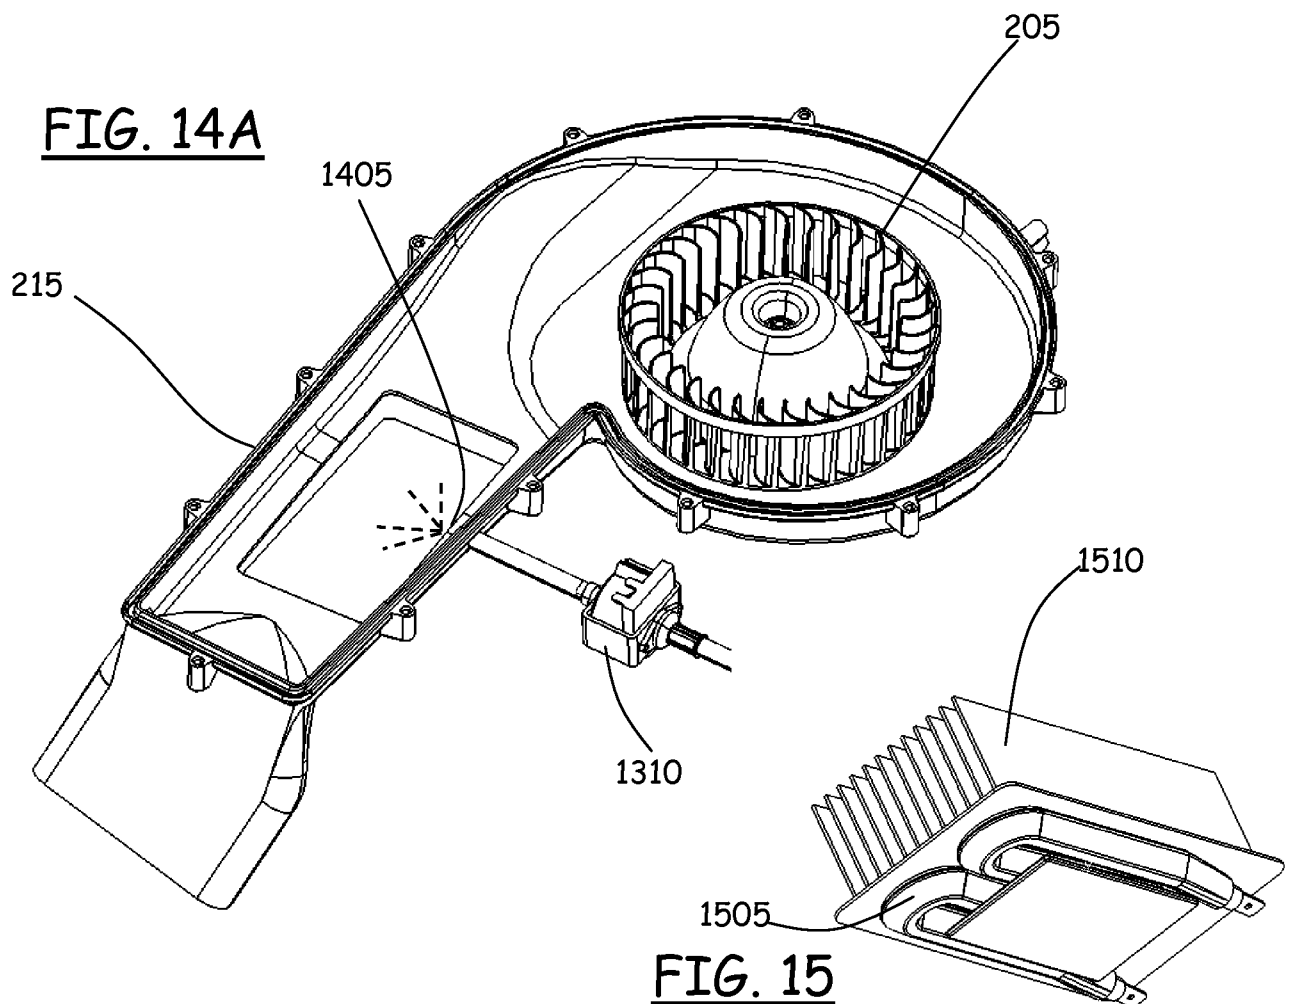

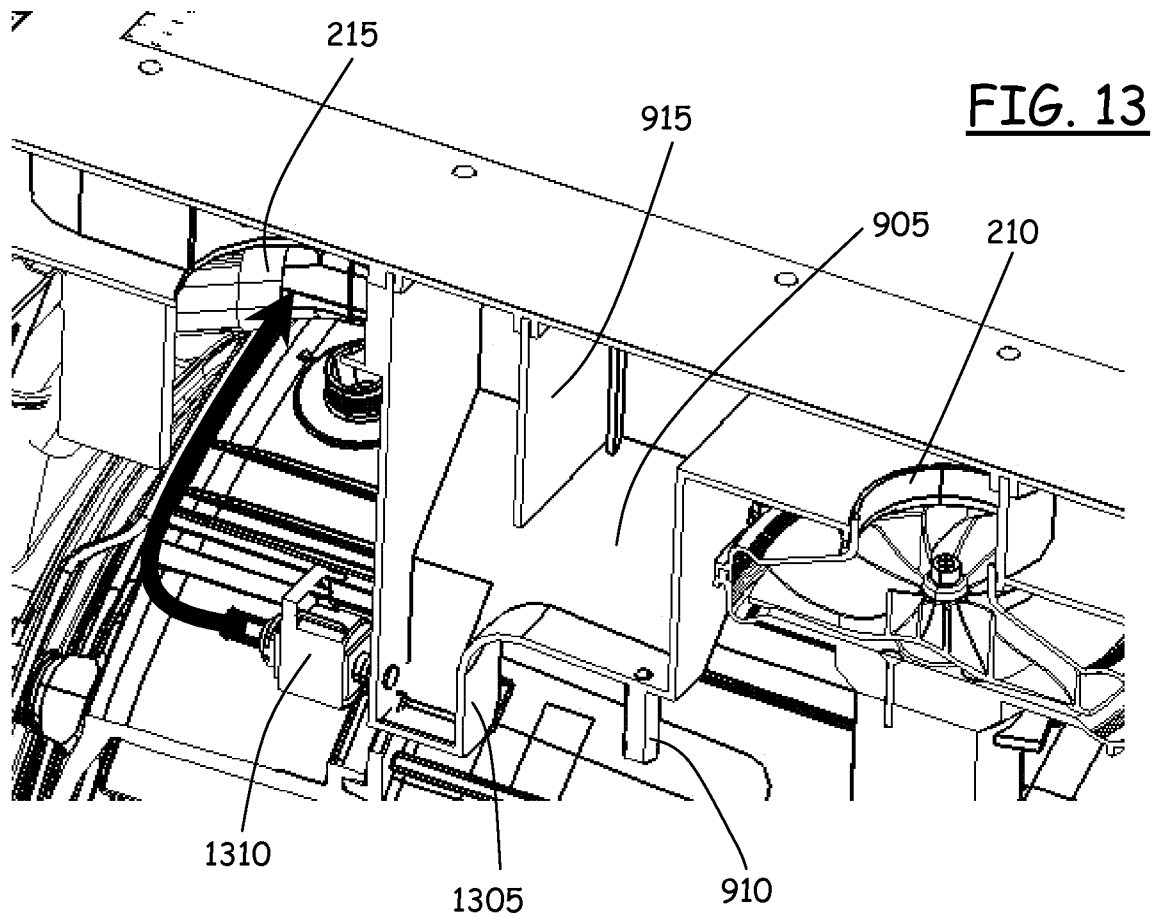

12/18

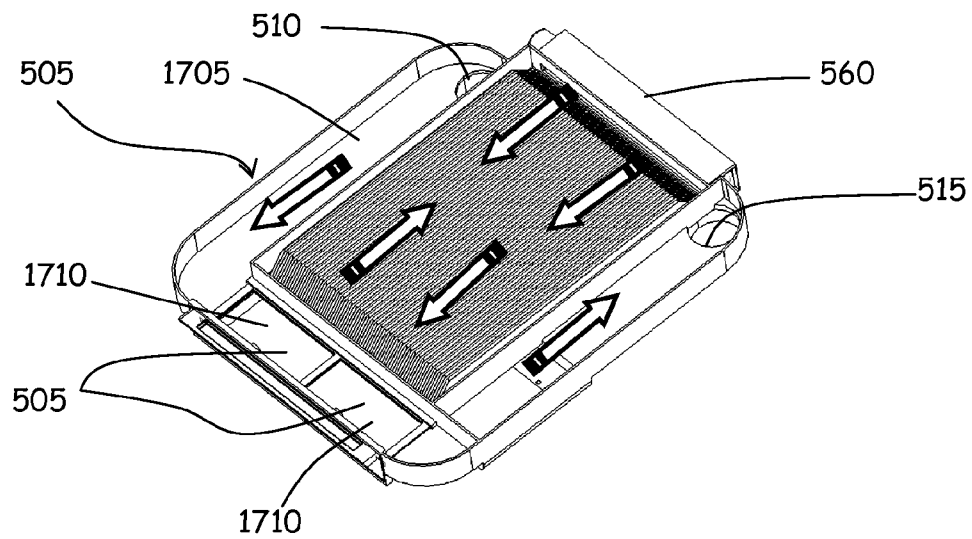


FIG. 17

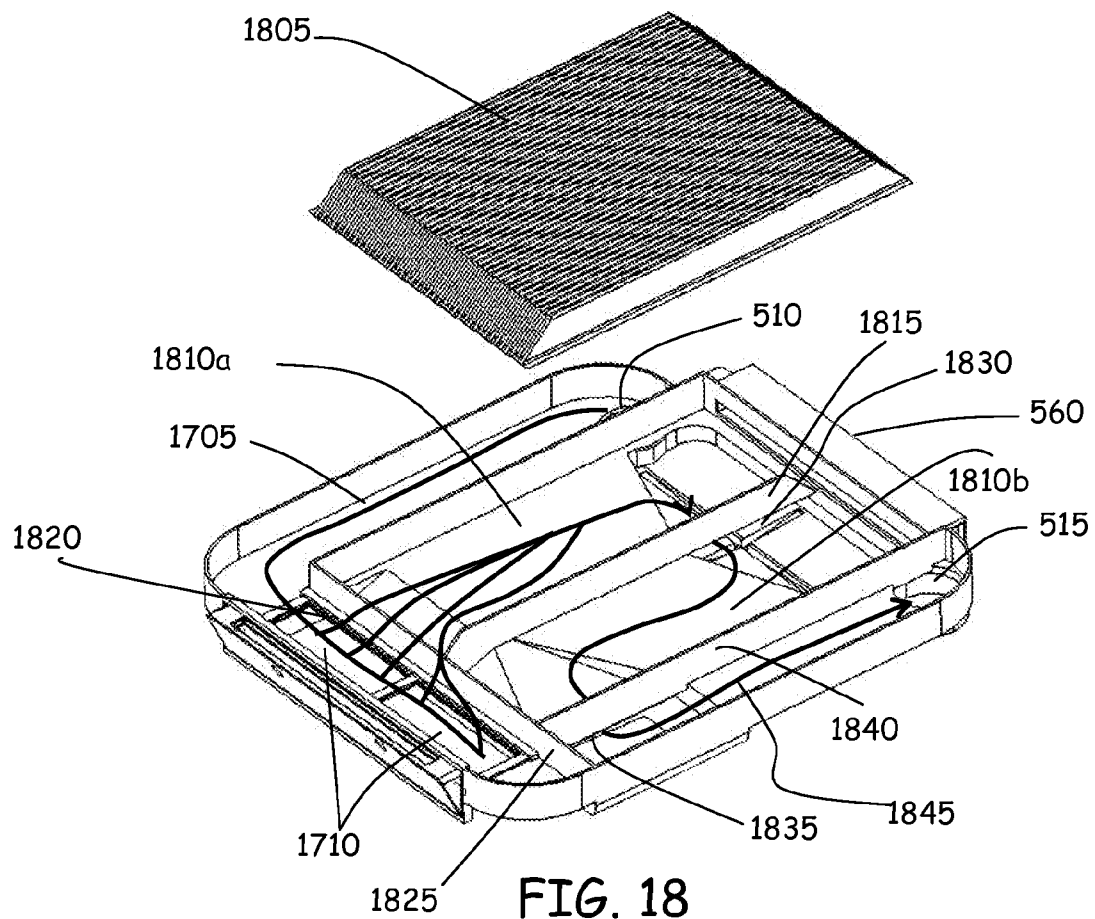


FIG. 18

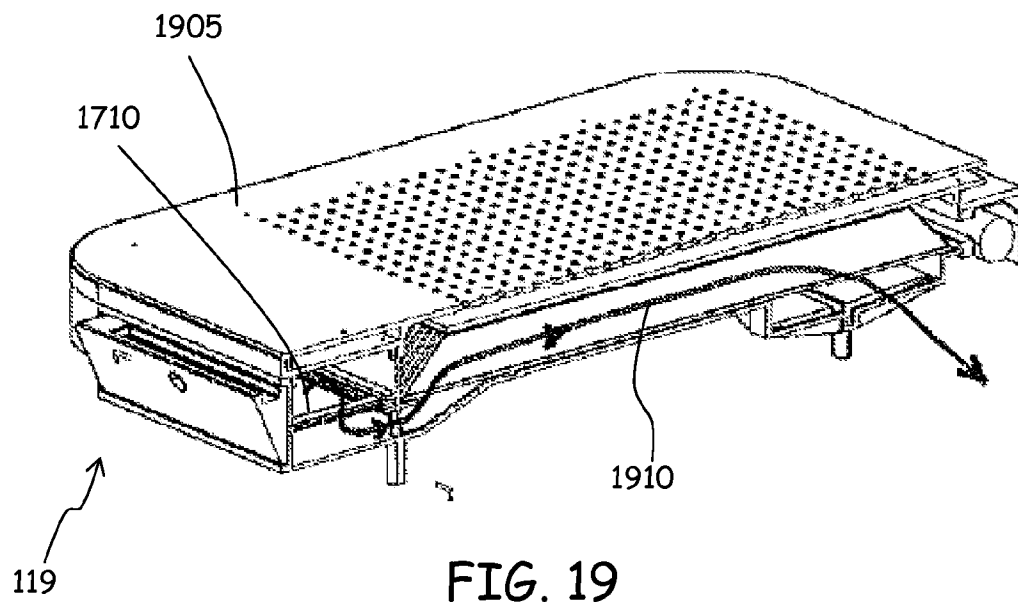


FIG. 19

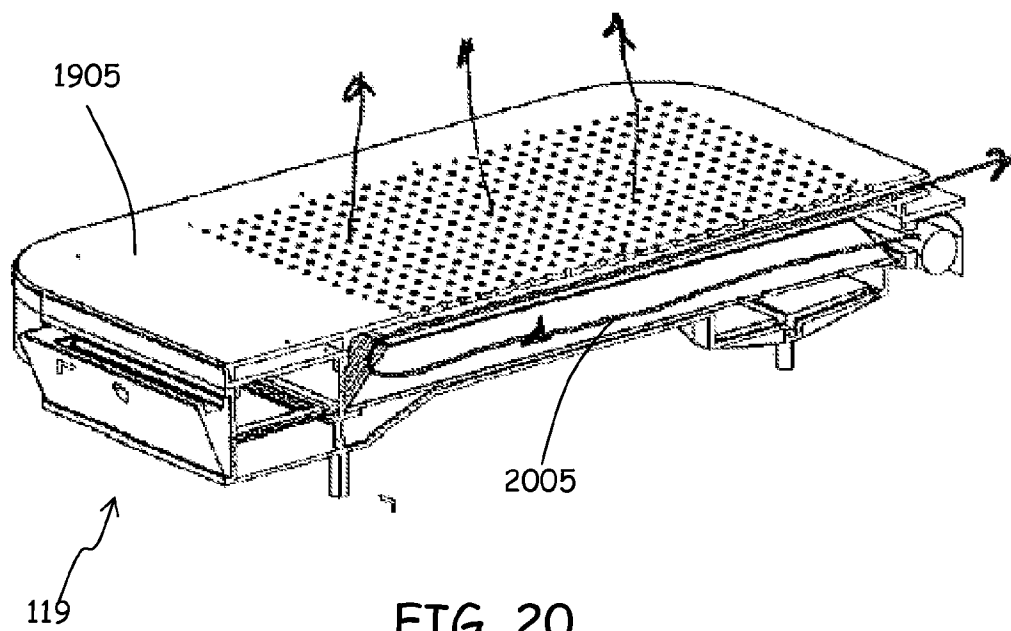


FIG. 20

14/18

FIG. 21

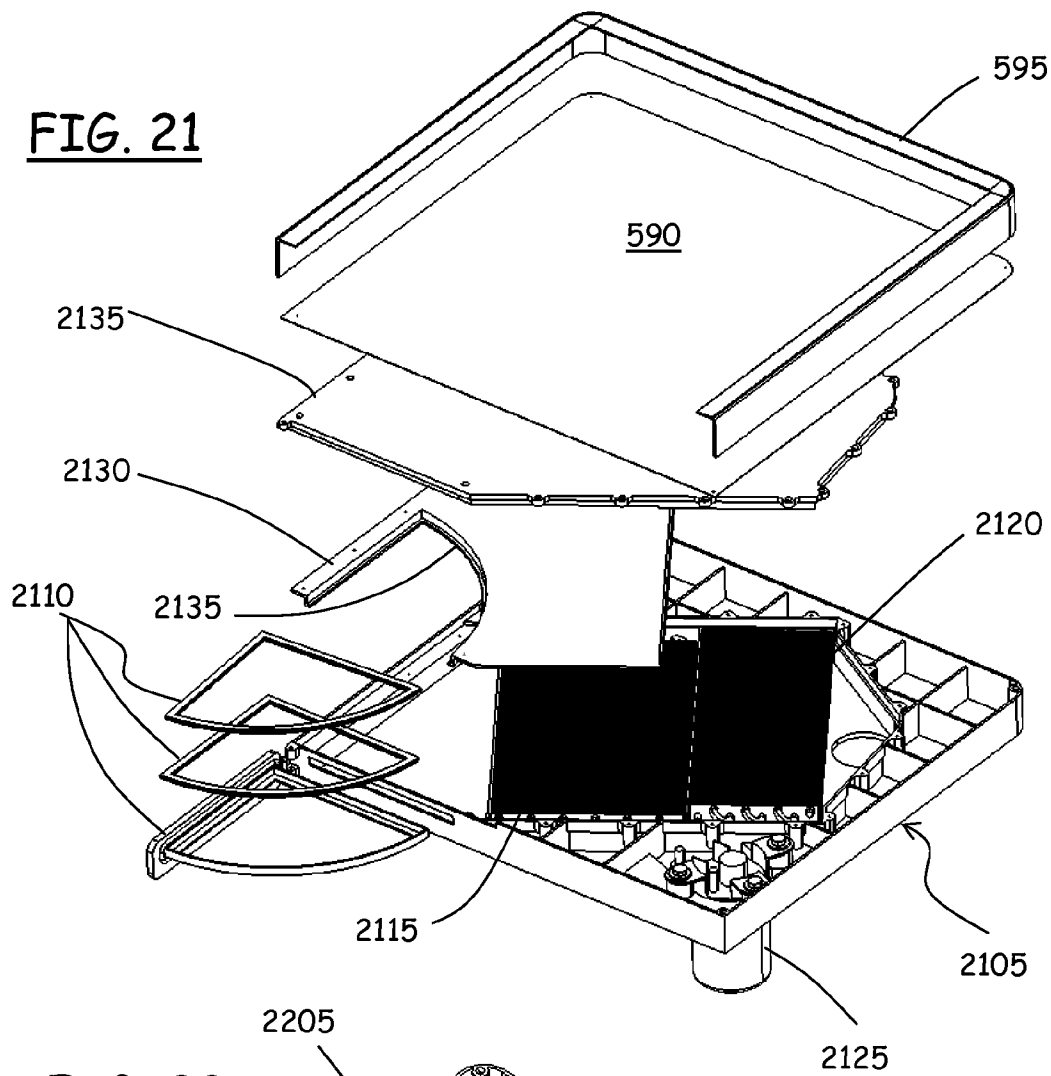
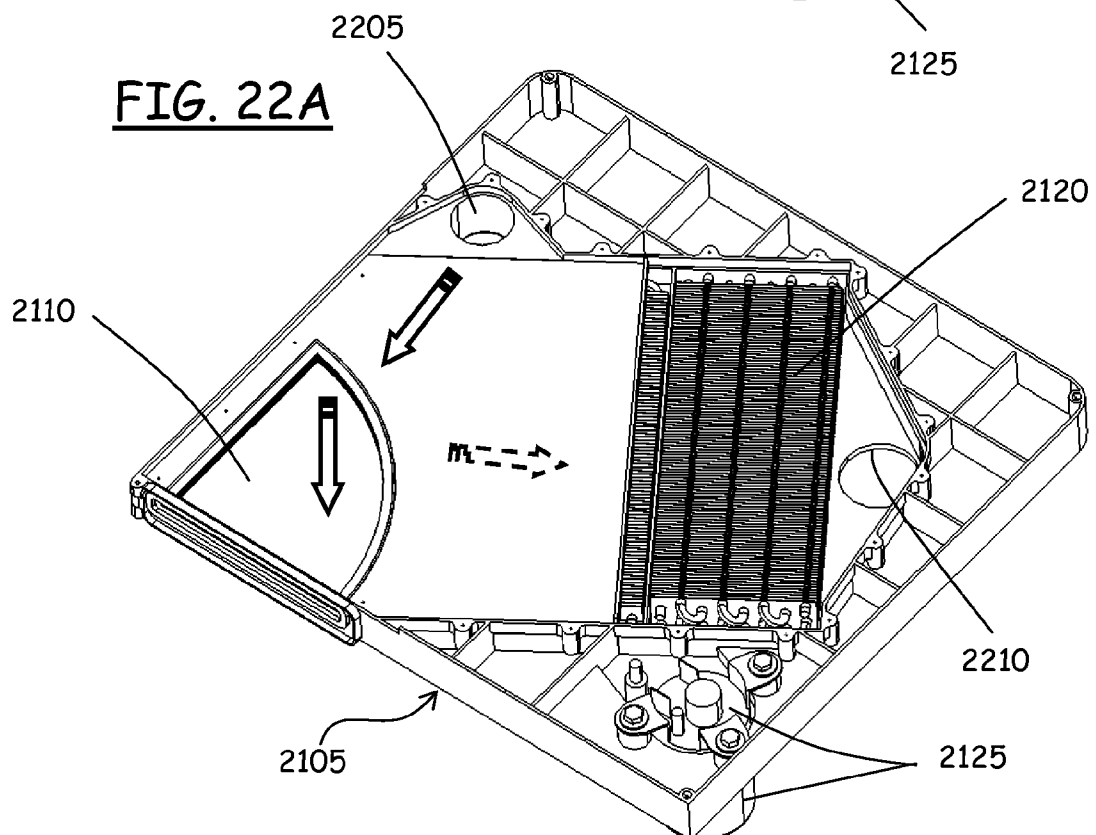


FIG. 22A



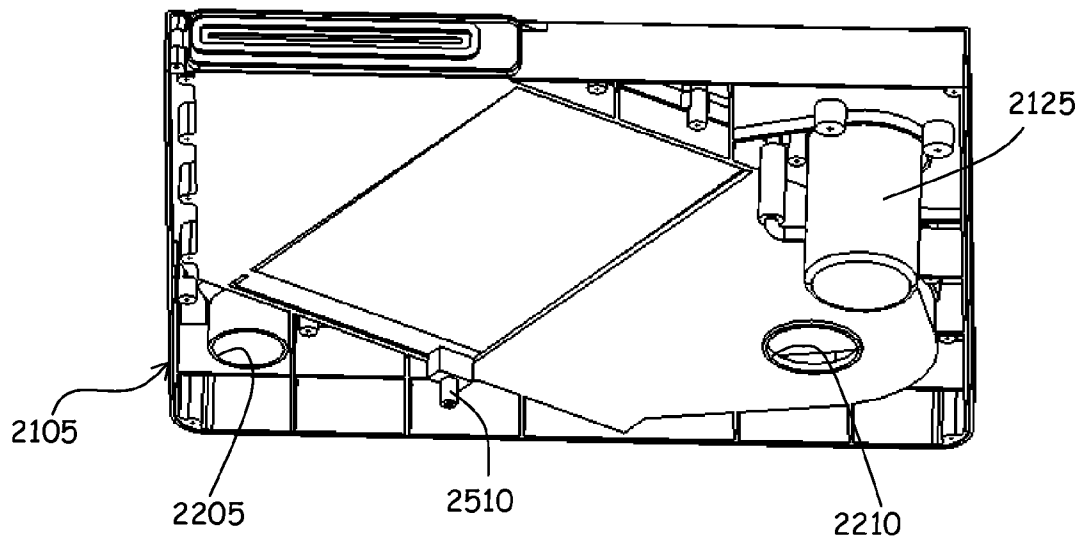


FIG. 22B

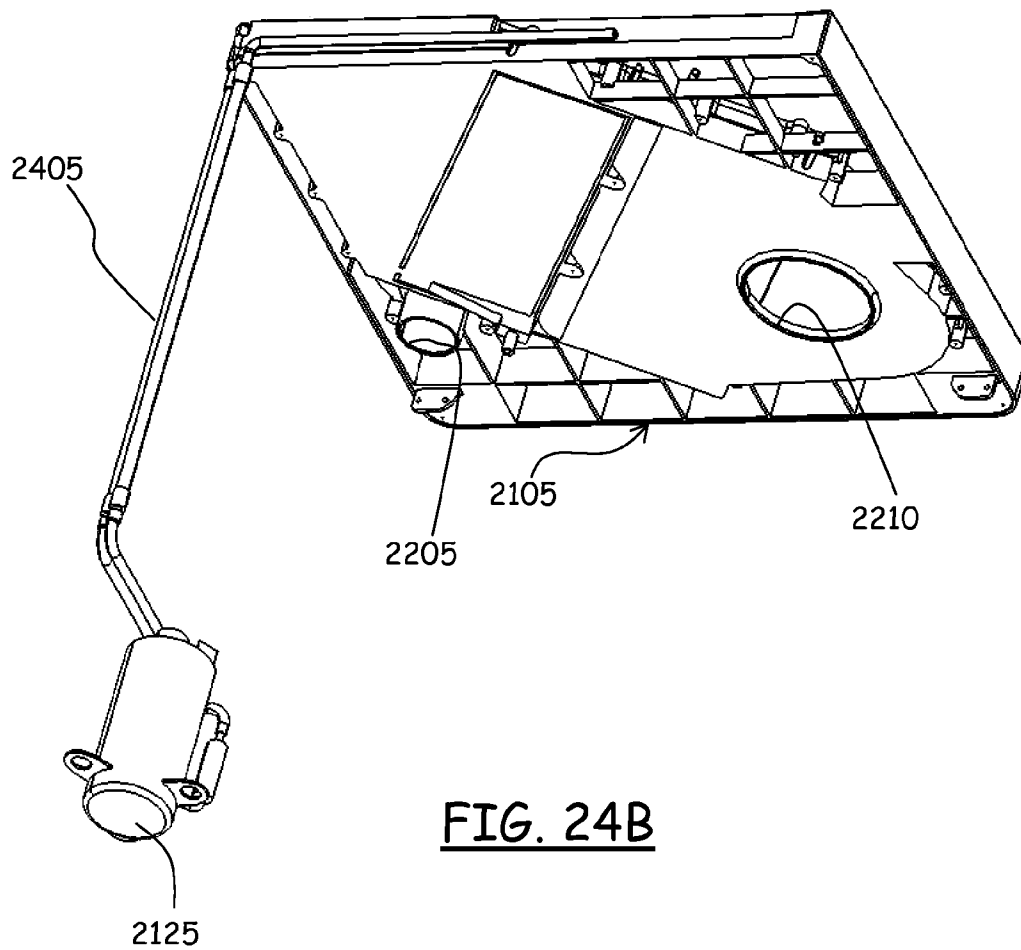


FIG. 24B

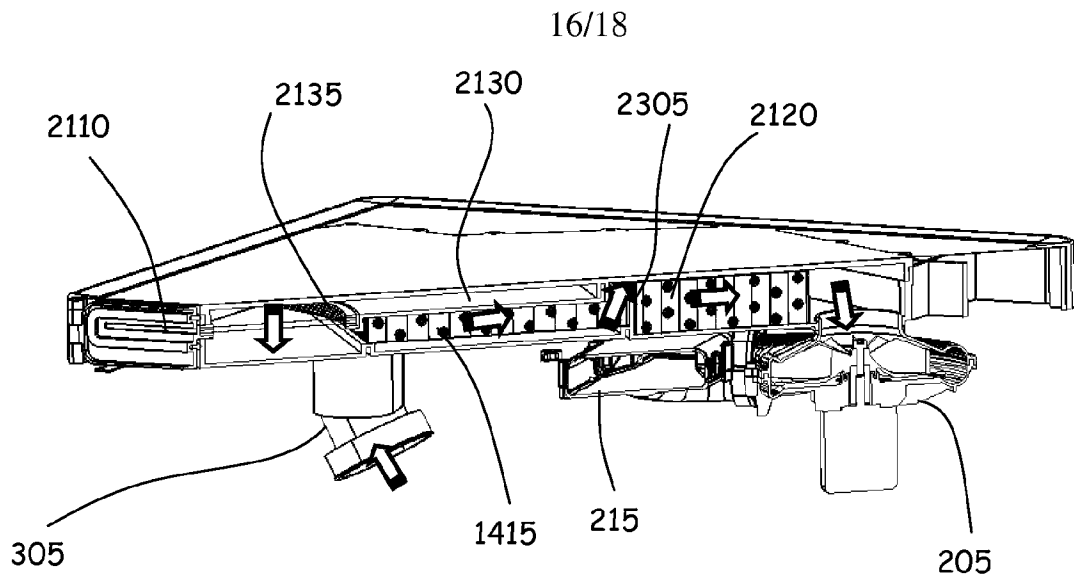


FIG. 23

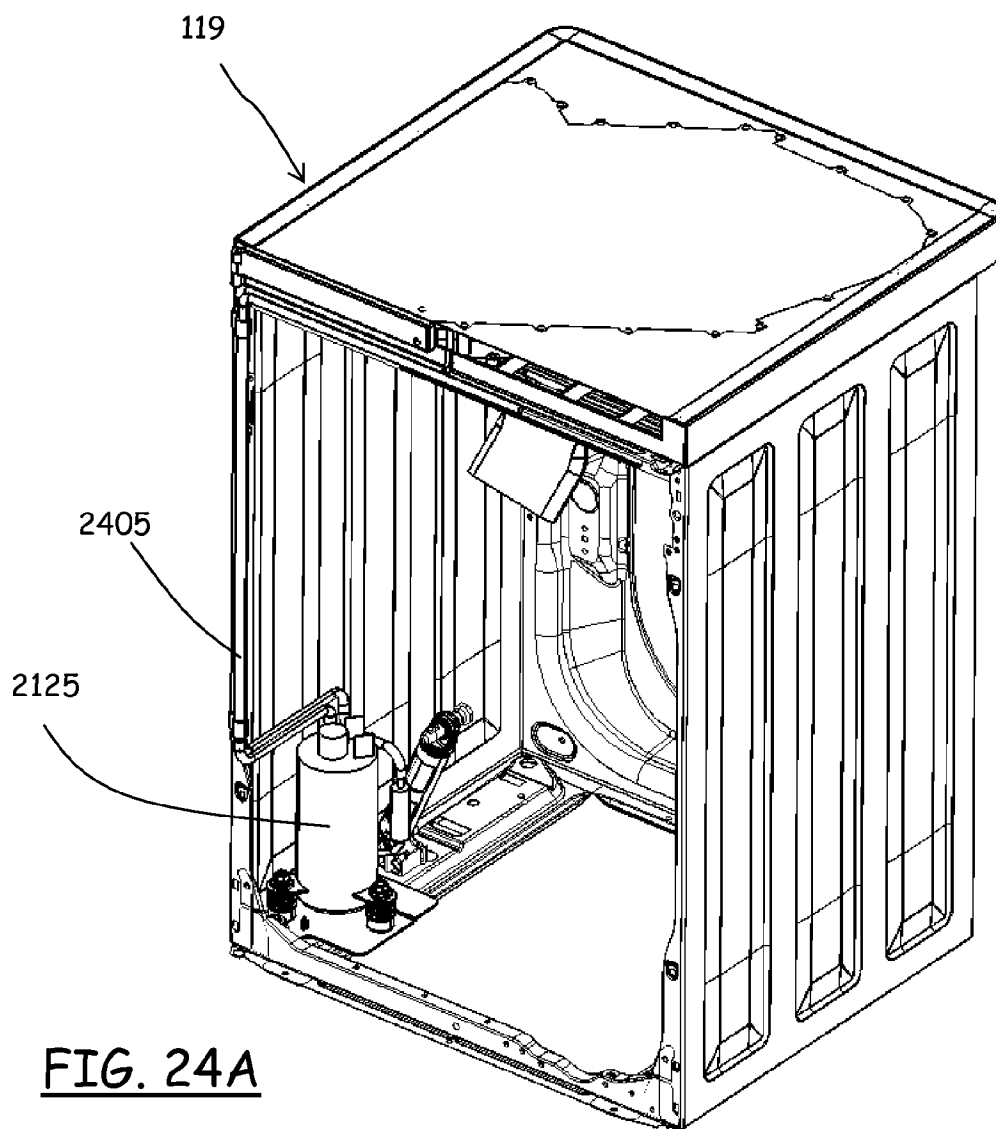


FIG. 24A

17/18

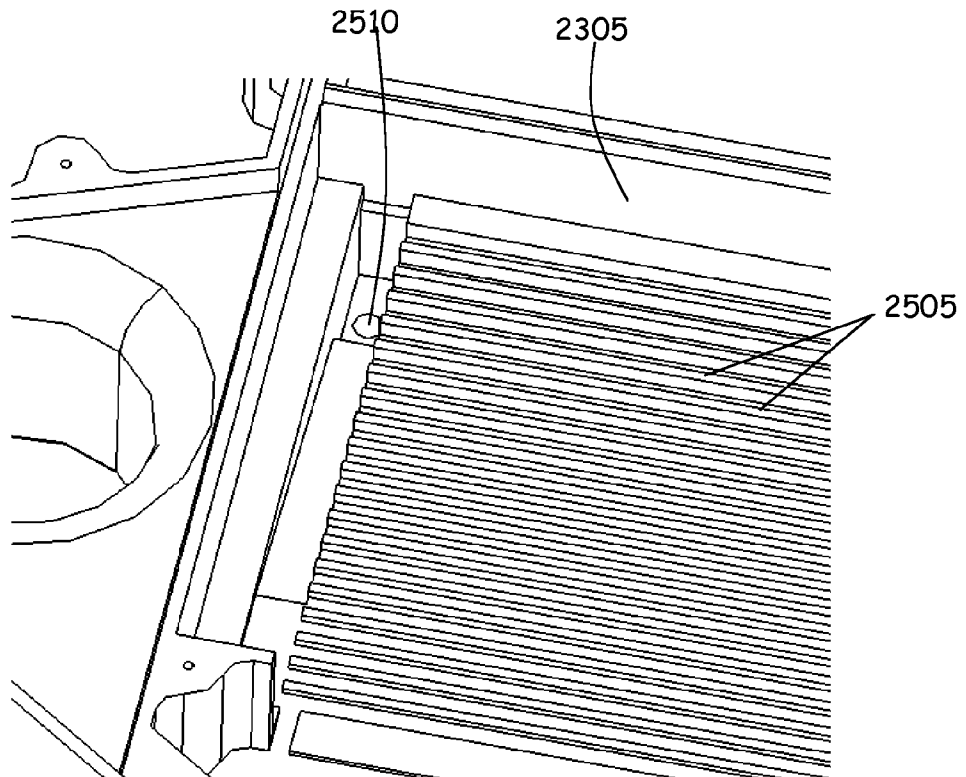


FIG. 25

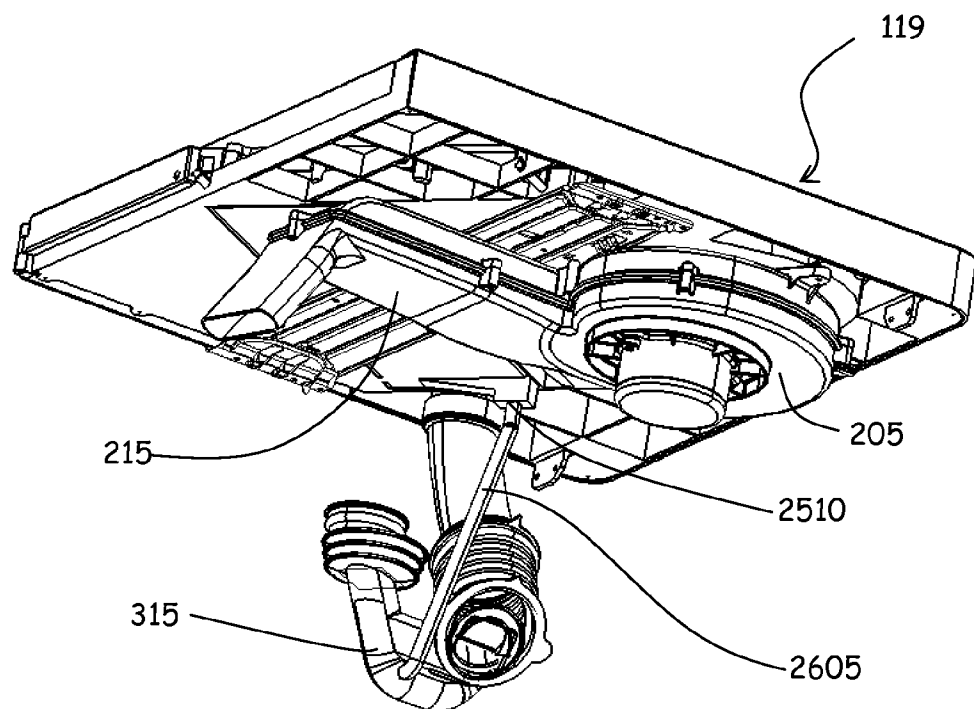


FIG. 26

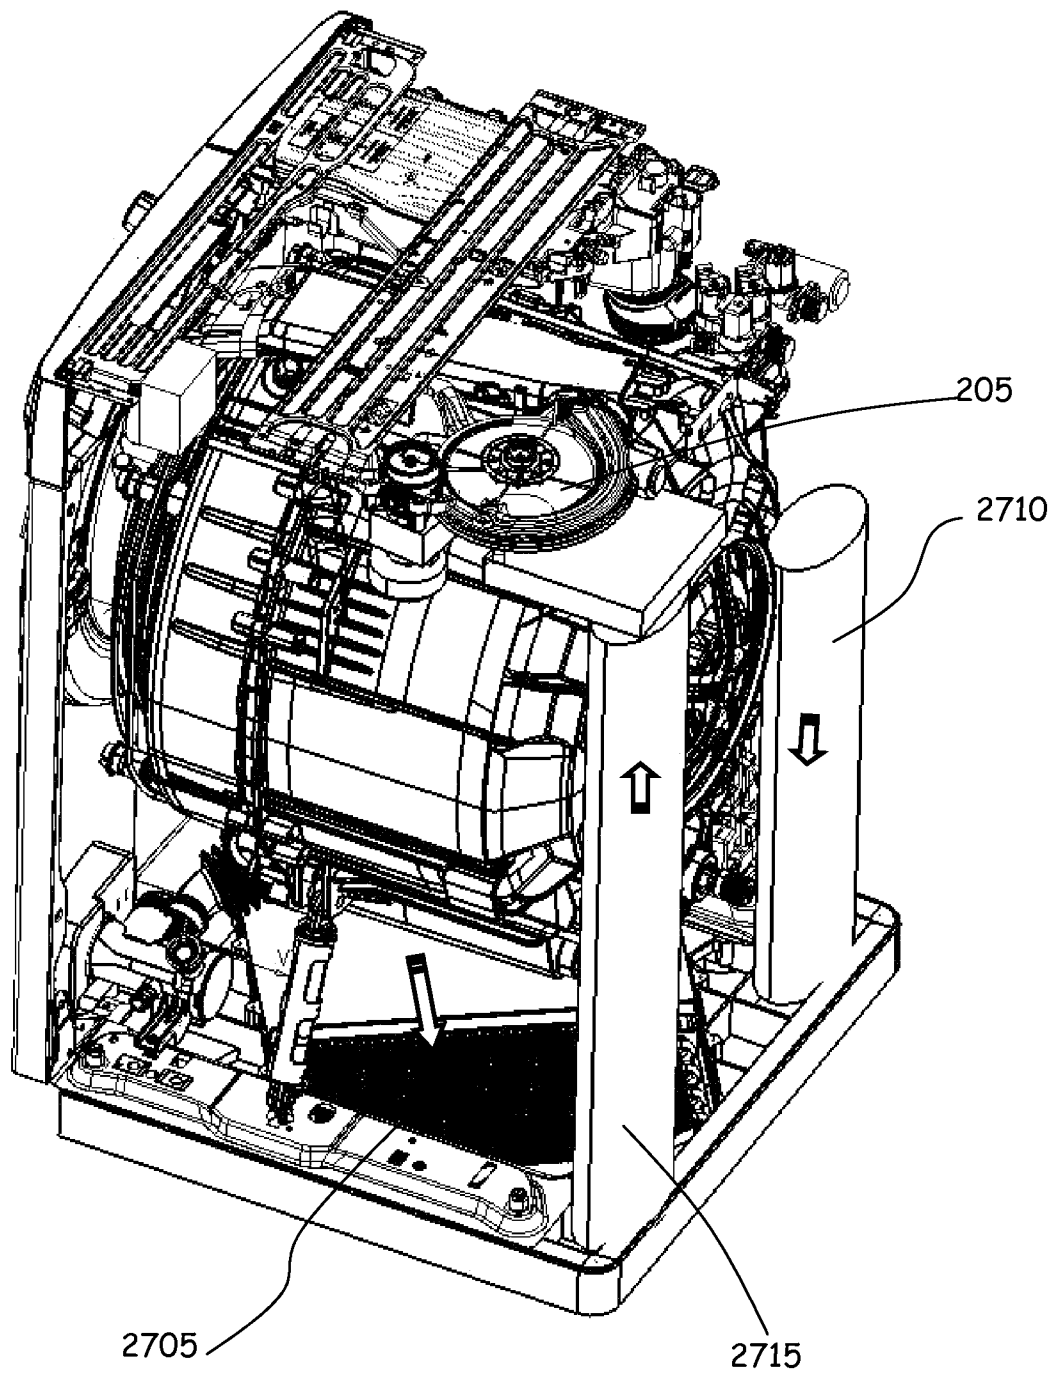


FIG. 27

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/058963

A. CLASSIFICATION OF SUBJECT MATTER

INV. D06F58/04 D06F58/16 D06F58/24 D06F58/20
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

D06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 584 734 A2 (EICKEL U SPINDELDREHER GMBH [DE]) 12 October 2005 (2005-10-12) cited in the application paragraph [0015] - paragraph [0016]; figure 2	1, 9, 10
A	EP 1 146 161 A1 (WHIRLPOOL CO [US]) 17 October 2001 (2001-10-17) the whole document	1-15
X	US 4 949 477 A (GEIGER FRIEDRICH [DE]) 21 August 1990 (1990-08-21) column 3, line 58 - column 4, line 11; claim 1; figure 1	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 September 2010

Date of mailing of the international search report

17/09/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Diaz y Diaz-Caneja

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/058963

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1584734	A2	12-10-2005	NONE	
EP 1146161	A1	17-10-2001	NONE	
US 4949477	A	21-08-1990	DE 3819514 A1	14-12-1989
			EP 0345510 A1	13-12-1989
			JP 1630535 C	26-12-1991
			JP 2031799 A	01-02-1990
			JP 2053080 B	15-11-1990