



(51) International Patent Classification:

F04B 47/02 (2006.01) *F04B 15/02* (2006.01)
F04B 17/03 (2006.01)

(21) International Application Number:

PCT/US2016/030160

(22) International Filing Date:

29 April 2016 (29.04.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/155,576 1 May 2015 (01.05.2015) US

(71) Applicant: GRACO MINNESOTA INC. [US/US]; 88
11th Avenue NE, Minneapolis, Minnesota 55413 (US).(72) Inventors: SHAW, Derek, R.; 118 8th Avenue N, Hop-
kins, Minnesota 55343 (US). INGEBRAND, John, R.;
108 3rd Street SE, New Prague, Minnesota 56071 (US).
DANISKI, Joseph, A.; 1713 Yorkshire Avenue S, Min-
netonka, Minnesota 55305 (US). ROGERS, Daniel, J.;
31005 Elm Street, Lindstrom, Minnesota 55045 (US).
MEYER, Corey, D.; 4591 Embassy Circle NE, Prior
Lake, Minnesota 55372 (US).(74) Agents: FAIRBAIRN, David, R. et al.; Kinney & Lange,
P.A., 312 South Third Street, Minneapolis, Minnesota
55415 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PUMP TRANSMISSION CARRIAGE ASSEMBLY

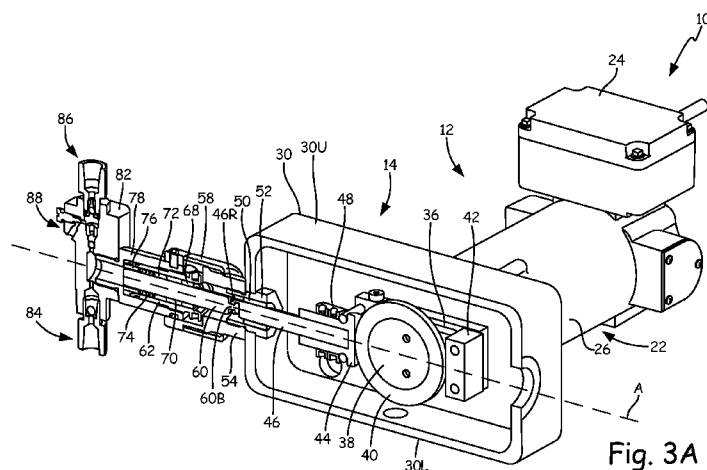


Fig. 3A

(57) Abstract: A metering pump includes a motor having a motor shaft extending through a drive housing, a carriage assembly disposed around the motor shaft and within the drive housing, a plunger return block mounted to the carriage assembly, a piston disposed along an axis, and a carriage bearing disposed on the motor shaft and within the carriage assembly, slidably coupled to the carriage assembly, and configured to provide a second contact point for maintaining the alignment of the carriage assembly with the axis of the piston. The piston further includes a stroke adjuster mounted to the carriage assembly to provide a first contact point for maintaining the alignment of the carriage assembly with the piston, a drive shaft connected to the stroke adjuster, and a plunger connected to the drive shaft. The metering pump also includes a cam coupled to the motor shaft to rotate with the motor shaft and a bearing disposed around the cam to rotate therewith and to contact the stroke adjuster and the plunger return block.

PUMP TRANSMISSION CARRIAGE ASSEMBLY

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority to U.S. Provisional Application No. 62/155,576
5 filed on May 1, 2015, and entitled “PUMP TRANSMISSION CARRIAGE
ASSEMBLY,” the entire contents of which are hereby incorporated by reference in their
entirety.

BACKGROUND

Companies in the oil and natural gas industry often use metering pumps to transfer
10 fluids in harsh or remote locations. Many such pumps provide precise fluid dispensation
by converting rotational motion delivered from a solar or AC grid powered motor to
linear reciprocating motion in a piston. During a complete piston stroke, fluid is both
drawn into the pump and discharged from the pump at a particular rate depending on
piston displacement and rotation cycle time. Frictional forces and side loading acting
15 within these pumps can cause both wear on pump components and operational
inefficiency. Wear often decreases the life of these components and results in failure
modes requiring downtime for repair. Pump inefficiency can increase demand load on the
sources powering the pump. Minimizing component wear and pump inefficiency can thus
reduce end-user costs.

20 While metering pumps typically drive a piston using a cam, many use either
spring or carriage assemblies to return the piston. In spring assemblies, the spring force
used to return the piston can act against it during the discharge stroke, causing higher
energy penalties and additional wear on the pump head and rotary components. Carriage
assemblies, by contrast, can require a number of additional parts to facilitate piston return.
25 Using additional parts often provides more wear points and thus more potential failure
modes.

Metering pump pistons generally reciprocate within a channel. Friction between
the piston and the rotary components attached to the motor can impart a slight rotation on
the piston. This rotation in turn causes side loading on the parts forming the piston
30 channel. Side loading on these parts decreases the life thereof and can necessitate pump
repair. It can also force end-users to purchase more replacement parts.

SUMMARY

In one embodiment, a metering pump includes a motor having a motor shaft
extending through a drive housing, a carriage assembly disposed around the motor shaft

and within the drive housing, a plunger return block mounted to the motor shaft and a piston disposed along an axis, and a carriage bearing disposed on the motor shaft and within the carriage assembly, slidably coupled to the carriage assembly, and configured to provide a second contact point for maintaining the alignment of the carriage assembly with the axis of the piston. The piston further includes a stroke adjuster mounted to the carriage assembly to provide a first contact point for maintaining the alignment of the carriage assembly with the piston, a drive shaft connected to the stroke adjuster, and a plunger connected to the drive shaft. The metering pump also includes a cam coupled to the motor shaft to rotate with the motor shaft and a bearing disposed around the cam to rotate therewith and to contact the stroke adjuster and the plunger return block.

In another embodiment, a metering pump includes a motor having a motor shaft extending through a drive housing, a carriage assembly disposed around the motor shaft and within the drive housing, a plunger return block mounted to the carriage assembly, a piston disposed along an axis and mounted to the carriage assembly to provide a first contact point for maintaining the alignment of the carriage assembly with the axis of the piston, slidably coupled to the carriage assembly, and configured to provide a second contact point for maintaining the alignment of the carriage assembly with the axis of the piston. The metering pump also includes a cam coupled to the motor shaft to rotate with the motor shaft and a bearing disposed around the cam to rotate therewith and to contact the piston and the plunger return block.

In another embodiment, a metering pump includes a motor having a motor shaft extending through a drive housing, a carriage assembly disposed around the motor shaft and within the drive housing, a plunger return block mounted to the carriage assembly, a piston disposed along an axis, a first contact structure configured to provide a first contact point for maintaining the alignment of the carriage assembly with the axis of the piston, a second contact structure aligned with the motor shaft and configured to provide a second contact point for maintaining the alignment of the carriage assembly with the axis of the piston, a cam coupled to the motor shaft to rotate with the motor shaft, and a bearing disposed around the cam to rotate therewith and to contact the piston and the plunger return block.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an isometric view of a metering pump assembly.

FIG. 2A is an exploded isometric view one implementation of a metering pump.

FIG. 2B is an isometric view of the metering pump shown in FIG. 2A.

FIG. 2C is a front view of the metering pump shown in F

FIG. 2D is a top plan view of the metering pump shown in FIG. 2A.

FIG. 2E is a bottom plan view of the metering pump shown in FIG. 2A.

FIG. 3A is an isometric cross-sectional view of another implementation of a
5 metering pump.

FIG. 3B is a front cross-sectional view of the metering pump shown in FIG. 3A.

FIG. 3C is a bottom plan cross-sectional view of the metering pump shown in
FIG. 3A.

FIG. 3D is an enlarged view of metering pump 10 shown in FIG. 3C.

10 FIG. 4A is an enlarged isometric view of yet another implementation of a
metering pump.

FIG. 4B is an enlarged front view of the metering pump shown in FIG. 4A.

DETAILED DESCRIPTION

FIG. 1 is an isometric view of metering pump assembly 2, which includes tank 4
15 (which further comprises tank recirculation port 4R and tank manifold assembly 4M),
power source 6, pressure relief valve 8, metering pump 10, and supply line L. Tank 4 is
connected to metering pump 10. Metering pump 10 is connected to tank 4, power source
6, and pressure relief valve 8. Pressure relief valve 8 is positioned downstream from the
outlet of metering pump 10. Power source 6 provides electrical power to metering pump
20 10. Metering pump 10 draws fluid from tank manifold assembly 4M and then provides
the fluid through supply line L to a desired location. Pressure relief valve 8 receives fluid
from metering pump 10 and can redirect fluid if the pressure surpasses a threshold. Fluid
diverted by pressure relief valve 8 can be recirculated to tank 4 through tank recirculation
port 4R.

25 FIG. 2A is an exploded isometric view of one implementation of metering pump
10. FIG. 2B is an isometric view of metering pump 10 shown in FIG. 2A. FIG. 2C is a
front view of metering pump 10 shown in FIG. 2A. FIG. 2D is a top plan view of
metering pump 10 shown in FIG. 2A. FIG. 2E is a bottom plan view of metering pump 10
shown in FIG. 2A. FIGS. 2A-2E will be discussed together in the following description.
30 Metering pump 10 includes motor section 12, drive housing section 14, pump section 16,
and base section 18. Motor section 12 includes conduit 20 and motor 22. Motor 22 further
includes junction box 24, motor housing 26, and motor shaft 28. Drive housing section 14
includes drive housing 30 (having first drive housing port 30A and second drive housing
port 30B), drive guard 32, carriage bearing 34 (which includes carriage bearing groove

34G), carriage assembly 36 (which includes carriage assembly :
 ball bearing 40, plunger return block 42, stroke adjuster 44, drive shaft 46 (which
 includes drive shaft receiving end 46R), stroke adjuster nut 48, sleeve bearing 50, drive
 cylinder mating component 52, drive cylinder 54, set screws 56, and dust cover 58. Pump
 5 section 16 includes plunger 60 (which includes plunger button end 60B), packing nut 62,
 backup ring 64, o-ring 66, first plunger bearing 68, first spacer 70, second plunger bearing
 72, packing seal 74, second spacer 76, fluid cylinder 78, o-ring 80, valve housing 82, inlet
 check valve 84, and outlet check valve 86. Base section 18 includes base 90 and base
 mounting surface 92.

10 Motor section 12 is connected to drive housing section 14. Drive housing section
 14 is connected to motor section 12, pump section 16, and base section 18. Pump section
 16 is connected to drive section 14. Base section 18 is connected to drive housing section
 14. Motor section 12 provides rotational motion to the components in the drive housing
 section 14. Drive housing section 14 converts rotational motion from motor section 12
 15 into a linear reciprocating motion to drive pump section 16. Pump section 16 provides
 fluid at a desired rate. Base section 18 supports metering pump 10.

Regarding motor section 12, conduit 20 is connected to junction box 24 of motor
 22. Motor housing 26 is connected to drive housing 30. Motor shaft 28 is positioned to
 extend along a longitudinal axis of motor 22 and into drive housing 30. Conduit 20
 20 contains wiring that connects a power source to motor 22. Junction box 24 protects
 electrical components of motor 22 and connects to conduit 20. Motor housing 26 mounts
 motor section 12 to drive housing 30 of drive housing section 14. Motor shaft 28 extends
 and rotates through motor housing 26 into drive housing 30. Motor 22 imparts rotational
 motion via motor shaft 28 for conversion into linear reciprocating motion in drive
 25 housing section 14.

Regarding drive housing section 14, drive housing 30 is connected to motor
 housing 26, drive guard 32, carriage bearing 34, drive cylinder mating component 52,
 drive cylinder 54, and mounting surface 92 of base section 18. Carriage bearing 34 is
 connected to motor shaft 28, drive housing 30, carriage assembly 36, and cam 38 and is
 30 positioned within carriage assembly 36. Carriage assembly 36 is connected to plunger
 return block 42 and stroke adjuster 44 and is positioned around carriage bearing 34.
 Carriage assembly inner ridge 36R is positioned within carriage bearing groove 34G.
 Cam 38 is connected to motor shaft 28 and is positioned to abut carriage bearing 34. Ball
 bearing 40 is connected to and positioned to surround cam 38. Plunger return block 42 is

connected to carriage assembly 36. Stroke adjuster 44 is connected to carriage assembly 36, drive shaft 46, and stroke adjuster nut 48. Drive shaft 46 is connected to stroke adjuster 44 and plunger 60 and is positioned within sleeve bearing 50. Stroke adjuster nut 48 is connected to stroke adjuster 44. The inner radial surface of sleeve bearing 50 abuts drive shaft 46, while the outer radial surface of sleeve bearing 50 abuts the inner radial surface of drive cylinder mating component 52. The inner radial surface of drive cylinder mating component 52 abuts the outer radial surface of sleeve bearing 50, while the outer radial surface of drive cylinder mating component 52 abuts the inner radial surface of drive housing 30 at first drive housing port 30A. Drive cylinder mating component 52 is also connected to drive cylinder 54. Drive cylinder 54 is connected to drive housing 30, drive cylinder mating component 52, set screws 56, dust cover 58, packing nut 62, and fluid cylinder 78. Set screws 56 are connected to drive cylinder 54 and fluid cylinder 78 of pump section 16. Dust cover 58 is positioned around and is connected to drive cylinder 54.

Drive housing 30 protects internal components and mounts to motor section 12, pump section 16, and base section 18. Drive housing 30 also connects to drive guard 32. Drive guard 32 protects and allows access to components within drive housing 30. Carriage bearing 34 mounts to motor shaft 28 and drive housing 30 and sits within carriage assembly 36. Carriage bearing 34 restricts the movement of carriage assembly 36 and also provides a bearing surface upon which cam 38 can rotate. Carriage bearing 34 also acts as a second point of contact for carriage assembly 36 in order to maintain horizontal alignment as carriage assembly 36 reciprocates with the movement of stroke adjuster 44. Carriage assembly 36 connects to stroke adjuster 44 and plunger return block 42 and facilitates the return of drive shaft 46 and plunger 60 once depressed by cam 38 and ball bearing 40. Cam 38 connects to and rotates with motor shaft 28. Ball bearing 40 surrounds cam 38 and contacts stroke adjuster 44 as cam 38 rotates, depressing drive shaft 46 and plunger 60. Plunger return block 42 provides a contact point for ball bearing 40 rotating on cam 38 to return the depressed piston formed in part by stroke adjuster 44, drive shaft 46 and plunger 60. Stroke adjuster 44 serves as a first contact point for maintaining the horizontal alignment of carriage assembly 36 in conjunction with the second point of contact provided by carriage bearing 34. Stroke adjuster 44 also depresses drive shaft 46 and plunger 60 when contacted by ball bearing 40 and cam 38. Stroke adjuster 44 and stroke adjuster nut 48 allow for control of stroke length. Drive shaft 46 connects to and transfers linear motion to plunger 60. Sleeve bearing 50 supports and

directs the motion of drive shaft 46. Drive cylinder mating co
cylinder 54 to drive housing 30. Set screws 56 secure drive cylinder 54 to fluid cylinder
78. Dust cover 58 provides a protective barrier over a portion of drive cylinder 54.

Regarding pump section 16, plunger 60 is connected to drive shaft 46, first
5 plunger bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, and
second spacer 76. Plunger button end 60B is connected to drive shaft receiving end 46R.
Packing nut 62 is connected to drive cylinder 54, backup ring 64, o-ring 66, first plunger
bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, second spacer 76,
and fluid cylinder 78. First plunger bearing 68 is connected to plunger 60, packing nut 62,
10 and first spacer 70. The radial inner surface of first plunger bearing 68 abuts the radial
outer surface of plunger 60, while the radial outer surface of first plunger bearing 68 abuts
the radial inner surface of packing nut 62. First spacer 70 is connected to plunger 60,
packing nut 62, first plunger bearing 68, and second plunger bearing 72. The radial inner
surface of first spacer 70 abuts the radial outer surface of plunger 60, while the radial
15 outer surface of first spacer 70 abuts the radial inner surface of packing nut 62. Second
plunger bearing 72 is connected to plunger 60, packing nut 62, first spacer 70, and
packing seal 74. The radial inner surface of second plunger bearing 72 abuts the radial
outer surface of plunger 60, while the radial outer surface of second plunger bearing 72
abuts the radial inner surface of packing nut 62. Packing seal 74 is connected to plunger
20 60, packing nut 62, second plunger bearing 72, and second spacer 76. The radial inner
surface of packing seal 74 abuts the radial outer surface of plunger 60, while the radial
outer surface of packing seal 74 abuts the radial inner surface of packing nut 62. Second
spacer 76 is connected to plunger 60, packing nut 62, packing seal 74, and fluid cylinder
78. The radial inner surface of second spacer 76 abuts the radial outer surface of plunger
25 60, while the radial outer surface of second spacer 76 abuts the radial inner surface of
packing nut 62. Fluid cylinder 78 is connected to drive cylinder 54, packing nut 62,
second spacer 76, and valve housing 82. O-ring 80 is connected to fluid cylinder 78.
Valve housing 82 is connected to inlet check valve 84, outlet check valve 86, and bleed
valve 88.

30 Plunger 60 connects to drive shaft 46 and moves in a linear reciprocating motion
therewith. Plunger button end 60B connects to drive shaft receiving end 46R. As plunger
60 translates toward valve housing 82, fluid is pushed through outlet check valve 86. As
plunger is pulled away from valve housing 82 and toward drive housing 30, fluid is drawn
into valve housing 82 through inlet check valve 84. Packing nut 62, first plunger bearing

68, first spacer 70, second plunger bearing 72, packing seal 74, and second spacer 76 together to seal the channel. O-ring 66 and backup ring 64 provide a sealing interface between packing nut 62 and fluid cylinder 78. O-ring 80 provides a sealing interface between fluid cylinder 78 and valve housing 82. Bleed valve 88 purges air to facilitate proper fluid flow.

Regarding base section 18, base 90 includes a mounting surface 92. Mounting surface 92 is connected to drive housing 30. Base 90 mounts to drive housing 30 at mounting surface 92 and provides support for metering pump 10.

Metering pump 10 can draw fluid from tank manifold assembly 4M (shown in FIG. 1) into inlet check valve 84 and then discharge the fluid to supply line L (shown in FIG. 1) through outlet check valve 86. Fluid is drawn into and discharged from metering pump 10 based on the displacement of the piston formed by stroke adjuster 44, drive shaft 46, and plunger 60 and rotation cycle time of motor shaft 28, cam 38 and ball bearing 40. Metering pump 10 converts rotational motion from motor shaft 28, cam 38 and ball bearing 40 into linear reciprocating motion in the piston. Plunger 60 and a portion of drive shaft 46 move linearly within a channel formed by sleeve bearing 50, drive cylinder mating component 52, packing nut 62, first plunger bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, second spacer 76, and fluid cylinder 78. A complete piston stroke includes both suction and discharge strokes. The suction stroke draws fluid into inlet check valve 84 to fill the volume formed by the face of plunger 60, packing nut 62, and valve housing 82. The discharge stroke pushes fluid out through outlet check valve 86 as the face of plunger 60 moves linearly in the direction of valve housing 82 relative to drive housing 30.

Motor 22 rotates motor shaft 28, which in turn rotates cam 38 and ball bearing 40 in drive housing 30. The eccentric rotation of cam 38 and ball bearing 40 acts to depress and return the piston so that it reciprocates within the channel formed by sleeve bearing 50, drive cylinder mating component 52, packing nut 62, first plunger bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, second spacer 76, and fluid cylinder 78. Carriage assembly 36 attaches to plunger return block 42 and stroke adjuster 44 and facilitates the suction stroke of the piston. Carriage assembly 36, stroke adjuster 44, and plunger return block 42 act as a follower for cam 38 and ball bearing 40. The suction stroke of the piston begins when cam 38 and ball bearing 40 rotate to a position

where the larger side of cam 38 is nearest to second drive housing bearing 40 pushes on plunger return block 42. Pressing plunger return block 42 drives the carriage assembly 36 toward second drive housing port 30B along an axis formed along the length of the piston and extending through first drive housing port 30A and second drive housing port 30B. This in turn pulls plunger 60 away from valve housing 82 along the same axis, drawing fluid into inlet check valve 84 to fill the volume formed by the face of plunger 60, packing nut 62, and valve housing 82. As cam 38 and ball bearing 40 continue to rotate into a position where the larger portion of cam 38 is nearest drive housing port 30A, ball bearing 40 pushes on stroke adjuster 44, depressing the piston formed by stroke adjuster 44, drive shaft 46, and plunger 60 and initiating the discharge stroke. Depressing the piston pushes both the piston and carriage assembly 36 toward first drive housing port 30A along the axis formed along the piston and extending through first drive housing port 30A and second drive housing port 30B and dispenses the volume drawn in during the suction stroke through outlet check valve 86. The continued rotation of motor shaft 28, cam 38 and ball bearing 40 in turn drives the continued reciprocation of the piston.

Carriage bearing 34 confers the advantage of providing a second point of contact for maintaining the alignment of carriage assembly 36 along the axis formed by first drive housing port 30A and second drive housing port 30B without needing any additional components or structures. Stroke adjuster 44 provides the first point of contact for carriage assembly 36 in aligning carriage assembly 36 along the axis formed along the length of the piston and extending through first drive housing port 30A and second drive housing port 30B as it moves between first drive housing port 30A and second drive housing port 30B with the rotation of cam 38 and ball bearing 40. Using carriage bearing 34 as the second point of contact for the alignment of carriage assembly 36 ensures that it does rotate with respect to the axis formed along the length of the piston and extending through first drive housing port 30A and second drive housing port 30B. This also limits the rotation of the piston within the channel. In prior art configurations, the use of additional bearings or even a dummy piston is typically required to ensure that a carriage assembly will not rotate. Using additional parts provides more wear points and thus more potential failure modes. Carriage bearing 34, by contrast, aligns carriage assembly 36 with the axis along the piston without the need for additional parts, reducing possible failure modes and potential repair downtime.

The coupling and structure of drive shaft receiving end 60B confer the advantage of minimizing the side load applied to the channel components such as packing seal 74, ensuring a longer operating life. The connection of drive shaft receiving end 46R and plunger button end 60B is positioned to ensure that it avoids entering sleeve bearing 50 and packing seal 74 during the reciprocation of drive shaft 46 and plunger 60. In one implementation, plunger button end 60B has a button shape, while drive shaft receiving end has a corresponding shape, such as a hook, permitting the mating of the two ends. The driveshaft receiving end 46R and plunger button end 60B connection provides a degree of freedom of movement between drive shaft 46 and plunger 60 so that any flex or rotation imparted to drive shaft 46 is reduced or eliminated on plunger 60. As cam 38 and ball bearing 40 rotate into contact with stroke adjuster 44, ball bearing 40 tends to provide both a force depressing stroke adjuster 44 and drive shaft 46 and an orthogonal force imparting a slight rotation to drive shaft 46. The orthogonal force is the result of drag friction between stroke adjuster 44 and ball bearing 40 as cam 38 rotates. Rotation of drive shaft 46 can impart a side load downstream on a portion of the channel made up of packing nut 62, first plunger bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, and second spacer 76. The degree of freedom in the connection mitigates or eliminates the propagation of the rotation on drive shaft 46, reducing side loading to the channel components. Reducing the side load on the channel components extends the operating life thereof. In particular, this connection extends the life of packing seal 74 by reducing the potential side loading applied from plunger 60 thereon. In addition, the drive shaft receiving end 46R and plunger button end 60B connection also confers the advantage of providing efficient changeover times, minimizing downtime for repair.

In another embodiment of metering pump 10, a second piston and pump section, like the piston and pump section 16, can be added in place of plunger return block 42. The second piston and second pump section operate like the piston and pump section 16.

FIGS. 3A-3D illustrates another implementation of metering pump 10. FIGS. 3A-3D use similar reference characters to those used in FIGS. 2A-2E, even though some of the components, such as motor housing 26 and carriage assembly 36, differ somewhat in structure. A person of ordinary skill in the pertinent art would recognize that components having the same reference numerals perform the same or similar functions. FIG. 3A is an isometric cross-sectional view of chemical metering pump 10. FIG. 3B is a front cross-sectional view of metering pump 10 shown in FIG. 3A. FIG. 3C is a bottom plan cross-

sectional view of metering pump 10 shown in FIG. 3A. FIG 3
metering pump 10 shown in FIG. 3C. Metering pump 10 includes motor section 12, drive
housing section 14, and pump section 16. Motor section 12 includes motor 22, junction
box 24, motor housing 26, and motor shaft 28. Drive housing section 14 includes drive
5 housing 30 (further comprising first drive housing port 30A, second drive housing port
30B, drive housing upper portion 30U, and drive housing lower portion 30L), drive guard
32, carriage bearing 34 (which includes carriage bearing groove 34G), carriage assembly
36 (which includes carriage assembly inner ridge 36R), cam 38, ball bearing 40, plunger
return block 42, stroke adjuster 44, drive shaft 46 (which includes drive shaft receiving
10 end 46R), stroke adjuster nut 48, sleeve bearing 50, drive cylinder mating component 52,
drive cylinder 54, set screws 56, and dust cover 58. Pump section 16 includes plunger 60
(which includes plunger button end 60B), packing nut 62, backup ring 64, o-ring 66, first
plunger bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, second
spacer 76, fluid cylinder 78, o-ring 80, valve housing 82, inlet check valve 84, and outlet
15 check valve 86. Also shown in FIGS. 3A-3D is axis A.

Motor housing 26 is connected to drive housing 30. Motor shaft 28 is positioned
to extend along a longitudinal axis of motor 22 and into drive housing 30. Drive housing
30 is connected to motor housing 26, drive guard 32, carriage bearing 34, drive cylinder
mating component 52, drive cylinder 54, and mounting surface 92 of base section 18.
20 Carriage bearing 34 is connected to motor shaft 28, drive housing 30, carriage assembly
36, and cam 38. Carriage assembly 36 is connected to plunger return block 42 and stroke
adjuster 44. Carriage assembly inner ridge 36R is positioned within carriage bearing
groove 34G. Cam 38 is connected to motor shaft 28 and is positioned to abut carriage
bearing 34. Ball bearing 40 is connected to and positioned to surround cam 38. Plunger
return block 42 is connected to carriage assembly 36. Stroke adjuster 44 is connected to
25 carriage assembly 36, drive shaft 46, and stroke adjuster nut 48. Drive shaft 46 is
connected to stroke adjuster 44 and plunger 60 and is positioned within sleeve bearing 50.
Stroke adjuster nut 48 is connected to stroke adjuster 44. The inner radial surface of
sleeve bearing 50 abuts drive shaft 46, while the outer radial surface of sleeve bearing 50
30 abuts the inner radial surface of drive cylinder mating component 52. The inner radial
surface of drive cylinder mating component 52 abuts the outer radial surface of sleeve
bearing 50, while the outer radial surface of drive cylinder mating component 52 abuts
the inner radial surface of drive housing 30 at first drive housing port 30A. Drive cylinder
mating component 52 is also connected to drive cylinder 54. Drive cylinder 54 is

connected to drive housing 30, drive cylinder mating component cover 58, packing nut 62, and fluid cylinder 78. Set screws 56 are connected to drive cylinder 54 and fluid cylinder 78 of pump section 16. Dust cover 58 is positioned around and is connected to drive cylinder 54.

5 Plunger 60 is connected to drive shaft 46, first plunger bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, and second spacer 76. Plunger button end 60B is connected to drive shaft receiving end 46R. Packing nut 62 is connected to drive cylinder 54, backup ring 64, o-ring 66, first plunger bearing 68, first spacer 70, second plunger bearing 72, packing seal 74, second spacer 76, and fluid cylinder 78. First plunger bearing 68 is connected to plunger 60, packing nut 62, and first spacer 70. The radial inner surface of first plunger bearing 68 abuts the radial outer surface of plunger 60, while the radial outer surface of first plunger bearing 68 abuts the radial inner surface of packing nut 62. First spacer 70 is connected to plunger 60, packing nut 62, first plunger bearing 68, and second plunger bearing 72. The radial inner surface of first spacer 70 abuts the radial outer surface of plunger 60, while the radial outer surface of first spacer 70 abuts the radial inner surface of packing nut 62. Second plunger bearing 72 is connected to plunger 60, packing nut 62, first spacer 70, and packing seal 74. The radial inner surface of second plunger bearing 72 abuts the radial outer surface of plunger 60, while the radial outer surface of second plunger bearing 72 abuts the radial inner surface of packing nut 62. Packing seal 74 is connected to plunger 60, packing nut 62, second plunger bearing 72, and second spacer 76. The radial inner surface of packing seal 74 abuts the radial outer surface of plunger 60, while the radial outer surface of packing seal 74 abuts the radial inner surface of packing nut 62. Second spacer 76 is connected to plunger 60, packing nut 62, packing seal 74, and fluid cylinder 78. The radial inner surface of second spacer 76 abuts the radial outer surface of plunger 60, while the radial outer surface of second spacer 76 abuts the radial inner surface of packing nut 62. Fluid cylinder 78 is connected to drive cylinder 54, packing nut 62, second spacer 76, and valve housing 82. O-ring 80 is connected to fluid cylinder 78. Valve housing 82 is connected to inlet check valve 84, outlet check valve 86, and bleed valve 88.

30 Cam 38 and ball bearing 40 rotate eccentrically with the rotation of motor shaft 28. Carriage assembly 36, stroke adjuster 44, and plunger return block 42 act as a follower for cam 38 and ball bearing 40. As cam 38 and ball bearing 40 rotate in a circular path to a position where the larger portion of cam 38 is nearest drive housing port 30A, ball bearing 40 pushes on stroke adjuster 44, depressing the piston formed by stroke

adjuster 44, drive shaft 46, and plunger 60. Depressing this piston through outlet check valve 86. As cam 38 and ball bearing 40 rotate to a position where the larger side of cam 38 is nearest to drive housing port 30B, ball bearing 40 pushes on plunger return block 42. Pressing plunger return block 42 drives the carriage assembly 36 and thus pulls piston formed by stroke adjuster 44, drive shaft 46, and plunger 60 back from the depressed position. Pulling back this piston draws fluid through inlet check valve 84.

Carriage bearing 34 sits within carriage assembly 36 and reduces friction for the reciprocating and linear translation of carriage assembly 36 between drive housing ports 30A and 30 B and along axis A. Carriage assembly inner ridge 36R couples to and translates along carriage bearing groove 34G. The coupling of carriage bearing 34 and carriage assembly 36 at the carriage bearing groove 34G and carriage assembly ridge 36R interface restricts carriage assembly 36 from traveling in undesirable directions. In particular, the coupling prevents carriage assembly 36 from translating back and forth along the axis extending through motor shaft 28 and drive guard 32 and up and down along the axis extending through drive housing upper portion 30U and drive housing lower portion 30L. It also prevents carriage assembly 36 from tilting back and forth between drive guard 32 and where motor section 12 mounts to drive housing 30.

Stroke adjuster 44 and carriage bearing 34 ensure the horizontal alignment of carriage assembly 36 with respect to axis A, as shown in FIG. 3B. Stroke adjuster 44 provides the first point of contact for carriage assembly 36. Absent a second point of contact, carriage assembly 36 would be free to rotate around and with motor shaft 28 with respect to axis A. Carriage bearing 34 provides a second point of contact to ensure that carriage assembly 36 maintains horizontal alignment. Using carriage bearing 34 as the second point of contact minimizes the number of components needed to align carriage assembly 36. Placing carriage bearing 34 on motor shaft 28 eliminates the need for incorporating additional aligning features, providing less wear points and possible failure modes. In prior art configurations, additional components, such as a dummy piston or multiple bearings, would be required to align a carriage assembly as it reciprocated. Such additional components provide more wear points and failure modes, which can force end-users to purchase more replacement parts.

Drive shaft receiving end 46R connects to plunger button end 60B, minimizing the side load applied to plunger 60 channel components such as packing seal 74. The connection is positioned to ensure that it avoids entering sleeve bearing 50 and packing

seal 74 during the reciprocation of drive shaft 46 and plunger bearing 40 rotate into contact with stroke adjuster 44, ball bearing 40 tends to provide both a force depressing stroke adjuster 44 and drive shaft 46 and an orthogonal force imparting a slight rotation to drive shaft 46. The orthogonal force is result of drag friction between stroke adjuster 44 and ball bearing 40 as cam 38 rotates. The rotation of drive shaft 46 in turn imparts side load on the channel components. The driveshaft receiving end 46R and plunger button end 60B connection provides a degree of freedom between drive shaft 46 and plunger 60 so that any flex or rotation imparted to drive shaft 46 is reduced or eliminated on plunger 60, minimizing the side loading on first plunger bearing 68, first spacer 70, second plunger bearing 72, and packing seal 74. Reducing the side load on packing seal 74 increases the life thereof. In addition, the drive shaft receiving end 46R and plunger button end 60B connection permits efficient changeover.

FIG. 4A is an enlarged isometric view of yet another implementation of metering pump 10. FIG 4B is an enlarged front view of metering pump 10 shown in FIG. 4A. Drive housing section 14 includes drive housing 30, drive guard 32, drive shaft 46 (which includes drive shaft receiving end 46R), drive cylinder mating component 52, drive cylinder 54, set screws 56, and dust cover 58. Pump section 16 includes plunger 60 (which includes plunger button end 60B), packing nut 62, and fluid cylinder 78. Drive housing 30 is connected to drive guard 32, and drive cylinder mating component 52. Drive shaft receiving end 46R of drive shaft 46 is connected to plunger button end 60B of plunger 60. Drive cylinder mating component 52 is connected to drive housing 30 and drive cylinder 54. Drive cylinder 54 is connected to fluid cylinder 78. Set screws 56 are connected to drive cylinder 54 and fluid cylinder 78. Dust cover 58 is connected to drive cylinder 54.

Plunger 60 can be serviced or replaced quickly without the use of special tools and, in some instances, without removing drive guard 32. To disconnect plunger 60, packing nut 62 can be exposed by rotating dust cover 58 and sliding it back toward drive housing 30. Packing nut 62 can then be loosened. Set screws 56 can then be loosened from drive cylinder 54, which is fastened to fluid cylinder 78. Once set screws 56 have been removed, fluid cylinder 78 can be released from drive cylinder 54. In some embodiments, drive guard 32 can be removed in order to reposition cam 38 (as shown in FIG. 2A and 3A), such that the larger side of cam 38 is aligned with the side being repaired. In other embodiments, cam 38 may not need to be adjusted. Plunger 60 can then be disengaged from drive shaft 46 at the coupling of driveshaft receiving end 46R and

plunger button end 60B. Decoupling plunger 60 and drive shaft receiving end 46R from section 16 to be removed without needing to access the inside of drive housing 30 or using a special tool to disengage plunger 60 from drive shaft 46. Plunger 60 can thus be quickly repaired, serviced, or replaced to ensure that the downtime of metering pump 10 is minimized.

To reconnect a replacement plunger, the replacement plunger button shaped end can be connected to drive shaft receiving end 46R. The replacement plunger can then be guided into fluid cylinder 78, as fluid cylinder 78 is guided into drive cylinder 54. Set screws 56 can then be used to fasten drive cylinder 54 to fluid cylinder 78. Packing nut 62 can then be tightened. Dust cover 58 can then be pushed forward away from drive housing 30 and then rotated to lock into place. The coupling and structure of drive shaft receiving end 46R and plunger button end 60B thus confer the advantage of providing easy and efficient changeover, minimizing downtime for repair.

While the invention has been described with reference to an exemplary embodiment(s), it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment(s) disclosed, but that the invention will include all embodiments falling within the scope of the appended claims.

CLAIMS:

1. A metering pump comprising:
 - a motor having a motor shaft extending through a drive housing;
 - a carriage assembly disposed around the motor shaft and within the drive housing;
 - 5 a plunger return block mounted to the carriage assembly;
 - a piston disposed along an axis and further comprising:
 - a stroke adjuster mounted to the carriage assembly to provide a first
 - contact point for maintaining the alignment of the carriage
 - assembly with the piston;
 - 10 a drive shaft connected to the stroke adjuster;
 - a plunger connected to the drive shaft;
 - a carriage bearing disposed on the motor shaft and within the carriage assembly,
 - slidably coupled to the carriage assembly, and configured to provide a
 - second contact point for maintaining the alignment of the carriage
 - 15 assembly with the axis of the piston;
 - a cam coupled to the motor shaft to rotate with the motor shaft; and
 - a bearing disposed around the cam to rotate therewith and to contact the stroke
 - adjuster and the plunger return block.
2. The metering pump of claim 1, wherein the carriage assembly has an inner ridge
- 20 and the carriage bearing has a grooved surface.
3. The metering pump of claim 2, wherein the carriage assembly inner ridge and the carriage bearing grooved surface are slidably coupled.
4. A metering pump comprising:
 - a motor having a motor shaft extending through a drive housing;
 - 25 a carriage assembly disposed around the motor shaft and within the drive housing;
 - a plunger return block mounted to the carriage assembly;
 - a piston disposed along an axis and mounted to the carriage assembly to provide a
 - first contact point for maintaining the alignment of the carriage assembly
 - with the axis of the piston;
 - 30 a carriage bearing disposed on the motor shaft and within the carriage assembly,
 - slidably coupled to the carriage assembly, and configured to provide a
 - second contact point for maintaining the alignment of the carriage
 - assembly with the axis of the piston;
 - a cam coupled to the motor shaft to rotate with the motor shaft; and

- a bearing disposed around the cam to rotate therewith and
and the plunger return block.
5. The metering pump of claim 4, wherein the carriage assembly has an inner ridge and the carriage bearing has a grooved surface.
- 5 6. The metering pump of claim 5, wherein the carriage assembly inner ridge and the carriage bearing grooved surface are slidably coupled.
7. The metering pump of claim 6, wherein the piston further comprises:
a stroke adjuster mounted to the carriage assembly to provide a first contact point
for maintaining the alignment of the carriage assembly with the piston;
10 a drive shaft connected to the stroke adjuster; and
a plunger connected to the drive shaft.
8. A metering pump comprising:
a motor having a motor shaft extending through a drive housing;
a carriage assembly disposed around the motor shaft and within the drive housing;
15 a plunger return block mounted to the carriage assembly;
a piston disposed along an axis and mounted to the carriage assembly;
a first contact structure configured to provide a first contact point for maintaining
the alignment of the carriage assembly with the axis of the piston;
a second contact structure aligned with the motor shaft and configured to provide
20 a second contact point for maintaining the alignment of the carriage
assembly with the axis of the piston;
a cam coupled to the motor shaft to rotate with the motor shaft; and
a bearing disposed around the cam to rotate therewith and to contact the piston
and the plunger return block.
- 25 9. The metering pump of claim 8, wherein the first contact structure is a stroke adjuster.
10. The metering pump of claim 8, wherein the second contact structure is a carriage bearing.
11. The metering pump of claim 10, wherein the carriage assembly has an inner ridge and the carriage bearing has a grooved surface.
- 30 12. The metering pump of claim 11, wherein the carriage assembly inner ridge and the carriage bearing grooved surface are slidably coupled.


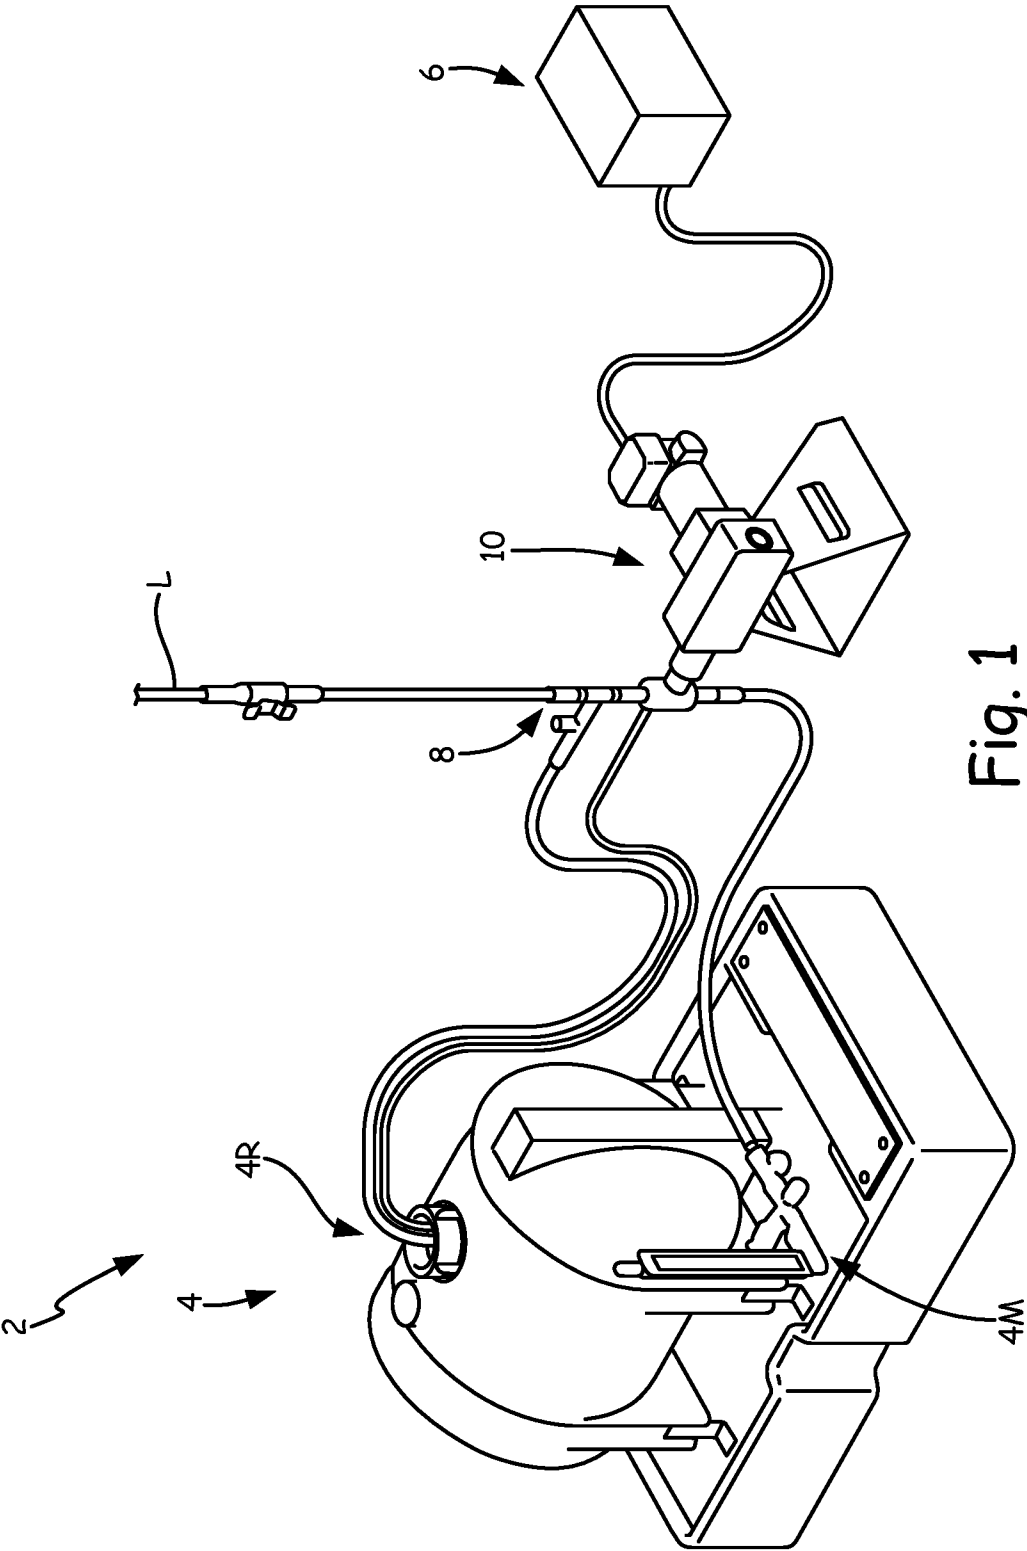


Fig. 1

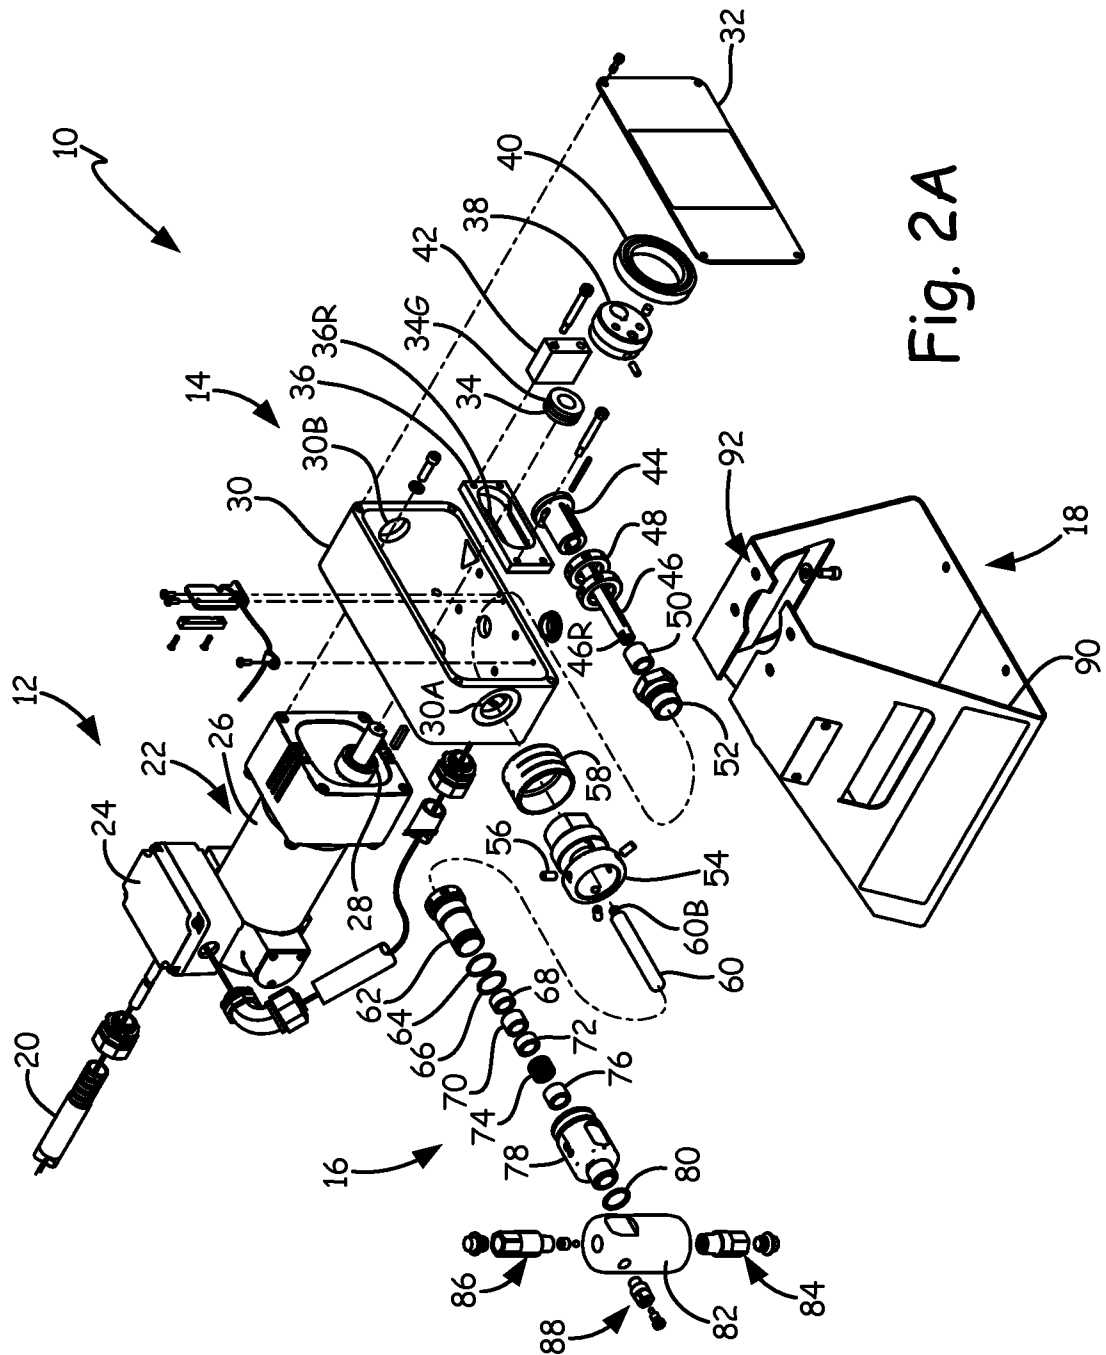

3/9

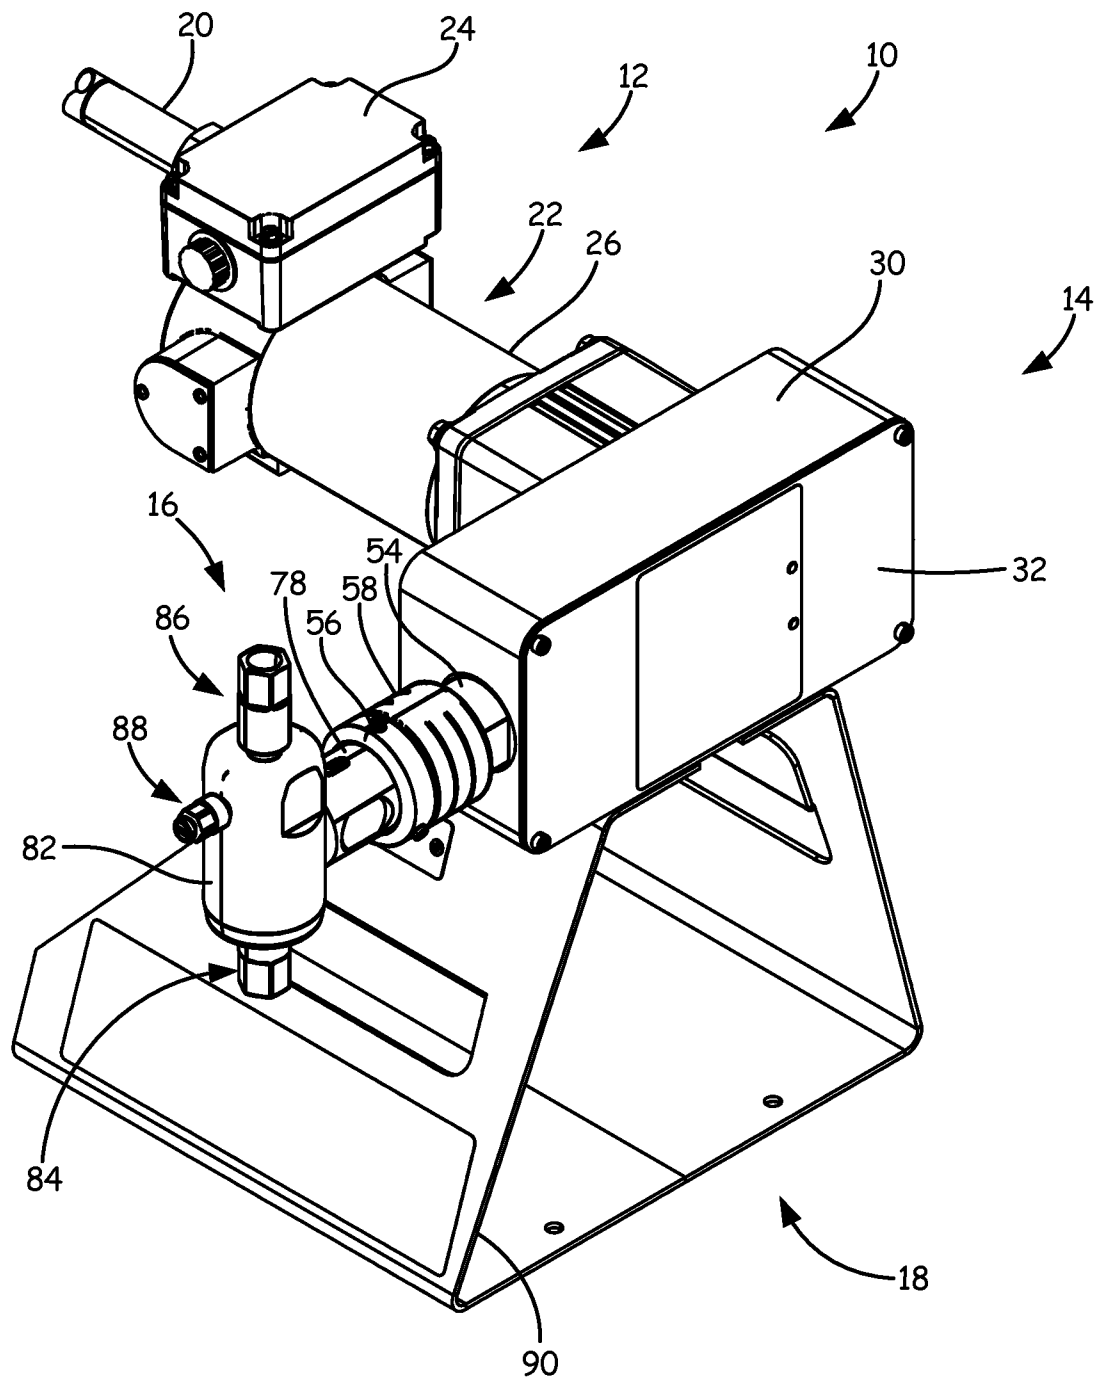
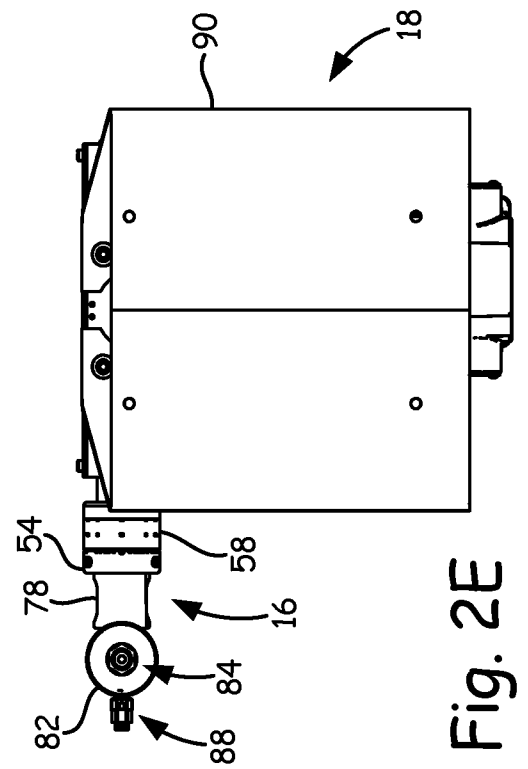
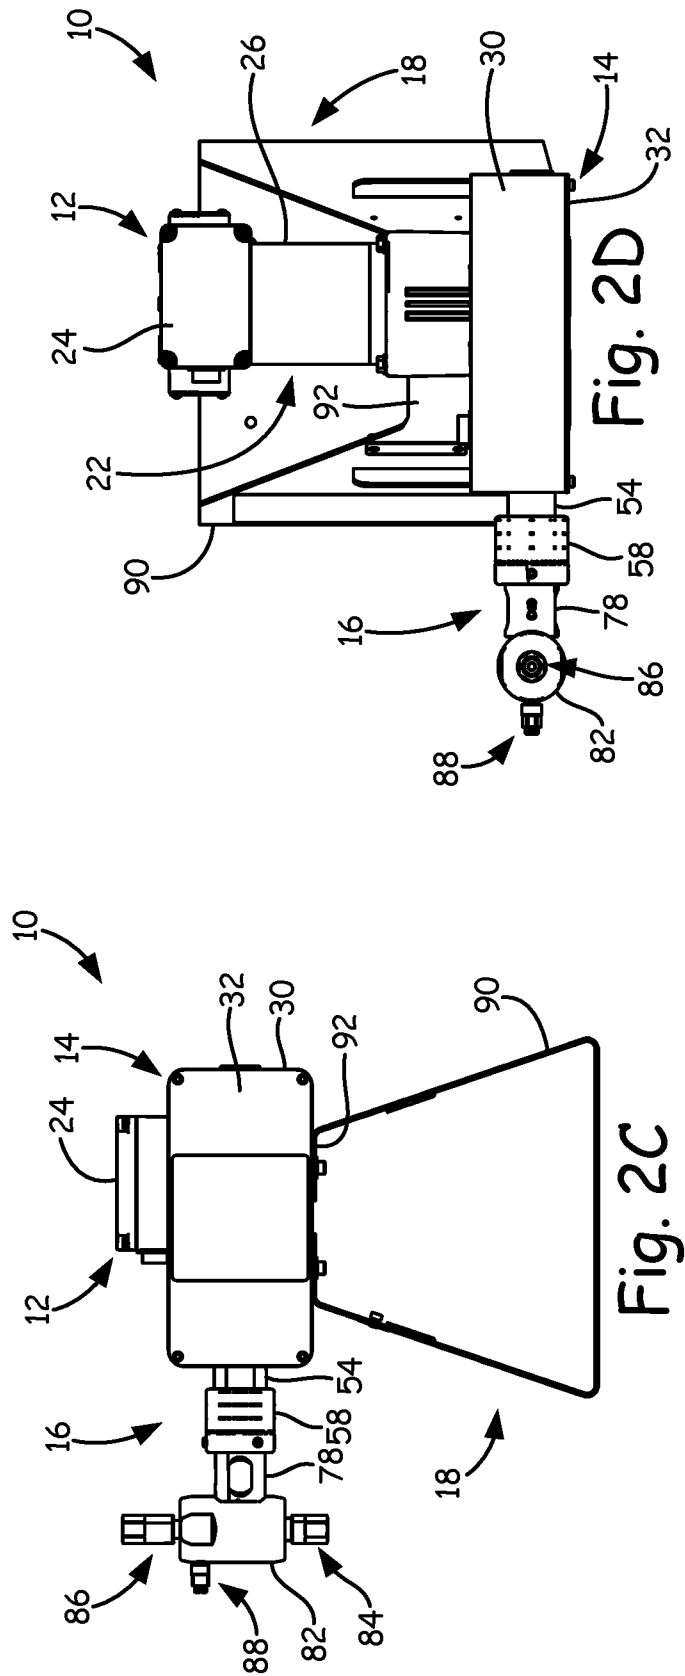


Fig. 2B



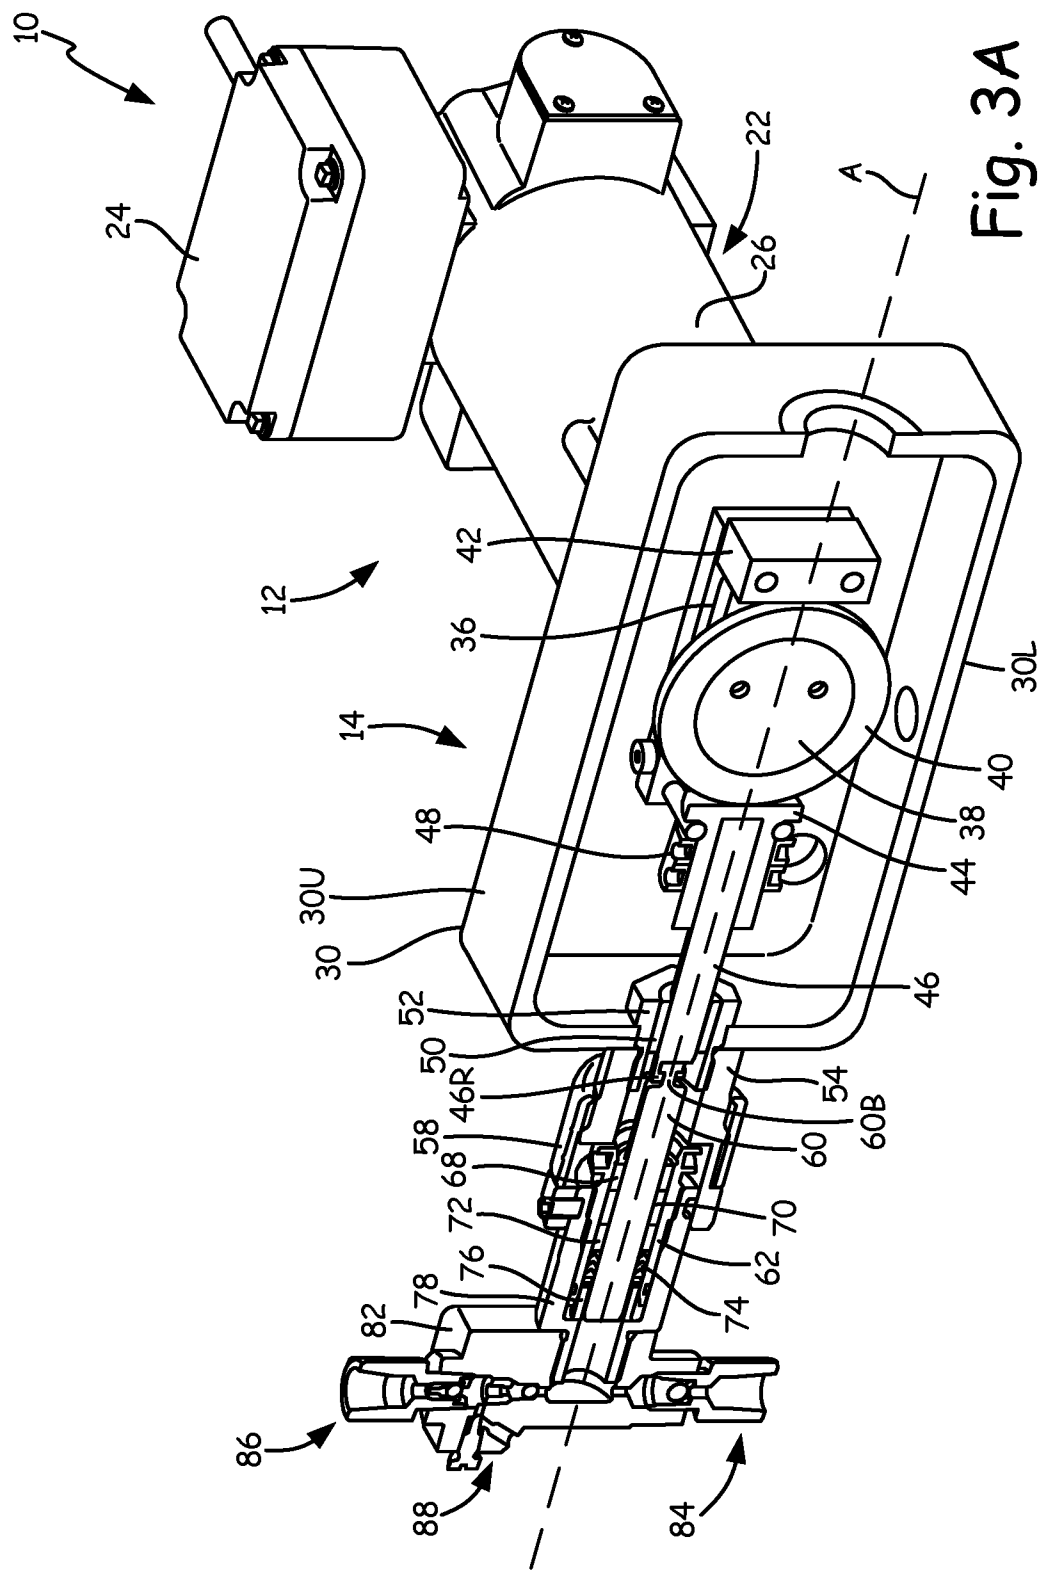


Fig. 3A

6/9

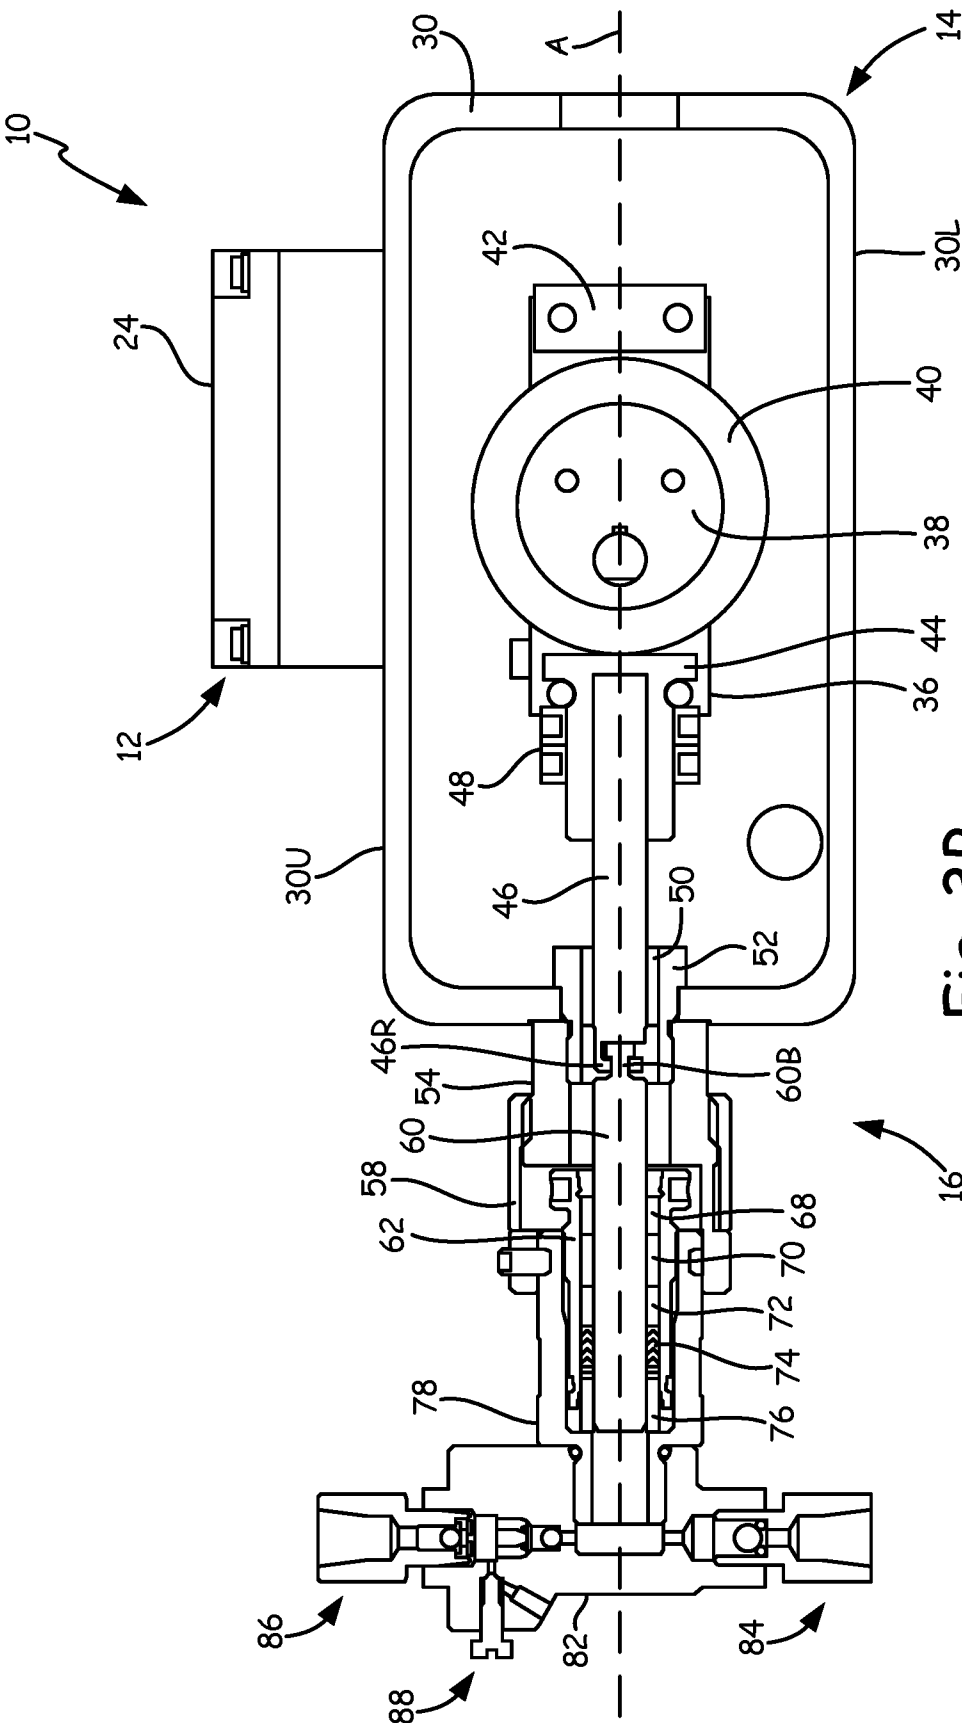
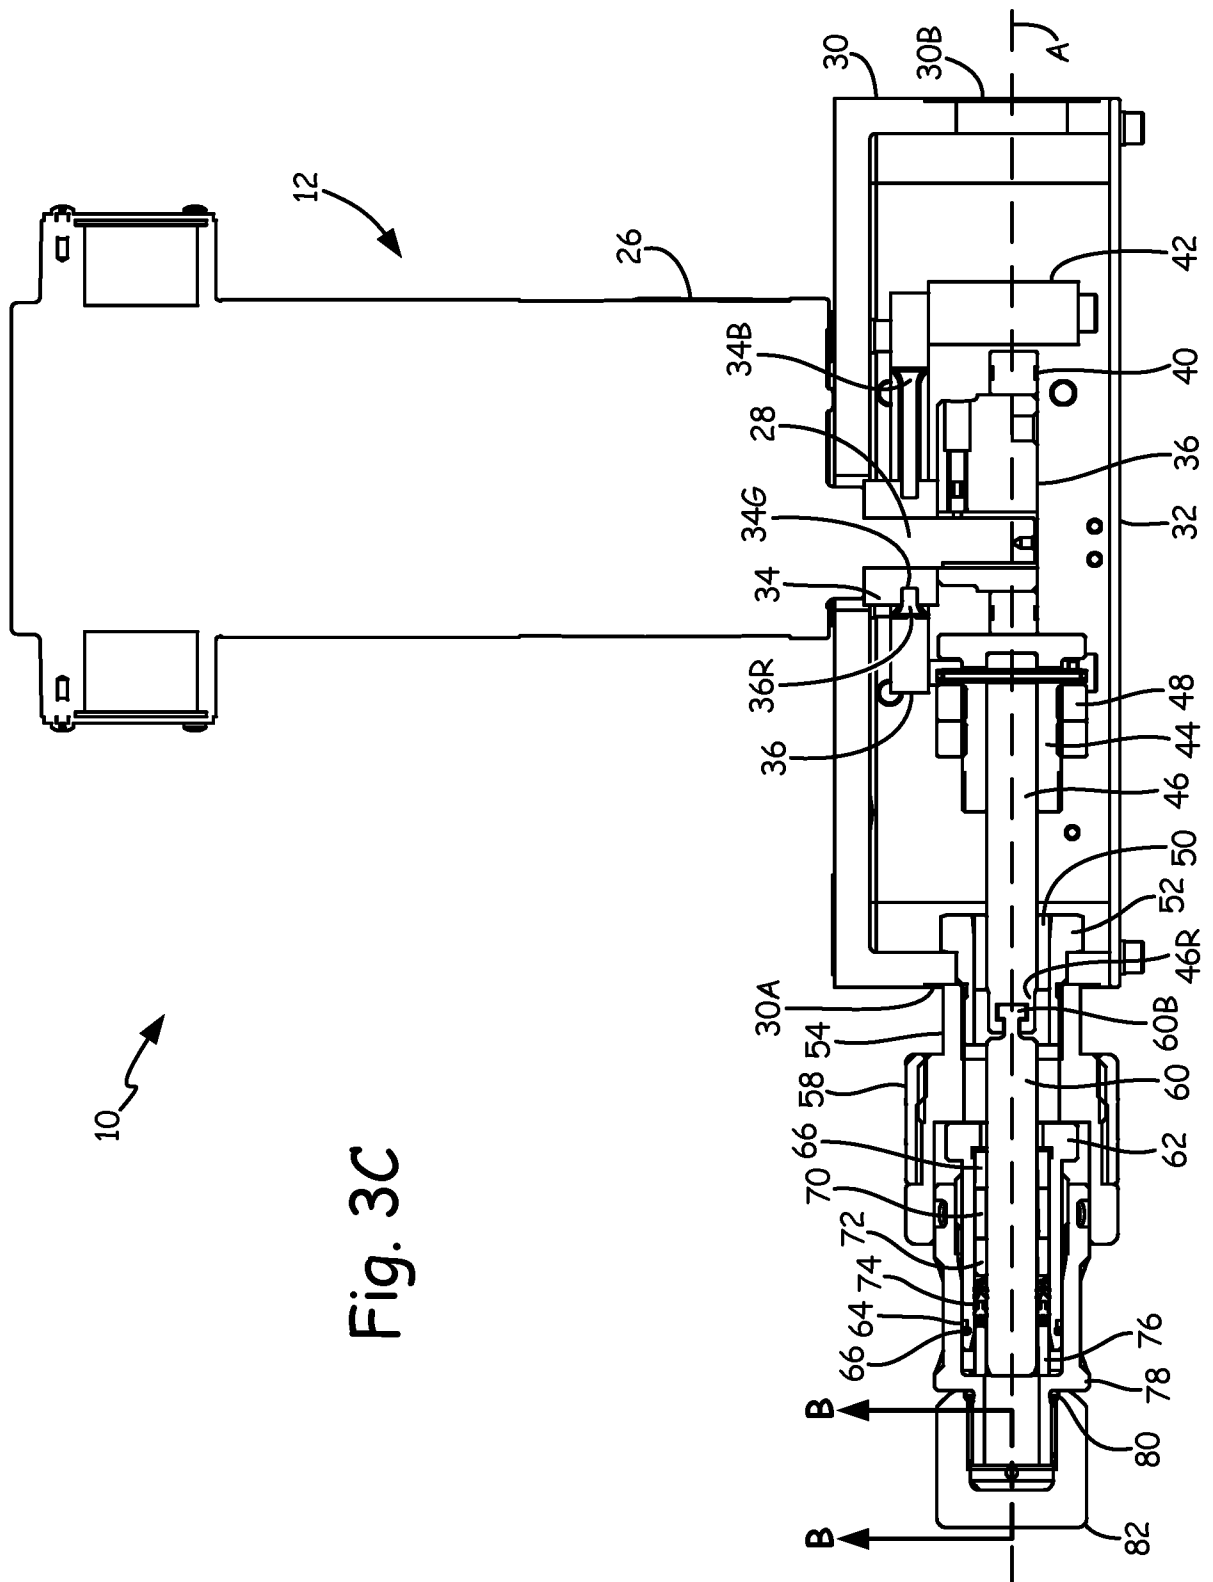


Fig. 3B



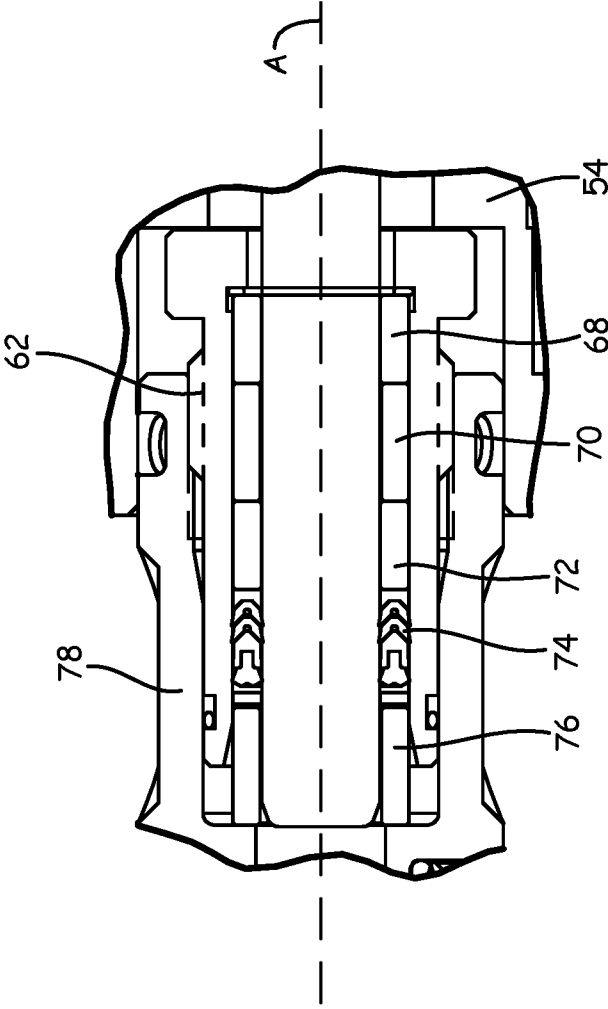


Fig. 3D

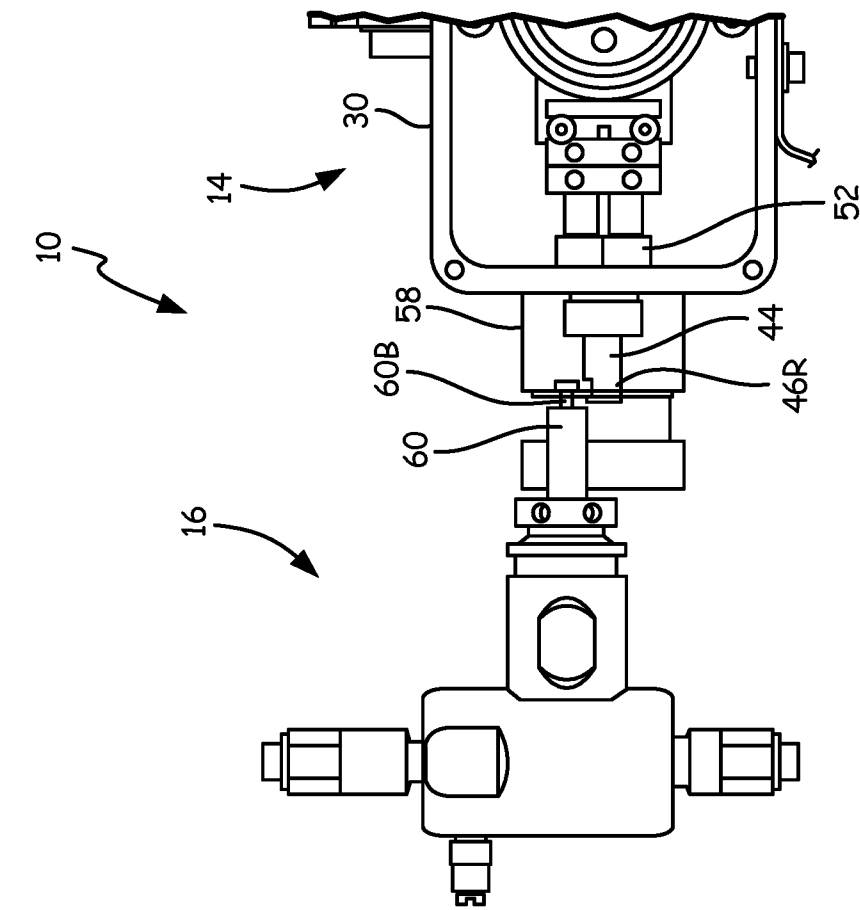


Fig. 4B

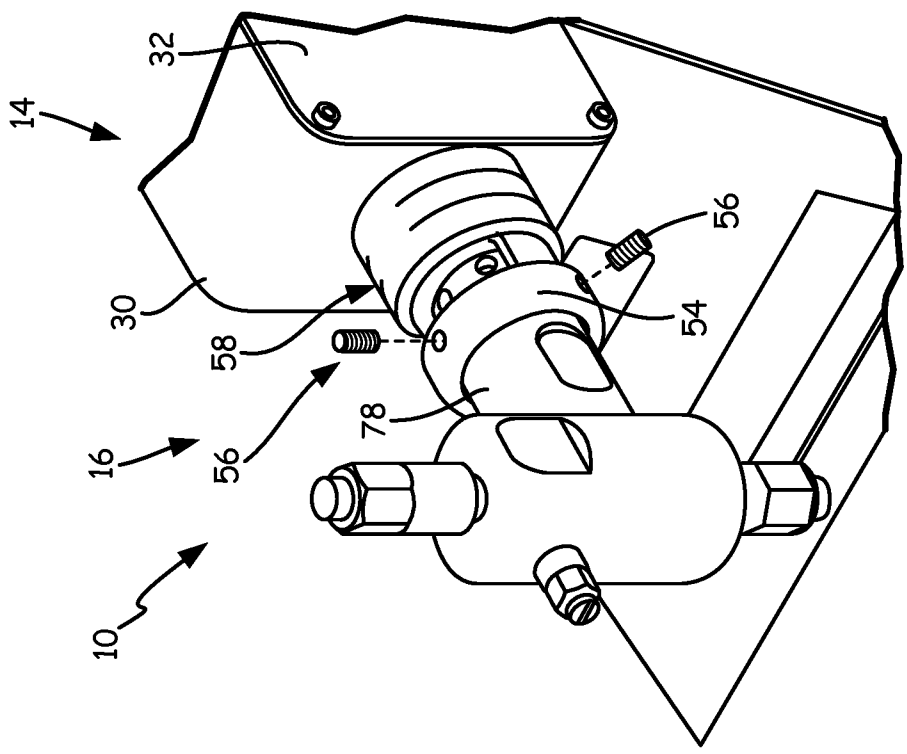


Fig. 4A

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/030160**A. CLASSIFICATION OF SUBJECT MATTER****F04B 47/02(2006.01)i, F04B 17/03(2006.01)i, F04B 15/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F04B 47/02; F01B 13/06; F01B 31/12; F04B 47/00; F04B 39/08; F15B 15/24; F04B 11/00; F04B 21/04; F04B 17/03; F04B 15/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &Keywords: metering pump, carriage assembly, plunger, piston, carriage bearing, cam, motor, and plunger return block

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007-0169619 A1 (SMITH, ALAN) 26 July 2007 See paragraphs [0022]-[0027] and figures 1-2.	1-12
A	US 4192223 A (LOMBARD, DIDIER) 11 March 1980 See column 2, lines 52-59, claim 1, and figures 1-2.	1-12
A	US 4264286 A (REINKEMEYER, JOSEPH B.) 28 April 1981 See column 2, line 19 - column 3, line 38 and figure 5.	1-12
A	US 2012-0183424 A1 (BAYYOUNK et al.) 19 July 2012 See paragraphs [0060]-[0072] and figure 1A.	1-12
A	KR 10-2012-0026399 A (GU, JA HYEON) 19 March 2012 See claim 1 and figure 1.	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 August 2016 (10.08.2016)

Date of mailing of the international search report

16 August 2016 (16.08.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

HAN, JOONG SUB

Telephone No. +82-42-481-3578



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/030160

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0169619 A1	26/07/2007	AT 442525 T	15/09/2009
		AU 2004-304052 A1	07/07/2005
		AU 2004-304052 B2	29/01/2009
		BR PI0417584 A	20/03/2007
		CA 2550579 A1	07/07/2005
		CA 2550579 C	25/05/2010
		CN 100523496 C	05/08/2009
		CN 1894504 A	10/01/2007
		EP 1740829 A1	10/01/2007
		EP 1740829 B1	09/09/2009
		ES 2333229 T3	18/02/2010
		JP 05711101 B2	30/04/2015
		JP 2007-515589 A	14/06/2007
		JP 2012-067755 A	05/04/2012
		KR 10-1245670 B1	20/03/2013
		KR 10-2006-0114706 A	07/11/2006
		MX PA06007041 A	31/08/2006
		US 7938632 B2	10/05/2011
		WO 2005-061889 A1	07/07/2005
US 4192223 A	11/03/1980	DE 2805505 A1	17/08/1978
		DE 2805505 B2	12/06/1980
		DE 2805505 C3	12/02/1981
		ES 466819 A1	01/10/1978
		FR 2380440 A1	08/09/1978
		FR 2380440 B1	05/12/1980
		GB 1549157 A	01/08/1979
		IT 1101778 B	07/10/1985
US 4264286 A	28/04/1981	None	
US 2012-0183424 A1	19/07/2012	AR 084230 A1	02/05/2013
		AR 084231 A1	02/05/2013
		AU 2011-338305 A1	04/07/2013
		AU 2011-338323 A1	25/07/2013
		CA 2820595 A1	14/06/2012
		CA 2820648 A1	14/06/2012
		CN 103339379 A	02/10/2013
		CN 103348139 A	09/10/2013
		EA 201390845 A1	30/12/2013
		EA 201390846 A1	30/12/2013
		EP 2649315 A2	16/10/2013
		EP 2649315 A4	11/05/2016
		EP 2649316 A2	16/10/2013
		EP 2649316 A4	23/12/2015
		MX 2013006387 A	13/09/2013
		MX 2013006402 A	13/09/2013
		SG 191011 A1	31/07/2013
		SG 191012 A1	31/07/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/030160

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		UA 109682 C2	25/09/2015
		UA 109683 C2	25/09/2015
		US 2012-144995 A1	14/06/2012
		US 2013-216413 A1	22/08/2013
		US 2014-322033 A1	30/10/2014
		US 2014-322034 A1	30/10/2014
		US 8662864 B2	04/03/2014
		US 8662865 B2	04/03/2014
		US 8668470 B2	11/03/2014
		WO 2012-078870 A2	14/06/2012
		WO 2012-078870 A3	27/09/2012
		WO 2012-078888 A2	14/06/2012
		WO 2012-078888 A3	27/12/2012
KR 10-2012-0026399 A	19/03/2012	None	