




(86) **Date de dépôt PCT/PCT Filing Date:** 2011/06/08
(87) **Date publication PCT/PCT Publication Date:** 2011/12/15
(45) **Date de délivrance/Issue Date:** 2019/01/22
(85) **Entrée phase nationale/National Entry:** 2012/12/04
(86) **N° demande PCT/PCT Application No.:** US 2011/039576
(87) **N° publication PCT/PCT Publication No.:** 2011/156456
(30) **Priorité/Priority:** 2010/06/08 (US61/352,703)

(51) **Cl.Int./Int.Cl. H01P 5/103** (2006.01)
(72) **Inventeur/Inventor:**
BECKER, CHARLES D., US
(73) **Propriétaire/Owner:**
WIRELESS EXPRESSWAYS INC., US
(74) **Agent:** KIRBY EADES GALE BAKER

(54) **Titre : COUPLEUR DE SIGNAUX VARIABLES UNIPOLAIRE REPLIE**
(54) **Title: FOLDED MONOPOLE VARIABLE SIGNAL COUPLER**

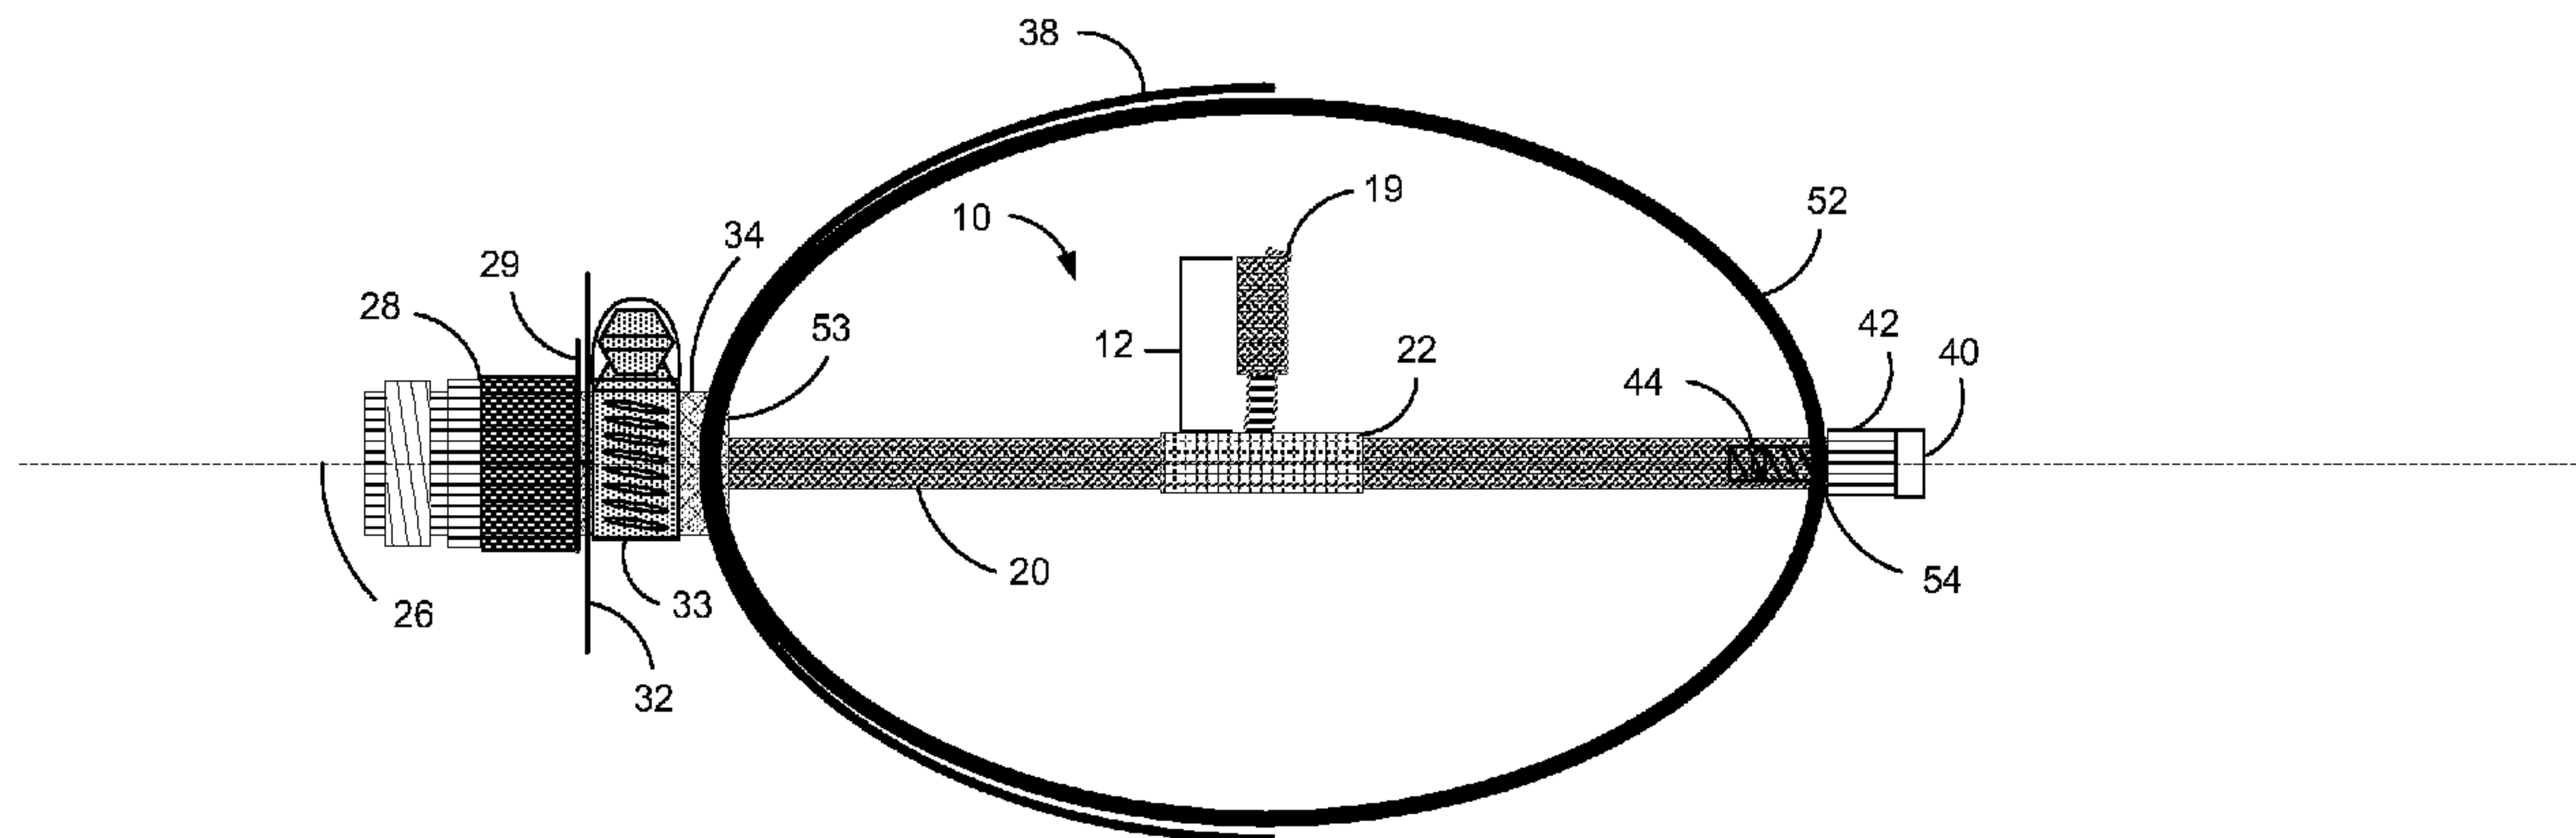

(57) **Abrégé/Abstract:**

A signal coupler for coupling wireless signals out of and into a waveguide system is described. The signal coupler includes an input output connector, an outer conductor coupled to the input output connector, and a radiator section, wherein the radiator section is configured to rotate about a center axis of the outer conductor. A wireless distribution system, including a waveguide with a hollow cross-sectional structure and a signal coupling device, is also described. A wireless distribution system, including a waveguide with a hollow cross-sectional structure and a plurality of signal coupling devices, is also described. A method of operating a wireless distribution system is also described. The method includes providing a wireless distribution system and inserting a first group of wireless signals in a preselected bandwidth into the waveguide.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
15 December 2011 (15.12.2011)



(10) International Publication Number
WO 2011/156456 A3

(51) International Patent Classification:
H01P 5/103 (2006.01)

(21) International Application Number:
PCT/US2011/039576

(22) International Filing Date:
8 June 2011 (08.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/352,703 8 June 2010 (08.06.2010) US

(72) Inventor; and

(71) Applicant : BECKER, Charles, D. [US/US]; 14507
Circle A Trail, Helotes, TX 78023 (US).

(74) Agents: CANGRO, Bradford, A. et al.; Morgan, Lewis
& Bockius LLP, 1111 Pennsylvania Avenue, NW, Wash-
ington, DC 20004 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
15 March 2012

(54) Title: COAXIAL LINE TO WAVEGUIDE TRANSITION WITH FOLDED MONOPOLE VARIABLE SIGNAL COUPLER

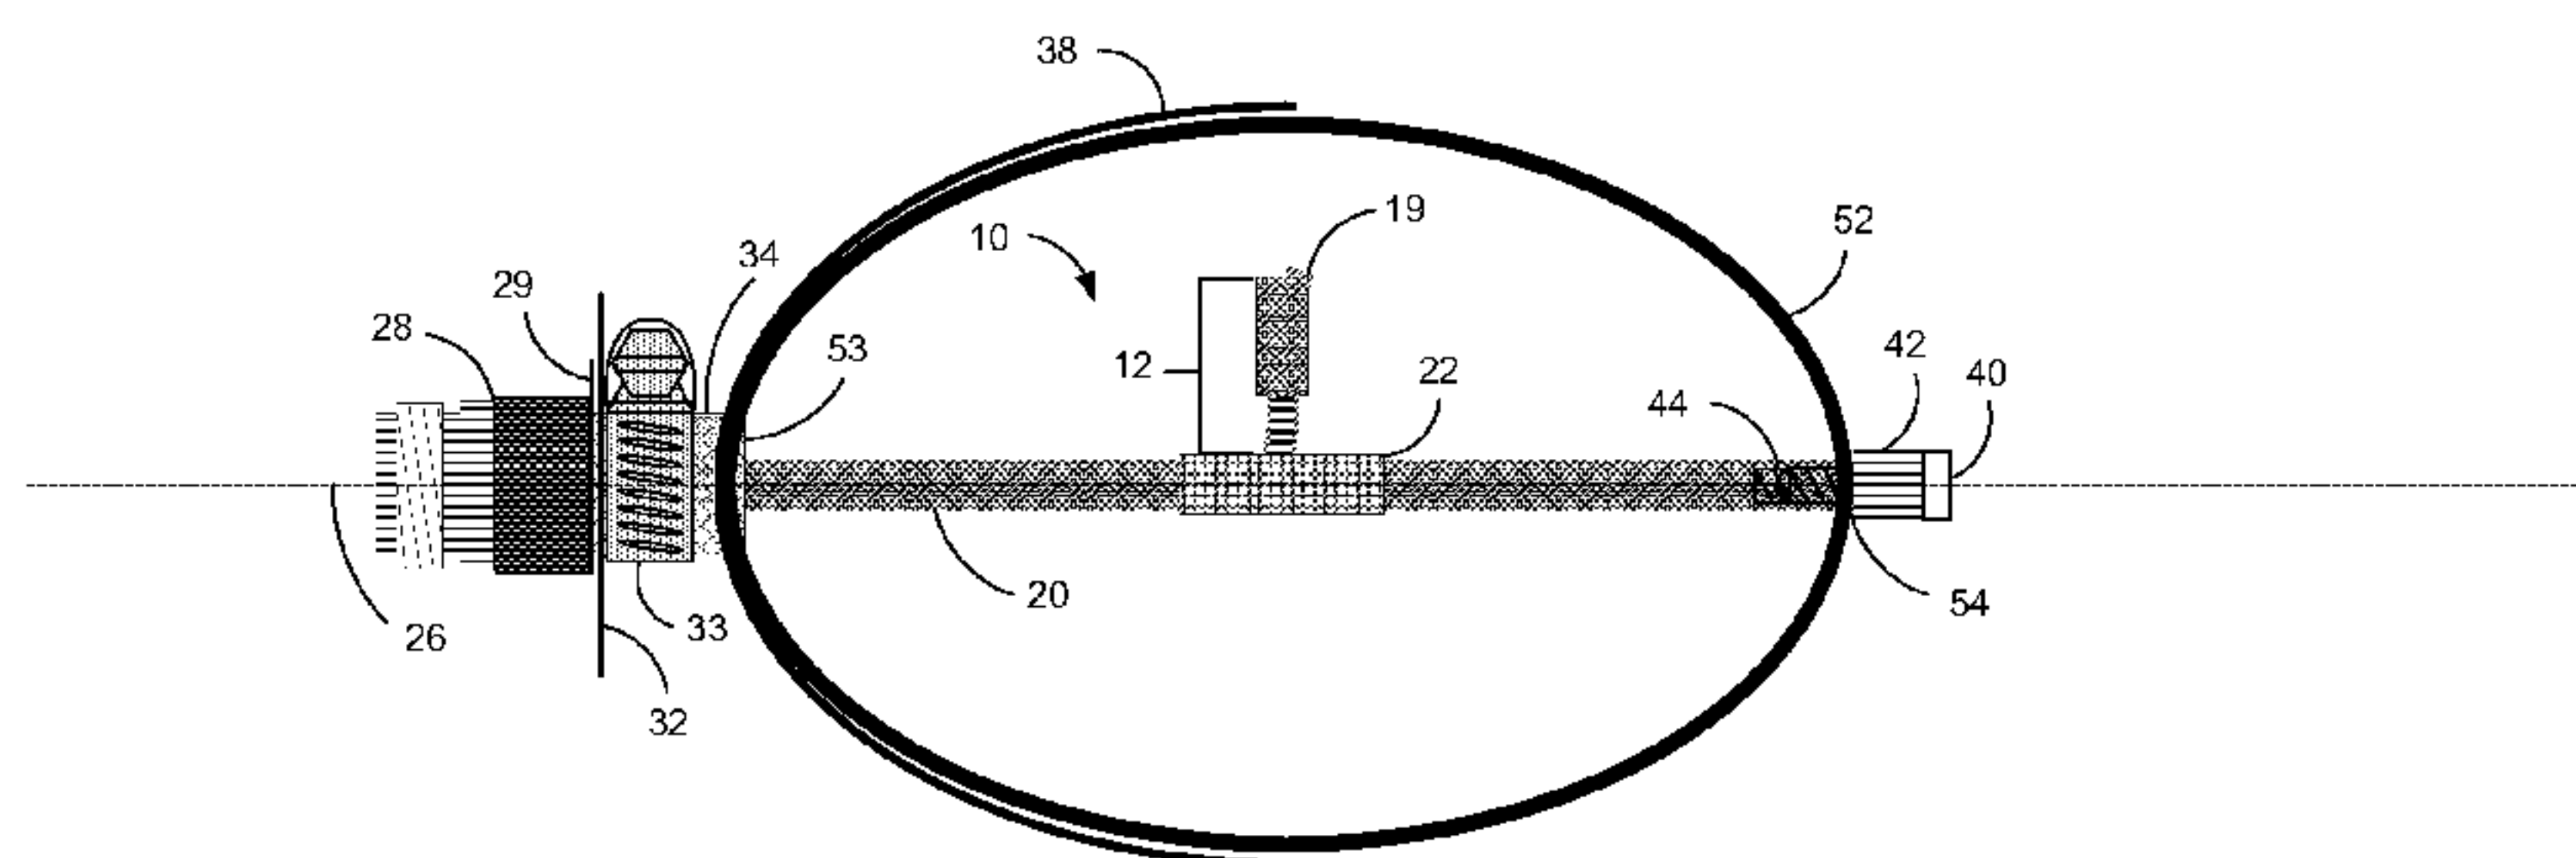


FIG. 2

(57) Abstract: A signal coupler for coupling wireless signals out of and into a waveguide system is described. The signal coupler includes an input output connector, an outer conductor coupled to the input output connector, and a radiator section, wherein the radiator section is configured to rotate about a center axis of the outer conductor. A wireless distribution system, including a waveguide with a hollow cross-sectional structure and a signal coupling device, is also described. A wireless distribution system, including a waveguide with a hollow cross-sectional structure and a plurality of signal coupling devices, is also described. A method of operating a wireless distribution system is also described. The method includes providing a wireless distribution system and inserting a first group of wireless signals in a preselected bandwidth into the waveguide.

WO 2011/156456 A3

Folded Monopole Variable Signal Coupler

FIELD

[0003] The present disclosure relates to wireless (radio) distribution systems, and more particularly to coupling devices that efficiently couple variable amounts of radio frequency energy from, or to, a hollow waveguide for wireless distribution, or for other purposes.

DESCRIPTION OF THE RELATED ART

[0004] This background information is provided in the context of a specific problem to which the disclosed subject matter in one or more of its aspects is applicable: the efficient variable coupling of radio frequency energy from, or to, a hollow metallic waveguide or metallic cavity.

[0005] The rapidly increasing use of both portable and fixed wireless-based communications devices requires more efficient and precise radio signal illumination of specific areas inside and outside building structures to fully utilize

the government-limited radio frequency spectrum allocations and channels that are presently available.

[0006] The deployment of increasingly higher speed data, voice, and video information encoded in digital and analog wireless signals is increasing demands on the design of antenna systems in buildings and other facilities where obstructions, distances, or government regulations may limit the range of radio transmissions. This is particularly the case where government regulations and industry standards limit transmit power to low levels. There is also a concurrent need to limit transmit power from portable personal wireless devices to decrease drain on portable power sources, such as batteries, and also to reduce interference to nearby systems operating on the same channel. An efficient and variable coupling system from a waveguide-based wireless distribution system is highly desirable to solve these problems.

[0007] It is becoming increasingly difficult to provide reliable communications to users of higher-speed wireless data, voice and video services when centralized antennas in a facility are employed due to amplitude attenuation and reflection delays suffered by wireless signals passing through walls, partitions, floors, stair wells, and other structures and objects typically found in buildings prior to reaching client receivers.

[0008] There is a continuing and increasing challenge to cover all required areas in a facility with sufficient and predictable signal strength and quality that will provide reliable communications in an environment of government regulations that limit the maximum output power of wireless transmitters. In particular, increasingly higher data rates in digital wireless systems, with their attendant higher levels of encoding, are demanding higher signal-to-noise ratios and

higher signal quality to support full-speed, reliable operation. One of the most efficient methods of distributing wireless signals to users known to date is to employ hollow metallic waveguide transmission media. Variable output ports
5 on a hollow metallic waveguide system are needed to sufficiently and accurately apportion specific radiated levels (and thereby received) levels in areas of a user's facility.

[0009] IEEE 802.11a/b/g/n communications networks, for example, need antenna systems that will provide full, high-
10 speed coverage to all users.

[0010] Other types of wireless systems that operate in the 1.5 GHz and higher frequency ranges, such as Bluetooth, ZigBee, and RFID systems will also benefit from more efficient signal distribution systems. The standards for these
15 technologies specify simpler encoding formats, lower data rates, and lower transmit power, to miniaturize components, reduce cost per function, and reduce overall device drain from portable power sources, such as batteries. Several of these factors combine to presently limit the communications range or
20 economical deployment of these types of systems. Although limited range is desirable in some instances, many wireless systems suffer from limited coverage and/or the ability to cover desired areas with defined signal strength and quality.

[0011] Many modern office buildings and schools use the
25 volume of space above ceilings as a Heating Ventilating and Air Conditioning (HVAC) return air plenum for circulating air from human-occupied areas. Most government-mandated federal and local fire codes impose stringent requirements on the composition of items installed in plenum spaces to prevent the
30 generation of noxious fumes that will recycle through an HVAC system into human-occupied areas during the occurrence of a fire in a plenum air space. As a result, coaxial cables and

any other types of signaling components designed for service in plenum spaces often use a relatively high volume of special insulating materials in their construction, such as DuPont polytetrafluoroethylene ("Teflon[®]"), to meet fire regulations, which causes radio frequency coaxial cables made from this type of material to be prohibitively expensive in many applications. Because of these restrictions, presently available technology does not offer practical, efficient, and low-cost hidden wireless distribution systems that are designed for applications in HVAC plenum spaces.

[0012] The new technology presented in the present disclosure addresses solutions to resolve these and other shortcomings of the present technology in the field relating to the requirement for efficient, cost-effective, variable coupling devices used in conjunction with hollow waveguide wireless systems and other applications where an inexpensive and simplified means is needed to variably couple microwave signals from a hollow metallic waveguide or cavity.

20 **SUMMARY**

[0013] The techniques and concepts here disclosed provide variable wireless (radio) couplers for use in hollow metallic waveguide-based applications using wireless distribution systems for disseminating and gathering wireless signals in buildings, such as offices, factories, warehouses, schools, homes, and government facilities, and in open venues such as sports stadiums, parks, motorways, and railways, and for application in any instance where variable coupling or energy to or from a hollow metallic waveguide or cavity is required.

30 **[0014]** An additional application of the present disclosure addresses the need for an efficient and inexpensive variable microwave signal divider using the disclosed invention.

Although fixed divider devices are available for dividing a microwave signal in integer fashion, e.g. 2,3,4, etc., they are excessively expensive for many applications where signals of a wide and variable ratio are needed, for example, to
5 construct a wireless distribution system with multiple, different zones fed from a common transceiver.

[0015] In one instance the disclosed folded monopole variable signal couplers couple signals from a hollow metallic waveguide system and connect them to antennas at locations
10 proximate to signal receivers. Intermediate devices between the referenced coupler and antennas, such as coaxial cables or additional hollow metallic waveguides may also be incorporated.

[0016] These and other advantages of the disclosed subject
15 matter, as well as additional novel features, will be apparent from the description provided herein. The intent of this summary is not to be a comprehensive description of the claimed subject matter, but rather to provide a limited overview of some of the subject matter's functionality. Other
20 systems, methods, features and advantages here provided will become apparent to one skilled in the art upon examination of the following **FIGURES** and detailed description. It is intended that all such additional systems, methods, features and advantages as may be included within this description be
25 considered within the scope of the accompanying claims.

BRIEF DESCRIPTIONS OF THE DRAWINGS

[0017] The features, nature, and advantages of the disclosed subject matter will become more apparent from the
30 detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify

various elements correspondingly appearing throughout this description and wherein:

[0018] FIGURE 1 illustrates an exploded side view of an embodiment of the folded monopole variable signal coupler in accordance with aspects of the present disclosure before
5 installation in a hollow metallic elliptical waveguide;

[0019] FIGURE 2 illustrates the assembled folded monopole variable signal coupler shown mounted in an example cross-section of a hollow metallic elliptical waveguide;

10 **[0020] FIGURE 3** illustrates an on-axis, end-view of the rotation-capable radiator assembly of an example folded monopole variable signal coupler residing internal to a hollow metallic elliptical waveguide;

[0021] FIGURE 4 illustrates a view of a typical opening
15 that will mechanically accept the monopole variable signal coupler into the narrow side of an example hollow metallic elliptical waveguide and viewed orthogonally to the linear axis of the hollow metallic elliptical waveguide;

[0022] FIGURE 5 illustrates an orthogonal view of the axis
20 of an example hollow metallic elliptical waveguide showing the external side of the coaxial connector of the folded monopole variable signal coupler, an example dial indicator of the coupler's relative output coupling factor in decibels versus rotation, an example freedom of rotation, and an example
25 method of attaching the folded monopole variable signal coupler to the example hollow metallic elliptical waveguide;

[0023] FIGURE 6 illustrates an example method of changing the shape and limits of the output versus rotation of the radiator section of the folded monopole variable signal
30 coupler around its common central axis;

[0024] FIGURE 7 illustrates an external view of several folded monopole variable signal couplers mounted in a section

of hollow metallic waveguide showing an example multi-port variable signal divider of a common input source signal;

[0025] FIGURE 8 shows an example application of folded monopole variable signal couplers used in a waveguide cavity to variably divide signals from a single transceiver for use in two receiver zones in a facility; and

[0026] FIGURE 9 illustrates an exemplary use of signal couplers in a dual-waveguide wireless distribution system.

10 **DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS**

[0027] The disclosed subject matter includes various embodiments of a Folded Monopole Variable Signal Coupler shown in the above-listed drawings, where like reference numerals designate like parts and assemblies throughout the several views. Reference to various embodiments does not limit the scope of the claimed subject matter.

[0028] The terms "wireless" and "radio" are used synonymously throughout the Detailed Description to generally refer to any form of wireless, i.e., transmitted or received radio signal communication at any applicable frequency, unless a specific communication scheme and/or frequency is indicated (such as IEEE 802.11a,b,n Bluetooth, ZigBee, PCS, etc.).

[0029] FIGURE 1 illustrates an exploded exemplary embodiment of a folded monopole variable signal coupler **10**. Radiator section **12** is made up of insulated center conductor **14** and inductance section outer conductor **18**. Insulated center conductor **14** includes insulation **15** and center conductor **16**, and it starts at the top of inductance section outer conductor **18**. Insulated center conductor **14** is electrically attached to the top of inductance section outer conductor **18** at soldered connection **19** (shown in Fig. 2), which forms a shorted inductive coaxial section of transmission line, and passes

down through inductance section outer conductor **18**, then bends and passes coaxially through hollow outer conductor **20** and presents its center conductor **16** for connection to coaxial connector center conductor **24**. The location where center conductor **16** passes through support sleeve **22** may optionally incorporate a flexible joint to allow easier insertion into hollow elliptical waveguide **52** (shown in Fig. 2). In some embodiments, the portion of the insulated center conductor **14** between support sleeve **22** and inductance section outer conductor **18** does not include insulation **15**. Support sleeve **22** may act as a mechanical support for the junction of insulated center conductor **14** where it enters outer conductor **20**. In some embodiments, screw **40** mates with screw thread mating area **44** after passing through outer conductor **20** through exit hole **54** (shown in Fig. 2) and screw spacer **42**. In other embodiments, the length of outer conductor **20** is shorter than the width of waveguide **52**, so it does not pass through exit hole **54**. Outer conductor **20** may extend, for example, approximately one quarter wavelength beyond the junction of insulated center conductor **14** and outer conductor **20**.

[0030] The common center axis **26** is a common center line to all elements in **FIGURE 1**, except the radiator section **12**. With reference to **FIGURE 1** and **FIGURE 2**, coaxial connector body **28** may act as a mechanical and electrical connection point for a mating external input connector ground for radiator section **12**. Coaxial connector center conductor **24** inserts into coaxial connector body **28** and is followed by outer conductor **20** that secures to the ground shell of coaxial connector body **28**. Scale pointer **29** is mechanically attached to coaxial connector body **28** and metallic spacer **30**. Coupling indicator scale **32** is mechanically attached to slotted sleeve **34**. Slotted sleeve **34** is attached to metal sheet mounting strap **38** which is secured

to hollow elliptical waveguide **52**. Securing clamp **33** is used to fix the rotated position of all components on common center axis **26** except securing clamp **33**, slotted sleeve **34**, and metal sheet mounting strap **38** after rotational adjustment is made.

5 Sleeve slots **36** allow tightening of slotted sleeve **34** around metallic spacer **30**. Both securing clamp **33** and screw **40** are tightened after the desired amount of signal coupling is accomplished by the rotation of radiator section **12** around common center axis **26** as shown by rotation arrow **50** in **Figure**

10 **3**. As shown in **FIGURE 2**, radiator section **12**, in its illustrated position, will be maximally coupled to the electrical field of the fundamental transmission mode in hollow elliptical waveguide **52**. This same condition of maximum coupling to the waveguide is shown in **FIGURE 5** by the position

15 of scale pointer **29** in an example embodiment.

[0031] Other geometries of hollow waveguides, such as hollow rectangular or hollow circular metallic waveguide, or any linearly consistent hollow structure with a metallic inner surface of high electrical conductivity and sufficient skin

20 depth in its inner surface that will support low loss at the desired frequency may also be employed with good results.

[0032] Entry hole **53** in **FIGURES 2** and **4** is the entry point of the folded monopole variable signal coupler into hollow elliptical waveguide **52**. The shape and position of entry hole

25 **53** are chosen to allow entry of folded monopole variable signal coupler **10** into hollow elliptical waveguide **52** while causing low disruption of signal flow in the structure of hollow elliptical waveguide **52**. After mounting in hollow elliptical waveguide **52**, metal sheet mounting strap **38** and

30 metallic spacer **30** cover entry hole **53** and fill entry hole **53** to minimize undesired disruption of the electromagnetic fields in hollow elliptical waveguide **52**. Metal sheet mounting strap

38 is shown secured to hollow elliptical waveguide **52** with example securing clamps **62**. Outer conductor **20** exits hollow elliptical waveguide **52** at exit hole **54**.

[0033] **FIGURE 5** shows the complete folded monopole variable signal coupler **10** mounted in the narrow side of example hollow elliptic waveguide **52**. By first releasing securing clamp **33** and screw **40**, shown in **FIGURE 2**, coaxial connector body **28** may be rotated around common center axis **26** to vary the amount of coupling of signals from hollow elliptical waveguide **52** provided by radiator section **12**. The amount of coupling can be calibrated and graduated on numbered dial **58** for later reference to the position of scale pointer **29**. The example scale of numbered dial **58** shown in **Figure 5** is calibrated in decibels of coupling loss.

[0034] The initial and final amounts of coupling of energy from hollow elliptical waveguide **52** caused by the rotation of radiator section **12** through a 90 degree displacement arc around common center axis **26** may be changed by selecting the electrical parameters of the inductance section outer conductor **18**, such as its length, inside diameter, outside diameter, distributed capacitance to the inner surface of hollow elliptical waveguide **52** and/or the impedance of the coaxial line formed in its interior, and/or the spacing of the bottom of inductance section outer conductor **18** from support sleeve **22**, and/or the geometry of inductance section outer conductor **18**, and/or the geometry of radiator section **12** relative to the electrical field in hollow elliptical waveguide **52** as radiator section **12** is rotated. All of these variables and resultant effects are known by those skilled in the art.

[0035] **FIGURE 6** shows one example of these possible variations that will change the overall coupling factor of

radiator section **12** and its output response characteristics. Modified radiator section **12A** is shown with inductance section outer conductor **18** set at an off-axis angle that will decrease maximum coupling of modified radiator section **12A** due to a
5 lower maximum intercept of the electric field in waveguide **52** and also decrease minimum coupling due to the inability of producing an ideal null by not being able to be positioned orthogonally to the electric field. This change may be desirable in certain applications in the field. Any variation
10 of the aforementioned parameters to change the coupling characteristics would be made with a concurrent goal of also preserving a desired voltage standing wave ratio exhibited by the folded monopole variable signal coupler **10** as presented to an external connection at coaxial connector body **28**.

15 **[0036]** **Figure 7** shows three or more folded monopole variable signal couplers **10** installed in waveguide cavity **64**, which may be any hollow metallic waveguide that supports the transmission of electromagnetic signals. Resistive terminations **66** are employed in the ends of waveguide cavity
20 **64** to absorb excessive energy injected into waveguide cavity **64** and to minimize reflections in waveguide cavity **64**. These terminations could, for example, be standard RF absorbing material placed at the ends of the cavity, or could be electric or magnetic probes inside waveguide cavity **64** with
25 resistive terminations. If probes, they can be placed at approximately one quarter wavelength from reflecting end **68** to capture essentially all of the energy propagating in the direction of a reflecting end **68** if a resistive termination **66** is not used, and should be, for example, approximately one
30 quarter electrical wavelength long. First, Second, and Third coupler input/output ports **70**, **72** and **74**, respectively, on their separate folded monopole variable signal couplers are

used to variably inject or retrieve signals from waveguide cavity **64** and may be configured, for example, as depicted in **Figure 5**. Any number of ports may be installed in waveguide cavity **64**, depending on the requirements of a particular application as indicated by optional coupler positions **78**. A typical application may be, for example, the controlled summation of the amplitude of signals among a plurality of radiators in a wireless distributed antenna system and the reciprocal division of a signal from a common transmitter to all receivers associated with separate folded monopole variable signal couplers installed in waveguide cavity **64**.

[0037] **Figure 8** shows a simple illustration of a variable signal division wherein the output of a transceiver **80** is connected to second coupler input/output port **72** whose output is divided between an antenna receiver zone 1 antenna **82** by first coupler input/output port **70** and receiver zone 2 antenna **84** by third coupler input/output port **74**. Residual losses in cables, connectors, couplers, and waveguide cavity **64** are ignored in this example.

[0038] **Figure 9** illustrates the use of signal couplers in a dual-waveguide wireless distribution system. One possible use of a dual-waveguide wireless distribution system is to easily implement multiple-input, multiple-output (MIMO) wireless communication. Examples of MIMO wireless communication implementations include WiMAX and IEEE standard 802.11n. Referring to **Figure 9**, MIMO base unit **90** is connected to waveguides **92**. The waveguides include signal couplers **94** to transmit and receive wireless signals **96**. Thereby allowing MIMO client radio **98** to be in wireless communication with MIMO base unit **90** via waveguides **92** and signal couplers **94**.

[0039] A Folded Monopole Variable Signal Coupler and an example application have been presented. The foregoing

description of the preferred embodiments is provided to enable any person skilled in the art to make or use the claimed subject matter. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the
5 generic principles defined herein may be applied to other embodiments without the use of the innovative faculty. Thus, the claimed subject matter is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features
10 disclosed herein.

WHAT IS CLAIMED IS:

1. A signal coupler for coupling wireless signals out of and into a waveguide, comprising:

an input output connector;

5 an outer conductor coupled to the input output connector;

a radiator section, including an inductance section outer conductor, the radiator section coupled outward from a center axis of the outer conductor; and

an insulated center conductor electrically coupled to the inductance section outer conductor of the radiator section at a first end and passed coaxially through the inductance
10 section outer conductor and the outer conductor to connect to the input output connector at a second end,

wherein the radiator section is configured to rotate about the outer conductor.

2. The signal coupler of claim 1, wherein the insulated center conductor electrically terminates at a top end of the inductance section outer conductor, wherein the top end is a
15 portion of the inductance section outer conductor furthest from the outer conductor.

3. The signal coupler of claim 1, wherein the radiator section is coupled substantially perpendicular to the center axis of the outer conductor.

4. The signal coupler of claim 1, further comprising a coupling indicator scale to indicate the amount of decibels of coupling loss.

20 5. The signal coupler of claim 1, wherein the inductance section outer conductor is set at an off-axis angle to the axis normal to the center axis of the outer conductor.

6. A wireless distribution system comprising:

a waveguide with a hollow cross-sectional structure and a conductive inner surface that supports the transmission of wireless signal energy, the waveguide including an entry
25 hole;

a signal coupling device coupled to the waveguide through the entry hole of the waveguide, the signal coupling device includes:

an input output connector;

an outer conductor coupled to the input output connector through the entry
5 hole of the waveguide;

a radiator section, including an inductance section outer conductor, the radiator section coupled outward from a center axis of the outer conductor; and

an insulated center conductor electrically coupled to the inductance section
outer conductor of the radiator section at a first end and passed coaxially through the
10 inductance section outer conductor and the outer conductor to connect to the input output
connector at a second end,

wherein the radiator section is configured to rotate about the outer conductor.

7. The wireless distribution system of claim 6 wherein the shape of the hollow
waveguide is round, elliptical, rectangular, or any linear hollow shape of consistent cross
15 section.

8. The wireless distribution system of claim 6 wherein the cross-sectional structure of
the hollow waveguide is longitudinally consistent, and the inner surface of the waveguide is
electrically conductive.

9. The wireless distribution system of claim 6 further comprising a metal sheet
20 mounting strap coupled to a metallic spacer configured to electrically and mechanically cover
the entry hole of the waveguide.

10. The wireless distribution system of claim 6, further comprising:

an exit hole in the waveguide opposite the entry hole, wherein the outer conductor
passes through the exit hole of the waveguide;

25 a spacer coupled to an end of the outer conductor outside of the second hole of the
waveguide; and

a fastener connecting the outer conductor to the second hole of the waveguide.

11. A wireless distribution system comprising:

a waveguide with a hollow cross-sectional structure and a conductive inner surface that supports the transmission of wireless signal energy, the waveguide including a plurality of signal ports to inject and extract wireless signal energy; and

5 a plurality of signal coupling devices coupled through the plurality signal ports, each of the plurality of signal coupling devices includes:

an input output connector;

an outer conductor coupled to the input output connector through one of the plurality of signal ports;

10 a radiator section, including an inductance section outer conductor, the radiator section coupled outward from a center axis of the outer conductor; and

an insulated center conductor electrically coupled to the inductance section outer conductor of the radiator section at a first end and passed coaxially through the inductance section outer conductor and the outer conductor to connect to the input output
15 connector at a second end,

wherein the radiator section is configured to rotate about the outer conductor.

12. The wireless distribution system of claim 11 further comprising an additional waveguide with a hollow cross-sectional structure and a conductive inner surface that supports the transmission of wireless signal energy.

20 13. The wireless distribution system of claim 12 wherein at least one of the plurality of signal couplers is spaced at a different linear location along the waveguide than a signal coupler coupled to the additional waveguide.

14. The wireless distribution system of claim 12 wherein the waveguide and the additional waveguide are both configured to transport a group of frequencies in the same
25 bandwidth, and the group of frequencies in the waveguide is uncorrelated with the group of frequencies in the additional waveguide in at least instantaneous amplitude, frequency, or phase.

15. A method of operating a wireless distribution system comprising:

providing the wireless distribution system that includes:

a waveguide with a hollow cross-sectional structure and a conductive inner surface that supports the transmission of wireless signal energy, the waveguide including a plurality of signal ports to inject and extract wireless signal energy, and

a plurality of signal coupling devices coupled through the plurality of signal ports, each of the plurality of signal coupling devices includes:

an input output connector,

an outer conductor coupled to the input output connector through one of the plurality of signal ports,

a radiator section, including an inductance section outer conductor, the radiator section coupled outward from a center axis of the outer conductor, and

an insulated center conductor electrically coupled to the inductance section outer conductor of the radiator section at a first end and passed coaxially through the inductance section outer conductor and the outer conductor to connect to the input output connector at a second end, wherein the radiator section is configured to rotate about the outer conductor; and

inserting a first group of wireless signals in a preselected bandwidth into the waveguide.

16. The method of operating a wireless distribution system of claim 15 further comprising inserting a second group of wireless signals into the waveguide, where the first and second groups of wireless signals occupy different frequencies.

17. The method of operating a wireless distribution system of claim 15 further comprising inserting a second group of wireless signals into the waveguide, where the frequencies of the first and second groups of wireless signals are in the same bandwidth and the first group of wireless signals is uncorrelated with at least the instantaneous amplitude, frequency or phase of the second group of wireless signals.

18. The method of operating a wireless distribution system of claim 15 further comprising:

receiving in a first receiver a first group of wireless output signals originating from one of the plurality of signal couplers;

5 receiving in a second receiver a second group of wireless output signals originating from a different one of the plurality of signal couplers that is different than the first group of wireless signals in at least instantaneous amplitude, frequency or phase; and

deriving separate information from each of the first and second groups of wireless output signals that can be recombined for a total higher information delivery rate.

10 19. The method of operating a wireless distribution system of claim 18 wherein the first and second groups of wireless signals are each formatted for MIMO.

20. The method of operating a wireless distribution system of claim 15 further comprising:

15 providing an additional waveguide with a hollow cross-sectional structure and a conductive inner surface that supports the transmission of wireless signal energy,

receiving in a first receiver a first group of wireless output signals radiating from the waveguide provided in the wireless distribution system;

20 receiving in a second receiver a second group of wireless output signals radiating from the additional waveguide that is different than the first group of wireless signals in at least instantaneous amplitude, frequency or phase; and

deriving separate information from each of the first and second groups of wireless output signals.

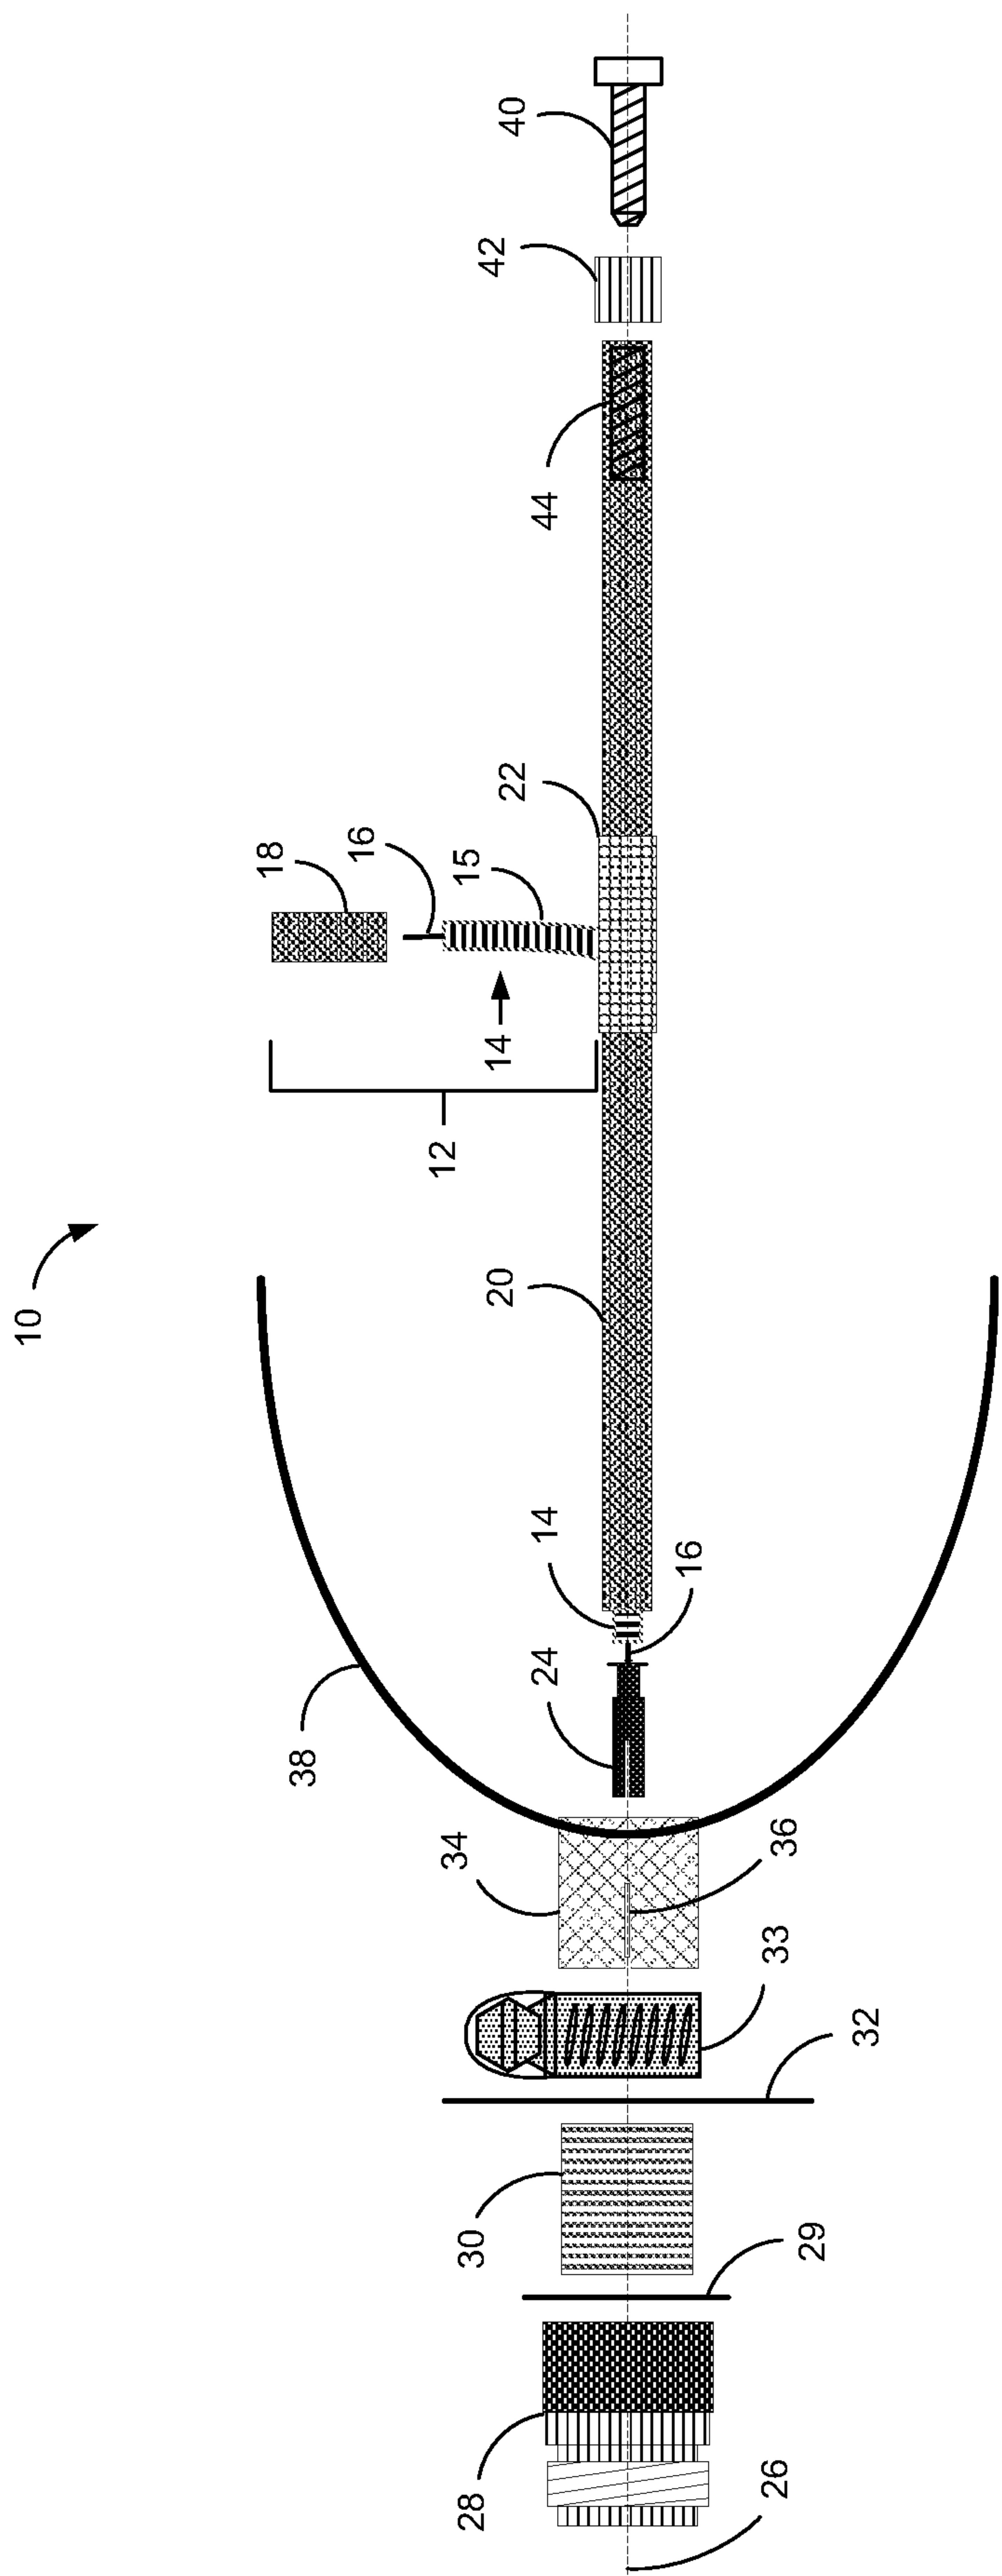


FIG. 1

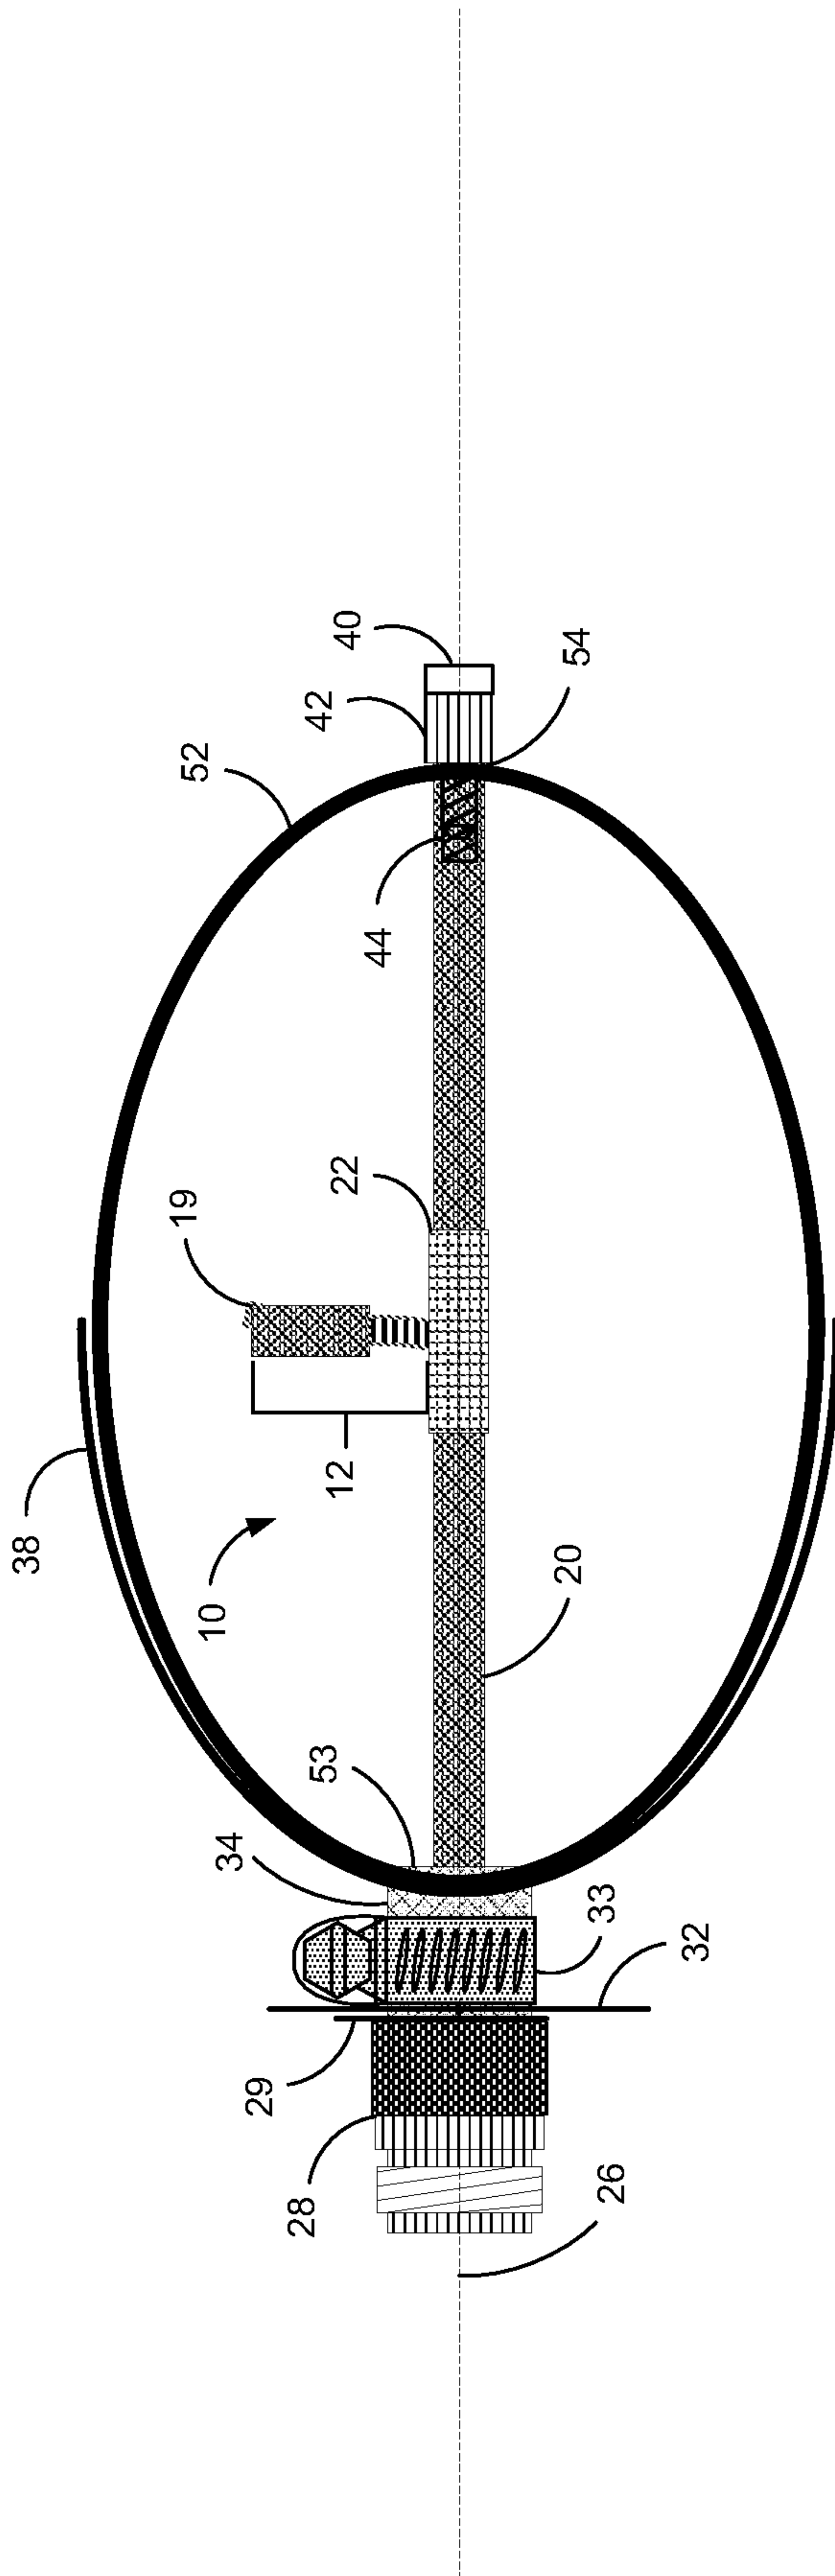


FIG. 2

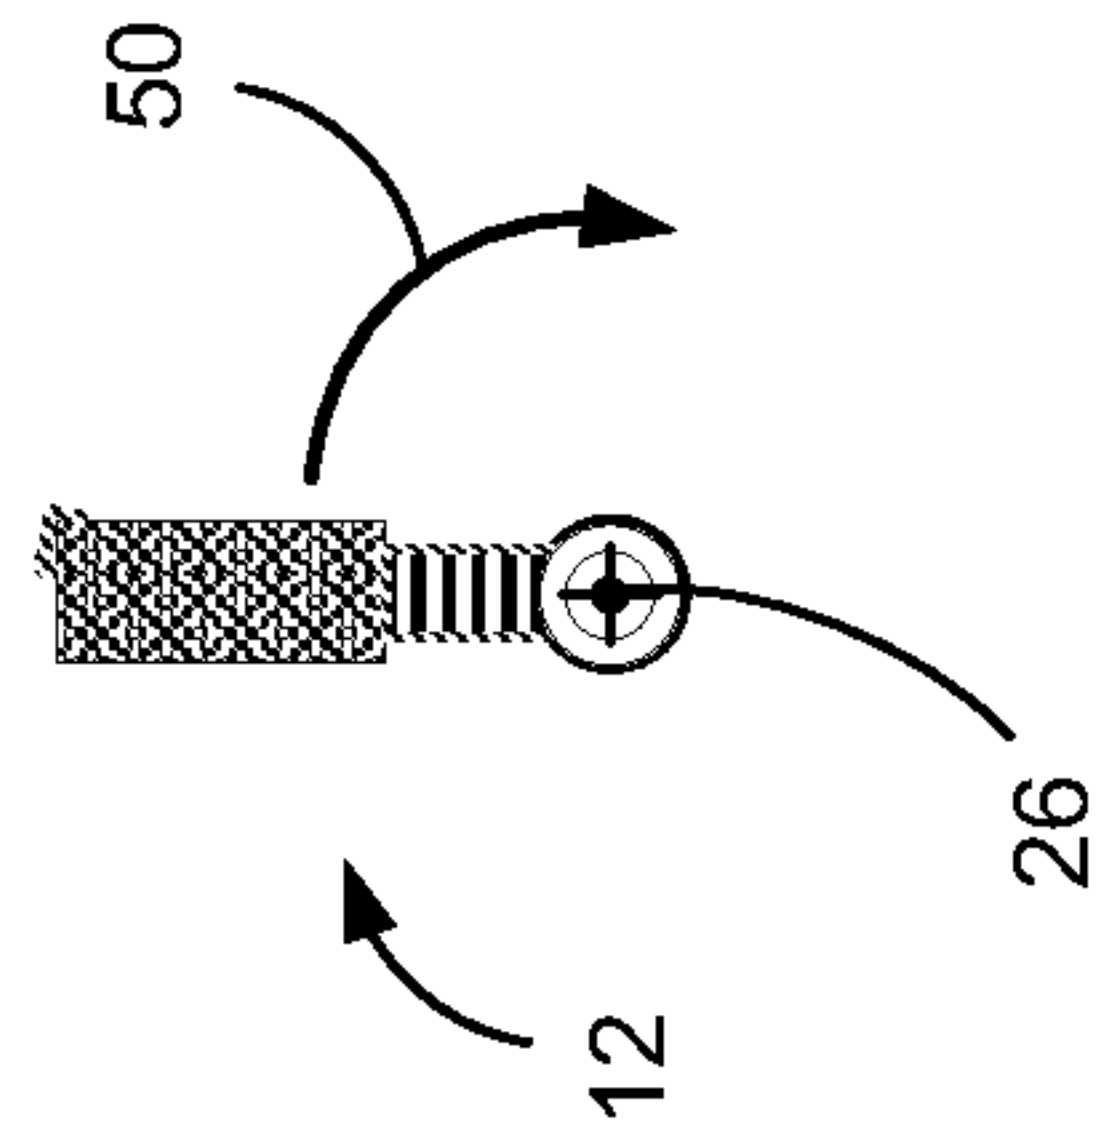


FIG. 3

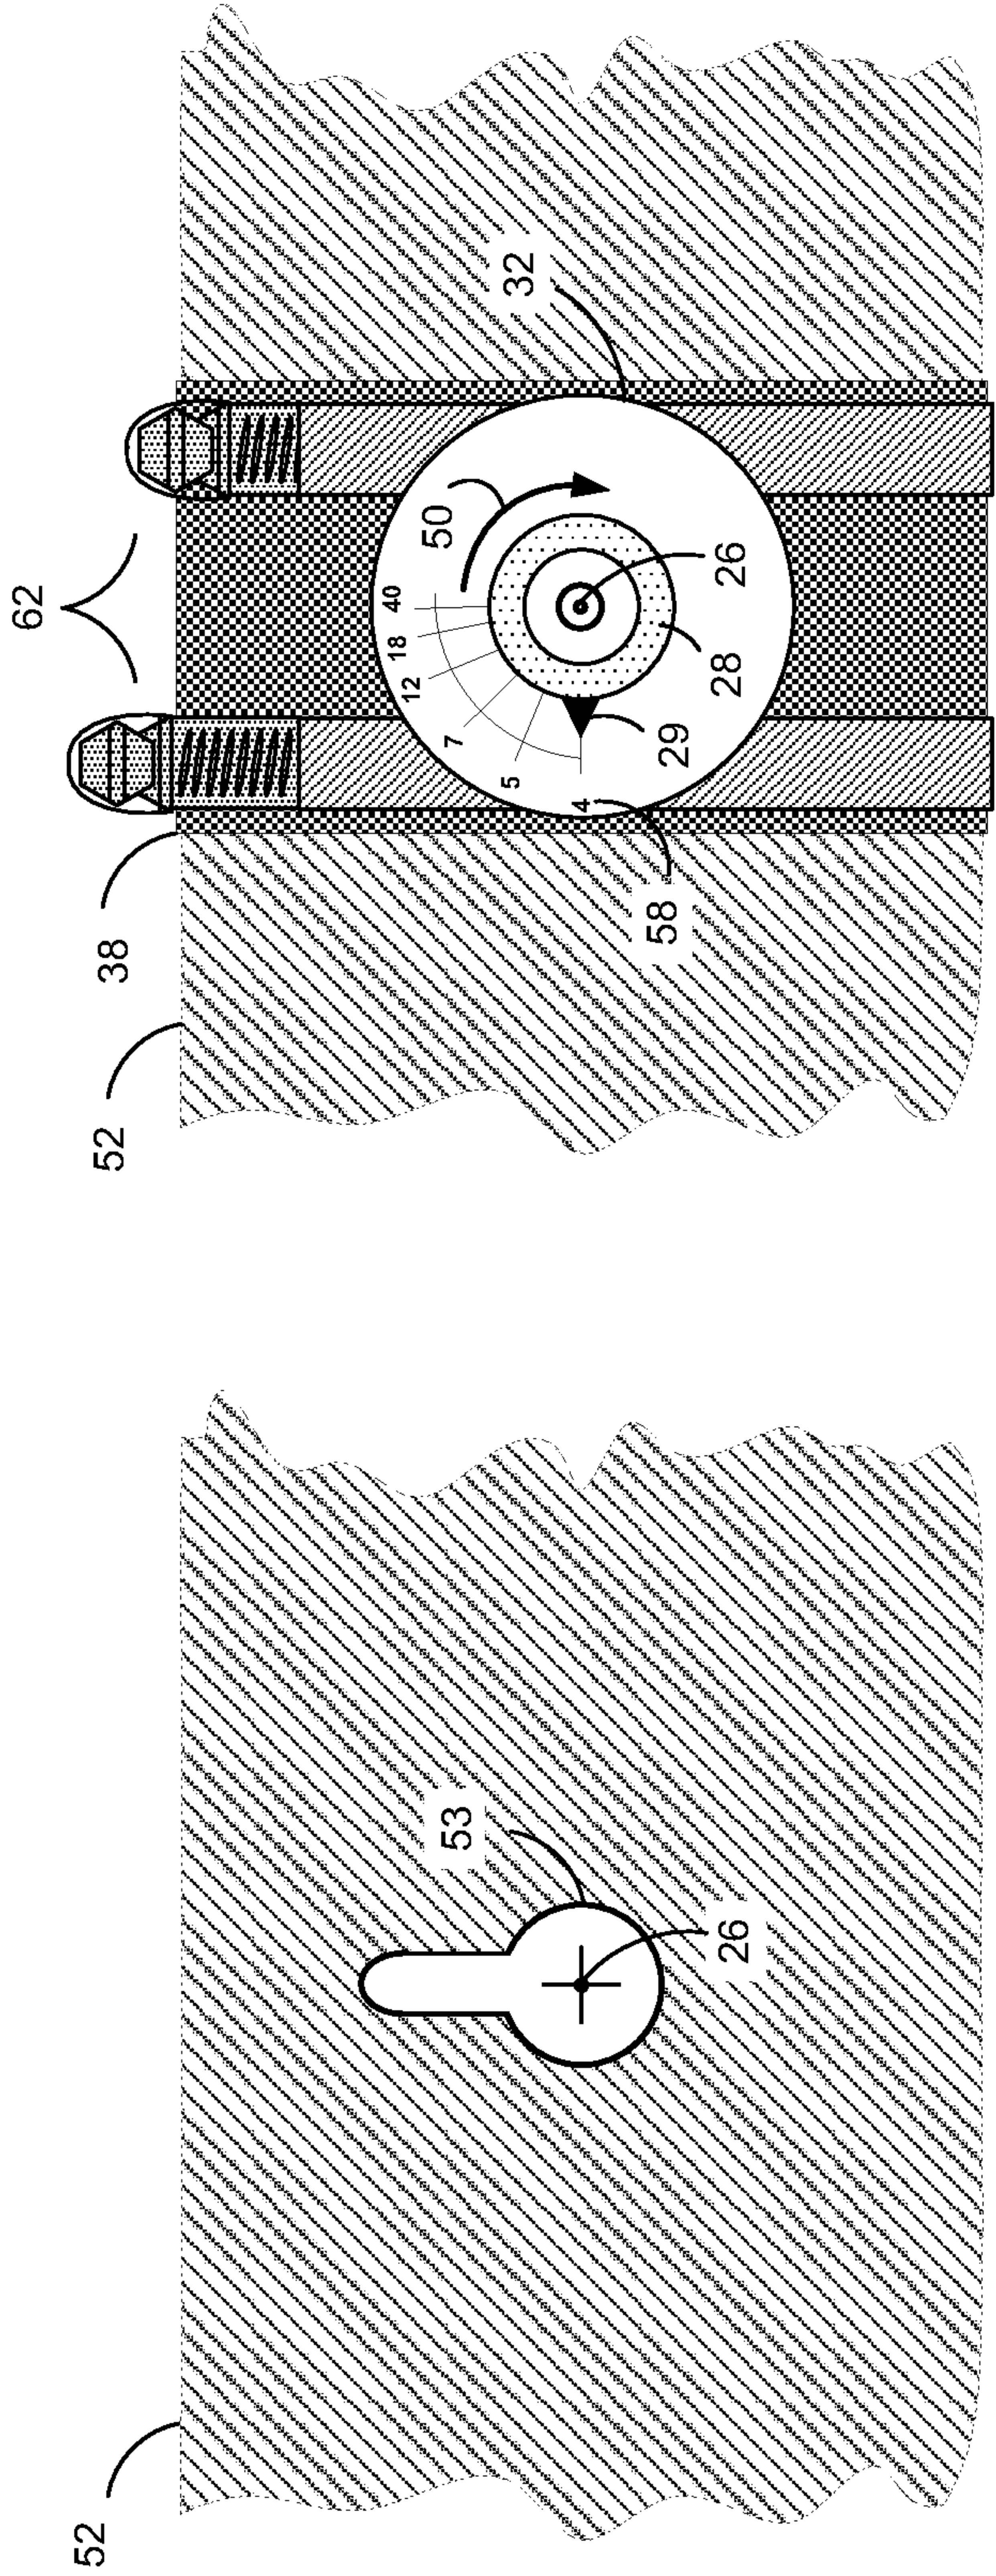


FIG. 5

FIG. 4

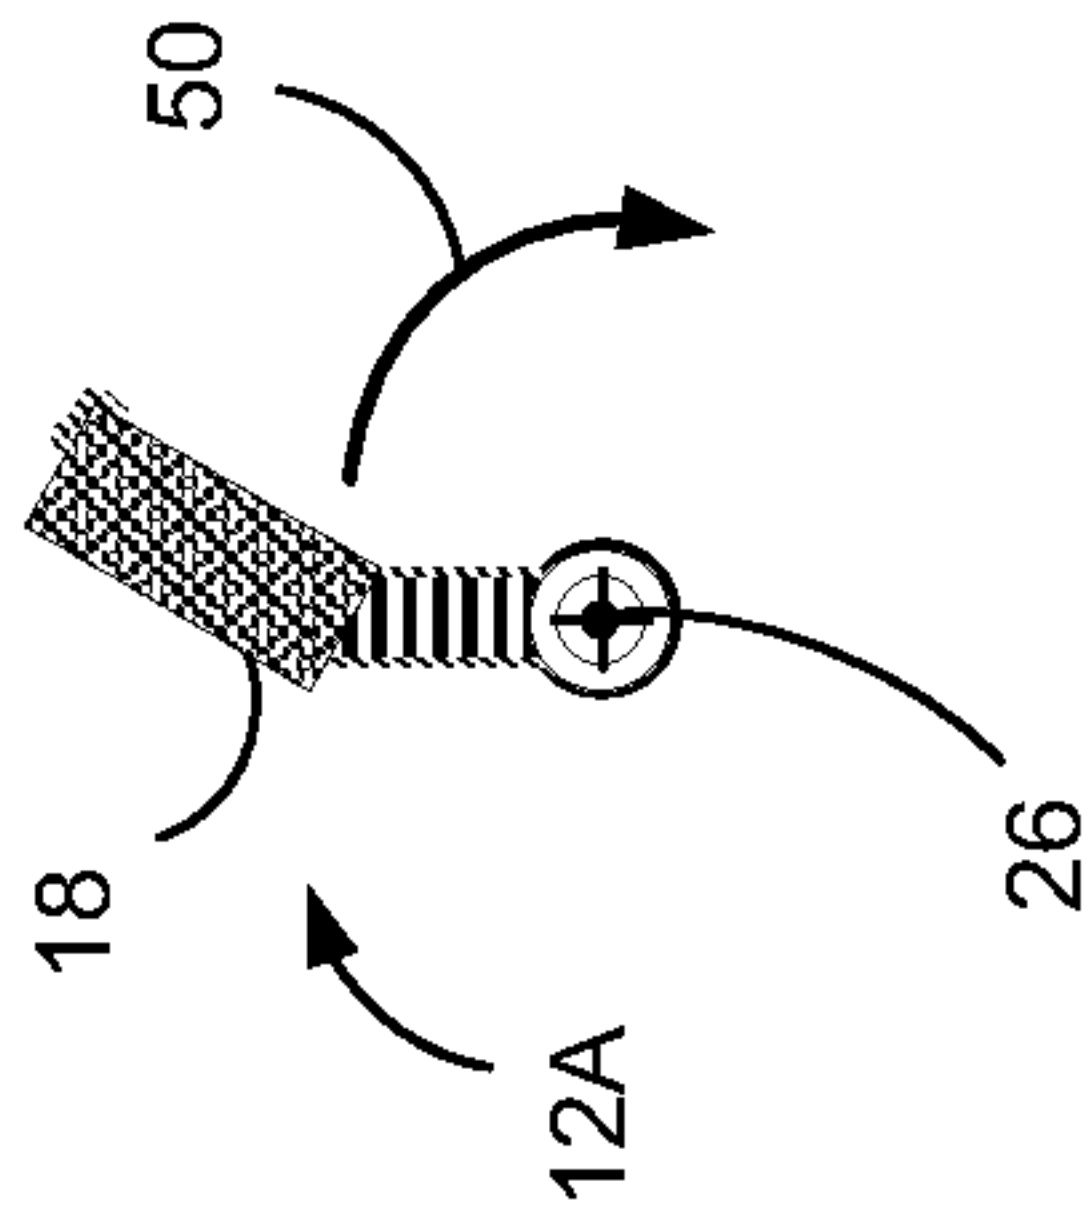


FIG. 6

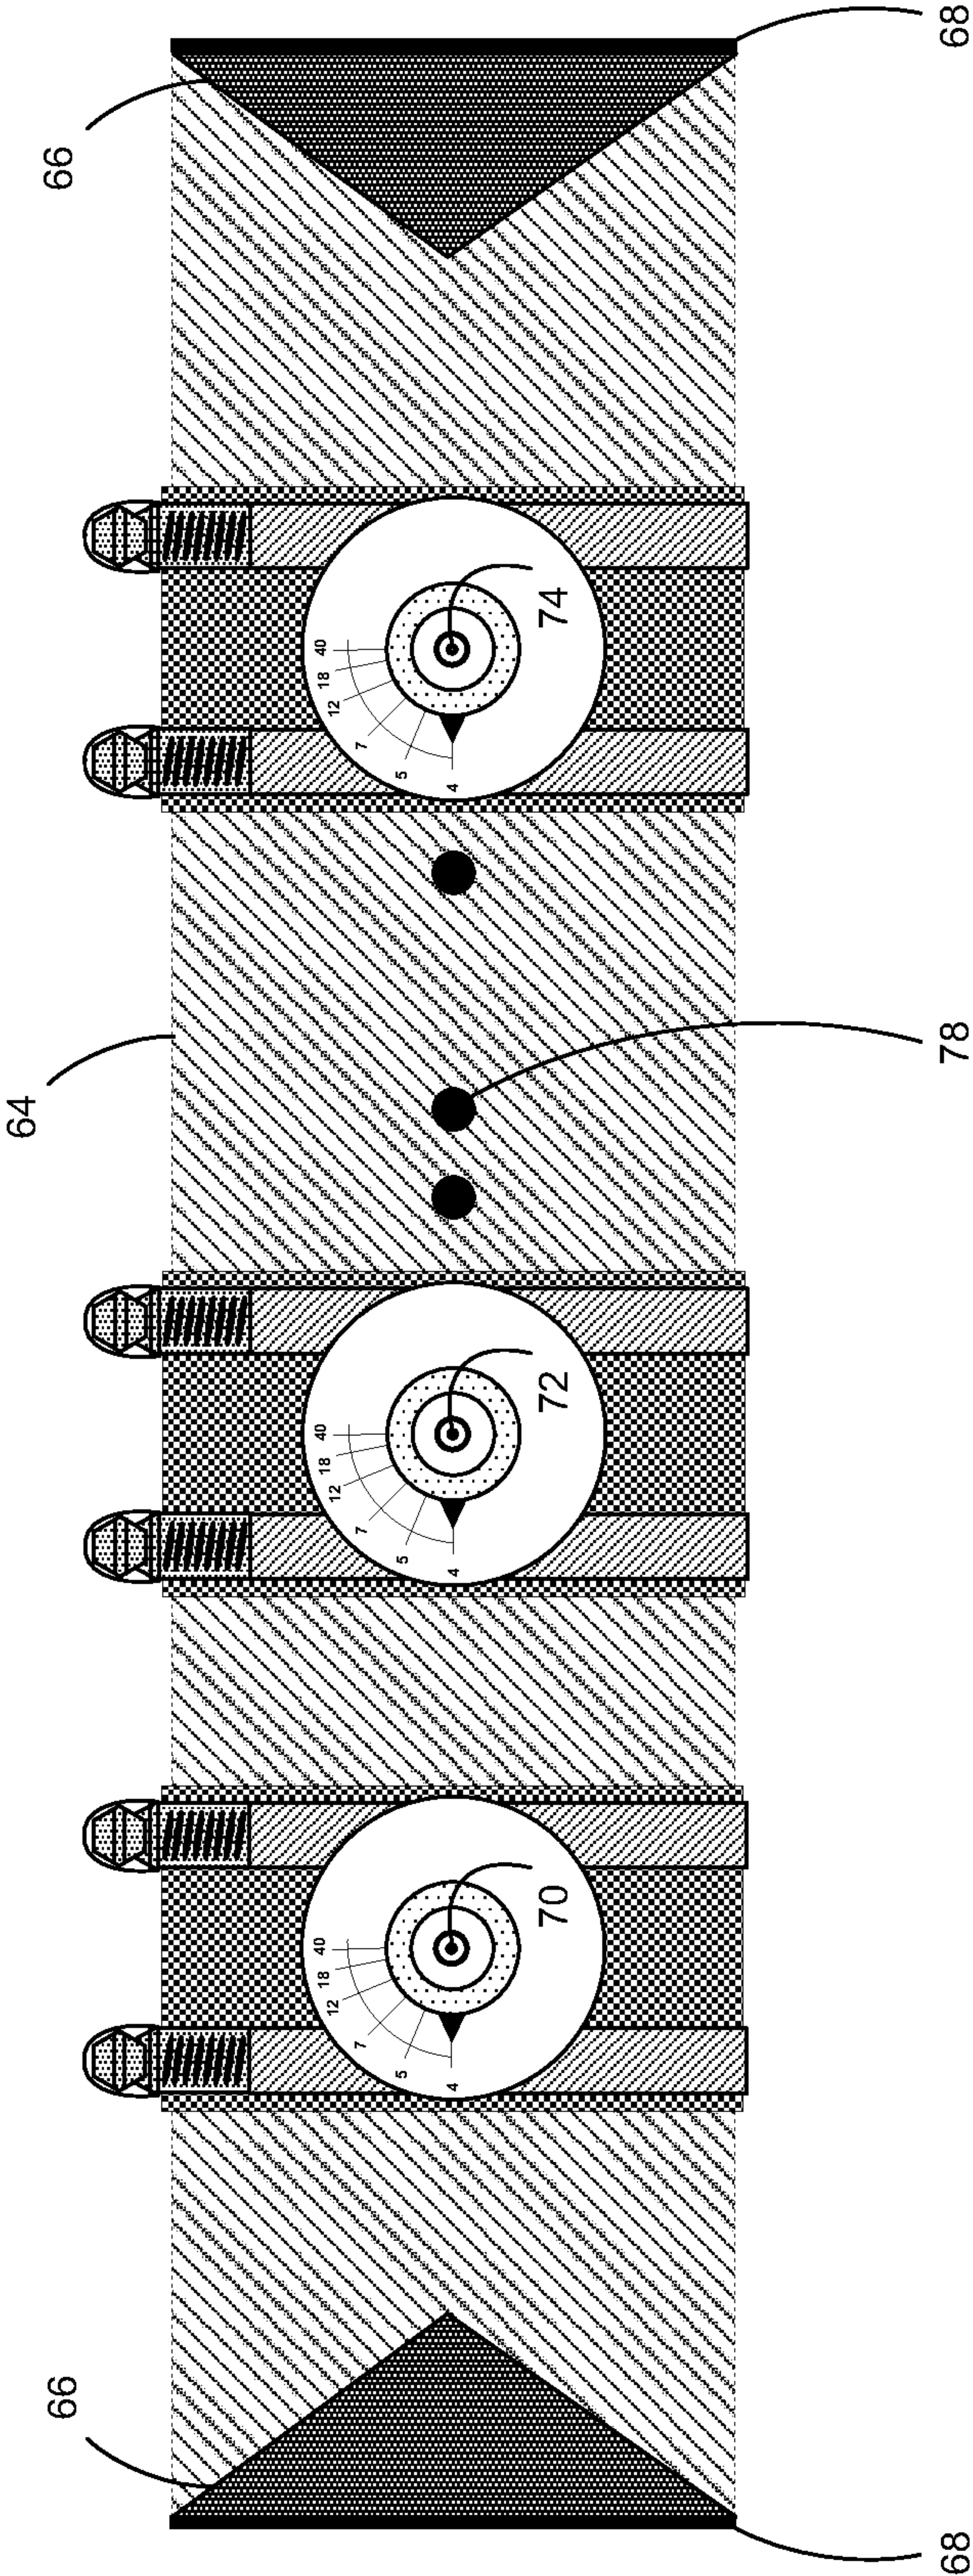


FIG. 7

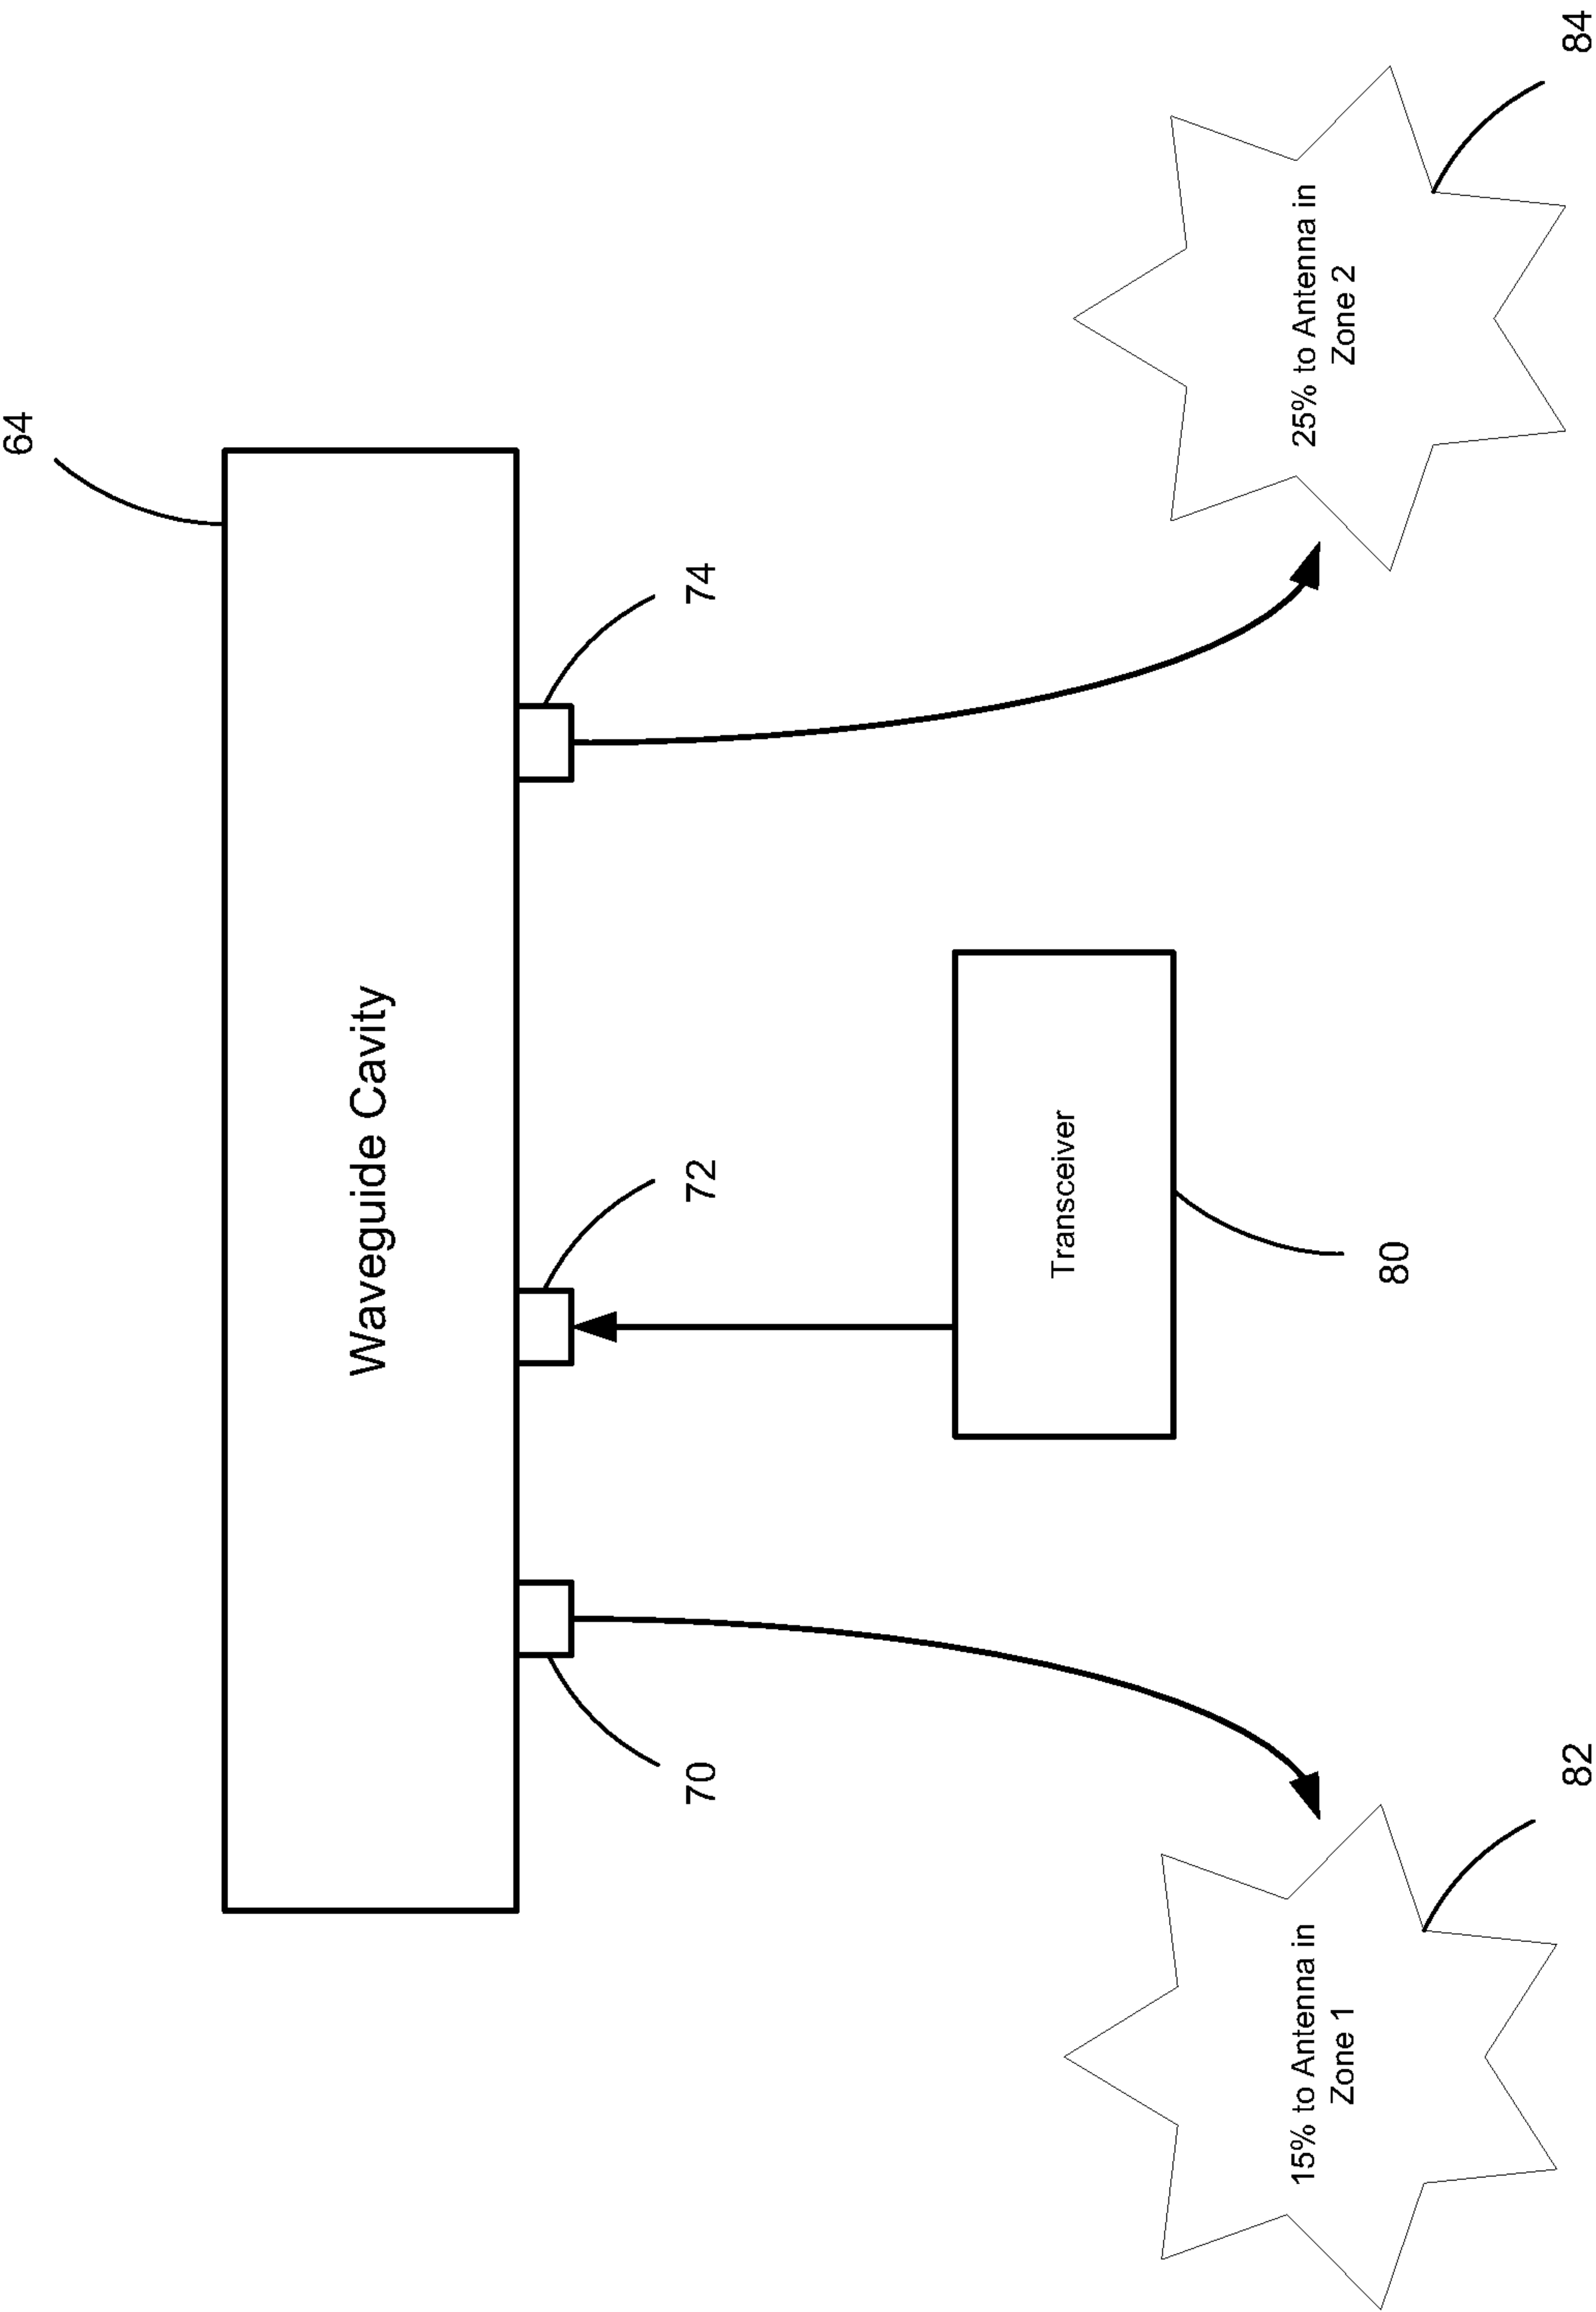


FIG. 8

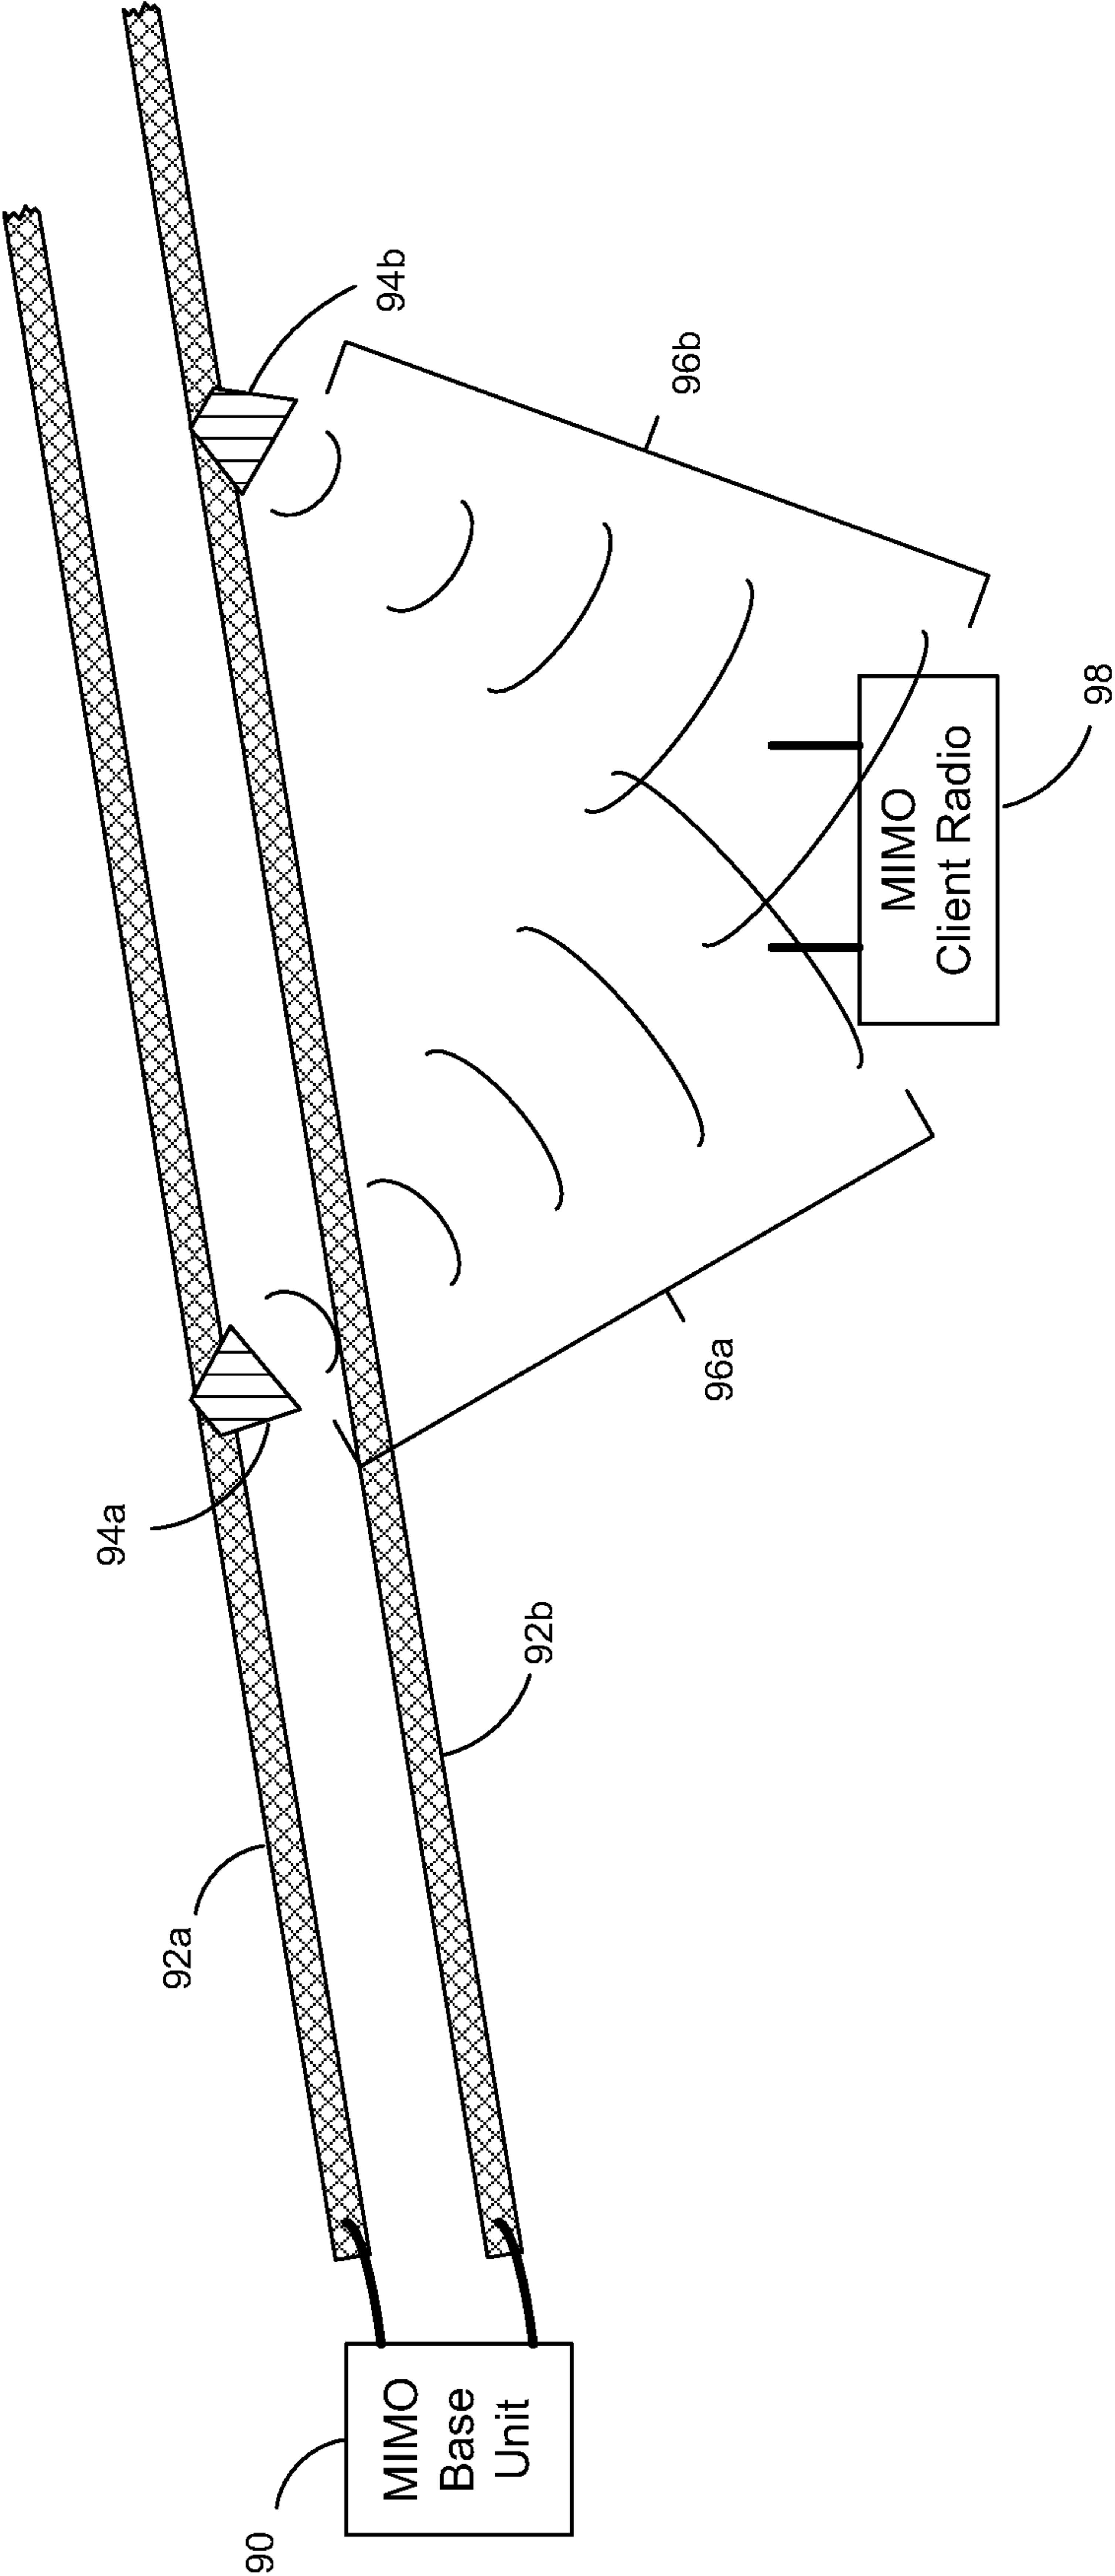


FIG. 9

