

(19)



(11)

EP 2 200 111 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
09.11.2011 Bulletin 2011/45

(51) Int Cl.:
H01M 2/10 ^(2006.01) **H01M 10/42** ^(2006.01)
H01M 6/50 ^(2006.01)

(21) Application number: **09252766.2**

(22) Date of filing: **10.12.2009**

(54) **Battery pack**

Batteriepack

Bloc-batteries

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **10.12.2008 KR 20080125263**

(43) Date of publication of application:
23.06.2010 Bulletin 2010/25

(73) Proprietor: **Samsung SDI Co., Ltd.
Gyeonggi-do (KR)**

(72) Inventors:
• **Kim, Heongsin
Yongin-si
Gyeonggi-do (KR)**

• **Jang, Youngcheol
Yongin-si
Gyeonggi-do (KR)**

(74) Representative: **Taor, Simon Edward William
Marks & Clerk LLP
90 Long Acre
London
WC2E 9RA (GB)**

(56) References cited:
**WO-A1-2006/112627 US-A1- 2006 261 960
US-A1- 2006 263 650 US-A1- 2008 254 359**

EP 2 200 111 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] . The present invention relates to a battery pack.

2. Description of the Related Art

[0002] A lithium secondary battery may be fabricated in the form of a battery pack. The battery pack may include a bare cell composed of an electrode assembly having a positive electrode plate, a negative electrode plate and a separator, a can for housing the electrode assembly, and a cap assembly for sealing an open upper part of the can. The battery pack may also include a circuit module having circuit elements such as charge/discharge devices and protection circuit devices connected to the bare cell; and an external cover connected to the bare cell and covering the circuit module.

[0003] A lithium secondary battery generally employs protection circuit devices such as positive temperature coefficient (PTC) devices, thermal fuses, and the like. These PTC devices and thermal fuses are typically secondary protection devices, separate from and in addition to the separator which is a primary protection device furnished in the bare cell. The secondary protection device is electrically connected to a charge/discharge circuit of the bare cell to thereby interrupt a flow of electrical current to the outside when the battery pack rises to a threshold temperature or when a disturbance of a preset voltage occurs due to excessive charge/discharge or the like. That is, the secondary protection device serves to prevent explosive rupture of the battery pack.

[0004] In a conventional battery pack, the circuit module is installed with the secondary protection device in conjunction with the inclusion of a lead plate for electrical connection between the secondary protection device and the bare cell, thereby requiring a space for mounting of the secondary protection device and the lead plate in the circuit module. As a consequence, there are limitations associated with the installation of numerous circuit elements in the circuit module. Therefore, the circuit module requires a circuit board having a multilayered circuit pattern therein, which disadvantageously leads to increased production costs of the battery pack.

[0005] Further, in a typical conventional battery pack, the secondary protection device is connected through the circuit module to the bare cell, which may result in low heat transfer efficiency from the bare cell to the secondary protection device. For this reason, the conventional secondary protection device suffers from deterioration of reliability for preventing the risk of battery pack rupture. Document WO 2006/112627 discloses a battery pack having an antenna arrangement electrically connected to the circuit module and a PTC device provided on the circuit board

SUMMARY OF THE INVENTION

[0006] In accordance with one embodiment of the present invention, a battery pack includes a PTC device in a portion of a loop antenna connected to one side of a bare cell and is therefore capable of providing secured mounting space of circuit elements in a circuit module, minimized design constraints associated with the thickness and width of the battery pack to which the loop antenna is applied, and improved reliability for preventing the rupture of the battery pack.

[0007] A battery pack includes a bare cell; a circuit module on the bare cell and electrically connected to the bare cell; a loop antenna attached to the bare cell and electrically connected to the circuit module; and a PTC device on the loop antenna and electrically connected to the circuit module.

[0008] In one embodiment, the loop antenna includes a first coverlay; an antenna pattern extending along edges of the first coverlay; a first antenna lead plate and a second antenna lead plate connected to the antenna pattern; and a second coverlay covering the antenna pattern, connected to the first coverlay and attached to one side of the bare cell. The first antenna lead plate may include a first base portion connected to a first end of the antenna pattern and a first extension portion extending at an angle from the first base portion, and the second antenna lead plate may include a second base portion connected to a second end of the antenna pattern and a second extension portion extending at an angle from the second base portion.

[0009] The PTC device may be between the bare cell and the circuit module, between the first coverlay and the second coverlay, and/or on an outside of the antenna pattern. Additionally, the PTC device may include conductive particles dispersed in a crystalline polymer. In one embodiment, the PTC device includes a PTC body between the first coverlay and the second coverlay; a first PTC lead plate connected to a first surface of the PTC body; and a second PTC lead plate connected to a second surface of the PTC body.

[0010] Further, the first PTC lead plate may include a first contact portion in contact with a first surface of the PTC body, a first connection portion extending from the first contact portion, and a first extension portion extending at an angle from the first connection portion, and a second contact portion in contact with a second surface of the PTC body, a second connection portion extending from the second contact portion, and a second extension portion extending at an angle from the second connection portion.

[0011] In one embodiment, the circuit module includes an antenna connection pad and a PTC connection pad on a lower surface of the circuit module, wherein the antenna connection pad includes a first antenna connection pad and a second antenna connection pad connected to the first extension portion of the first antenna lead plate and to the second extension portion of the second an-

tenna lead plate, respectively, and wherein the PTC connection pad includes a first PTC connection pad and a second PTC connection pad connected to the first extension portion of the first PTC lead plate and to the second extension portion of the second PTC lead plate, respectively.

[0012] The battery pack may also include an electromagnetic shielding tape between the bare cell and the second coverlay. The electromagnetic shielding tape may include a receiving groove adapted to generally correspond to the PTC device. Further, the circuit module may include an external terminal portion wherein the external terminal portion includes a power terminal electrically connected to the PTC device and an antenna terminal electrically connected to the loop antenna.

[0013] According to a first aspect of the invention, there is provided a battery pack as set out in claim 1. Preferred features of this aspect are set out in claims 2 to 15.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] FIG. 1a is a perspective view of a battery pack in accordance with one embodiment of the present invention.

[0015] FIG. 1b is an exploded perspective view of the battery pack shown in FIG. 1a.

[0016] FIG. 2 is a bottom perspective view of a circuit module of the battery pack shown in FIG. 1b.

[0017] FIG. 3 is a perspective view of a bare cell, a circuit module, a loop antenna and a PTC device of the battery pack shown in FIG. 1b.

[0018] FIG. 4 is a perspective view of a PTC device shown in FIG. 3.

[0019] FIG. 5 is a cross-sectional view taken along the line A-A' of FIG. 3.

[0020] FIG. 6a is a perspective view of a battery pack in accordance with another embodiment of the present invention.

[0021] FIG. 6b is an exploded perspective view of the battery pack shown in FIG. 6a.

[0022] FIG. 7 is a perspective view of a bare cell, a circuit module, a loop antenna and a PTC device of the battery pack shown in FIG. 6b.

[0023] FIG. 8 is a cross-sectional view taken along the line B-B' of FIG. 7.

[0024] FIG. 9 is a plan view of an electromagnetic shielding tape connected to a PTC device of the battery pack shown in FIG. 7.

DETAILED DESCRIPTION

[0025] Now, embodiments of the present invention will be described in more detail with reference to the accompanying drawings.

[0026] FIG. 1a is a perspective view of a battery pack in accordance with one embodiment of the present invention; FIG. 1b is an exploded perspective view of the battery pack shown in FIG. 1a; FIG. 2 is a bottom per-

spective view of a circuit module of the battery pack shown in FIG. 1b; FIG. 3 is a perspective view of a bare cell, a circuit module, a loop antenna and a PTC device of the battery pack shown in FIG. 1b; FIG. 4 is a perspective view of a PTC device shown in FIG. 3; and FIG. 5 is a cross-sectional view taken along the line A-A' of FIG. 3.

[0027] Referring to FIGS. 1a, 1b and 2, a battery pack 100 in accordance with one embodiment of the present invention includes a bare cell 110, a circuit module 120, a first lead plate 132, second lead plates 134, an electromagnetic shielding tape 140, a loop antenna 150 and a PTC device 160, an upper cover 170, a lower cover 180 and a label 190.

[0028] The bare cell 110 and the circuit module 120 are electrically connected through the first lead plate 132 and the second lead plates 134 to form a core pack. The upper cover 170 and the lower cover 180 are assembled into the core pack, followed by attachment of the label 190 to fabricate a battery pack 100.

[0029] The bare cell 110 supplies electrical energy, and includes an electrode assembly composed of a positive electrode, a negative electrode and a separator disposed therebetween; a container-type can 111 formed of a metal and housing the electrode assembly and an electrolyte; and a cap assembly 112 for sealing an open part of the can 111. The cap assembly 112 shown in FIG. 1b includes a cap plate 113 formed of metal, an electrode terminal 114 formed protruding from the cap plate 113, and a gasket 115 disposed between the cap plate 113 and the electrode terminal 114 for insulating the electrode terminal 114 from the cap plate 113.

[0030] The can 111 and the cap plate 113 per se serve as a terminal in some embodiments, and in this embodiment of the present invention the can 111 and the cap plate 113 work as a positive electrode. Therefore, illustration will be given in which the electrode terminal 114 serves as a negative electrode. Further, an alternative embodiment is also possible where the can 111, the cap plate 113 and the electrode terminal 114 have polarities opposite to the polarities specified above.

[0031] The bare cell 110, as shown in FIG. 1b, includes an upper surface 110a with protrusion of the electrode terminal 114 being insulated by the gasket 115, a pair of short lateral sides 110b, 110c and a pair of long lateral sides 110d, 110e in connection with the upper surface 110a, and a lower surface 110f in connection with the lateral sides 110b, 110c, 110d, 110e and opposite to the upper surface 110a. The pair of short lateral sides 110b, 110c are generally narrow-width lateral sides in connection with the upper surface 110a of the bare cell 110, whereas the pair of long lateral sides 110d, 110e are wide-width lateral sides of the bare cell 110. Meanwhile, in an embodiment of the present invention, the upper surface 110a of the bare cell 110 is defined as facing an upward direction of the bare cell 110, whereas the lower surface 110f of the bare cell 110 is defined as facing a downward direction of the bare cell 110.

[0032] Referring to FIGs. 1b to 3, the circuit module

120 is disposed on an upper part of the bare cell 110 to thereby result in electrical connection with the bare cell 110, and includes a circuit board 121, an external terminal portion 122 and a welding hole 124. Further, the circuit module 120 further includes an antenna connection pad 127 and a PTC connection pad 128.

[0033] The circuit board 121 is formed of a resin plate, and includes a charge/discharge circuit pattern for providing a uniform charge state of the battery through control of charge and discharge thereof, or a protection circuit pattern for preventing overdischarge and overcharge of the battery. The circuit board 121 includes circuit elements 123 installed on a lower surface 121b to create a charge/discharge circuit pattern and a protection circuit pattern. In some embodiments of the present invention, the upper surface 121a of the circuit board 121 conforms to and defines an upper surface of the circuit module 120, and the lower surface 121b of the circuit board 121 conforms to and defines a lower surface of the circuit module 120.

[0034] The external terminal portion 122 is installed on the upper surface 121a of the circuit board 121, and provides electrical connection between the circuit board 121 and external electronic equipment. The external terminal portion 122 include in this embodiment power terminals 122a, 122b, an antenna terminal 122c and an identification (ID) terminal 122d, each of which is formed of a metal.

[0035] the welding hole 124 is formed to extend through the upper surface 121a and the lower surface 121b of the circuit board 121. The welding hole 124 is positioned in a region corresponding to the electrode terminal 114 of the bare cell 110, thereby providing a welding space upon welding of the first lead plate 132 to the electrode terminal 114 of the bare cell 110 by resistance welding.

[0036] The antenna connection pad 127 is formed of a metal plate on one side of the lower surface 121b of the circuit board 121. The antenna connection pad 127 is in electrical connection with the antenna terminal 122c through a separate circuit pattern formed on the circuit board 121. Specifically, the antenna connection pad 127 includes a first antenna connection pad 127a and a second antenna connection pad 127b. The first antenna connection pad 127a and the second antenna connection pad 127b are in electrical connection with a first antenna lead plate 153 and a second antenna lead plate 154, respectively, of a loop antenna 150 which will be illustrated hereinafter. Accordingly, the antenna connection pad 127 provides electrical connection between the antenna terminal 122c and the loop antenna 150.

[0037] The PTC connection pad 128 is formed of a metal plate on the other side of the lower surface 121b of the circuit board 121. The PTC connection pad 128 is electrically connected to the power terminals 122a, 122b through a charge/discharge circuit pattern of the circuit board 121. Specifically, the PTC connection pad 128 includes a first PTC connection pad 128a and a second PTC connection pad 128b in this embodiment. The first

PTC connection pad 128a and the second PTC connection pad 128b are in electrical connection with a first PTC lead plate 164 and a second PTC lead plate 166, respectively, of a PTC device 160 which will be described hereinafter. Accordingly, the PTC connection pad 128 provides electrical connection between the power terminals 122a, 122b and the PTC device 160.

[0038] The first lead plate 132 is installed to cover the welding hole 124 on the lower surface 121b of the circuit board 121, resulting in electrical connection with a negative electrode wiring pattern of the circuit module 120, and is electrically connected to the electrode terminal 114 through the welding hole 124 by resistance welding. The first lead plate 132 is formed of metal, for example, nickel or nickel alloy. The first lead plate 132 is connected to the electrode terminal 114, thus serving as a negative electrode together with the electrode terminal 114.

[0039] The second lead plates 134 are installed at respective ends of the lower surface 121b of the circuit board 121 to result in electrical connection with a positive electrode wiring pattern of the circuit module 120, and extend to connect with the upper surface 110a of the bare cell 110 to be electrically connected to the upper surface 110a of the bare cell 110. The second lead plates 134 are formed of a metal, for example, nickel or nickel alloy. The second lead plates 134 are connected to the upper surface 110a of the bare cell 110 so the second lead plates can act as a positive electrode.

[0040] The electromagnetic shielding tape 140 is connected to one side of the bare cell 110, for example, a long lateral side 110d. Specifically, the electromagnetic shielding tape 140 is disposed between the long lateral side 110d of the bare cell 110 and the loop antenna 150 which will be described hereinafter. The electromagnetic shielding tape 140 absorbs electromagnetic waves coming from the loop antenna 150, thus preventing adverse effects of electromagnetic waves of the loop antenna 150 on charge/discharge operation of the bare cell 110. For this purpose, a substrate of the electromagnetic shielding tape 140 is provided with a conductive pattern, such that electromagnetic waves of the loop antenna 150 can be grounded. In order to achieve effective shielding of electromagnetic waves of the loop antenna 150, the electromagnetic shielding tape 140 is formed in some embodiments of the invention to have a width greater than at least the loop antenna 150 connected to the long lateral side 110d of the bare cell 110.

[0041] The loop antenna 150 is attached to one side of the bare cell 110. As will be discussed in more detail, the the loop antenna 150 provides a loop antenna arrangement that comprises an antenna portion. The loop antenna arrangement also comprises a PTC device 160. In one embodiment, the loop antenna 150 is attached to cover the electromagnetic shielding tape 140 attached to the long lateral side 110d of the bare cell 110. The loop antenna 150 is electrically connected to the antenna terminal 122c through the antenna connection pad 127 and a separate circuit pattern formed on the circuit board 121,

which can result in electrical connection with external electronic equipment such as portable terminals. The loop antenna 150 is formed to generate induced electromotive force. Therefore, the loop antenna 150 can receive radio frequency (RF) signals received from other external electronic equipment (such as a card reader) and provide electrical signals to external electronic equipment to which the battery pack 100 is mounted, and can transmit transmission signals coming from the external electronic equipment with installation of the battery pack 100 to other external electronic equipment such as a card reader. Examples of radio frequencies may include broadcast frequency, e.g. digital multimedia broadcasting (DMB), radiofrequency identification (RFID) reading frequency, smart card scan frequency and equivalent frequency thereof.

[0042] Specifically, in this embodiment, the loop antenna 150 includes a first coverlay (e.g. a film, layer or a substrate) 151, an antenna pattern 152, a first antenna lead plate 153, a second antenna lead plate 154 and a second coverlay (e.g. a film, layer or a substrate) 155. In this embodiment, the loop antenna 150 may have a maximum thickness of from about 0.3 mm to about 0.5 mm.

[0043] In this embodiment, the first coverlay 151 is formed in the form of a thin film of a plastic resin and serves to protect the antenna pattern 152 which will be illustrated hereinafter.

[0044] In some embodiments, the antenna pattern 152 may be formed to extend along the edges of the first coverlay 151 so that an antenna line is wound several times on the first coverlay 151. The antenna pattern 152 can receive a radio frequency signal from the outside to thereby generate induced electromotive force in an electronic chip contained in external electronic equipment with installation of the battery pack 100, and transmit transmission signals coming from the electronic chip to external devices.

[0045] The first antenna lead plate 153 and the second antenna lead plate 154 are connected to respective ends of the antenna pattern 152, and extend to contact the first and second antenna connection pads 127a, 127b of the circuit module 120. The first antenna lead plate 153 and the second antenna lead plate 154 provide electrical connection between the antenna pattern 152 and the external electronic equipment with installation of the battery pack 100, thereby allowing for communication between the external electronic equipment with installation of the battery pack 100 and the other external electronic equipment. Here, the first antenna lead plate 153 and the second antenna lead plate 154 may be formed of metal in some embodiments of the invention.

[0046] Specifically, the first antenna lead plate 153 includes a first base portion 153a connected to one end of the antenna pattern 152, and a first extension portion 153b bending and extending from the first base portion 153a and connected to the first antenna connection pad 127a.

[0047] Similarly, the second antenna lead plate 154

includes a second base portion 154a connected to the other end of the antenna pattern 152, and a second extension portion 154b bending and extending from the second base portion 154a and connected to the second antenna connection pad 127b.

[0048] The second coverlay 155 is formed in the form of a thin film of a plastic resin, and covers the antenna pattern 152 to combine with the first coverlay 151 and is opposite to one side of the bare cell 110. The second coverlay 155, in conjunction with the first coverlay 151, protects the antenna pattern 152.

[0049] The PTC device 160 is disposed on one side of the loop antenna 150. In other words, the loop antenna 150 provides a loop antenna arrangement that comprises an antenna portion and the PTC device 160. In one embodiment, the PTC device 160 is disposed on the outside of the antenna pattern 152, between the first coverlay 151 and the second coverlay 155 of the loop antenna 150, and is electrically connected to a charge/discharge circuit pattern of the circuit module 120. However, in other embodiments, the PTC device 160 could be provided on another portion of the loop antenna arrangement. The PTC device 160 can prevent the rupture of the battery pack 100 due to excessive heat generation through interruption of a flow of electrical current when the battery pack 100 undergoes heat generation and rises to a high temperature beyond the preset temperature due to, for example, a flow of overcurrent or overvoltage.

[0050] Specifically, referring to FIGS. 3 to 5, the PTC device 160 includes a PTC body 162, a first PTC lead plate 164 and a second PTC lead plate 166 in this embodiment. In some embodiments, the PTC device 160 may have a maximum thickness of from about 0.5 mm to about 0.7 mm.

[0051] The PTC body 162 is interposed between the first coverlay 151 and the second coverlay 155 of the loop antenna 150, and is fabricated by dispersing conductive particles in a crystalline polymer in this embodiment. Other embodiments may employ PTC devices made out of alternative materials. The PTC body 162 of this embodiment is a device which reaches almost an infinite electrical resistance when a temperature exceeds a certain critical value so it can interrupt charge/discharge current when the battery pack 100 is exposed to abnormally high temperature conditions. Since the PTC body 162 performs a reversible operation, it allows again for a flow of charge/discharge current when the temperature of the battery pack 100 drops below the critical value. Accordingly, the PTC body 162 can serve as a safety device for prevention of the rupture of the battery pack 100 due to the occurrence of excessive heat generation.

[0052] The first PTC lead plate 164 is connected to one surface of the PTC body 162 and extends to connect with the first PTC connection pad 128a of the circuit module 120. A portion of the first PTC lead plate 164, is disposed between the first coverlay 151 and the second coverlay 155 of the loop antenna 150.

[0053] Specifically, in this embodiment, the first PTC

lead plate 164 includes a first contact portion 164a in contact with one surface of the PTC body 162, a first connection portion 164b bending and extending from the first contact portion 164a, and a first extension portion 164c bending and extending from the first connection portion 164b and in contact with the first PTC connection pad 128a of the circuit module 120.

[0054] The second PTC lead plate 166 is connected to another surface of the PTC body 162 and extends to connect with the second PTC connection pad 128b of the circuit module 120. A portion of the second PTC lead plate 166 is disposed between the first coverlay 151 and the second coverlay 155 of the loop antenna 150.

[0055] Specifically, in this embodiment, the second PTC lead plate 166 includes a second contact portion 166a in contact with another surface of PTC body 162, a second connection portion 166b bending and extending from the second contact portion 166a, and a second extension portion 166c bending and extending from the second connection portion 166b and in contact with the second PTC connection pad 128b of the circuit module 120.

[0056] The first PTC lead plate 164 and the second PTC lead plate 166 provide electrical connection between the PTC body 162 and a charge/discharge circuit pattern (not shown) of the circuit board 121, such that the PTC body 162 can interrupt a flow of electric current when the PTC body 162 exceeds the critical temperature due to the occurrence of overcurrent or overvoltage upon charge/discharge of the battery pack 100. The first PTC lead plate 164 and the second PTC lead plate 166 may be formed of -metal.

[0057] Hereinafter, the connection relationship will be illustrated between the bare cell 110, the circuit module 120, the loop antenna 150 and the PTC device 160 as configured above.

[0058] Referring to FIG. 3, the loop antenna 150 with disposition of the PTC device 160 on one side thereof is connected to one side of the bare cell 110, and the loop antenna 150 and the PTC device 160 are in electrical connection with the circuit module 120. Accordingly, as compared to conventional installation of the PTC device in the circuit module, a larger installation space for mounting of circuit elements 123 can be secured in the circuit module 120, and the number of circuit pattern layers inside the circuit board 121 can also be reduced because the mounting space of the circuit elements 123 is secured in the circuit module 120.

[0059] Further, in this embodiment, the PTC device 160 is installed in a portion of the loop antenna 150, e.g. in a region which does not overlap with the antenna pattern 152, between the first coverlay 151 and the second coverlay 155. Accordingly, it is possible to minimize or reduce design constraints associated with the thickness and width of the battery pack 100 to which the loop antenna 150 is applied.

[0060] Further, the PTC device 160 is positioned on one side of the bare cell 110, and is therefore operated by direct effects of heat generation of the bare cell 110

when the battery pack 100 is exposed to overcharge or overcurrent conditions. As a result, operation reliability of the PTC device 160 can be enhanced, and therefore reliability for prevention of the rupture of the battery pack 100 can be improved.

[0061] The upper cover 170 is connected to an upper part of the bare cell 110 and houses the circuit module 120 in an internal space thereof. The upper cover 170 may include a cover plate 171 and a side wall 174 extending from the cover plate 171 toward the circuit module 120.

[0062] The cover plate 171 may be formed to generally conform to the shape of the upper surface 110a of the bare cell 110. An internal surface of the cover plate 171 is in contact with the upper surface 121a of the circuit board 121. The cover plate 171 includes a through-hole 175 formed in the region corresponding to the external terminal portion 122. The through-hole 175 exposes the external terminal portion 122 to the outside of the battery pack 100, which allows for electrical connection between the battery pack 100 and external electronic equipment (not shown).

[0063] The side wall 174 includes two ends 172 of the upper cover 170, and a connection portion 173 between the ends 172. The ends 172 are in contact with regions corresponding to the short lateral sides 110b, 110c out of the upper surface 110a of the bare cell 110 and support the upper cover 170. The connection portion 173 extends further toward the circuit module 120 than the ends 172. A region of the connection portion 173 covering an upper part of a pair of long lateral sides 110d, 110e of the bare cell 110 is enclosed by a label 190 which will be illustrated hereinafter.

[0064] The lower cover 180 is attached to a lower part of the bare cell 110. The lower cover 180 may include a bottom plate 181, and extension portions 182 extending from the bottom plate 181 toward the bare cell 110.

[0065] The bottom plate 181 generally conforms to the lower surface 110f of the bare cell 110, and is attached to the lower surface 110f of the bare cell 110 by an adhesive member 185.

[0066] The extension portions 182 cover lower parts of the long lateral sides 110d, 110e of the bare cell 110. The extension portions 182 are enclosed by a label 190 which will be illustrated hereinafter.

[0067] The label 190 is attached to enclose the lateral sides 110b, 110c, 110d, 110e of the bare cell 110. The label 190 covers a portion of the connection portion 173 of the upper cover 170 and the extension portion 182 of the lower cover 180.

[0068] As such, the battery pack 100 in accordance with one embodiment of the present invention is fabricated with positioning of the PTC device 160 on one side of the loop antenna 150 connected to one side of the bare cell 110. As compared to conventional installation of the PTC device in the circuit module, the aforementioned configuration allows securing a mounting space of circuit elements 123 in the circuit module 120 and it is also pos-

sible to minimize or reduce the number of circuit pattern layers inside the circuit board 121 because the mounting space of the circuit elements 123 is secured.

[0069] Further, the battery pack 100 in accordance with one embodiment of the present invention is configured such that the PTC device 160 is installed in a portion of the loop antenna 150, e.g. in a region which does not overlap with the antenna pattern 152 between the first coverlay 151 and the second coverlay 155 of the loop antenna 150. Accordingly, it is possible to minimize or reduce design constraints associated with the thickness and width of the battery pack 100 when a loop antenna is applied.

[0070] Further, the battery pack 100 in accordance with one embodiment of the present invention can be configured such that the PTC device 160 is positioned on one side of the bare cell 110, and is therefore operated by direct effects of heat generation of the bare cell 110 when the battery pack 100 is exposed to overcharge or overcurrent conditions. As a result, the battery pack 100 in accordance with one embodiment of the present invention enhances operation reliability of the PTC device 160, and therefore reliability for prevention of the rupture of the battery pack 100 can be improved.

[0071] Hereinafter, a battery pack 200 in accordance with another embodiment of the present invention will be illustrated.

[0072] The configuration of the battery pack 200 except for an electromagnetic shielding tape 240 is identical to that of the battery pack 100 in accordance with the previous embodiment of the present invention, so details thereof will be omitted herein. Like reference numerals refer to like elements throughout the specification and drawings. The following is given to address the configuration of the electromagnetic shielding tape 240.

[0073] FIG. 6a is a perspective view of a battery pack in accordance with another embodiment of the present invention. FIG. 6b is an exploded perspective view of the battery pack shown in FIG. 6a. FIG. 7 is a perspective view of a bare cell, a circuit module, a loop antenna and a PTC device of the battery pack shown in FIG. 6b. FIG. 8 is a cross-sectional view taken along the line B-B' of FIG. 7. FIG. 9 is a plan view of an electromagnetic shielding tape connected to a PTC device of the battery pack shown in FIG. 7.

[0074] Referring to FIGS. 6a, 6b, 7 and 8, the battery pack 200 in one embodiment includes a bare cell 110, a circuit module 120, a first lead plate 132, second lead plates 134, an electromagnetic shielding tape 240, a loop antenna 150 and a PTC device 160, an upper cover 170, a lower cover 180 and a label 190.

[0075] Referring to FIG. 6a and FIG. 9, the material, attachment site and function of the electromagnetic shielding tape 240 are substantially similar to those of the electromagnetic shielding tape 140 shown in FIG. 1b. Unlike the tape 140, the electromagnetic shielding tape 240 further includes a receiving groove 242 formed in a region generally corresponding to the PTC device 160.

The electromagnetic shielding tape 240 is provided to ensure that the PTC device 160 can be housed in the receiving groove 242, when the loop antenna 150 having the PTC device 160 positioned thereon is connected to one side of the bare cell 110, e.g. the long lateral side 110d. Accordingly, the electromagnetic shielding tape 240 can reduce a thickness of the battery pack 200 as compared to a conventional battery pack.

[0076] As described above, the battery pack 200 is configured in a manner that the PTC device 160 connected to one side of the loop antenna 150 is housed in the receiving groove 242 of the electromagnetic shielding tape 240, thereby resulting in reduction of a thickness of the battery pack 200 due to the PTC device 160 compared to a conventional device. As a consequence, when the loop antenna 150 is used, it is possible to further minimize constraints of the thickness, as compared to the battery pack 100 in accordance with the previous embodiment of the present invention.

[0077] As apparent from the above description, a battery pack in accordance with embodiments of the present invention is fabricated with positioning of a PTC device on one side of a loop antenna arrangement attached to one side of a bare cell. Therefore, as compared to conventional installation of the PTC device in the circuit module, the aforementioned configuration allows securing a larger mounting space of circuit elements in the circuit module and it is also possible to minimize the number of circuit pattern layers inside the circuit board, due to securing of the mounting space for the circuit elements.

[0078] Further, the battery pack in accordance with embodiments of the present invention is configured such that the PTC device is installed in a portion of the loop antenna arrangement, e.g. in a region which does not overlap with an antenna pattern, between the first coverlay and the second coverlay of the loop antenna. Accordingly, it is possible to minimize or reduce design constraints associated with thickness and width of the battery pack when it is desired to incorporate a loop antenna.

[0079] Further, due to the installation of the PTC device on one side of the bare cell, the PTC device can be operated directly in response to heat generation of the bare cell when the battery pack is in overcharge or overcurrent conditions. As a result, the battery pack in accordance with embodiments of the present invention enhances operation reliability of the PTC device, thereby improving reliability for preventing the rupture of the battery pack.

Claims

1. A battery pack comprising:

- a bare cell (110);
- a circuit module (120) electrically connected to the bare cell;
- an antenna arrangement (150) electrically connected to the circuit module; and

- a positive temperature coefficient, PTC, device (160) electrically connected to the circuit module, wherein the PTC device is provided on the antenna arrangement.
2. A battery pack according to claim 1, wherein the antenna arrangement comprises:
- a first coverlay;
an antenna pattern;
a first antenna lead plate and a second antenna lead plate connected to the antenna pattern; and
a second coverlay covering the antenna pattern, the antenna pattern located between the first and second coverlays.
3. A battery pack according to claim 2, wherein the antenna pattern is arranged to extend around edges of the first coverlay.
4. A battery pack according to claim 2 or 3, the PTC device is located between the first and second coverlays.
5. A battery pack according to any one of claims 2 to 4, wherein the PTC device is located on an outside of the antenna pattern.
6. A battery pack according to any one of claims 2 to 5, wherein the first antenna lead plate includes a first base portion connected to a first end of the antenna pattern and a first extension portion extending at an angle from the first base portion, and wherein the second antenna lead plate includes a second base portion connected to a second end of the antenna pattern and a second extension portion extending at an angle from the second base portion.
7. A battery pack according to any one of claims 2 to 6, wherein at least a portion of the PTC device is located between the bare cell and the circuit module.
8. A battery pack according to any one of claims 2 to 7, wherein the antenna arrangement is located adjacent a side of the bare cell.
9. A battery pack according to claim 8, wherein the side of the bare cell that the antenna arrangement is located adjacent is a major side of the bare cell, said major side extending between two ends of the bare cell, wherein the circuit module is located adjacent one of the ends of the bare cell.
10. A battery pack according to any one of claims 2 to 9, wherein the PTC device comprises conductive particles dispersed in a crystalline polymer, and wherein the PTC device includes:
- a PTC body between the first coverlay and the second coverlay;
a first PTC lead plate connected to a first surface of the PTC body; and
a second PTC lead plate connected to a second surface of the PTC body.
11. A battery pack according to claim 10, wherein the first PTC lead plate includes a first contact portion in contact with a first surface of the PTC body, a first connection portion extending from the first contact portion, and a first extension portion extending at an angle from the first connection portion, and wherein the second PTC lead plate includes a second contact portion in contact with a second surface of the PTC body, a second connection portion extending from the second contact portion, and a second extension portion extending at an angle from the second connection portion.
12. A battery pack according to claim 11, wherein the circuit module includes an antenna connection pad and a PTC connection pad on a surface of the circuit module, wherein the antenna connection pad comprises a first antenna connection pad and a second antenna connection pad connected to the first extension portion of the first antenna lead plate and to the second extension portion of the second antenna lead plate, respectively, and wherein the PTC connection pad comprises a first PTC connection pad and a second PTC connection pad connected to the first extension portion of the first PTC lead plate and to the second extension portion of the second PTC lead plate, respectively.
13. A battery pack according to any one of claims 1 to 12, further comprising an electromagnetic shielding tape located between the bare cell and the antenna arrangement.
14. A battery pack according to claim 13, wherein the electromagnetic shielding tape includes a receiving groove located adjacent the PTC device.
15. A battery pack according to any one of claims 1 to 14, wherein the circuit module includes an external terminal portion, and wherein the external terminal portion includes a power terminal electrically connected to the PTC device and an antenna terminal electrically connected to the antenna arrangement.

Patentansprüche

1. Batteriepack, umfassend:

- eine freiliegende Zelle (110);
 ein Schaltungsmodul (120), das elektrisch mit der freiliegenden Zelle verbunden ist;
 eine Antennenanordnung (150), die elektrisch mit dem Schaltungsmodul verbunden ist; und
 eine Vorrichtung für einen positiven Temperaturkoeffizienten, PTC, (160), die elektrisch mit dem Schaltungsmodul verbunden ist, wobei die PTC-Vorrichtung auf der Antennenanordnung bereitgestellt ist.
2. Batteriepack nach Anspruch 1, wobei die Antennenanordnung umfasst:
- eine erste Deckfolie;
 ein Antennenmuster;
 eine erste Antennenzuführungsplatte und eine zweite Antennenzuführungsplatte, die mit dem Antennenmuster verbunden sind; und
 eine zweite Deckfolie, die das Antennenmuster abdeckt, wobei das Antennenmuster sich zwischen der ersten und zweiten Deckfolie befindet.
3. Batteriepack nach Anspruch 2, wobei das Antennenmuster angeordnet ist, um sich um die Kanten der ersten Deckfolie zu erstrecken.
4. Batteriepack nach Anspruch 2 oder 3, wobei die PTC-Vorrichtung sich zwischen der ersten und zweiten Deckfolie befindet.
5. Batteriepack nach einem der Ansprüche 2 bis 4, wobei die PTC-Vorrichtung sich auf einer Außenseite des Antennenmusters befindet.
6. Batteriepack nach einem der Ansprüche 2 bis 5, wobei die erste Antennenzuführungsplatte einen ersten Basisabschnitt, der mit einem ersten Ende des Antennenmusters verbunden ist, und einen ersten Erweiterungsabschnitt, der sich in einem Winkel von dem ersten Basisabschnitt erstreckt, enthält, und wobei die zweite Antennenzuführungsplatte einen zweiten Basisabschnitt, der mit einem zweiten Ende des Antennenmusters verbunden ist, und einen zweiten Erweiterungsabschnitt, der sich in einem Winkel von dem zweiten Basisabschnitt erstreckt, enthält.
7. Batteriepack nach einem der Ansprüche 2 bis 6, wobei sich mindestens ein Teil der PTC-Vorrichtung zwischen der freiliegenden Zelle und dem Schaltungsmodul befindet.
8. Batteriepack nach einem der Ansprüche 2 bis 7, wobei die Antennenanordnung sich angrenzend an einer Seite der freiliegenden Zelle befindet.
9. Batteriepack nach Anspruch 8, wobei die Seite der freiliegenden Zelle, an der sich die Antennenanordnung angrenzend befindet, eine Hauptseite der freiliegenden Zelle ist, wobei die Hauptseite sich zwischen zwei Enden der freiliegenden Zelle erstreckt, wobei das Schaltungsmodul sich angrenzend an einem der Enden der freiliegenden Zelle befindet.
10. Batteriepack nach einem der Ansprüche 2 bis 9, wobei die PTC-Vorrichtung leitende Partikel umfasst, die in einem kristallinen Polymer verteilt sind, und wobei die PTC-Vorrichtung enthält:
- einen PTC-Körper zwischen der ersten Deckfolie und der zweiten Deckfolie;
 eine erste PTC-Zuführungsplatte, die mit einer ersten Oberfläche des PTC-Körpers verbunden ist; und
 eine zweite PTC-Zuführungsplatte, die mit einer zweiten Oberfläche des PTC-Körpers verbunden ist.
11. Batteriepack nach Anspruch 10, wobei die erste PTC-Zuführungsplatte einen ersten Kontaktabschnitt in Kontakt mit einer ersten Oberfläche des PTC-Körpers, einen ersten Verbindungsabschnitt, der sich von dem ersten Kontaktabschnitt erstreckt, und einen ersten Erweiterungsabschnitt, der sich in einem Winkel von dem ersten Verbindungsabschnitt erstreckt, enthält, und wobei die zweite PTC-Zuführungsplatte einen zweiten Kontaktabschnitt in Kontakt mit einer zweiten Oberfläche des PTC-Körpers, einen zweiten Verbindungsabschnitt, der sich von dem zweiten Kontaktabschnitt erstreckt, und einen zweiten Erweiterungsabschnitt, der sich in einem Winkel von dem zweiten Verbindungsabschnitt erstreckt, enthält.
12. Batteriepack nach Anspruch 11, wobei das Schaltungsmodul eine Antennenverbindungs-Anschlussfläche und eine PTC-Verbindungs-Anschlussfläche auf einer Oberfläche des Schaltungsmoduls enthält, wobei die Antennenverbindungs-Anschlussfläche eine erste Antennenverbindungs-Anschlussfläche und eine zweite Antennenverbindungs-Anschlussfläche umfasst, die mit dem ersten Erweiterungsabschnitt der ersten Antennenzuführungsplatte bzw. mit dem zweiten Erweiterungsabschnitt der zweiten Antennenzuführungsplatte verbunden sind, und wobei die PTC-Verbindungs-Anschlussfläche eine erste PTC-Verbindungs-Anschlussfläche und eine zweite PTC-Verbindungs-Anschlussfläche umfasst, die mit dem ersten Erweiterungsabschnitt der ersten PTC-Zuführungsplatte bzw. mit dem zweiten Erweiterungsabschnitt der zweiten PTC-Zuführungsplatte verbunden sind.

13. Batteriepack nach einem der Ansprüche 1 bis 12, weiter umfassend ein elektromagnetisches Abschirmungsband, das sich zwischen der freiliegenden Zelle und der Antennenanordnung befindet.
14. Batteriepack nach Anspruch 13, wobei das elektromagnetische Abschirmungsband eine Aufnahmerille enthält, die sich angrenzend an der PTC-Vorrichtung befindet.
15. Batteriepack nach einem der Ansprüche 1 bis 14, wobei das Schaltungsmodul einen externen Anschlussabschnitt enthält, und wobei der externe Anschlussabschnitt einen Leistungsanschluss, der elektrisch mit der PTC-Vorrichtung verbunden ist, und einen Antennenanschluss, der elektrisch mit der Antennenanordnung verbunden ist, enthält.

Revendications

1. Bloc-batteries comprenant:

une pile nue (110) ;
un module de circuit (120) connecté électriquement à la pile nue ;
un agencement d'antenne (150) connecté électriquement au module de circuit ; et
un dispositif à coefficient de température positif, CTP, (160) connecté électriquement au module de circuit, dans lequel le dispositif CTP est prévu sur l'agencement d'antenne.

2. Bloc-batteries selon la revendication 1, dans lequel l'agencement d'antenne comprend :

une première couche de recouvrement;
un motif d'antenne ;
une première plaque conductrice d'antenne et une deuxième plaque conductrice d'antenne connectées au motif d'antenne ; et
une deuxième couche de recouvrement recouvrant le motif d'antenne, le motif d'antenne étant situé entre les première et deuxième couches de recouvrement.

3. Bloc-batteries selon la revendication 2, dans lequel le motif d'antenne est agencé de manière à s'étendre autour des bords de la première couche de recouvrement.

4. Bloc-batteries selon la revendication 2 ou 3, dans lequel le dispositif CTP est situé entre les première et deuxième couches de recouvrement.

5. Bloc-batteries selon l'une quelconque des revendications 2 à 4, dans lequel le dispositif CTP est situé

sur une partie extérieure du motif d'antenne.

6. Bloc-batteries selon l'une quelconque des revendications 2 à 5, dans lequel la première plaque conductrice d'antenne comprend une première partie de base connectée à une première extrémité du motif d'antenne et une première partie d'extension s'étendant selon un angle de la première partie de base, et dans lequel la deuxième plaque conductrice d'antenne comprend une deuxième partie de base connectée à une deuxième extrémité du motif d'antenne et une deuxième partie d'extension s'étendant selon un angle de la deuxième partie de base.

7. Bloc-batteries selon l'une quelconque des revendications 2 à 6, dans lequel au moins une partie du dispositif CTP est située entre la pile nue et le module de circuit.

8. Bloc-batteries selon l'une quelconque des revendications 2 à 7, dans lequel l'agencement d'antenne est situé adjacent à un côté de la pile nue.

9. Bloc-batteries selon la revendication 8, dans lequel le côté de la pile nue auquel l'agencement d'antenne est adjacent est un côté principal de la pile nue, ledit côté principal s'étendant entre les deux extrémités de la pile nue, dans lequel le module de circuit est situé adjacent à l'une des extrémités de la pile nue.

10. Bloc-batteries selon l'une quelconque des revendications 2 à 9, dans lequel le dispositif CTP comprend des particules conductrices dispersées dans un polymère cristallin, et dans lequel le dispositif CTP comprend :

un corps CTP entre la première couche de recouvrement et la deuxième couche de recouvrement;
une première plaque conductrice CTP connectée à une première surface du corps CTP ; et
une deuxième plaque conductrice CTP connectée à une deuxième surface du corps CTP.

11. Bloc-batteries selon la revendication 10, dans lequel la première plaque conductrice CTP comprend une première partie de contact qui est en contact avec une première surface du corps CTP, une première partie de connexion s'étendant de la première partie de contact, et une première partie d'extension s'étendant selon un angle de la première partie de connexion, et dans lequel la deuxième plaque conductrice CEP comprend une deuxième partie de contact qui est en contact avec une deuxième surface du corps CTP, une deuxième partie de connexion s'étendant de la deuxième partie de contact, et une deuxième partie d'extension s'étendant selon un angle de la

deuxième partie de connexion.

- 12.** Bloc-batteries selon la revendication 11, dans lequel le module de circuit comprend une pastille de connexion d'antenne et une pastille de connexion CTP sur une surface du module de circuit, dans lequel la pastille de connexion d'antenne comprend une première pastille de connexion d'antenne et une deuxième pastille de connexion d'antenne connectées à la première partie d'extension de la première plaque conductrice d'antenne et à la deuxième partie d'extension de la deuxième plaque conductrice d'antenne, respectivement, et dans lequel la pastille de connexion CTP comprend une première pastille de connexion CTP et une deuxième pastille de connexion CTP connectées à la première partie d'extension de la première plaque conductrice CTP et à la deuxième partie d'extension de la deuxième plaque conductrice CTP, respectivement.
- 13.** Bloc-batteries selon l'une quelconque des revendications 1 à 12, comprenant en outre une bande de blindage électromagnétique située entre la pile nue et l'agencement d'antenne.
- 14.** Bloc-batteries selon la revendication 13, dans lequel la bande de blindage électromagnétique comprend une rainure de réception située adjacente au dispositif CTP.
- 15.** Bloc-batteries selon l'une quelconque des revendications 1 à 14, dans lequel le module de circuit comprend une partie de borne externe, et dans lequel la partie de borne externe comprend une borne d'alimentation connectée électriquement au dispositif CTP et une borne d'antenne connectée électriquement à l'agencement d'antenne.


40

45

50

55

FIG. 1a

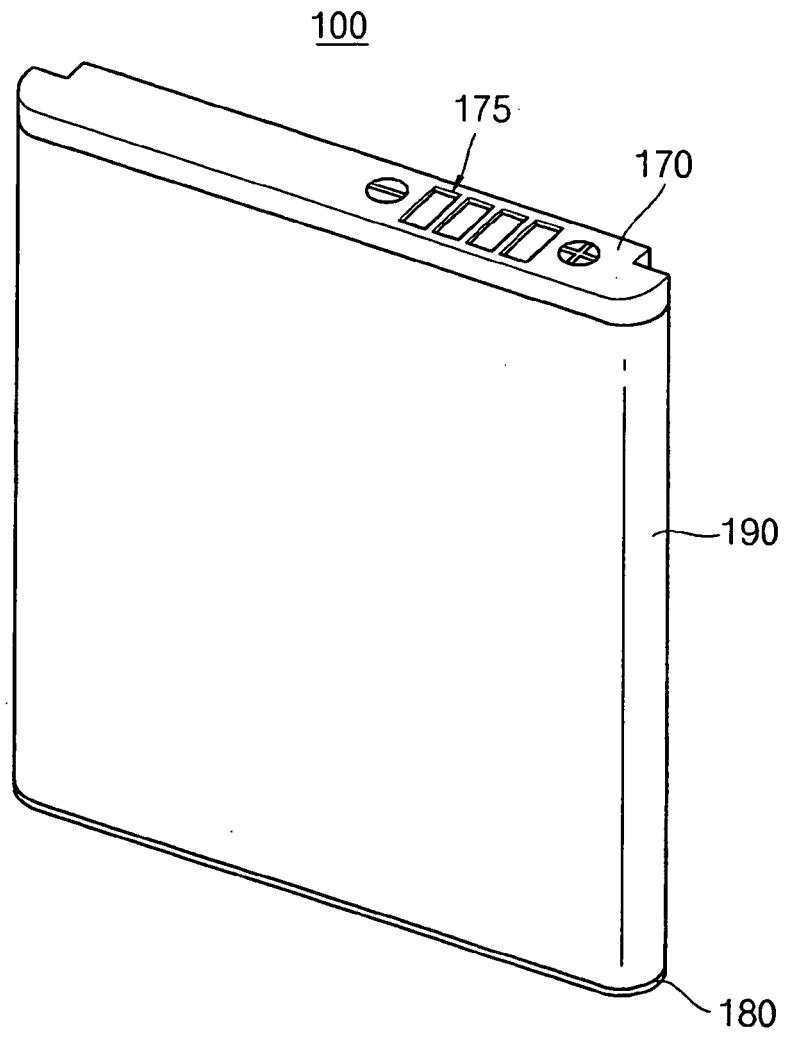

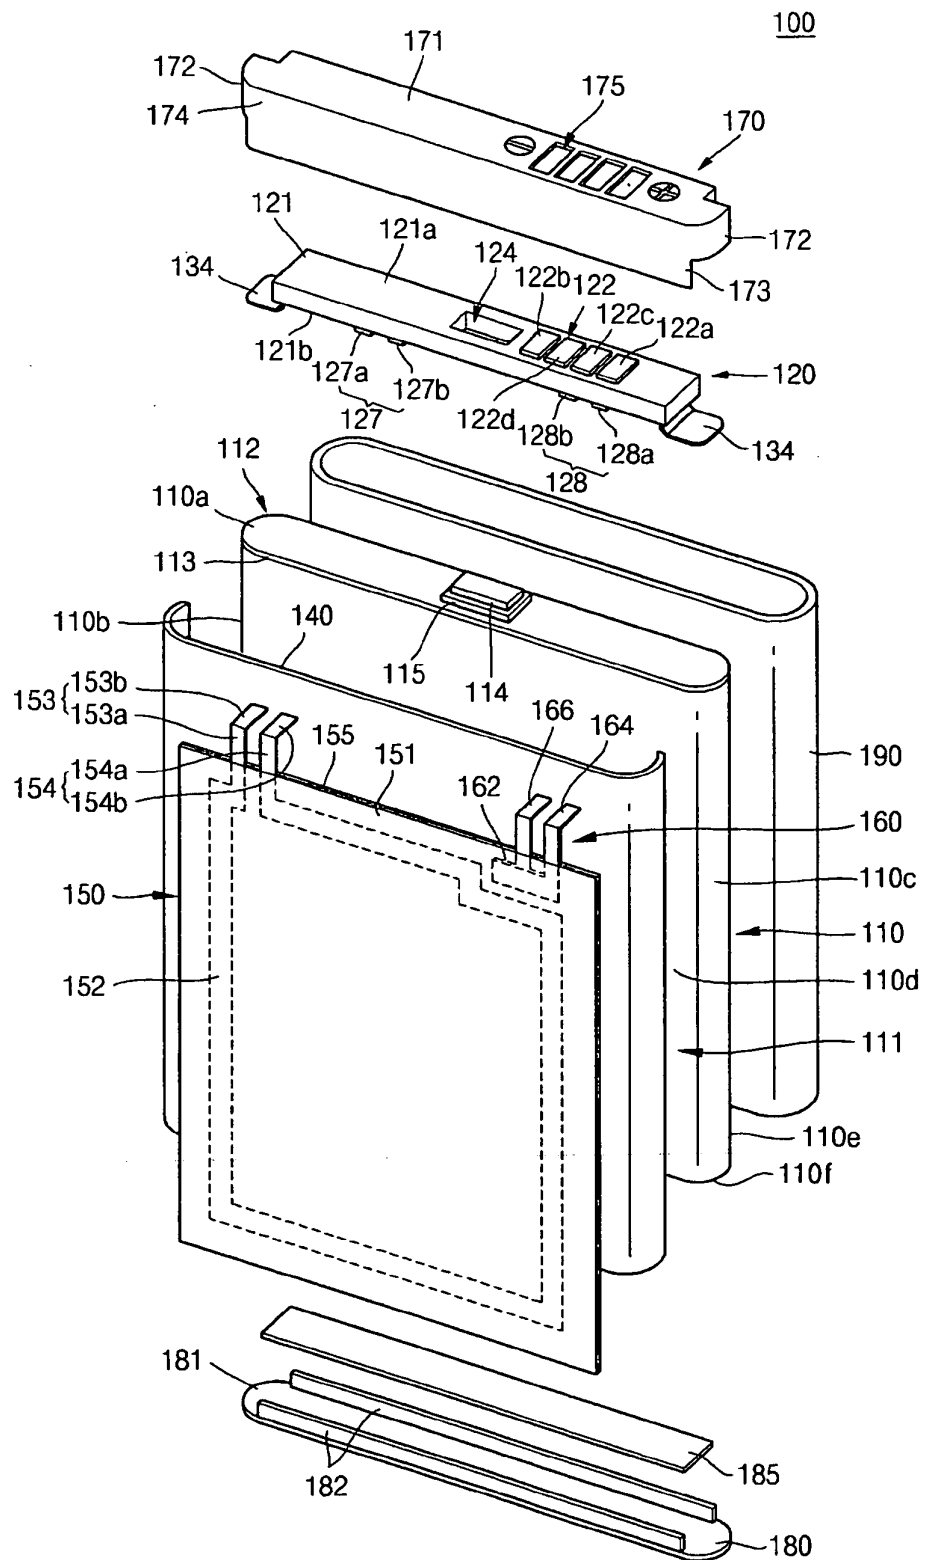


FIG. 1b

FIG. 2

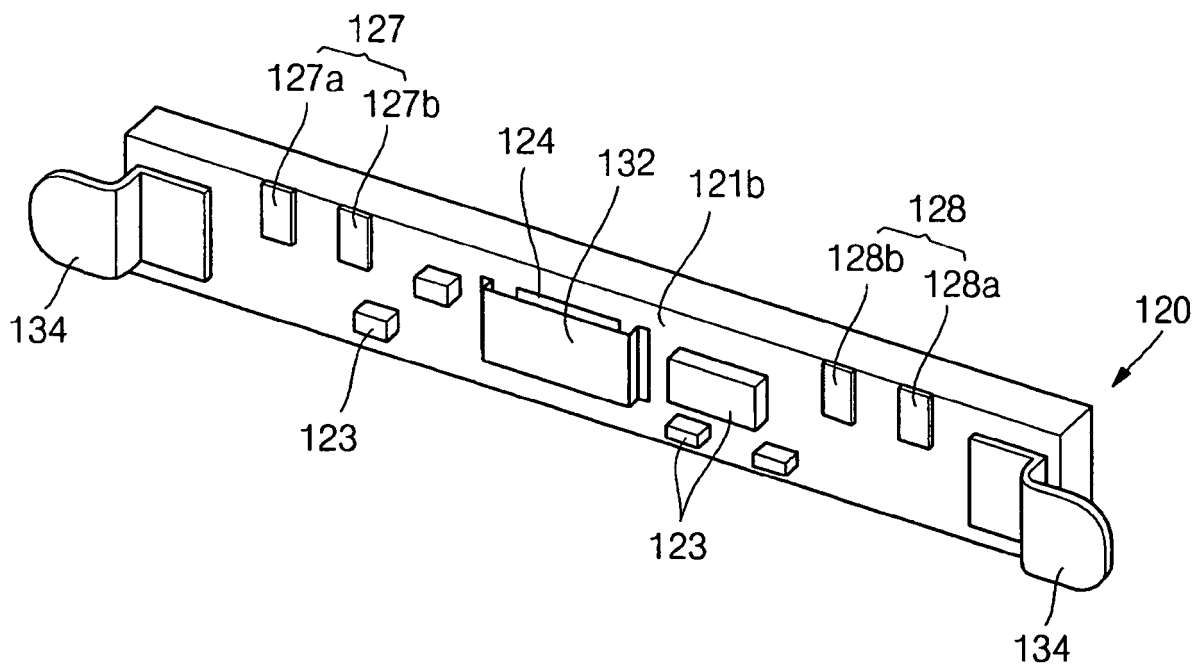


FIG. 3

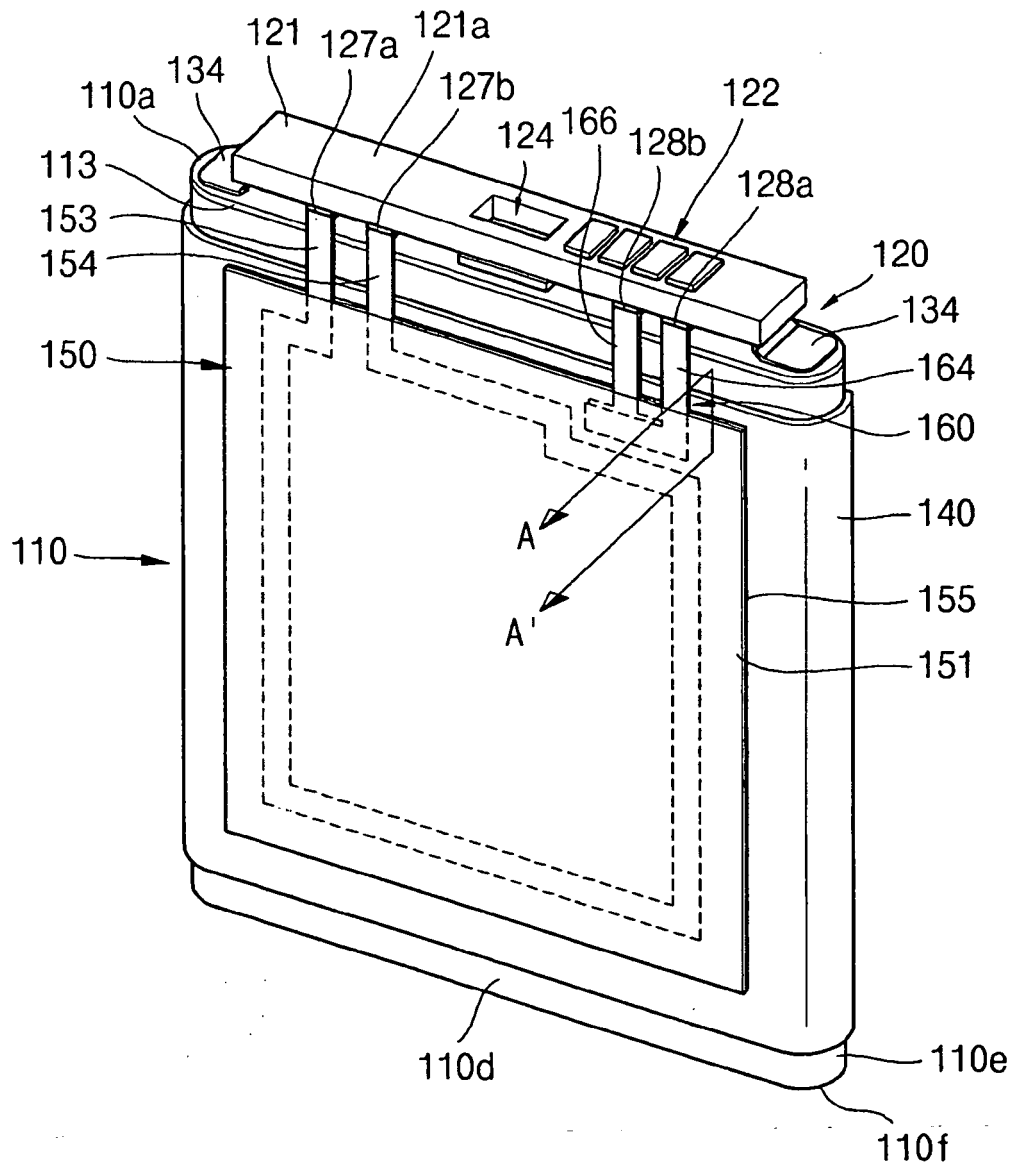


FIG. 4

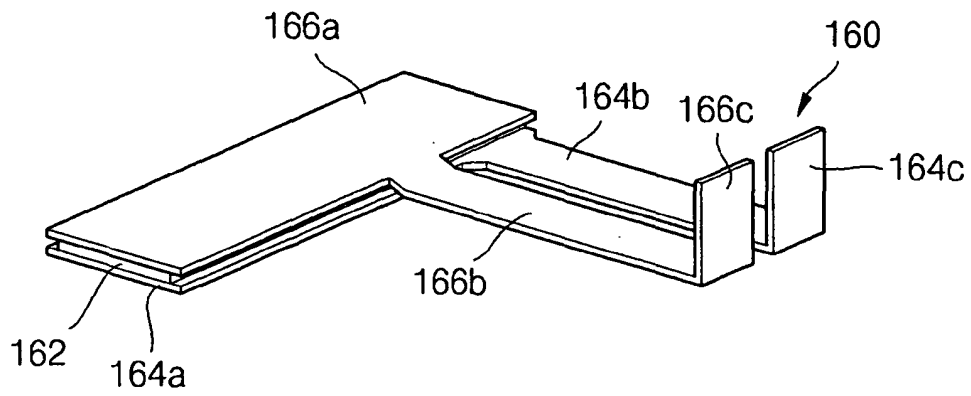


FIG. 5

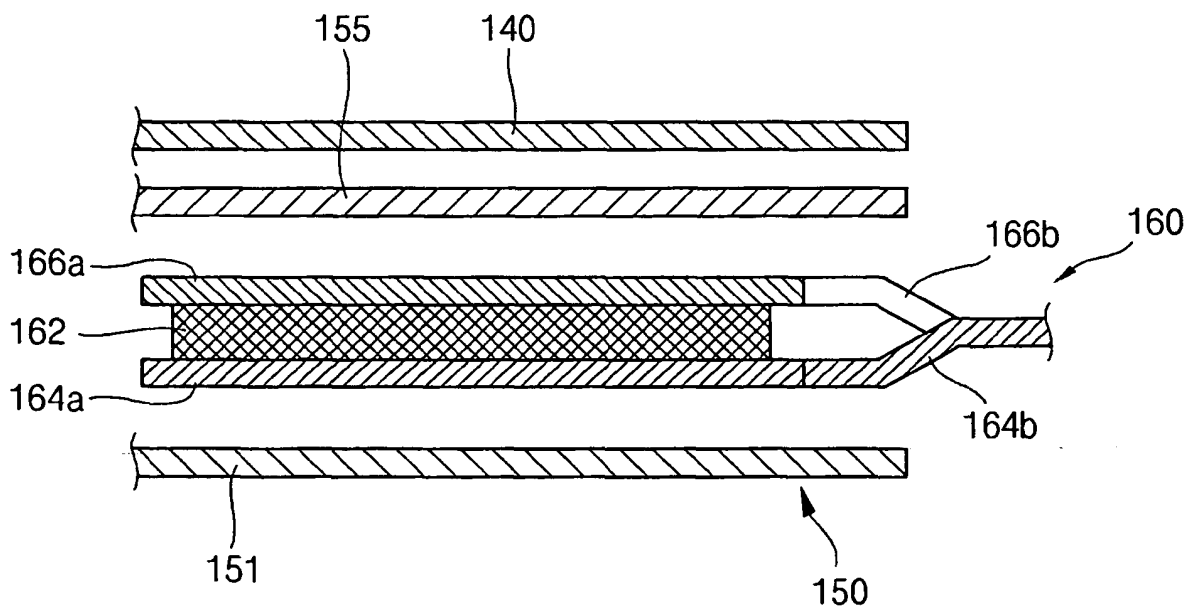
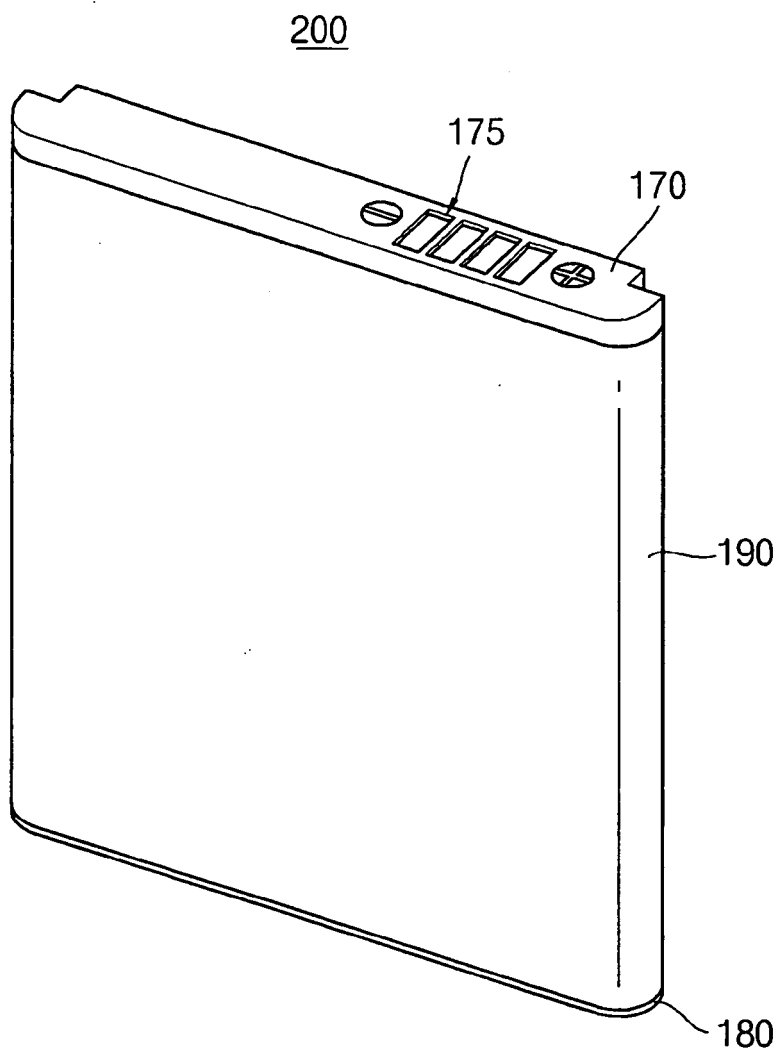


FIG. 6a



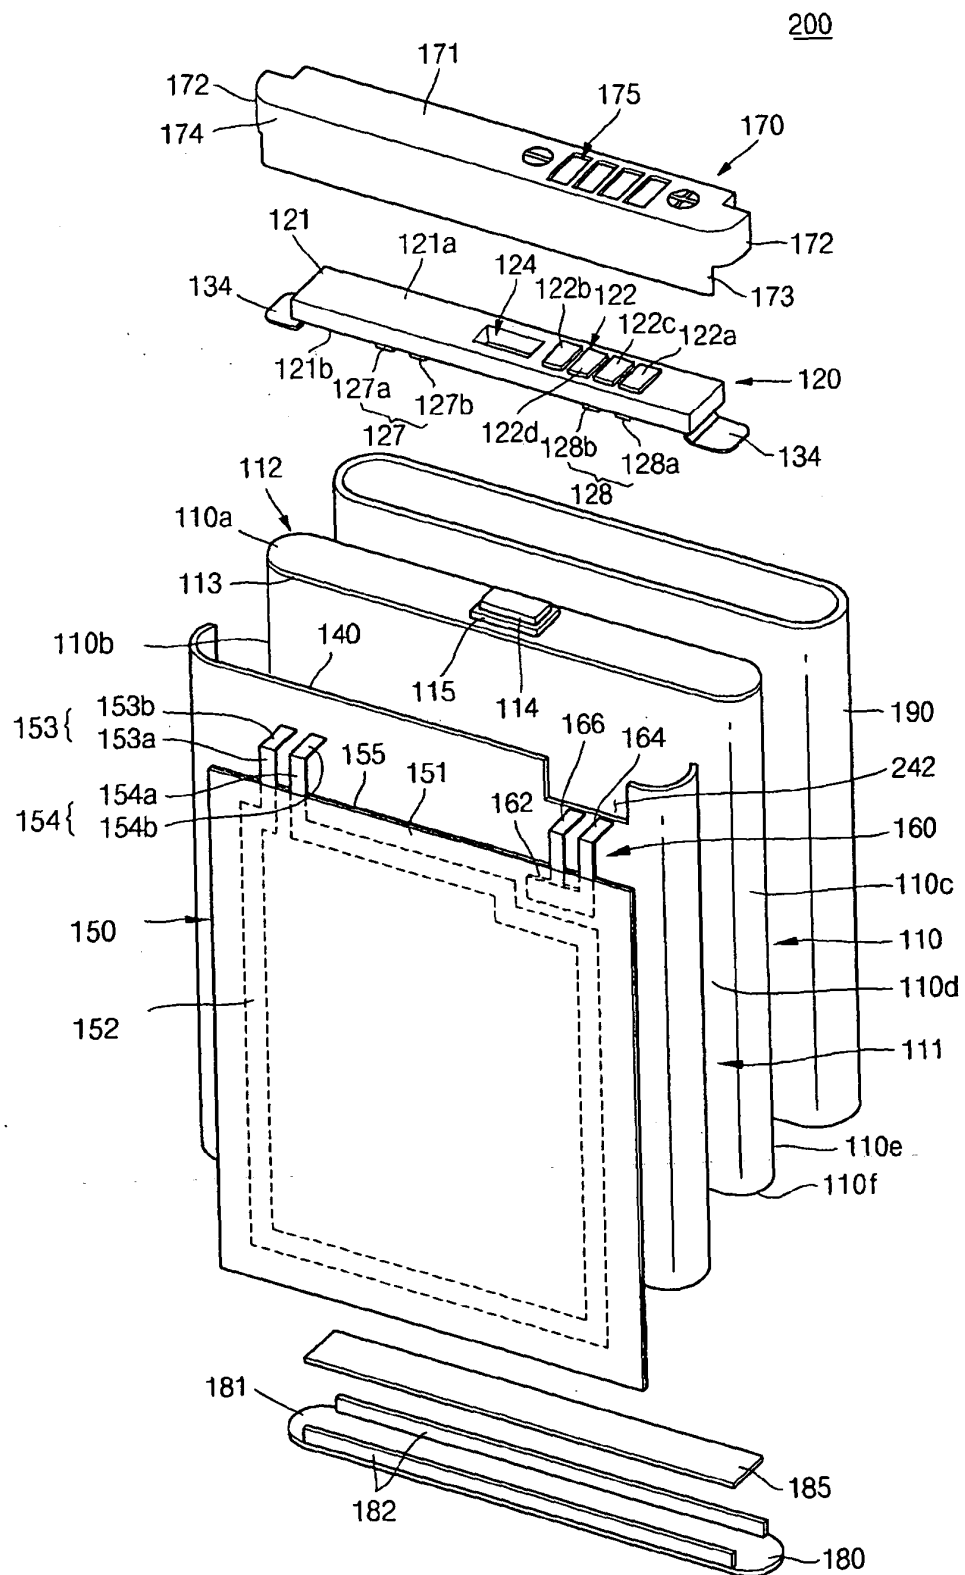


FIG. 6b

FIG. 7

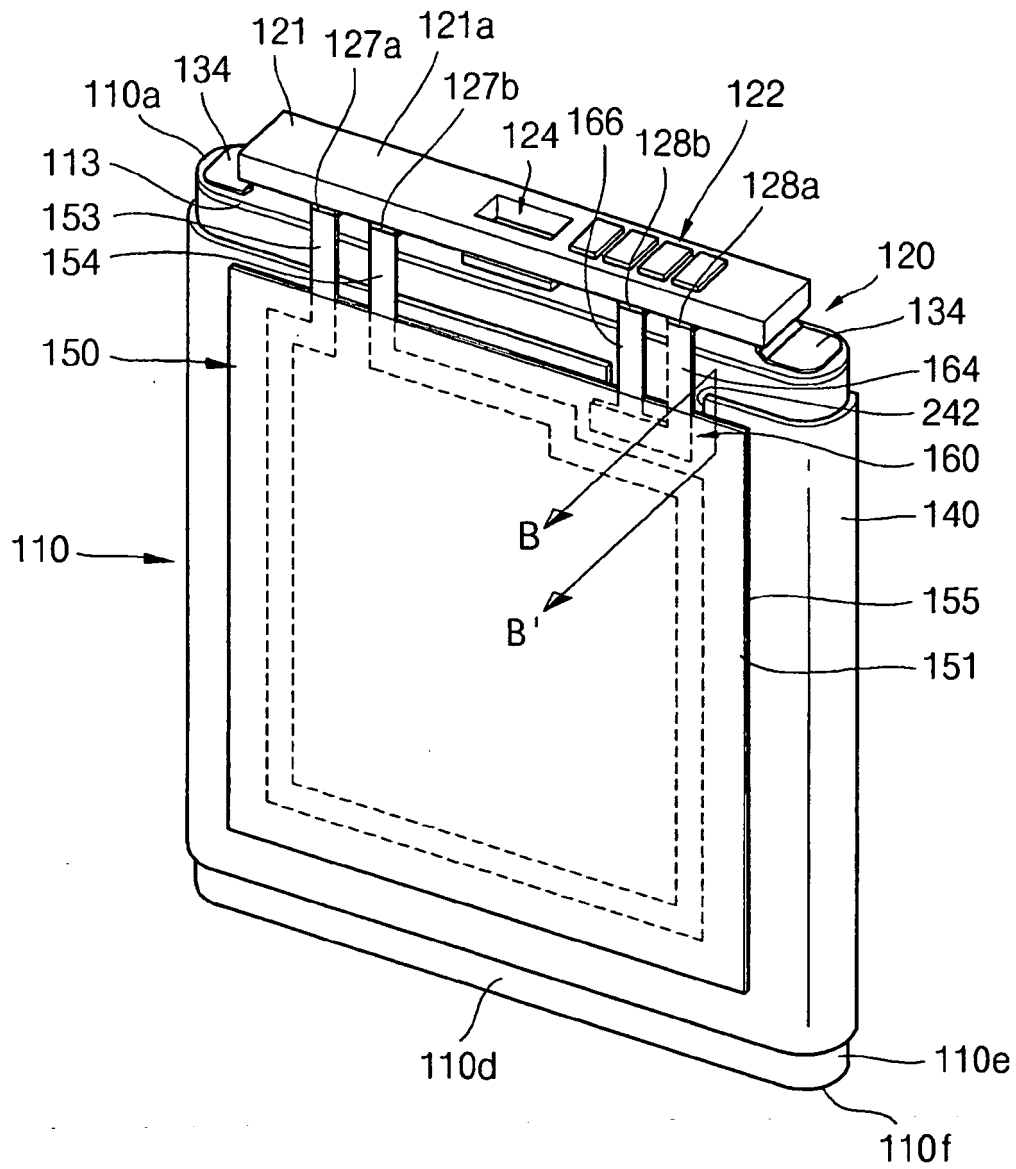


FIG. 8


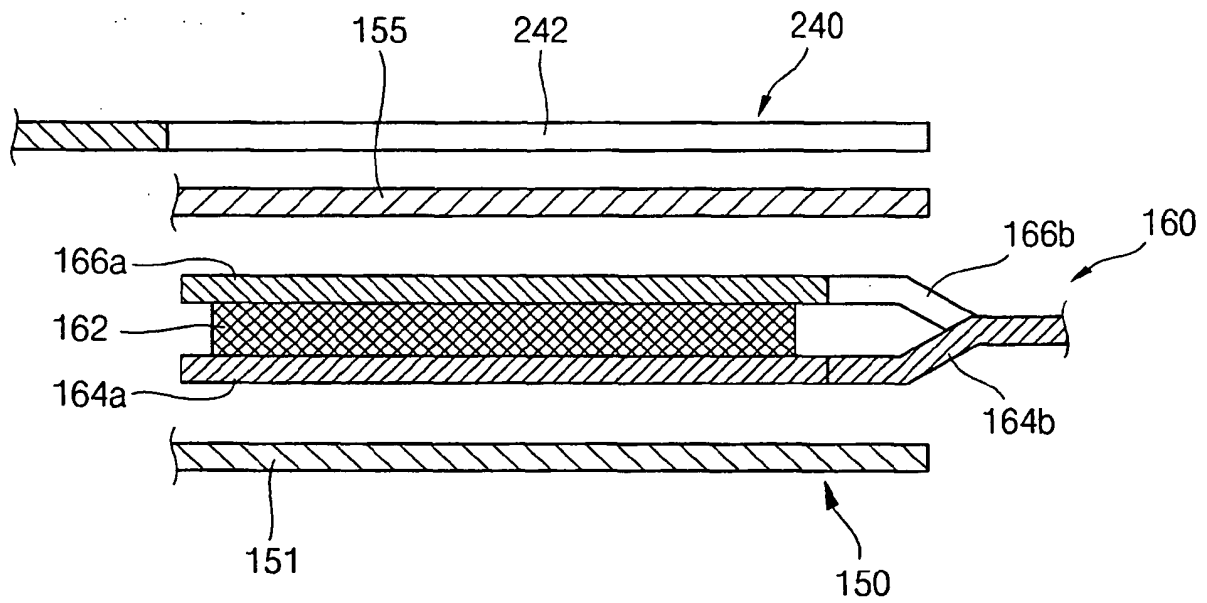


FIG. 9

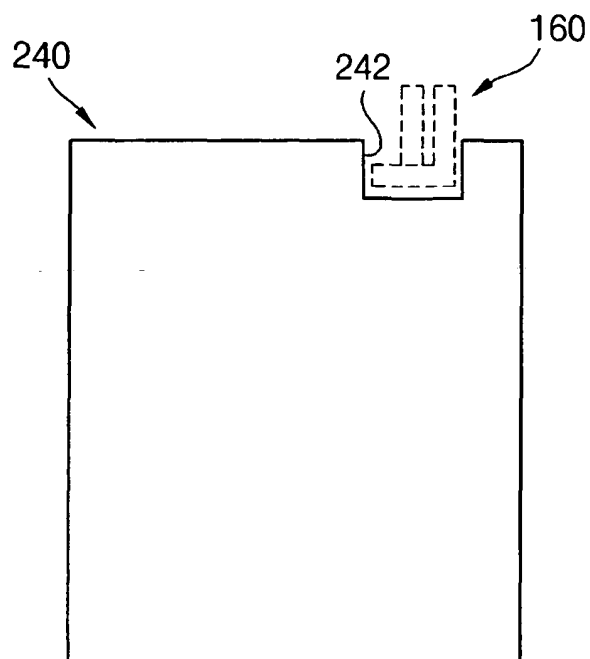

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2006112627 A [0005]