

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 May 2010 (14.05.2010)

PCT

(10) International Publication Number
WO 2010/052366 A1

(51) International Patent Classification:
F21V 8/00 (2006.01) *G02B 5/18* (2006.01)
G02B 27/42 (2006.01)

(21) International Application Number:
PCT/FI2009/050853

(22) International Filing Date:
23 October 2009 (23.10.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/198,816 10 November 2008 (10.11.2008) US

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FI-02150 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KIMMEL, Jyrki** [FI/FI]; Elli Tompurin katu 6, FI-33720 Tampere (FI).

(74) Agent: **NOKIA CORPORATION**; IPR Department, Virpi Tognetty, Keilalahdentie 4, FI-02150 Espoo (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DIFFRACTIVE BACKLIGHT STRUCTURE

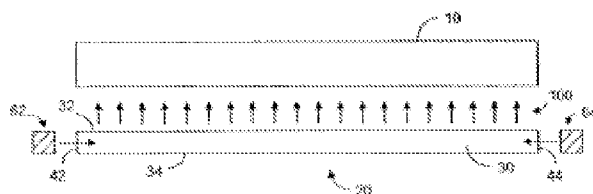


FIG. 1

(57) Abstract: An apparatus is provided, comprising a plate made substantially of an optical material, the plate comprising: a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection; a plurality of edge surfaces configured for receiving the light components into the plate; and a plurality of light diffractive elements distributed on the first surface for directing part of the light components out of the first surface by diffraction.



WO 2010/052366 A1

DIFFRACTIVE BACKLIGHT STRUCTURE

Field of the Invention

5 The present invention relates to a backlight source and, more particularly, to a backlight source having a diffractive structure.

Background of the Invention

10 A backlight source is commonly used for providing illumination to a display panel such as a liquid-crystal display (LCD) panel. In some backlight sources, color light-emitting diodes are arranged in a certain pattern for illuminating the LCD panel from the backside thereof.

Summary of the Invention

15 The present invention makes use of the selective diffractive properties of diffractive elements to direct different color light components in a light guide out of one of light guide surfaces. The diffracted light components from the light guide surface form a broad light beam of substantial uniformity for illuminating the backside of a display device, such as a liquid crystal display panel. According to various embodiments of the present invention, a grating structure having an elongated body is used to receive a laser light beam through one
20 end of the elongated body. Fan-out gratings along the elongated body are used to diffract the received laser beam in order to form a light sheet out of a side edge of the elongated body. By placing the grating structure adjacent to one edge of the light guide, the light sheet is thus introduced into the light guide. If only a light sheet of one color is introduced into the light guide, then the diffracted light components out of the light guide surface form a broad light
25 beam of a single color. If two or more light sheets of different colors are introduced into the light guides, then the diffracted light components out of the light guide surface form a broad light beam of multiple colors. If the diffracted light components out of the light guide surface contain three primary color components of red, green and blue in proper proportions, for example, then a broad light beam of white color can be achieved.

30 According to one embodiment of the present invention, one light guide is used to receive three light sheets in three primary colors in order to form a broad white beam. According to another embodiment of the present invention, two or more light sheets are used to receive light sheets of different colors.

35 Thus, the first aspect of the present invention is an apparatus or a backlight source, which comprises:

a plate made substantially of an optical material, the plate comprising:

a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection;

a plurality of edge surfaces configured for receiving the light components into the plate; and

a plurality of light diffractive elements distributed on the first surface for directing part of the light components out of the first surface by diffraction.

The apparatus further comprises:

one or more grating structures configured for receiving one or more light beams for providing the light components through said one or more edge surfaces, wherein each of said one or more grating structures is configured for receiving a light beam for providing the light components in form of a light sheet. Each of said one or more grating structures comprises an elongated body having at least one side edge along a longitudinal axis and at least one end edge, and wherein the light beam is received through the end edge and the light sheet is provided through the side edge.

According to various embodiment of the present invention, the optical material is chosen such that the light components are guided between the first surface and the second surface by total internal reflection.

According to various embodiments of the present invention, the light components comprise a first color component, a second color component and a third color component, and the light diffractive elements comprise first diffractive elements configured for diffracting the first color component, second diffractive elements configured for diffracting the second color component, and third diffractive elements configured for diffracting the third color component.

According to one embodiment of the present invention, one plate is used as a light guide having a plurality of diffractive elements distributed over one of the light guide surfaces, wherein all of the first, second and third diffractive elements, and wherein different side edges of the plate are used to receive a plurality of light sheets of different colors.

According to another embodiment of the present invention, two or more plates are used as light guides, and each light guide is used to receive a light sheet of a single color. The diffractive elements on the surface of each light guide are configured to diffract the light components of the received light sheet. As such, the diffracted light components out of the surface each light guide form a broad light beam of a different single color. When the plates

are stacked on one another, the combination of three broad light beams of three different colors form a broad white light beam.

The aspect of the present invention is a method of realizing a backlight source. The method comprises:

- 5 providing a plate made substantially of an optical material, the plate comprising:
a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection, and
a plurality of edge surfaces configured for receiving the light components into the plate; and
10 arranging a plurality of light diffractive elements on the first surface for directing part of the light components out of the first surface by diffraction.

The method further comprises:

- arranging one or more grating structures adjacent to said one or more edged surfaces of the plate, the grating structures configured for receiving one or more light beams for
15 providing the light components through said one or more edge surfaces, wherein each of said one or more grating structures is configured for receiving a light beam for providing the light components in form of a light sheet, and wherein each of said one or more grating structures comprises an elongated body having at least one side edge along a longitudinal axis and at least one end edge, and wherein the light beam is received through the end edge and the light
20 sheet is provided through the side edge.

According to the present invention, the optical material is chosen such that the light components are guided between the first surface and the second surface by total internal reflection.

25

- According to one embodiment of the present invention, the light components comprise a first color component, a second color component and a third color component, and wherein the light diffractive elements comprise first diffractive elements configured for diffracting the
30 first color component, second diffractive elements configured for diffracting the second color component, and third diffractive elements configured for diffracting the third color component.

The present invention will become apparent upon reading the description taken in conjunction with Figures 1 to 6.

35

Brief Description of the Drawings

Figure 1 shows a backlight source in relationship with a display panel.

Figure 2 shows a top view of a backlight source, according to one embodiment of the present invention.

5 Figure 3 shows a cross sectional view of the backlight source of Figure 2.

Figure 4 shows a backlight source, according to another embodiment of the present invention.

Figure 5 shows a diffractive structure configured for producing a light sheet from a received laser beam.

10 Figure 6 shows a different arrangement of the diffractive elements on a surface of a light guide.

Detailed Description of the Invention

As known in the art, a backlight source is placed on the backside of a display panel to provide illumination to the display panel. As shown in Figure 1, a backlight source **20** is placed on the backside of the display panel **10**, such as a liquid-crystal display panel. According to various embodiments of the present invention, the backlight source **20** has a backlight plate **30** and a plurality of light sources **62**, **64** to provide a plurality of light beams into the backlight plate **30** from the edges **42** and **44**. In addition, another light source **66** is also used to provide a light beam from another edge **46** of the backlight plate **30** as shown in Figure 2. As shown in Figure 1, the backlight plate **30** has a first surface **32** facing the display panel **10** and an opposing second surface **34**. Light from the backlight plate **30** is directed to the backside to the display panel **10** as a broad light beam **100** mainly through the first surface **32**.

25 Figure 2 shows a top view of the backlight source **20** of the present invention. The backlight plate **30** can be rectangular in shape and has four edges, for example. As such, three or four light sources can be placed near the edges to provide a plurality of light beams into the backlight plate through the edges. As shown in Figure 2, the light source **62** comprises a light directing structure **72** configured to direct a red laser beam **92** into the backlight plate **30** through the edge **42**, the light source **64** comprises a light directing structure **74** configured to direct a blue laser beam **94** into the backlight plate **30** through the edge **44**, and the light source **66** comprises a light directing structure **76** configured to direct a green laser beam **96** into the backlight plate **30** through the edge **46**. The light directing structures **72**, **74** and **76** receive light beams **92**, **94** and **96** from their edges, for example. Each of the light directing structures **72**, **74** and **76** comprises light directing elements such as fan-out gratings in order to

expand the received light beam **92**, **94** or **96** into a light sheet **102**, **104** or **106**. The light beams **92**, **94** and **96** can be laser beams of red color, blue color and green color, for example, and the light sheets **102**, **104** and **106** are light sheets of red color, blue color and green color. The light beams **92**, **94** and **96** can be separately provided by lasers **82**, **84** and **86**. The fan-out gratings in the light directing structures **72**, **74** and **76** are configured to diffract the light beams in red, blue and green, respectively.

On the surface **32** of the backlight plate **30**, a plurality of diffractive elements **52**, **54** and **56** distributed throughout the surface **32**. The diffractive elements **52** are configured to diffract more effectively a red light beam, the diffractive elements **54** are configured to diffract more effectively a blue light beam, and the diffractive elements **56** are configured to diffract more effectively a green light beam. Preferably, the diffractive elements **52**, **54** and **56** are arranged in an array, such as a delta array, as shown in Figure 2. In a delta array, each of the diffraction elements **52**, **54** and **56** is located at a corner of a triangle.

Figure 3 shows a cross sectional view of the backlight plate **30**, according to one embodiment of the present invention. As shown in Figure 3, the first surface **32** of the backlight plate **30** comprises an array of diffractive elements **52**, **54** and **56**. After the light sheet **102** enters the backlight plate **30** through the edge **42**, the light sheet **102** is guided between the first surface **32** and the second surface **34** by way of total internal reflection (TIR), for example. When part of the light sheet **102** encounters the diffractive elements **52**, it is diffracted out of the first surface **32**. The diffracted light from the diffractive elements **52** forms a broad light beam of the same color out of the first surface **32** of the backlight plate **30**. Likewise, after the light sheet **104** enters the backlight plate **30** through the edge **44**, the light sheet **102** is guided between the first surface **32** and the second surface **34** by way of total internal reflection. When part of the light sheet **104** encounters the diffractive elements **54**, it is diffracted out of the first surface **32**. The diffracted light from the diffractive elements **54** forms a broad light beam of the same color out of the first surface **32** of the backlight plate **30**. After the light sheet **106**, as shown in Figure 2, enters into the backlight plate **30** through another edge of the backlight plate **30**, the light sheet **106** is also guided between the first surface **32** and the second surface **34** by way of total internal reflection. As with the light sheets **102** and **104**, part of the light sheet **106** encounters the diffractive elements **56** and is diffractive out of the first surface **32** to form a broad beam.

As an example, the light beam **92** is a red laser beam and the diffracted light **112** from the diffractive elements **52** forms a red light beam away from the first surface **32**; the light beam **94** is a blue laser beam and the diffracted light **114** from the diffractive elements **54** forms a blue light beam away from the first surface **32**; and the light beam **96** is a green laser

beam and the diffracted light **112** from the diffractive elements **56** forms a green light beam away from the first surface **32**. As a result, a broad white light beam **100** is formed. This broad white light beam can be used to illuminate a display panel from the backside of the display panel **10**, as shown in Figure 1.

5 In the above-described example, three light beams **92**, **94** and **96** of red, blue and green colors are used to form a white light beam for illumination. It should be noted that, the color of the light beams and the number of the light beams can be different depending on the application. For example, if it is desirable to form a broad light beam of a single color for illumination, it is possible to use one, two or more laser beams of the same color as the light
10 source. Accordingly, one, two or more light directing structures with fan-out gratings configured for forming one, two or more light sheets, and all the diffractive elements are configured for diffracting light of that single color. If it is desirable to provide a broad light beam composed of two primary colors such as red and blue, it is possible to use one or two red light beams **92** and one or two blue light beams **94** to form a number of light sheets **102**
15 and **104**. It is more effective that the diffractive elements on the first surface **32** comprise only diffractive elements **52** and **54**. In some applications where a broad beam of an ultraviolet wavelength is desirable, it is possible to fabricate on the first surface a plurality of diffractive elements configured to diffract that ultraviolet wavelength. Likewise, diffractive elements configured to diffract infrared can be used to form a broad infrared beam out of the
20 first surface **32** of the plate **30**, for example.

In another embodiment of the present invention, two or more backlight plates are stacked one on top another to form a single backlight source, as shown in Figure 4. As shown in Figure 4, three separate backlight plates **30**, **30'** and **30''** are used to form a backlight source **20**. On the first surface **32** of the backlight plate **30**, a plurality of diffractive elements **52** are
25 formed to diffract light from the light sheet **102** provided by the light source **62**. On the first surface **32'** of the backlight plate **30'**, a plurality of diffractive elements **54** are formed to diffract light from the light sheet **104** provided by the light source **64**. On the first surface **32''** of the backlight plate **30''**, a plurality of diffractive elements **56** are formed to diffract light from the light sheet **106** provided by the light source **66**.

30 Each of the diffractive structures **72**, **74** and **76** can be an elongated body made of an optical material. For example, the diffractive structure **72** has an elongated body with at least one side edge **73** along a longitudinal axis and at least one end edge **71** so that the light beam **92** from the laser **82** can be received through the end edge **71** and the light sheet **102** is provided through the side edge **73**, as shown in Figure 5.

It should be noted that diffractive elements **52**, **54** and **56** on the surface **30** can be holographically produced or otherwise. Likewise, the fan-out gratings in the diffractive structures **72**, **74** and **76** can also be holographically produced, for example. The diffractive structures can be replaced by other structures that can produce a light sheet from a laser beam.

It should also be noted that the diffractive elements **52**, **54** and **56** have been described as being arranged in a delta array in which each different one of the diffractive elements is located in one corner of a triangle, but a different array can also be used to arrange the diffractive elements. For example, the diffractive elements configured for diffracting the color light sheets in R, G and B can be arranged in a rectangular or a square array as shown in Figure 6.

In summary, the present invention is concerned with light guide arranged for receiving light sheets of different colors through its edge surfaces. Diffractive elements are distributed one of the light guide surfaces for diffracting part of the light sheets out of the light guide surface. The diffractive elements include those for diffracting red color, those for diffracting blue color and those for diffracting green colors. Diffracted light of different colors forms a broad light beam of white color. A grating structure having an elongated body is used to receive a laser light beam through one end of the body, and fan-out gratings along the body are used to diffract the received laser beam for forming a light sheet out of a side edge. The grating structure is placed adjacent to one edge of the light guide so as to introduce the light sheet into the light guide

The present invention provides an apparatus which comprises:

a plate made substantially of an optical material, the plate comprising:

a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection;

a plurality of edge surfaces configured for receiving the light components into the plate; and

a plurality of light diffractive elements distributed on the first surface for directing part of the light components out of the first surface by diffraction.

According to various embodiments of the present invention, the apparatus further comprises:

one or more grating structures configured for receiving one or more light beams for providing the light components through said one or more edge surfaces.

According to various embodiments of the present invention, the optical material is chosen such that the light components are guided between the first surface and the second surface by total internal reflection, and each of said one or more grating structures is

configured for receiving a light beam for providing the light components in form of a light sheet.

According to various embodiments of the present invention, each of said one or more grating structures comprises an elongated body having at least one side edge along a longitudinal axis and at least one end edge, and wherein the light beam is received through the end edge and the light sheet is provided through the side edge.

According to various embodiments of the present invention, the light components comprise a first color component, a second color component and a third color component, and wherein the light diffractive elements comprise first diffractive elements configured for diffracting the first color component, second diffractive elements configured for diffracting the second color component, and third diffractive elements configured for diffracting the third color component.

According to various embodiments of the present invention, the first color component is a red light component, the second color component is a green light component and the third color component is a blue light component.

The present invention also provides a method, which comprises:

providing a plate made substantially of an optical material, the plate comprising:

a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection, and

a plurality of edge surfaces configured for receiving the light components into the plate; and

arranging a plurality of light diffractive elements on the first surface for directing part of the light components out of the first surface by diffraction.

According to various embodiments of the present invention, the method further comprises: arranging one or more grating structures adjacent to said one or more edged surfaces of the plate, the grating structures configured for receiving one or more light beams for providing the light components through said one or more edge surfaces.

CLAIMS

1. An apparatus, comprising:
a plate made substantially of an optical material, the plate comprising:
5 a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection;
a plurality of edge surfaces configured for receiving the light components into the plate; and
a plurality of light diffractive elements distributed on the first surface for directing part
10 of the light components out of the first surface by diffraction.
2. An apparatus as in claim 1, comprising:
one or more grating structures configured to receive one or more light beams and to provide the light components through at least one of said plurality of edge surfaces.
15
3. An apparatus as in claim 2, wherein said one or more grating structures is configured to receive a light beam and to provide the light components in form of a light sheet.
4. An apparatus as in claim 2 or 3, wherein said one or more grating structures
20 comprising an elongated body having at least one side edge along a longitudinal axis and at least one end edge, and wherein the light beam is received through the end edge and the light sheet is provided through the side edge.
5. An apparatus as in any preceding claim, wherein the optical material is chosen such
25 that the light components are guided between the first surface and the second surface by total internal reflection.
6. An apparatus as in any preceding claim, wherein the light components comprise a first color component, a second color component and a third color component, and wherein
30 the light diffractive elements comprise first diffractive elements configured to diffract the first color component, second diffractive elements configured to diffract the second color component, and third diffractive elements configured to diffract the third color component.

7. An apparatus as in claim 6, wherein the first color component is a red light component, the second color component is a green light component and the third color component is a blue light component.
- 5 8. An apparatus as in any preceding claim, wherein the light components comprise an ultraviolet light component.
9. An apparatus as in any preceding claim, wherein the light components comprise an infrared light component.
- 10 10. An apparatus as in any preceding claim, wherein the received light beams comprise laser beams.
11. An apparatus as in any preceding claim, wherein the diffracted light components are
15 configured to form a broad white light beam.
12. An apparatus as in any preceding claim, wherein the apparatus comprises a backlight source for a display device.
- 20 13. An apparatus as in claim 12, wherein the display device comprises a liquid crystal display device.
14. An apparatus as in any preceding claims, comprising two or more plates made substantially of an optical material.
- 25 15. An apparatus as in claim 14, wherein each of the two or more plates comprises a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection;
a plurality of edge surfaces configured for receiving the light components into the
30 plate; and
a plurality of light diffractive elements distributed on the first surface for directing part of the light components out of the first surface by diffraction.
16. An apparatus as in any of claims 14-15, wherein the two or more plates are stacked on
35 one another.

17. An apparatus as in any of claims 14-16, wherein each of the two or more plates is configured to receive one color component.

18. A method, comprising:

providing a plate made substantially of an optical material, the plate comprising:
a first surface and an opposing second surface for guiding light components between the first surface and the second surface by reflection, and a plurality of edge surfaces configured for receiving the light components into the plate; and
arranging a plurality of light diffractive elements on the first surface for directing part of the light components out of the first surface by diffraction.

19. A method as in claim 18, the method comprising: arranging one or more grating structures adjacent to at least one of said plurality of edged surfaces of the plate, the grating structures configured to receive one or more light beams for providing the light components through said at least one of plurality of edge surfaces.

20. A method as in claim 18 or 19, wherein the optical material is chosen such that the light components are guided between the first surface and the second surface by total internal reflection.

21. A method, comprising:

receiving light components through one or more edge surfaces of a plate made substantially of an optical material,
guiding the light components by reflection between a first surface and an opposing second surface of the plate, and
directing part of the light components out of the first surface by diffraction.

22. A method as in claim 21, comprising:

receiving one or more light beams in one or more grating structures, and providing the light components through at least one of said plurality of edge surfaces.

23. A method as in claim 22, wherein

the received one or more light beams are expanded into a light.

24. A method as in claim 22 or 23, wherein said one or more grating structures comprise an elongated body having at least one side edge along a longitudinal axis and at least one end edge, and wherein the light beam is received through the end edge and the light sheet is provided through the side edge.

5

25. A method as in any of claims 21-24, wherein the light components are guided between the first surface and the second surface by total internal reflection.

10

26. A method as in any of claims 21-25, wherein the light components comprise a first color component, a second color component and a third color component, and diffracting the first color component with first diffractive elements; diffracting the second color component with second diffractive elements, and diffracting the third color component with third diffractive elements.

15

27. A method as in claim 26, wherein the first color component comprises a red light component, the second color component comprises a green light component and the third color component comprises a blue light component.

20

28. A method as in any of claims 21-27, wherein the light components comprise at least one of ultraviolet light component and infrared light component.

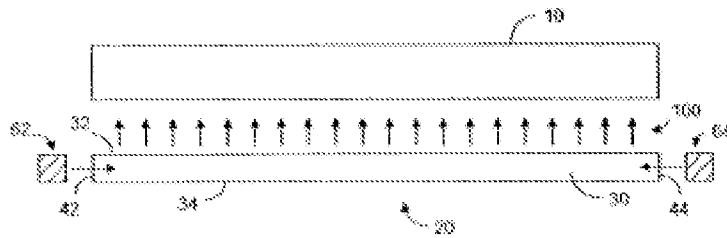


FIG. 1

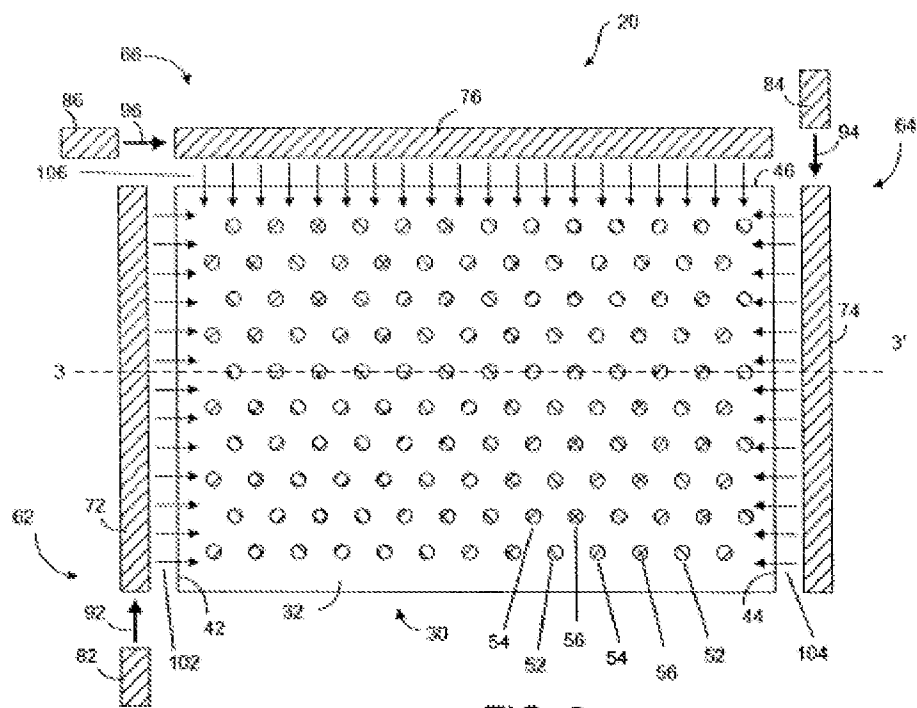


FIG. 2

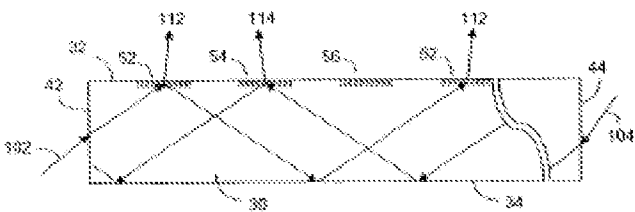


FIG. 3

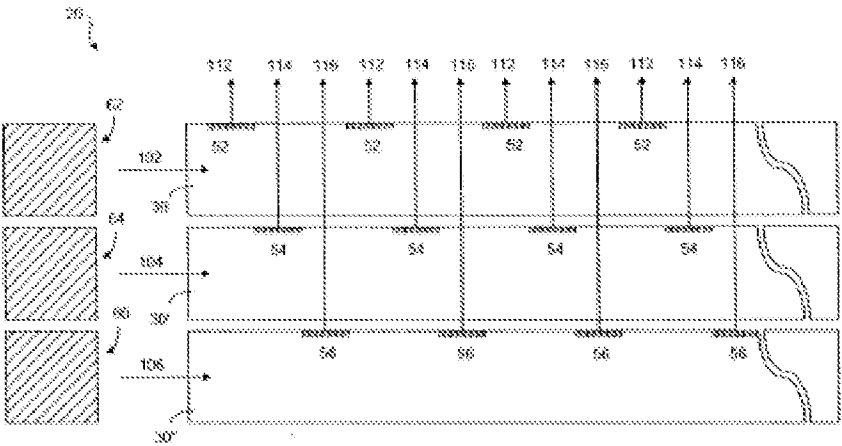


FIG. 4

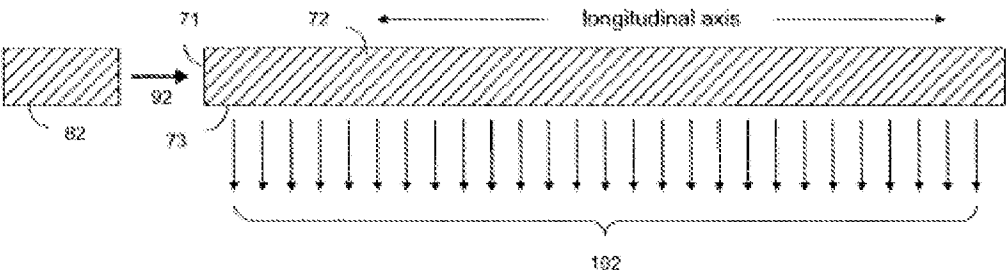


FIG. 5

R G B R G
G B R G B
B R G B R
R G B R G
G B R G B

FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2009/050853

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: F21V, G02B, G09F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI, INSPEC, XPAIP, XPIEE, XPESP, XPRD, XPI3E, XPIOP

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008059319 A1 (NOKIA CORP et al.) 22 May 2008 (22.05.2008)	1, 5-18, 20, 21, 25-28
Y	p. 3, line 7 - p. 8, line 3; p. 8, line 12 - p. 25, line 17; figs. 2-4. Ibid.	2-4, 19, 22-24
X	KIMMEL, J. et al. A Novel Diffractive Backlight Concept for Mobile Displays. Journal of the Society for Information Display, February 2008, Vol. 16, Issue 2, pp. 351-357, entire document.	1, 5-7, 11-13, 18, 20, 21, 25-27
Y	Ibid.	2-4, 19, 22-24
X	GB 2340280 A (LITE ON ELECTRONICS INC) 16 February 2000 (16.02.2000) entire document.	1, 11-13, 18, 21
X	WO 2008003814 A1 (NOKIA CORP et al.) 10 January 2008 (10.01.2008) entire document.	1, 18, 21

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 December 2009 (15.12.2009)

Date of mailing of the international search report

18 January 2010 (18.01.2010)

Name and mailing address of the ISA/FI
National Board of Patents and Registration of Finland
P.O. Box 1160, FI-00101 HELSINKI, Finland

Facsimile No. +358 9 6939 5328

Authorized officer

Tuomo Ritari

Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2009/050853

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5650865 A (SMITH RONALD T) 22 July 1997 (22.07.1997) entire document.	1, 6, 7, 11-13, 18, 21, 26, 27
X	WO 2007074787 A1 (MATSUSHITA ELECTRIC IND CO LTD et al.) 05 July 2007 (05.07.2007) EPODOC, WPI abstracts; Thomson Scientific English machine translation: pp. 1-24; figs. 1-5.	21, 26, 27
Y	US 2008084708 A1 (LEE HONG-SEOK et al.) 10 April 2008 (10.04.2008) entire document.	2-4, 19, 22-24
Y	US 6592233 B1 (PARIKKA MARKO) 15 July 2003 (15.07.2003) col. 5, line 66 - col. 6, line 26; figs.	2-4, 19, 22-24
Y	WO 2008045310 A2 (QUALCOMM MEMS TECHNOLOGIES INC et al.) 17 April 2008 (17.04.2008) entire document.	2-4, 19, 22-24
Y	WO 2007029034 A1 (BAE SYSTEMS PLC et al.) 15 March 2007 (15.03.2007) p. 1, lines 4-6; p. 5, line 7 - p. 9, line 24; figs. 2-6.	2-4, 19, 22-24
Y	US 2004130797 A1 (LEIGH TRAVIS ADRIAN ROBERT - TRAVIS ADRIAN ROBERT LEIGH) 08 July 2004 (08.07.2004) paragraphs [0011] - [0032]; figs. 1-5.	2-4, 19, 22-24
A	US 5668913 A (TAI PING-KAUNG et al.) 16 September 1997 (16.09.1997) entire document.	1-28

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/FI2009/050853

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
WO 2008059319 A1	22/05/2008	None	
GB 2340280 A	16/02/2000	None	
WO 2008003814 A1	10/01/2008	EP 2041484 A1 CN 101501391 A	01/04/2009 05/08/2009
US 5650865 A	22/07/1997	JP 9005743 A EP 0733928 A2 CA 2171655 A1	10/01/1997 25/09/1996 22/09/1996
WO 2007074787 A1	05/07/2007	CN 101346582 A	14/01/2009
US 2008084708 A1	10/04/2008	KR 20080031573 A	10/04/2008
US 6592233 B1	15/07/2003	JP 2004527780T T WO 0229454 A2 EP 1356230 A2 CN 1524171 A AU 8238101 A	09/09/2004 11/04/2002 29/10/2003 25/08/2004 15/04/2002
WO 2008045310 A2	17/04/2008	WO 2008045364 A2 WO 2008045363 A2 WO 2008045362 A2 EP 2069841 A2 EP 2069839 A2 EP 1977275 A2	17/04/2008 17/04/2008 17/04/2008 17/06/2009 17/06/2009 08/10/2008
WO 2007029034 A1	15/03/2007	EP 2128682 A2 US 2008285137 A1 EP 1922580 A1 AT 447726T T	02/12/2009 20/11/2008 21/05/2008 15/11/2009
US 2004130797 A1	08/07/2004	ZA 200307555 A JP 2004526202T T	29/03/2004 26/08/2004

International application No.
PCT/FI2009/050853

Form PCT/ISA/210 (patent family annex) (July 2008)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI2009/050853

CLASSIFICATION OF SUBJECT MATTER

Int.Cl.

F21V 8/00 (2006.01)

G02B 27/42 (2006.01)

G02B 5/18 (2006.01)