

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
8 October 2009 (08.10.2009)(10) International Publication Number
WO 2009/124215 A1

(51) International Patent Classification:

A61B 17/04 (2006.01)40241 (US). NOVAK, **Vincent** [US/US]; 2013 Coral-bells Court, Longmont, CO 80503 (US).

(21) International Application Number:

PCT/US2009/039362

(74) Agent: PANDISCIO, Mark, J.; Pandiscio & Pandiscio, 470 Totten Pond Road, Waltham, MA 02451 (US).

(22) International Filing Date:

2 April 2009 (02.04.2009)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **SEQUENT TISSUE REPAIR, INC.** [US/US]; 7429 Ace Blvd-suite 107, Raleigh, NC 27617 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CABORN, David** [US/US]; 1300 South Buckeye Lane, Goshen, KY 40026 (US). **MCDEVITT, Dennis** [US/US]; 9511 Centerwood Drive, Raleigh, NC 27617 (US). **NAWAB, Akbar** [US/US]; 8709 Summit Ridge Drive, Louisville, KY*[Continued on next page]*

(54) Title: METHOD AND APPARATUS FOR MENISCAL REPAIR

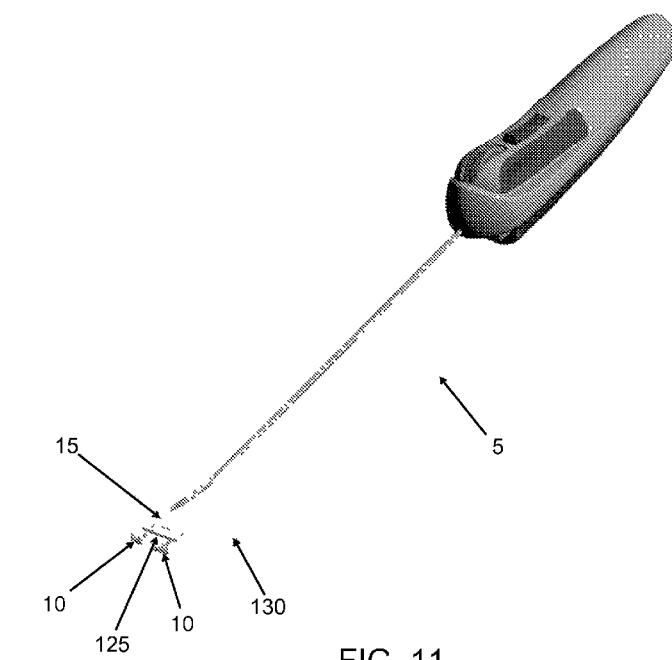


FIG. 11

(57) Abstract: An anchor for securing suture to tissue, the anchor comprising: an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body, and the proximal end having a proximal slot extending distally into the body; the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the wide section is disposed distally of the narrow section.



OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, Published:
MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3)j*

METHOD AND APPARATUS FOR MENISCAL REPAIR

Inventors

David Caborn
1300 South Buckeye Lane
Goshen, KY 40026

Dennis McDevitt
9511 Centerwood Drive
Raleigh, NC 27617

Akbar Nawab
8709 Summit Ridge Drive
Louisville, KY 40241

Vincent Novak
2013 Corabells Court
Longmont, CO 80503

Reference To Pending Prior Patent Applications

INCUMED-II

- 2 -

This patent application claims benefit of:

(i) pending prior U.S. Provisional Patent

Application Serial No. 61/072,683, filed 04/02/2008 by

David Caborn et al. for MENISCAL REPAIR MAGAZINE

CONCEPT (Attorney's Docket No. VINCE-2 PROV);

(ii) pending prior U.S. Provisional Patent

Application Serial No. 61/135,149, filed 07/17/2008 by

David Caborn et al. for MENISCAL REPAIR PROVISIONAL 3

(Attorney's Docket No. VINCE-3 PROV); and

(iii) pending prior U.S. Provisional Patent

Application Serial No. 61/208,294, filed 02/23/2009 by

Vincent Novak et al. for MENISCAL REPAIR PROVISIONAL 4

(Attorney's Docket No. INCUMED-6 PROV).

The three above-identified patent applications are hereby incorporated herein by reference.

Field Of The Invention

This invention relates to surgical methods and apparatus in general, and more particularly to surgical methods and apparatus for the repair of the meniscus .

- 3 -

Background Of The Invention

The meniscus is a piece of cartilage located within the knee joint, between the top of the tibia and the bottom of the femur. The meniscus serves to facilitate stable movement of the tibia and femur relative to one another, and to absorb shock and to spread load.

The meniscus is frequently damaged (e.g., torn) as the result of injury and/or accident. A damaged meniscus can impede proper motion of the knee joint and cause pain, among other problems.

More particularly, the essential role of an intact meniscus, and its importance for proper knee function, has been well documented and accepted by the general orthopedic community. An intact and functioning meniscus is critical to optimally distribute weightbearing forces that transfer through the knee joint while maintaining knee stability. The meniscus is also vital to preserving the articular cartilage surfaces of the knee. Loss of meniscal

- 4 -

tissue is considered to be a key precursor to the development of knee osteoarthritis.

A major challenge in repairing a torn meniscus is the fact that the tissue itself is a fibrous structure that is not uniformly vascular. The vascular zones of the meniscus comprise about one third of the meniscus tissue and are generally recognized as the "red-red" and "red-white" zones. The red-red zone (i.e., the most highly vascularized portion of the meniscus) is an area in which meniscal repairs are known to heal easily and is located along its outer periphery. The red-white zone extends from the most vascular area towards the inner portions of the meniscus where the blood supply eventually declines to non-vascular tissue (which is sometimes referred to as the "white-white" zone). It is believed that proper surgical technique is of great importance if a successful repair is to be achieved in the red-white zone. It is generally accepted knowledge that about 15% of all meniscal tears occur in the red-red zone, another 15% of meniscal tears

- 5 -

occur in the red-white zone, and the remaining 70% of meniscal tears occur in the white-white (or non-vascularized) zone of the meniscus.

Another significant challenge in repairing a torn meniscus is that the size and shape of the tears vary, making the reduction and apposition of the torn tissue difficult to accomplish. Without proper apposition and stability, torn meniscal tissue will not heal properly.

The art of repairing torn meniscal tissue was first developed and pioneered throughout the 1980's by early sports medicine-focused surgeons. The earliest methods employed only suture in the repair. The techniques of "inside-out" and "outside-in" suturing became the so-called "gold standard" for the repair of meniscal tissue. Both of these techniques focused on passing small diameter suture (size 2-0 or 3-0) through the meniscus, reducing and closing the tear, and then tying a suture knot over the knee capsule so as to fixate and stabilize the tear. A feature of these early all-suture repairs was that

- 6 -

the surface of the meniscus was kept relatively smooth since the suture knot was outside of the knee joint, and the use of a needle and suture allowed the surgeon a great deal of flexibility in adequately reducing and stabilizing the tear. Eventually, these early surgeons began concomitant use of complementary techniques to promote a vascular response in the more non-vascular areas of the meniscus. Methods such as tear edge and meniscapsular rasping, the application of an interpositional blood clot, trephination to create a vascular channel, and fascial sheath or synovial flap coverage have been shown in several studies to be 150% more effective in healing a torn meniscus when compared to repairs that do not use such concomitant techniques.

The specific issues and challenges associated with the aforementioned all-suture inside-out and outside-in repair techniques are centered primarily on issues relating to the "user interface" and to the "tethering" of the meniscus to the knee capsule. More particularly, the "user interface" issues generally

- 7 -

relate to the technical demands required in the operating room: the skill of the surgeon and the number of assistants required to safely pass the needle and suture from the anterior portion of the meniscus through the posterior portion of the meniscus and exit out through the posterior/medial aspect of the knee joint (i.e., the so-called "inside-out" technique); or the passing of a needle and suture from the medial aspect of the exterior of the knee into the knee joint, through the meniscus, the retrieval and re-insertion back into the meniscus, and then passage back out through the capsule to the medial aspect of the knee (i.e., the so-called "outside-in" technique). The aforementioned tethering issues relate to more recent concerns about fixating suture over the knee capsule and thereby "tethering" the meniscus to the knee capsule, since evidence suggests that such tethering of the meniscus to the knee capsule may interfere with the normal biomechanics of the meniscus (e.g., load and force distribution, etc.).

As recognition of the importance of the

INCUMED-II

- 8 -

meniscus grew in the late 1980's, new methods of meniscus repair were developed. These new methods focused on improving execution of the procedure in order to make it easier, simpler and faster to accomplish. The new gold standard approach became the so-called "all-inside" technique. The all-inside technique is intended to not violate the knee capsule or require any incisions on the posterior/medial aspects of the knee (i.e., such as is required with the inside-out and outside-in suturing techniques discussed above). With the all-inside technique, the entire repair - both approximation and fixation - is performed intra-articularly.

The first all-inside repair devices were tack-like implants that were inserted through a standard arthroscopic portal and then forcefully pushed through the meniscus, crossing through the tear, thereby closing and fixing the tear without the use of suture. These tack-like implants were formed out of biomaterials such as PLA, PLLA or PGA that

- 9 -

were expected to biodegrade over time. However, these materials are quite hard when first inserted and, in use, were found to degrade or bioabsorb much more slowly than anticipated. Clinical use and follow-up have demonstrated the inherent risks associated with the use of tack-like implants within the knee joint, as numerous published studies have reported device failure which can lead to tear reformation, loose implants within the knee joint and articular cartilage damage. Furthermore, it can be challenging for the surgeon to adequately address various tear shapes and sizes using these tack-like implants.

As a result, attention has returned to suture-based repairs, with a new focus on performing a suture-based repair using an all-inside technique. There are several recent systems that seek to accomplish this goal. However, none of these systems have been found to be completely satisfactory.

Thus, there is a need for a new and improved

- 10 -

method and apparatus for meniscal repair.

Summary Of The Invention

The present invention provides a new and improved method and apparatus for meniscal repair.

In one form of the present invention, there is provided an anchor for securing suture to tissue, the anchor comprising:

an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body, and the proximal end having a proximal slot extending distally into the body;

the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the wide section is disposed distally of the narrow section.

In another form of the present invention, there is provided a system comprising:

- 11 -

a suture;

at least one anchor, the anchor comprising:

an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body, and the proximal end having a proximal slot extending distally into the body;

the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the wide section is disposed distally of the narrow section;

wherein the suture is initially disposed within the wide section of the distal slot of the at least one anchor so that the suture is slidably relative to the at least one anchor.

In another form of the present invention, there is provided a method for securing a first element to a second element, the method comprising the steps of:

- 12 -

providing a system comprising:

a suture;

at least two anchors, each anchor

comprising:

an elongated body having a distal end

and a proximal end, the distal end having a distal

slot extending proximally into the elongated body, and

the proximal end having a proximal slot extending

distally into the body;

the distal slot comprising a wide

section and a narrow section, wherein the wide section

has a width such that the suture is slidably

accommodated therein and the narrow section has a

width such that the suture is bound therein, and

further wherein the wide section is disposed distally

of the narrow section;

wherein the suture is initially disposed

within the wide section of the distal slot of each of

the at least two anchors so that the suture is

slidable relative to the at least two anchors; and

- 13 -

an inserter, the inserter comprising a hollow elongated shaft having a sharp point disposed eccentric to the longitudinal axis of the hollow elongated shaft, and further wherein the suture and the at least two anchors are disposed within the lumen of the hollow elongated shaft;

passing the inserter through the first object and the second object so that the sharp point of the inserter resides on the far side of the second object;

ejecting the first anchor on the far side of the second object;

tensioning the suture so that the suture is drawn into the narrow section of the distal slot of the first anchor, whereby to bind the suture to the first anchor;

withdrawing the inserter out of the first object and the second object;

moving the inserter laterally;

passing the inserter back through the first object and the second object so that the sharp point

- 14 -

of the inserter resides on the far side of the second object;

ejecting the second anchor on the far side of the second object;

tensioning the suture, and withdrawing the inserter out of the first object and the second object, so that the suture is drawn into the narrow section of the distal slot of the second anchor, whereby to bind the suture to the second anchor.

In another form of the present invention, there is provided a system for securing suture to tissue, the system comprising:

an anchor, the anchor comprising:

an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body;

the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the

- 15 -

wide section is disposed distally of the narrow section.

In another form of the present invention, there is provided a method for securing a first object to a second object, the method comprising the steps of:

passing a first anchor having a strand of suture slidably mounted thereto through the first object and the second object at a first location;

securing the strand of suture to the first anchor;

passing a second anchor having the strand of suture slidably mounted thereto through the first object and the second object at a second location; and

securing the strand of suture to the second anchor under tension.

Brief Description Of The Drawings

These and other objects and features of the present invention will be more fully disclosed or rendered obvious by the following detailed description of the invention, which is to be

- 16 -

considered together with the accompanying drawings wherein like numbers refer to like parts, and further wherein :

Figs. 1-3 are schematic views showing a meniscal repair system formed in accordance with the present invention;

Figs. 3A and 3B are schematic views showing the distal end of the meniscal repair system shown in Figs. 1-3;

Figs. 4-10 are schematic views showing further details of an anchor of the meniscal repair system shown in Figs. 1-3;

Fig. 11 is a schematic view showing a meniscal repair effected using the system shown in Figs. 1-3;

Figs. 12-17 are schematic views showing an anchor being deployed from an inserter;

Fig. 18 is another schematic view showing a meniscal repair effected using the system shown in Figs. 1-3;

Fig. 19 is still another schematic view showing a meniscal repair effected using the system shown in

- 17 -

Figs. 1-3;

Figs. 20-22 are schematic views showing how the suture may be twisted so as to enhance the holding strength of the meniscal repair system; and

Figs. 23 and 24 are schematic views showing an alternative anchor formed in accordance with the present invention.

Detailed Description Of The Invention

Looking first at Figs. 1-3, 3A and 3B, there is shown a novel system 5 for meniscal repair. System 5 generally comprises a plurality of anchors 10, a length of suture 15 and an inserter 20.

Anchors 10 are shown in greater detail in Figs. 4-10. Each of the anchors 10 generally comprises an elongated body 25 which, in its preferred construction, is generally cylindrical so that it can make a close sliding fit within the lumen of a hollow delivery needle, as will hereinafter be discussed in further detail. Elongated body 25 is characterized by a distal end 30 and a proximal end 35.

- 18 -

On a "top" side of elongated body 25, a distal slot 40 extends proximally along the elongated body, with distal slot 40 comprising a wide section 45 and a narrow section 50. Also on the "top" side of elongated body 25, a proximal slot 55 extends distally along the elongated body, with proximal slot 55 comprising a wide section 60 and a narrow section 65. Distal slot 40 is aligned with proximal slot 55. Preferably narrow section 50 of distal slot 40 is narrower than narrow section 65 of proximal slot 55 (Fig. 5), and preferably wide section 45 of distal slot 40 is the same width as wide section 60 of proximal slot 55. Thus it will be seen that narrow section 50 of distal slot 40 is narrower than narrow section 65, which is itself narrower than the wide section 45 of distal slot 40 and wide section 60 of proximal slot 55. Furthermore, the aforementioned narrow section 50, narrow section 65, wide section 45 and wide section 60 are sized relative to suture 15 so that: (i) suture 15 will make a tight binding fit with narrow section 50 of distal slot 40, (ii) suture

- 19 -

15 will make a sliding fit with narrow section 65 of proximal slot 55, and (iii) suture 15 will move easily through wide section 45 of distal slot 40 and wide section 60 of proximal slot 55. A wall 70 separates narrow section 50 of distal slot 40 from narrow section 65 of proximal slot 55.

On a "bottom" side of elongated body 25 (i.e., on the side diametrically opposed to the aforementioned "top" side of elongated body 25), a recess 75 (Figs. 6 and 7) extends into elongated body 25. Thus, recess 75 is diametrically opposed to the aforementioned distal slot 40 and proximal slot 55. Recess 75 is formed long enough, and deep enough, so that it communicates with narrow section 50 of distal slot 40 and with a portion of wide section 45 of distal slot 40, and it communicates with narrow section 65 of proximal slot 55 and with a portion of wide section 60 of proximal slot 55 (Fig. 7). Recess 75 is significantly wider than suture 15, so that suture 15 can move easily through recess 75.

On account of the foregoing construction, wide

- 20 -

section 45 of distal slot 40, narrow section 50 of distal slot 40, recess 75, wide section 60 of proximal slot 55 and narrow section 65 of proximal slot 55 provide a suture pathway about elongated body 25 of anchor 10. Furthermore, and as will hereinafter be discussed in further detail, on account of the disposition and sizing of the aforementioned wide section 45, narrow section 50, recess 75, wide section 60 and narrow section 65, anchor 10 can be slidably mounted on the suture and then selectively secured to the suture.

A fin 80 extends "downwardly" out of the "bottom" side of elongated body 25. Fin 80 is aligned with recess 75 and diametrically opposed to distal slot 40 and proximal slot 55.

It should be appreciated that, while elongated body 25 is preferably generally cylindrical, it is also preferably not tubular: at no point along its length does elongated body 25 have a complete outer periphery with a hollow interior.

Suture 15 may comprise any suture material of

- 21 -

the sort known in the art. By way of example but not limitation, suture 15 may comprise braided suture, so-called "monofilament" suture, etc., and may be formed so as to be either "permanent" or absorbable. In one preferred form of the invention, suture 15 comprises braided suture.

As will hereinafter be discussed in further detail, suture 15 is intended to be passed through anchor 10 (or, stated another way, anchor 10 is intended to be "strung" onto suture 15) by passing the suture through distal slot 40, into and along bottom recess 75, and back through proximal slot 55 (see Figs. 14-16, 20, etc.). In this respect it will be appreciated that wide section 45 of distal slot 40, recess 75 and wide section 60 of proximal slot 55 are all sized sufficiently wide relative to suture 15 that suture 15 can slide easily through those openings. Thus, so long as suture 15 remains disposed in those openings, suture 15 will be free to move easily through anchor 10 (and, correspondingly, anchor 10 will be free to slide easily along suture

- 22 -

15) . However, and as will hereinafter be discussed in further detail, when suture 15 is directed into narrow section 50 of distal slot 40, a tight interference fit will be created between the anchor and the suture, thereby securing the anchor and suture to one another.

As will also hereinafter be discussed in further detail, a plurality of anchors 10 may be "strung" on a single suture 15 (see Figs. 2, 13, 15, 20, etc.) . As noted above, when suture 15 passes through wide section 45 of distal slot 40, recess 75 and wide section 60 of proximal slot 55 of each anchor 10, the anchors may be advanced along the suture. However, and as will hereinafter be discussed in further detail, when suture 15 is directed into narrow section 50 of distal slot 40 of an anchor, a tight interference fit will be created between that anchor and the suture, thereby securing that anchor and the suture to one another. Significantly, and as will hereinafter be discussed in further detail, when a plurality of anchors 10 are slidably mounted on a

- 23 -

single suture 15, each of the anchors 10 may be selectively and individually secured to the suture when and where desired by the user.

Looking again at Figs. 1-3, 3A and 3B, inserter 20 generally comprises an elongated shaft 85 having a central lumen 90 extending therethrough. Elongated shaft 85 terminates in a sharp point 95 at its distal end. Sharp point 95 is created by forming an oblique face 96 (Figs. 3A, 3B and 12) on the distal end of the elongated shaft, such that a section 97 of elongated shaft 85 is exposed at the mouth of lumen 90. A handle 100 (Figs. 1-3) is secured to elongated shaft 85 at its proximal end. A slot 105 (Fig. 13) is formed in elongated shaft 85 on its "bottom" side. Slot 105 extends into exposed section 97 of elongated shaft 85. A small projection 106 (Figs. 13 and 15) extends into slot 105.

As seen in Figs. 2, 3A, 3B and 13, elongated shaft 85 is sized to receive a plurality of anchors 10 therein, with those anchors being "strung" on a single suture 15. To this end, lumen 90 of elongated

- 24 -

shaft 85 is sized to slidably receive elongated bodies 25 of anchors 10, with fins 80 extending out through slot 105 of elongated shaft 85. Fins 80 and slot 105 cooperate to keep anchors 10 aligned within lumen 90 of elongated shaft 85. The aforementioned small projection 106 provides nominal resistance to the passage of fins 80 through slot 105. Small projection 106 is positioned such that the lead anchor 10 in lumen 90 normally does not exit the distal end of the elongated shaft; however, with the application of a distally-directed force, fin 80 can slip past small projection 106 so as to release the lead anchor from lumen 90.

Preferably, handle 100 includes a lever 110 for selectively advancing a drive shaft 115 along lumen 90 of elongated shaft 85, whereby to selectively advance anchors 10 along lumen 90 and thereby eject anchors 10 one at a time from the distal end of elongated shaft 85. Handle 100 preferably also includes a tension wheel 120 for selectively tensioning the suture emerging from the proximal-most

- 25 -

anchor 10 which is held in lumen 90 of elongated shaft 85. To this end, drive shaft 115 is preferably hollow so that suture 15 can extend from the proximal-most anchor 10, through the drive shaft and be engaged by tension wheel 120.

As seen in Fig. 11, system 5 may be used to close a tear 125 in a meniscus 130 using a plurality of anchors 10 and a suture 15. More particularly, and looking now at Figs. 11-18, sharp point 95 of inserter 20 is advanced into meniscus 130, across tear 125, and then out the far side of meniscus 130. Then the leading anchor 10 in lumen 90 (i.e., anchor 10A in Fig. 18) is ejected from elongated shaft 85. This is done by advancing drive shaft 115 (e.g., with lever 110) so that the leading anchor 10 has its fin 80 forced past small projection 106 in slot 105, whereby to release the anchor from the inserter. As the leading anchor 10 is ejected from lumen 90, suture 15 initially resides in wide section 45 of distal slot 40. However, by holding suture 15 under tension as anchor 10 is forced out of lumen 90 by

- 26 -

drive shaft 115, anchor 10 is turned (i.e., away from exposed section 97 of elongated shaft 85) and suture 15 is forced into narrow section 50 of distal slot 40, whereby to secure suture 15 to anchor 10 in a cleating action. At the same time, another portion of suture 15 advances from wide section 60 of proximal slot 55 into narrow section 65 of proximal slot 55. Thus, at this point suture 15 will extend through narrow section 50 of distal slot 40, recess 75 and narrow section 65 of proximal slot 55, with the suture being secured to the anchor by virtue of the tight binding fit established between narrow section 50 of distal slot 40 and suture 15.

Then, while keeping suture 15 under tension so that anchor 10 remains positioned against the far side of meniscus 130, inserter 20 is withdrawn back across the meniscus, moved laterally by an appropriate distance, re-inserted across tear 125, passed out the far side of meniscus 130, and another anchor 10 (i.e., anchor 10B in Fig. 18) is deployed. Again, suture 15 is held under tension as the second

- 27 -

anchor is deployed on the far side of the meniscus so that anchor 10 is turned (i.e., away from exposed section 97 of elongated shaft 85) and suture 15 is forced into the narrow section 50 of the distal slot 40 of that second anchor, whereby to secure that second anchor in a cleating action. Again, as this occurs, another portion of suture 15 advances from wide section 60 of proximal slot 55 into narrow section 65 of proximal slot 55. Thus, at this point suture 15 will extend through narrow section 50 of distal slot 40, recess 75 and narrow section 65 of proximal slot 55, with the suture being secured to the anchor by virtue of the tight binding fit established between narrow section 50 of distal slot 40 and suture 15.

Thus, the suture length extending between the first-deployed anchor (i.e., anchor 10A in Fig. 18) and the second-deployed anchor (i.e., anchor 10B in Fig. 18) is maintained under tension so as to hold tear 125 closed.

This operation may thereafter be repeated as

- 28 -

many times as is necessary in order to close the tear. See, for example, Fig. 19, where six anchors 10, all connected by a single suture 15, are used to close a tear in the meniscus using a complex running stitch. This ability to set a variable number of anchors in the repair procedure, limited only by the number of anchors held in inserter 20, is a significant advance in the art.

If desired, a small knot may be formed in the suture after placement of the last anchor for added holding strength. However, it should be appreciated that this knotting step is purely optional and not required.

It will be appreciated that, since anchors 10 are turned away from exposed section 97 of elongated shaft 85 during deployment, the disposition of elongated shaft 85 can largely regulate the disposition of anchors 10 relative to the meniscus. Thus, where exposed section 97 of elongated shaft 85 is oriented so that it is in the "6 o'clock" or "12 o'clock" position, the anchor will be set against the

- 29 -

meniscus with a vertical disposition.

Correspondingly, where exposed section 97 of elongated shaft 85 is oriented so that it is in the "3 o'clock" or "9 o'clock" position, the anchor will be set with a horizontal disposition (e.g., in the manner shown in Figs. 11 and 18). Of course, in some situations it may be possible to thereafter adjust the disposition of an anchor 10 against the meniscus, e.g., by using a grasper to manually turn the anchor.

In one preferred form of the invention, the first anchor 10 in inserter 20 may have suture 15 permanently secured thereto, e.g., prior to insertion of the inserter into the meniscus. By way of example but not limitation, suture 15 may be glued, welded or otherwise secured to first anchor 10. Furthermore, where suture 15 is so secured to first anchor 10, the terminated suture may terminate substantially within the anchor or it may extend out of the anchor, as desired.

Significantly, since suture 15 is secured to each deployed anchor, the failure of any one suture

- 30 -

stitch does not threaten the integrity of the remainder of the repair. Indeed, if a suture stitch were to fail (e.g., break), it would not disrupt the intact stitches in the remainder of the repair. The removed anchor could then be replaced by two or more additional anchors so as to reinforce the repair.

It will be appreciated that the holding power of each anchor 10 on suture 15 is a function of the cleating action provided by that anchor on suture 15. It will also be appreciated that this cleating action is largely a function of the binding interference fit which is established between the suture and narrow section 50 of distal slot 40, since the suture makes a loose fit through recess 75 and a sliding fit with narrow section 65 of proximal slot 55. In practice, it has been found that approximately 35 Newtons of holding strength can be provided without reducing the width of narrow section 50 of distal slot 40 to the point where it becomes excessively difficult to insert the suture into narrow section 50 and/or where the act of insertion causes damage to the suture. In

INCUMED-II

- 31 -

the great majority of cases, a holding strength of approximately 35 Newtons has been found to be more than adequate for meniscal repair.

However, it has also been discovered that, to the extent that it is desired to provide even greater holding strength to the system, suture 15 can be twisted on itself during deployment so as to achieve holding strength of up to 75 Newtons without requiring any change to the diameter of narrow section 50 of distal slot 40. More particularly, and looking now at Figs. 20-22, sharp point 95 of inserter 20 is advanced into meniscus 130, across tear 125, and then out the far side of meniscus 130. Then, with suture 15 in a relaxed condition, a first anchor 10A is ejected from lumen 90 of inserter 20 so that the first anchor 10A sits on the far side of the meniscus. As this occurs, first anchor 10A will tend to turn as it exits lumen 90, but suture 15 will tend to stay in wide section 45 of distal slot 40 and not enter narrow section 50 of distal slot 40. Thus, at this point, suture 15 is still relatively free to

- 32 -

slide relative to first anchor 10A. With suture 15 still in a relaxed condition, inserter 20 is then withdrawn from meniscus 130, moved laterally, re-inserted across tear 125 and passed out the far side of meniscus 130. Then elongated shaft 85 of inserter 20 is rotated so as to wrap the suture around the inserter. By way of example but not limitation, inserter 20 may be rotated three revolutions. As this occurs, there can be some gathering of the slack between first anchor 10A and inserter 20 and/or there can be some pay out of the suture stored inside the inserter. At this point, a second anchor 10B is ejected from lumen 90 of inserter 20 so that second anchor 10B sits on the far side of the meniscus. Inserter 20 is then withdrawn back through the meniscus. Then the suture is tensioned (e.g., with tension wheel 120) so that (i) the suture between anchors 10A and 10B is reduced, so as to close the tear in the meniscus, (ii) the winding in the suture is pulled taut, and (iii) the suture is forced into narrow section 50 of distal slot 40 and narrow

- 33 -

section 65 or proximal slot 55. As a result, this approach provides both the aforementioned cleating action provided by capturing the suture within narrow section 50 of distal slot 40, and also a supplemental securing action provided by the suture which has been wound on itself. In practice, it has been found that this dual effect provides approximately 75 Newtons of holding strength.

Thereafter, additional anchors may be provided as needed so as to close the tear.

Figs. 23 and 24 show an alternative construction for anchor 10. More particularly, with the construction shown in Figs 23 and 24, the distal and proximal portion of elongated body 25 are cut back on the "top" of the anchor, and recess 75 is elongated relative to distal slot 40 and proximal slot 55.

Thus, the present invention provides a meniscal repair system which comprises a plurality of anchors that ride over a single suture strand, which can be singly deployed within the body, with each single anchor acting as an independent fixation point for the

suture strand. The ability to lock the suture within each anchor (such as with the cleating feature provided for each anchor) provides the ability for each anchor to act as an independent fixation point for the suture strand. Furthermore, these independent fixation points allow the suture, running from one anchor to the next anchor, to act as an independent suture stitch. Additionally, the entire contiguous repair construct consists of multiple independent suture stitches extending between multiple adjacent anchors, with the construct such that if one or more stitches are damaged or become loose or disengaged from an anchor, the other suture stitches are unaffected. Also, the ability to individually tighten each suture stitch (i.e., the suture strand extending between adjacent anchors) by drawing the suture through the deployed anchor's locking feature permits the desired suture tension to be achieved.

The present invention provides the ability to position variable suture patterns across the torn meniscus in a contiguous fashion. Significantly, the

- 35 -

repairing construct can have more than two points of fixation to the meniscus using a single strand of suture, and does not require any suture tying.

Also, the present invention provides the ability to remove an anchor from a deployed suture construct without disrupting previously-deployed anchors. This would be accomplished by sliding the dislodged implant along the suture strand outside of the body and breaking or cutting the implant without damaging the suture. The user can then continue to deliver subsequent implants from the same device to complete the repair.

And the present invention provides the ability to cut the suture strand after two or more implants have been deployed into the body, and then secure the deployed suture strand to the leading anchor in the inserter (e.g., by knotting) so that the user can continue to deploy subsequent unused anchors still residing within the inserter as part of the repair construct.

- 36 -

The present invention provides a gating mechanism for singly deploying each anchor from the inserter, e.g., fin 80, slot 105 and projection 106.

Furthermore, the present invention provides an approach for wrapping or twisting the suture around the inserter prior to ejection of an anchor so as to form a suture loop around the suture emanating from the anchor, so that subsequent tightening of the suture through the anchor draws the wrapped suture loop towards the anchor and further secures the suture to the anchor.

Modifications

It should be understood that many additional changes in the details, materials, steps and arrangements of parts, which have been herein described and illustrated in order to explain the nature of the present invention, may be made by those skilled in the art while still remaining within the principles and scope of the invention.

What Is Claimed Is:

1. An anchor for securing suture to tissue, the anchor comprising:

an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body, and the proximal end having a proximal slot extending distally into the body;

the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the wide section is disposed distally of the narrow section.

2. An anchor according to claim 1 wherein the distal slot is aligned with the proximal slot.

3. An anchor according to claim 1 wherein the proximal slot comprises a wide section and a narrow

- 38 -

section, and further wherein the narrow section has a width such that the suture is slidably accommodated therein.

4. An anchor according to claim 2 wherein the elongated body further comprises a recess, and further wherein the recess is diametrically opposed to the distal slot and the proximal slot.

5. An anchor according to claim 4 wherein the recess communicates with the wide section of the distal slot, the narrow section of the distal slot and the proximal slot.

6. An anchor according to claim 1 wherein the elongated body is generally cylindrical.

7. An anchor according to claim 1 wherein the elongated body is non-tubular.

- 39 -

8. An anchor according to claim 1 wherein the elongated body further comprises a fin.

9. An anchor according to claim 8 wherein the fin is aligned with the distal slot.

10. A system comprising:

a suture;

at least one anchor, the anchor comprising:

an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body, and the proximal end having a proximal slot extending distally into the body;

the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the wide section is disposed distally of the narrow section;

- 40 -

wherein the suture is initially disposed within the wide section of the distal slot of the at least one anchor so that the suture is slidable relative to the at least one anchor.

11. A system according to claim 10 wherein the suture is thereafter disposed within the narrow section of the distal slot so as to bind the suture to the anchor.

12. A system according to claim 10 comprising a plurality of anchors, and further wherein, for each anchor, the suture is initially disposed within the wide section of the distal slot so that the suture is slidable relative to the plurality of anchors.

13. A system according to claim 10 comprising a plurality of anchors, and further wherein, for each anchor, the suture is thereafter disposed within the wide section of the distal slot so as to bind the suture to the plurality of anchors.

- 41 -

14. A system according to claim 13 wherein the tension in the suture between each pair of anchors is independent of the tension in the suture between every other pair of anchors.

15. A system according to claim 10 further comprising an inserter,

wherein the inserter comprises a hollow elongated shaft having a sharp point disposed eccentric to the longitudinal axis of the hollow elongated shaft; and further wherein the suture and the at least one anchor are disposed within the lumen of the hollow elongated shaft.

16. A system according to claim 15 wherein the inserter further comprises a drive shaft movably disposed within the lumen of the hollow elongated shaft so as to selectively eject the at least one anchor from the lumen of the hollow elongated shaft.

- 42 -

17. A system according to claim 16 wherein the inserter further comprises an element for engaging an anchor moving through the hollow elongated shaft and retarding movement of the at least one anchor through the lumen of the hollow elongated shaft.

18. A system according to claim 16 wherein the at least one anchor comprises a fin, wherein the hollow elongated shaft comprises a slot for receiving the fin, and further wherein the element comprises a projection into the slot.

19. A system according to claim 15 wherein the inserter comprises a tensioning element for tensioning the suture .

20. A method for securing a first element to a second element, the method comprising the steps of:
providing a system comprising:
a suture;

- 43 -

at least two anchors, each anchor comprising :

an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body, and the proximal end having a proximal slot extending distally into the body;

the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the wide section is disposed distally of the narrow section;

wherein the suture is initially disposed within the wide section of the distal slot of each of the at least two anchors so that the suture is slidable relative to the at least two anchors; and

an inserter, the inserter comprising a hollow elongated shaft having a sharp point disposed eccentric to the longitudinal axis of the hollow

- 44 -

elongated shaft, and further wherein the suture and the at least two anchors are disposed within the lumen of the hollow elongated shaft;

passing the inserter through the first object and the second object so that the sharp point of the inserter resides on the far side of the second object;

ejecting the first anchor on the far side of the second object;

tensioning the suture so that the suture is drawn into the narrow section of the distal slot of the first anchor, whereby to bind the suture to the first anchor;

withdrawing the inserter out of the first object and the second object;

moving the inserter laterally;

passing the inserter back through the first object and the second object so that the sharp point of the inserter resides on the far side of the second object;

ejecting the second anchor on the far side of the second object;

- 45 -

tensioning the suture, and withdrawing the inserter out of the first object and the second object, so that the suture is drawn into the narrow section of the distal slot of the second anchor, whereby to bind the suture to the second anchor.

21. A method according to claim 20 wherein the system comprises a third anchor, and further wherein the method comprises the additional steps of:

moving the inserter laterally;
passing the inserter back through the first object and the second object so that the sharp point of the inserter resides on the far side of the second object;

ejecting the third anchor on the far side of the second object;

tensioning the suture, and withdrawing the inserter out of the first object and the second object, so that the suture is drawn into the narrow section of the distal slot of the third anchor, whereby to bind the suture to the third anchor.

- 46 -

22. A method according to claim 20 wherein the suture is held under tension when the first and second anchors are ejected on the far side of the second object .

23. A method according to claim 20 wherein the inserted is rotated while disposed in the first object and the second object so as to wind the suture around the hollow elongated shaft of the inserter.

24. A method according to claim 20 wherein the suture is drawn into the narrow section of the distal slot of the third anchor after the inserter is withdrawn from the first and second objects.

25. A method according to claim 20 wherein the first object comprises a first portion of the meniscus and the second object comprises a second portion of the meniscus.

- Al -

26. A system for securing suture to tissue, the system comprising:

an anchor, the anchor comprising:

an elongated body having a distal end and a proximal end, the distal end having a distal slot extending proximally into the elongated body;

the distal slot comprising a wide section and a narrow section, wherein the wide section has a width such that the suture is slidably accommodated therein and the narrow section has a width such that the suture is bound therein, and further wherein the wide section is disposed distally of the narrow section .

27. A method for securing a first object to a second object, the method comprising the steps of:

passing a first anchor having a strand of suture slidably mounted thereto through the first object and the second object at a first location;

securing the strand of suture to the first anchor;

- 48 -

passing a second anchor having the strand of suture slidably mounted thereto through the first object and the second object at a second location; and securing the strand of suture of suture to the second anchor under tension.

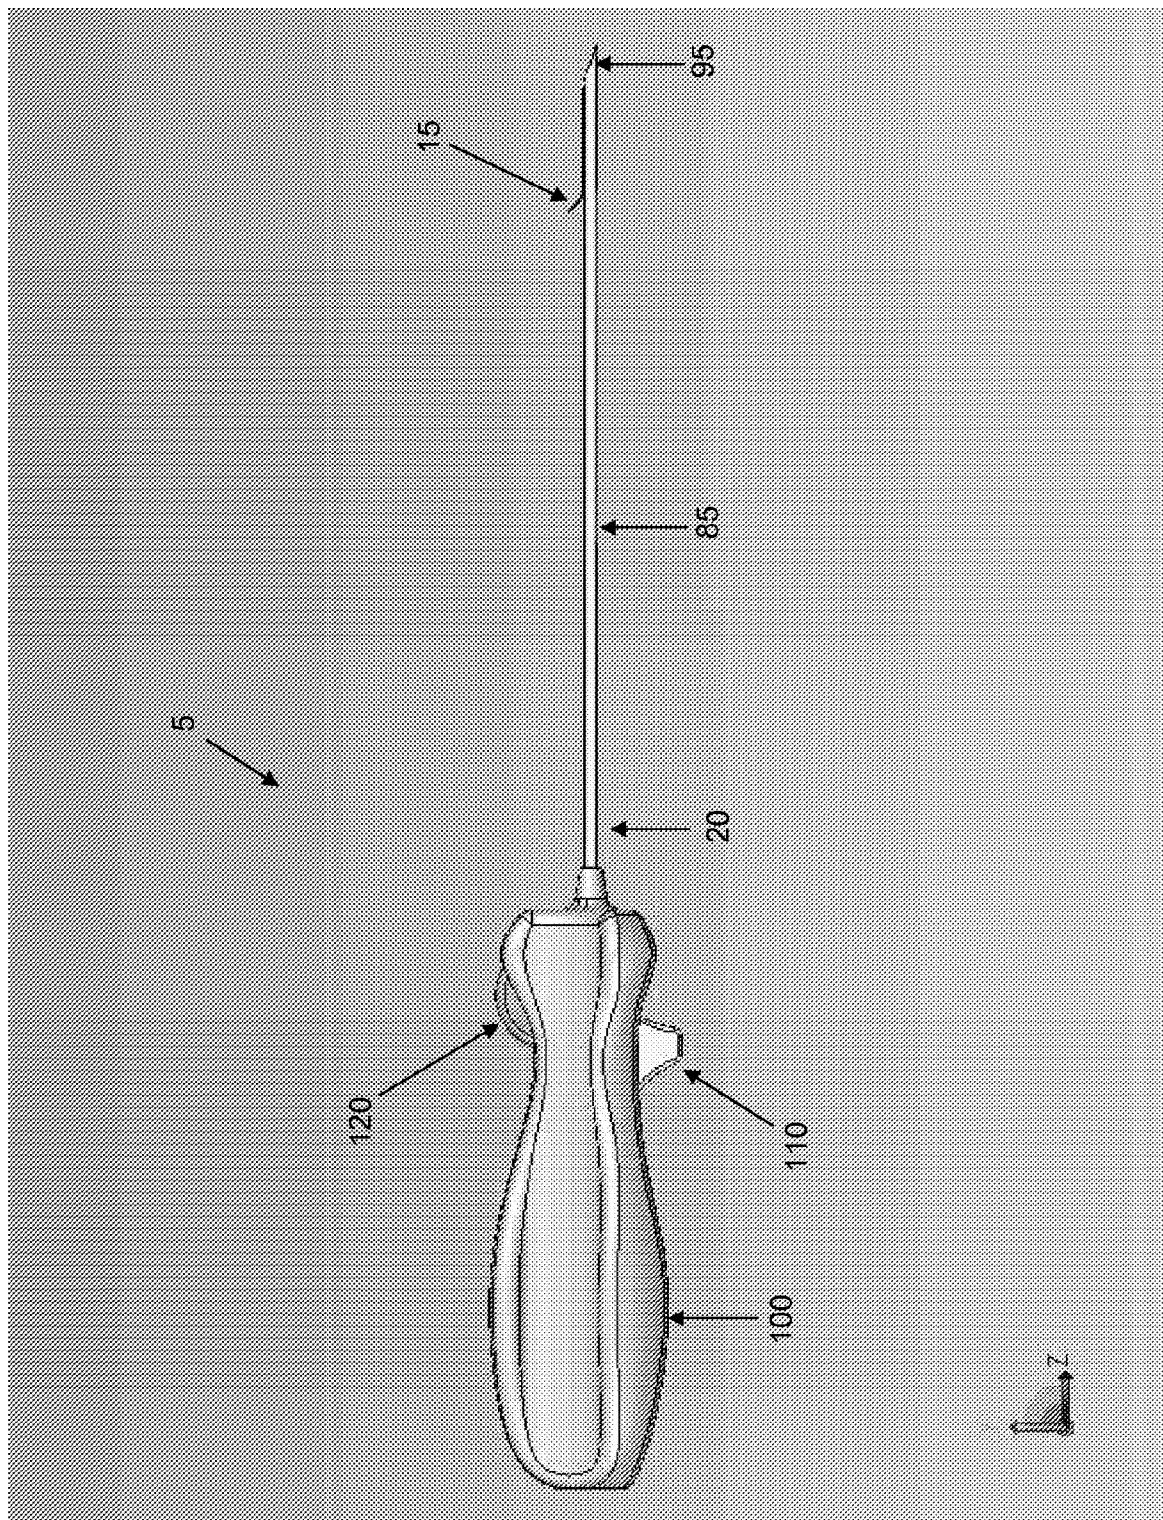


FIG. 1

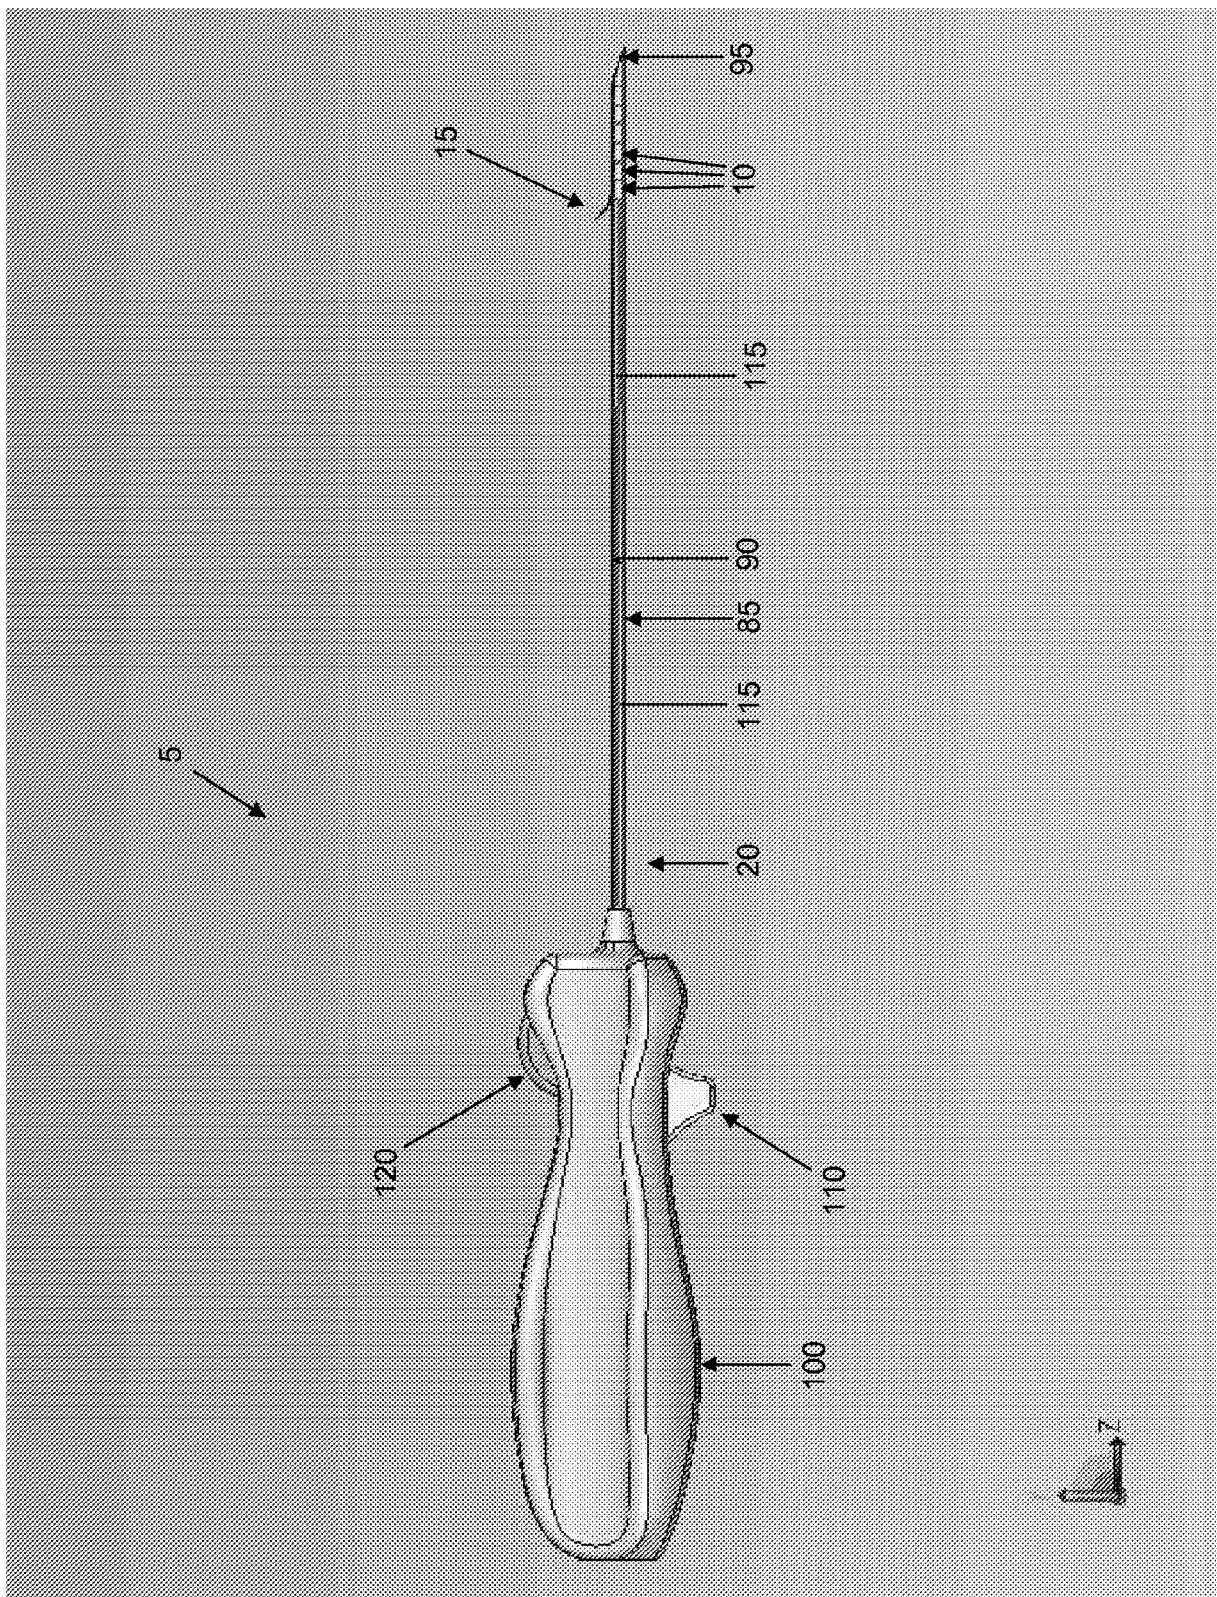


FIG. 2

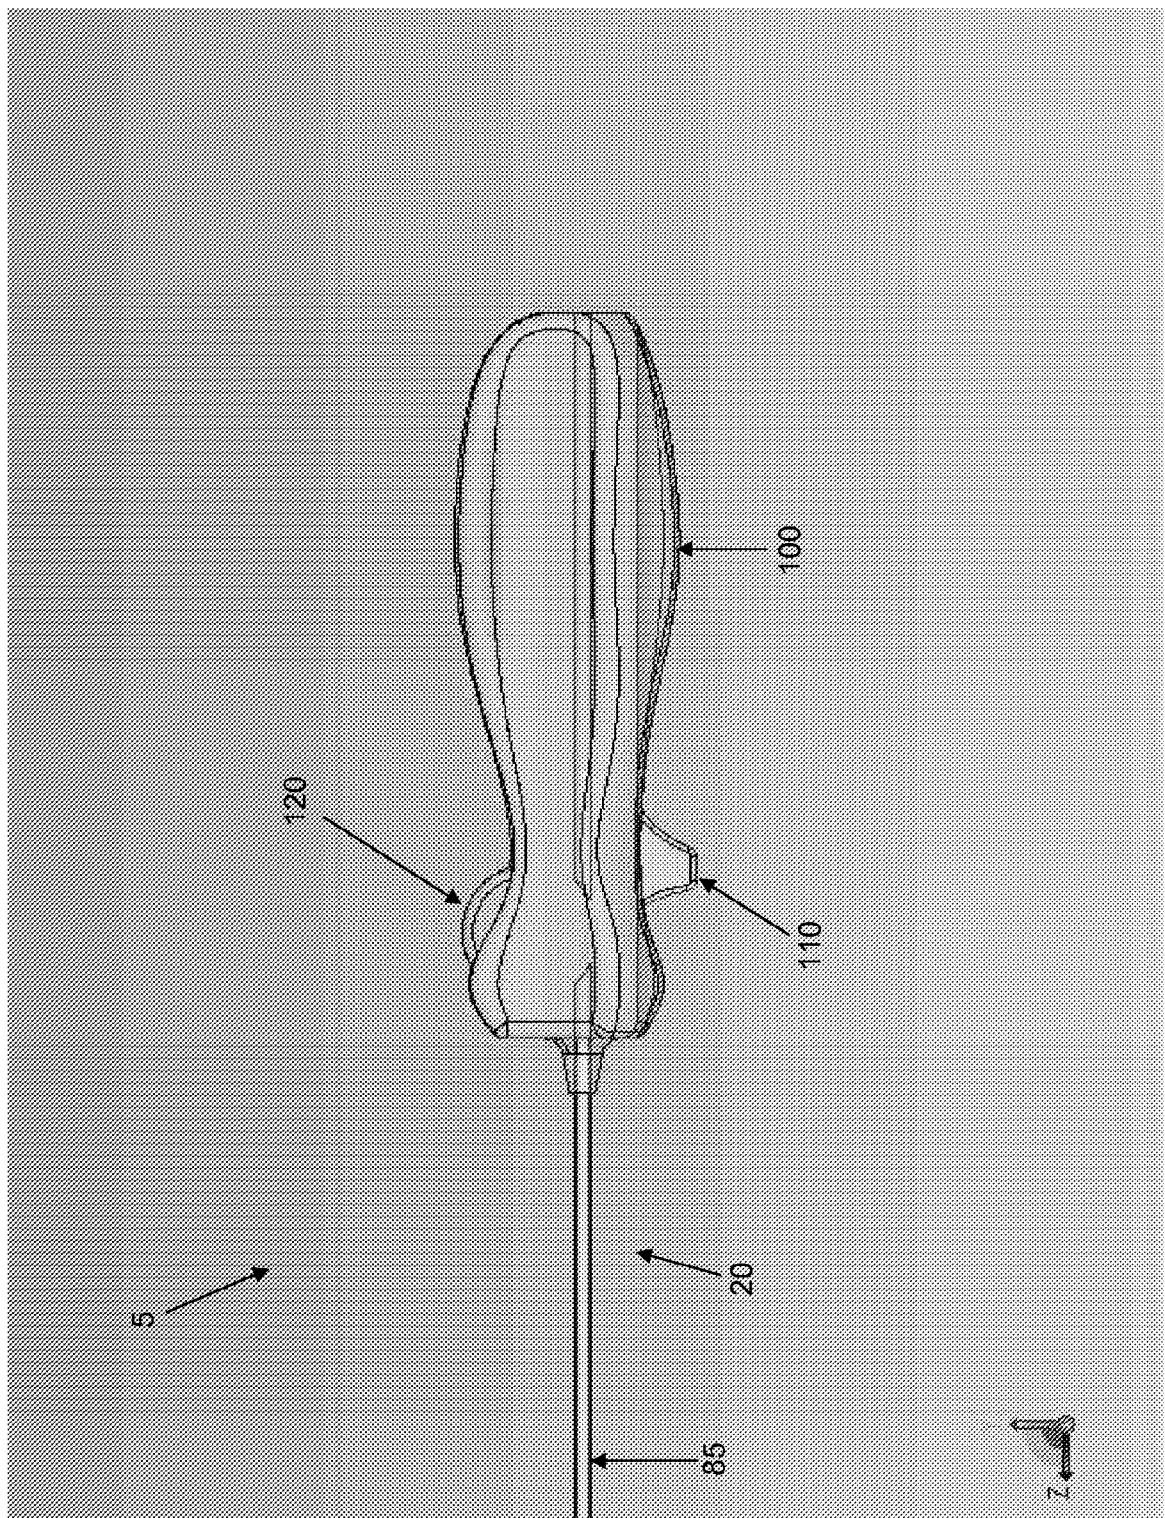


FIG. 3

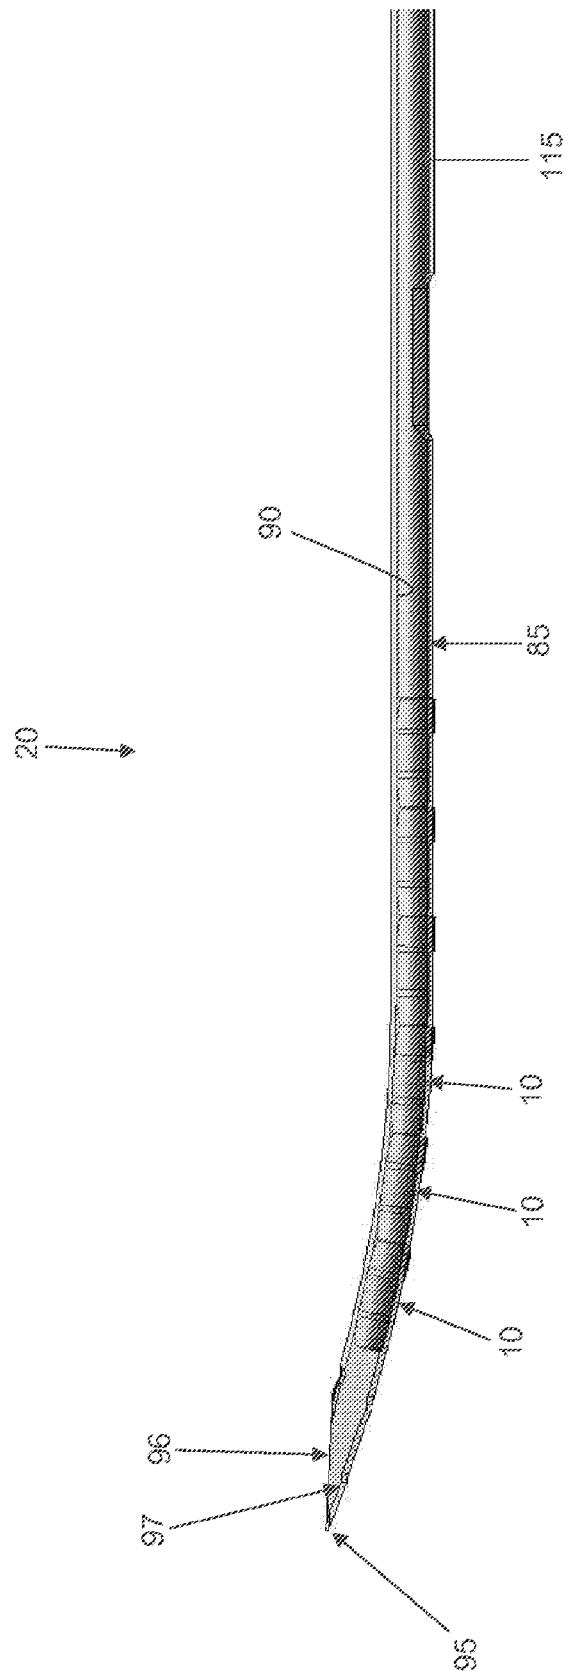


FIG. 3A

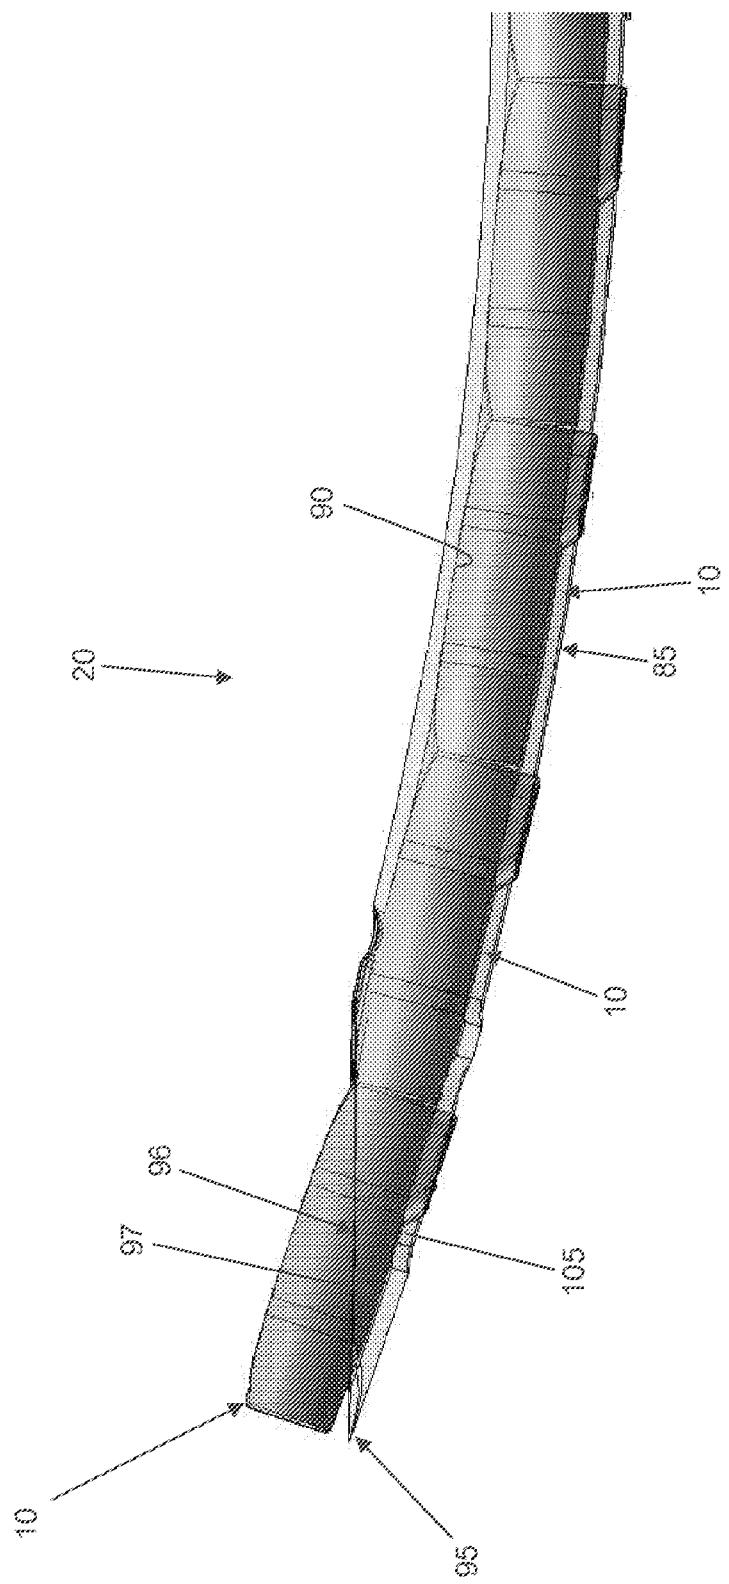


FIG 3B

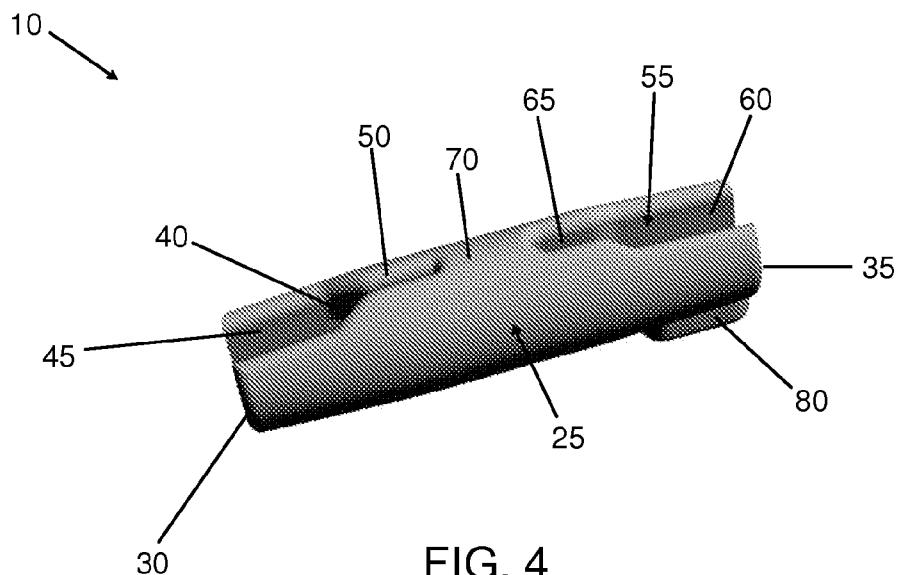


FIG. 4

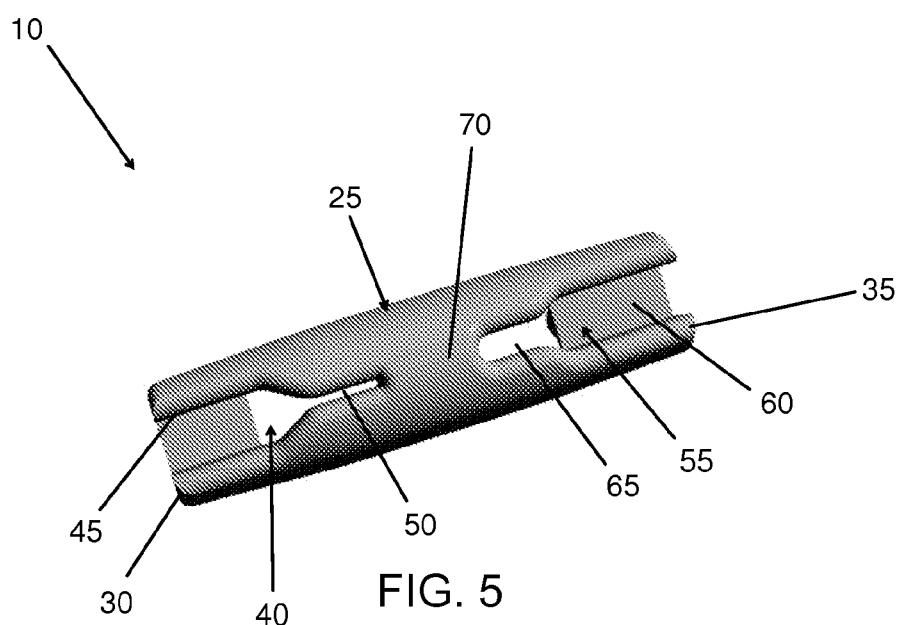


FIG. 5

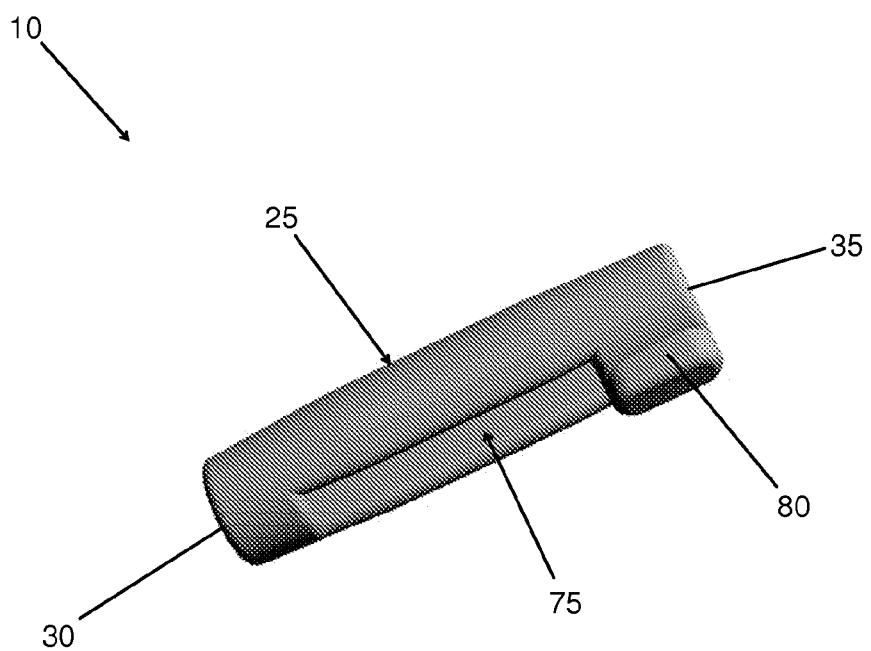


FIG. 6

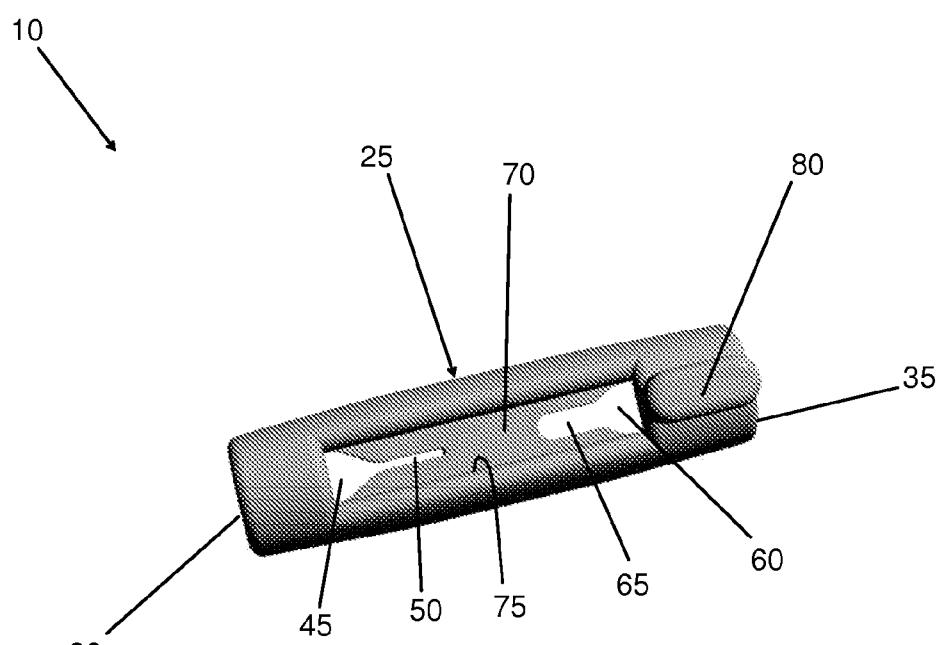


FIG. 7

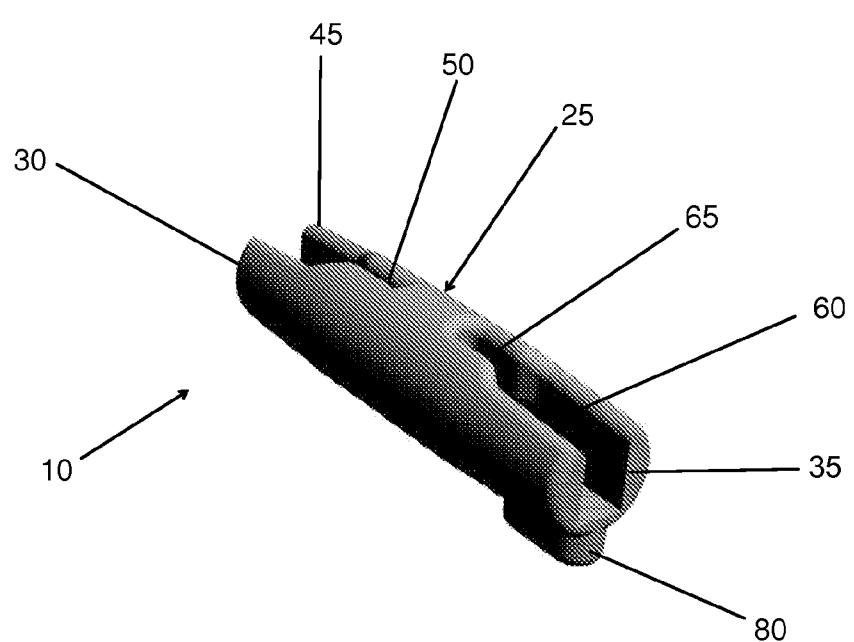


FIG. 8

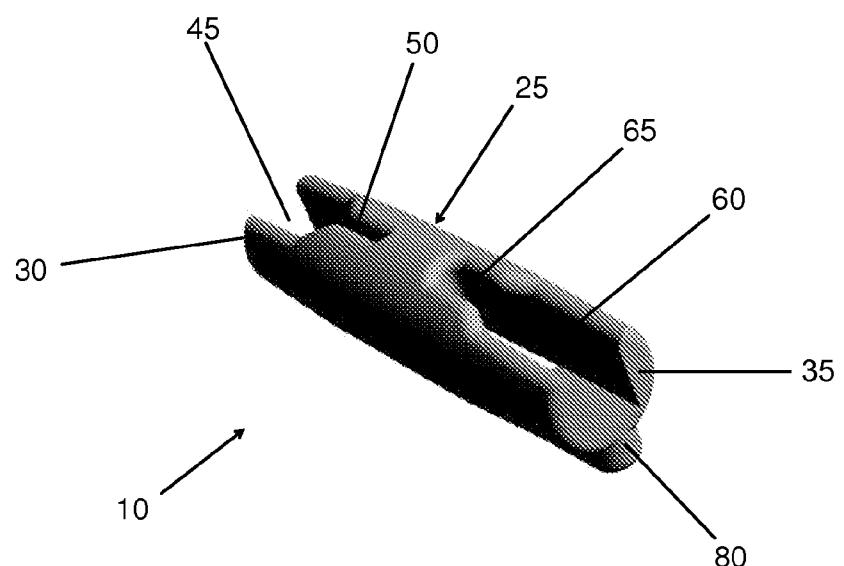


FIG. 9

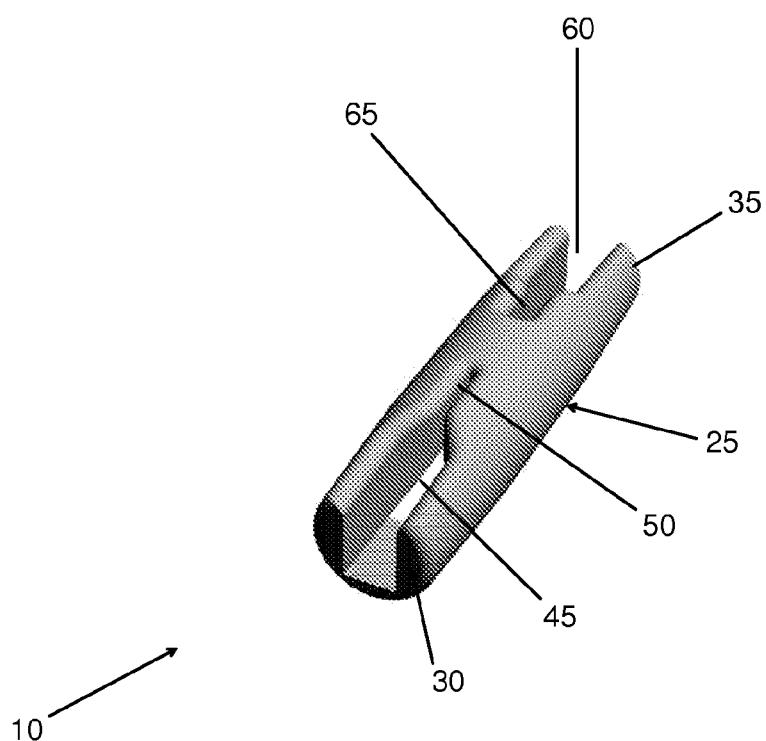
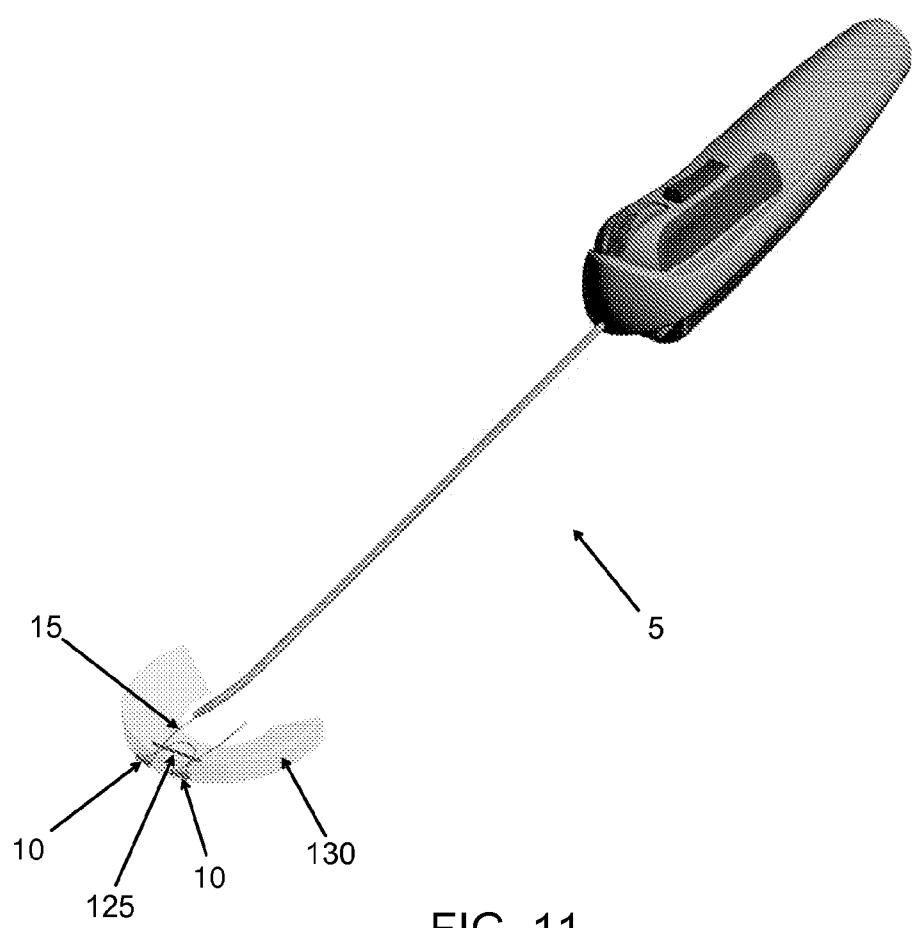


FIG. 10



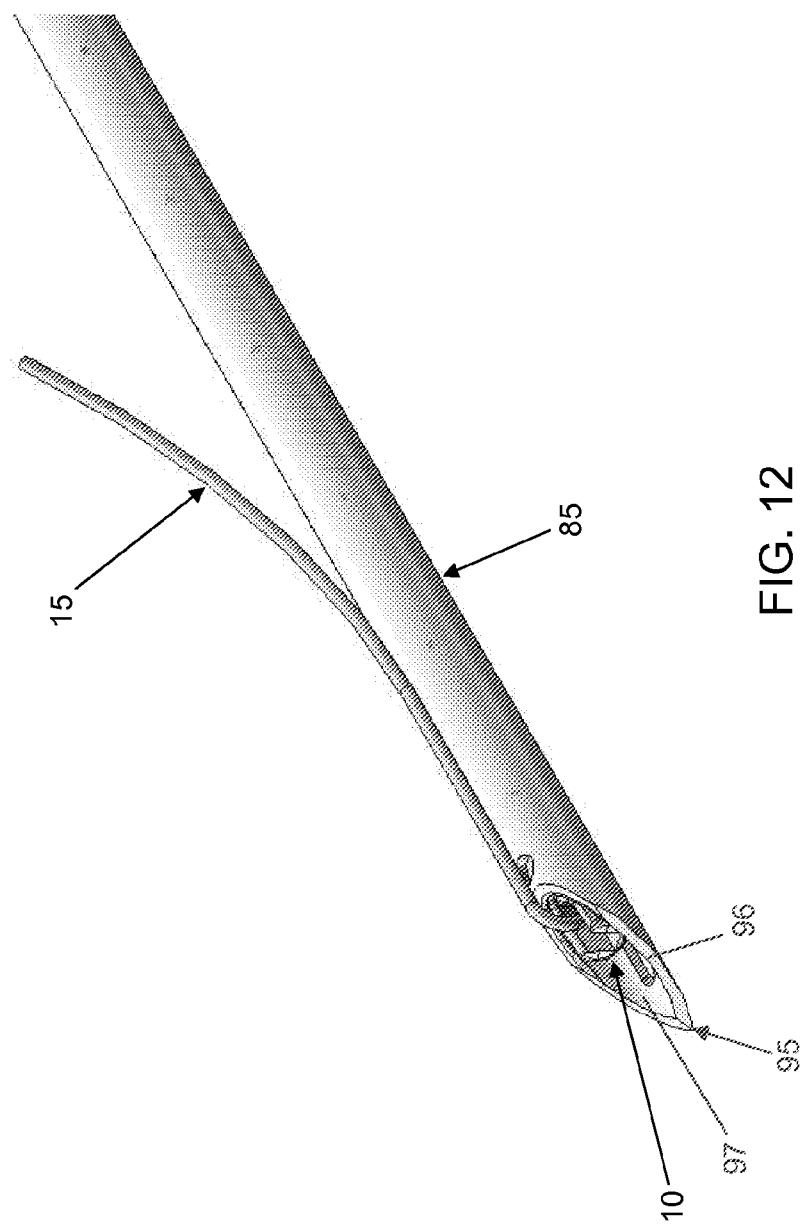
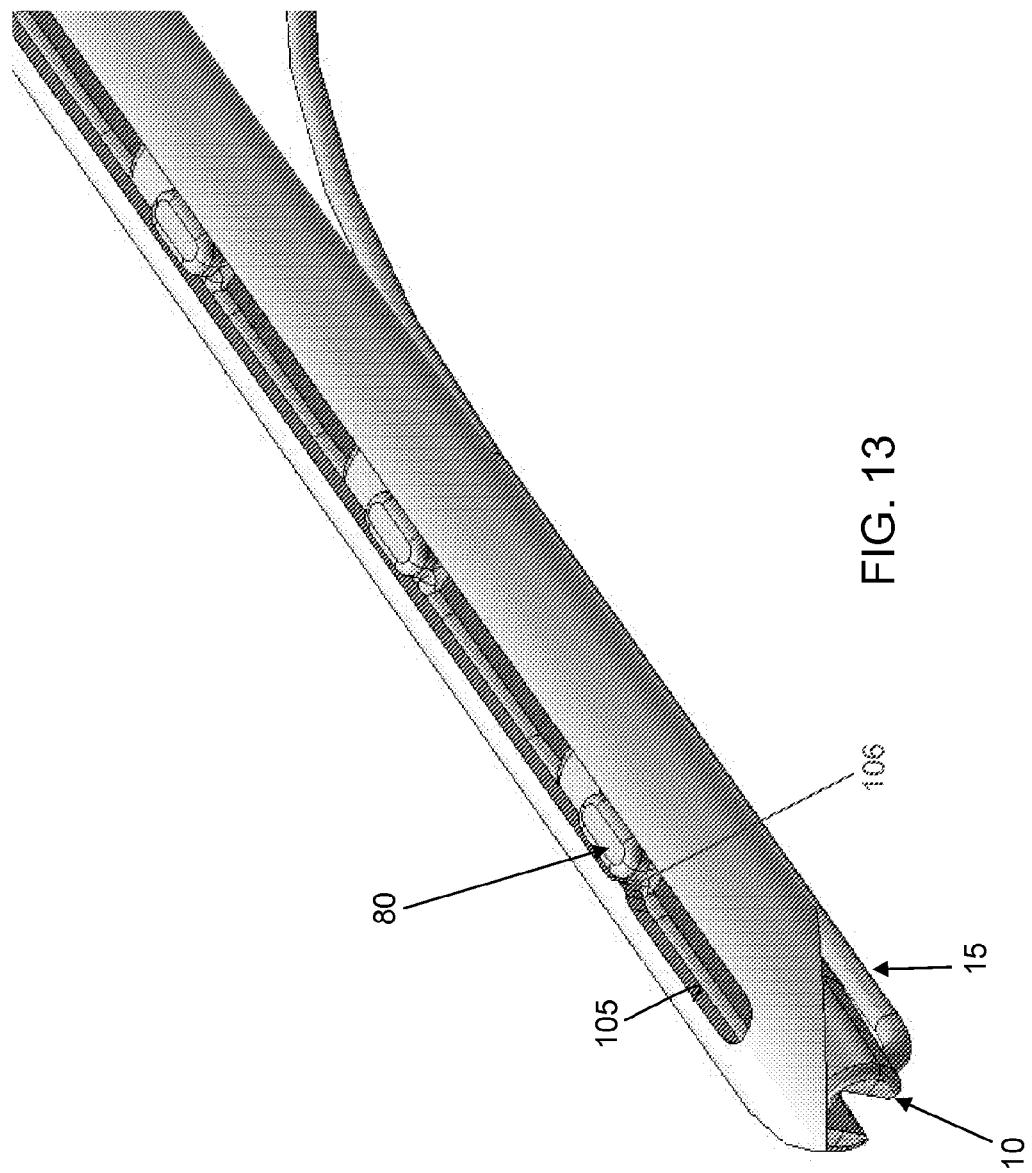
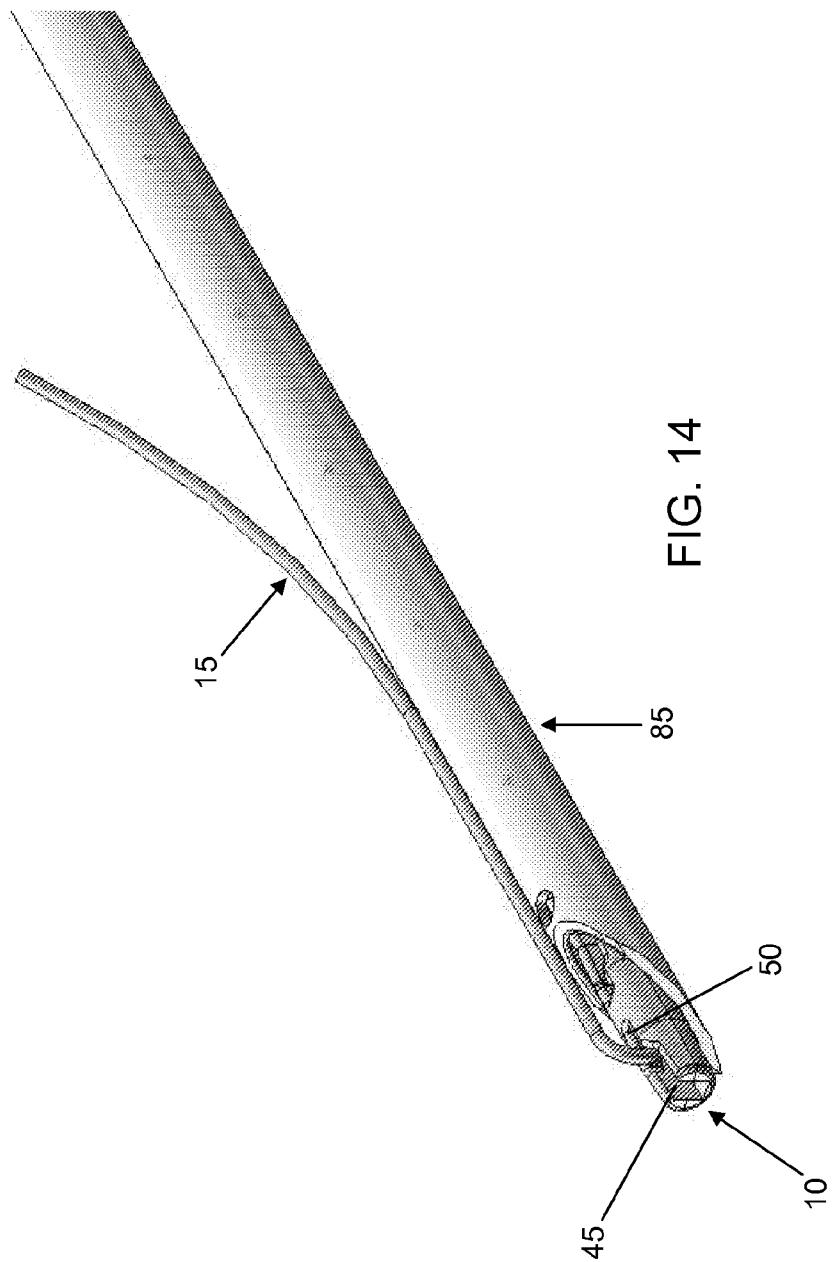


FIG. 13





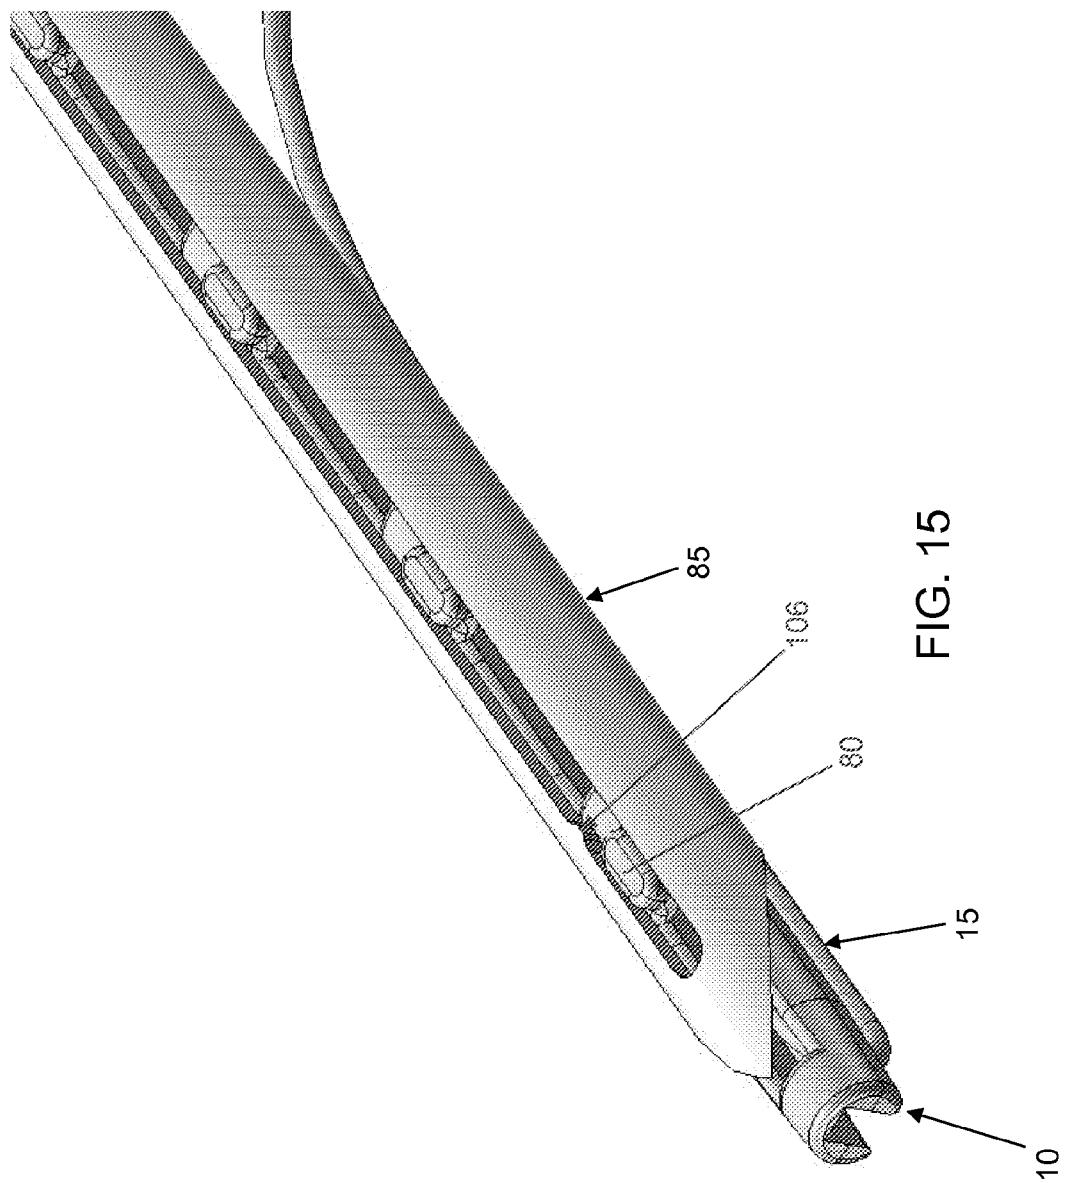
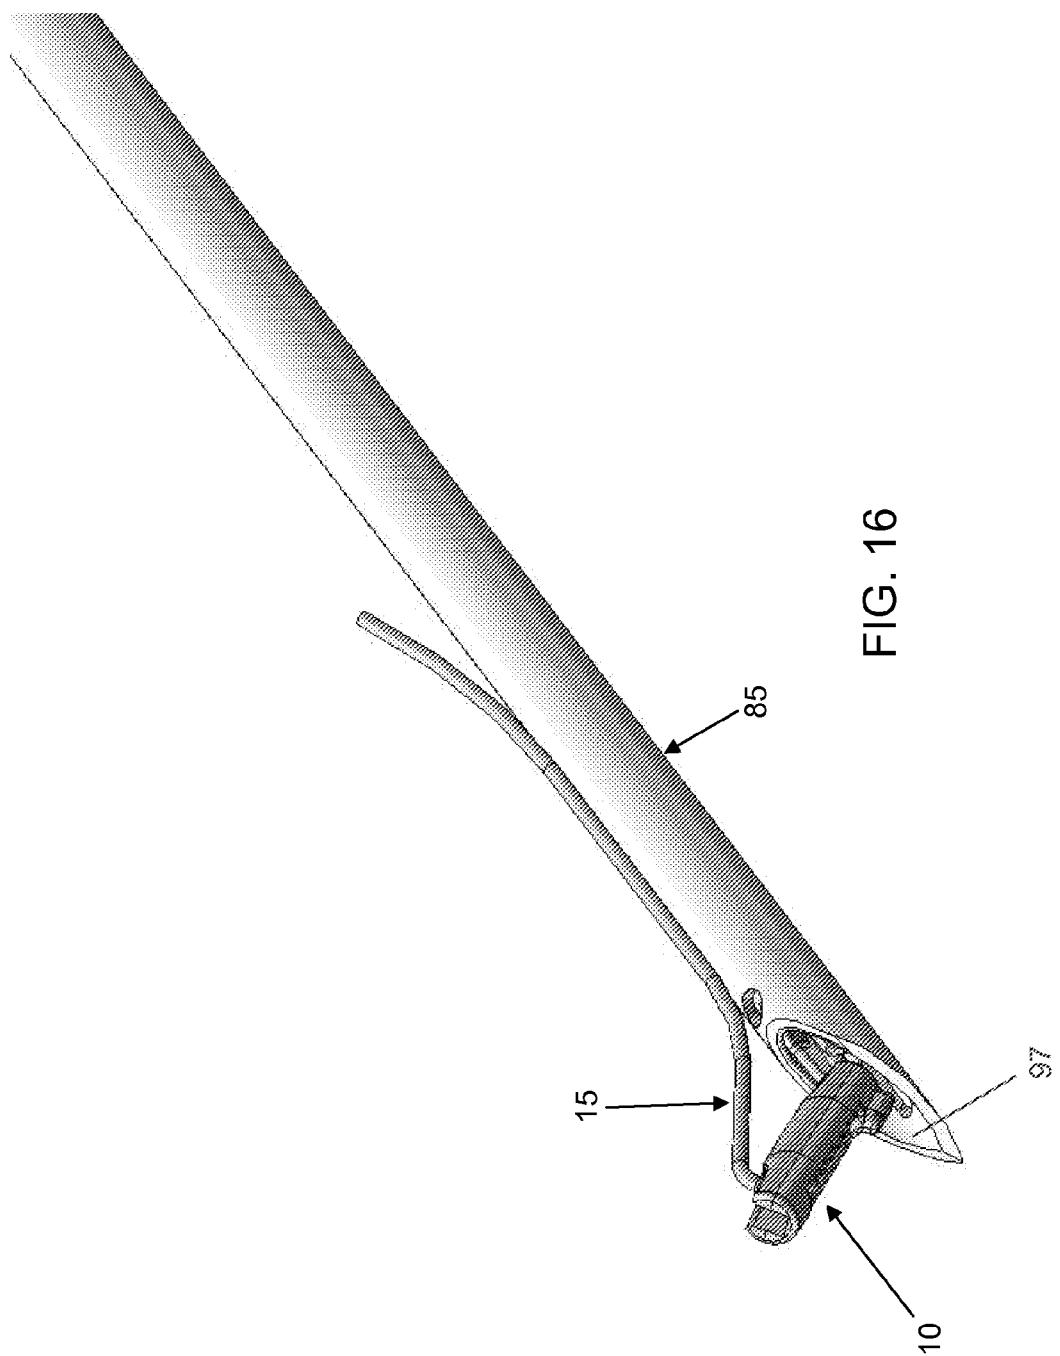


FIG. 16



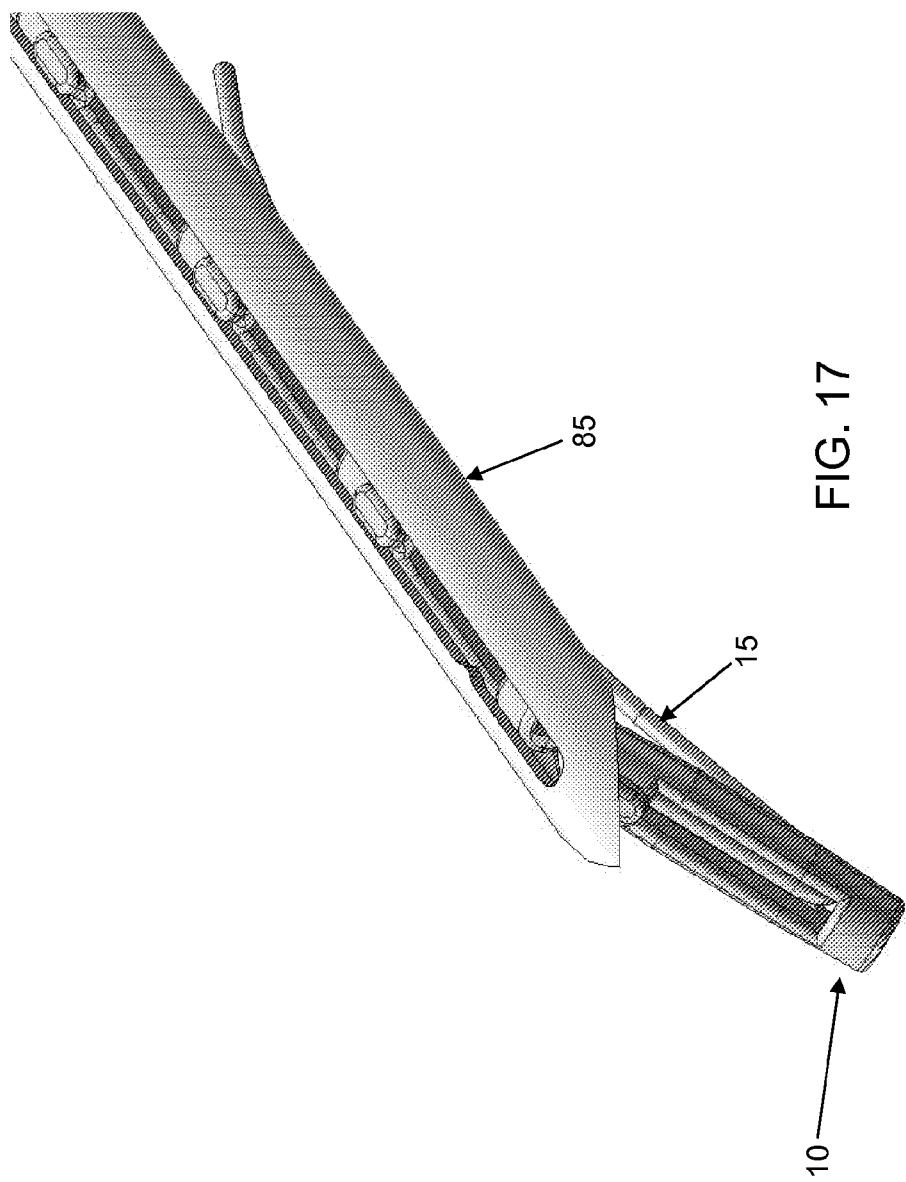


FIG. 17

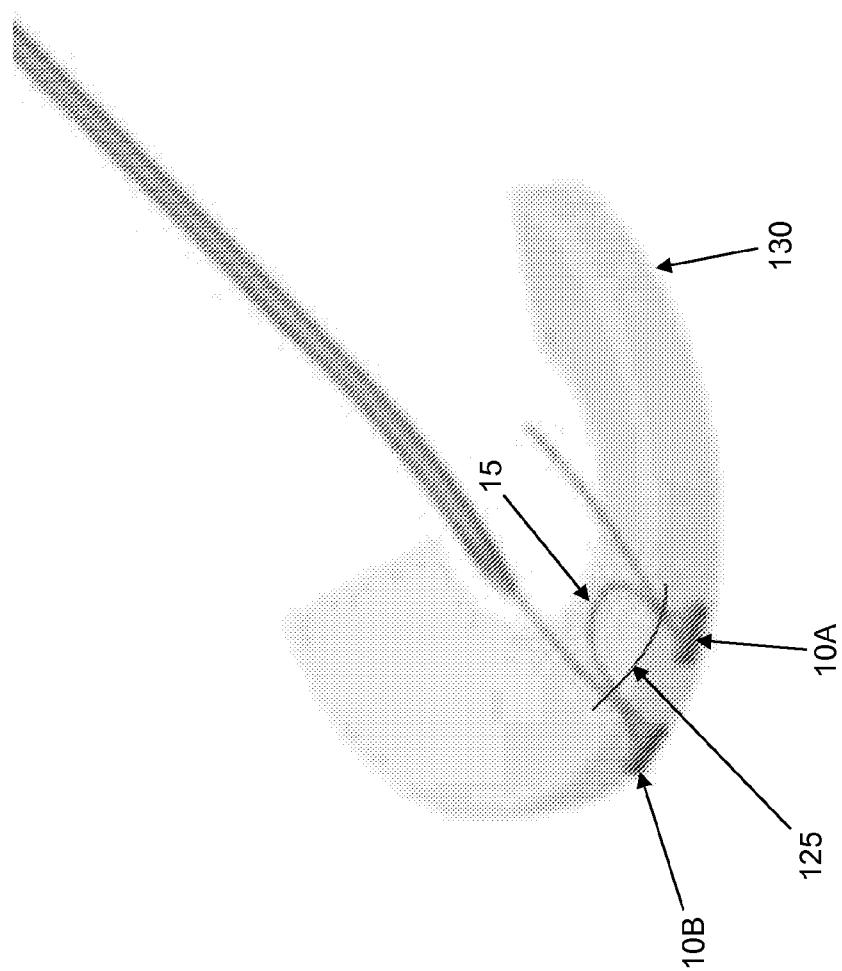


FIG. 18

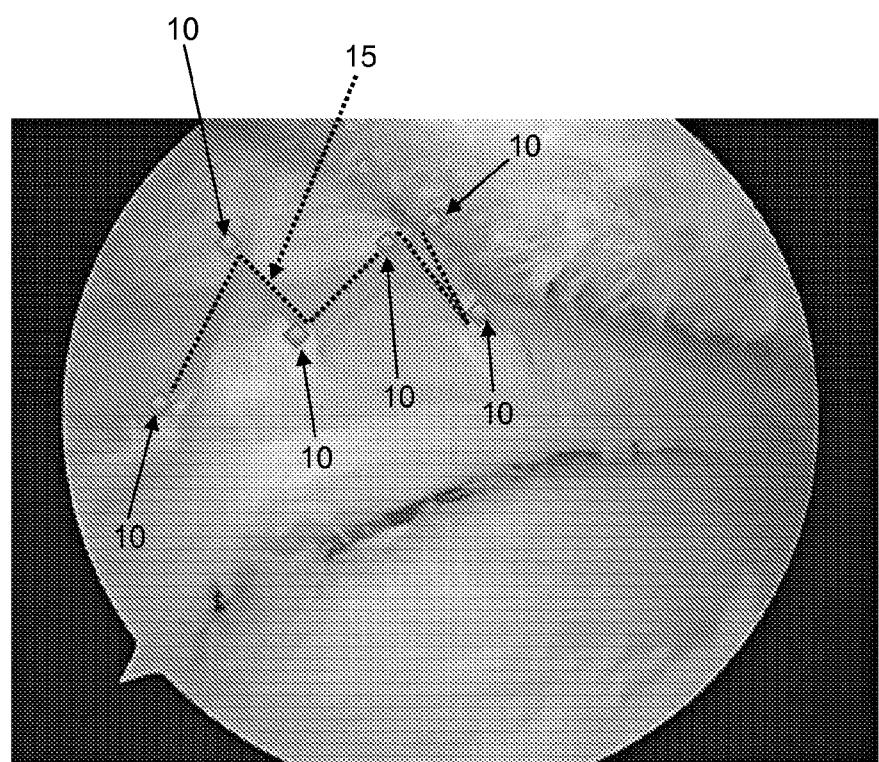


FIG. 19

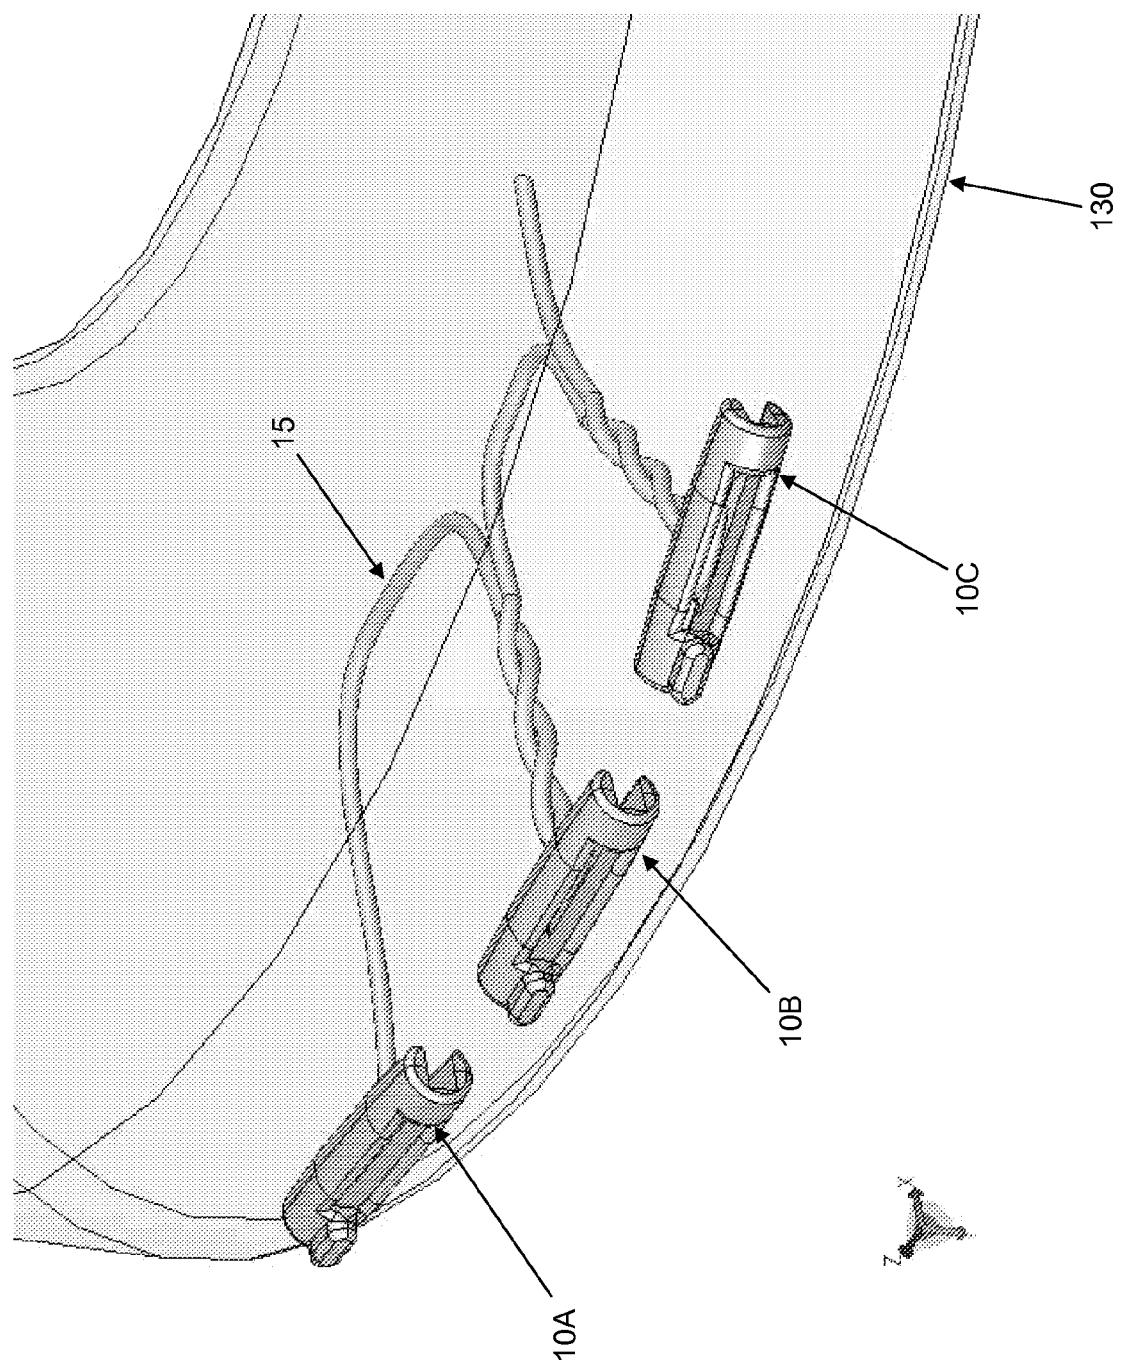


FIG. 20

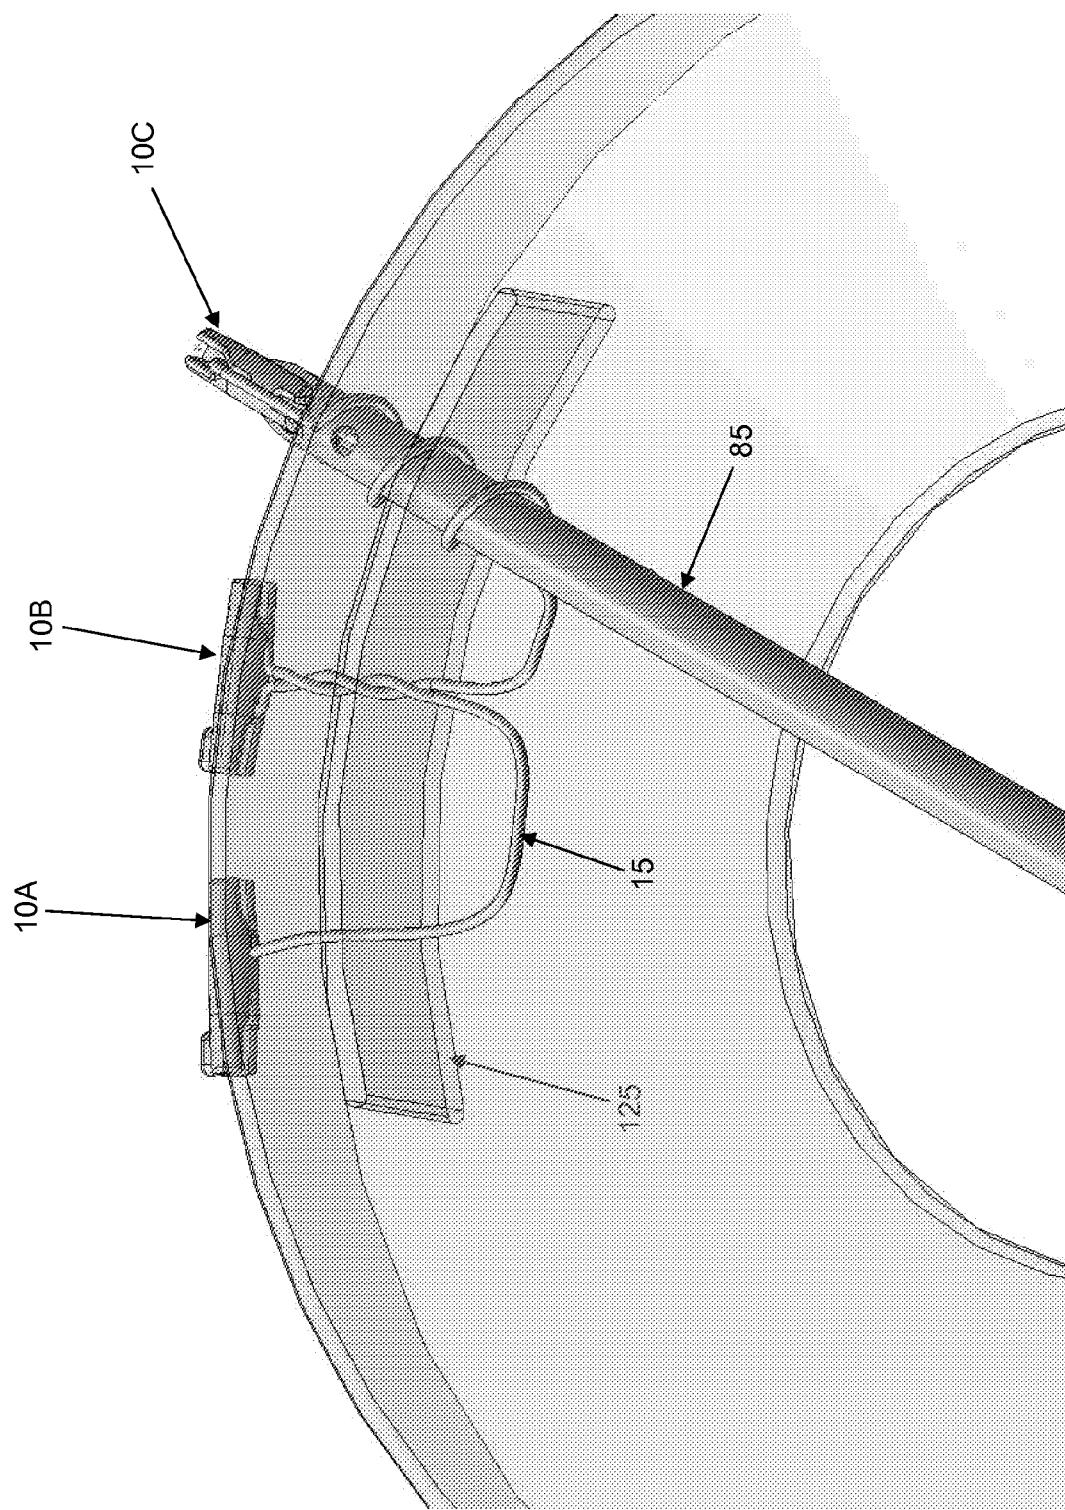


FIG. 21

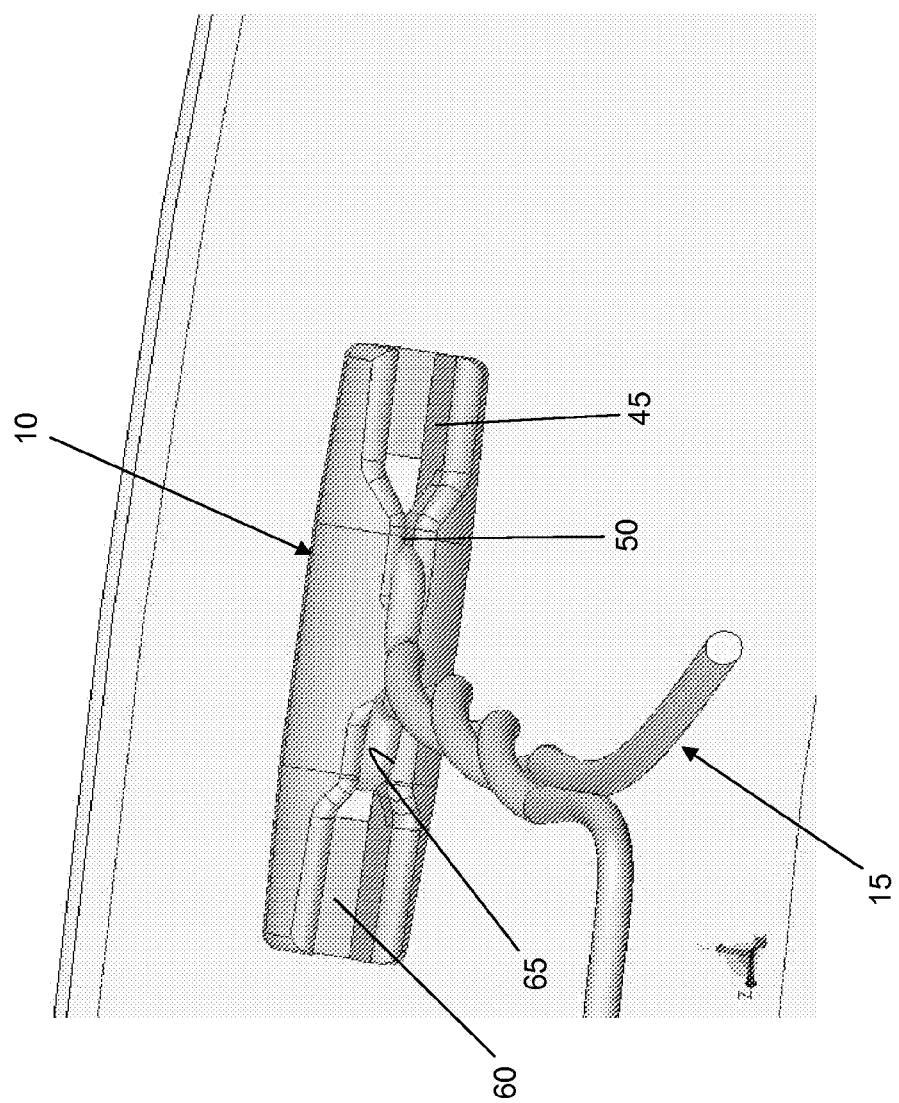


FIG. 22

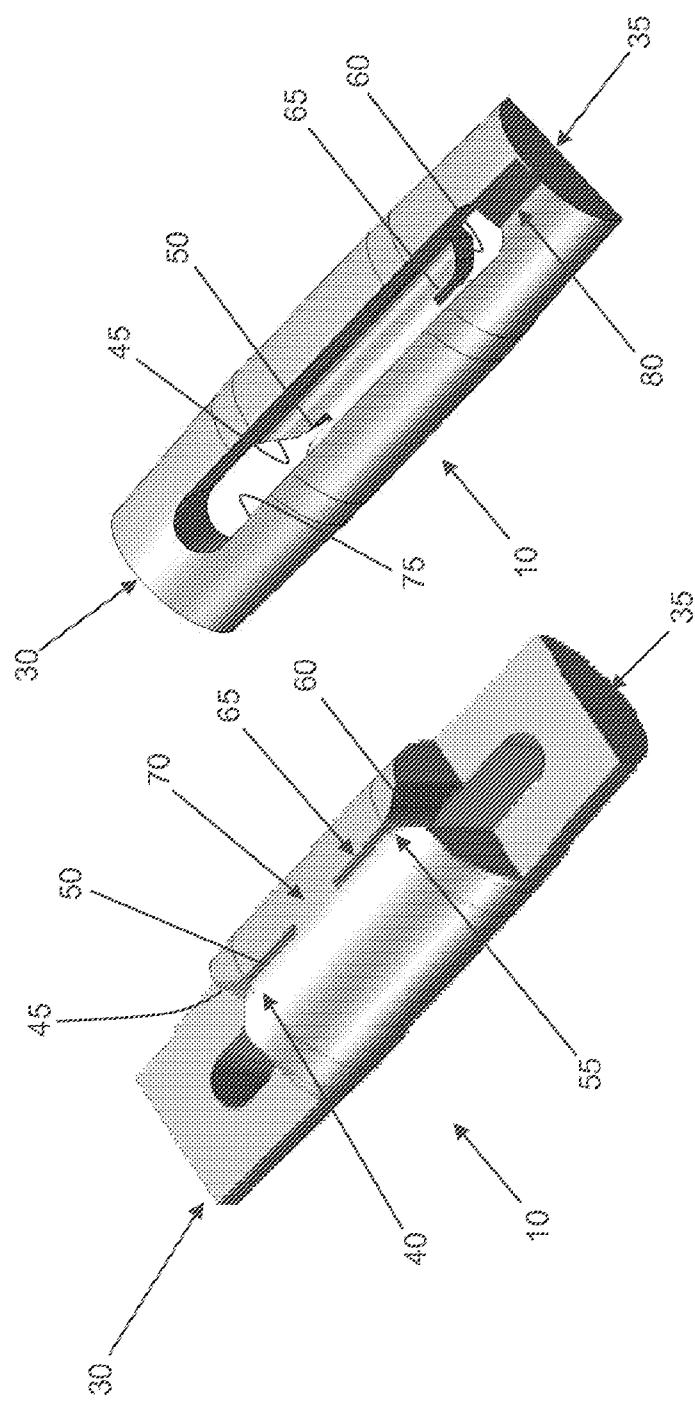


FIG. 24

FIG. 23

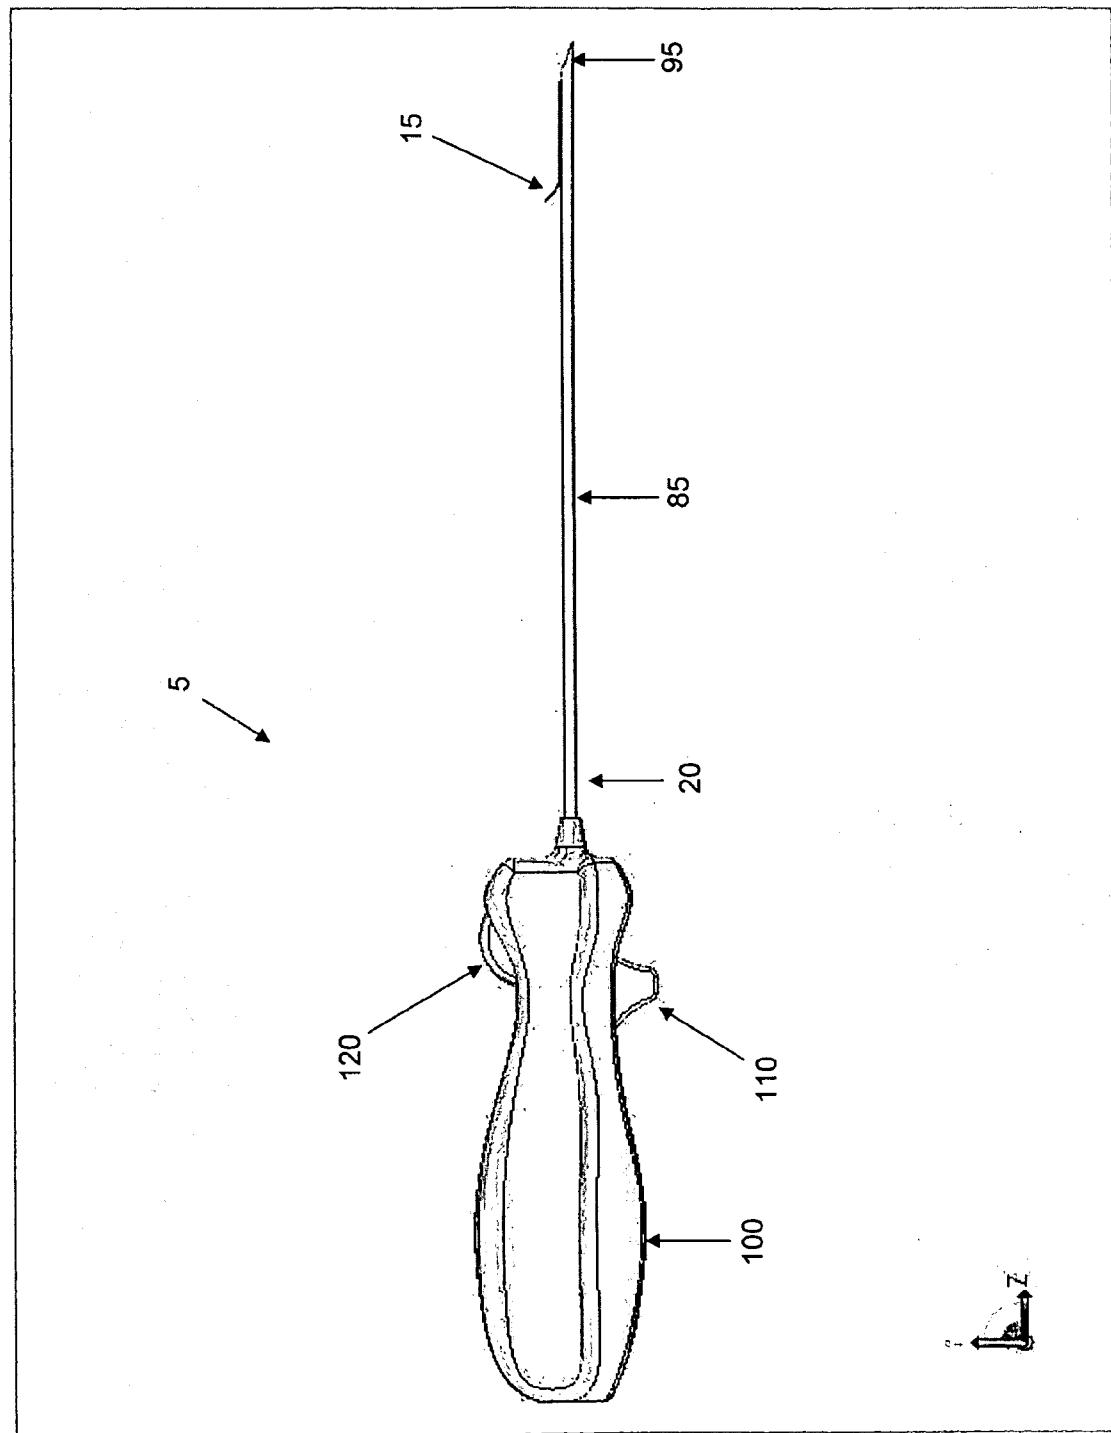


FIG. 1

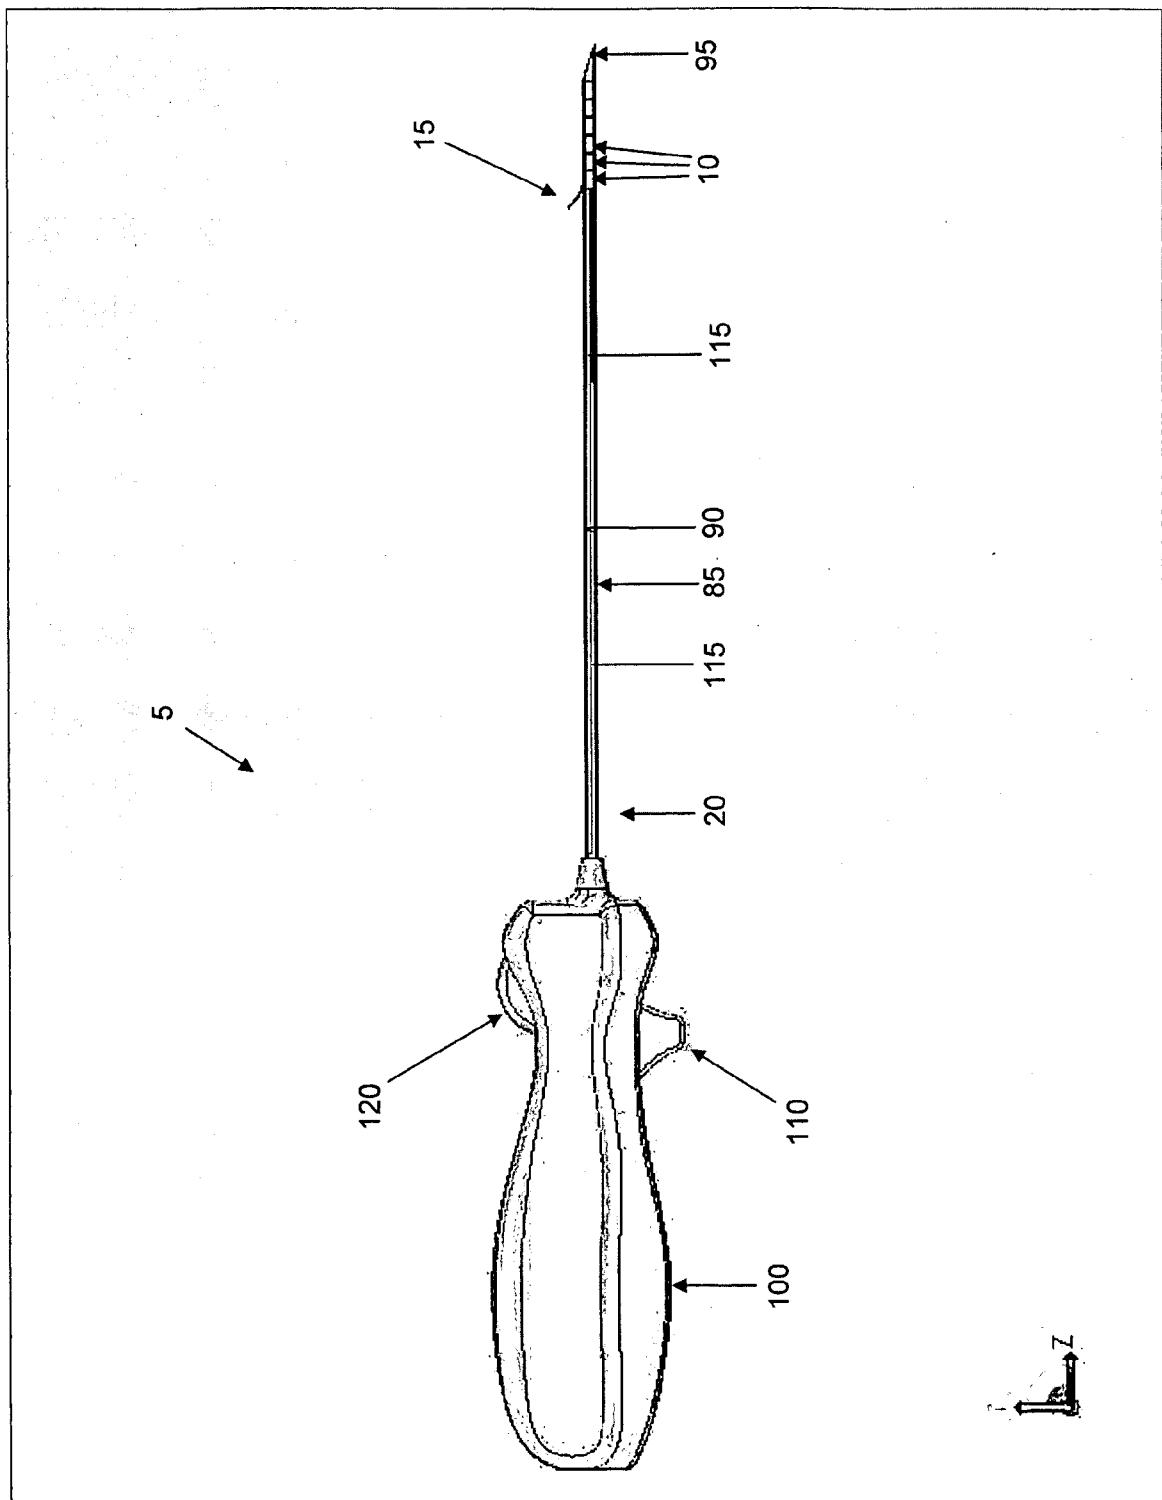


FIG. 2

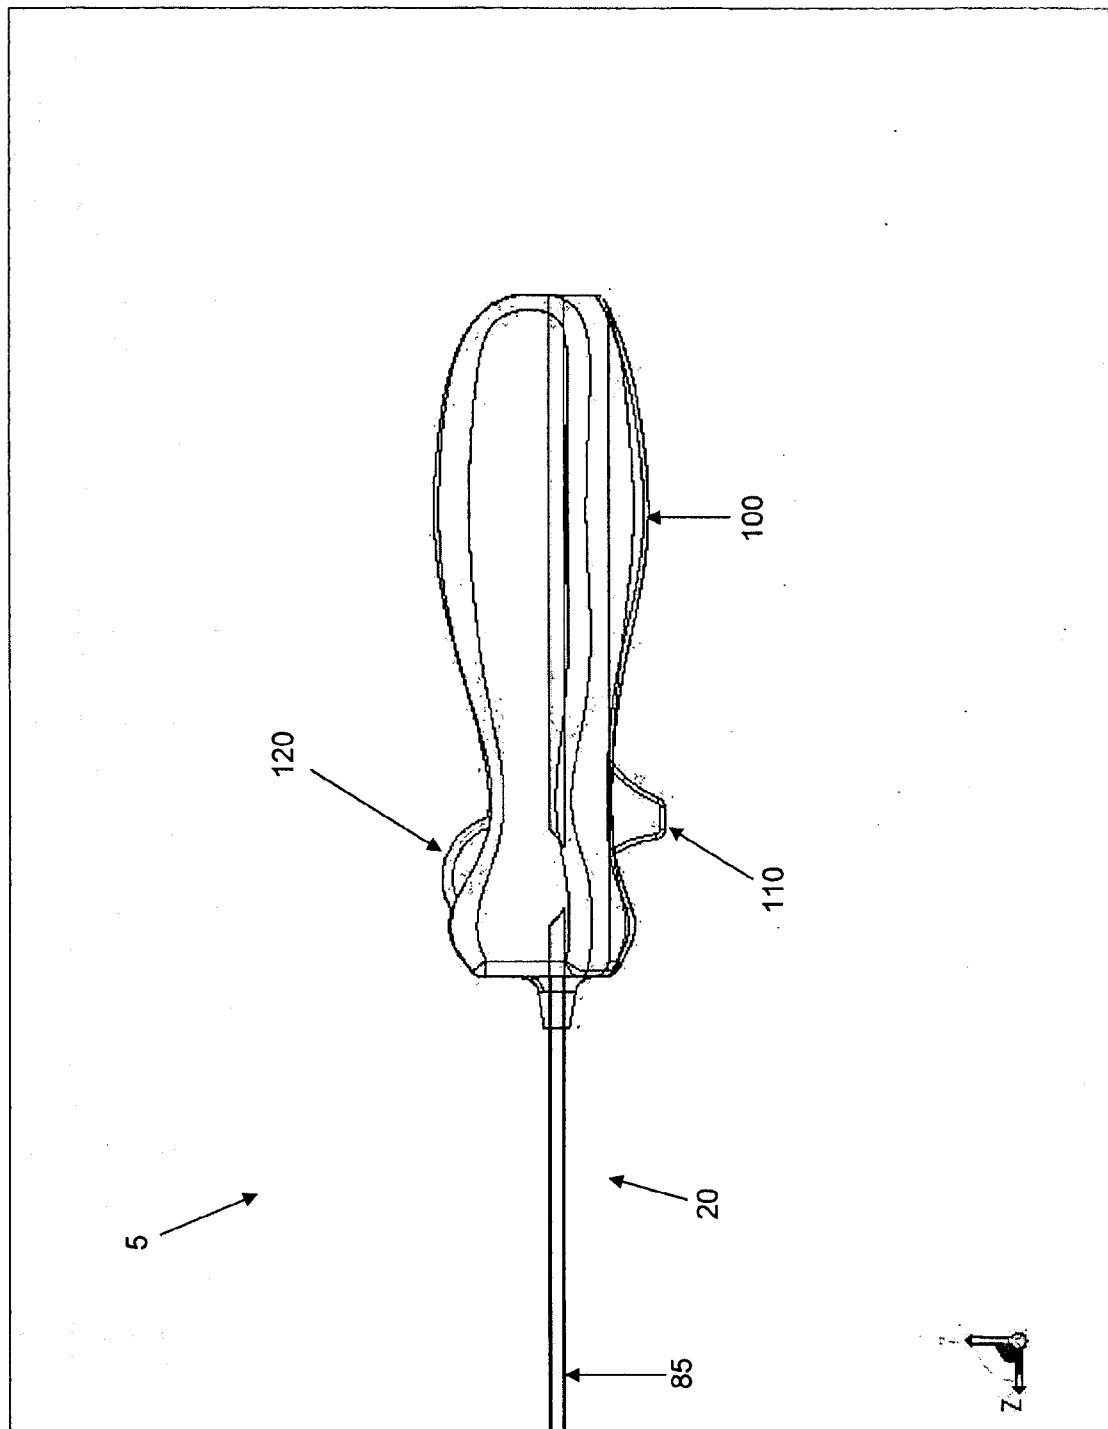


FIG. 3

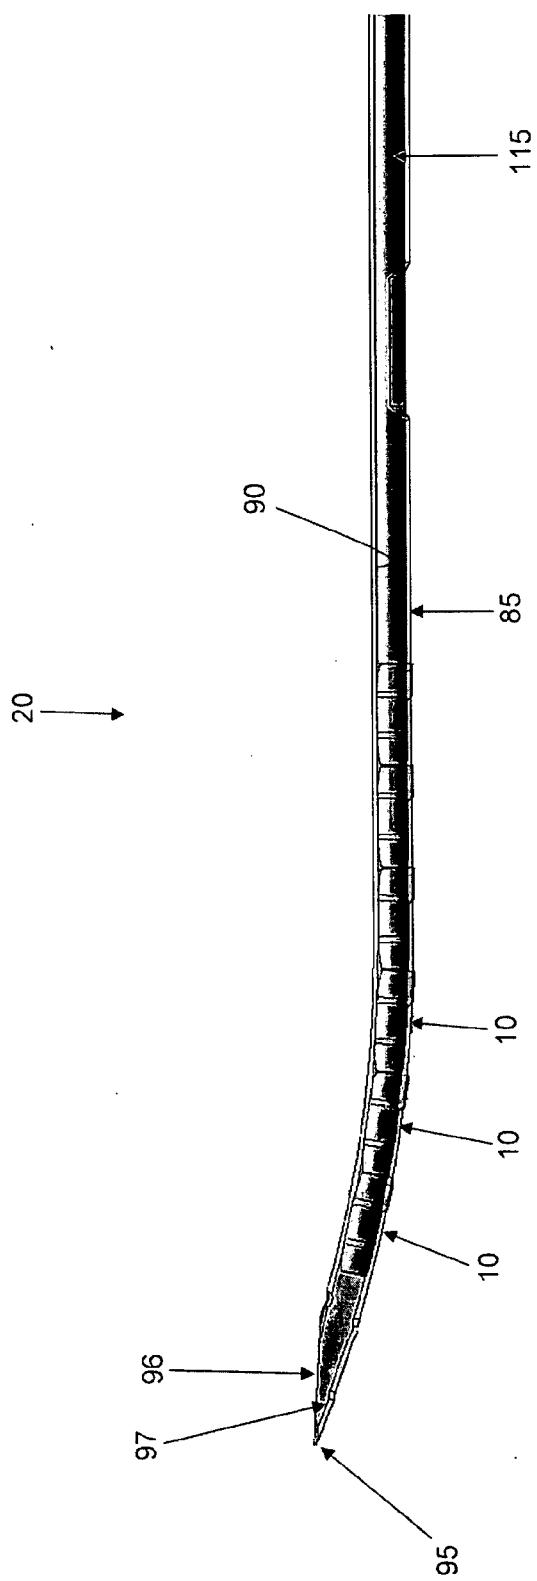


FIG. 3A


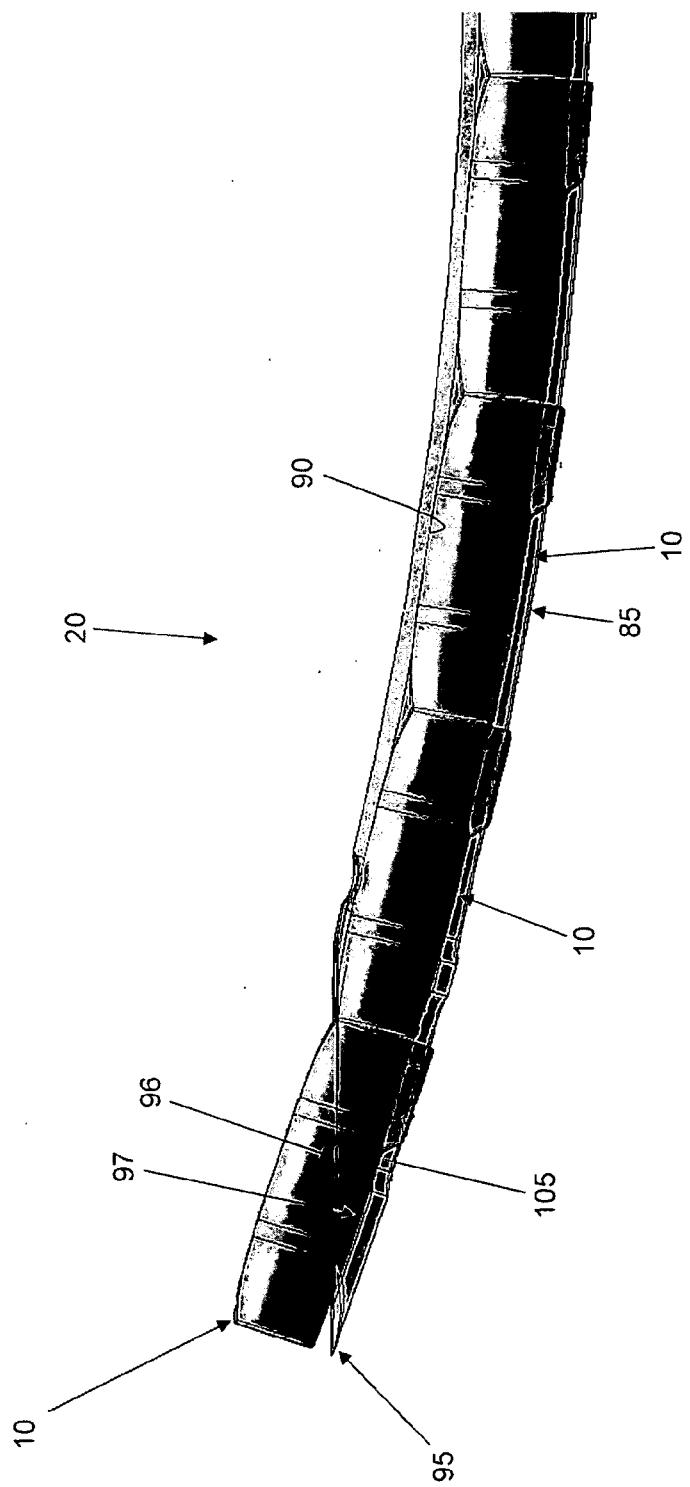


FIG. 3B

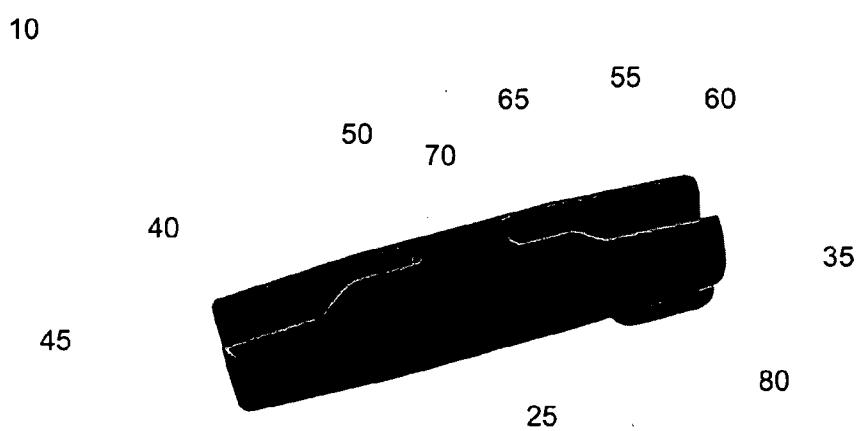

30

FIG. 4

10

70

25

35

60

65 55


45

50

30

40

FIG. 5

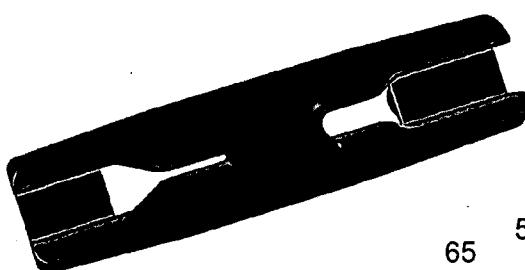

10

25

35

80

75

30

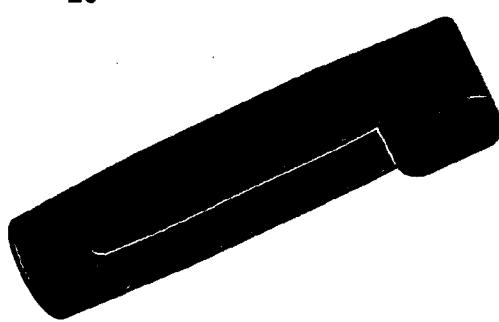


FIG. 6

10

25

70

80

35

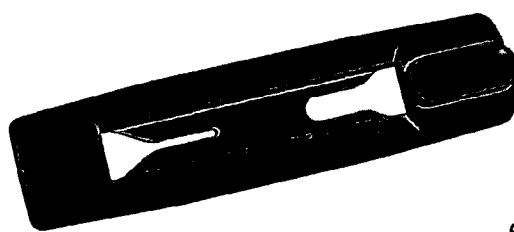


FIG. 7

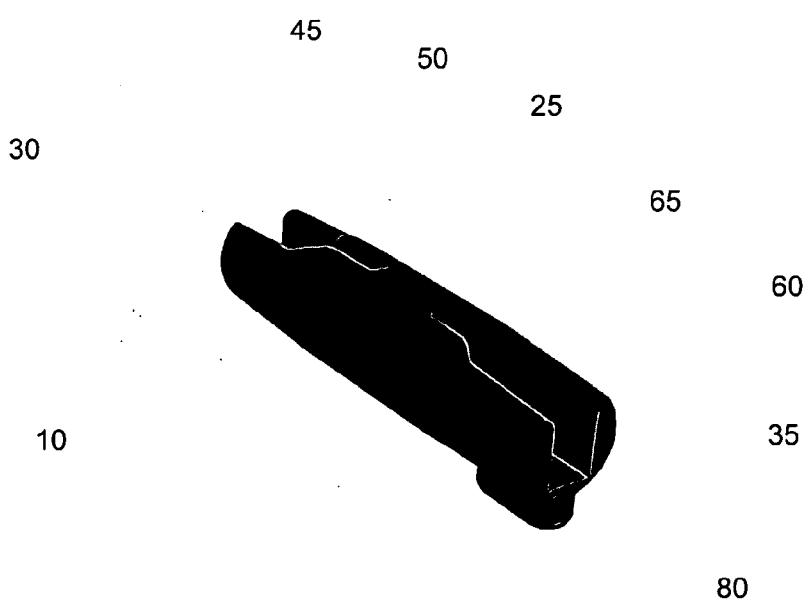


FIG. 8

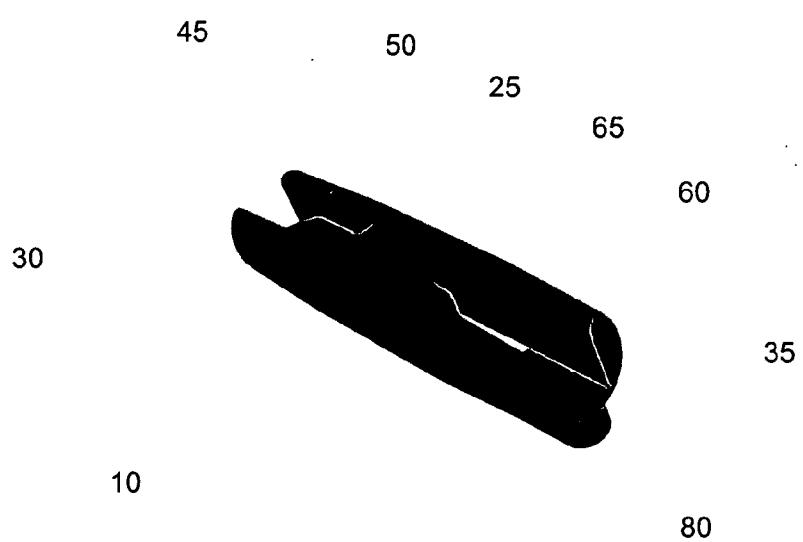


FIG. 9

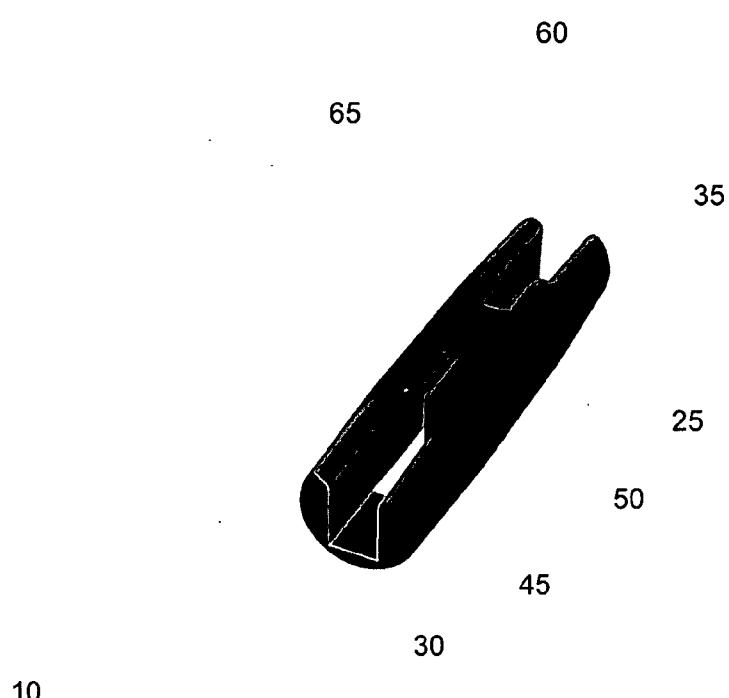
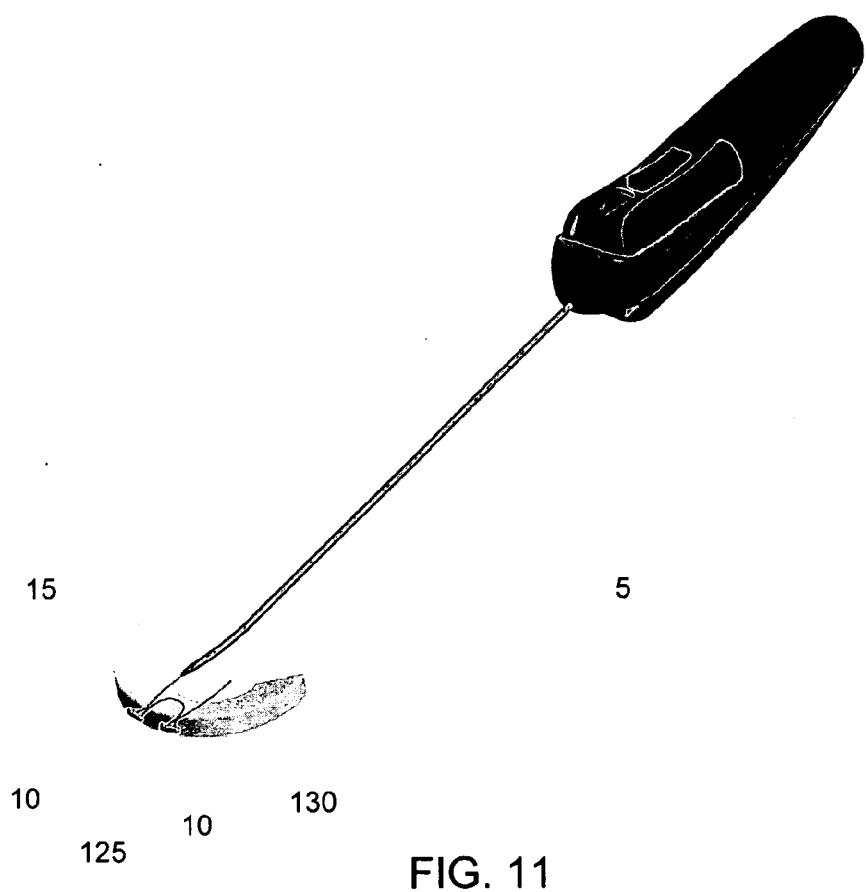
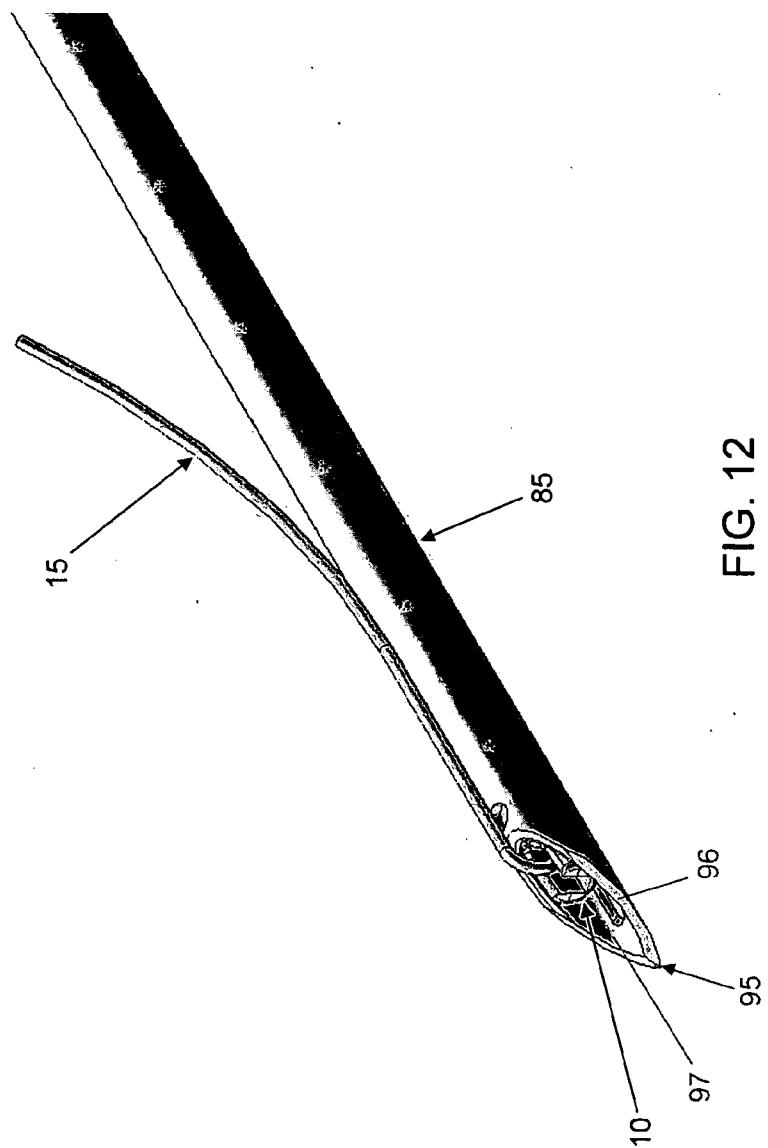
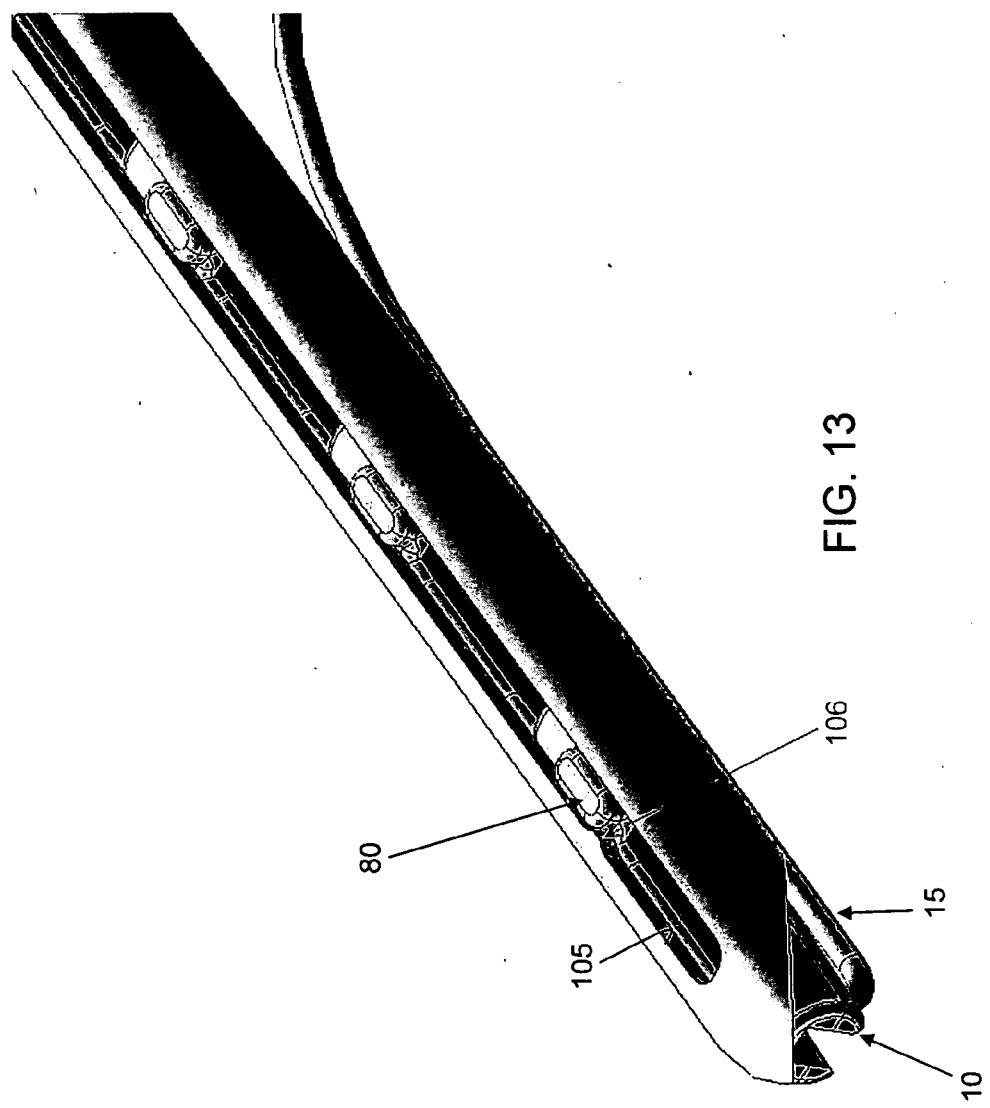
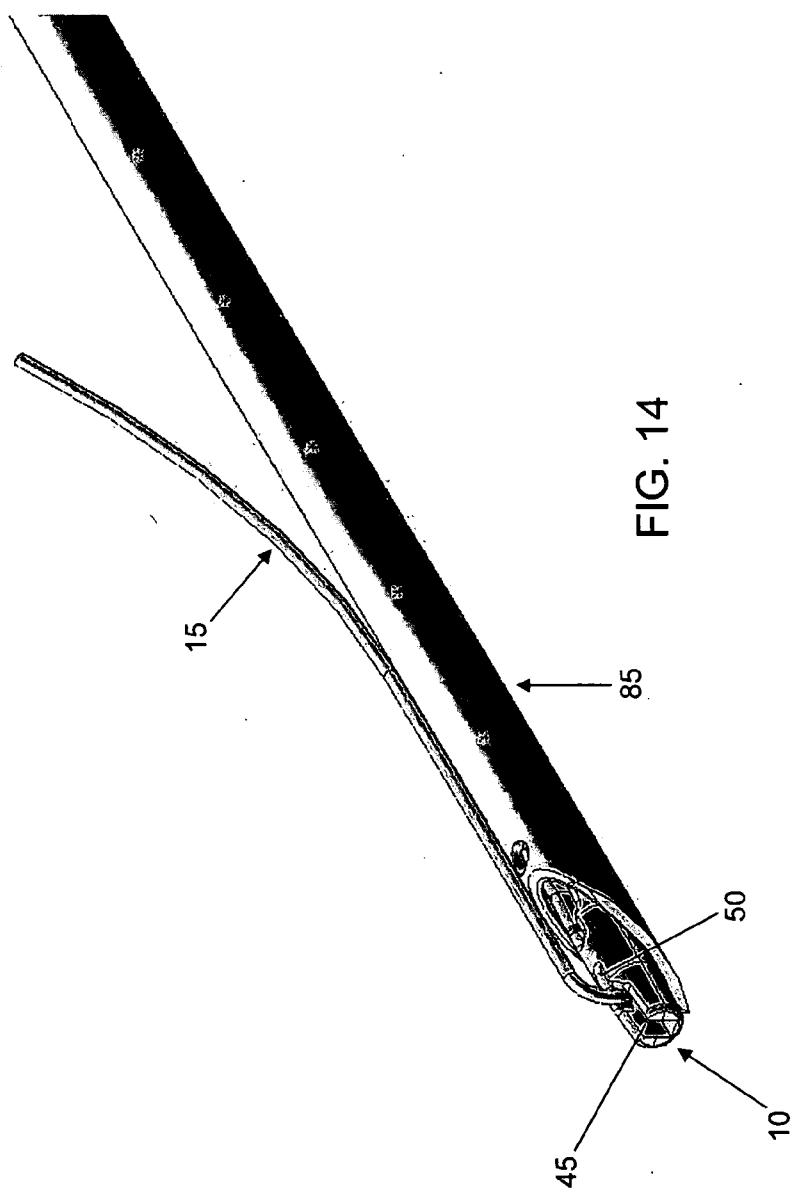



FIG. 10











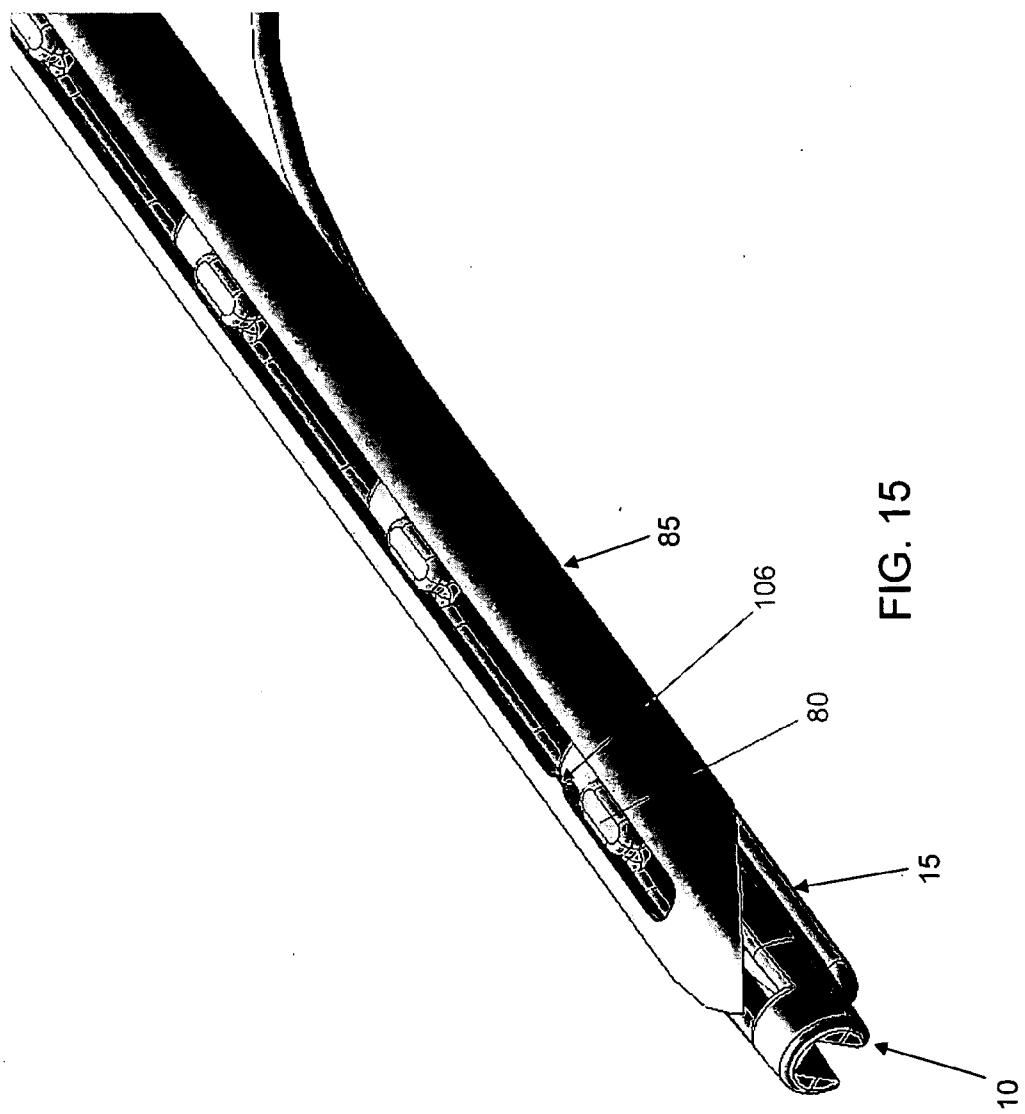

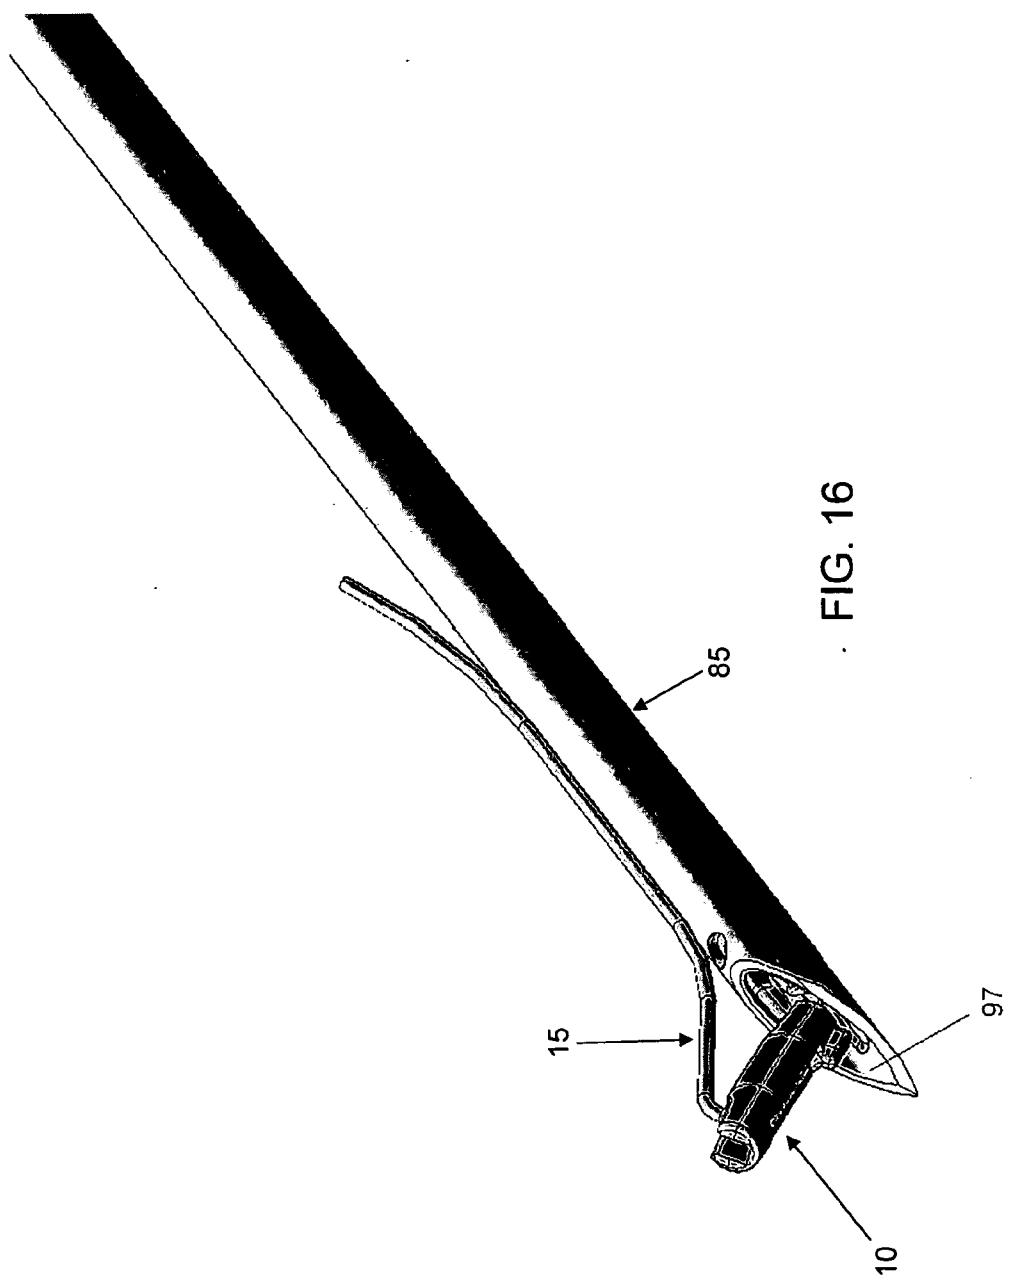

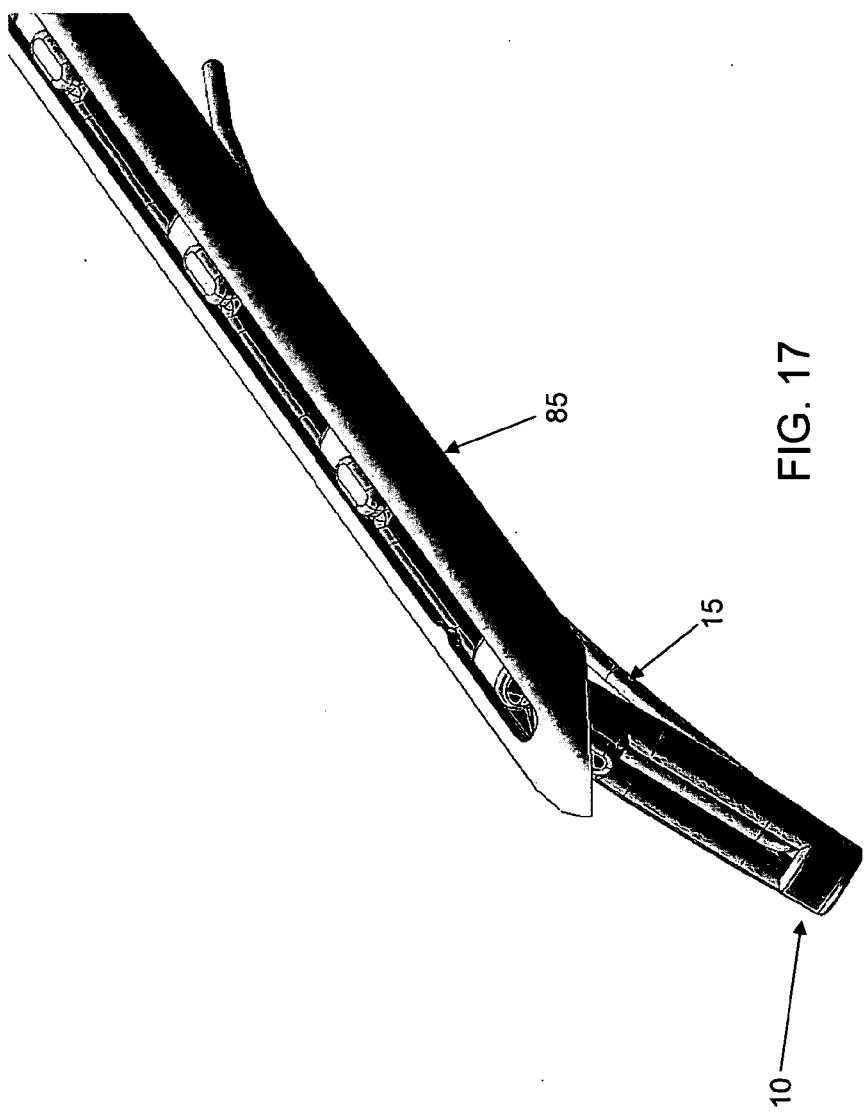

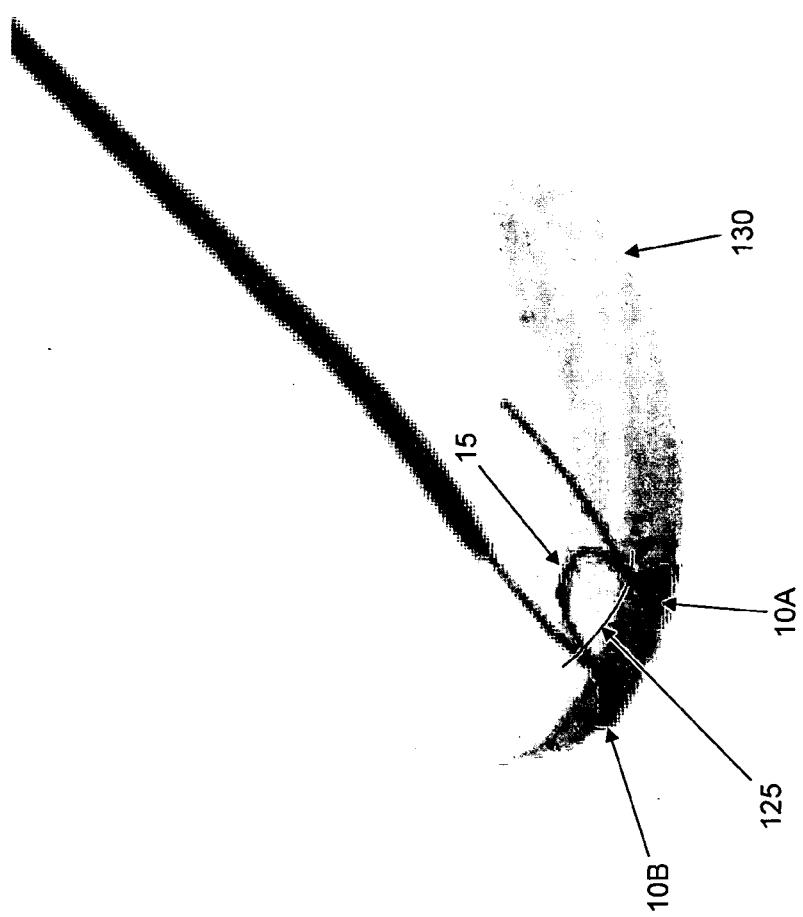


FIG. 18

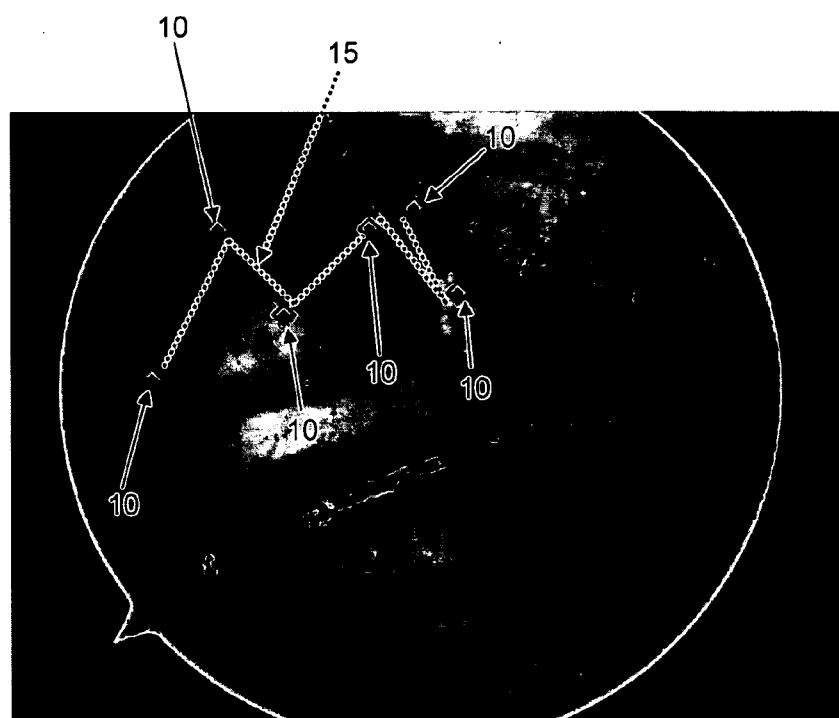


FIG. 19

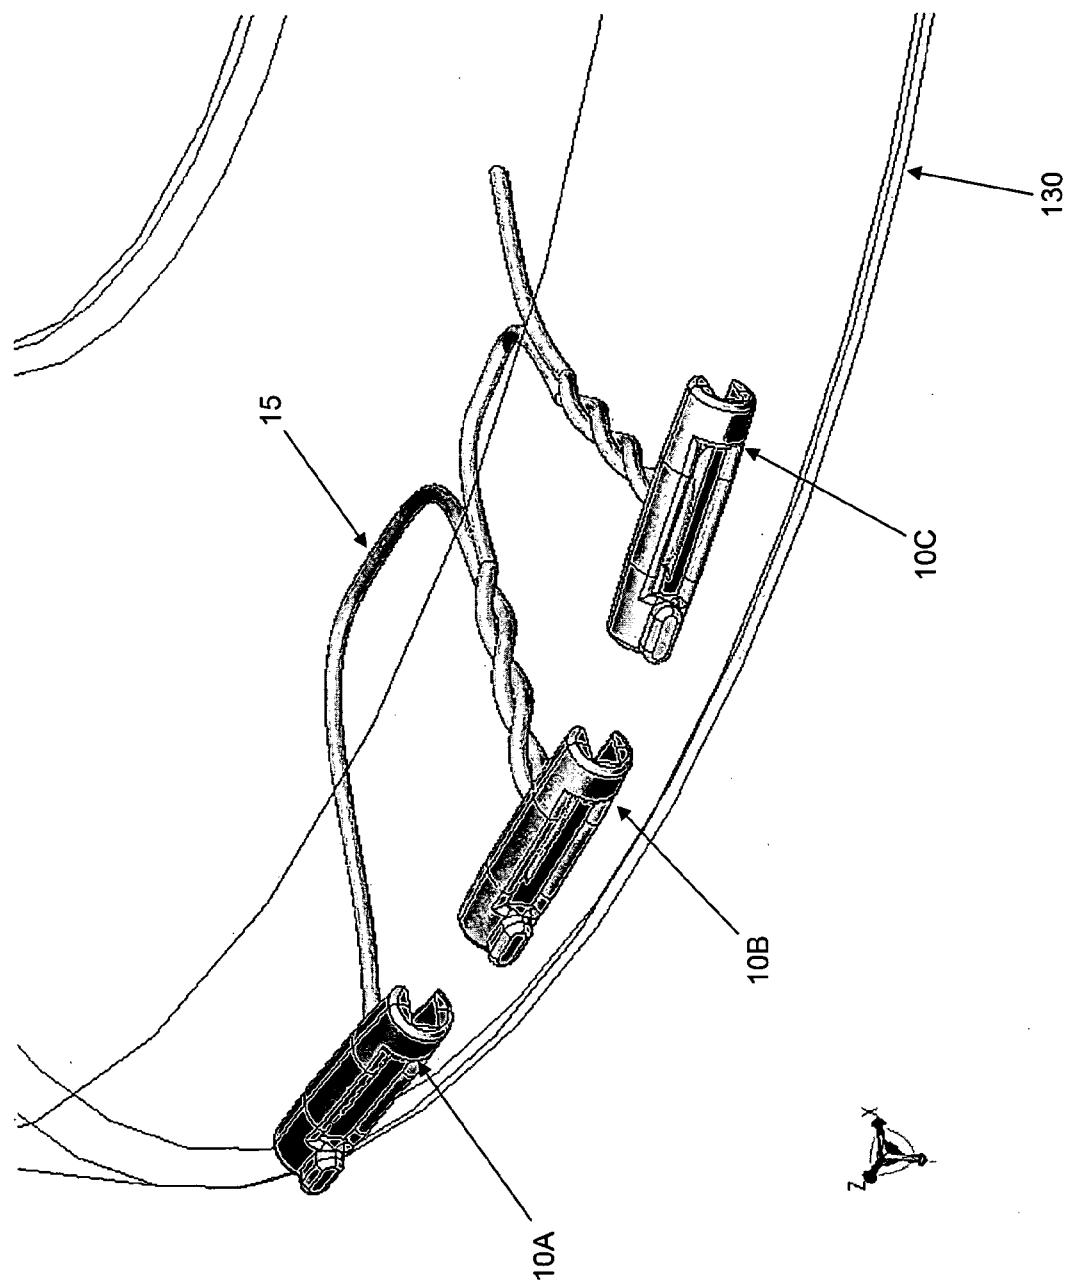


FIG. 20



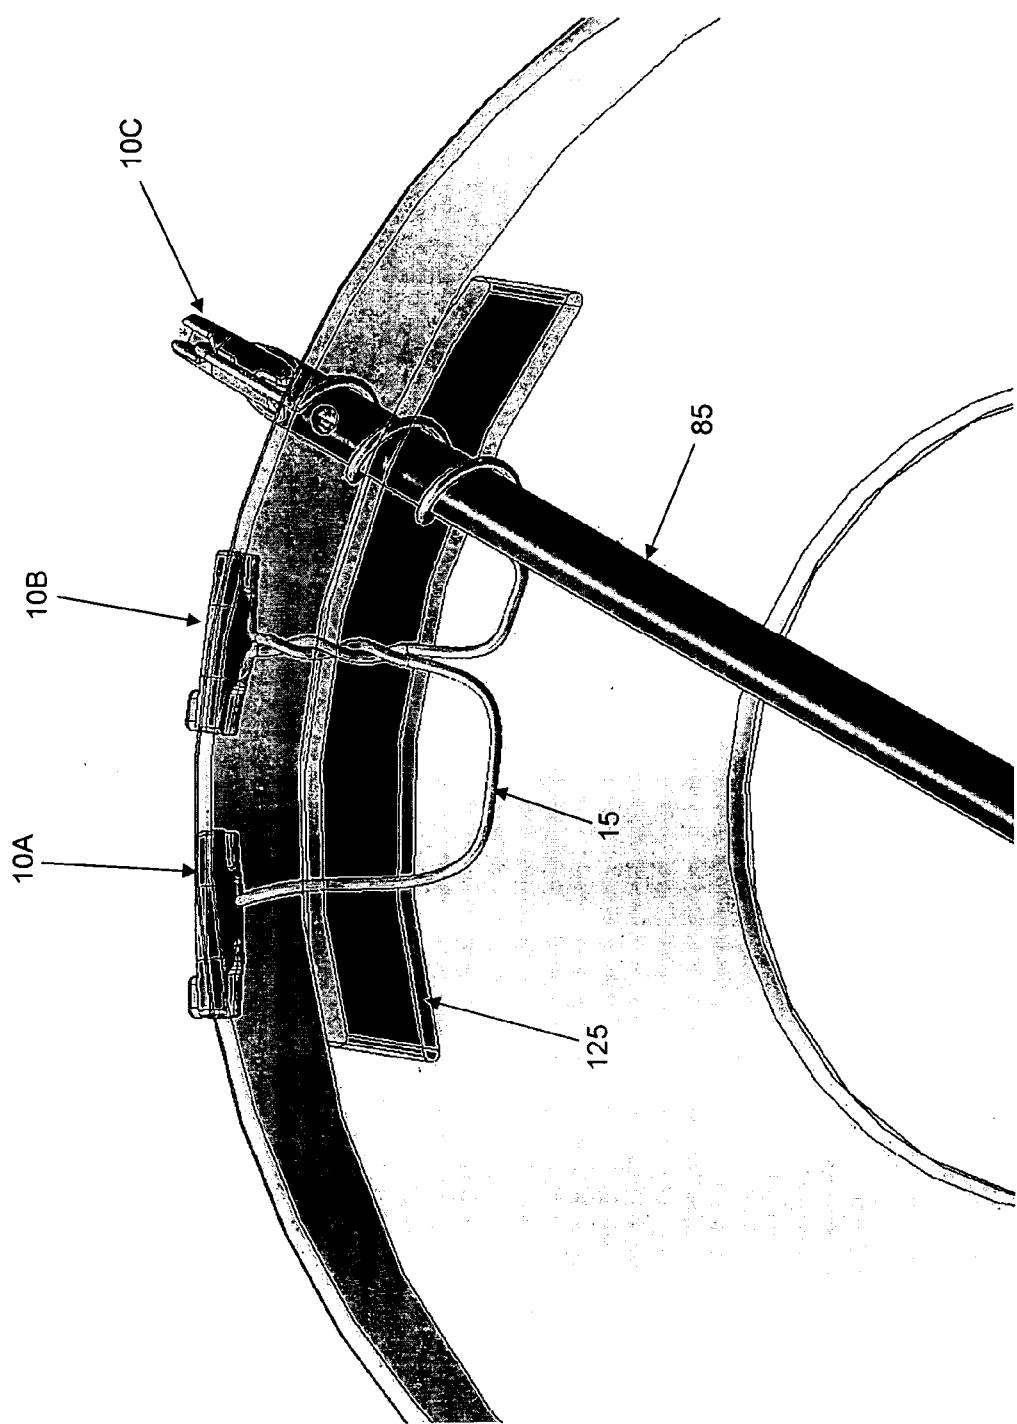


FIG. 21

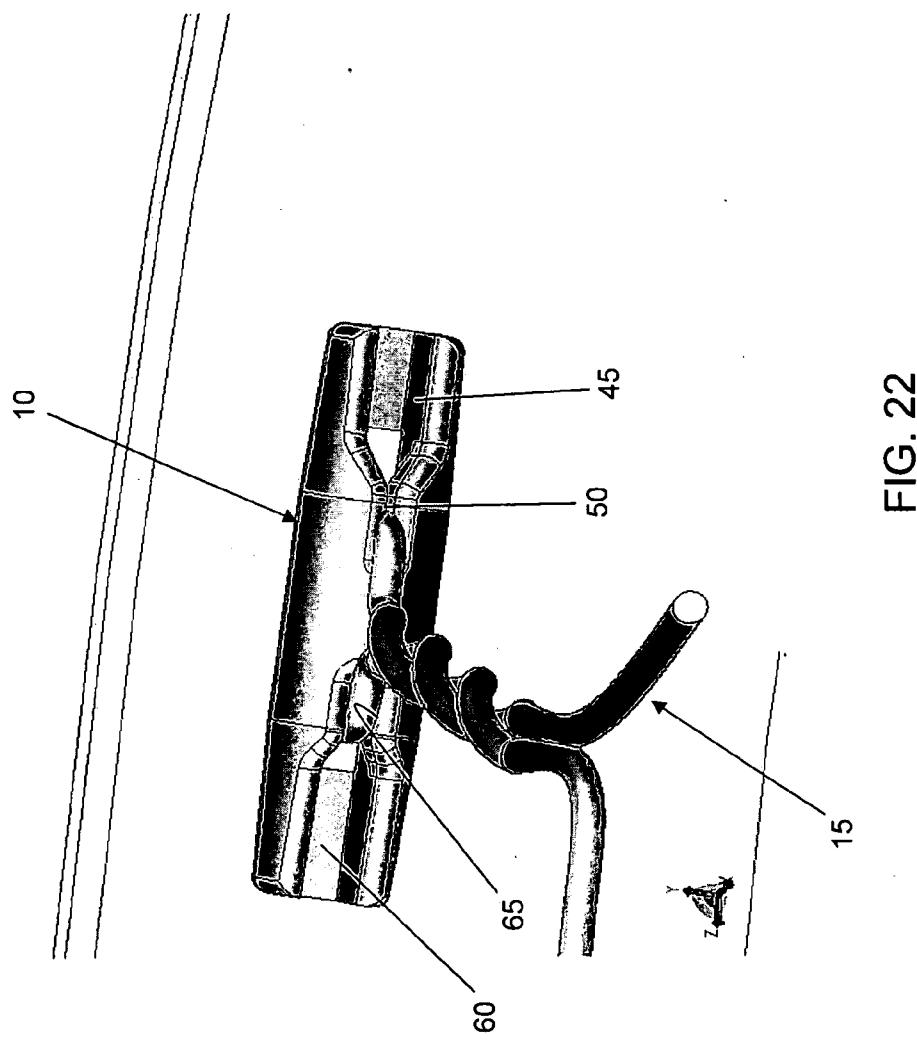

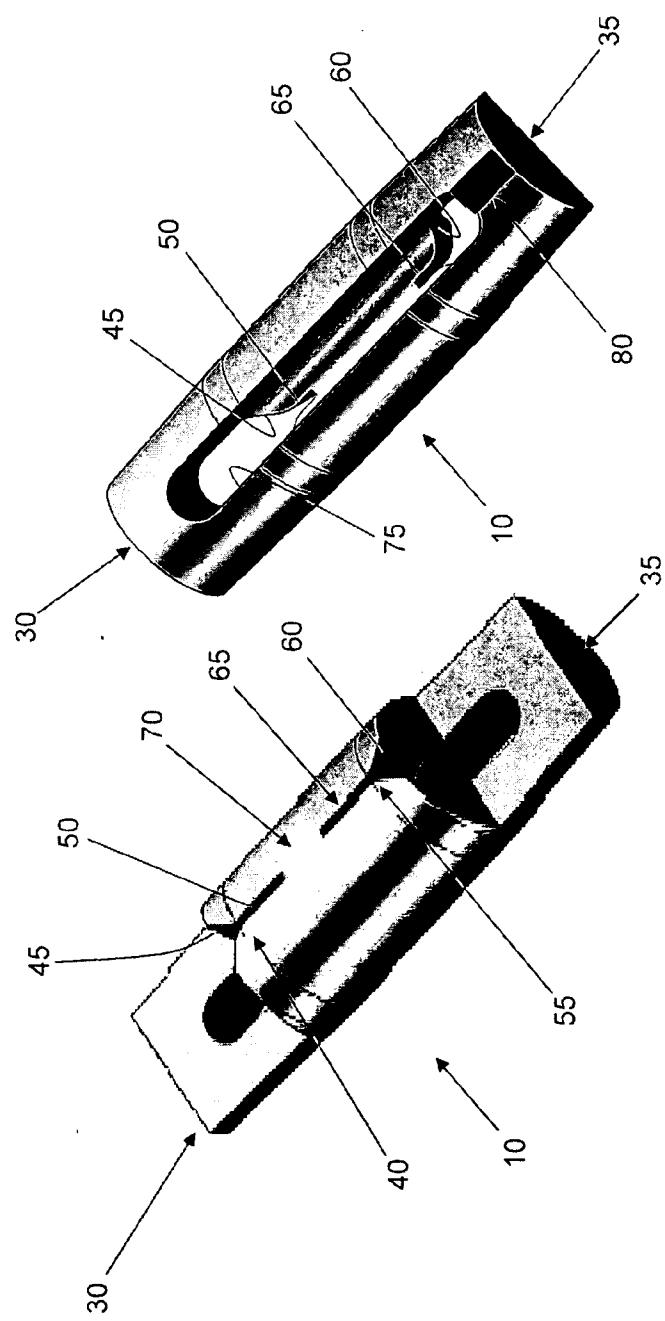

INTERNATIONAL SEARCH REPORT

International application No

PCT/US 09/39362

A CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61B 17/04 (2009.01)

USPC - 606/300

According to International Patent Classification (IPC) or to both national classification and IPC

B FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A61 B 17/04 (2009 01)

USPC - 606/300

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

A61B 17/84, A61 F 2/08,

128/898,899, 606/53,220,224,232,916

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST(USPT,PGPB,EPAB,JPAB), Google Scholar,

Search Terms Used suture anchor, driver, inserter, sharp, distal/proximal slot/groove/hole/channel, lock, motion, movement, slide, tensio

C DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
Y	US 2002/0161401 A1 (STEINER) 31 October 2002 (31 10 2002) Entire document, especially para[0034]-[0038] and FIGS 1, 5 & 6	1-26
Y	US 6,066,160 A (COLVIN et al) 23 May 2000 (23 05 2000) Entire document, especially Abstract, col 8, ln 32-57 and FIG 1	1-27
Y	US 2006/0265009 A1 (BONUTTI) 23 November 2006 (23 11 2006) Abstract, para[0042]-[0043], para[0052]-[0055], para[0087], para[0094], para[0098] and FIGS 14-16	15-25 and 27

D Further documents are listed in the continuation of Box C

* Special categories of cited documents	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
14 May 2009 (14 05 2009)

Date of mailing of the international search report

26 MAY 2009

Name and mailing address of the ISA/US
Mail Stop PCT, Attn ISA/US, Commissioner for Patents
P O Box 1450, Alexandria, Virginia 22313-1450
Facsimile No 571-273-3201

Authorized officer

Lee W Young

PCT Helpdesk 571-272-4300
PCT OSP 571-272-7774