




(86) Date de dépôt PCT/PCT Filing Date: 2001/01/10
(87) Date publication PCT/PCT Publication Date: 2001/07/19
(45) Date de délivrance/Issue Date: 2008/03/18
(85) Entrée phase nationale/National Entry: 2002/06/10
(86) N° demande PCT/PCT Application No.: BE 2001/000005
(87) N° publication PCT/PCT Publication No.: 2001/051735
(30) Priorité/Priority: 2000/01/13 (BE2000/0027)


(51) Cl.Int./Int.Cl. *E04G 23/02* (2006.01),
E04C 5/00 (2006.01), *E04C 5/07* (2006.01)
(72) Inventeur/Inventor:
DE NEEF, DIRK CHRISTIAAN JOZEF ISIDOR, BE
(73) Propriétaire/Owner:
IMMO EMERGO, NAAMLOZE VENNOOTSCHAP, BE
(74) Agent: ROBIC

(54) Titre : ARMATURE EXTERIEURE POUR POUTRES, COLONNES, DALLES, ETC.
(54) Title: EXTERNAL REINFORCEMENT FOR BEAMS, COLUMNS, PLATES AND THE LIKE

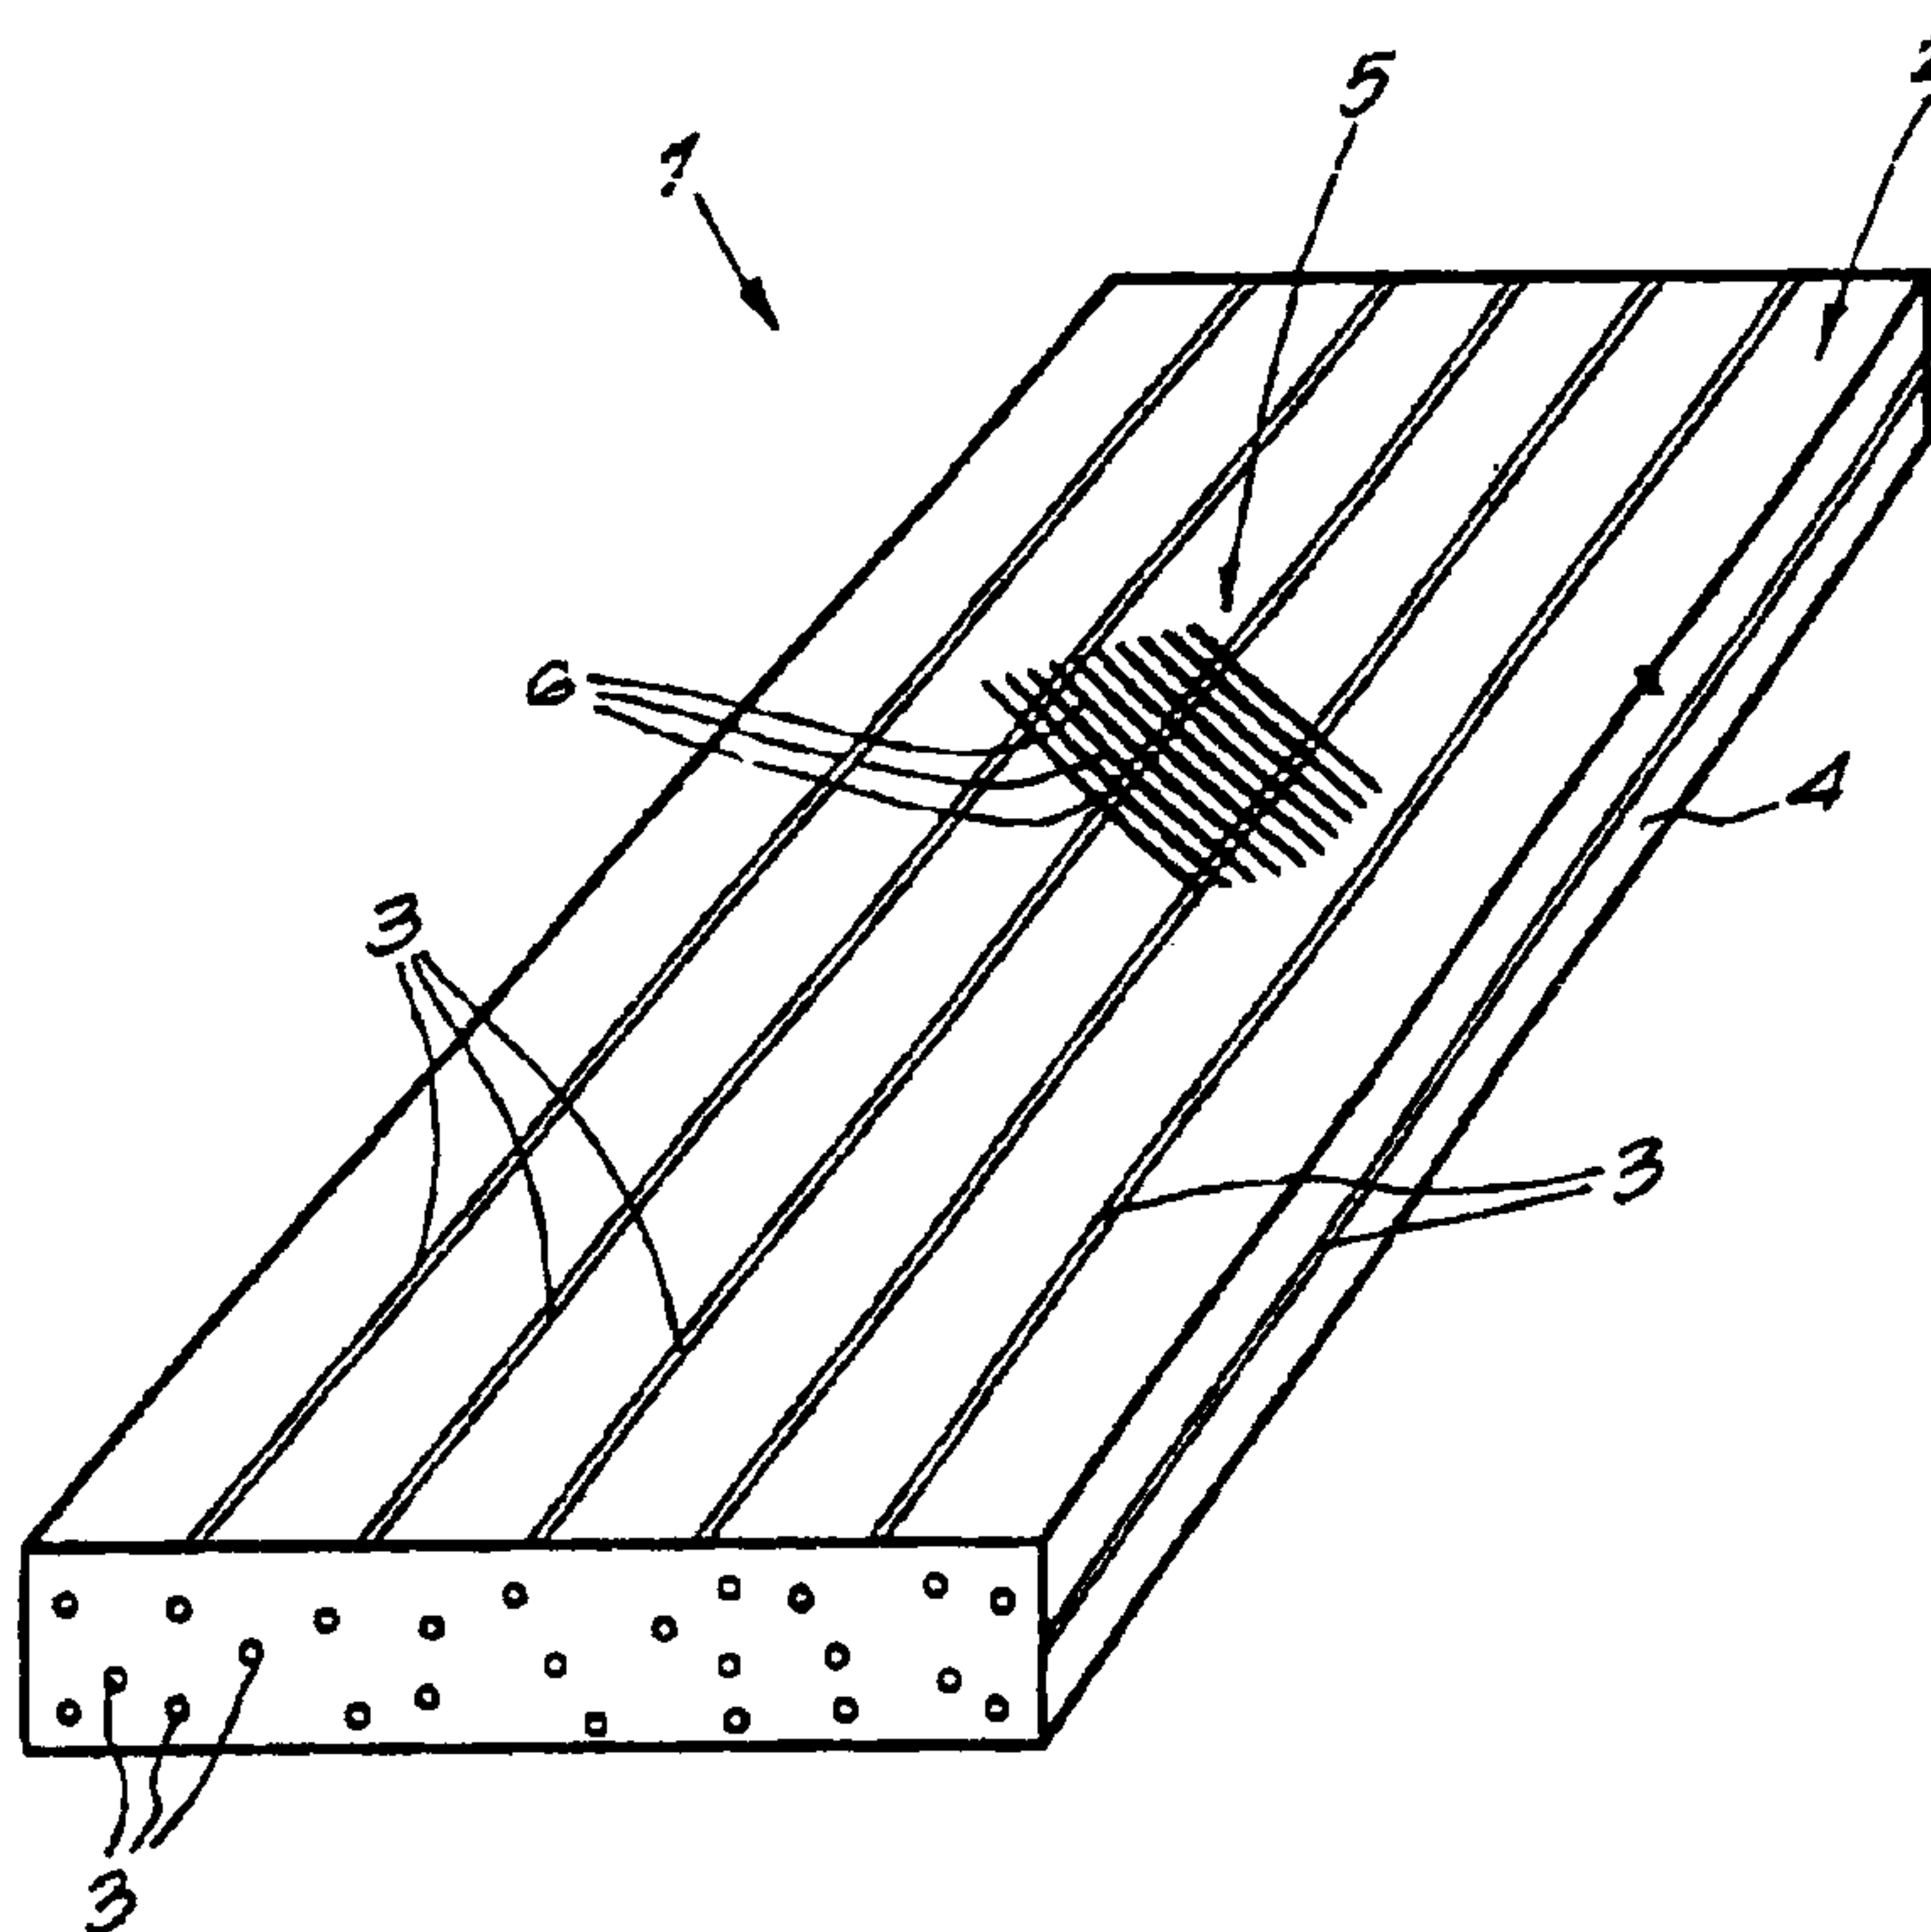

(57) Abrégé/Abstract:

The invention relates to an external reinforcement for beams, columns, plates and the like, substantially consisting in the combination of fibers and a resin and whereby the majority of the fibers is situated in the longitudinal direction of the reinforcement, characterized in that at least well-defined portions of the external reinforcement are provided with an additional reinforcement formed by fibers which are arranged according to at least one direction differing from the longitudinal direction of the reinforcement.

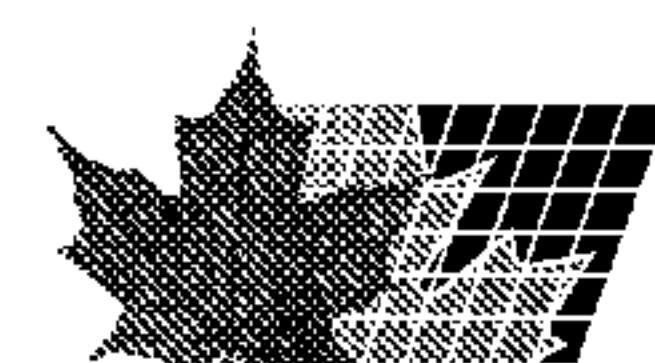

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number
WO 01/51735 A1

(51) International Patent Classification⁷: **E04G 23/02**

(21) International Application Number: PCT/BE01/00005

(22) International Filing Date: 10 January 2001 (10.01.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2000/0027 13 January 2000 (13.01.2000) BE

(71) Applicant (for all designated States except US): **IMMO EMERGO, NAAMLOZE VENNOOTSCHAP [BE/BE]**; Terbekehofdreef 50-52, B-2610 Wilrijk (BE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DE NEEF, Dirk, Christiaan, Jozef, Isidoor [BE/BE]**; Ferdinand Verbiestlaan 34, B-2650 Edegem (BE).

(74) Agent: **DONNÉ, Eddy**; Bureau M.F.J. Bockstael nv., Arenbergstraat 13, B-2000 Antwerpen (BE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EXTERNAL REINFORCEMENT FOR BEAMS, COLUMNS, PLATES AND THE LIKE

(57) Abstract: The invention relates to an external reinforcement for beams, columns, plates and the like, substantially consisting in the combination of fibers and a resin and whereby the majority of the fibers is situated in the longitudinal direction of the reinforcement, characterized in that at least well-defined portions of the external reinforcement are provided with an additional reinforcement formed by fibers which are arranged according to at least one direction differing from the longitudinal direction of the reinforcement.

WO 01/51735 A1

External reinforcement for beams, columns, plates and the like.

5 The present invention relates to an external reinforcement for beams, columns, plates and the like, more particularly a reinforcement which allows to increase the maximum permissible load of existing beams, columns or
10 the like, made of wood, concrete, metal or another material.

It is known that for reinforcing existing constructions, external reinforcements are provided which consist of, for example, a steel sheet, whereby this latter is
15 attached to such construction by means of glue, bolts or the like.

Such known external reinforcement, however, shows the disadvantage that, on one hand, it is very heavy and, on
20 the other hand, it is difficult to attach.

In order to eliminate said disadvantages, already an alternative external reinforcement has been proposed, which reinforcement consists of a plate formed of fibers,
25 such as, for example, carbon fibers, glass fibers or aramide fibers, which are embedded in a resin.

Up to the present, such reinforcement is provided in a continuous process, for example, by pultrusion.
30

By means of this known technique, it is in fact possible to realize an external reinforcement having a well-defined composition, a very large length, a constant width and thickness, and a smooth surface.
35

Although such external reinforcement is considerably less

heavy" and can be provided relatively easy in comparison to external reinforcements consisting of sheets, it shows the considerable disadvantage that all fibers are situated in the longitudinal direction of the plate-shaped reinforcement, such that such plates can take up forces only in their longitudinal direction.

In fact, the forces which in this case are exerted on the fibers are transferred to the surrounding fibers only by means of the resin.

Moreover, it is not possible to drill openings in such known reinforcing plates, in consideration of the fact that this would result in a local interruption of some fibers, such that also the forces exerted on the thus interrupted fibers can not be transferred on the surrounding fibers.

Another disadvantage of the known external reinforcements is that the surface thereof is very smooth as a result of the production method of such plates, as a result of which the adherence thereof on a construction to be reinforced is rather small, such that, in order to improve such adherence, this surface generally is treated with the intention of roughening it, for example, by sandblasting, scouring or treating it in another manner, which, however, is very labour-intensive. Moreover, the fibers may be damaged by such treatment, as a result of which the strength of the reinforcing plate is reduced.

The present invention thus has an external reinforcement as its object which excludes the aforementioned and other disadvantages of the known additional reinforcements and which has as its most important purpose to allow for a better adherence and connection between the external reinforcement and the column, beam or such to be

reinforced.

The invention also aims at such external reinforcement which can be realized thicker at the locations where the largest tensile and/or pressing forces occur.

According to the present description, there is provided an external reinforcement in the form of a massive prefabricated plate having a longitudinal direction, consisting in the combination of fibers and a resin wherein the fibers are embedded in the resin and whereby the majority of the fibers is situated in the longitudinal direction of the reinforcement, characterized in that well-defined portions of the external reinforcement are provided with an additional
10 reinforcement formed by fibers which are arranged according to a direction differing from the longitudinal direction of the reinforcement.

With the intention of better showing the characteristics of the invention, hereafter, as an example without any limitative character, a preferred form of embodiment of an external reinforcement for beams, columns, plates and such is described, with reference to the accompanying drawing that represents a schematic perspective view of an external reinforcement 1 according to the invention.

The external reinforcement 1 for beams columns, plates and the like is realized in the form of a massive prefabricated plate 2 with a longitudinal direction.

20 Said plate 2 consists in the combination of fibers 3 and a resin 4, whereby the fibers 3 are embedded in the resin 4 and whereby the majority of the fibers 3 is situated in the longitudinal direction of the reinforcement 1.

the aforementioned fibers 3 in the external reinforcement 1 may consist of glass fibers, carbon fibers, aramide fibers or natural fibres, such as hemp, flax, cocos, or a combination of such fibers, whereas the resin 4 preferably is an epoxy resin, a vinyl ester resin, a polyester resin or another suitable kind of resin.

According to the invention, a plate-shaped external reinforcement 1 will be realized whereby not only the majority of the fibers 3 is situated in the longitudinal direction of the external reinforcement 1, which also is the direction in which a tensile force will be exerted upon the external reinforcement 1, but moreover, according to the invention, an additional reinforcement is provided, at least in well-defined portions 5 of the external reinforcement 1, by adding fibers 6 which are situated in at least one direction other than the longitudinal direction of the external reinforcement 1.

10 In a particular form of embodiment that is not represented in the drawing, the thickness of the external reinforcement 1 may be variable in the longitudinal direction thereof in order to strengthen the reinforcement at the locations where the tensile and/or pressing forces are the largest, for example, in case of an external reinforcement 1 for a beam, in the middle of the length of the beam.

The fibers 6 in the aforementioned well-defined parts 5 are directed such that they cross each other, such that, when drilling through the external reinforcement 1, the tensile and/or pressing forces are transferred to other reinforcement fibers, which allows for a mechanical anchoring of the external reinforcement 1 to the material to be reinforced, by means of screws, bolts and such.

20 Moreover, locally a rough surface is obtained, which offers the important advantage that the adherence of the glue increases, as a result of which the reinforcement will take up the forces in a better way.

According to the invention, the external reinforcement 1 can take up forces which are not directed according to the longitudinal direction of the material to be reinforced.

Before being applied on site, the external reinforcement 1 can be provided at one or both sides with a fabric with poor adherence, which fabric, when removed, leaves an impression on the external reinforcement 1.

By removing this fabric before applying the external reinforcement 1, also a rough surface is obtained, such that additional treatments, such as sandblasting or scouring of the reinforcement, become redundant.

The aforementioned fabric with poor adherence moreover protects the external reinforcement 1 against pollution, such as fingerprints, dust and such, which might render the glueing of the external reinforcement 1 to the material to be reinforced difficult.

In a particular case, the external reinforcement 1 can be isotropic on well-defined locations.

As an external reinforcement 1 according to the invention, at least at the locations where it is attached by means of glue, bolts or such to a beam, column or such, is provided with additional fibers 6 which are directed otherwise than the longitudinal direction of the aforementioned majority of the fibers 3, it is obtained that the provision of openings in the reinforcement 1 for passing the aforementioned bolts remains without effect on the tensile or pressing strength of the longitudinally-directed fibers 3.

In fact, such openings can be provided in said external reinforcement beforehand or afterwards, for example, when manufacturing the reinforcement, more particularly by providing the fibers, previous to the hardening of the resin, in such a manner that they are arranged around the required openings.

The aforementioned fibers 6 which have to provide for the additional strengthening in the external reinforcement 1, can be formed by fabrics, warp-knit fabrics, mats, fleeces or such consisting of fibers 6 which are arranged at

least according to one direction which deviates from the longitudinal direction of the external reinforcement 1.

At the surface of the external reinforcement 1, furthermore a fleece, either electrically conducting or not, may be provided, such as, for example, a glassfiber fleece, a polyester fleece or such.

The present invention is in no way limited to the embodiment described in the foregoing and represented in the drawing, but such an external reinforcement for beams, columns and the like may be realized in a variety of forms and dimensions without leaving the scope of the invention.

WHAT IS CLAIMED IS:

1. External reinforcement in the form of a massive prefabricated plate having a longitudinal direction, consisting in the combination of fibers and a resin wherein the fibers are embedded in the resin and whereby the majority of the fibers is situated in the longitudinal direction of the reinforcement, characterized in that well-defined portions of the external reinforcement are provided with an additional reinforcement formed by fibers which are arranged according to a direction differing from the longitudinal direction of the reinforcement.
- 10 2. External reinforcement according to claim 1, characterized in that the thickness thereof is variable locally, depending on the tensile forces or pressing forces exerted thereupon.
3. External reinforcement according to claim 1, characterized in that at least a part of the fibers is formed by a fabric, a warp-knit fabric, mats or fleeces.
4. External reinforcement according to claim 1 or 3, characterized in that the fibers are formed at least partially by glass fibers, carbon fibers, aramide fibers, natural or synthetic fibers or a combination thereof.
5. External reinforcement according to any one of claims 1 to 4, characterized in that as a resin, epoxy resin, polyester resin, vinyl ester resin,
20 phenole resin, a mineral resin or a thermoplast is used.
6. External reinforcement according to any one of claims 1 to 5, characterized in that said external reinforcement has one or both sides provided, at least locally, with a fabric having an adherence allowing a removal of the fabric from said external reinforcement which, when removed, leaves an impression on the external reinforcement.

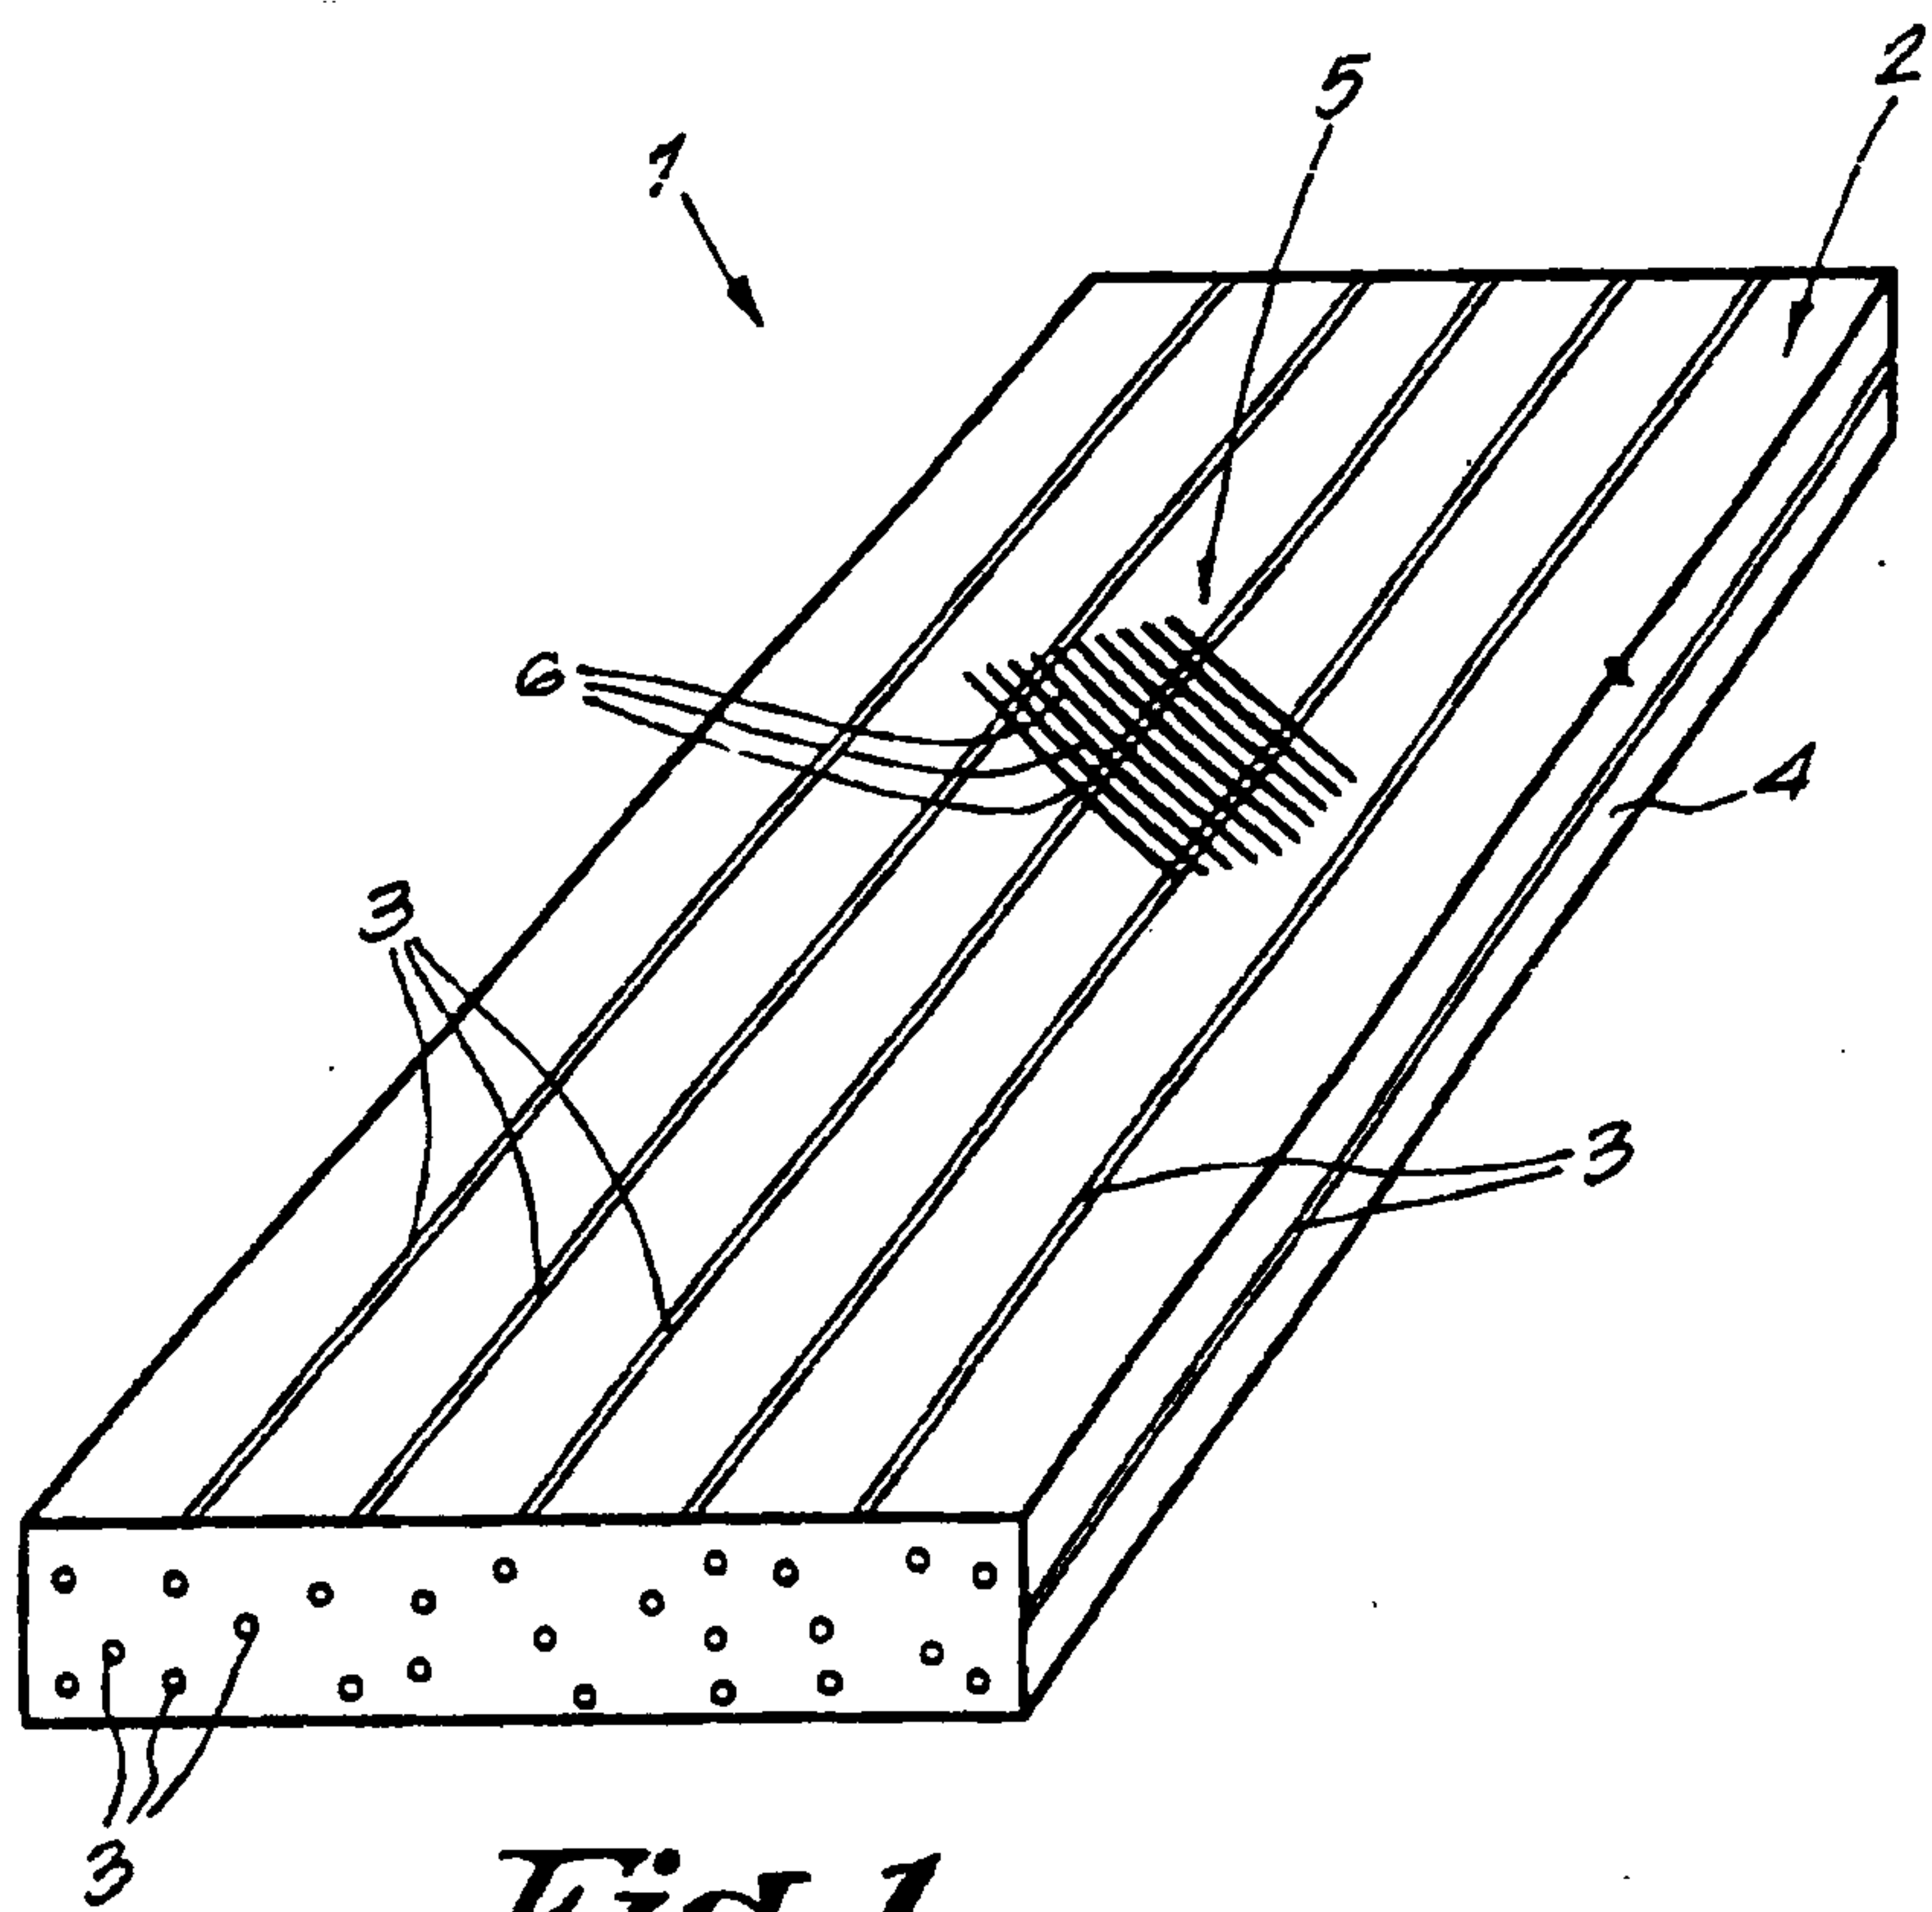


Fig. 1

