




(86) Date de dépôt PCT/PCT Filing Date: 2016/03/24  
 (87) Date publication PCT/PCT Publication Date: 2016/09/29  
 (45) Date de délivrance/Issue Date: 2022/01/11  
 (85) Entrée phase nationale/National Entry: 2017/09/19  
 (86) N° demande PCT/PCT Application No.: US 2016/023886  
 (87) N° publication PCT/PCT Publication No.: 2016/154373  
 (30) Priorité/Priority: 2015/03/24 (US14/667,026)

(51) Cl.Int./Int.Cl. *E21B 7/08* (2006.01),  
*E21B 7/06* (2006.01), *E21B 17/04* (2006.01)  
 (72) Inventeur/Inventor:  
PETERS, VOLKER, DE  
 (73) Propriétaire/Owner:  
BAKER HUGHES, A GE COMPANY, LLC, US  
 (74) Agent: MARKS & CLERK

(54) Titre : APPAREIL DE FORAGE DIRIGE A AUTOREGLAGE ET PROCESSES DE FORAGE DE PUIITS DEVIES  
 (54) Title: SELF-ADJUSTING DIRECTIONAL DRILLING APPARATUS AND METHODS FOR DRILLING DIRECTIONAL WELLS

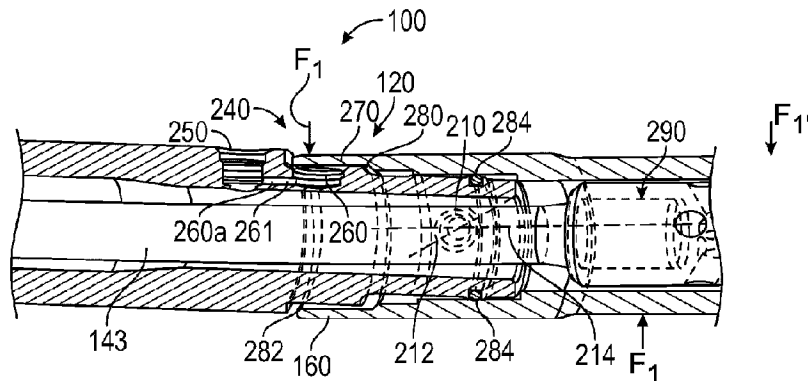

(57) **Abrégé/Abstract:**

An apparatus for drilling curved and straight sections of a wellbore is disclosed that in one non-limiting embodiment includes a drilling assembly configured to include a drill bit at an end thereof that can be rotated by a drive in the drilling assembly and by the rotation of the drilling assembly, and wherein the drilling assembly includes: a deflection device that (i) tilts a section of the drilling assembly within a selected plane when the drilling assembly is substantially rotationally stationary to allow drilling of a curved section of the wellbore by rotating the drill bit by the drive; and (ii) straightens the section of the drilling assembly when the drilling assembly is rotated to allow drilling of a straight section of the wellbore.



# SELF-ADJUSTING DIRECTIONAL DRILLING APPARATUS AND METHODS FOR DRILLING DIRECTIONAL WELLS

## **BACKGROUND**

### **1. Field of the Disclosure**

[0001] This disclosure relates generally to drilling directional wellbores.

### **2. Background of the Art**

[0002] Wellbores or wells (also referred to as boreholes) are drilled in subsurface formations for the production of hydrocarbons (oil and gas) using a drill string that includes a drilling assembly (commonly referred to as a “bottomhole assembly” or “BHA”) attached to a drill pipe bottom. A drill bit attached to the bottom of the drilling assembly is rotated by rotating the drill string from the surface and/or by a drive, such as a mud motor in the drilling assembly. A common method of drilling curved sections and straight sections of wellbores (directional drilling) utilizes a fixed bend AKO mud motor to provide a selected bend to the drill bit to form curved sections of wells. To drill a curved section, the drill string rotation from the surface is stopped, the bend of the AKO is directed into the desired build direction and the drill bit is rotated by the mud motor. Once the curved section is complete, the drilling assembly including the bend is rotated from the surface to drill a straight section. Such methods produce uneven boreholes. The borehole quality degrades as the bend is increased causing effects like spiraling of the borehole. Other negative borehole quality effects attributed to the rotation of bent assemblies include drilling of over-gauge boreholes, borehole breakouts, and weight transfer. Such apparatus and methods also induce high stress and vibrations on the mud motor components compared to drilling assemblies without an AKO and create high friction between the drilling assembly and the borehole due to the bend contacting the borehole as the drilling assembly rotates. Consequently, the maximum build rate is reduced by reducing the angle of the bend of the AKO to reduce the stresses on the mud motor and other components in the drilling assembly. Such methods result in additional time to drill the wellbore and thus may drive expenses far higher. Therefore, it is desirable to provide drilling assemblies and methods for drilling curved wellbore sections with a bend and straight sections without a bend in the drilling assembly to reduce stresses on the drilling assembly components.

## **SUMMARY**

**[0003]** The disclosure herein provides apparatus and methods for drilling wellbores, wherein the drilling assembly includes a deflection device that self-adjusts to provide a desired tilt for drilling curved sections and straightens itself when the drilling assembly is rotated for drilling straight wellbore sections.

**[0004]** In one aspect, an apparatus for drilling curved and straight sections of a wellbore is disclosed that in one non-limiting embodiment includes a drilling assembly configured to include a drill bit at an end thereof that can be rotated by a drive in the drilling assembly and by rotating the drilling assembly from a surface location, wherein the drilling assembly includes a deflection device that (i) tilts a section of the drilling assembly with respect to a selected axis or within selected plane when the drilling assembly is substantially stationary to allow drilling a curved section of the wellbore by rotating the drill bit by the drive; and (ii) straightens the lower section when the drilling assembly is rotated to allow drilling of a straight section of the wellbore.

**[0005]** In another aspect, a method of drilling a wellbore is disclosed that in one non-limiting embodiment includes: conveying a drilling assembly in the wellbore that includes a drive for rotating a drill bit, a deflection device that tilts the drilling assembly with respect to a selected axis or within a selected plane when the drilling assembly is substantially stationary and straightens the drilling assembly when the drilling assembly is rotated; maintaining the drilling assembly substantially stationary to enable the drilling assembly housing to tilt; applying a weight on the drill bit; and rotating the drill bit by the drive to drill a curved section of the wellbore

**[0005a]** In another aspect, an apparatus for drilling curved and straight sections of a wellbore, comprises: a drilling assembly configured to include a drill bit at an end thereof that is rotatable by a drive in the drilling assembly, the drilling assembly further configured to be connected to a drill pipe that is rotatable from a surface location, the drilling assembly comprising: a shaft, wherein the shaft is coupled to the drive and the drill bit; and a housing comprising: an upper section and a lower section; a bearing section in the lower section that rotatably couples the shaft to the lower section; and a pivot member between the upper section and the lower section that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore by rotating the drill bit using the drive, wherein the

shaft is disposed within the upper section, the lower section, the bearing section and the pivot member and configured to be rotated within the upper section, the lower section, the bearing section and the pivot member by the drive, and wherein rotating the drill pipe to rotate the drill bit causes a reduction of the tilt between the upper section and the lower section to allow drilling of a straighter section of the wellbore.

**[0005b]** In another aspect, a drilling assembly configured to be connected to a drill pipe and to include a drill bit at an end thereof and a drive for rotating the drill bit for drilling curved and straight sections of a wellbore, the drilling assembly comprising: a shaft, wherein the shaft is coupled to the drive and the drill bit; a housing comprising: an upper section and a lower section; a bearing section in the lower section that rotatably couples the shaft to the lower section; and a pivot member between the upper section and the lower section that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore, wherein the shaft is disposed within the upper section, the lower section, the bearing section, and the pivot member and configured to be rotated within the upper section, the lower section, the bearing section, and the pivot member by the drive, and wherein rotating the drill pipe to rotate the drill bit reduces the tilt between the upper section and the lower section to allow drilling of a straighter section of the wellbore; and a dampener that reduces a rate of the tilt.

**[0005c]** In another aspect, a method of drilling a wellbore, comprises: conveying a drilling assembly into the wellbore by a drill pipe from a surface location, the drilling assembly comprising: a drill bit at an end thereof that is rotatable by a drive in the drilling assembly; a shaft that couples the drive to the drill bit; and a housing comprising: an upper section and a lower section; a bearing section in the lower section that rotatably couples the shaft to the lower section; and a pivot member between the upper section and the lower section that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore, wherein the shaft is disposed within the upper section, the lower section, the bearing section, and the pivot member and configured to be rotated within the upper section, the lower section, the bearing section, and the pivot member by the drive, and wherein rotating the drill pipe to rotate the drill bit reduces the tilt between the upper

section and the lower section to allow drilling of a straighter section of the wellbore; maintaining the drill pipe rotationally stationary to enable the lower section to tilt relative to the upper section about the pivot member; and rotating the drill bit by the drive to drill the curved section of the wellbore.

**[0005d]** In another aspect, a drilling assembly configured to be rotated in a wellbore from a surface location by rotating a drill pipe coupled thereto, the drilling assembly comprising: a drive for rotating a drill bit; a shaft, the shaft being coupled to the drive and the drill bit; and a housing comprising: an upper section and a lower section; a bearing section in the lower section that rotatably couples the shaft to the lower section; and a pivot member that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore, wherein the shaft is disposed within the upper section, the lower section, the bearing section, and the pivot member, wherein the shaft is configured to be rotated within the upper section, the lower section, the bearing section, and the pivot member by the drive, and wherein rotating the drill pipe to rotate the drill bit reduces the tilt between the upper section and the lower section to allow drilling of a straighter section of the wellbore.

**[0006]** Examples of the more important features of a drilling apparatus have been summarized rather broadly in order that the detailed description thereof that follows may be better understood, and in order that the contributions to the art may be appreciated. There are additional features that will be described hereinafter and which will form the subject of the claims.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

[0007] For a detailed understanding of the apparatus and methods disclosed herein, reference should be made to the accompanying drawings and the detailed description thereof, wherein like elements are generally given same numerals and wherein:

**FIG. 1** shows a drilling assembly in a curved section of a wellbore that includes a deflection device or mechanism for drilling curved and straight sections of the wellbore, according to one non-limiting embodiment of the disclosure;

**FIG. 2** shows the deflection device of the drilling assembly of **FIG. 1** when the a lower section of the drilling assembly is tilted;

**FIG. 3** shows the deflection device of the drilling assembly of **FIG. 1** when the lower section of the drilling assembly is straight;

**FIG. 4** shows a non-limiting embodiment of a deflection device that includes a force application device that initiates the tilt in a drilling assembly, such as the drilling assembly shown in **FIG. 1**;

**FIG. 5** shows another non-limiting embodiment of a hydraulic deflection device that initiates the tilt in a drilling assembly, such as the drilling assembly shown in **FIG. 1**; and

**FIGS. 6A** and **6B** show certain details of a dampener, such as the dampener shown in **FIGS. 2-5** to reduce or control the rate of the tilt of the drilling assembly.

## **DETAILED DESCRIPTION OF THE DRAWINGS**

[0008] In aspects, the disclosure herein provides a drilling assembly or BHA that includes a deflection device that initiates a tilt to enable drilling of curved sections of wellbores and straightens itself to enable drilling of straight (vertical and tangent) sections of the wellbores. Such a drilling assembly prevents or reduces borehole spiraling, reduces friction between the drilling assembly and the wellbore during drilling of straight sections, reduces stress on components of the drilling assembly, such as a downhole drive (such as a mud motor), and also allows for easy positioning of the drilling assembly for directional drilling. Such a drilling assembly allows drilling of straight sections without a bend in the drilling assembly when the drilling assembly is rotated and allows drilling a curved section when the drilling assembly is stationary (not rotated) while the drill bit is rotated with the downhole drive. In aspects, such drilling is achieved by using a self-adjusting articulation joint to create a tilt in the drilling assembly when the drill string and thus the drilling assembly is stationary (not rotating) and using a dampener to maintain the drilling assembly straight when the drilling assembly is rotated. In other aspects a force application device,

such as a spring or a hydraulic device, may be utilized to initiate the tilt by applying a force into a hinged direction when the drilling assembly is not rotated.

**[0009]FIG. 1** shows a drilling assembly **100** in a curved section of a wellbore **101**. In a non-limiting embodiment, the drilling assembly **100** includes a deflection device (also referred herein as a flexible device or a deflection mechanism) **120** for drilling curved and straight sections of the wellbore **101**. The drilling assembly **100** further includes a downhole drive or drive, such as a mud motor **140** having a stator **141** and rotor **142**. The rotor **142** is coupled to a transmission, such as a flexible shaft **143** that is coupled to another shaft **146** disposed in a bearing assembly **145**. The shaft **146** is coupled to a drill bit **147**. The drilling assembly **100** further includes a drill bit **147** that rotates when the rotor **142** of the mud motor **140** rotates due to circulation of a drilling fluid, such as mud, during drilling operations. The drilling assembly **100** is connected to a drill pipe **148**, which is rotated from the surface to rotate the drilling assembly **100** and thus the drill bit **147**. In the particular drilling assembly configuration shown in **FIG. 1**, the drill bit **147** may be rotated by rotating the drill pipe **148** and thus the drilling assembly **100** and/or the mud motor **140**. The rotor **142** rotates the drill bit **147** when a fluid is circulated through the drilling assembly **100**. The drilling assembly **100** further includes a deflection device **120**. While in **FIG. 1** the deflection device **120** is shown below the mud motor **140** (drive) and coupled to a lower section, such as housing or tubular **160** disposed over the bearing section **145**, the deflection device **120** may also be located above the drive **140**. In various embodiments of the deflection device **120** disclosed herein, the housing **160** tilts a selected amount along a selected plane to tilt the drill bit **147** along the selected plane to allow drilling of curved borehole sections. As described later in reference to **FIGS. 2-6**, the tilt is initiated when the drilling assembly **120** is stationary (not rotating) or substantially rotationally stationary. The curved section is then drilled by rotating the drill bit by the mud motor **140** without rotating the drilling assembly **120**. The lower section **160** straightens when the drilling assembly is rotated, which allows drilling of straight wellbore sections. Thus, in aspects, the deflection device **120** provides a selected tilt in the drilling assembly **100** that allows drilling of curved sections when the drill pipe **148** and thus the drilling assembly is substantially rotationally stationary and the drill bit **147** is rotated by the drive **140**. However when the drilling assembly **100** is rotated, such as by rotating the drill pipe **148** from the surface, the tilt straightens and allows drilling of straight borehole sections, as described in more detail in reference to **FIGS. 2-6**. In one embodiment, a stabilizer **150** is provided below the flexible device **120** (between the flexible device **120** and the drill bit **147**) that initiates a bending moment in the deflection device **120** and also maintains the tilt when

the drilling assembly **100** is not rotated and a weight on the drill bit is applied during drilling of the curved borehole sections. In another embodiment a stabilizer **152** may be provided above the deflection device **120** in addition to or without the stabilizer **150** to initiate the bending moment in the deflection device **120** and to maintain the tilt during drilling of curved borehole sections. In other embodiments, more than one stabilizer may be provided above and/or below the deflection device **120**. Modeling may be performed to determine the location and number of stabilizers for optimum operation.

[0010]FIG. 2 shows a non-limiting embodiment of a deflection device **120** for use in a drilling assembly, such as the drilling assembly **100** shown in FIG. 1. Referring to FIGS. 1 and 2, in one non-limiting embodiment, the deflection device **120** includes a pivot member, such as a pin **210** having an axis **212** perpendicular to the longitudinal axis **214** of the drilling assembly **100**, about which the housing **270** of a lower section **290** of the drilling assembly **100** tilts or inclines a selected amount relatively to the transmission **143** about the plane defined by the axis **212**. The housing **270** tilts between a straight end stop **282** and an inclined end stop **280** that defines the maximum tilt. When the housing **270** of the lower section **290** is tilted in the opposite direction, the straight end stop **282** defines the straight position of the drilling assembly **100**, where the tilt is zero. In such an embodiment, the housing **270** tilts only along a particular plane or radial direction. One or more seals, such as seal **284**, is provided between the inside of the housing **270** and another member the drilling assembly **100** to seal the inside section of the housing **270** below the seal **284** from the outside environment, such as the drilling fluid.

[0011]Still referring to FIGS. 1 and 2, when a weight on the bit **147** is applied while the drill pipe **148** is substantially rotationally stationary, it will initiate a tilt of the housing **270** about the pin axis **212** of the pin **210**. The stabilizer **150** below the flexible device **120** initiates a bending moment in the deflection device **120** and also maintains the tilt when the drill pipe **148** and thus the drilling assembly **120** is substantially rotationally stationary (not rotating) and a weight on the drill bit **147** is applied during drilling of the curved borehole sections. Similarly, stabilizer **152** in addition to or without the stabilizer **150** also initiates the bending moment in the deflection device **120** and maintains the tilt during drilling of curved borehole sections. In one non-limiting embodiment, a dampening device or dampener **240** may be provided to reduce or control the rate of increase of the tilt when the drilling assembly **100** is rotated. In one non-limiting embodiment, the dampener **240** may include a piston **260** and a compensator **250** in fluid communication with the piston **260** via a line **260a** to reduce or control the rate of the tilt. Applying a force **F1** on the housing **270** will cause the

housing **270** and thus the lower section **290** to tilt about the pin axis **212**. Applying a force **F1'** opposite to the direction of force **F1** on the housing **270** causes the housing **270** and thus the drilling assembly **100** to straighten. The dampener may also be used to stabilize the straightened position of the housing **270** during rotation of the drilling assembly **100** from the surface. The operation of the dampening device **240** is described in more detail in reference to **FIGS. 6A** and **6B**. Any other suitable device, however, may be utilized to reduce or control the rate of the bend of the drilling assembly **100** about the pin **210**.

[0012]Referring now to **FIGS. 1-3**, when the drill pipe **148** is substantially rotationally stationary (not rotating) and a weight is applied on the drill bit **147**, the deflection device will initiate a tilt of the drilling assembly **100** at the pivot **210** about the pivot axis **212**. The rotating of the drill bit **147** by the downhole drive **140** will cause the drill bit **147** to initiate drilling of a curved section. As the drilling continues, the continuous weight applied on the drill bit **147** will continue to increase the tilt until the tilt reaches the maximum value defined by the inclined end stop **280**. Thus, in one aspect, a curved section may be drilled by including the pivot **210** in the drilling assembly **100** with a tilt defined by the inclined end stop **280**. If the dampening device **240** is included in the drilling assembly **100** as shown in **FIG. 2**, tilting the drilling assembly **100** about the pivot **210** will cause the housing **270** in section **290** to apply a force **F1** on the piston **260**, causing a fluid **261**, such as oil, to transfer from the piston **260** to the compensator **250** via a conduit or path **260a**. The flow of the fluid **261** from the piston **260** to the compensator **250** may be restricted to reduce or control the rate of increase of the tilt and avoid sudden tilting of the lower section **290**, as described in more detail in reference to **FIGS. 6A** and **6B**. In the particular illustrations of **FIGS. 1** and **2**, the drill bit **147** will drill a curved section upward. To drill a straight section after drilling the curved section, the drilling assembly **100** may be rotated **180** degrees to remove the tilt and then later rotated from the surface to drill the straight section. However, when the drilling assembly **100** is rotated, based on the positions of the stabilizers **150** and/or **152** and the well path, bending forces in the wellbore act on the housing **270** and exert forces in opposite direction to the direction of force **F1**, thereby straightening the housing **270** and thus the drilling assembly **100**, which allows the fluid **161** to flow from the compensator **250** to the piston **260** causing the piston to move outwards. Such fluid flow may not be restricted, which allows the housing **270** and thus the lower section **290** to straighten rapidly (without substantial delay). The outward movement of the piston **260** may be supported by a spring either positioned in force communication with the piston **260** or the compensator **250**. The straight end stop **282** restricts the movement of the member **270**, causing the lower section

**290** to remain straight as long as the drilling assembly **100** is being rotated. Thus, the embodiment of the drilling assembly **100** shown in **FIGS. 1** and **2** provides a self-initiating tilt when the drilling assembly **120** is stationary (not rotated) or substantially stationary and straightens itself when the drilling assembly **100** is rotated. Although the downhole drive **140** shown in **FIG. 1** is shown to be a mud motor, any other suitable drive may be utilized to rotate the drill bit **147**. **FIG. 3** shows the drilling assembly **100** in the straight position, wherein the housing **270** rests against the straight end stop **282**.

**[0013]****FIG. 4** shows another non-limiting embodiment of a deflection device **420** that includes a force application device, such as a spring **450**, that continually exerts a radially outward force **F2** on the housing **270** of the lower section **290** to provide or initiate a tilt to the lower section **290**. In one embodiment, the spring **450** may be placed between the inside of the housing **270** and a housing **470** outside the transmission **143**. In this embodiment, the spring **450** causes the housing **270** to tilt radially outward about the pivot **210** up to the maximum bend defined by the inclined end stop **280**. When the drilling assembly **100** is stationary (not rotating) or substantially rotationally stationary, a weight on the drill bit **147** is applied and the drill bit is rotated by the downhole drive **140**, the drill bit **147** will initiate the drilling of a curved section. As drilling continues, the tilt increases to its maximum level defined by the inclined end stop **280**. To drill a straight section, the drilling assembly **100** is rotated from the surface, which causes the borehole to apply force **F3** on the housing **270**, compressing the spring **450** to straighten the drilling assembly **100**. When the spring **450** is compressed by application of force **F3**, the housing **270** relieves pressure on the piston **260**, which allows the fluid **261** from the compensator **250** to flow back to piston **260** without substantial delay as described in more detail in reference to **FIGS. 6A** and **6B**.

**[0014]****FIG. 5** shows a non-limiting embodiment of a hydraulic force application device **540** to initiate a selected tilt in the drilling assembly **100**. In one non-limiting embodiment, the device **540** includes a piston **560** and a compensation device or compensator **550**. The drilling assembly **100** also may include a dampening device or dampener, such as dampener **240** shown in **FIG. 2**. The dampening device **240** includes a piston **260** and a compensator **250** shown and described in reference to **FIG. 2**. The device **540** may be placed 180 degrees from device **240**. The piston **560** and compensator **550** are in hydraulic communication with each other. During drilling, a fluid **512a**, such as drilling mud, flows under pressure through the drilling assembly **100** and returns to the surface via an annulus between the drilling assembly **100** and the wellbore as shown by fluid **512b**. The pressure **P1** of the fluid **512a** in the drilling assembly **100** is greater (typically 20-50 bars) than the

pressure **P2** of the fluid **512b** in the annulus. When fluid **512a** flows through the drilling assembly **100**, pressure **P1** acts on the compensator **550** and correspondingly on the piston **560** while pressure **P2** acts on compensator **250** and correspondingly on piston **260**. Pressure **P1** being greater than pressure **P2** creates a differential pressure ( $P1 - P2$ ) across the piston **560**, which pressure differential is sufficient to cause the piston **560** to move radially outward, which pushes the housing **270** outward to initiate a tilt. A restrictor **562** may be provided in the compensator **550** to reduce or control the rate of the tilt as described in more detail in reference to **FIGS. 6A** and **6B**. Thus, when the drill pipe **148** is substantially rotationally stationary (not rotating), the piston **560** slowly bleeds the hydraulic fluid **561** through the restrictor **562** until the full tilt angle is achieved. The restrictor **562** may be selected to create a high flow resistance to prevent rapid piston movement which may be present during tool face fluctuations of the drilling assembly to stabilize the tilt. The differential pressure piston force is always present during circulation of the mud and the restrictor **562** limits the rate of the tilt. When the drilling assembly **100** is rotated, bending moments on the housing **270** force the piston **560** to retract, which straightens the drilling assembly **100** and then maintains it straight as long as the drilling assembly **100** is rotated. The dampening rate of the dampening device **240** may be set to a higher value than the rate of the device **540** in order to stabilize the straightened position during rotation of the drilling assembly **100**.

[0015]**FIGS. 6A** and **6B** show certain details of the dampening device **600**, which is the same as device **240** in **FIGS. 2, 4** and **5**. Referring to **FIG. 2** and **FIGS. 6A** and **6B**, when the housing **270** applies force **F1** on the piston **660**, it moves a hydraulic fluid (such as oil) from a chamber **662** associated with the piston **660** to a chamber **652** associated with a compensator **620**, as shown by arrow **610**. A restrictor **611** restricts the flow of the fluid from the chamber **662** to chamber **652**, which increases the pressure between the piston **660** and the restrictor **611**, thereby restricting or controlling the rate of the tilt. As the hydraulic fluid flow continues through the restrictor **611**, the tilt continues to increase to the maximum level defined by the end inclination stop **280** shown and described in reference to **FIG. 2**. Thus, the restrictor **611** defines the rate of increase of the tilt. Referring to **FIG. 6B**, when force **F1** is released from the housing **270**, as shown by arrow **F4**, force **F5** on compensator **620** moves the fluid from chamber **652** back to the chamber **662** of piston **660** via a check valve **612**, bypassing the restrictor **611**, which enables the housing **270** to move to its straight position without substantial delay. A pressure relief valve **613** may be provided as a safety feature to avoid excessive pressure beyond the design specification of hydraulic elements.

[0016] Thus, in aspects, the drilling assemblies described herein include a deflection device that: (1) provides a tilt when the drilling assembly is not rotated and the drill bit is rotated by a downhole drive, such as a mud motor, to allow drilling of curved or articulated borehole sections; and (2) the tilt automatically straightens when the drilling assembly is rotated to allow drilling of straight borehole sections. In one non-limiting embodiment, a mechanical force application device may be provided to initiate the tilt. In another non-limiting embodiment a hydraulic device may be provided to initiate the tilt. A dampening device may be provided to aid in maintaining the tilt straight when the drilling assembly is rotated. A dampening device may also be provided to support the articulated position of the drilling assembly when rapid forces are exerted onto the tilt such as during tool face fluctuations. Additionally, a restrictor may be provided to reduce or control the rate of the tilt. Thus, in various aspects, the drilling assembly automatically articulates into a tilted or hinged position when the drilling assembly is not rotated and automatically attains a straight or substantially straight position when the drilling assembly is rotated. For the purpose of this disclosure, substantially rotationally stationary generally means the drilling assembly is not rotated by rotating the drill string 148 from the surface. The phrase “substantially rotationally stationary” and the term stationary are considered equivalent. Also, a “straight” section is intended to include a “substantially straight” section.

[0017] The foregoing disclosure is directed to the certain exemplary embodiments and methods. Various modifications will be apparent to those skilled in the art. It is intended that all such modifications within the scope of the appended claims be embraced by the foregoing disclosure. The words "comprising" and "comprises" as used in the claims are to be interpreted to mean "including but not limited to".

**What is claimed is:**

1. An apparatus for drilling curved and straight sections of a wellbore, comprising:

a drilling assembly configured to include a drill bit at an end thereof that is rotatable by a drive in the drilling assembly, the drilling assembly further configured to be connected to a drill pipe that is rotatable from a surface location, the drilling assembly comprising:

a shaft, wherein the shaft is coupled to the drive and the drill bit; and

a housing comprising:

an upper section and a lower section;

a bearing section in the lower section that rotatably couples the shaft to the lower section; and

a pivot member between the upper section and the lower section that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore by rotating the drill bit using the drive,

wherein the shaft is disposed within the upper section, the lower section, the bearing section and the pivot member and configured to be rotated within the upper section, the lower section, the bearing section and the pivot member by the drive, and

wherein rotating the drill pipe to rotate the drill bit causes a reduction of the tilt between the upper section and the lower section to allow drilling of a straighter section of the wellbore.

2. The apparatus of claim 1, further comprising an end stop that limits the tilt to a selected angle.

3. The apparatus of claim 1 or 2, wherein the lower section tilts about the pivot member within a selected plane.

4. The apparatus of claim 3, wherein the pivot member is one of a pin and a ball joint.
5. The apparatus of any one of claims 1 to 4, further comprising a force application device configured to initiate the tilt.
6. The apparatus of claim 5, wherein the force application device is selected from a group consisting of: (i) a spring that applies a force on the lower section; and (ii) a hydraulic device that applies a force on the lower section in response to a pressure differential.
7. The apparatus of any one of claims 1 to 6, wherein the pivot member has a pivot axis located off a longitudinal axis of the drilling assembly to initiate the tilt when an axial load is applied on the drilling assembly.
8. The apparatus of any one of claims 1 to 7, further comprising a dampener for reducing a rate of the tilt.
9. The apparatus of claim 8, wherein the dampener reduces variation of the tilt when the drill pipe is rotationally stationary.
10. The apparatus of any one of claims 1 to 9, wherein the drilling assembly further comprises at least one stabilizer that is one of: (i) below the pivot member; (ii) above the pivot member; and (iii) below the pivot member and above the pivot member.
11. A drilling assembly configured to be connected to a drill pipe and to include a drill bit at an end thereof and a drive for rotating the drill bit for drilling curved and straight sections of a wellbore, the drilling assembly comprising:
  - a shaft, wherein the shaft is coupled to the drive and the drill bit;
  - a housing comprising:
    - an upper section and a lower section;
    - a bearing section in the lower section that rotatably couples the shaft to the lower section; and

a pivot member between the upper section and the lower section that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore,

wherein the shaft is disposed within the upper section, the lower section, the bearing section, and the pivot member and configured to be rotated within the upper section, the lower section, the bearing section, and the pivot member by the drive, and

wherein rotating the drill pipe to rotate the drill bit reduces the tilt between the upper section and the lower section to allow drilling of a straighter section of the wellbore; and

a dampener that reduces a rate of the tilt.

12. The drilling assembly of claim 11 further comprising a force application device that exerts a force on the lower section to initiate the tilt.

13. The drilling assembly of claim 11 or 12 further comprising a stabilizer that aids in initiating the tilt when the drill pipe is rotationally stationary and the drill bit is rotated by the drive.

14. A method of drilling a wellbore, comprising:  
conveying a drilling assembly into the wellbore by a drill pipe from a surface location, the drilling assembly comprising:

a drill bit at an end thereof that is rotatable by a drive in the drilling assembly;

a shaft that couples the drive to the drill bit; and

a housing comprising:

an upper section and a lower section;

a bearing section in the lower section that rotatably couples the shaft to the lower section; and

a pivot member between the upper section and the lower section that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when

the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore,

wherein the shaft is disposed within the upper section, the lower section, the bearing section, and the pivot member and configured to be rotated within the upper section, the lower section, the bearing section, and the pivot member by the drive, and

wherein rotating the drill pipe to rotate the drill bit reduces the tilt between the upper section and the lower section to allow drilling of a straighter section of the wellbore;

maintaining the drill pipe rotationally stationary to enable the lower section to tilt relative to the upper section about the pivot member; and rotating the drill bit by the drive to drill the curved section of the wellbore.

15. The method of claim 14 further comprising:  
rotating the drill pipe to reduce the tilt; and  
drilling the straighter section of the wellbore by applying weight on the drill bit.
16. The method of claim 14 or 15 further comprising:  
limiting the tilt to a selected angle during drilling of the curved section via an end stop.
17. The method of any one of claims 14 to 16 further comprising:  
providing a damper that reduces the rate of the tilt when the drill pipe is rotationally stationary.
18. The method of any one of claims 14 to 17 further comprising:  
applying a force via a force application device on the lower section to initiate the tilt when the drill pipe is rotationally stationary.
19. The method of claim 18, wherein the force application device is selected from a group consisting of: (i) a spring that applies a force on the lower section; and (ii) a hydraulic device that applies a force on the lower section in response to a pressure difference.

20. The method of any one of claims 14 to 19 further comprising providing at least one stabilizer that is one of: (i) below the pivot member; (ii) above the pivot member; and (iii) below the pivot member and above the pivot member.

21. The method of any one of claims 14 to 20 wherein the pivot member allows the lower section to tilt within a selected plane.

22. A drilling assembly configured to be rotated in a wellbore from a surface location by rotating a drill pipe coupled thereto, the drilling assembly comprising:

a drive for rotating a drill bit;

a shaft, the shaft being coupled to the drive and the drill bit; and

a housing comprising:

an upper section and a lower section;

a bearing section in the lower section that rotatably couples the shaft to the lower section; and

a pivot member that couples the upper section to the lower section, wherein the lower section tilts relative to the upper section about the pivot member when the drill pipe is rotationally stationary to allow drilling of a curved section of the wellbore,

wherein the shaft is disposed within the upper section, the lower section, the bearing section, and the pivot member,

wherein the shaft is configured to be rotated within the upper section, the lower section, the bearing section, and the pivot member by the drive, and

wherein rotating the drill pipe to rotate the drill bit reduces the tilt between the upper section and the lower section to allow drilling of a straighter section of the wellbore.

23. The drilling assembly of claim 22, wherein the lower section tilts about the pivot member within a selected plane.

24. The drilling assembly of claim 23, wherein the pivot member is one of a pin and a ball joint.

25. The drilling assembly of claim 22, wherein the pivot member has a pivot axis located off a longitudinal axis of the drilling assembly to initiate the tilt when an axial load is applied on the drilling assembly.

26. The drilling assembly of any one of claims 22 to 25, further comprising at least one stabilizer that is one of: (i) below the pivot member; (ii) above the pivot member; and (iii) below the pivot member and above the pivot member.

27. The drilling assembly of any one of claims 22 to 26 further comprising a force application device that exerts a force on the housing to initiate the tilt.

28. The drilling assembly of any one of claims 22 to 27 further comprising a stabilizer that aids in initiating the tilt when the drill pipe is rotationally stationary and the drill bit is rotated by the drive.

1/4

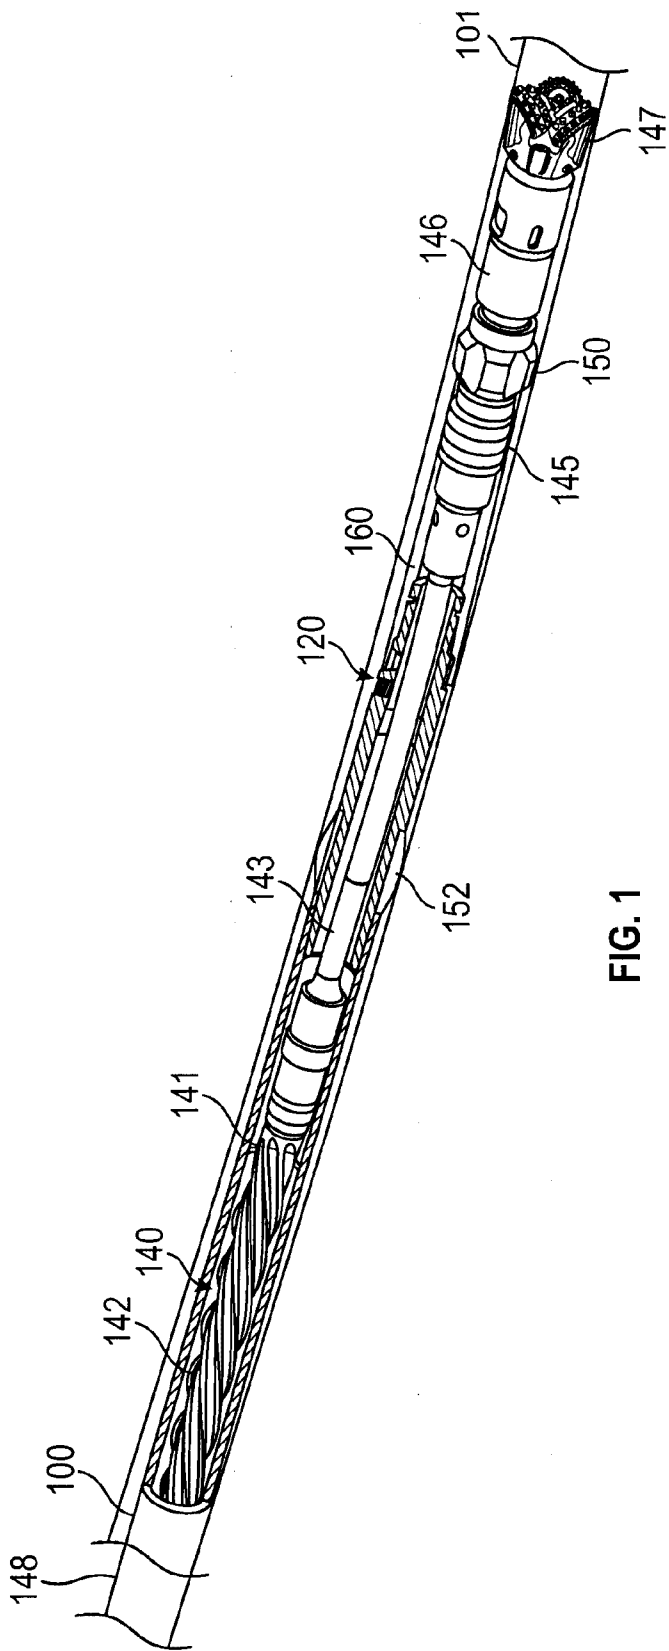


FIG. 1

2/4

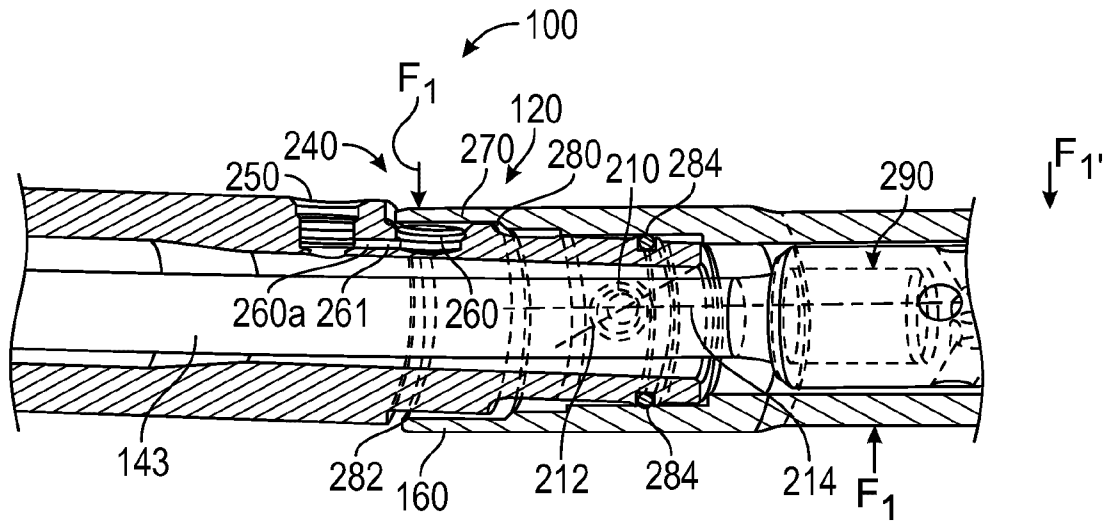


FIG. 2

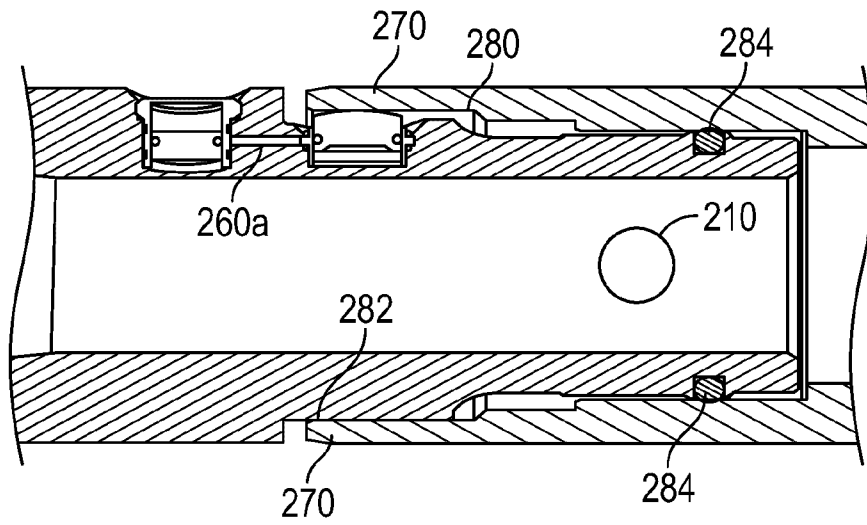


FIG. 3

3/4

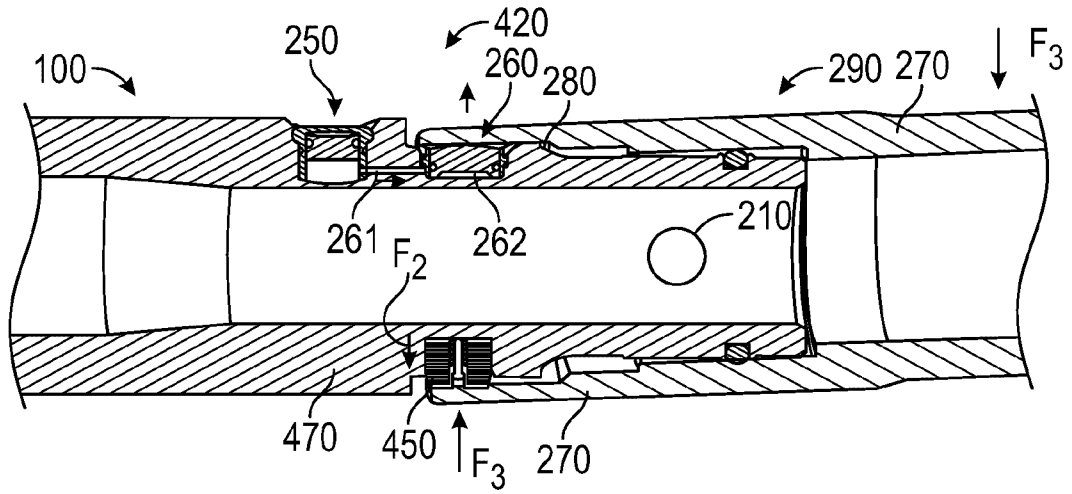


FIG. 4

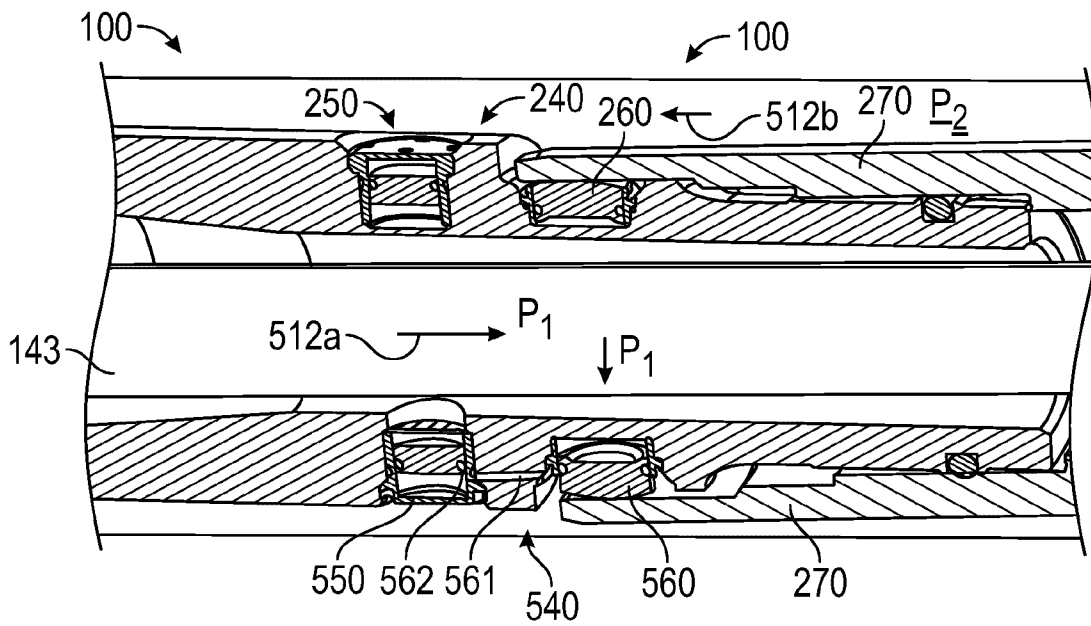


FIG. 5

4/4

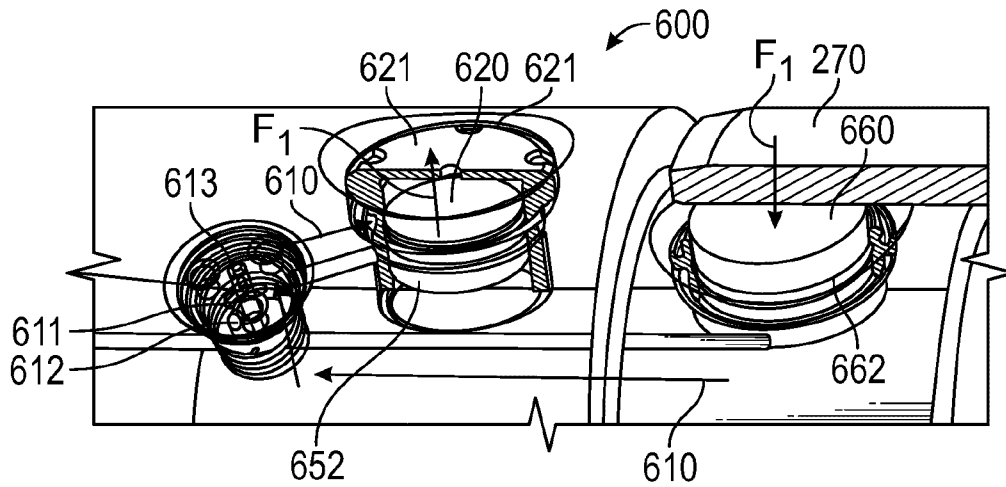


FIG. 6A

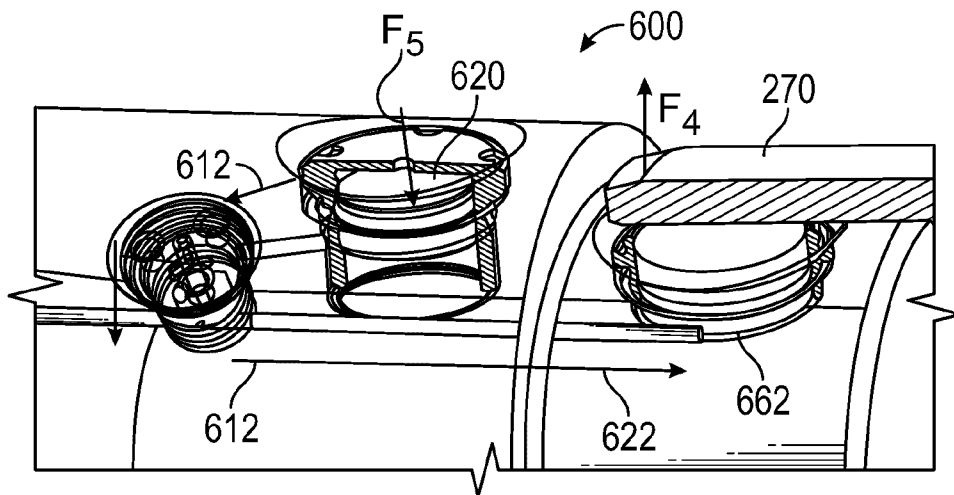


FIG. 6B

