



(51) International Patent Classification:
H01J 27/24 (2006.01)

(21) International Application Number:
PCT/US2012/020789

(22) International Filing Date:
10 January 2012 (10.01.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/431,827 11 January 2011 (11.01.2011) US
61/431,830 7 February 2011 (07.02.2011) US

(71) Applicant (for all designated States except US): **FORO ENERGY, INC.** [US/US]; 8020 Southpark Circle, Suite 500, Denver, CO 80120 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZEDIKER, Mark, S.** [US/US]; 1896 Via De Los Pinons, Castle Rock, CO 80104 (US). **JONES-ALBERTUS, Rebecca** [US/US];

505 Cypress Point Drive #108, Mountain View, CA 94043 (US). **FAIRCLOTH, Brian, O.** [US/US]; 7664 Brook Forest Lane, Evergreen, CO 80439 (US). **RINZLER, Charles, C.** [US/US]; 1015 21st Street, Apt. 105, Denver, CO 80205 (US). **MOXLEY, Joel, F.** [US/US]; 949 South Clayton Way, Denver, CO 80209 (US).

(74) Agent: **FREEMAN, John, C.**; Brinks Hofer Gilson & Li-one, P.O. Box 10087, Chicago, IL 60610 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: HIGH POWER LASER PHOTO-CONVERSION ASSEMBLIES, APPARATUSES AND METHODS OF USE

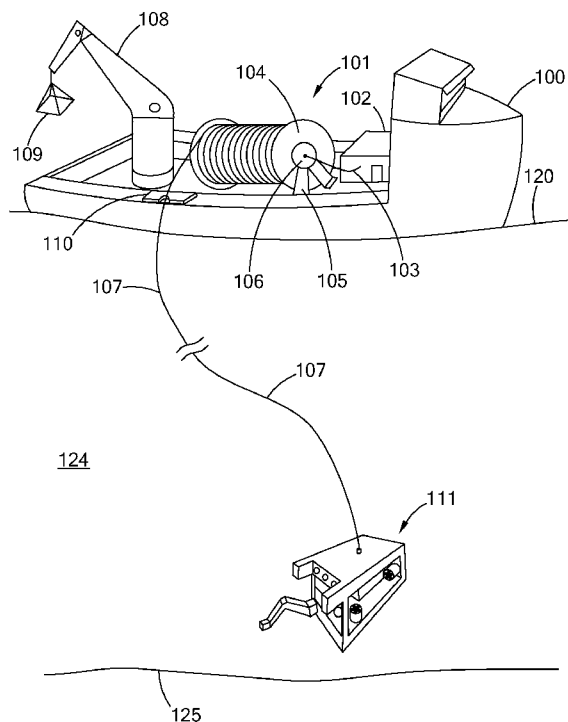


Fig. 1

(57) Abstract: There is provided a high power laser system for powering a remotely located laser device, such as an ROV, using a photo-conversion device, such as a laser photovoltaic assembly. Laser device systems, such as ROV systems that utilizes a high power laser cutting and/or cleaning tools are also provided.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS,

SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

HIGH POWER LASER PHOTO-CONVERSION ASSEMBLIES, APPARATUSES AND METHODS OF USE

[0001] This application: (i) claims, under 35 U.S.C. §119(e)(1), the benefit of
5 the filing date of January 11, 2011 of provisional application serial number 61/431,827;
and (ii) claims, under 35 U.S.C. §119(e)(1), the benefit of the filing date of February 7,
2011 of provisional application serial number 61/431,830, the entire disclosures of each
of which are incorporated herein by reference.

10 BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present inventions relate to assemblies that utilize laser energy to
provide electrical, mechanical or electro-mechanical energy for use in apparatuses, and
in particular apparatuses that operate in remote, hostile, extreme or difficult to access
15 locations, such as, subsea equipment, mining equipment, drilling equipment, flow
control equipment, plugging and abandonment equipment and nuclear remediation
equipment. The present inventions relate to laser apparatus that may perform laser
cutting operations, cleaning operations, or other types of laser operations, as well as,
potentially other non-laser operations; and which apparatus may also have assemblies
20 that utilize laser energy to provide electrical, mechanical or electro-mechanical energy.
By way of illustration the present inventions embrace subsea equipment that utilize
tethers, such as subsea vehicles, remotely operated vehicles ("ROV"s), subsea tractors,
subsea trenchers, and subsea excavation tools. Thus, and in particular, the present
inventions relate to novel subsea vehicles that utilize high power laser energy, including
25 high power laser cables and tethers. The present inventions further relate to subsea
laser tools that can be used with an ROV or as a stand-alone tool. These tools deliver
high power laser beams to cut, clean, remove material, and perform other tasks that
may be accomplished by high power laser energy. These tools and related apparatus
and systems bring high power laser technology to the seafloor, subsea environment,
30 and equipment and structures located below the surface of the water; as well as, to
other extreme or difficult to access environments or locations, such as within a
borehole, a mine, or a nuclear facility.

[0003] As used herein, unless specified otherwise the terms "blowout preventer," "BOP," and "BOP stack" are to be given their broadest possible meaning, and include: (i) devices positioned at or near the borehole surface, *e.g.*, the seafloor, which are used to contain or manage pressures or flows associated with a borehole; (ii) 5 devices for containing or managing pressures or flows in a borehole that are associated with a subsea riser; (iii) devices having any number and combination of gates, valves or elastomeric packers for controlling or managing borehole pressures or flows; (iv) a subsea BOP stack, which stack could contain, for example, ram shears, pipe rams, blind rams and annular preventers; and, (v) other such similar combinations and 10 assemblies of flow and pressure management devices to control borehole pressures, flows or both and, in particular, to control or manage emergency flow or pressure situations.

[0004] As used herein, unless specified otherwise "offshore" and "offshore drilling activities", "offshore activities" and similar such terms are used in their broadest 15 sense and would include activities on, or in, any body of water, whether fresh or salt water, whether manmade or naturally occurring, such as for example rivers, lakes, canals, inland seas, oceans, seas, bays and gulfs, such as the Gulf of Mexico. As used herein, unless specified otherwise the term "offshore drilling rig" is to be given its broadest possible meaning and would include fixed towers, tenders, platforms, barges, 20 jack-ups, floating platforms, drill ships, dynamically positioned drill ships, semi-submersibles and dynamically positioned semi-submersibles. As used herein, unless specified otherwise the term "seafloor" is to be given its broadest possible meaning and would include any surface of the earth that lies under, or is at the bottom of, any body of water, whether fresh or salt water, whether manmade or naturally occurring. As used 25 herein, unless specified otherwise the terms "well" and "borehole" are to be given their broadest possible meaning and include any hole that is bored or otherwise made into the earth's surface, *e.g.*, the seafloor or sea bed, and would further include exploratory, production, abandoned, reentered, reworked, and injection wells.

[0005] As used herein, unless specified otherwise the term "fixed platform," 30 would include any structure that has at least a portion of its weight supported by the seafloor. Fixed platforms would include structures such as: free-standing caissons,

well-protector jackets, pylons, braced caissons, piled-jackets, skirted piled-jackets, compliant towers, gravity structures, gravity based structures, skirted gravity structures, concrete gravity structures, concrete deep water structures and other combinations and variations of these. Fixed platforms extend from at or below the seafloor to and above the surface of the body of water, *e.g.*, sea level. Deck structures are positioned above the surface of the body of water a top of vertical support members that extend down in to the water to the seafloor. Fixed platforms may have a single vertical support, or multiple vertical supports, *e.g.*, pylons, legs, etc., such as a three, four, or more support members, which may be made from steel, such as large hollow tubular structures, concrete, such as concrete reinforced with metal such as rebar, and combinations of these. These vertical support members are joined together by horizontal and other support members. In a piled-jacket platform the jacket is a derrick like structure having hollow essentially vertical members near its bottom. Piles extend out from these hollow bottom members into the seabed to anchor the platform to the seabed.

[0006] The construction and configuration of fixed platforms can vary greatly depending upon several factors, including the intended use for the platform, load and weight requirements, seafloor conditions and geology, location and sea conditions, such as currents, storms, and wave heights. Various types of fixed platforms can be used over a great range of depths from a few feet to several thousands of feet. For example, they may be used in water depths that are very shallow, *i.e.*, less than 50 feet, a few hundred feet, *e.g.*, 100 to 300 feet, and a few thousand feet, *e.g.*, up to about 3,000 feet or even greater depths may be obtained. These structures can be extremely complex and heavy, having a total assembled weight of more than 100,000 tons. They can extend many feet into the seafloor, as deep as 100 feet or more below the seafloor.

[0007] As used herein the term "drill pipe" is to be given its broadest possible meaning and includes all forms of pipe used for drilling activities; and refers to a single section or piece of pipe. As used herein the terms "stand of drill pipe," "drill pipe stand," "stand of pipe," "stand" and similar type terms are to be given their broadest possible meaning and include two, three or four sections of drill pipe that have been connected, *e.g.*, joined together, typically by joints having threaded connections. As used herein the terms "drill string," "string," "string of drill pipe," "string of pipe" and similar type terms

are to be given their broadest definition and would include a stand or stands joined together for the purpose of being employed in a borehole. Thus, a drill string could include many stands and many hundreds of sections of drill pipe.

5 **[0008]** As used herein the term "tubular" is to be given its broadest possible meaning and includes drill pipe, casing, riser, coiled tube, composite tube and any similar structures having at least one channel therein that are, or could be used, in the drilling industry. As used herein the term "joint" is to be given its broadest possible meaning and includes all types of devices, systems, methods, structures and components used to connect tubulars together, such as for example, threaded pipe joints and bolted flanges. For drill pipe joints, the joint section typically has a thicker wall than the rest of the drill pipe. As used herein the thickness of the wall of tubular is the thickness of the material between the internal diameter of the tubular and the external diameter of the tubular.

15 **[0009]** As used herein, unless specified otherwise the term "subsea vehicle" is to be given its broadest possible meaning and would include an manned or unmanned apparatus that that is capable of, or intended for, movement and operation on and under the surface of a body of water, whether the body of water is salt water, fresh water, naturally occurring, manmade, including within a structure, such as a pool of water located above a nuclear reactor, a commercial fish farm, a public aquarium or oceanarium, or a pool of water for testing large equipment, such as NASA's astronaut training pools. Subsea vehicles would include, for example, remotely operated vehicles ("ROVs"), unmanned underwater vehicles ("UUVs"), manned underwater vehicles ("MUVs"), autonomous underwater vehicles ("AUVs"), vehicles that have positive buoyancy, variable buoyancy, neutral buoyancy and negative buoyancy, as well as, tracked, wheeled, or skid vehicles, such as subsea tractors and trenchers, that move along, or are otherwise in contact with the seafloor, or a work object, and underwater robots. As used herein, unless specified otherwise, the term "subsea equipment" is to be given its broadest possible meaning and would all subsea vehicles, as well as, other subsea equipment.

30 **[0010]** As used herein, unless specified otherwise "high power laser energy" means a laser beam having at least about 1 kW (kilowatt) of power. As used herein,

unless specified otherwise "great distances" means at least about 500 m (meter). As used herein the term "substantial loss of power," "substantial power loss" and similar such phrases, mean a loss of power of more than about 3.0 dB/km (decibel/kilometer) for a selected wavelength. As used herein the term "substantial power transmission" means at least about 50% transmittance.

[0011] As used herein, unless specified otherwise, "optical connector", "fiber optics connector", "connector" and similar terms should be given their broadest possible meaning and include any component from which a laser beam is or can be propagated, any component into which a laser beam can be propagated, and any component that propagates, receives or both a laser beam in relation to, *e.g.*, free space, (which would include a vacuum, a gas, a liquid, a foam and other non-optical component materials), an optical component, a wave guide, a fiber, and combinations of the forgoing.

[0012] As used herein, unless specified otherwise, the terms "ream", "reaming", a borehole, or similar such terms, should be given their broadest possible meaning and includes any activity performed on the sides of a borehole, such as, *e.g.*, smoothing, increasing the diameter of the borehole, removing materials from the sides of the borehole, such as *e.g.*, waxes or filter cakes, and under-reaming.

[0013] As used herein the terms "decommissioning," "plugging" and "abandoning" and similar such terms should be given their broadest possible meanings and would include activities relating to permanent abandonment, temporary abandonment, the cutting and removal of casing and other tubulars from a well (above the surface of the earth, below the surface of the earth and both), modification or removal of structures, apparatus, and equipment from a site to return the site to a prescribed condition, the plugback of a borehole to side track or bypass, the modification or removal of structures, apparatus, and equipment that would render such items in a prescribe inoperable condition, the modification or removal of structures, apparatus, and equipment to meet environmental, regulatory, or safety considerations present at the end of such items useful, economical or intended life cycle. Such activities would include for example the removal of onshore, *e.g.*, land based, structures above the earth, below the earth and combinations of these, such as, *e.g.*, the removal of tubulars from within a well in preparation for plugging. The removal of offshore

structures above the surface of a body of water, below the surface, and below the seafloor and combinations of these, such as fixed drilling platforms, the removal of conductors, the removal of tubulars from within a well in preparation for plugging, the removal of structures within the earth, such as a section of a conductor that is located
5 below the seafloor and combinations of these.

[0014] As used herein the terms "workover," "completion" and "workover and completion" and similar such terms should be given their broadest possible meanings and would include activities that place at or near the completion of drilling a well, activities that take place at or the near the commencement of production from the well,
10 activities that take place on the well when the well is a producing or operating well, activities that take place to reopen or reenter an abandoned or plugged well or branch of a well, and would also include for example, perforating, cementing, acidizing, fracturing, pressure testing, the removal of well debris, removal of plugs, insertion or replacement of production tubing, forming windows in casing to drill or complete lateral
15 or branch wellbores, cutting and milling operations in general, insertion of screens, stimulating, cleaning, testing, analyzing and other such activities. These terms would further include applying heat, directed energy, preferably in the form of a high power laser beam to heat, melt, soften, activate, vaporize, disengage, desiccate and combinations and variations of these, materials in a well, or other structure, to remove,
20 assist in their removal, cleanout, condition and combinations and variation of these, such materials.

Discussion of Related Art

Underwater Activities

[0015] Over 70% of the earth's surface is covered with water. Over time there has been a considerable amount of activity on, construction in, and development of the seafloor and the water column between the seafloor and the surface of the water. These underwater endeavors would include, for example: underwater pipe lines for oil, gas, communications, and the transport of materials; offshore hydrocarbon exploration
30 and production; offshore renewable energy production, such as tidal and current based systems; the construction and maintenance of supports extending from the seafloor to

at or above the water surface, such as pylons, piles, towers, and other structures, that are used to support bridges, piers, windmills and other structures above the surface of the water; the construction and maintenance of water intakes and outlets for enterprises, such as power plants, factories and municipalities. In future years is it anticipated that such endeavors will increase and that new and more complicated underwater activities and structures will arise. Moreover, as with the case of offshore hydrocarbon exploration and production, these endeavors will be moving to deeper and deeper waters. Thus, for example, today drilling and production of hydrocarbon activities at depths of 5000 ft, 10,000 ft and even greater depths are contemplated and carried out.

[0016] By way of general illustration of an example of an underwater activity, in drilling a subsea well an initial borehole is made into the seabed and then subsequent and smaller diameter boreholes are drilled to extend the overall depth of the borehole. Thus, as the overall borehole gets deeper its diameter becomes smaller; resulting in what can be envisioned as a telescoping assembly of holes with the largest diameter hole being at the top of the borehole closest to the surface of the earth, *e.g.*, the seafloor.

[0017] Thus, by way of example, the starting phases of a subsea drill process may be explained in general as follows. Once the drilling rig is positioned on the surface of the water over the area where drilling is to take place, an initial borehole is made by drilling a 36" hole in the earth to a depth of about 200 - 300 ft. below the seafloor. A 30" casing is inserted into this initial borehole. This 30" casing may also be called a conductor. The 30" conductor may or may not be cemented into place. During this drilling operation a riser is generally not used and the cuttings from the borehole, *e.g.*, the earth and other material removed from the borehole by the drilling activity, are returned to the seafloor. Next, a 26" diameter borehole is drilled within the 30" casing, extending the depth of the borehole to about 1,000 - 1,500 ft. This drilling operation may also be conducted without using a riser. A 20" casing is then inserted into the 30" conductor and 26" borehole. This 20" casing is cemented into place. The 20" casing has a wellhead secured to it. (In other operations an additional smaller diameter borehole may be drilled, and a smaller diameter casing inserted into that borehole with

the wellhead being secured to that smaller diameter casing.) A BOP is then secured to a riser and lowered by the riser to the sea floor; where the BOP is secured to the wellhead. From this point forward all drilling activity in the borehole takes place through the riser and the BOP.

5 **[0018]** The BOP, along with other equipment and procedures, is used to control and manage pressures and flows in a well. In general, a BOP is a stack of several mechanical devices that have a connected inner cavity extending through these devices. BOP's can have cavities, e.g., bore diameters ranging from about 4 1/6" to 26 3/4." Tubulars are advanced from the offshore drilling rig down the riser, through the
10 BOP cavity and into the borehole. Returns, e.g., drilling mud and cuttings, are removed from the borehole and transmitted through the BOP cavity, up the riser, and to the offshore drilling rig. The BOP stack typically has an annular preventer, which is an expandable packer that functions like a giant sphincter muscle around a tubular. Some annular preventers may also be used or capable of sealing off the cavity when a tubular
15 is not present. When activated, this packer seals against a tubular that is in the BOP cavity, preventing material from flowing through the annulus formed between the outside diameter of the tubular and the wall of the BOP cavity. The BOP stack also typically has ram preventers. As used herein unless specified otherwise, the term "ram preventer" is to be given its broadest definition and would include any mechanical
20 devices that clamp, grab, hold, cut, sever, crush, or combinations thereof, a tubular within a BOP stack, such as shear rams, blind rams, blind-shear rams, pipe rams, variable rams, variable pipe rams, and casing shear rams.

[0019] Regardless of the depth, performing subsea operations can be very difficult, costly, time-consuming and damagers. These obstacles and risks, however,
25 greatly increase, and one could say exponentially increase, as the depth of the water becomes greater, and in particular for deep (e.g., about 1,000 ft), very-deep (e.g., about 5,000 ft) and ultra-deep (e.g., about 10,000 ft and greater) depths. Thus, to minimize the risk to human divers, and for those depths where human divers cannot safely go, and tasks that a human diver could not perform unassisted, subsea equipment has
30 been developed.

Subsea Vehicle Tethers

[0020] Such subsea vehicles can be connected to surface support equipment that can be located on vessels, such as a ship, barge, or offshore drilling rig, or located on land, by a tether. In general, and prior to the present inventions, subsea vehicle tethers were limited to providing a way to transmit electrical power and control
5 information from the surface support equipment to the subsea equipment and to obtain images, data, and control information back from the subsea equipment. As the complexity and power demands of subsea vehicles increases, so has the complexity and size of tethers, e.g., diameter, complexity, power capabilities, data capabilities, number of cables, wires, and components. Further as the depth of operations
10 increases, and thus the length of the tether needed increases, the thickness of the electrical power supply wires must similarly increase. A tether for a subsea vehicle could include, by way of example, conductors for transmitting electrical power from the surface to subsea equipment, control throughput for telemetry, either metal wires or optical data fibers, video throughput, either metal wires or optical data fibers, data
15 transmission throughput, either metal wires or optical data fibers, a strength member, buoyancy control material, and outer protective sheathing.

Tether Drag

[0021] A significant and long-standing problem with subsea vehicles, and in particular floating subsea vehicles, such as ROVs, is the drag that the tether creates. In
20 order for a subsea vehicle to move, or to remain in a stationary position relative to a work piece, fixed structure or the sea floor when a current is present, the vehicle's thrusters, or other form of motive power, must produce enough thrust to overcome the drag created by the vehicle itself and the tether. In most ROV systems tether drag is a very significant drag factor; and as depth of operation increases tether drag quickly
25 becomes the most significant drag factor; and tether drag can be many multiples greater and on an order of magnitude greater than vehicle drag. Thus, for example, it is reported that for a vehicle working at a depth of 500 ft, in a 1-knot current, and having a vehicle surface area of 10 ft² and a tether having a diameter 0.75" (inches) the vehicle drag would be 25.5 lbs (pounds) and the tether drag would be 106.3 lbs. (see R. Christ
30 & R. Wegnl, "The ROV Manual", at p. 32 (2007) (hereinafter Christ, "The ROV

Manual").) Thus, "[w]hen operating at depth (versus at the surface), the greatest influence of current is on the tether cable." (Christ, "The ROV Manual," at p. 39.)

[0022] As tether length increases tether drag increases. Similarly, as tether diameter increases tether drag increases. Further, as the length of the tether increases, in particular in very deep operations, the diameter of the tether also typically increases, to accommodate the larger electrical power requirements for deeper operations. Thus, a paradigm exists where deep operations require more power and the diameter of the tether is increased to handle the additional power, which in turn further increases the tether drag and requires yet more power.

[0023] This paradigm has been described as -- "More power drives the cable to become larger, which increases drag, etc. It quickly becomes a vicious design spiral." (Christ, "The ROV Manual," at p. 47.) Thus, it was postulated that the perfect ROV would have "a minimal tether diameter (for instance, a single strand of unshielded optical fiber)"; but then noted that this was not obtainable because "the smaller the tether cable diameter, the better -- in all respects (*except, of course, power delivery*)." (Christ, "The ROV Manual," pp. 18, 29 (emphasis added).) Accordingly, it is believed that until the present inventions, no solution existed to the "vicious design spiral" presented by the tether-drag paradigm.

High Power Laser Beam Conveyance

[0024] Prior to the recent breakthroughs at Foro Energy, Inc., it was believed that the transmission of high power laser energy over great distances without substantial loss of power was unobtainable. These breakthroughs in the transmission of high power laser energy, and in particular energy levels greater than about 5 kW, are set forth, in part, in the novel and innovative teachings contained in US patent application publications 2010/0044106, 2010/0044103 and 2010/0215326, and in pending US patent application serial numbers 12/840,978, and 13/210,581; the entire disclosures of each of which are incorporated herein by reference.

SUMMARY

[0025] There has been a long-standing need for power sources, tools and related apparatus and systems that can access and perform operations in remote, harsh and difficult to access locations and environments, such as the seafloor, subsea,

below the seafloor, off-shore, mines, boreholes, pipelines, nuclear facilities, chemical facilities and other facilities and locations. There has also been a long-standing need for power sources for use in such environments and under such conditions. There has further been a long-standing need for assemblies that perform precise and controlled cutting operations, boring operations, cleaning operations, removal operations, and other types of operations in such environments and locations. Moreover, in the design and operation of subsea vehicles and subsea equipment, as well as potentially other tethered equipment, the vicious design spiral presented by the tether-drag paradigm has been a long-standing problem. The present invention, among other things, solves these needs by providing the articles of manufacture, devices and processes taught herein.

[0026] There is provided a high power laser photovoltaic assembly comprising: a photovoltaic assembly comprising a plurality of photovoltaic cells; a means to provide a predetermined high power laser beam distribution profile to the photovoltaic cells; and, the photovoltaic cells configured in a shape based at least in part upon the predetermined laser beam profile.

[0027] There is still further provided, a high power laser photovoltaic assembly in which the photovoltaic cells comprises a material selected from the following group: $\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{As}$, wherein $0 \leq x \leq 0.45$ and $0 \leq y \leq 1$, $\text{Si}_x\text{Ge}_{1-x}$, wherein $0 \leq x \leq 1$, $\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{P}$, wherein $0 \leq x \leq 0.80$ and $0 \leq y \leq 1$, $\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{N}$, wherein $0 \leq x \leq 0.5$ and $0.1 \leq y \leq 1$, $\text{In}_x\text{Ga}_{1-x}\text{Sb}$, wherein $0 \leq x \leq 0.3$, $\text{In}_x\text{Ga}_{1-x}\text{N}_y\text{As}_{1-y}$, wherein $0 \leq x \leq 0.3$ and $0 < y \leq 0.1$, and $\text{In}_x\text{Ga}_{1-x}\text{As}_y\text{P}_{1-y}$, wherein $0 \leq x \leq 1$ and $0 \leq y \leq 1$.

[0028] Moreover, there is provided a high power laser photovoltaic assembly in which the photovoltaic cells comprises an alloy of one or more elements selected from the group of Al, In, Ga, Si, Sb, N, and As.

[0029] Furthermore, there is provided a high power laser photovoltaic assembly in which the means to provide a predetermined high power laser beam distribution profile to the photovoltaic cells includes a collimating lens.

[0030] Still further there is provided a high power laser photovoltaic assembly in which the means to provide a predetermined high power laser beam distribution profile to the photovoltaic cells includes an optical fiber face.

[0031] Additionally, there is provided a laser photovoltaic assembly including: a photovoltaic cell cooling device; and, a back reflection management means.

[0032] Yet still further there is provided a high power laser photovoltaic assembly having: a laser beam delivery means; a photovoltaic assembly comprising a housing; the housing having an opening for receiving the laser beam, the housing defining an optically active surface, the optically active surface comprising a plurality of photovoltaic cells; and, a cooling device.

[0033] Moreover, there is provided a high power laser photovoltaic assemblies: in which the laser beam delivery means is an optical fiber face; the laser photovoltaic cells has a material paired to a predetermined laser beam wavelength range; a distribution of the wavelengths in the laser beam wavelength range is no greater than about 10 nm; the laser beam wavelength range is from about 1060 nm to about 1080 nm; or the laser beam wavelength range is from about 1530 nm to about 1600 nm.

[0034] Still additionally there is provided a high power laser photovoltaic assembly in which the laser photovoltaic cells has a multilayer structure configured to receive a predetermined laser beam wavelength range.

[0035] Further, there is provided a high power laser photovoltaic assemblies: in which the optically active surface defines a disc; in which , the inner optically active surface defines a portion of a sphere; in which the inner optically active surface defines a woods horn; or in which the inner optically active surface defines a cylinder having an open end and closed end.

[0036] Still further there is provided a high power laser photovoltaic cell having: a front for receiving a high power laser beam having a predetermined wavelength; a back; and, a layer between the front and back, comprising a photovoltaic material having a band gap tuned to a predetermined operating temperature and the predetermined laser wavelength.

[0037] Yet additionally, there is provided a high power laser photovoltaic cell of claim 22, wherein the predetermined laser wavelength is from about 1000 nm to about 1600 nm and the predetermined operating temperature is greater than about 100 degrees C.

[0038] Furthermore, there is provided a high power laser photovoltaic cell having: a front for receiving a high power laser beam having at least about 10 kW of power and having a predetermined wavelength; a back; a layer between the front and back, comprising a photovoltaic material having a band gap tuned to the predetermined laser wavelength; and, the front comprising a busbar, an antireflective coating capable of handling the at least about 10 kW of power at the predetermined wavelength, and a grid.

[0039] Moreover, there is provided a high power laser photovoltaic cell in which the grid is characterized by a grid height, a grid facing surface, and a grid width; and, wherein the grid height is from about 5 μm to about 10 μm and the grid width is about 5 μm to about 10 μm .

[0040] Additionally, there is provided a high power laser photovoltaic cell in which the grid is characterized by a grid height, a grid facing surface, and a grid width; and, wherein the grid height is greater than about 10 μm ; or wherein the grid height is greater than about 20 μm .

[0041] Furthermore, there is provided a high power laser photovoltaic cell having a second a layer between the front and back, comprising a photovoltaic material having a band gap tuned to the predetermined laser wavelength.

[0042] Still additionally, there is provided a high power laser photovoltaic cell having a plurality of layers between the front and back, comprising a photovoltaic material having a band gap tuned to the predetermined laser wavelength.

[0043] Moreover, there is provided a high power laser photovoltaic cell having: a front for receiving a high power laser beam having a predetermined wavelength; a back; a plurality of layers between the front and back, the layers configured for the predetermined laser wavelength, to convert at least about 25% of the received laser beam into electricity; and, the front comprising a grid.

[0044] Still additionally, there is provided a high power photovoltaic cell having an optics means to minimize the grid shadowing fraction.

[0045] Moreover, there is provided a method of remotely converting power laser energy for use in a device, the method including: propagating a high power laser beam; transmitting the high power laser beam through the high power laser fiber to the

device without substantial loss of power; directing the high power laser beam from the high power laser fiber into a laser photovoltaic assembly; converting at least a portion of the laser beam into electrical energy; and, utilizing the electrical energy to power an operation of the device.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

[0046] FIG. 1 is a perspective view of an embodiment of a laser subsea vehicle system in accordance with the present invention.

[0047] FIG. 2A is a perspective view of a laser subsea vehicle system in accordance with the present invention.

10 **[0048]** FIG. 2B is schematic view of a laser subsea vehicle in accordance with the present invention.

[0049] FIG. 3A is a perspective view of a laser-photovoltaic assembly in accordance with the present invention.

[0050] FIG. 3B is a cross-sectional view of the laser-photovoltaic system of FIG. 3A taken along line B-B of FIG. 3A.

[0051] FIG. 3C is a cross-sectional view of the laser-photovoltaic system of FIG. 3A taken along line C-C of FIG. 3A.

[0052] FIG. 4 is a schematic view of a laser-photovoltaic assembly in accordance with the present invention.

20 **[0053]** FIG. 5 is a cross-sectional perspective view of a laser-photovoltaic assembly in accordance with the present invention.

[0054] FIG. 6 is a schematic view of a laser system of the present invention for use in a laser subsea vehicle system in accordance with the present invention.

[0055] FIG. 7 is a perspective view of a laser subsea vehicle system of the present invention engaged in laser subsea operations in accordance with the present invention.

[0056] FIG. 8 is a perspective view of a laser subsea vehicle system utilizing a laser tether management system of the present invention, engaged in subsea laser operations in accordance with the present invention.

[0057] FIG. 9 is a perspective view of a laser subsea vehicle system of the present invention engaged in subsea laser operations in accordance with the present invention.

[0058] FIG. 10 is a perspective view of a laser subsea vehicle of the present invention engaged in subsea operations in accordance with the present invention.

[0059] FIG. 11 is a perspective view of a laser subsea vehicle system in accordance with an embodiment of the present invention.

[0060] FIG. 12 is a perspective view of a laser subsea vehicle system of the present invention engaged in subsea laser operations in accordance with the present invention.

[0061] FIG. 13 is a perspective view of a laser-photovoltaic cell in accordance with the present invention.

[0062] FIG. 13A is a detailed perspective view of the laser-photovoltaic cell of FIG. 13 taken along section 13A.

[0063] FIG. 14 is a cross-sectional perspective view of a laser-photovoltaic assembly in accordance with the present invention.

[0064] FIG. 15 is a cross-sectional schematic view of a laser-photovoltaic assembly in accordance with the present invention.

[0065] FIG. 16 is a cross-sectional schematic view of a laser-photovoltaic assembly in accordance with the present invention.

[0066] FIGS. 17 - 19 are spectrums of laser energy transmitted in accordance with aspects of the present invention showing the absence of SRS phenomena.

[0067] FIG. 20 is a perspective view of a laser-photovoltaic assembly in accordance with the present invention.

[0068] FIG. 21 is a perspective view of a laser-photovoltaic assembly in accordance with the present invention.

[0069] FIG. 22 is a plan view of a laser-photovoltaic assembly of laser-photovoltaic cells of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0070] In general, the present inventions relate to system, tools and assemblies that utilize laser energy to perform various operations, for example, a laser apparatus that may perform laser cutting operations, cleaning operations, conversion of
5 laser power to other forms of energy or power, or other types of laser operations, as well as, potentially other non-laser operations; and which may also have assemblies that utilize laser energy to provide electrical, mechanical, thermal, or electro-mechanical energies, and combinations and variations of these energies. The present inventions further provide the ability, to have and to use, such apparatus in remote, hostile,
10 extreme, difficult to access locations, and combinations and variations of these, such as, subsea equipment, mining equipment, drilling equipment, flow control equipment, well and rig plugging, abandonment and decommissioning equipment, and nuclear remediation, monitoring and decommissioning equipment.

[0071] By way of illustration of laser equipment for use in remote and
15 hazardous environments, the present inventions embrace novel subsea equipment that utilizes high power laser energy, including high power laser cables as tethers, such as subsea vehicles, remotely operated vehicles ("ROV"s), subsea tractors, subsea trenchers, and subsea excavation tools. It being recognized that the present inventions may also find applicability in many other applications and fields, in addition to the
20 subsea field, such as mining, drilling, offshore above the surface, oil, natural gas and geothermal, construction, remediation, military, pipelines, nuclear and others. Thus, in general, and by way of illustration, the present inventions relate to laser subsea equipment and laser tools, systems for operating such equipment and tools, and may include laser powered subsea equipment, such as a laser subsea vehicle, *e.g.*, a laser
25 remotely operated vehicle ("ROV"), and subsea equipment, whether laser powered or not, that utilize high power laser delivery assemblies for performing subsea laser operations, such as the cutting, cleaning, welding or removal of material, objects and structures.

[0072] By way of general illustration there is provided a laser ROV system
30 that uses a high power laser that is in optical communication, by way of a high power optical fiber cable, with a photo-electric conversion device that is located in an ROV.

The high power optical fiber cable can be made up of a high power optical fiber. These fibers may be very thin on the order of hundreds of μm (microns). These high power optical fibers have the capability to transmit high power laser energy having many kW of power over many hundreds and thousands of feet. The laser-ROVs of the present invention substantially reduce the tether drag associated with conventional electrical powered tethers, by substantially reducing the thickness of the tether. Further, and of particular value for smaller support vessels, the high power optical fibers weigh less per foot of fiber than electrical cables. This weight difference can be important, for example when comparing the weight of 10,000 feet of ROV tether for a conventional ROV, with the weight of 10,000 feet of, for example 600 μm high power optical fiber. Thus, the weight of the tether, which on many vessels is stored or positioned above the deck of the ship, can be substantially reduced.

[0073] Thus, for example, 10 kW of laser power may be delivered over an umbilical having a fiber having a 600 μm (micron) core, (the core having a weight of 0.62 g/m) the umbilical having a length of 1 km. This provides for a weight-power-distance ("WPD") value of 4. The WPD value is determined by the formula -- $a * b^2 * c$ - where "a" is the delivered laser power, or maximum deliverable, power in kW; "b" is the weight of the core of a fiber in the umbilical in g/m; and "c" is the length of the umbilical. For multi-fiber umbilicals, if any one fiber meets the specified WPD value, the umbilical is considered as having that WPD value. Preferably, umbilicals may have WPD values of less than about 1000, less than about 500, less than about 200, and less than about 100. More, preferably the WPD values may be from about 2 to about 250, and from about 5 to about 50. Further, in some embodiments and applications greater WPD values are contemplated. For a conventional, electrically conductive wire "b" would be the weight of the electrically conductive material, e.g., copper wire, in g/m. In general, "b" for copper wire would be on the order of magnitudes greater than for an optical fiber.

[0074] The energy that is transmitted down the high power optical fiber is in the form high power laser energy, i.e., high power light having a very narrow wavelength distribution. To be used in the ROV this high power may be converted to electrical, thermal, electro-mechanical and/or mechanical energy. A laser photo-conversion

device may be used for this purpose and is located within, associated with, or as a part of the ROV. This device may be associated with a housing that is attached to the ROV frame, or it may be contained in an ROV tether management systems (TMS) (for example a TMS such as that disclosed in US Pat. No. 6,260,504 the entire disclosure of which is incorporated herein by reference), or it may be otherwise associated with the ROV.

[0075] Photo-conversion devices can be any such device(s) that are known to the art, or may be later developed by the art, for the conversion of light energy, and in particular laser light energy (*i.e.*, a laser photo-conversion device), into electrical, thermal, mechanical, electro-mechanical energies and combinations and variations of these energy types. For example, photovoltaic ("PV") devices may be used, a quantum well may be used, a micro array antenna assembly that employs the direct coupling of photons to a micro array antenna (the term micro array antenna is used in the broadest sense possible and would include for example nano-wires, semi conducting nano-wires, micro-antennas, photonic crystals, and dendritic patterned arrays) to create oscillatory motion to then drive a current may be used, plasmonic nanostructure, electron excitation and ejection, a sterling engine with the laser energy providing the heat source may be used, a steam engine or a turbine engine with the laser energy providing the heat source may be used (*see, e.g.*, US Pat. No. 6,837,759, which uses a chemical reaction as a heat source turbine engine in an ROV, the entire disclosure of which is incorporated herein by reference).

[0076] For size considerations, as well as over all system costs, in general, all other factors being equal, the greater the efficiency of the photo-conversion device in turning the laser energy into electric energy the more desirable. It being understood that in all of these consideration there are design tradeoffs for the ROV, tool, robot, laser application device, and for specific applications, conditions and environments. While it is generally desirable to have the ROV as small as possible, to reduce the ROV's drag, some increase in size may be acceptable to obtain a higher power conversion rate by using a larger photo-conversion device. Preferably the photo-conversion device is of the type of the novel photovoltaic device(s) provided in this specification.

[0077] The high power optical fiber further provides the ability, in a single fiber, to convey high power laser energy down to the ROV, tool, robot, or other laser application device, convey control signals and data down to the ROV, tool, robot, or other laser application device, and convey up from the ROV, tool, robot, or other laser application device, control information and data (including video data). In this manner the high power optical fiber has the ability to perform, in a single very thin, e.g., less than 1000 μm diameter fiber, the functions of transmitting operating power, transmitting and receiving control information, and transmitting data and other information from a remote location or the distal end (e.g., the laser device end) of the fiber (data could also be transmitted down the optical cable to the distal end). As used herein the term "control information" is to be given its broadest meaning possible and would include all types of communication to and from the ROV, tool, robot, or other laser application device, and to and from such devices' components and systems that would provide for the control of such devices, their movements, and/or their operations. In addition to a single fiber, and in particular because of their thinness and low weight, multiple fibers (e.g., one, two, three, four or more) can be utilized.

[0078] Additionally, either as a single fiber, in which case a high power beam splitter, switch or both, will be needed within, for example, an ROV, or by way of a second high power fiber, the high power laser energy can be used to power a laser delivery tool, which can be located on a manipulator arm of for example, an ROV, or otherwise associated with the ROV, or be a stand-alone tool or device. The laser delivery tool has the capability to deliver high power laser energy to a subsea target to perform an operation on that target. Thus, an ROV with a high power laser tool can be used to perform tasks, such as for example, cutting of tubulars, removal of biologic growth, sediments, and materials from subsea structures, welding of materials, trenching and the removal, in particular of hard materials, such as hard rocks or concrete, present at the surface of the seafloor during a trenching operation.

[0079] When packaging the high power laser fiber into a tether, depending upon the intended use, only a single fiber configured as an optical cable, having shielding may be used. However, it is preferred that the fiber be contained in a protective tube that also provides strength. Further, buoyancy issues should be taken

into consideration when making a tether and the packaging of the fiber should have material incorporated therein, or associated therewith, to set the buoyancy, whether it be neutral, positive or negative.

[0080] Additionally, fairings may be employed to further reduce the drag of the optical fiber and/or optical fiber tether. For example, when multiple fibers, fibers and cables, or cables are used they may be contained with, as a part of or otherwise associated with an outer member that has a shape designed to reduce drag, such as having the cables and/or fibers in a line, giving rise to a flat or ribbon type of tether, and which could further have tapered or narrowed edges at the sides of the ribbon like structure.

[0081] Turning to FIG. 1 there is illustrated an embodiment of a laser-ROV system having a support vessel 100. The support vessel 100 could be any type of ship, boat or barge, that is suitable for the operational conditions of the laser-ROV (e.g., sea conditions, weight requirements, deck space requirements, etc.) The support vessel could also be an offshore oilrig, or a submarine (manned or unmanned). Additionally, instead of a support vessel a shore-based support system could be employed. The support vessel contains a laser housing or laser room 102, which contains a high power laser(s) and laser support equipment. The high power laser is optically connected to an optical slip ring assembly 106, by way of high power optical fiber 103. The optical slip ring assembly 106 is positioned in, or otherwise associated with, a spool 104 containing a high power laser tether 107. The spool has supports 105. The support vessel 100 may further have a crane 108, or other lifting device, which has an attachment device 109 for securing and lifting the ROV 111 in and out of the body of water 124. The attachment device 109 could be a custom made device for a particular ROV, or it could be as simple as a hook, shackle or choker. The vessel 100 is shown on the surface 120 of a body of water 124 with a laser powered ROV 111 being shown as it approaches the seafloor 125. There is also shown a tether-handling device 110, which in this embodiment is attached to the vessel 110, positioned above the surface 120 of the body of water 124.

[0082] Turning to FIG. 2 there is shown an embodiment of a laser-ROV 211 that is operating in a body of water 224. The laser-ROV 211 has an ROV frame 213,

which supports a tether attachment device 212, which is attached to high power laser tether 207. The laser-ROV has a tether attachment device 212, which places the tether, either directly or indirectly through other optical components, in optical association with the components of the photo-electric housing 216. The tether attachment device 212
5 may have a connecting or coupling device as provided in US Patent Application Serial Number 61/493,174, the entire disclosure of which is incorporated herein by reference, or it may have a commercially available high power laser connector or coupler. The ROV 211 also has operational testing and observation related equipment, such as a lights 217, 221, a sensor 218 such as a temperature sensor, and a camera 219. The
10 laser-ROV 211 has thrusters, for example thruster 215, 214. The ROV has a manipulator arm 222, which has a tool 223, for example a laser cutter.

[0083] The laser cutter may be optically associated with the tether. The tether may have separate high power fibers for providing high power energy to the laser cutter and to a photo-conversion device, or the tether may have a single high power fiber for
15 providing laser energy to the photo-conversion device and the laser cutter. A high power optical cable, external to the out cover of the tether, but which may be associated therewith, such as by cable ties, may also be used to provide laser energy to the laser cutter.

[0084] Turning to FIG. 2B there is shown a cross-sectional schematic view of
20 the laser-ROV 211 of FIG. 2A. In FIG. 2B there is provided a laser photovoltaic assembly 230, contained within the photo-electric housing 216. The laser photovoltaic assembly 230 having a laser delivery assembly 226 and a photovoltaic component 227, and a thermal management device 229, e.g., a cooling device. The high power laser tether 207 and the tether attachment 212 may be associated with the frame 213 and are
25 at least partially contained within, or otherwise associated with housing 216. One or more or all of the tether 207, the tether attachment 212, the laser delivery assembly 226, may be permanently attached and in optical communication, releasably attached and in optical communication, and combinations and variations of these. Electrical wires or cable 228, 231 are connected to the photovoltaic component 227 and to form
30 an electric circuit and convey electricity generated by the photovoltaic assembly to the systems, batteries, equipment and apparatus of the ROV.

[0085] FIGS. 3A-C, 4 and 5 provide examples of embodiments of laser-photovoltaic assemblies. In general photovoltaics are semiconductor materials that are used to convert light directly into electricity at the atomic level. These materials exhibit a property known as the photovoltaic effect.

5 **[0086]** Photovoltaics are used, and well known, to those of skill in the semiconductor, solar panel, solar energy and related arts. In general solar panels, and thus, most photovoltaic cells and semiconductor materials evidencing a photovoltaic effect are designed to handle sunlight. Sunlight is light that contains a broad distribution of wavelengths and is not coherent. Although some of these solar panels, cells and
10 materials may be more efficient than others at converting certain wavelengths, or wavelength bands within the broad spectrum of sunlight, to electric energy, these conventional, solar based, materials, structures and assemblies, have little to no applicability for the present photovoltaic assemblies, and have substantial drawbacks and negatives, *e.g.*, size, weight, grid design and overall series resistance, efficiency,
15 and shape, to their use in laser-powered tools and assemblies.

[0087] Thus, preferably, the novel laser-photovoltaic assemblies and materials, of the types disclosed herein are employed in the laser-powered tools and assemblies contemplated by this specification. In general, in these assemblies and materials, a specifically selected (or designed) photovoltaic material(s) is matched with
20 a narrow wavelength band of light, and in particular coherent light, to optimize the efficiency of the conversion of the light energy to electric energy. In particular, and by way of illustration, a narrow band of wavelengths of light, *e.g.*, less than 10 nm, less than 5 nm, and less than 2 nm, may be paired with a particular type of photovoltaic material or cells.

25 **[0088]** Further, the selection of the wavelength and the photovoltaic material may also be based upon minimizing the amount of transmission losses to the laser beam from non-linear effects as the laser beam is transmitted by the optical fiber from the laser to the laser-powered tool, *e.g.*, from the laser on the ship through the tether to the ROV. Preferably, the photovoltaic materials and the laser, and in particular the laser
30 beam wavelength (or wavelength band width), should be selected to optimization both the reduction in non-linear effects and the power conversion efficiency. Thus, for

example, a 1.5 μm diode laser may be used with a GaSb (Gallium Antimony) photovoltaic material.

[0089] Turning to FIGS 3A to 3B there is provided a perspective view, a longitudinal cross-sectional view and a transverse cross-sectional view, respectively, of an embodiment of a laser-photovoltaic ("laser-PV") assembly 300, having an optical fiber 301 having a fiber face 302 from which a high power laser beam 311 is propagated, or launched. The laser beam 311 is launched into a photovoltaic assembly ("PV assembly") 303, which has a cooling jacket 304; other types of cooling devices may be employed provided that they can dissipate or otherwise manage the excess heat that is produced by the high power laser beam contacting the photovoltaic cells, e.g., 305, 306, 307, 308, 309, and potentially other sections of the photovoltaic assembly 303 inner side surface 310 and inner bottom surface 321. The photovoltaic assembly 303 is in the shape of a tube having a sealed bottom. Thus, the photovoltaic assembly 303 has an inner side surface 310 and an inner circular bottom surface 321. Both inner surfaces are covered with, have, or are, photovoltaic cells ("PV cells"), preferably made up of a material that was selected to match the wavelength of the laser beam 311 (or visa versa, *i.e.*, the laser beam could be selected to match the photovoltaic material(s) used in the photovoltaic cells; recognizing that the selection of the wavelength may, and preferably should, also take into consideration the reduction of non-linear effects). The photovoltaic assembly 303 and the laser-PV assembly 300 have an axis 322, that in this figure is normal to the fiber face 302, and which may also preferably be coaxial with the fibers axis, at least at or near, the area of the fiber face 302. The laser beam 311 diverges as it leaves the fiber face 302 and forms an angle 312 with the axis 322. The laser beam 311 then enters photovoltaic assembly 303 through opening 319 and impinges upon, or strikes, the inner side surface 310 and the side photovoltaic cells, e.g., 306. The laser beam 311 first contacts the photovoltaic assembly 303 at angle 315. At that point, some of the laser energy is absorbed by the photovoltaic cells and converted to electricity, while other of the laser energy from the laser beam 311, is reflected further into the photovoltaic assembly 303. This action of reflection, is shown by representative reflected laser beam rays 313, 314. The laser beam reflects off of the inner side surface 310 initially at angle 316. It being understood

that there will be many different rays and angles as the laser beam 311 is reflected and propagated further into the photovoltaic assembly 303. (Although not shown, there may also be reflections from the bottom surface 321, back through the photovoltaic assembly 303.)

5 **[0090]** Further with this and other laser-PV assemblies the optics, and the configuration of the fiber face can be used to optimize the path and beam profile of the laser beam as it interacts with the PV cells in the PV assembly. Further, the shape of the PV assembly and the location of the cells in the assembly can be optimized for a particular laser beam profile or visa versa, to optimize the overall power conversion
10 efficiency of the laser-PV assembly.

[0091] In FIG. 4 there is provided an embodiment of a laser-PV assembly 400 having a multilayer disc type PV assembly 403. In this embodiment the high power laser beam 411 is launched from fiber face 402 and diverges from the fiber face until entering collimating optics 420, where it then leaves those optics as a collimated beam
15 412 and travels to the PV assembly opening 419, into the PV assembly 403, and strikes the first layer 404 of PV cells, *e.g.*, 406. Some of the laser beam 412 passes through or past the first layer 404 and then strikes the second layer 405 of PV cells, *e.g.*, 407. Preferably, a cooling means or thermal management means (not shown) is used with this PV assembly. Although shown as two staggered layers, additional staggered layers
20 may be employed, or only a single layer uniform layer, *e.g.*, plainer and non-staggered, may be used. The staggering, and relative positioning of the staggered layers may provided benefits to heat management issues, overall space, *i.e.*, size, considerations and the management of back reflections.

[0092] In FIG. 5 there is provided an example of an embodiment of a laser-PV
25 assembly 500 having a hemispherical type PV assembly 503. In this embodiment a high power laser beam 511 is launched from the face 502 of an optical fiber 501. The laser beam 511 diverges, as shown by exemplary and illustrative rays 514, 515, 516, 517 until it enters collimating optics 520, where it leaves as a collimated beam 512 as shown by exemplary and illustrative rays 514a, 515a, 516a, 517a. Collimated beam
30 512 then enters diverging optics 521, where it leaves as diverging beam 513, as shown by exemplary and illustrative rays 514b, 515b, 516b, 517b and enters the PV assembly

503 by way of opening 519. The PV assembly 503 is in a half-hemispherical shape, e.g., a half of a hollow ball. The PV assembly 503 has a hemispherical inner surface 510 that has, contains or holds, PV cells, e.g., 505, 506, 507, 508, 509, 510.

[0093] The optics, fiber types, fiber face, heat management, cooling, number of fiber, laser power, laser type, other considerations, and shapes and configurations of assemblies can be arranged and configured in many different ways and combinations without departing from the spirit of the present inventions. In the embodiments of FIGS. 3 and 5 the optically active surfaces, e.g., the surfaces that are designed to, capable of, or intended to, receive laser energy and convert that energy into electricity such as by having, or being made up by, PV cells or otherwise having a photovoltaic material, are on the inside of the assembly. It is contemplated that these optically active surfaces, i.e., the surfaces of, may be on the outside of the assembly, on the outside and inside, on flat panel like structures, e.g., the embodiment of FIG. 4, discs, balls, other shapes, and other combinations and variations of these.

[0094] Thus, these various configurations and considerations may be used to provide predetermined and specific energies (e.g., W/cm^2) and predetermined and specific energy distributions patterns (e.g., W/cm^2 on a PV cell-by-cell basis), on the optically active surfaces of the PV assembly. Thus, using the embodiment of FIG. 5 by way of illustration, examples of different laser energies on a particular PV cell for exemplary energy distribution patterns are provided in Table I.

[0095] Table I.

Energy distribution pattern	PV cell 505	PV cell 506	PV cell 507	PV cell 508	PV cell 509	PV cell 510
1	200 W/cm^2	200 W/cm^2	200 W/cm^2	200 W/cm^2	200 W/cm^2	200 W/cm^2
2	200 W/cm^2	200 W/cm^2	200 W/cm^2	200 W/cm^2	0 W/cm^2	200 W/cm^2
3	100 W/cm^2	200 W/cm^2	200 W/cm^2	100 W/cm^2	10 W/cm^2	100 W/cm^2
4	25 W/cm^2	75 W/cm^2	75 W/cm^2	25 W/cm^2	350 W/cm^2	200 W/cm^2
5	300 W/cm^2	200 W/cm^2	50 W/cm^2	10 W/cm^2	50 W/cm^2	100 W/cm^2

[0096] In general the energy distribution pattern of the laser beam as it strikes the surfaces of the laser PV assembly, and in particular the optically active surfaces of

that assembly, may be in a predetermined energy distribution pattern. This predetermined energy distribution pattern can address, and preferably maximize, thermal issues, efficiency issues, and back reflection issues.

5 **[0097]** Energy distribution pattern 1, from Table I is a uniform pattern as projected on the optically active surface, which in this example is the interior of a sphere. This uniform pattern may be employed with and in view of the ability to have photocell efficiency optimized for a given power density.

10 **[0098]** Energy distribution pattern 2, from Table I is a uniform pattern with a black out, as projected on the optically active surface, which in this example is the interior of a sphere. The black out may be obtained by optics and may further be shaped and positioned to address and minimize back reflections.

15 **[0099]** Energy distribution pattern 3, from Table I is a linear pattern as projected on the optically active surface, which in this example is the interior of a sphere. This pattern provides for the use of simple, durable and less expensive optics.

20 **[00100]** Energy distribution pattern 4, from Table I is Gaussian pattern as projected on the optically active surface, which in this example is the interior of a sphere. This energy distribution pattern requires no optical modification of most beams as they exit the fiber face, e.g., no optics are needed between the fiber face from which the laser beam is launched and the optically active surface.

25 **[00101]** Energy distribution pattern 5, from Table I is asymmetric pattern as projected on the optically active surface, which in this example is the interior of a sphere. Such a pattern may be used to address asymmetries in abilities to dissipate heat, or asymmetries (or other design constraints) arising from the placement of the laser PV assembly in a tool, robot, or ROV.

30 **[00102]** Moreover, in addition to applications in subsea equipment, these laser-photovoltaic assemblies can be employed in drilling, monitoring, logging and measuring activities associated with creating boreholes, such as boreholes for the exploration and production of hydrocarbons and geothermal energy. Further these laser-photovoltaic assemblies may have military applications, manufacturing applications and other applications, where the use of a high power optical fiber, and especially the very thin and light weight characteristics of such fibers, to deliver high power laser energy to a

remote location, and especially a small or otherwise difficult to access location, is desirable; and it is further desirable to convert some or all of the delivered high power laser energy into electrical energy.

[00103] In general, the high power laser systems may include, conveyance
5 structures and deployment systems for use in delivering high power laser energy over great distances, without substantial power loss, and to work areas where the high power laser energy may be utilized. Preferably, the system may include one or more high power lasers, which are capable of providing: one high power laser beam, a single combined high power laser beam, multiple high power laser beams, which may or may
10 not be combined at various points or locations in the system, or combinations and variations of these. Long distance high power laser conveyance structures and deployment systems are provided in US Patent Application Publication Numbers 2010/0044106, 2010/0044103 and 2010/0215326, and in pending US Patent Application Serial Numbers 12/840,978, 13/210,581, 61/493,174; the entire disclosures
15 of each of which are incorporated herein by reference.

[00104] A single high power laser may be utilized in the system, or the system may have two or three high power lasers, or more. High power solid-state lasers, specifically semiconductor lasers and fiber lasers are preferred, because of their short start up time and essentially instant-on capabilities. The high power lasers for example
20 may be fiber lasers or semiconductor lasers having 5 kW, 10 kW, 20 kW, 50 kW or more power and, which emit laser beams with wavelengths in the range from about 455 nm (nanometers) to about 2100 nm, preferably in the range about 800 nm to about 1600 nm, about 1060 nm to 1080 nm, 1530 nm to 1600 nm, 1800 nm to 2100 nm, and more preferably about 1064 nm, about 1070-1080 nm, about 1360 nm, about 1455 nm,
25 1490 nm, or about 1550 nm, or about 1900 nm (wavelengths in the range of 1900 nm may be provided by Thulium lasers).

[00105] For example a preferred type of fiber laser would be one that includes
20 modules or more. The gain bandwidth of a fiber laser is on the order of 20 nm, the linewidth of the free oscillator is 3 nm, Full Width Half Maximum (FWHM) and may
30 range from 3 nm to 5 nm (although higher linewidths including 10 nm are envisioned and contemplated). Each module's wavelength is slightly different. The modules

further each create a multi-mode beam. Thus, the cumulative effect of combining the beams from the modules is to maintain the Raman gain and the Brillouin gain at a lower value corresponding to the wavelengths and linewidths of the individual modules, and thus, consequently reducing the SBS and SRS phenomenon in a fiber when the
5 combined beams are transmitted through the fiber. An example of this general type of fiber laser is the IPG YLS-20000. The detailed properties of which are disclosed in US patent application Publication Number 2010/0044106.

[00106] In some embodiments, a fiber laser emitted light at wavelengths comprised of 1060 nm to 1080 nm, 1530 nm to 1600 nm, 1800 nm to 2100 nm, diode
10 lasers from 400 nm to 1600 nm, CO₂ Laser at 10,600 nm (however, CO₂ laser do not couple into conventional fused silica optical fibers, and thus, a solid fiber capable of transmitting these wavelengths, or hollow light pipe or later developed optical means may be utilized to transmit this laser beam), or Nd:YAG Laser emitting at 1064 nm can couple to the optical fibers. In some embodiments, the fiber can have a low water
15 content. Preferably, the water content of the fiber should be as low as is possible.

[00107] Examples of lasers, and in particular solid-state lasers, such as fibers lasers, are set forth in US Patent Application Publication Numbers 2010/0044106, 2010/0044105, 2010/0044104 and 2010/0215326 and in pending US Patent Application
20 Serial Numbers 12/840,978, 13/210,581 and 61/493,174; the entire disclosures of each of which are incorporated herein by reference. Further diode lasers, and for example, such lasers having a wavelength of from about 0.9 microns to 2 microns may be utilized.

[00108] In general, lasers propagate laser beams having coherent light. All of the lasers described or discussed in this specification propagate laser beams having
25 coherent light.

[00109] Generally, coherent light is any light having light waves that are in phase with one another. Coherent light can be distinguished from incoherent light, such as for example sunlight and light from a household light bulb. Further, coherence is related to the ability of light to show interference effects. Thus, a light field may be
30 coherent when there is a fixed phase relationship between the electric field values at different locations or at different times. Partial coherence means that there is some

(although not perfect) correlation between these phase values. A partially coherent beam or light will nevertheless be considered within the general definition of "coherent" or "coherent light."

5 **[00110]** In general, coherence may also further be characterized as temporal and spatial coherence. In general, spatial coherence is expressed through the output being a narrow beam that is diffraction limited. Spatial coherence is characterized by a strong correlation between the electric fields at different locations across a beam profile. For example, within a cross-section of a beam from a laser with diffraction-limited beam quality, the electric fields at different positions oscillate in a totally correlated way, even
10 if the temporal structure is complicated by a superposition of different frequency components. In general, temporal (e.g., longitudinal) coherence relates to a polarized wave at a single frequency whose phase is correlated over a relatively large distance (the coherence length) along the beam. Temporal coherence is characterized by a strong correlation between the electric fields at one location but different times. For
15 example, the output of a single-frequency laser can exhibit a very high temporal coherence, as the electric field temporally evolves in a highly predictable fashion: it exhibits a clean sinusoidal oscillation over extended periods of time.

[00111] Unless specifically provided otherwise, the terms coherent, coherent light, coherent light source and similar terms should be given their broadest possible
20 meaning and would include all laser beams, and would include a collection of one, two or a plurality of coherent sources or beams combined together. The terms coherent, coherent light, and coherent light source expressly exclude the sun, solar energy and sunlight.

[00112] In Table II there are provided examples of various photovoltaic
25 materials and their preferred wavelengths for maximum efficiency (e.g., the highest conversion rate of laser energy of a particular wavelength into electric energy). It being understood that other, new, combined, or tailored PV materials, in addition to those set forth in Table II for a laser beam having a specific wavelength, for a multimode laser beam having one, two, three or more wavelengths, or for a range of wavelengths, may
30 be utilized in addition to the materials provided in Table II. Here photovoltaic material

refers to the material that would be used for the base layer of a PV cell, the primary layer where the laser light would be absorbed and converted to electrical energy.

[00113] Table II

Photovoltaic Material	Band Gap	Preferred Laser Wavelength	Preferred Laser Energy
$\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{As}$ ($0 \leq x \leq 0.45$, $0 \leq y \leq 1$)	0.50 - 2.00 eV	400 nm - 2100 nm	0.59 – 3.10 eV
$\text{Si}_x\text{Ge}_{1-x}$ ($0 \leq x \leq 1$)	0.66 – 1.11 eV	870 nm – 1880 nm	0.66 – 1.42 eV
$\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{P}$ ($0 \leq x \leq 0.80$, $0 \leq y \leq 1$)	1.35 – 2.40 eV	400 nm - 925 nm	1.34 - 3.10 eV
$\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{N}$ ($0 \leq x \leq 0.5$, $0.1 \leq y \leq 1$)	0.65 – 3.10 eV	400 nm – 1900 nm	0.65 – 3.10 eV
$\text{In}_x\text{Ga}_{1-x}\text{Sb}$ ($0 \leq x \leq 0.3$)	0.55 - 0.73 eV	1380 nm – 2100 nm	0.59 – 0.90 eV
$\text{In}_x\text{Ga}_{1-x}\text{N}_y\text{As}_{1-y}$ ($0 \leq x \leq 0.3$, $0 < y \leq 0.1$)	0.50 – 1.40 eV	870 nm – 2100 nm	0.59 – 1.42 eV
$\text{In}_x\text{Ga}_{1-x}\text{N}_y\text{As}_{1-y-z}\text{Sb}_z$ ($0 \leq x \leq 0.2$, $0 < y \leq 0.04$, $0 < z < 0.06$)	0.90 – 1.40 eV	870 nm – 1380 nm	0.90 – 1.42 eV
$\text{In}_x\text{Ga}_{1-x}\text{As}_y\text{P}_{1-y}$ ($0 \leq x \leq 1$, $0 \leq y \leq 1$)	0.50 – 2.26 eV	400 nm - 925 nm	1.34 - 3.10 eV

[00114] It should be understood that in addressing laser energy and band gaps, in general, each type of semiconductor or photovoltaic material has a specific band gap and a preferred laser energy. In addition to the preferred laser energy, the semiconductor materials may be used with any laser with having an energy higher than that material's band gap (with efficiency decreasing in proportion to the difference between the laser energy and the semiconductor band gap). Alloys, may also be used as photovoltaic materials.

[00115] In FIG. 13 there is provided a general embodiment of a laser photovoltaic cell that may be used in a laser PV assembly. The laser PV cell 1300 is cubic having a length 1307, a width 1308 and a height 1306. Although shown in this

embodiment as having generally a cube shape, the laser PV cell may be other shapes and configurations, such as for example cylindrical, cylindrical-oval, and other volumetric shapes. Generally the length of the laser PV cell may be from about 0.05 cm to about 40 cm, the width can be from about 0.05 cm to about 40 cm, and the height is about 0.25 to about 1000 μm (microns). Preferably, the length of the PV cell may be from about 1 cm to about 10 cm, the width can be from about 1 cm to about 10 cm, and the height of the active layers, not including the substrate, is about 0.5 to about 10 μm (microns). More preferably, the width and length are about 4 cm and the height of the active layers, not including the substrate, is about 4 μm . The specific cell dimensions depend on a number of factors, including the number of PV cells in the PV assembly, the PV material(s) used and whether or not the substrate is removed during device preparation.

[00116] The laser PV cell has a front 1301, which is intended to receive or be struck by the laser energy, e.g., the laser beam, and a back contact 1305. The front 1301 has a grid 1302, a pair of busbars 1303a, 1303b, and anti-reflective coating 1304. From the front 1301 to the back contact 1305, the cell 1300 may be made up of several layers of material, 1309, 1310, 1311, 1312, 1313. Electrical wires, contact, or leads, not show in the drawing, are electrically connected to the pair of busbars 1303a, 1303b and the back surface 1305. These wires are then used to facilitate the incorporation of the cell into a PV assembly for providing laser-electric power to an apparatus, such as an ROV or downhole tool.

[00117] In FIG. 13A there is shown an enlargement of the area shown by dashed circle 13A in FIG. 13. Thus, turning to FIG. 13A, the grid 1302 has a grid width 1320, a grid height 1321, and a grid-facing surface 1322. Generally, the ratio of the area of the grid-facing surface to the area of the front 1301 that is not covered by busbars 1303a, 1303b, provides the relative amount of the front surface (and thus in general the layers below) that is shielded or shaded from the laser beam, or the grid shadowing fraction. The smaller this ratio, the greater the number of photons from the laser beam that will pass through the anti-reflective coating 1304 and into layer 1309.

[00118] Thermal issues, back reflection issues and heat management issues for the busbars, and for the grid pattern, may be address and managed by the various

techniques and solutions provided in this specification. For example, laser beam patterns can be selected to avoid, minimize or manage the striking of the busbars, grids or both, with the laser energy, *e.g.*, black outs, *i.e.*, locations where there is little or no laser energy, in the pattern can be created that follow, are identical to, or are

5 substantially identical to the grid pattern, busbars or both. Thus, for example, optics such as diffractive or refractive optics, *e.g.*, a Fresnel lens for a concentric grid pattern, could be used to create a beam distribution to minimize or avoid the laser striking the grid pattern, the busbars or both. Interference patterns generated in the beam could
10 used to create a beam distribution to minimize or avoid the laser striking the grid pattern, the busbars or both. Alone, or in conjunction with beam patterns, providing additional, tailored, or enhanced heat dissipation may be used. Angles and reflective surfaces to reflect or redirect the light from the busbar or grid to not absorb the light and redirect toward an optically active surface may be used alone or in conjunction with the other means for addressing, back reflections, thermal issues and other issues related to
15 the laser beam striking the grid, busbars or both.

[00119] Layers 1309, 1310, 1311, 1312, 1313 may be made of the same material or they may be made from different materials. A laser PV cell may have more or less layers. Thus, for example the laser PV cell could be a one-layer cell, or it could
20 be a multilayer cell having, two, three, four, or more layers; and may have tens of layers, such as for example if the cell is a multi-junction or metamorphic cell. In general in determining the materials for the layers, and their respective placement relative to the other layers and the front or front surface, consideration should be given to the laser wavelength(s), the materials band gap, the materials lattice constant, the doping levels and the thickness of the layers.

25 **[00120]** In general, using a single-junction laser PV cell as an example, layer 1311 is the base and has a material composition and band gap tailored to the laser energy and it absorbs the majority of the laser light. Layer 1310 is the emitter. The emitter is a thick, highly doped layer designed to have minimal sheet resistance while also having a band gap larger than the laser energy, so that it will not absorb a
30 significant fraction of the laser light. The front most layer or window, layer 1309, has a band gap larger than layer 1310. Layer 1311 is the back surface field and it has a

larger band gap than layer 1310. (Layer(s) 1313 may be a buffer layer, contact layers and/or include the substrate.)

[00121] Laser PV cells may include more than one junction, such as two junctions or three junctions. Each individual junction is composed of one or more layers, and connected to the other junctions in series via tunnel diodes or tunnel junctions. Thus, monolithic multi-junction laser PV cells may include tens of layers stacked on top of each other. If the laser light contains a single wavelength, then the base layers of each junction will typically be the same material and same band gap, with only the thickness varying. The thickness of the base layer will be least for the top junction and most for the bottom junction, so that the currents produced by each junction are substantially the same. If the laser light contains more than one wavelength, then the PV cell will be designed so that the highest energy (lowest wavelength) laser light will be absorbed by the top junction and the lowest energy (highest wavelength) laser light will be absorbed by the bottom junction. Thus the base layer of the top junction will have a higher band gap than the base layer of the bottom junction.

[00122] Generally, the current that a single multi-junction PV cell produces is limited to the lowest amount of current that any single junction in the cell creates. Thus, it may be desirable to configure the junction of the PV cell, the energy, and energy distribution of the laser beam(s), the wavelength(s) of the beam(s), relative thickness for the layers, the shape, size and properties of the optically active surface of the PV assembly, the overall configuration of the laser-PV assembly, and combinations and variations of these and other factors set forth in this specification and known to those of skill in the photovoltaic arts, such that each junction produces essentially the same, if not the same, amount of current. Similarly, such configurations of single multi-junction PV cells could be applied to other and more complicated multi-junction cells. For, example, based upon the absorption constant for the material of a layer intended to absorb a particular wavelength of laser beam and other considerations, a relative thickness for a layer can be determined to thus, in essence, match the current produced by that layer with the other layers in the cell. For a cell designed to absorb and convert multiple laser wavelengths concurrently, the laser power intensities may also be

adjusted to produce essentially the same amount of current in each junction. As such, there is contemplated an embodiment of a laser-PV assembly having PV cells in which, based upon predetermined factors and configurations, provide a predetermined current per junction, which predetermined current may be slightly different from one PV cell junction to the other, substantially different from one PV cell junction to the other, essentially the same from one PV cell junction to the other, the same from one PV cell junction to the other and combinations and variations of these.

[00123] Again, using the schematic of FIG. 13 for illustrative purposes, in a metamorphic PV cell, layer 1313 may represent a set of metamorphic buffer layers used to transition the lattice-constant. Metamorphic buffer layers may also compose other layers.

[00124] The ability to provide high laser power to the PV assemble (e.g., by means of a single fiber delivering 5, 10, 20, 30 kW, or more kW, or by providing multiple fibers each providing 5, 10, 20, 30 or more kW of laser power), the ability to shape, focus and direct the laser beam, beams or combined beam, to provide predetermined high energy patterns to a PV assembly and the PV cells in that PV assembly, the ability to select and match both the laser beam wavelength (or wavelengths for a multimode laser beam) and intensity (or intensities for a multimode laser beam) and the PV cells and their materials to enhance efficiency of the cells, provides for laser PV cells and laser PV assemblies of the present invention that are capable of providing greater, and substantially greater power than is obtained from conventional solar cells and solar panels. In particular, the ability to use in a predetermined manner a coherent light source, and coherent light energy, provides substantial advantages, and obtains results believed to be unobtainable, with solar or other incoherent light sources. These advantages include, for example, the ability to operate in harsh, remote and difficult to access locations, and locations in which there is little or no sun light, and location in which it would be difficult, if not essentially impossible, to provide sufficient energy by an incoherent light source to perform intended operations of a system or tool, for example an ROV. Such locations would include, for example, the interior of a pipeline, a location under the surface of a body of water, a location on the sea floor, and a location under the surface of the earth, such as in a borehole or mine. By the specific design of the

laser PV cells and assemblies, the output current and voltage can be tailored, as well. For example, using a three-junction PV cell will enhance the voltage and decrease the current compared to a single-junction PV cell, holding other factors constant.

[00125] In laser PV cells, for example those that may be used to power an ROV, the currents for a cell may be greater than about 10 amps, greater than about 100 amps, greater than about 1,000 amps, greater than about 3,000 amps, from about 100 amps to about 6,000 amps, from about 1,000 amps to about 5,000 amps, and from about 2,500 amps to about 3,500 amps. The specific current per cell will depend on the design of the PV assembly, including the area of the individual PV cell, the incident laser intensity, the grid design, the cell efficiency, and the number of junctions in the solar cell. For example, for a PV assembly consisting of a single PV cell with one junction, the current may be greater than 1000 amps. For a PV assembly consisting of 100 PV cells that each have two junctions, the current may be 10 – 50 amps. The current of the PV assembly will depend on the same factors as the current per cell, as well as the number of PV cells in the assembly and how the cells are connected together in series and in parallel. To address and handle these high currents the amount of grid shadowing, or the fraction of the front cell surface that is covered by the grid on the PV cell, should preferably be substantially larger than for conventional PV cells. Thus, and again referring to FIGS. 13, 13A for the purposes of illustration, the total number of grid lines, or members of the grid 1302 could be increased on the front 1301 of the cell 1300, the height 1321 of the grid could be increased, the width 1320 of the grid could be increased and combinations and variations of these. The grids may be made from metals having good electrical conductivity, thus, for example they may be made from aluminum, copper, gold, nickel and/or silver, preferably made primarily from aluminum, copper, gold, nickel and/or silver and more preferably are primarily composed of silver. These metals compose the majority of the grid, but other elements are frequently used at the semiconductor-metal interface to promote adhesion and low resistance, such as chromium, titanium, nickel, platinum, and germanium. The grid metals are deposited by evaporation or are electroplated.

[00126] To minimize the resistance of the grid, and thus reduce the amount of heat loss, (e.g., reduce the loss of electrical energy to heat and the need to manage that

heat), the height 1321 of the grid, the width 1320 of the grid, and both can be increased. Thus, the grid height may be about $4\ \mu\text{m}$, about $5\ \mu\text{m}$, about $4\text{--}5\ \mu\text{m}$, greater than about $4\ \mu\text{m}$, greater than about $10\ \mu\text{m}$, greater than about $20\ \mu\text{m}$ and greater. The grid width may be about $1\ \mu\text{m}$, about $2\ \mu\text{m}$, about $5\ \mu\text{m}$, about $10\ \mu\text{m}$ and greater than about $1\ \mu\text{m}$, greater than about $2\ \mu\text{m}$, greater than about $5\ \mu\text{m}$ and greater than about $10\ \mu\text{m}$. Thus, for example, a grid may have a grid height in the range of about $5\text{--}10\ \mu\text{m}$ and the grid width in the range of about $5\text{--}10\ \mu\text{m}$. The configuration, pattern, shading, height and width of a grid may be the same, substantially the same, difference, or substantially different, within a PV cell and from one PV cell to the next in a particular laser-PV assembly, based upon factors, such as, back reflection mitigation and management, the configuration of the optically active surface of the PV assembly, size constraints on the PV assembly, and heat management.

[00127] Preferably, the grid height will be maximized with the grid width being minimized. In this manner for any given grid pattern the greatest cross-sectional area of a grid member is obtained, while minimizing the total area of the grid facing surface 1322. Minimizing the total area of the grid facing surface 1322, minimizes the amount of laser energy that is blocked by the grid from entering the cell through the anti-reflective coating 1304 on the front 1301 of the cell 1300.

[00128] Additionally, the grid may be configured and positioned to minimize any shadows that may be created by the placement or position of the laser PV cells in the laser PV assembly, and to enhance the amount of laser energy that enters the cell. In this manner the optically active surface of the laser-PV assembly may be optimized. Thus, for example, the facing surface 1322, may be configured to be pointed, curved or angled. Although the grids are shown to be normal to the facing surface 1322, they could be placed on different angles, which angles make the grid members essentially parallel with the rays for the laser beam and thus minimize any shadowing effect that may occur. For example, in the embodiment of a laser PV assembly of FIG. 3 the rays of the laser beam 311, will be striking a PV cell at a particular angle, e.g., 315. The grating for that PV cell can be specifically positioned and matched with this angle, to minimize any shadow that the grating may form, and to thus maximize the amount of

laser energy entering the cell. In addition, optics may be used to direct the incident light away from the grid lines, minimizing or eliminating losses due to grid shadowing.

[00129] Additionally, the placement and configuration of the grating on each PV cell, as well as the overall grating configuration of the PV assembly that is obtained
5 when the PV cells are positioned in the PV assembly, may be used to manage and preferably minimize back reflections, *e.g.*, high power laser energy that reflects back in the direction of the fiber, optics or both and which can be very detrimental to the laser delivery system.

[00130] The anti-reflective coating 1304 (again using the schematic of FIG. 13
10 for illustrative purposes) should be selected to, and capable of handling the laser wavelengths and powers that are contemplated by the present inventions. The anti-reflective coatings have reflection losses of less than ten percent, and preferably less than one percent, in the wavelength range of the incident laser(s). The anti-reflective coating will have one or more thin film layers with thicknesses chosen to minimize
15 reflection over the wavelength range of the incident laser(s). The anti-reflective coating may consist of one or more layers of Al_2O_3 , CeO , InAlP , MgF_2 , Ta_2O_5 , TaO_x , SiO_2 , TiO_2 , SiN , and ZnS . For example, the coating could consist of 65 nm of ZnS and 125 nm of MgF_2 . Nanostructures and surface texturing may also be used to reduce reflection losses and to change the angle of laser light as it travels through the PV cell, so that
20 less PV cell material is needed.

[00131] The high power laser and electrical energies that will be present when using a laser PV cell and a laser PV assembly combined with the inability to convert all (100%) of the laser's light energy into electrical energy, as well as, the inability to transmit all of the electrical energy away from the PV cell, will create heat. This heat
25 may be viewed as waste heat and removed by a cooling system associated with the PV assembly. The system may be a closed loop system, similar to systems that are used to cool high power lasers, such as fiber lasers. Preferably, however, for ROV applications and other applications where the laser system will be at least partially operating in an environment that provides a large heat sink, such as the ocean and in
30 particular the deep ocean, the system may be an open loop system that takes in sea water from outside the ROV flows the sea water over, around, or by the PV assembly to

cool the assemble, and remove the excess heat by returning it to the sea with the outflow. The heat could also be captured and used for secondary generation of electricity, by for example a Sterling Engine or a thermal electric device.

[00132] Many of the PV materials have very narrow temperature ranges in which they will operate at maximum conversion efficiencies. In general, and by way of example, a 10 degree C increase in temperature may cause a loss of conversion efficiency of about 1.5%. Thus, preventing the heating of the PV cells and the PV assembly may be important to efficient operation.

[00133] The band gap of a material changes with temperature, increasing as temperature decreases. Thus the optimal material and composition used as the base layer in laser PV cells depends on the intended operating temperature of the device. For example, an optimal material for converting a 1080 nm laser at 25°C is $\text{In}_{0.21}\text{Ga}_{0.79}\text{As}$. However, for the same laser at 85°C, the optimal material is $\text{In}_{0.23}\text{Ga}_{0.77}\text{As}$ and at 5°C it is $\text{In}_{0.20}\text{Ga}_{0.80}\text{As}$. Metamorphic growth techniques are helpful in tuning material composition, and therefore band gap, to be optimized for a given laser wavelength range at a given operating temperature, because they remove the constraint of lattice matching to a substrate. In choosing the material composition to use for laser PV cells, the operating temperature range of the application is taken into account in order to maximize efficiency.

[00134] In situations where there may be a wide range of environmental temperatures, such as for example operating at or near the surface of the Gulf of Mexico and then at depths of 10,000 feet under the surface, the selected band gap (tuned band gap) and cooling methods (thermal management) may be optimized to provided the greatest efficiency over the anticipated temperature ranges. The thickness and materials of the back contact (for illustrative purposes back contact 1305 of the embodiment of FIG. 13) may primarily consist of aluminum, copper, gold, nickel or silver, and may be alloys of these metals and other elements. As with the top contact, other elements are frequently used at the semiconductor-metal interface to promote adhesion and low resistance, such as chromium, titanium, nickel, platinum, and germanium.

[00135] Thus, for a given power distribution on a given optically active surface and a given heat dissipation orientation, a steady state temperature distribution of the photocells will occur. This temperature distribution can be effected and utilized by selection of photoactive materials that for the given parameters of the system optimum PV efficient is achieved and maintained at the steady state distribution.

[00136] The laser and laser systems have the capability to provide multimode laser beams. Thus, for example, a 20 kW laser beam may have 5 different wavelength, e.g., 1066, 1068, 1070, 1773, 1075 nm. Further, these different wavelengths in the multimode beam may have different power levers, e.g., the 1066 may be 4 kW, while the 1070 beam may be 10 kW. This ability to provide a high power multimode laser beam to a PV cell and PV assembly in a remote location provides the ability to match, or tailor the multimode laser beam characteristics (e.g., power, wavelength) and the construction of a PV cell and assembly (e.g., layer materials, band gap, thickness, relative placement to other cells, optics used to alter the laser beam). For example, a multijunction PV cell may have individual junctions tailored to the different wavelengths of the laser beam to maximize the voltage out of the PV cell. This is especially important for high efficiency when the wavelengths in the multimode beam are substantially different from each other. In addition, optics may be used to split a multimode laser beam and direct the different wavelengths to different PV cells, each tailored for a specific laser wavelength.

[00137] Pulsed lasers may be used to transmit power while reducing losses due to heating and cooling system requirements. Further a single mode laser may be utilized for example in the ROV, TMS, subsea equipment, robot, or tool. In this manner the single mode laser is placed in optical communication with the high power long distance umbilical and the laser energy from the umbilical is re-lased by the single mode laser as a single mode laser beam. The single mode beam may be further utilized in applications such being directed towards a PV assembly for conversion into electrical energy, or with a laser cutting tool.

[00138] Turning to FIG 17 there is provided and a spectrum of a high power laser beam from an IPG YLS 20000 laser operated at a duty cycle of 10% for a 1 kHz

pulse rate. The high power laser beam was transmitted through the 2 km fiber. The spectrum for 4,868 Watt power is shown at FIG. 17. The absence of SRS phenomenon is clearly shown in the spectrum. (As used herein terms such as, "absence of", "without any" or "free from" a particular phenomena or effect means that for all practical purpose the phenomena or effect is not present, and/or not observable by ordinary means used by one of skill in the art) Further the linear relationship of the launch (input) and output power confirms the absence of SBS phenomena. Further details regarding this high power laser beam and spectral may be found in US Patent Application Publication No. 2010/0215326, regarding figure 4 of that application and the associated description, the entire disclosure of which is incorporated herein by reference.

[00139] Turning to FIG. 18 there is provided a spectrum of a high power laser beam from an IPG YLS 20000 laser operated to provide a continuous wave. The laser beam was transmitted through the 2 km fiber. The spectrum for 4 modules at 100% laser setting is shown at FIG. 18. The absence of SRS phenomenon is clearly shown in the spectrum. Further the linear relationship of the input and output power confirms the absence of SBS phenomena. Further details regarding this high power laser beam and spectral may be found in US Patent Application Publication No. 2010/0215326, regarding figure 5 of that application and the associated description, the entire disclosure of which is incorporated herein by reference.

[00140] Turning to FIG. 19 there is provided a spectrum of a high power laser beam from an IPG YLS 20000 laser operated to provide a continuous wave. The laser beam was transmitted through a 2 km fiber. The spectrum for 10 modules at 9,300 W output power, 90% laser setting is shown at FIG. 19. The absence of SRS phenomenon is clearly shown in the spectrum. Further the linear relationship of the input and output power confirms the absence of SBS phenomena. Further details regarding this high power laser beam and spectral may be found in US Patent Application Publication No. 2010/0215326, regarding figure 6 of that application and the associated description, the entire disclosure of which is incorporated herein by reference.

[00141] EXAMPLE 1

[00142] Turning to FIG. 20 there is shown an embodiment of a laser PV assembly having 1 single junction PV cell 2000 for use with a laser beam having a spectrum of the type shown in FIGS. 16-19. The single junction PV cell 2000 has a grid design 2002 optimized for low resistance, including 4 busbars 2003a, 2003b, 2003c, 2003d. The single junction PV cell 2000 has an antireflective coating 2004. The PV cell 2000 has a window 2010, a highly doped, low resistance emitter 2011, a base with band gap tailored to the laser energy 2012, a back surface field 2013, buffer layer(s) and/or substrate 2014 and a back contact 2005.

[00143] EXAMPLE 2

[00144] Turning to FIG. 21 there is shown an embodiment of a laser PV assembly having 1 triple junction PV cell 2100 for use with a laser beam having a spectrum of the type shown in FIGS. 16-19. The triple junction PV cell 2100 has a grid design 2102 optimized for low resistance, including 4 busbars 2103a, 2103b, 2103c, 2103d. The triple junction PV cell 2100 has an anti-reflection coating 2104. The PV cell has a top junction 2110, a middle junction 2112 and a bottom junction 2114. The junctions are connected together in series by tunnel junctions 2111 and 2113. Each of the top 2110, middle 2112 and bottom 2114 junctions has an emitter, base, back surface field, and may also include a window and buffer layer(s). The base of each junction is the same material, with a band gap tailored to the laser energy. The thickness of the base in each junction is chosen such that the current produced by each junction is approximately the same. Thus, the base is thinnest in the top junction 2110 and thickest for the bottom junction 2114. Current is collected from the busbars 2103a, 2103b, 2103c, 2103d and the back contact 2105.

[00145] EXAMPLE 3

[00146] Turning to FIG. 22 there is shown an embodiment of a laser PV assembly 2200 having 4 PV cells 2201, 2202, 2203, 2204 connected in series for use with a laser beam having a spectrum of the type shown in FIGS. 16-19. The 4 PV cells 2201, 2202, 2203, 2204 may all have the same design, which may be similar to those shown in Examples 1 and 2. The cells are connected in series by wire bonds 2205 or other interconnections so that the total current out of the PV assembly 2200 is the lowest of the currents produced by the 4 PV cells 2201, 2202, 2203, 2204, and the

voltage out of the assembly is approximately the sum of the voltages of the 4 PV cells 2201, 2202, 2203, 2204 when operating at that single current. In this illustration, power is extracted from the assembly by leads 2206.

[00147] EXAMPLE 4.

5 **[00148]** What may be characterized as an inverse laser diode may be used as a Photo-convert assembly. In the inverse laser diode an absorptive medium is selected for a for the particular wavelength of the laser, which is excitable for the emission of electrons. The medium can be a quantum well device, *e.g.*, an energy potential is set up on a medium, which requires a predetermined energy level to excite an electron, or
10 ionic particle, out of its place. The width of the active region of the quantum well will define the wavelength of active absorption.

[00149] Generally, in the operation of high power laser systems the management or mitigation of back reflections in designing the system may be a factor, and in some embodiments may be a significant factor. Back reflections may be
15 managed in several ways, including the selective placement of absorbent and reflective surfaces in the laser beam launch area, the use of materials and components designed to handle back reflections (*see, e.g.*, US Patent Application Serial Number 61/493,174, the entire disclosure of which is incorporated herein by reference.)

[00150] Thus, for example in the embodiment of FIG. 5 the radius of curvature
20 of the sphere should be such it is larger than the distance from the bottom of the sphere to launch point of the laser. In this manner any focusing effect of the spherical shape would focus the back reflections well beyond the laser fiber face and any optics.

[00151] Turning to FIG. 14, there is provided a cross-sectional perspective view of an embodiment of laser-PV assembly 1401 in the shape of a Wood's Horn,
25 which may have enhanced back reflection management properties. The PV assembly has an opening 1402 where the laser beam enters. The inner surface 1406 of the PV Assembly 1401 has a multiplicity of PV cells, *e.g.*, cell 1403. The inner surface 1406 curves and narrows, (like the interior of a cornucopia) until it reached end 1405.

[00152] Turning to FIG. 15, there is provided a cross-sectional view of an
30 embodiment of a laser PV assembly 1501. The laser PV assembly 1504 has an inner surface 1502, which is an optically active surface, and has a length 1504. At the end

1505, which is the furthest point from the opening 1506 where the laser beam enters, there is provided a conical inner surface 1503, which may mitigate the effect of back reflections by minimizing the likelihood that they would travel back up the assembly and out the opening 1506. The length of the assembly and the angle and size of the cone, can be adjusted, based upon laser beam properties, to obtain the most efficient minimization of back reflections. In addition to a cone, other shapes may be employed at end 1505, or at other points along the length 1504, to prevent or minimize the likelihood that any back reflections travel back up the assembly 1501 and out opening 1506.

10 **[00153]** In FIG. 16. there is provided a cross-sectional view of a PV assembly 1600 having an inner surface 1602 and a tapered conical end section 1603. Based upon the laser beam properties the shape and depth of the tapered conical end 1603 can be adjusted to obtain the most efficient minimization of back reflections.

15 **[00154]** In the following embodiments of sub-sea laser equipment, a single or multiple laser cutters may be utilized. Thus, if only a single optical fiber is used a source of stored energy may be employed to perform other mechanical operations, such as operation of the thrusters, cameras or sensors, so that all of the laser power is used by the cutter, or at least available to the cutter during cutting operations. Thus, batteries could be utilized, a super capacitor, a fly wheel, or other storage device may be utilized.

20 **[00155]** In FIG. 6 there is provided a schematic of an embodiment of a laser housing and spool, and control assembly for use with a laser-ROV. A laser housing 600 has a high power laser 601 that has a chiller 602 and lines 604 and 605 for circulating cooling fluids. A high power optical fiber 607 optically connects the laser 601 and a high power beam switch 606. The beam switch 606 is optically associated with two, or more, high power laser fibers 609 and 608. High power fiber 609 is optically associated with an optical slip ring 613 on spool 610 and fiber 608 is available to other uses, such as to power a high power laser cutting tool associated with an ROV. The spool 610 has a high power laser tether 614 wound around it in a spiral fashion. The spool has a drive and control mechanism 611 and supports 612.

[00156] Further teachings and details of the spool and optical slip ring are disclosed in US patent application Publication No. 2010/0044106. In addition to a spool and optical slip ring, a creel may be employed as a means to handle and wind and unwind a high power laser tether, or other mechanical and opto-mechanical devices
5 may be used. Examples of such devices are disclosed in US patent application Publication No. 2010/0044106, and in US patent application serial number 13/210,581, the entire disclosures of each of which are incorporated herein by reference.

[00157] There is also shown in FIG. 6 an example of an embodiment of a communication and control network for the operation of a laser-ROV system. Thus,
10 there is shown a controller 603 that is in data and control communication with the laser 601 and beam switch 606 as represented by dashed line 618. The controller 603 is also in data and control communication with the spool drive mechanism 611 as represented by dashed line 617. Data may further be obtained from the ROV, either by way of the high power laser fiber in tether 614 or by way of a separate data fiber or line
15 incorporated with into the tether 614. If the data is being returned by way of the high power fiber in tether 614, that information can be communicated to the controller 603 either by way of dashed line 616, and or 615.

[00158] In FIG. 7 there is provided an embodiment of a laser-ROV system associated with an offshore drilling rig. Thus, a support vessel 700, which may be a drill
20 ship, has a laser-ROV system 708 that has a laser housing 701, a high power laser optical fiber 702 that optically connects the laser (not shown) in the laser housing 701 to the spool 703. The spool has a high power laser tether 704 wound around it. The tether 704 could be greater than 500 ft, greater than 1000 ft, greater than 5,000 ft and 10,000 ft or greater in length. The support vessel 700 is on the surface 720 of a body of
25 water 724 having a seafloor 725 or bottom. There is also provided a tether-handling device 705 for managing the tether with respect to the support vessel and other structures as it is unwound and wound. A heave compensation device or system may also be utilized with the laser-ROV system 708 and may, for example, be associated with the spool 703, the handling device 705, or the deployed tether 704.

[00159] The laser-ROV 706 is powered by the high power laser energy that is
30 transmitted by the laser tether 704. The laser-ROV has a laser delivery assembly 707

that has a high power laser tool, for example, a high power laser cutter. In this figure, the laser-ROV has been deployed by the drill ship during drilling operations and has proceeded to near the seafloor 725 where a BOP is located. The laser delivery assembly may be used to cut and/or remove unwanted material from the outside of the BOP.

[00160] Although not shown in any of the figures, an ROV having a laser cutter could be used to clean and remove unwanted material from the hull of a floating offshore platform (FSOP) and its associated subsea equipment and pipes. These platforms are very large and can remain at sea, on station for extended periods of time. Further, a submersible robot could be affixed to the hull of the FSOP and this robot could be fitted with a laser cutter. The robot would then automatically, or as directed, move about the hull of the ship removing unwanted material therefrom.

[00161] In FIG. 8 there is shown a laser-ROV having a laser tether management system. Thus, support vessel 800 has a lifting device 808 and a lifting cable 809 that is affixed by connector 811 to and supporting a tether management system (TSM) 810. The support vessel 800 also has a spool for delivering electrical energy to the TSM 810 via electric cable 812. The TSM 810 has a laser-ROV system 801 that has a laser housing 802, a high power fiber 803 optically connecting a high power laser (not shown) in the laser housing 802 with an optical slip ring 806 on spool 804. Spool 804 has supports 805 that are connected to, or otherwise part of or affixed to, the frame 813 of the TSM 810. The spool 804 contains high power laser tether 807 that can be unwound as laser powered ROV 821 leaves the TSM 810 by way of opening 826. In this embodiment the laser powered ROV 821 has a laser cutter tool 822 that is also powered by the laser tether 807. (Although not shown, in this embodiment the laser tether may have two high power optical fibers or there may be a single optical fiber and a beam splitter, beam switch, or both, in the ROV to direct the laser energy to power the ROV and the laser cutting tool.)

[00162] In the illustration of FIG. 8 the TSM 810 and ROV 821 have been deployed by the support vessel on the surface 820 of the body of water 824. The TSM 810 is deployed at or near the seafloor 825, but a substantial horizontal distance away from the object 823 to be worked upon by the ROV's laser cutter. This distance from

the TSM to the object could be about 500 ft or greater, about 1000 ft or greater, about 5000 ft or greater or about 10,000 feet or greater. The ROV will then move away from the TSM and toward the location of the object 823, which could be an underwater mine, explosive, listening device, or other type of military subsea equipment. Once in position
5 the laser cutter could be fired disabling the object. However, if the ROV is at or near the object and it should explode during the disablement procedure the ROV could be destroyed or damaged. Thus, the laser cutting tool, or a portion of it can be affixed to the object, the ROV can then back away, while unwinding or otherwise playing out extra high power optical fiber that remains connected to the laser cutter on the object. In this
10 way once the ROV is far enough removed from the object the laser can be fired without risk to the ROV.

[00163] In FIG. 9 there is shown a work vessel having a laser-ROV system on station with a drilling rig. Support vessel 901 is on the surface 920 of a body of water 924 having a bottom or seafloor 925. The support vessel has a laser-ROV system 905,
15 as described herein, and has deployed the laser-ROV 910 into the body of water 924. The laser-ROV is in optical communication, via laser tether 907, with a high power laser not shown in laser support system 905. The laser ROV has a laser cutting or cleaning tool 914 and is in the process of cleaning and/or maintaining subsea production equipment 954, and/or BOP 953, riser 952 and the submerged portions of the hull 950,
20 and dynamic positioning thrusters 951 of drill ship 902.

[00164] In FIG. 10 there is illustrated another potential use for a laser-ROV. In this use the laser ROV 1001 having laser tether 1002 is being used to removed organisms, such as mussels from the interior 1006 and exterior 1004, of a subsea pipe 1005, that extends out into body of water 1024. This pipe 1005 could be for example an
25 intake pipe for a power plant located along the Great Lakes in the US.

[00165] In FIG. 11 there is illustrated and example of an embodiment of a laser subsea equipment. Thus, there is provided a large subsea trencher 1110, such as for example Rotech T8000, which has had high power laser delivery assembly 1108, having high power laser cutters (not shown) added to it. The laser delivery assembly
30 1108 is optically connected to a high power laser in the laser housing 1103 of support vessel 1101 by laser tether 1107. The support vessel 1101 is on the surface 1120 of

the body of water 1124, having seafloor 1125. The vessel 1101 has a high power laser system 1102, a high power laser housing 1103, a high power laser fiber 1104 optically connected to an optical slip ring 1105 wound on a spool 1106. There is also shown a support cable 1109 for trencher 1110. Other support cables for the trencher may be
5 needed for its operation, which are not shown in this figure but are known to those of skill in the art.

[00166] In FIG. 12 there is shown an example of an embodiment of a laser subsea vehicle. There is shown a laser subsea tractor 1206, such as the SMD 2.4MW Rock Trencher, having a trenching tool 1207 that has a laser cutter 1208. The laser
10 cutter is optically connected to the surface and a high power laser (not shown) in laser housing 1201 by high power optical tether 1205. There is also shown a spool 1203, an optical slip ring 1204 and a high power optical fiber 1202. The tractor is located on the seafloor 1225 of the body of water 1224 having a surface 1220 upon which the support vessel 1200 is positioned.

[00167] Although single laser cutters are shown, more or less may be employed. Further the positions of the laser cutters or laser cleaners with respect to the tool and the ROV may be varied.

[00168] The laser housing or room, *e.g.*, 600 of the embodiment of FIG. 6, may be modular, that is, the room may be a self-contained unit such as a container used for
20 shipping that has been fitted with electrical, communication and optical fittings. In this case, it is also preferable that the container has climate control features, *e.g.*, heaters and air conditioners, built in or otherwise incorporated into the room. The laser room could be a structure that is integral to the support vessel, or it could be a combination of modular components and integral components. Any such structure will suffice and any
25 placement, including on a separate laser vessel, or on shore, can be employed, provided that the laser equipment and operators are sufficiently protected from the offshore environmental and operating conditions, and that the laser system is readily capable of being integrated into, or with, the other systems of the laser-ROV.

[00169] The controller, *e.g.*, 603 of the embodiment of FIG. 6, may be any type
30 of processor, computer, programmed logic controller (PLC), or similar computer device having memory and a processor; that may be, or is, used for industrial, marine or

factory automation and control. In the system the controller preferably should be in data and control communication with the laser-ROV.

[00170] The laser systems of for use with laser-ROVs, laser-subsea equipment, laser subsea vehicles, and other types of laser-tools and systems contemplated by this specification, may utilize a single high power laser, or they may have two or three high power lasers, or more. High power solid-state lasers, specifically semiconductor lasers and fiber lasers are preferred, because of their short start up time and essentially instant-on capabilities. The high power lasers for example may be fiber lasers or semiconductor lasers having 10kW, 20 kW, 50 kW or more power and, which emit laser beams with wavelengths preferably in about the 1550 nm (nanometer), or 1083 nm ranges. Examples of lasers, and in particular solid-state lasers, such as fibers lasers, are set forth in US Patent Application Publication Numbers 2010/0044106, 2010/0044105, 2010/0044104 and 2010/0215326 and in pending US Patent Application Serial Numbers 12/840,978, 13/210,581 and 61/493,174; the entire disclosures of each of which are incorporated herein by reference. Further diode lasers, and for example, such lasers having a wavelength of from about 0.9 microns to 2 microns may be utilized.

[00171] High powered optical cables, spools of such cables and assemblies of such cables of the type shown and disclosed in US patent application publications 2010/0044106, 2010/0044103, and 2010/0215326 and in pending US patent application serial numbers 12/840,978 and 13/210,581 may be used as high power laser tethers, the entire disclosure of each of which are incorporated herein by reference. Thus, the laser tether may be: a single high power optical fiber; it may be a single high power optical fiber that has shielding; it may be a single high power optical fiber that has multiple layers of shielding; it may have two, three or more high power optical fibers that are surrounded by a single protective layer, and each fiber may additionally have its own protective layer; it may contain other conduits such as a conduit to carry materials to assist a laser cutter, for example oxygen; it may have other optical or metal fiber for the transmission of data and control information and signals; it may be any of the combinations set forth in the forgoing patents and combinations thereof. Further, these combinations may have material added or may themselves have materials selected to

have a predetermined buoyancy for a particular application, which could be a variable buoyancy, a negative buoyancy, a positive buoyancy or a neutral buoyancy.

[00172] Table III provides a summary of potential operating conditions and configurations for an embodiment of a system for, utilizing a GaSb laser-PV assembly and a 1.5 micron diode laser, such as in an ROV.

[00173] Table III

Cooling Pump Requirements (W) at PV	Diameter of Circular PV (cm)	PV Area (cm ²)	Number of Fibers (800 μ m)	Electrical Input Power	Direct Diode Laser Efficiency	Laser Input Power	Fiber Launch	OSR	Power Transmission (6 km)	Power Conversion	AC Inverter	PV Power Output (We)	Power Available to ROV (We)
130	7.8	48	1	14,751	25%	3,688	98%	94%	71%	40%	90%	1,000	869.6
261	11.1	97	1	29,503		7,376						2,000	1,739
391	13.6	145	2	44,254		11,064						3,000	2,609
522	15.7	193	2	59,006		14,751						4,000	3,478
652	17.5	242	2	73,757		18,439						5,000	4,348
783	19.2	290	3	88,508		22,127						6,000	5,217
913	20.8	338	3	103,260		25,815						7,000	6,087
1,043	22.2	386	3	118,011		29,503						8,000	6,957
1,174	23.5	435	4	132,763		33,191						9,000	7,826
1,304	24.8	483	4	147,514		36,879						10,000	8,696

[00174] The laser cutters and laser cleaners and laser delivery assemblies used for a laser tool with an ROV, subsea vehicle or subsea equipment, may be any suitable device for the delivery of high power laser energy. Thus, any configuration of optical elements for culminating and focusing the laser beam can be employed. A further consideration, however, is the management of the optical effects of fluids, e.g., sea water, mud or other material that may be located within the beam path between laser cutter and the structure to be cut.

[00175] Such fluids could include, by way of example, water, seawater, salt water, brine, drilling mud, nitrogen, inert gas, diesel, mist, foam, or hydrocarbons. There can also likely be present in these drilling fluids borehole cuttings, e.g., debris, which are being removed from, or created by, the advancement of the borehole or other downhole operations. There can be present two-phase fluids and three-phase fluids, which would constitute mixtures of two or three different types of material. These fluids can interfere with the ability of the laser beam to cut the tubular. Such fluids may not

transmit, or may only partially transmit, the laser beam, and thus, interfere with, or reduce the power of, the laser beam when the laser beam is passed through them. If these fluids are flowing, such flow may further increase their non-transmissiveness. The non-transmissiveness and partial-transmissiveness of these fluids can result from several phenomena, including without limitation, absorption, refraction and scattering. Further, the non-transmissiveness and partial-transmissiveness can be, and likely will be, dependent upon the wavelength of the laser beam.

[00176] In particular, for those configurations and embodiments where the laser has a relatively long distance to travel, *e.g.*, greater than about 1" or 2" (although this distance could be more or less depending upon laser power, wavelength and type of drilling fluid, as well as, other factors) it is advantageous to minimize the detrimental effects of such fluids and to substantially ensure, or ensure, that such fluids do not interfere with the transmission of the laser beam, or that sufficient laser power is used to overcome any losses that may occur from transmitting the laser beam through such fluids. To this end, mechanical, pressure and jet type systems may be utilized in conjunction with the ROV tool and/or as a part of the ROV tool to reduce, minimize or substantially eliminate the effect of the drilling fluids on the laser beam.

[00177] For example, mechanical devices may be used to isolate the area where the laser cut is to be performed and the fluid removed from this area of isolation, by way of example, through the insertion of an inert gas, or an optically transmissive fluid, such as an oil or diesel fuel. The use of a fluid in this configuration has the added advantage that it is essentially incompressible. Moreover, a mechanical snorkel like device, or tube, which is filled with an optically transmissive fluid (gas or liquid) may be extended between or otherwise placed in the area between the laser cutter and the structure to be cut. In this manner the laser beam is transmitted through the snorkel or tube to the structure.

[00178] A jet of high-pressure gas may be used with the laser cutter and laser beam. The high-pressure gas jet may be used to clear a path, or partial path for the laser beam. The gas may be inert, or it may be air, oxygen, or other type of gas that accelerates the laser cutting. The relatively small amount of oxygen needed, and the rapid rate at which it would be consumed by the burning of the tubular through the laser-

metal-oxygen interaction, should not present a fire hazard or risk to the drilling rig, surface equipment, personnel, or subsea components.

[00179] The use of oxygen, air, or the use of very high power laser beams, e.g., greater than about 1 kW, could create and maintain a plasma bubble or a gas bubble in the cutting area, which could partially or completely displace the drilling fluid in the path of the laser beam.

[00180] A high-pressure laser liquid jet, having a single liquid stream, may be used with the laser cutter and laser beam. The liquid used for the jet should be transmissive, or at least substantially transmissive, to the laser beam. In this type of jet laser beam combination the laser beam may be coaxial with the jet. This configuration, however, has the disadvantage and problem that the fluid jet does not act as a waveguide. A further disadvantage and problem with this single jet configuration is that the jet must provide both the force to keep the drilling fluid away from the laser beam and be the medium for transmitting the beam.

[00181] A compound fluid laser jet may be used as a laser cutter. The compound fluid jet has an inner core jet that is surrounded by annular outer jets. The laser beam is directed by optics into the core jet and transmitted by the core jet, which functions as a waveguide. A single annular jet can surround the core, or a plurality of nested annular jets can be employed. As such, the compound fluid jet has a core jet. This core jet is surrounded by a first annular jet. This first annular jet can also be surrounded by a second annular jet; and the second annular jet can be surrounded by a third annular jet, which can be surrounded by additional annular jets. The outer annular jets function to protect the inner core jet from the drill fluid present in the annulus between the laser cutter and the structure to be cut. The core jet and the first annular jet should be made from fluids that have different indices of refraction. In the situation where the compound jet has only a core and an annular jet surrounding the core the index of refraction of the fluid making up the core should be greater than the index of refraction of the fluid making up the annular jet. In this way, the difference in indices of refraction enable the core of the compound fluid jet to function as a waveguide, keeping the laser beam contained within the core jet and transmitting the laser beam in the core

jet. Further, in this configuration the laser beam does not appreciably, if at all, leave the core jet and enter the annular jet.

[00182] The pressure and the speed of the various jets that make up the compound fluid jet can vary depending upon the applications and use environment.

5 Thus, by way of example the pressure can range from about 3000 psi, to about 4000 psi to about 30,000 psi, to preferably about 70,000 psi, to greater pressures. The core jet and the annular jet(s) may be the same pressure, or different pressures, the core jet may be higher pressure or the annular jets may be higher pressure. Preferably the core jet is higher pressure than the annular jet. By way of example, in a multi-jet
10 configuration the core jet could be 70,000 psi, the second annular jet (which is positioned adjacent the core and the third annular jet) could be 60,000 psi and the third (outer, which is positioned adjacent the second annular jet and is in contact with the work environment medium) annular jet could be 50,000 psi. The speed of the jets can be the same or different. Thus, the speed of the core can be greater than the speed of
15 the annular jet, the speed of the annular jet can be greater than the speed of the core jet and the speeds of multiple annular jets can be different or the same. The speeds of the core jet and the annular jet can be selected, such that the core jet does contact the drilling fluid, or such contact is minimized. The speeds of the jet can range from relatively slow to very fast and preferably range from about 1 ms (meters/second) to
20 about 50 m/s, to about 200 m/s, to about 300 m/s and greater. The order in which the jets are first formed can be the core jet first, followed by the annular rings, the annular ring jet first followed by the core, or the core jet and the annular ring being formed simultaneously. To minimize, or eliminate, the interaction of the core with the drilling fluid, the annular jet is created first followed by the core jet.

25 **[00183]** In selecting the fluids for forming the jets and in determining the amount of the difference in the indices of refraction for the fluids the wavelength of the laser beam and the power of the laser beam are factors that should be considered. Thus, for example for a high power laser beam having a wavelength in the 1080 nm (nanometer) range the core jet can be made from an oil having an index of refraction of
30 about 1.53 and the annular jet can be made from a mixture of oil and water having an index of refraction from about 1.33 to about 1.525. Thus, the core jet for this

configuration would have an NA (numerical aperture) from about 0.95 to about 0.12, respectively. Further details, descriptions, and examples of such compound fluid laser jets are contained in US Patent Application, Serial No. 61/378,910 and in Serial No. 13/222,931 (which claims the benefit of priority of Serial No. 61/378,910), the entire disclosures of each of which are incorporated herein by reference.

[00184] The angle at which the laser beam contacts the structure to be cut may be determined by the optics within the laser cutter or it may be determined by the angle or positioning of the laser cutter itself. The laser cutters have a discharge end from which the laser beam is propagated. The laser cutters also have a beam path. The beam path is defined by the path that the laser beam is intended to take, and extends from the discharge end of the laser cutter to the material or area to be cut, e.g., the target area.

[00185] The laser tethers for the laser cutters provide the laser energy and other materials that are needed to perform the cutting operation. Although shown as a single cable multiple cables could be used. Thus, for example, in the case of a laser cutter employing a compound fluid laser jet the tether could include a high power optical fiber, a first line for the core jet fluid and a second line for the annular jet fluid. These lines could be combined into a single cable or they may be kept separate. Additionally, for example, if a laser cutter employing an oxygen jet is utilized, the cutter would need a high power optical fiber and an oxygen line. These lines could be combined into a single tether or they may be kept separate as multiple tethers. The lines and optical fibers should be covered in flexible protective coverings or outer sheaths to protect them from fluids, the subsea environment, and the movement of the laser cutters, while at the same time remaining flexible enough to accommodate the orbital movement of the laser cutters.

[00186] It is preferable that any feed-through assemblies in the subsea equipment for a high power laser fiber, the conduits, the support cables, the laser cutters and other subsea components associated with the operation of the laser systems and/or cutters and/or cleaners, should be constructed to meet the pressure requirements for the intended use. If some components do not meet the pressure requirements for a particular use, or if redundant protection is desired, such

components may be contained in or enclosed by a structure that does meet the requirements. For deep and ultra-deep water uses the subsea laser system, cutter, and/or cleaner, components should preferably be capable of operating under pressures of 2,000 psi, 4,500 psi, 5,000 psi or greater. The materials, fittings, assemblies, useful
5 to meet these pressure requirements are known to those of ordinary skill in the offshore drilling arts, related sub-sea ROV art, and in the high power laser art.

[00187] The laser cutter and/or cleaning tools of the present invention may be used with a laser powered ROV or they may be used with a convention ROV or other conventional subsea equipment, or with a land based system or a robotic device or
10 system.

[00188] Further, the laser cutting and/or cleaning tools may be used as a stand-alone subsea tool, down hole tool, mining tool, cleaning tool or other tool for other or multiple applications. In one such embodiment the laser tool would be lowered from the surface by a hoisting device to the object or structure to be worked upon, *e.g.*, cut,
15 cleaned, bored, etc. The laser tool could then be operated by a diver, remotely operated, or operated by an ROV. For example, the stand-alone laser tool could be a cutting tool that is for example lowered to a damaged section of pipeline on the seafloor. The tool could further have cameras to assist in selecting the cutting location. The tool could be positioned from the surface at the point were the cut is too occur and then the
20 laser cutter fired to cut the pipe. Additionally, a fixation device may be employed with the stand-alone tool, such as a grasping hook, magnetic attachment or similar means to hold the tool next to or from moving away from the work piece.

[00189] This type of stand-alone laser tool, may be a single laser cutter or laser delivery assembly, it may have multiple cutters, or it may have a ring like arrangement
25 of multiple cutters in which the ring is attached around the structure or object to be cut, the laser cutters are fired, propagating their laser beams at the object to be cut, and the cutters and their respective beams are then rotated around the object to be cut. Thus, the configuration could be seen as the laser beams forming a pattern like the spokes of a wheel with the object to be cut located in the center of the wheel. Additionally, the
30 cutters could have parallel beam paths and thus either the cutters could be moved

across the object to be cut or the object itself could be moved through the parallel beam paths.

[00190] The laser cutters, either with an ROV or stand-alone may also have applications in various salvage operations. Thus, these laser tools could be used to cut open the hulls of sunken vessel to obtain access to their contents and done so in a much safer, less destructive and more controlled manner than using explosives. Further these laser tools could be used to cut and remove off shore structures that are required to be removed for environmental, aesthetic safety or any other reason. The laser tools provide safer, more controlled and more precise cutting than explosives and may be used for essentially any prior subsea cutting applications where explosives or shaped charges were or could be employed.

[00191] The high power cables and laser photovoltaic assemblies may further be used to power subsea structures or equipment such as a BOP.

[00192] Additionally, the subsea laser tool could be used to deliver a high power laser beam to a hydrate formation. Thus, the subsea laser tools and subsea laser devices can be used to manage, control, remove or otherwise eliminate hydrate formations on subsea structures and equipment.

[00193] Although many of the examples and discussion in this specification are directed towards ROVs and ROV mounted sub-sea laser cutters, it should be understood that these embodiments are illustrative of the present inventions. It being understood understood that the scope and application of the present inventions are not limited to ROVs, and are not limited to sub-sea applications. Thus, the present inventions may find applicability in, and the scope of protection would extend to, other laser tools, devices and applications, such as: robots; hydrocarbon and geothermal exploration, production and abandonment tools and activities, such as, drilling, workover, completion, decommissioning, plugging, flow control and abandonment; pipeline activities and related tools, such as, maintenance, testing repair, construction, removal and cleaning; military tools and applications; tools and applications relating to nuclear facilities and remediation; tools and applications relating to hazardous environments and remediation and other high power laser applications and uses that may be presently known or developed in the future.

[00194] The invention may be embodied in other forms than those specifically disclosed herein without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive.

What is claimed:

1. A high power laser photovoltaic assembly comprising:
 - a. a photovoltaic assembly comprising a plurality of photovoltaic cells;
 - b. a means to provide a predetermined high power laser beam distribution profile to the photovoltaic cells; and,
 - c. the photovoltaic cells configured in a shape based at least in part upon the predetermined laser beam profile.
2. The high power laser photovoltaic assembly of claim 1, wherein the photovoltaic cells comprises a material selected from the group consisting of:
 - a. $\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{As}$, wherein $0 \leq x \leq 0.45$ and $0 \leq y \leq 1$,
 - b. $\text{Si}_x\text{Ge}_{1-x}$, wherein $0 \leq x \leq 1$,
 - c. $\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{P}$, wherein $0 \leq x \leq 0.80$ and $0 \leq y \leq 1$,
 - d. $\text{Al}_x\text{In}_y\text{Ga}_{1-x-y}\text{N}$, wherein $0 \leq x \leq 0.5$ and $0.1 \leq y \leq 1$,
 - e. $\text{In}_x\text{Ga}_{1-x}\text{Sb}$, wherein $0 \leq x \leq 0.3$,
 - f. $\text{In}_x\text{Ga}_{1-x}\text{N}_y\text{As}_{1-y}$, wherein $0 \leq x \leq 0.3$ and $0 < y \leq 0.1$, and
 - g. $\text{In}_x\text{Ga}_{1-x}\text{As}_y\text{P}_{1-y}$, wherein $0 \leq x \leq 1$ and $0 \leq y \leq 1$.
3. The high power laser photovoltaic assembly of claim 1, wherein the photovoltaic cells comprises an alloy of one or more elements selected from the group consisting of Al, In, Ga, Si, Sb, N, and As.
4. The high power laser photovoltaic assembly of claim 1, wherein the means to provide a predetermined high power laser beam distribution profile to the photovoltaic cells comprises a collimating lens.
5. The high power laser photovoltaic assembly of claim 1, wherein the means to provide a predetermined high power laser beam distribution profile to the photovoltaic cells comprises an optical fiber face.
6. The laser photovoltaic assembly of claim 1, comprising:

- a. a photovoltaic cell cooling device; and,
- b. a back reflection management means.

7. A high power laser photovoltaic assembly comprising:

- a. a laser beam delivery means;
- b. a photovoltaic assembly comprising a housing;
- c. the housing having an opening for receiving the laser beam, the housing defining an optically active surface, the optically active surface comprising a plurality of photovoltaic cells; and,
- d. a cooling device.

8. The high power laser photovoltaic assembly of claim 7, wherein the laser beam delivery means comprises an optical fiber face.

9. The high power laser photovoltaic assembly of claim 7, wherein the laser photovoltaic cells comprise a material paired to a predetermined laser beam wavelength range.

10. The high power laser photovoltaic assembly of claim 9, wherein a distribution of the wavelengths in the laser beam wavelength range is no greater than about 10 nm.

11. The high power laser photovoltaic assembly of claim 9, wherein the laser beam wavelength range is from about 1060 nm to about 1080 nm.

12. The high power laser photovoltaic assembly of claim 9, wherein the laser beam wavelength range is from about 1530 nm to about 1600 nm.

13. The high power laser photovoltaic assembly of claim 7, wherein the laser photovoltaic cells comprise a multilayer structure configured to receive a predetermined laser beam wavelength range.

14. The high power laser photovoltaic assembly of claim 13, wherein a distribution of the wavelengths in the laser beam wavelength range is no greater than about 10 nm.

15. The high power laser photovoltaic assembly of claim 13, wherein the laser beam wavelength range is from about 1060 nm to about 1080 nm.

16. The high power laser photovoltaic assembly of claim 13, wherein the laser beam wavelength range is from about 1530 nm to about 1600 nm.

17. The high power laser photovoltaic assembly of claim 7, comprising a means for managing back reflections.

5 18. The high power laser photovoltaic assembly of claim 7, wherein the optically active surface defines a disc.

19. The high power laser photovoltaic assembly of claim 7, wherein the inner optically active surface defines a portion of a sphere.

10 20. The high power laser photovoltaic assembly of claim 7, wherein the inner optically active surface defines a woods horn.

21. The high power laser photovoltaic assembly of claim 7, wherein the inner optically active surface defines a cylinder having an open end and closed end.

22. A high power laser photovoltaic cell comprising:

- 15 a. a front for receiving a high power laser beam having a predetermined wavelength;
- b. a back; and,
- c. a layer between the front and back, comprising a photovoltaic material having a band gap tuned to a predetermined operating temperature
- 20 and the predetermined laser wavelength.

23. The high power laser photovoltaic cell of claim 22, wherein the predetermined laser wavelength is from about 1000 nm to about 1600 nm and the predetermined operating temperature is greater than about 100 degrees C.

24. A high power laser photovoltaic cell comprising:

- 25 a. a front for receiving a high power laser beam having at least about 10 kW of power and having a predetermined wavelength;
- b. a back;
- c. a layer between the front and back, comprising a photovoltaic material having a band gap tuned to the predetermined laser wavelength; and,

- d. the front comprising a busbar, an antireflective coating capable of handling the at least about 10 kW of power at the predetermined wavelength, and a grid.

5 25. The high power laser photovoltaic cell of claim 24, wherein the grid is characterized by a grid height, a grid facing surface, and a grid width; and, wherein the grid height is from about 5 μm to about 10 μm and the grid width is about 5 μm to about 10 μm .

10 26. The high power laser photovoltaic cell of claim 24, wherein the grid is characterized by a grid height, a grid facing surface, and a grid width; and, wherein the grid height is greater than about 10 μm .

 27. The high power laser photovoltaic cell of claim 24, wherein the grid is characterized by a grid height, a grid facing surface, and a grid width; and, wherein the grid height is greater than about 20 μm .

15 28. The high power laser photovoltaic cell of claim 24, comprising a second a layer between the front and back, comprising a photovoltaic material having a band gap tuned to the predetermined laser wavelength.

 29. The high power laser photovoltaic cell of claim 24, comprising a plurality of layers between the front and back, comprising a photovoltaic material having a band gap tuned to the predetermined laser wavelength.

20 30. A high power laser photovoltaic cell comprising:

- a. a front for receiving a high power laser beam having a predetermined wavelength;
- b. a back;
- c. a plurality of layers between the front and back, the layers configured for the predetermined laser wavelength, to convert at least about 25% of the received laser beam into electricity; and,
- d. the front comprising a grid.

31. The high power photovoltaic cell of claim 28, wherein the grid is configured to minimize the grid shadowing fraction, the formation of back reflections, and resistivity.

5 32. The high power photovoltaic cell of claim 28, comprising an optics means to minimize the grid shadowing fraction and the formation of back reflections.

33. The high power photovoltaic cell of claim 28, comprising an optics means to minimize the grid shadowing fraction.

34. A method of remotely converting power laser energy for use in a device, the method comprising:

- 10 a. propagating a high power laser beam;
- b. transmitting the high power laser beam through the high power laser fiber to the device without substantial loss of power;
- c. directing the high power laser beam from the high power laser fiber into a laser photovoltaic assembly;
- 15 d. converting at least a portion of the laser beam into electrical energy; and,
- e. utilizing the electrical energy to power an operation of the device.

20

1/20

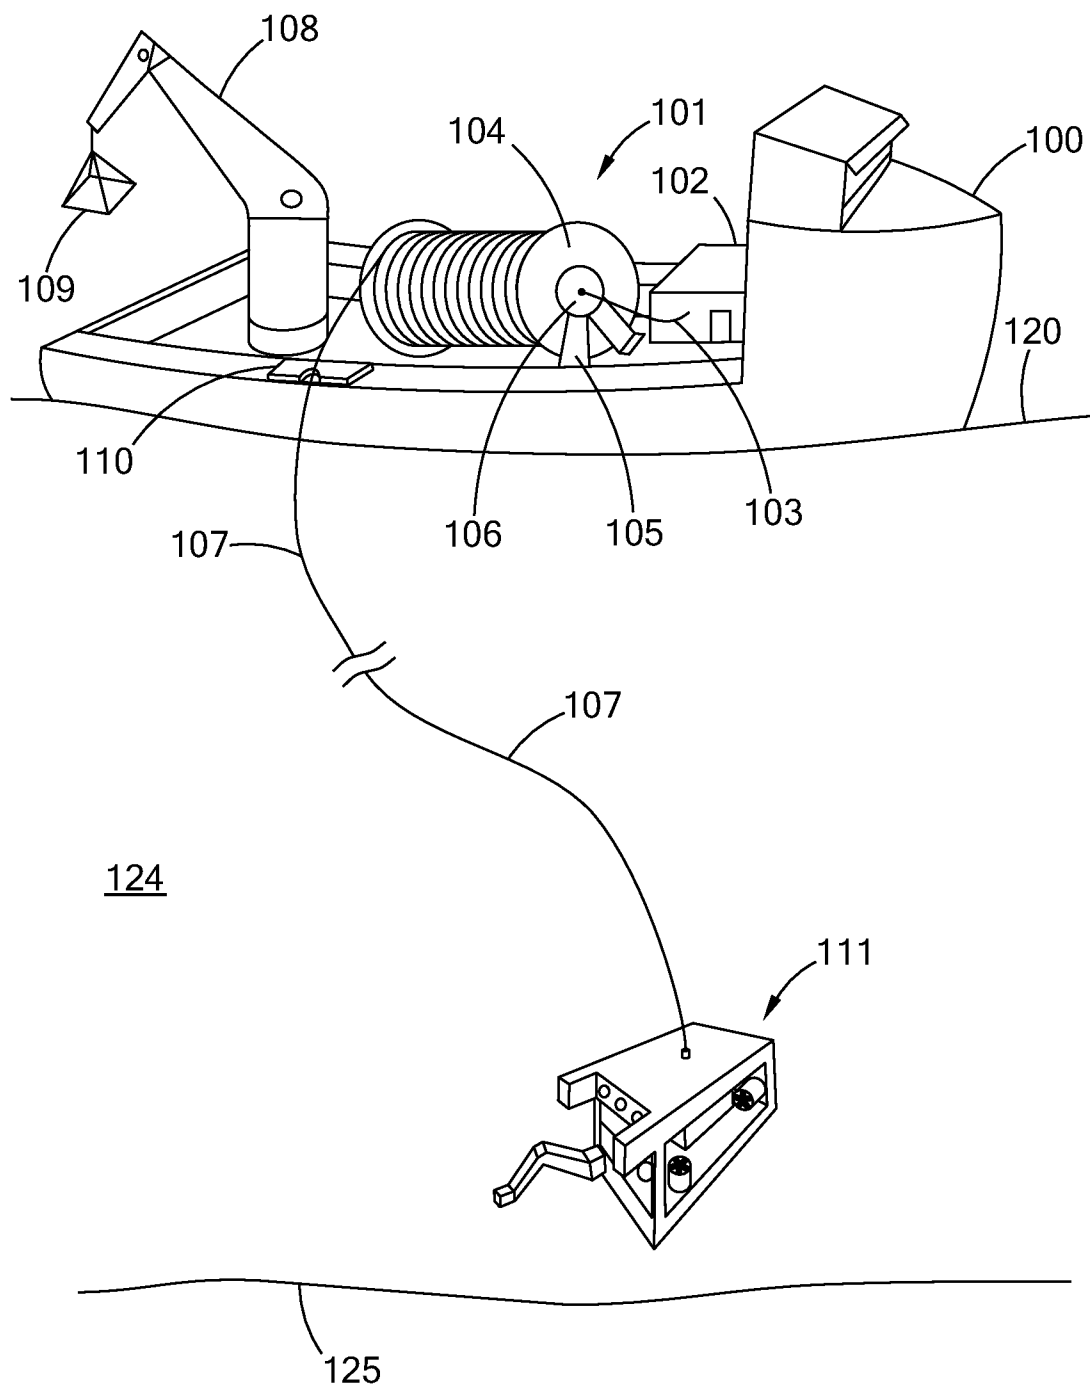


Fig. 1

2/20

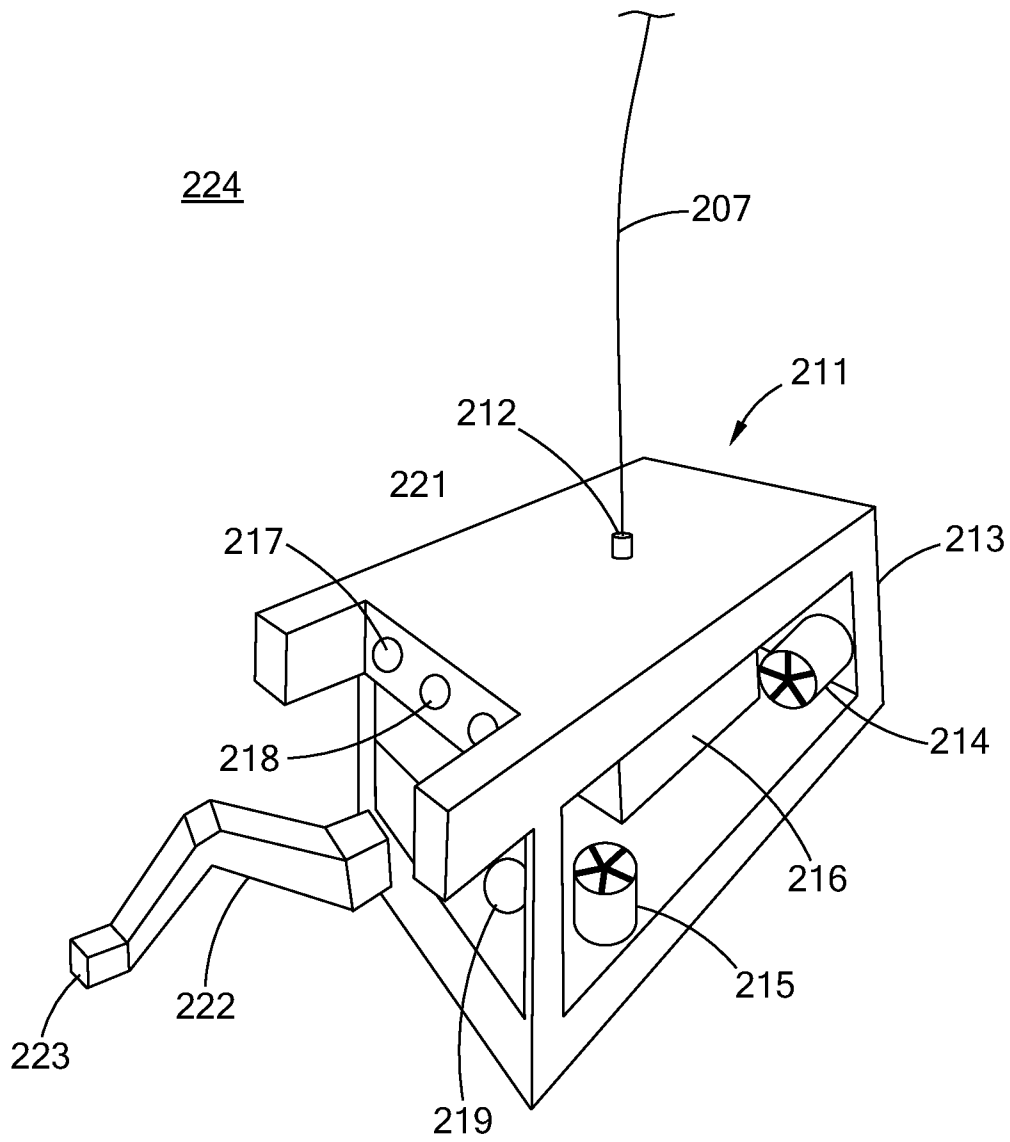


Fig. 2A

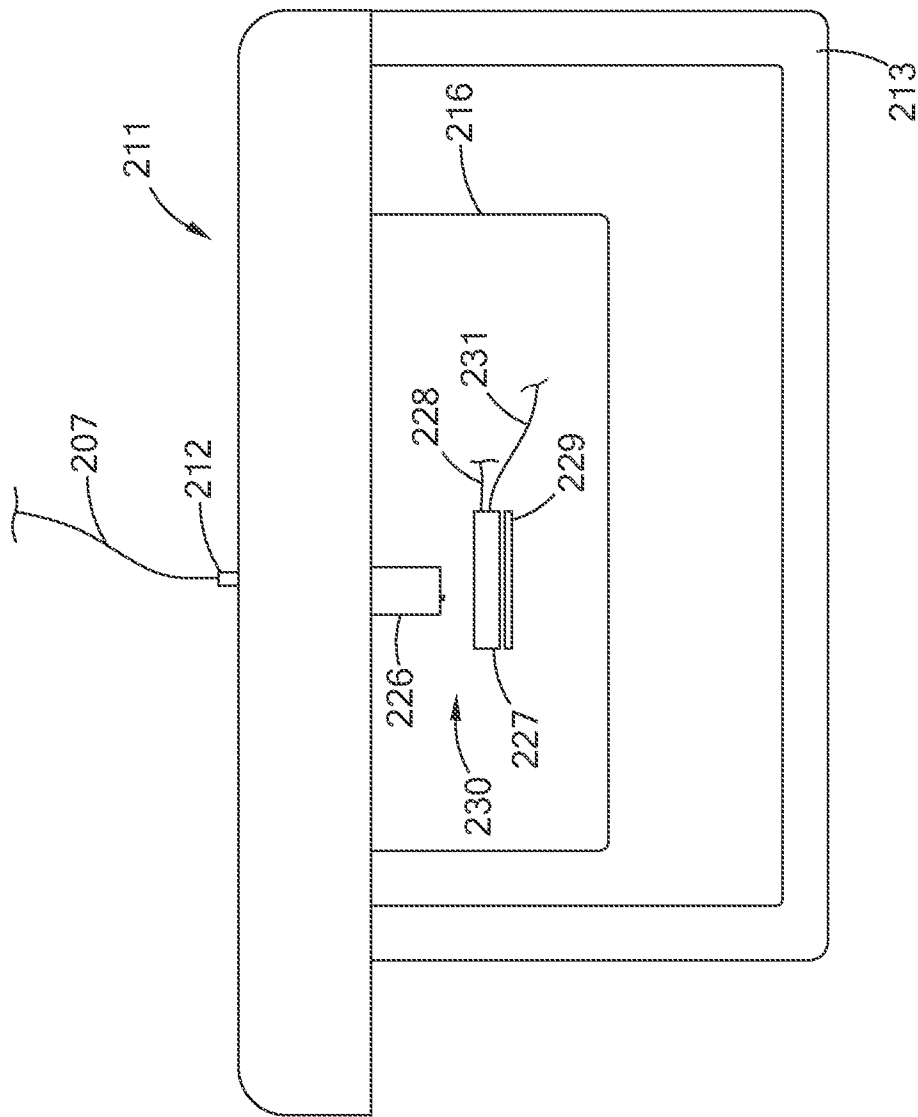


Fig. 2B

4/20

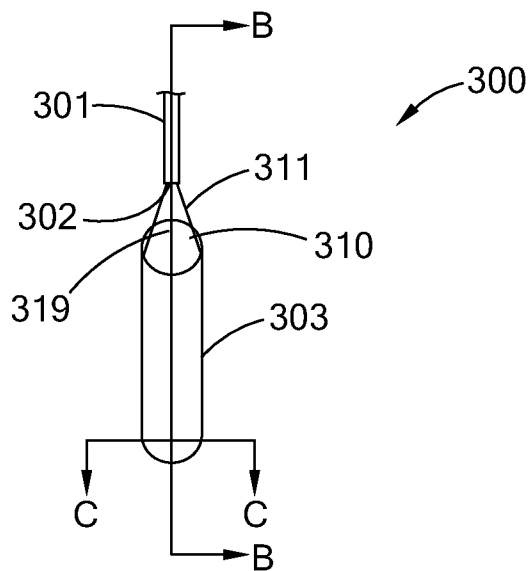


Fig. 3A

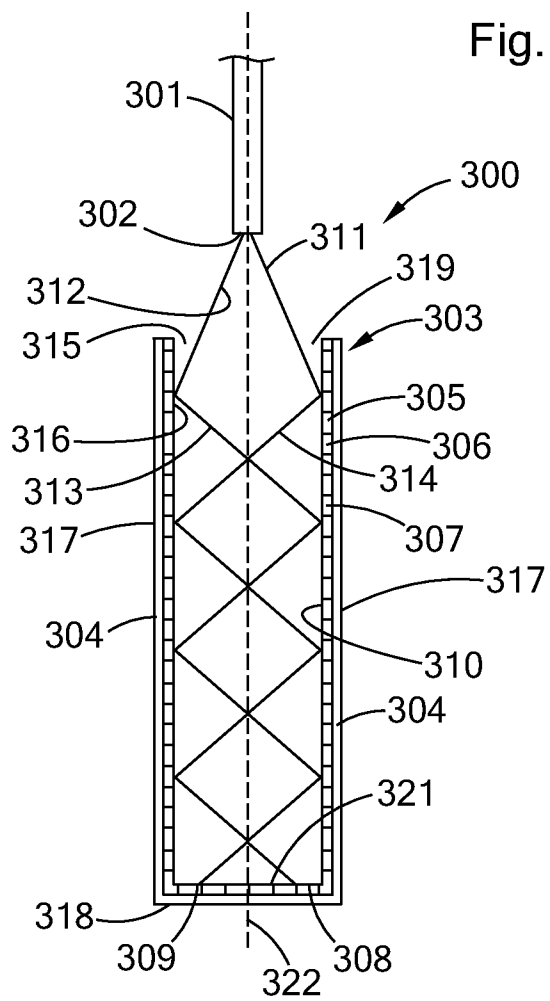


Fig. 3B

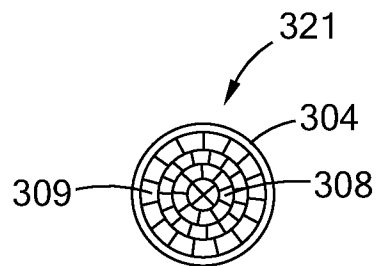


Fig. 3C

5/20

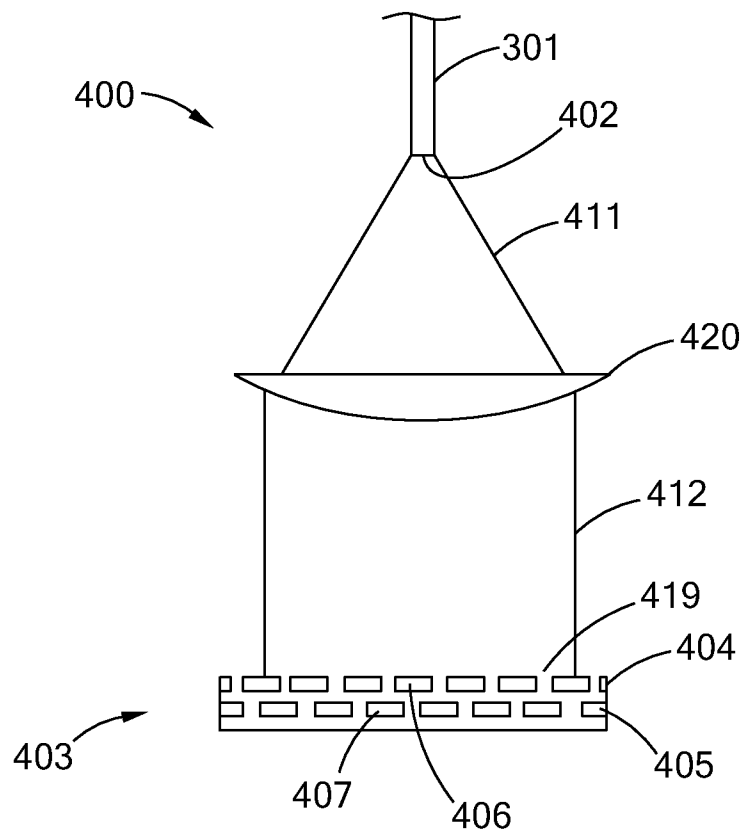


Fig. 4

6/20

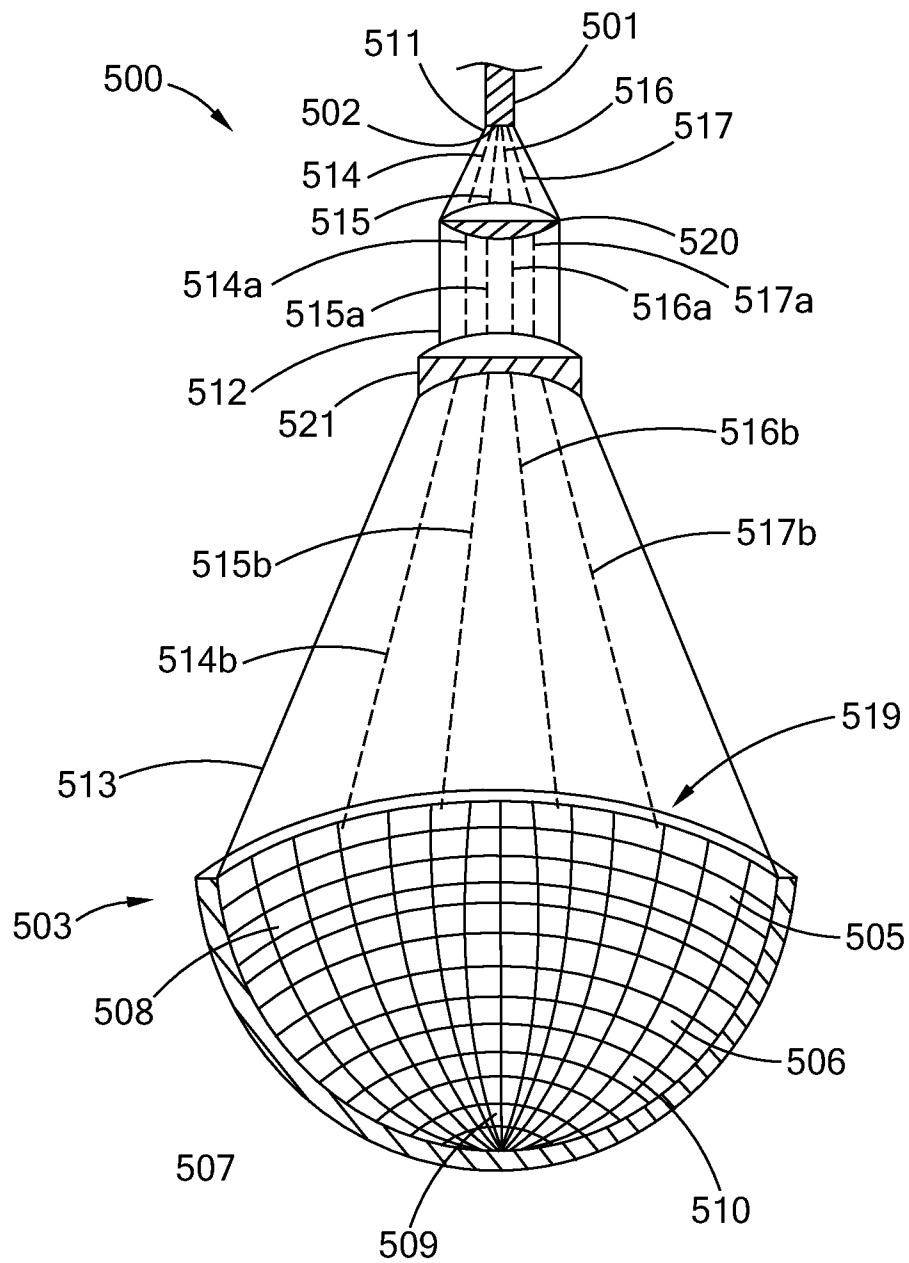


Fig. 5

7/20

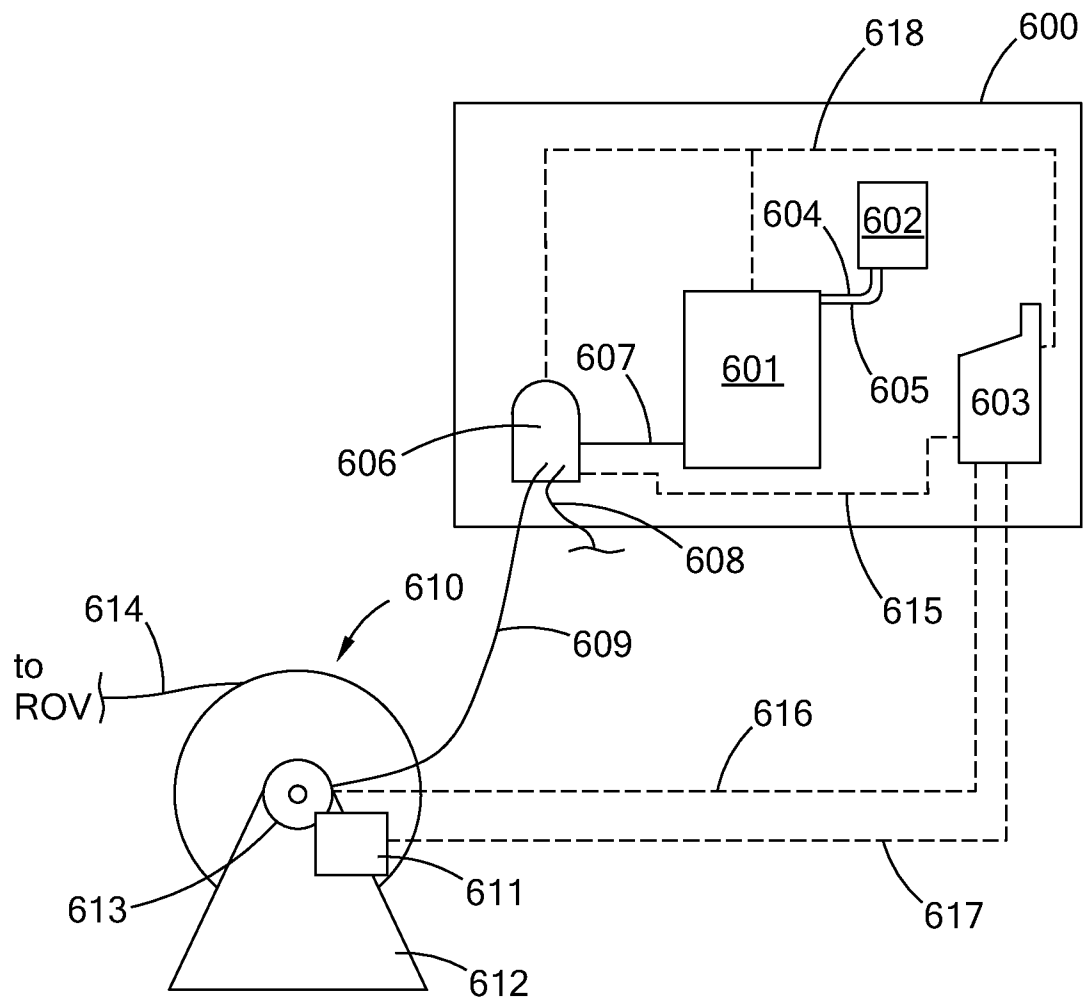


Fig. 6

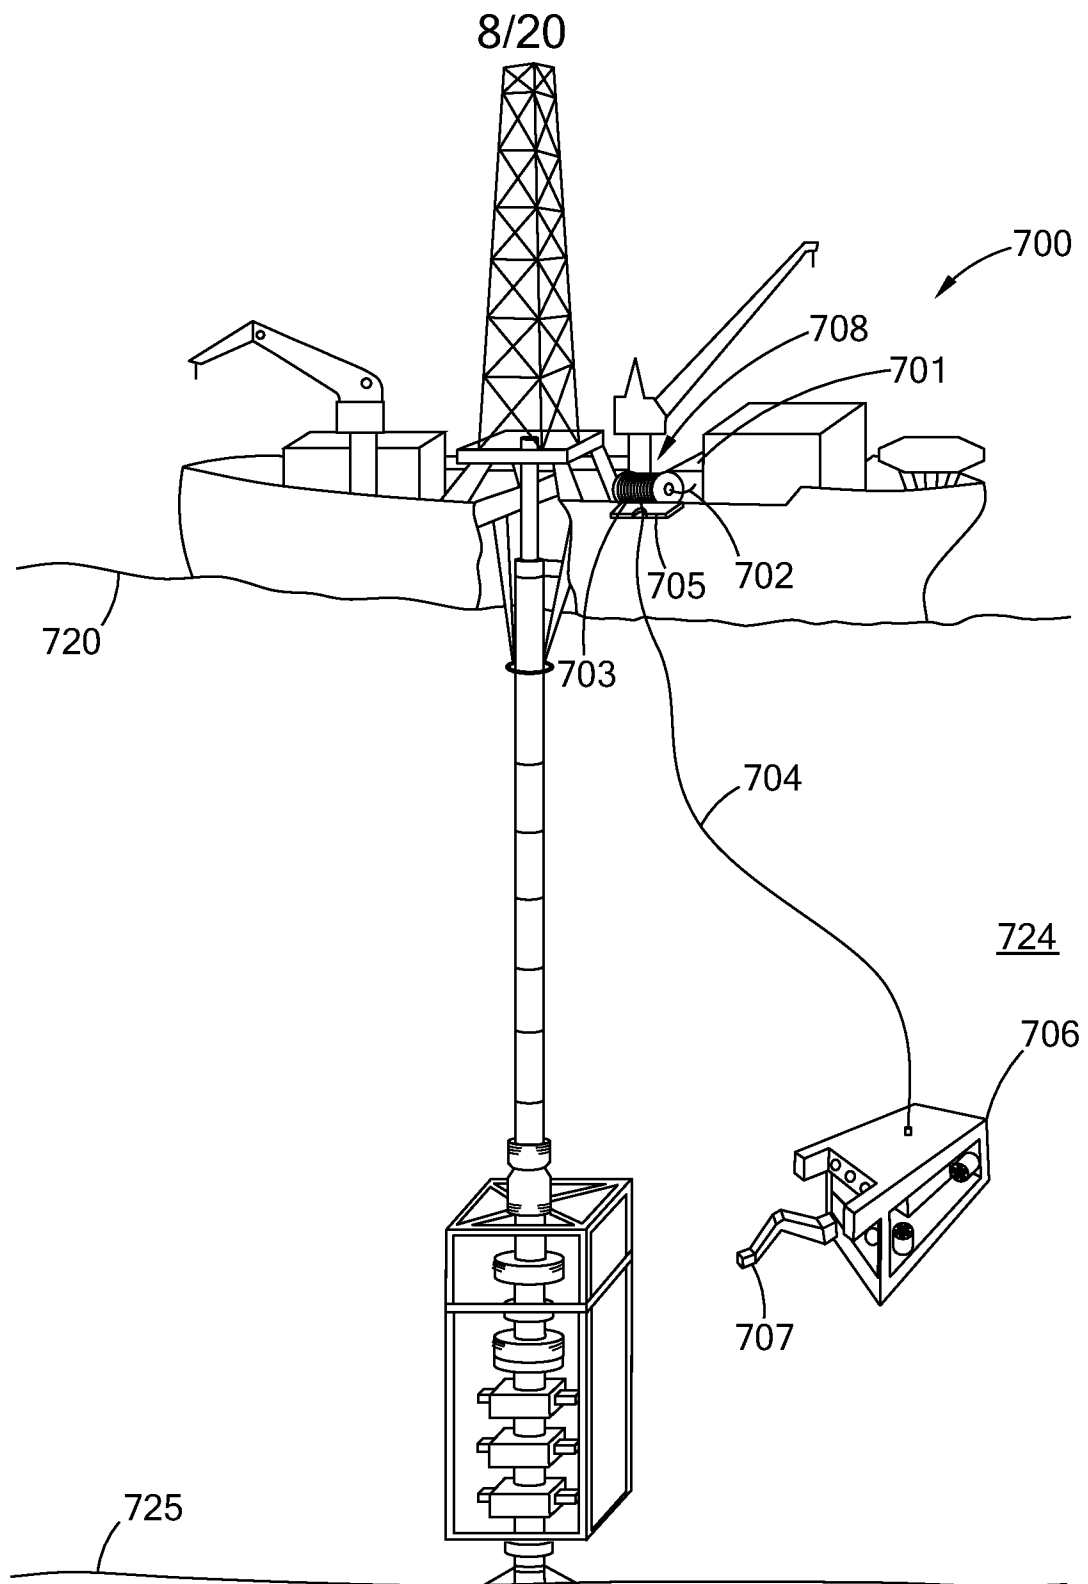


Fig. 7

9/20

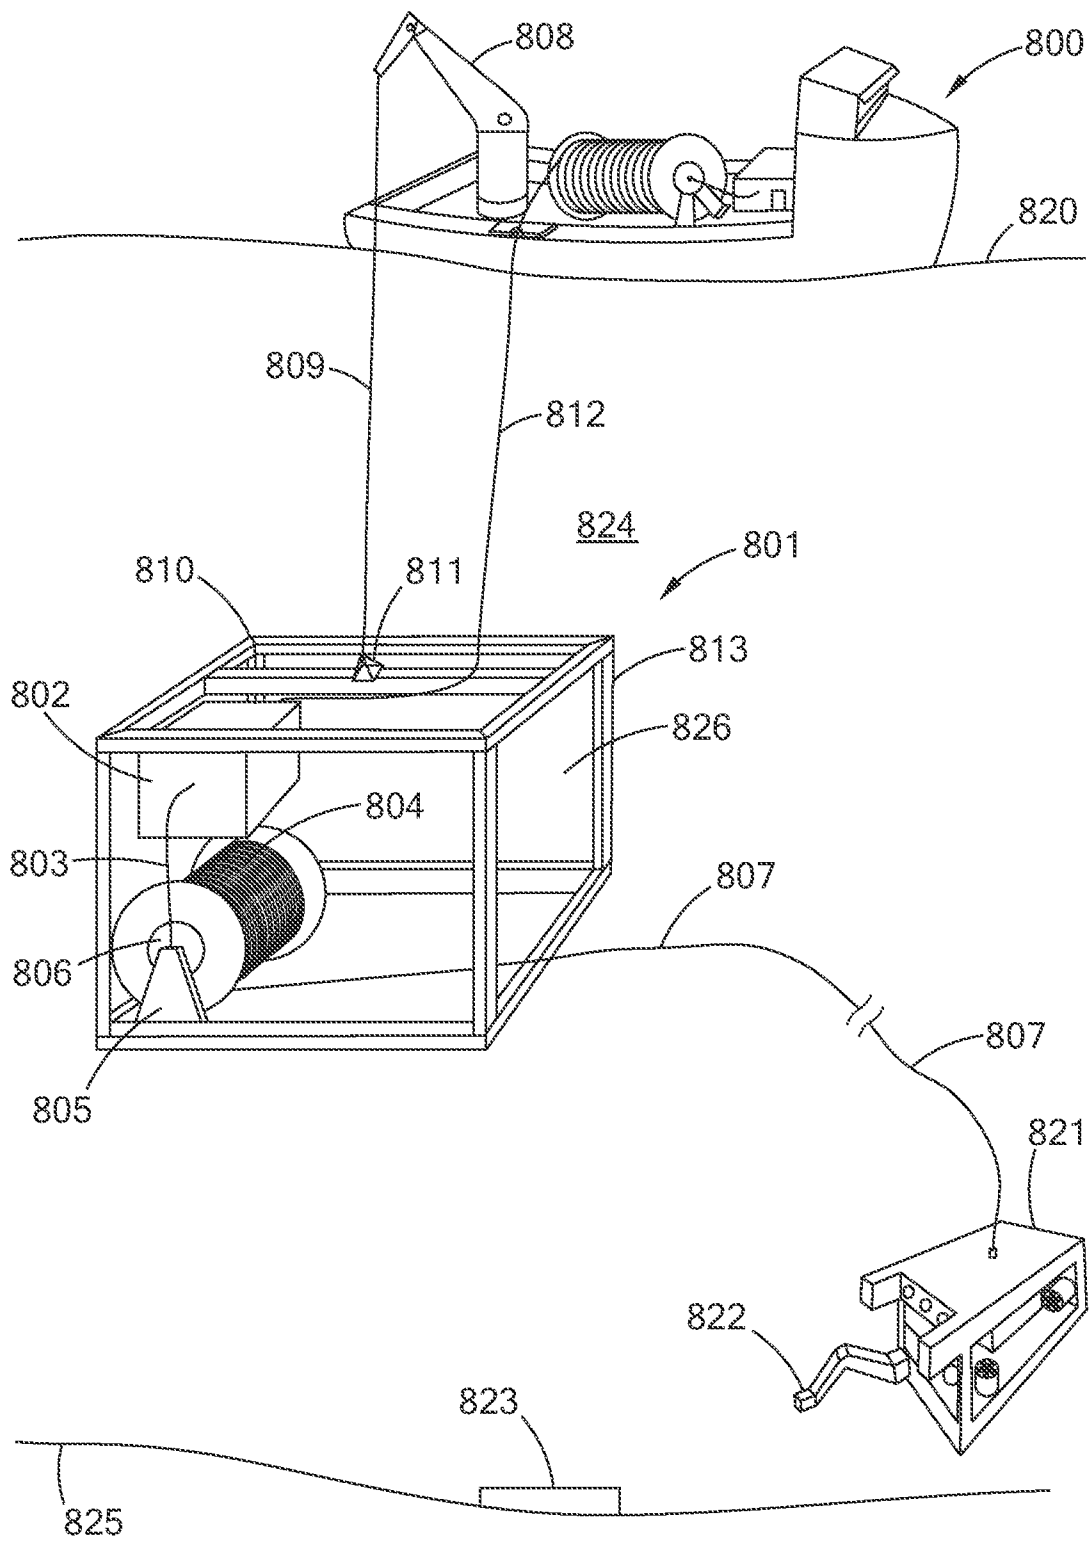


Fig. 8

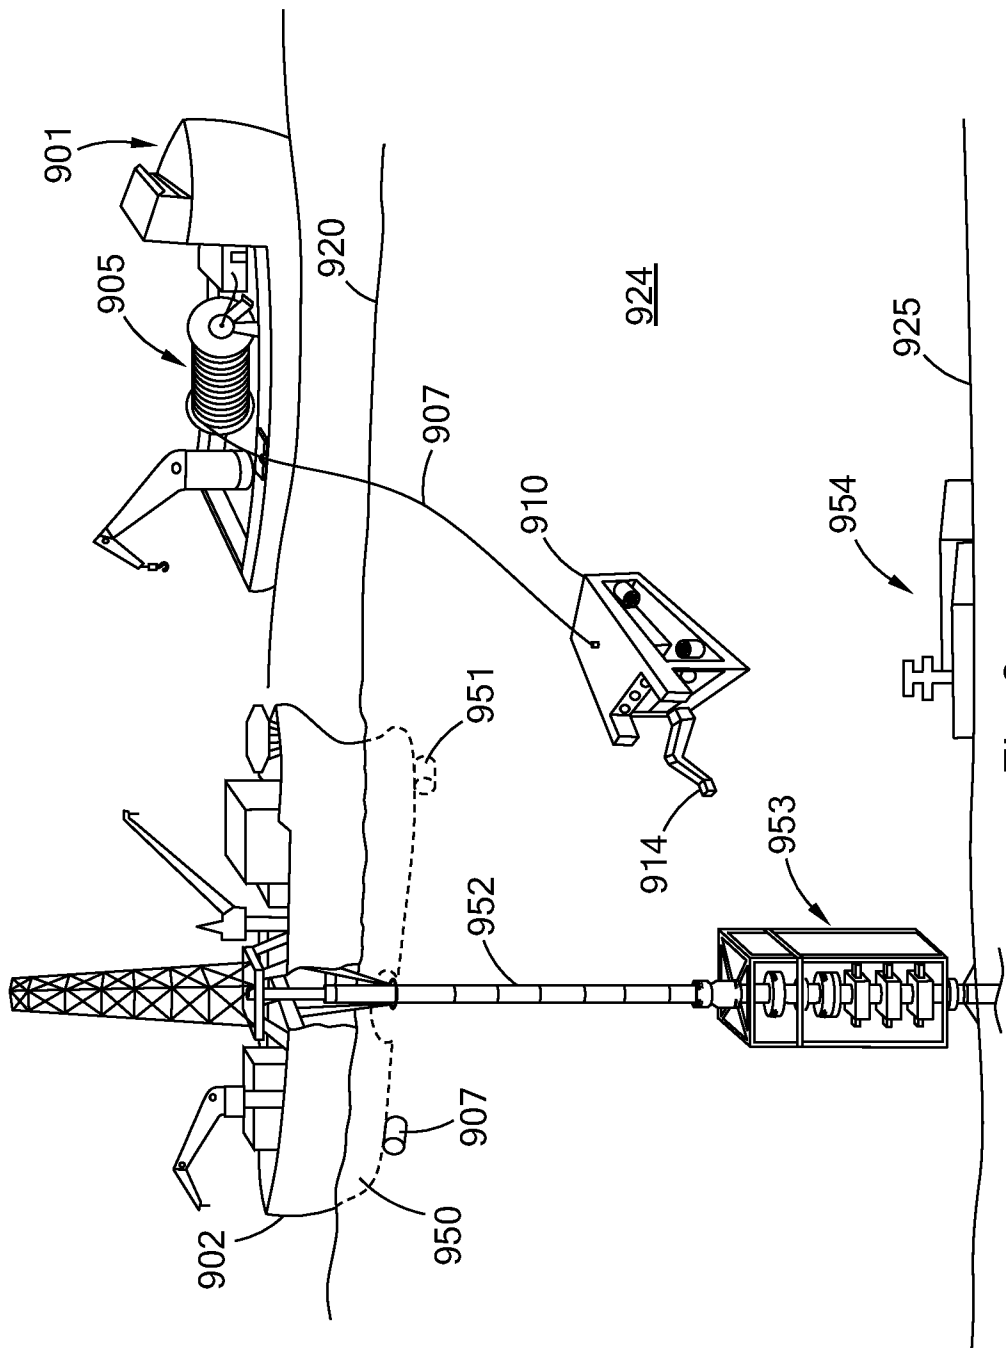


Fig. 9

11/20


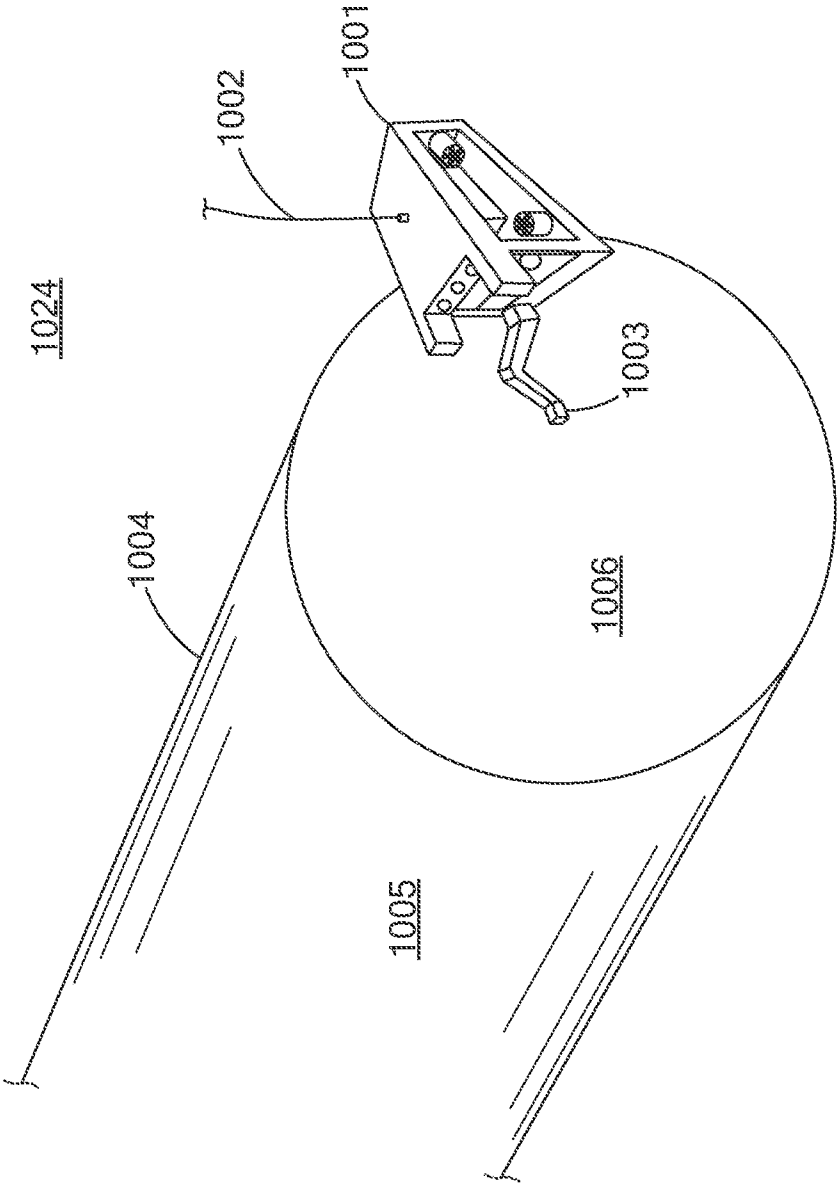


Fig. 10

12/20

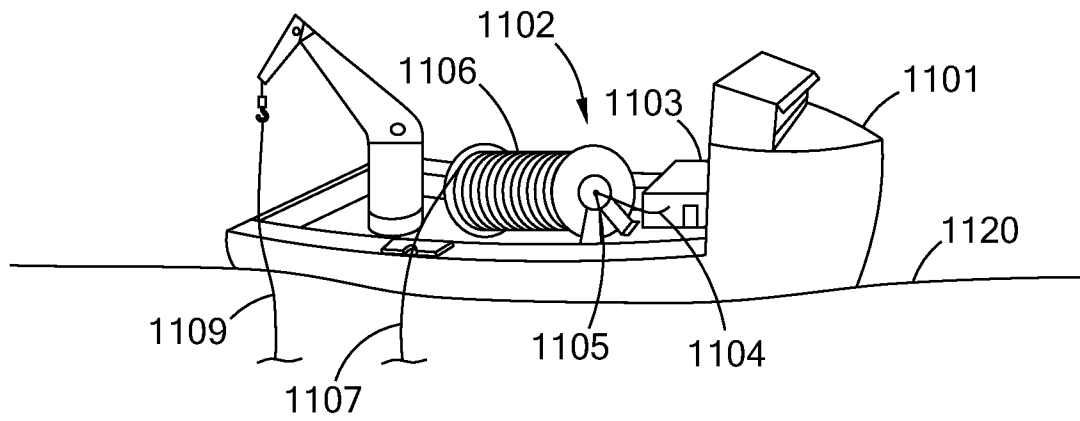

1124


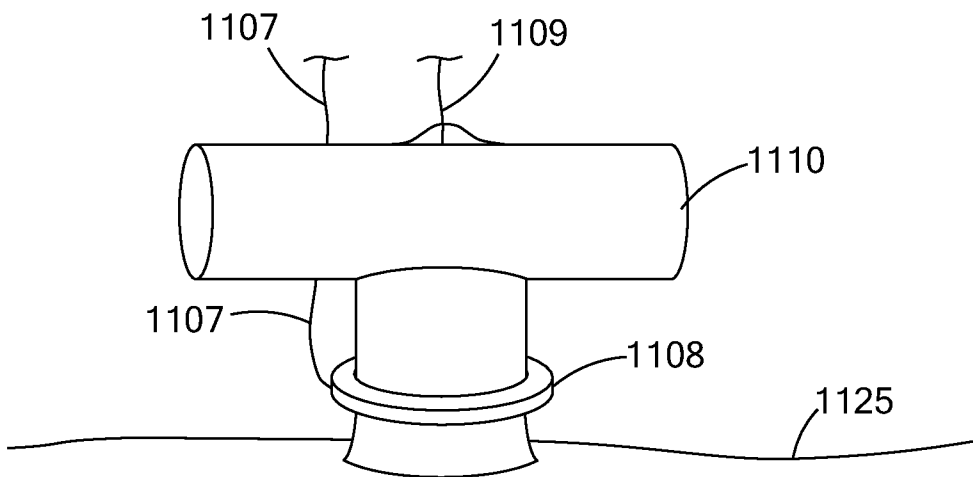


Fig. 11

13/20

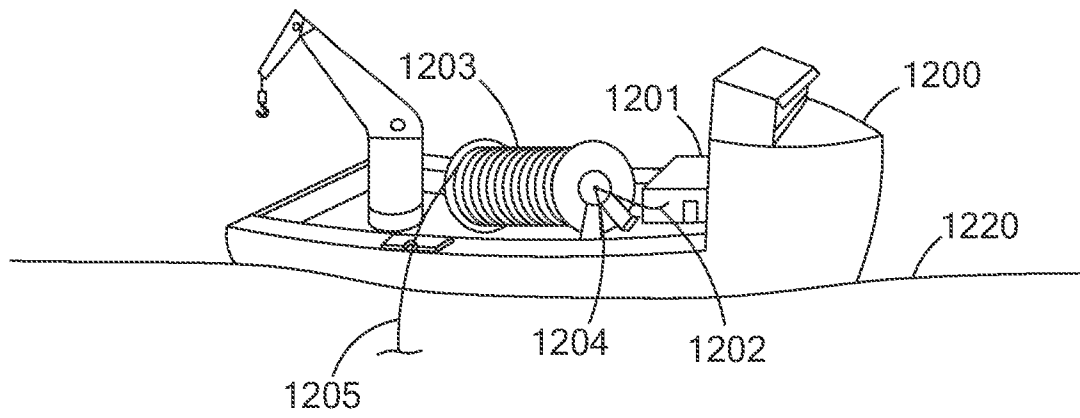

1224

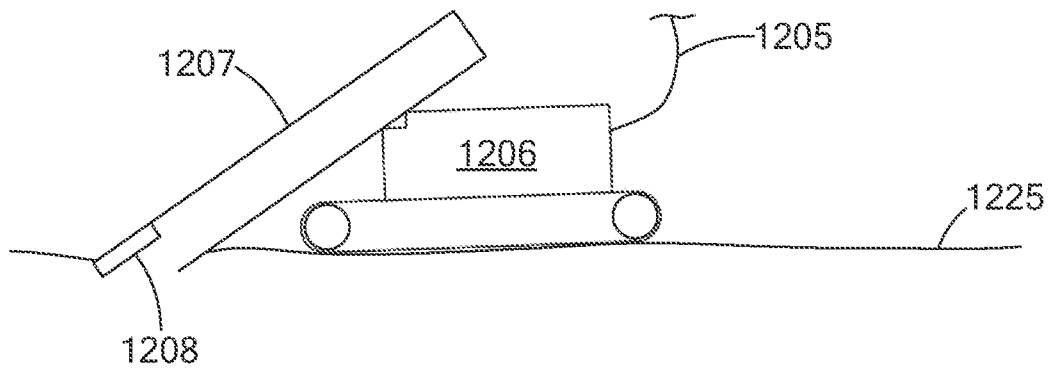


Fig. 12

14/20

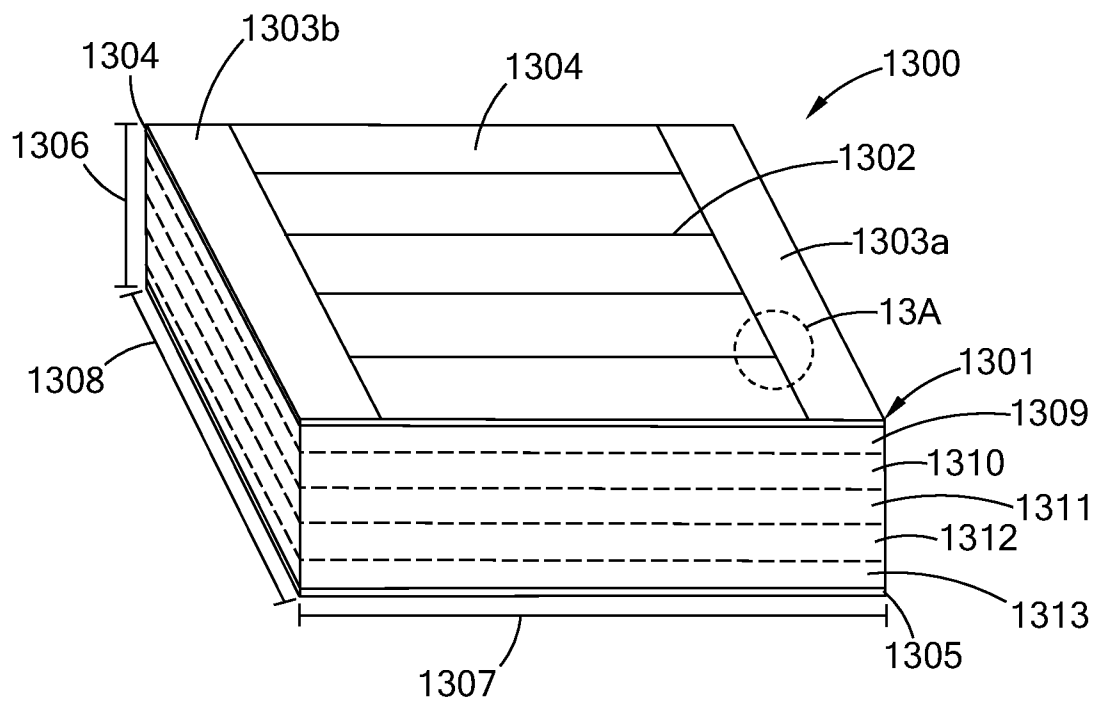


Fig. 13

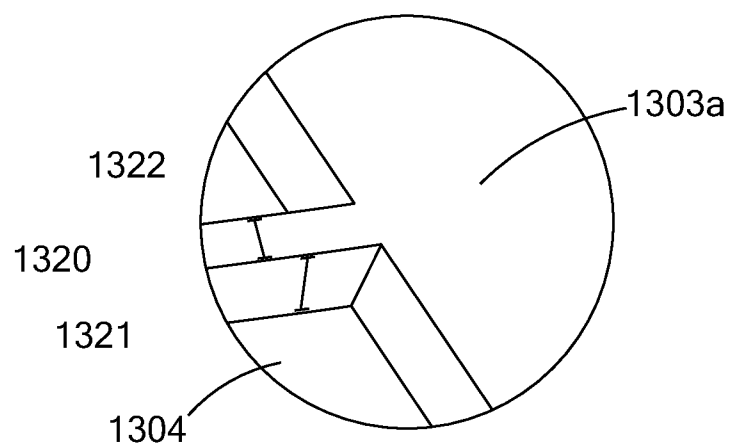


Fig. 13A

15/20

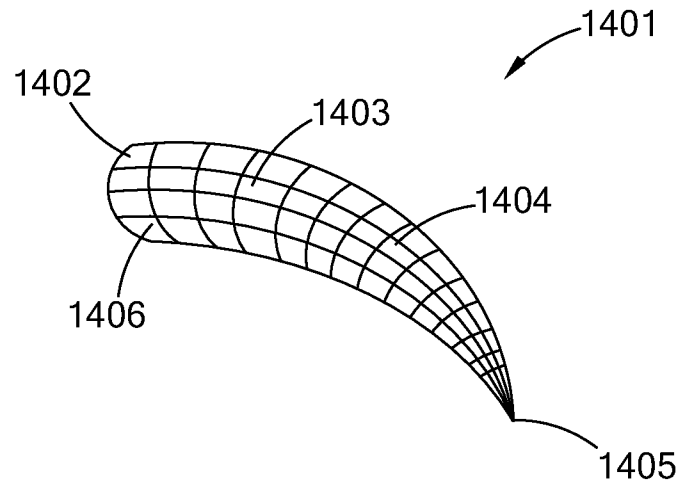


Fig. 14

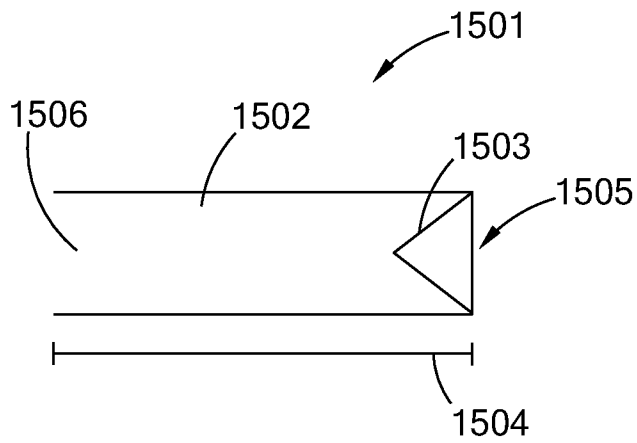


Fig. 15

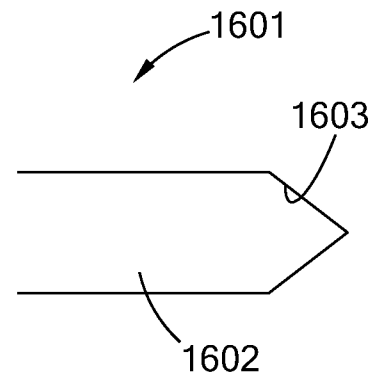


Fig. 16

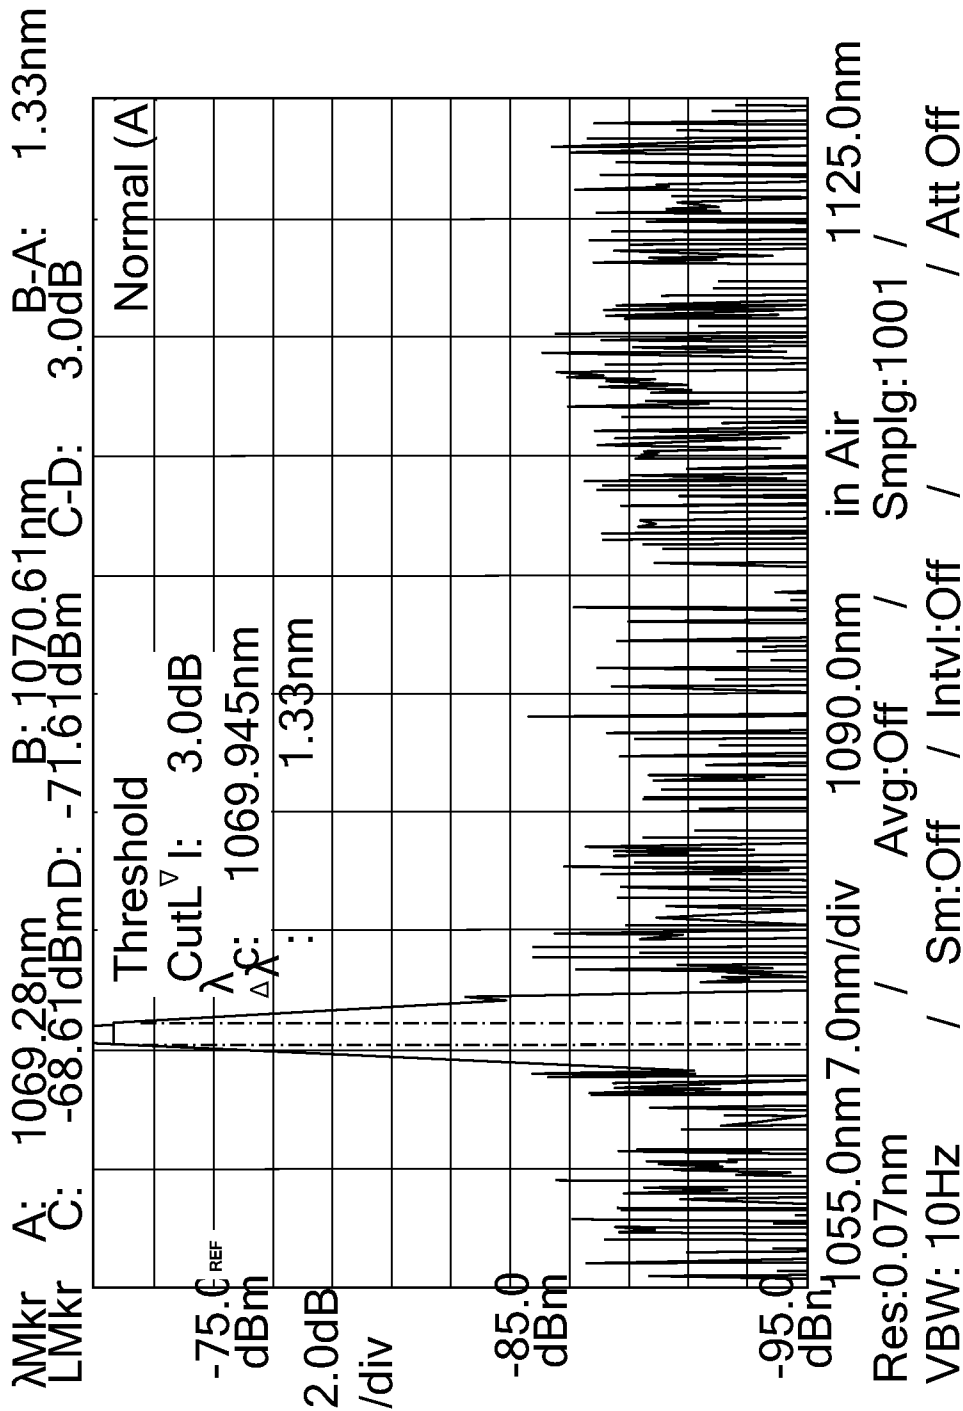


Fig. 17

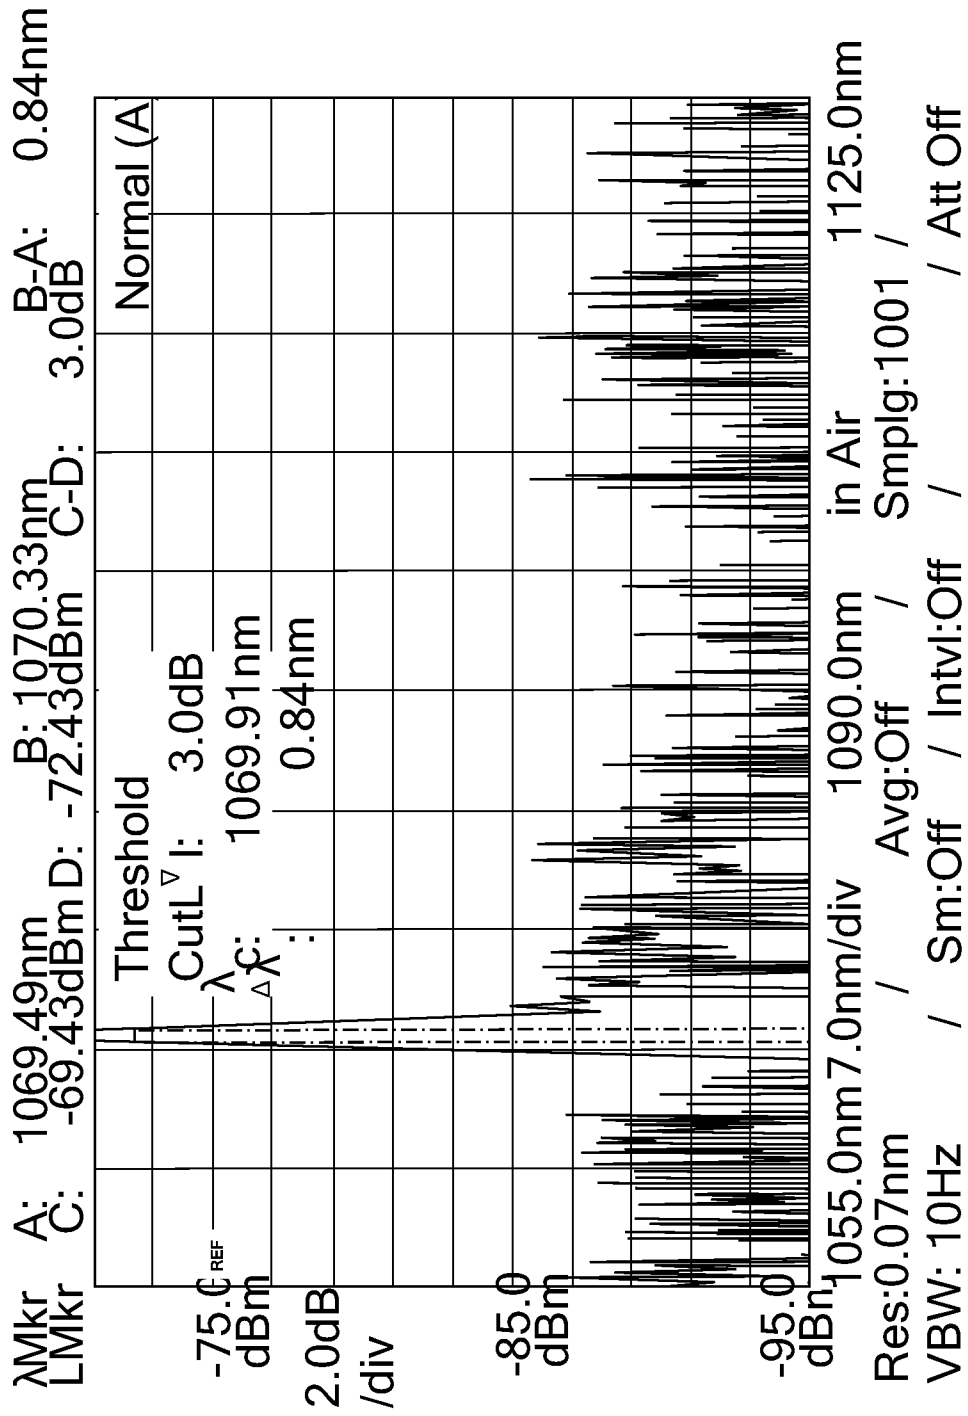


Fig. 18

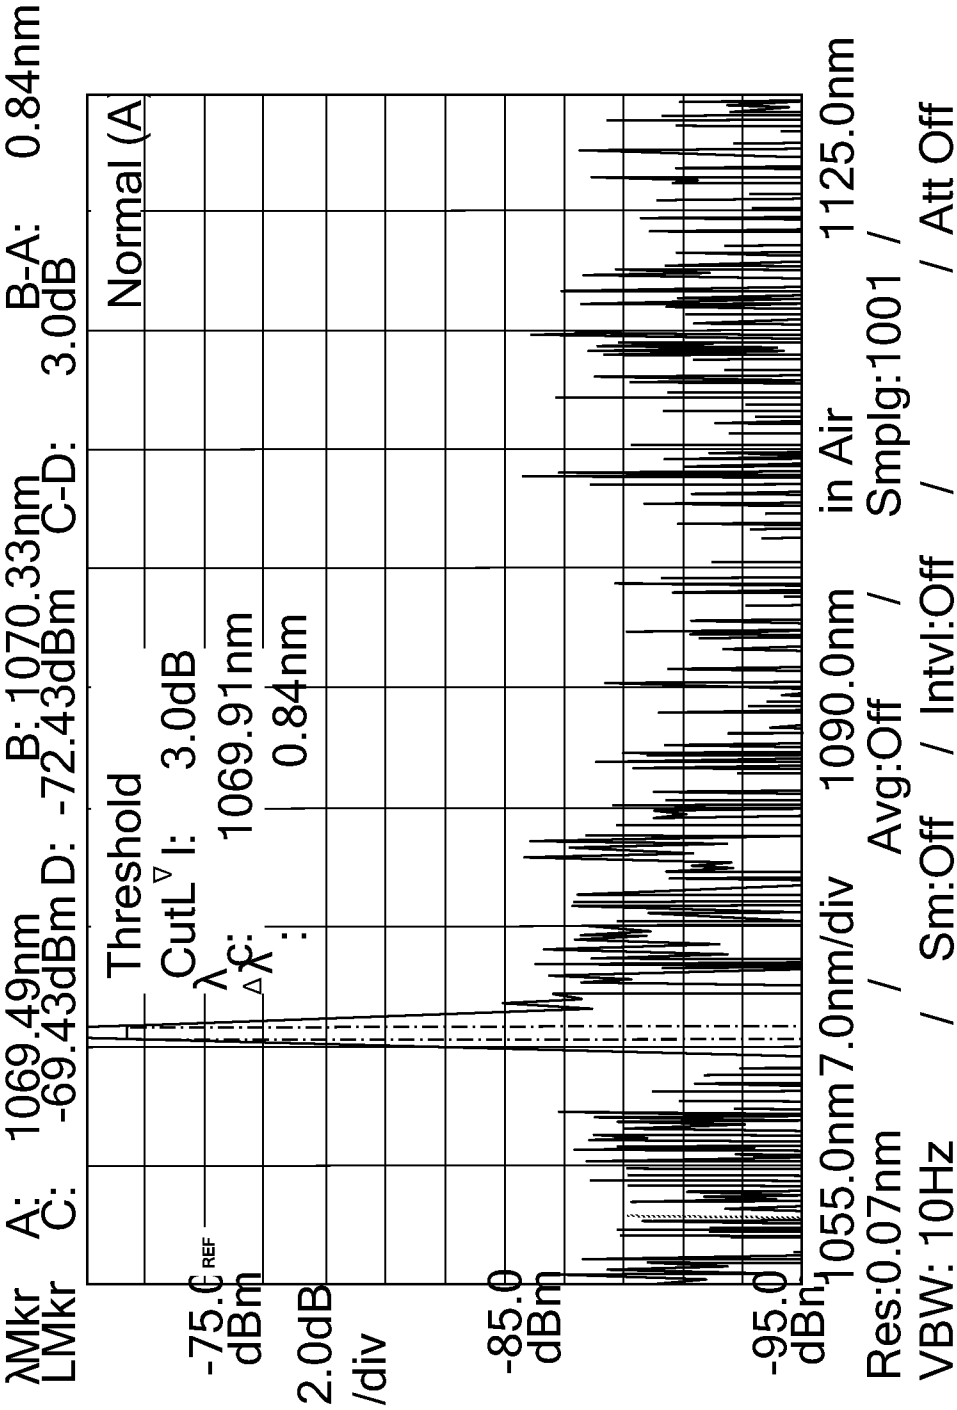


Fig. 19

19/20

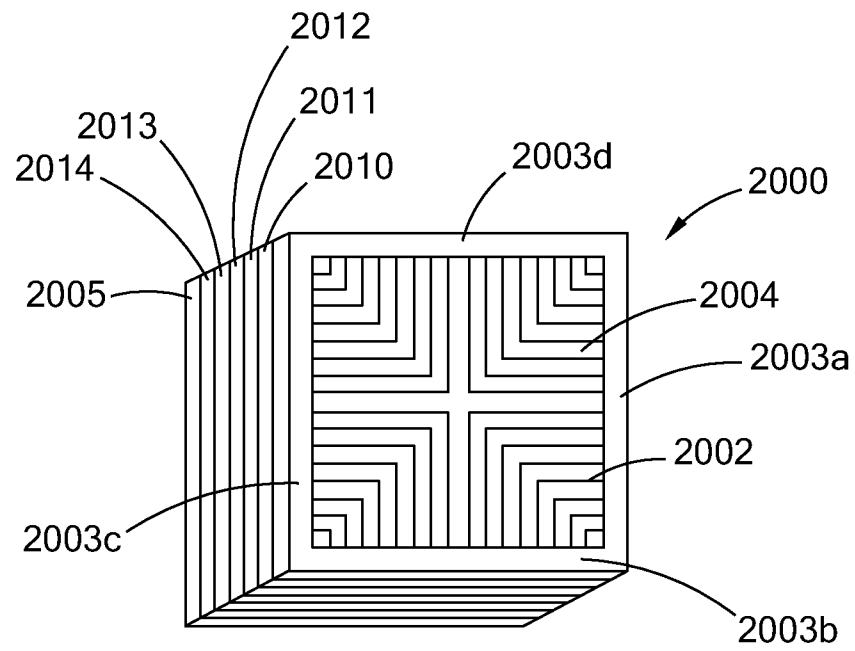


Fig. 20

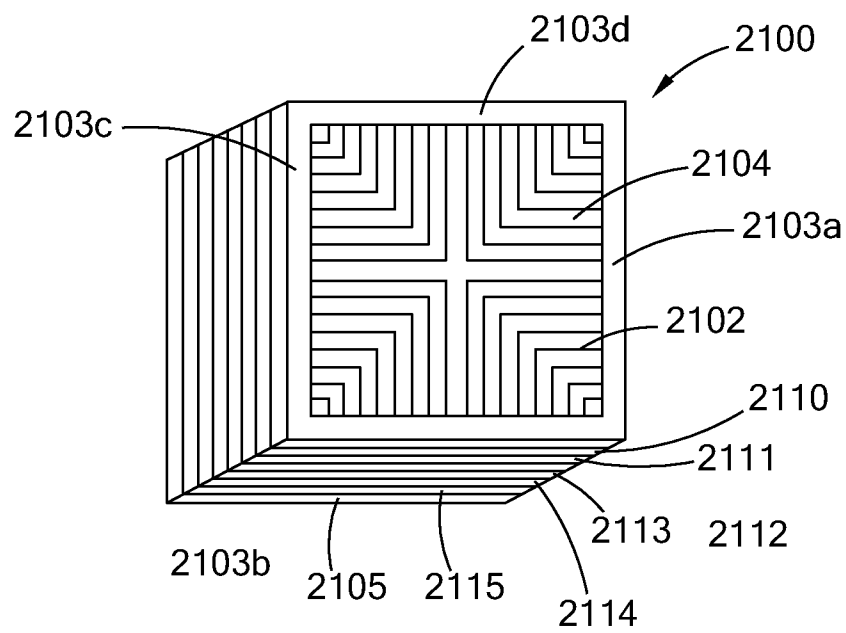


Fig. 21

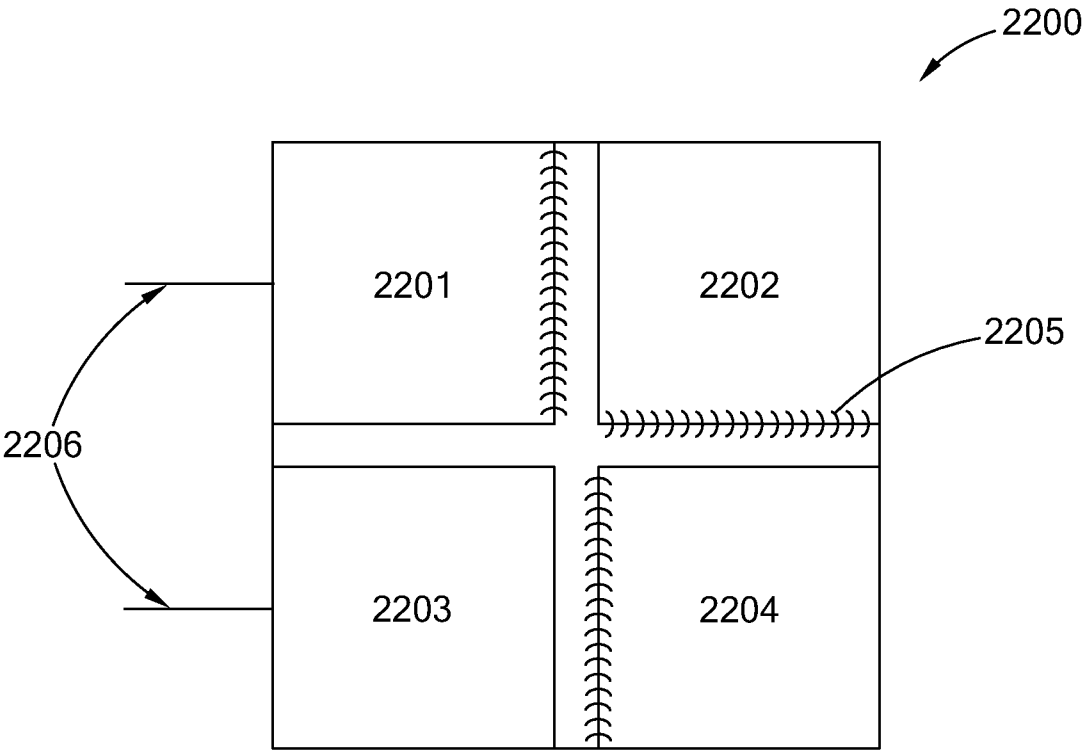


Fig. 22