

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3283714 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **E 04 H 9/06 (2006.01)** **E 04 B 2/72 (2006.01)** **E 04 B 2/74 (2006.01)**
E 04 H 9/10 (2006.01) **F 41 H 5/013 (2006.01)** **F 41 H 5/04 (2006.01)**
F 41 H 5/24 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2020-11-30**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2020-11-04**
- (86) Europæisk ansøgning nr.: **15721568.2**
- (86) Europæisk indleveringsdag: **2015-04-16**
- (87) Den europæiske ansøgnings publiceringsdag: **2018-02-21**
- (86) International ansøgning nr.: **EP2015000799**
- (87) Internationalt publikationsnr.: **WO2016165726**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Knauf Gips KG, Am Bahnhof 7, 97346 Iphofen, Tyskland**
- (72) Opfinder: **ZEHNTER, Heike, Gelchsheimerstrasse 7A, 97255 Sonderhofen, Tyskland**
- (74) Fuldmægtig i Danmark: **NORDIC PATENT SERVICE A/S, Bredgade 30, 1260 København K, Danmark**
- (54) Benævnelse: **KUGLEPROJEKTILMODSTANDSDYGTIG TØRVÆGSKONSTRUKTION**
- (56) Fremdragne publikationer:
DE-U1- 29 622 165
FR-A1- 2 757 890
GB-A- 1 052 073
US-A- 5 279 091
US-A1- 2007 245 933

DESCRIPTION

[0001] The invention relates to a bullet projectile resistant drywall. The bullet projectile resistant drywall structure can be used for building a bullet resistant separation wall or for the construction of a bullet resistant ceiling.

[0002] Bullet projectile resistant structures are made with many materials. A brick wall of a thickness of 24 cm, for example, is projectile resistant. However, the brick wall has many disadvantages compared to a drywall construction. Herein, the term drywall structure or dry wall construction denotes any structure or building construction with a frame substructure with building panels or boards mounted thereto. The static advantage of a drywall compared to a brick wall is due to its reduced weight. Most walls in a building do have to withstand any forces from above so they can be built as drywall construction of comparably low weight.

[0003] Handgun bullet projectile resistant drywall structures are known in the state of the art. A conventional handgun bullet projectile resistant partition wall structure comprises a substructure of drywall profiles (metal profiles) which form upright studs. The upright studs are fixed to drywall profiles which are mounted horizontally, extending from the bottom to the raw ceiling. Typically, the distance between adjacent upright studs is about 65 cm. The upright studs comprise parallel extending flange portions having an outer surface capable of attaching boards (building panels) thereto. Both parallel extending flanges are connected via a base portion. The parallel extending flanges and the base portion can be arranged in a C-form or a U-form.

[0004] To achieve the handgun bullet projectile resistance for a separation wall, it is known to arrange inside the substructure, i.e. only in the space formed between the base portions of adjacent drywall profiles, gypsum fiber boards. Inside the substructure (separation wall) means that the gypsum fiber boards are arranged so as to extend between the drywall profiles, only. The gypsum fiber boards stand between the base portions. It is uncommon to fix gypsum fiber boards to the flange portions of a substructure because of their high weight compared to a gypsum plasterboard. For example, the gypsum fiber board with the product name Knauf "Torro" has an areal density of 42 kg/m². Moreover, the gypsum fiber boards cannot be mounted like gypsum plasterboards since conventional screwing is not possible without pre-drilling.

[0005] Known structures provide projectile resistance performance of class FB4 (BR4 English language equivalent) according to DIN EN 1522 which is the highest class of protection against hand guns. EN 1522 is the Euronorm standard for bullet resistance by which structures are tested and rated. FB4 (BR4) resists 3 shots of a handgun .44 Magnum FJ (Full Metal Jacket) / FN (Flat Nose) / SC (Soft Core) of the weight 15,6 ± 0,1 g from a range of 5,00 ± 0,5 m having a velocity of 440 ± 10 m/s and an impact energy of 1510J.

[0006] Tests have shown that conventional separation wall structures of the above described

type are not suitable for bullet projectile resistance of higher classes. In fact, test shots with a rifle, in particular the sizes of the formed shot channels, on those handgun bullet projectile resistant drywall structures lead to the impression that no drywall construction would stand a rifle bullet projectile. The next class higher than FB4 is FB 5 (BR5) which is the first class for the resistance against rifle bullets. FB5 structures resist three shots from a rifle in caliber 5.56x45mm NATO FJ (Full Metal Jacket) / PB (Pointed Bullet) /SCP (Soft Core (lead) & Steel Penetrator) of the weight $4,0 \pm 0,1$ g from a range $10,00 \pm 0,5$ m having a velocity of 950 ± 10 m/s with an impact energy of 1800 J.

[0007] There is a strong need for drywall constructions with increased bullet resistance compared to the state of the art. Killing sprees and terrorizing assaults are mostly carried out by use of rifles. Hence the handgun bullet projectile resistance is not sufficient and structures with rifle bullet projectile resistance are required. One specific field of application are structures in public buildings (schools, police stations, court buildings, etc.). Further fields of application are easily conceivable.

[0008] US 2007/245933 A1 discloses a bullet projectile resistant drywall structure with the features of the preamble of claim 1. US 5 279 091 A discloses another bullet projectile resistant drywall structure.

[0009] The object of the invention is therefore to provide a bullet projectile resistant drywall structure, which has a bullet resistance performance for rifle bullets and shows the advantages of drywall constructions. The bullet projectile resistant drywall structure is to be used particularly in public buildings which are accessed by many people.

[0010] The problem is solved by a bullet projectile resistant drywall structure with the features of claim 1. Preferred aspects form the subject matter of the dependent claims.

[0011] According to the invention a bullet projectile resistant drywall structure for building a separation wall comprises a plurality of drywall profiles arranged in a manner so as to form a drywall substructure capable of attaching building boards thereto. Each drywall profile has a base portion and parallel extending flange portions having an outer side capable of attaching building boards thereto. A plurality of inner gypsum fiber boards is arranged between the drywall profiles so as to extend between the base portions of adjacent drywall profiles and a plurality of outer gypsum fiber boards is directly or indirectly attached to the respective outer side of both parallel extending flange portions. Directly or indirectly attached to the outer side of the flange portion means that the boards can be fixed to the flange portion face to face or through another layer that is arranged between the flange portion and the board. This layer can for example be a metal sheet layer.

[0012] By providing not only the inner gypsum fiber boards but additional outer gypsum fiber boards to increase the overall number of gypsum fiber board layers (i.e., the overall thickness of gypsums fiber boards), the bullet resistance of the structure is increased compared to known structures having only inner gypsum fiber boards arranged inside the substructure.

Surprisingly the improved structure has shown to be capable of resisting three shots from a rifle in caliber 5.56x45mm NATO FJ (Full Metal Jacket) / PB (Pointed Bullet) /SCP (Soft Core (lead) & Steel Penetrator) of the weight $4,0 \pm 0,1$ g from a range $10,00 \pm 0,5$ m having a velocity of 950 ± 10 m/s with an impact energy of 1800 J so as to comply with FB5. To have gypsum fiber boards attached to the outer sides of the drywall profiles has the advantage over the prior art structures that additional layers of gypsums fiber boards are attached on a known substructure. A structure according to such a construction principle is not yet known because of the conventional drywall profiles have been deemed not to be of a sufficient strength.

[0013] A preferred aspect relates to that the plurality of inner gypsum fiber boards are arranged in two individual layers extending parallel in a longitudinal direction of the drywall structure. The gypsum fiber boards of a first of the two parallel layers are arranged staggered with respect the gypsum fiber boards of a second of the two parallel layers so that there are no common abutting edge joint (joint formed by the edges of abutting gypsum fiber boards) completely extending through in a cross-direction of the drywall structure. The abutting edge joint is formed by abutting adjacent gypsum fiber boards. The cross direction is the direction in the thickness of the structure and hence, the main direction of the impacting bullet. In this construction the joints formed by the abutting gypsum fiber boards are arranged in an offset pattern so that no common abutting edge joints extend across the drywall structure. This is achieved by a displaced arrangement of the parallel extending boards (boards).

[0014] Advantageously, the gypsum fiber boards of a first of the two parallel layers are arranged staggered with respect the gypsum fiber boards of a second of the two parallel layers so that the adjacent abutting edge joints of the parallel layers have a respective distance of half of the length of the gypsum fiber boards. This allows arranging the inner gypsum fiber boards comparable to a brick wall while a maximum bullet resistance is achieved.

[0015] For an improved strength, the bullet projectile resistant drywall structure further comprises a sheet metal layer arranged between the plurality of outer gypsum fiber boards and the respective outer sides of the parallel extending flange portions. The sheet metal layer is screwed to the drywall profiles and the outer gypsum fiber boards can be attached to the sheet metal layer by an adhesive. Hence the screwing and in particular the pre-drilling of the gypsum fiber boards is not needed.

[0016] In one additional aspect, a gypsum plasterboard layer is arranged between the sheet metal layer and the respective outer sides of the parallel extending flange portions. This allows to further increase the bullet projectile resistance of the structure. In specific examples further layers of gypsum plasterboards as well as sheet metals can be used. The sheet metal layer has a thickness preferably above 0,5 mm.

[0017] The tests have been made with gypsum fiber boards of a density above 1200 kg/m^3 . Best results have been achieved with gypsum fiber boards of a density above 1500 kg/m^3 and a thickness of more than 28 mm. The product "Knauf Torro" is a gypsum fiber board of a

density of 1500 kg/m^3 provided in a thickness of 28 mm. The tested structure consists of two parallel extending layers of inner gypsum fiber boards and one layer of gypsum fiber boards on each of the outer sides of the parallel extending flange portions.

[0018] In the following the bullet projectile resistant drywall structure according to the invention will be explained in more detail with reference to drawings. Like reference numerals denote similar features throughout the drawings. Aspects shown in the drawings can be connected and combined with each other in any technically possible way.

[0019] In the drawings is:

Fig. 1

a vertical cross-section of the bullet projectile resistant drywall separation wall with a sheet metal layer;

Fig. 2

a vertical cross-section of the bullet projectile resistant drywall separation wall with a sheet metal layer and a plasterboard layer;

Fig. 3

a vertical cross-section of the bullet projectile resistant drywall separation wall with only a plasterboard layer;

Fig. 4

a vertical cross-section of the bullet projectile resistant drywall separation wall having the outer gypsum fiber boards attached to the drywall profiles by an adhesive; and

Fig. 5

a vertical cross-section of the bullet projectile resistant drywall separation wall having the outer gypsum fiber boards attached to the drywall profiles by screws.

[0020] Fig. 1 is a vertical cross-section of the bullet projectile resistant drywall separation wall 1 which shows the advantages of the invention and complies with projectile resistance performance of FB5. The structure comprises two individual sheet metal layers 4 to provide a good strength and good workability.

[0021] The Bullet projectile resistant drywall structure 1 comprises drywall profiles 2 (only one is shown) having a base portion 22 and connected thereto parallel extending flange portions 21. The flange portions have outer sites 211 capable of fixing gypsum fiber boards thereto. The depicted drywall profile 2 is a metal profile which represents a plurality of drywall profiles 2 arranged in a manner so as to form a substructure.

[0022] A plurality of inner gypsum fiber boards 32 are arranged parallel between the drywall profiles 2 so as to extend between the base portions 22 of adjacent drywall profiles 2. In this representation only one drywall profile 2 is shown, however the arrangement between the base portions 22 can easily be perceived. A plurality of outer gypsum fiber boards 31 are respectively attached to the outer sides 211 of both parallel extending flange portions 21. This structure

provides four layers of gypsum fiber boards 31, 32 which are to be penetrated by a bullet travelling in the direction of the thickness of the separation wall. The gypsum fiber boards 31, 32 have a thickness of 28 mm and a density of 1500 kg/m³. For better processing the sheet metal layer 4 (thickness 1mm) is arranged between the plurality of outer gypsum fiber boards 31 and the respective outer sides 211 of the parallel extending flange portions 21.

[0023] According to the invention by providing inner gypsum fiber boards 31 and outer gypsum fiber boards 32, the strength of the structure 1 is increased compared to known structures having only inner gypsum fiber boards arranged inside the substructure. The shown separation wall structure 1 is capable of resisting three shots from a rifle in caliber 5.56x45mm NATO FJ (Full Metal Jacket) / PB (Pointed Bullet) /SCP (Soft Core (lead) & Steel Penetrator) of the weight $4,0 \pm 0,1$ g from a range $10,00 \pm 0,5$ m having a velocity of 950 ± 10 m/s with an impact energy of 1800 J so as to comply with FB5.

[0024] Another example for a structure according to the invention is shown in **Fig. 2** which is a vertical cross-section of the bullet projectile resistant drywall separation wall 1 with a sheet metal layer 4 and a plasterboard layer 5. The gypsum plasterboard layer 5 is arranged between the sheet metal layer 4 and the respective outer sides 211 of the parallel extending flange portions 21. The shown sheet metal layer 4 is sheet metal of a thickness of 1 mm. The plasterboard layer 5 is separately screwed to the profile 2 with screws 23. The sheet metal layer 4 is screwed by separate screws 24 to the layer of plasterboards 5. Additionally an adhesive (not visible in this presentation) can be applied between the sheet metal layer 4 and the plasterboard 5. An advantage of this structure is that the outer gypsum fiber boards 31 can be fixed to the sheet metal layer 4 by an adhesive applied over the entire contact area and no screws and pre-drilling is needed. The arrangement order of the sheet metal layer 4 and the plasterboard layer 5 can, of course, also be reverse.

[0025] Another vertical cross-section of the bullet projectile resistant drywall separation 1 wall is shown in **Fig. 3** with a plasterboard layer 5. The outer gypsum fiber boards 31 are fixed to a layer of plasterboards 5 by an adhesive. The plasterboards 5 are screwed to the drywall profile 2. This construction allows to avoid to fix the outer gypsum fiber boards 31 without screws and, thus, without pre-drilling.

[0026] In **Fig. 4** and **Fig. 5** the bullet projectile resistant drywall separation wall 1 has been constructed so that the outer gypsum fiber boards 31 are directly attached to the outer surfaces 211 of the flange portions 21 of the drywall profile 2. In **Fig. 4** this is carried out by use of an adhesive (not visible in this presentation since only a thin layer is applied) and in **Fig. 5** this is carried out by use of drywall screws 24.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not

form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US2007245933A1 [0008]
- US5279091A [0008]

Patentkrav

1. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1), hvilken tørvægskonstruktion omfatter en flerhed af tørvægsprofiler (2), der er anbragt på en måde med henblik på at danne en tørvægsunderkonstruktion, idet hver tørvægsprofil har en basisdel (22) og dermed forbundne parallelt forløbende flangedele (21), til hvilke der kan fastgøres byggeplader; en flerhed af indre gipsfiberplader (32), der er anbragt mellem tørvægsprofilerne med henblik på at forløbe mellem nabostillede tørvægsprofilers basisdele; **kendetegnet ved, at** en flerhed af ydre gipsfiberplader (31) direkte eller indirekte er fastgjort til de parallelt forløbende flangedele, hvor den kugleprojektilmodstandsdygtige tørvægskonstruktion yderligere omfatter et metalpladelag (4), der er anbragt mellem flerheden af ydre gipsfiberplader (31) og tilhørende ydre sider (211) af de parallelt forløbende flangedele (21).
2. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge krav 1, hvor flerheden af indre gipsfiberplader (32) er anbragt i to individuelle lag, der forløber parallelt i en længderetning af tørvægskonstruktionen (1), og hvor gipsfiberpladerne i et første af de to parallelle lag (32) er anbragt forskudt i forhold til gipsfiberpladerne i et andet af de to parallelle lag (32), således at der ikke forløber nogen fælles anliggende kantfuger på tværs af tørvægskonstruktionen (1).
3. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge krav 2, hvor gipsfiberpladerne i et første lag af de to parallelle lag (32) er anbragt forskudt i forhold til gipsfiberpladerne i et andet lag af de to parallelle lag (32), således at de nabostillede kantfuger af de respektive andre af de parallelle lag (32) har en tilhørende afstand på halvdelen af gipsfiberpladernes længde.
4. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge krav 1, der endvidere omfatter et gipskartonpladelag (5), der er anbragt mellem metalpladelaget (4) og de tilhørende ydre sider (211) af de parallelt forløbende flangedele (21).
5. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge krav 1 eller 4, hvor metalpladelaget (4) omfatter metalplade med en tykkelse på over 0,5 mm.
6. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge et hvilket som helst af kravene 1 til 3, der endvidere omfatter et gipskartonpladelag (5), der er anbragt mellem flerheden af ydre gipsfiberplader (31) og tilhørende ydre sider (211) af de parallelt forløbende flangedele (21).
7. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge et hvilket som helst af de foregående krav, hvor gipsfiberpladerne har en densitet på over 1200 kg/m³, især en densitet på over

1500 kg/m³.

8. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge et hvilket som helst af de foregående krav, hvor gipsfiberpladerne har en tykkelse på mere end 28 mm.



5

9. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge et hvilket som helst af de foregående krav, idet konstruktionen består af to parallelt forløbende lag af indre gipsfiberplader (32) og på hver af de ydre sider af de parallelt forløbende flangedele (21) ét lag af gipsfiberplader (31), idet gipsfiberpladerne har en densitet på 1500 kg/m³ og en tykkelse på 28 mm.

10

10. Kugleprojektilmodstandsdygtig tørvægskonstruktion (1) ifølge et hvilket som helst af de foregående krav, hvor tørvægskonstruktionen modstår riffelkugler ifølge FB5-testen i DIN EN 1522.

DRAWINGS

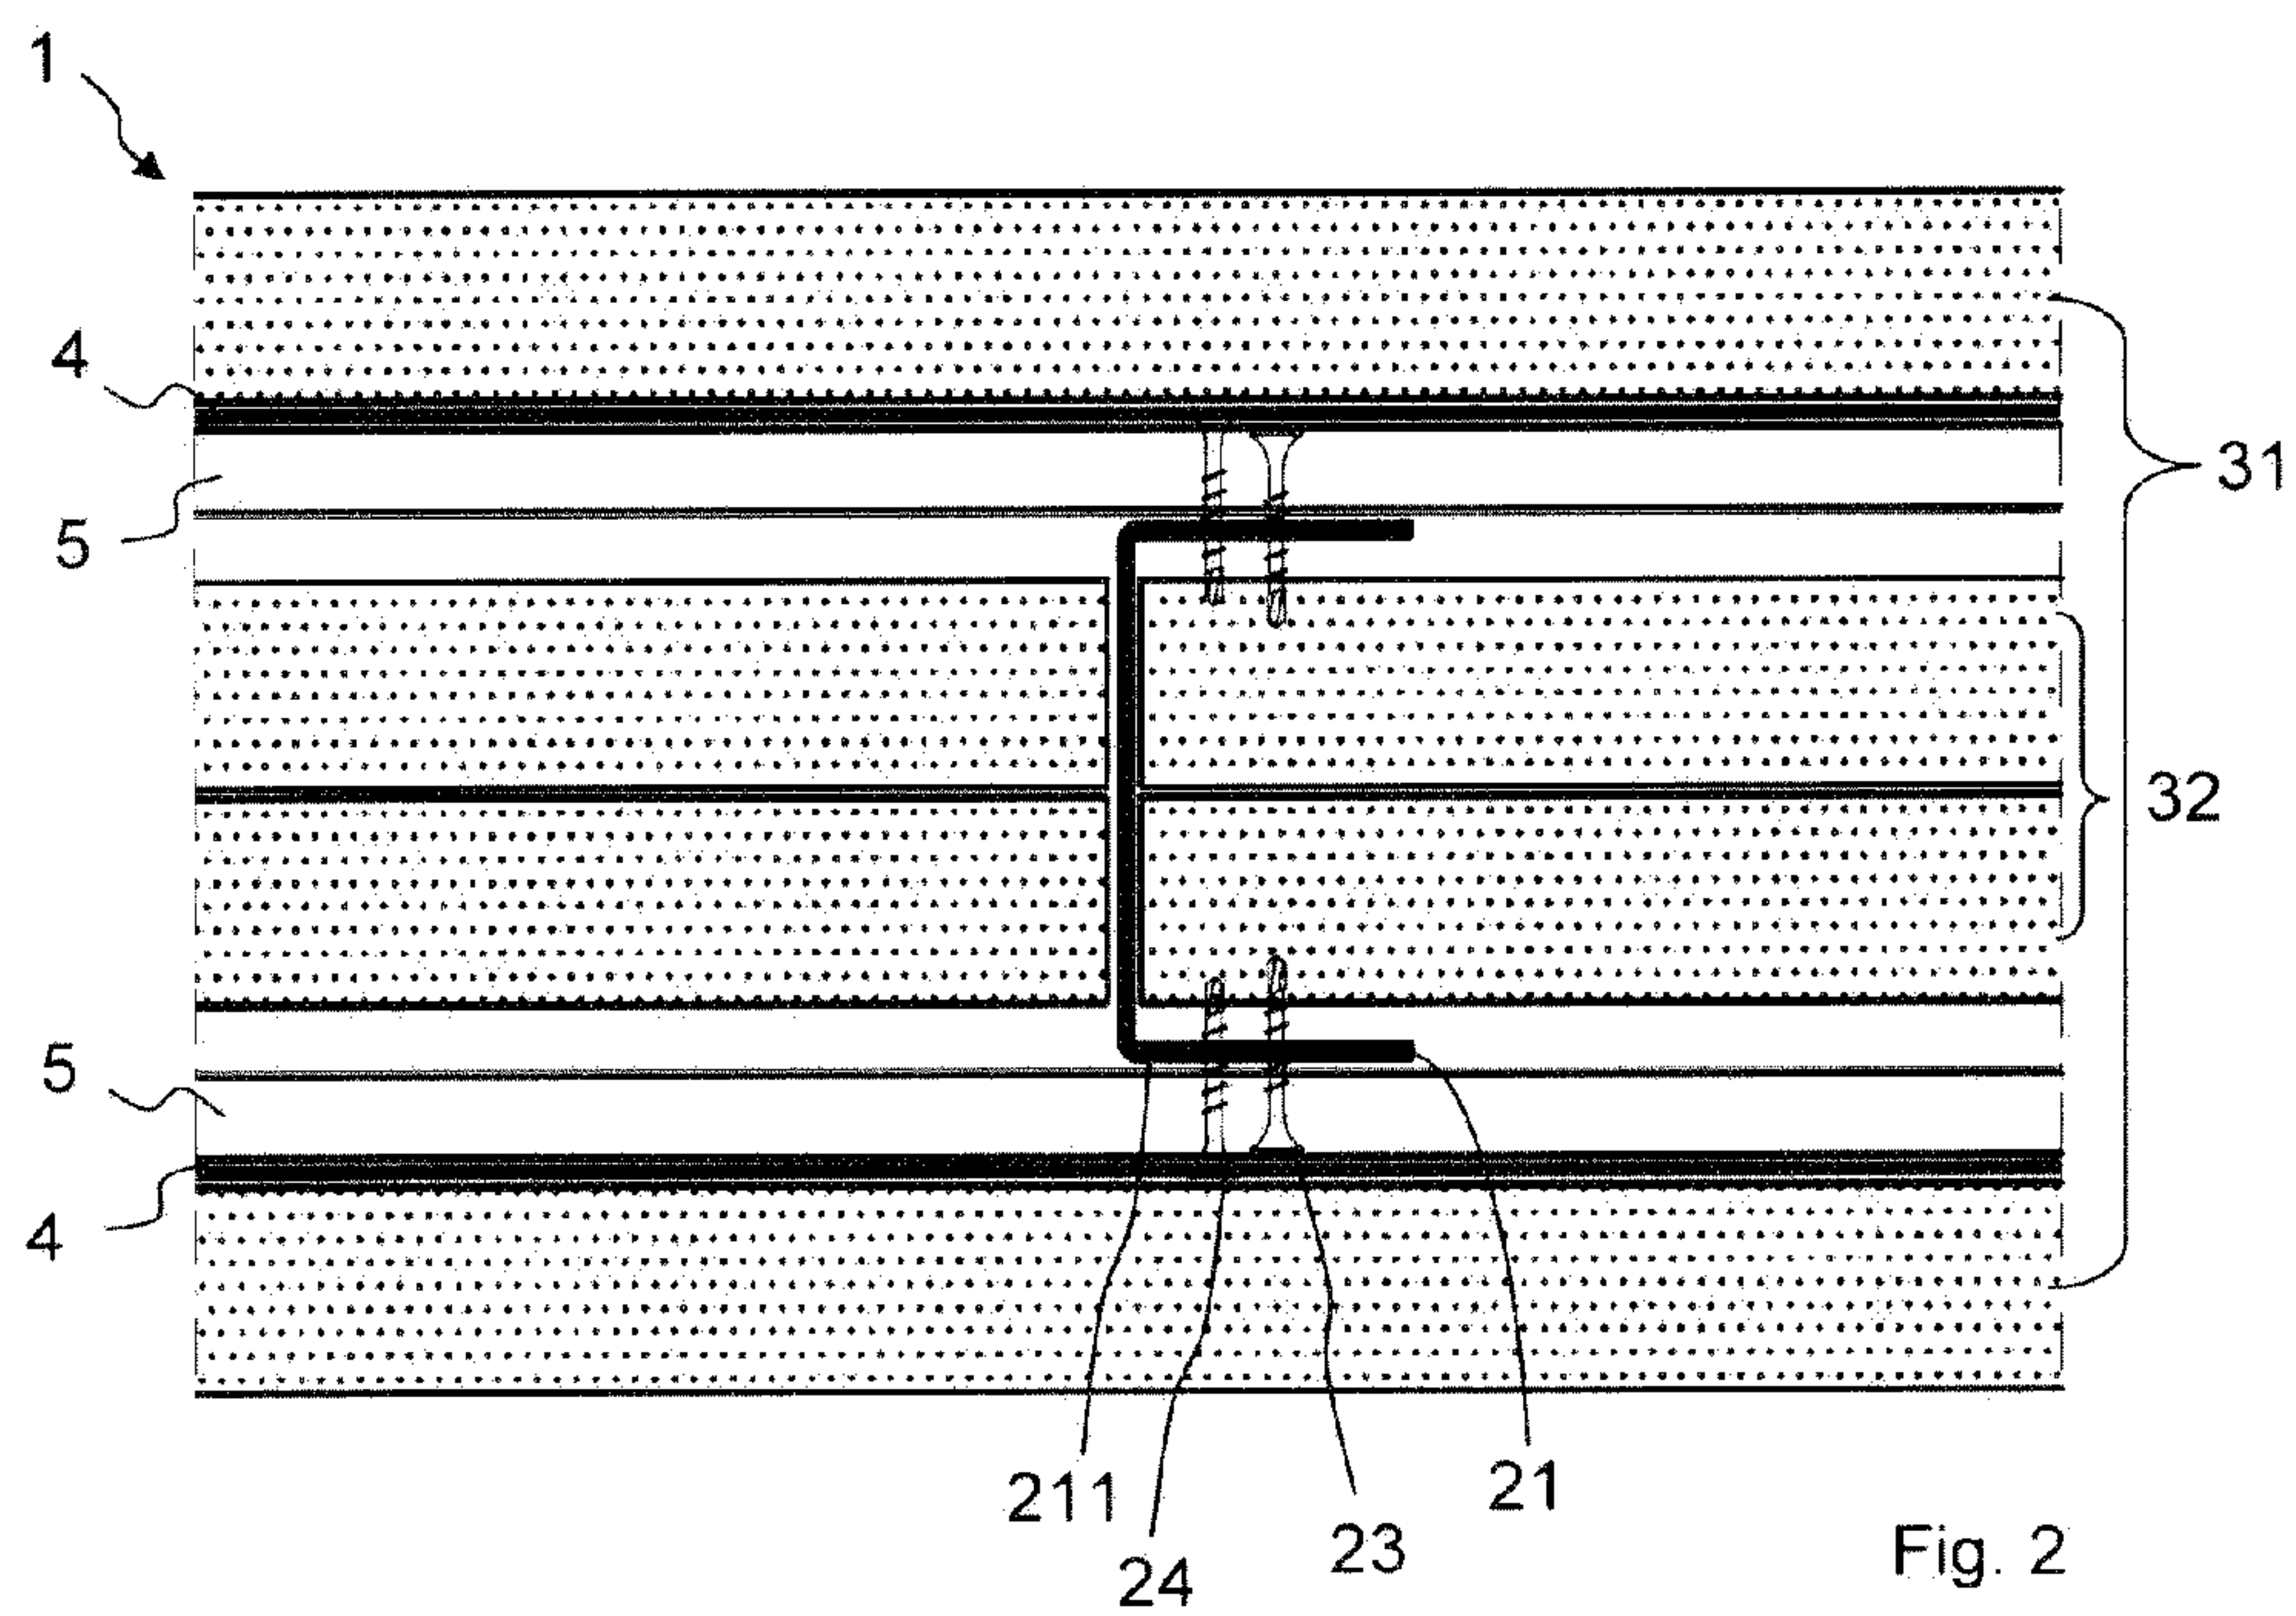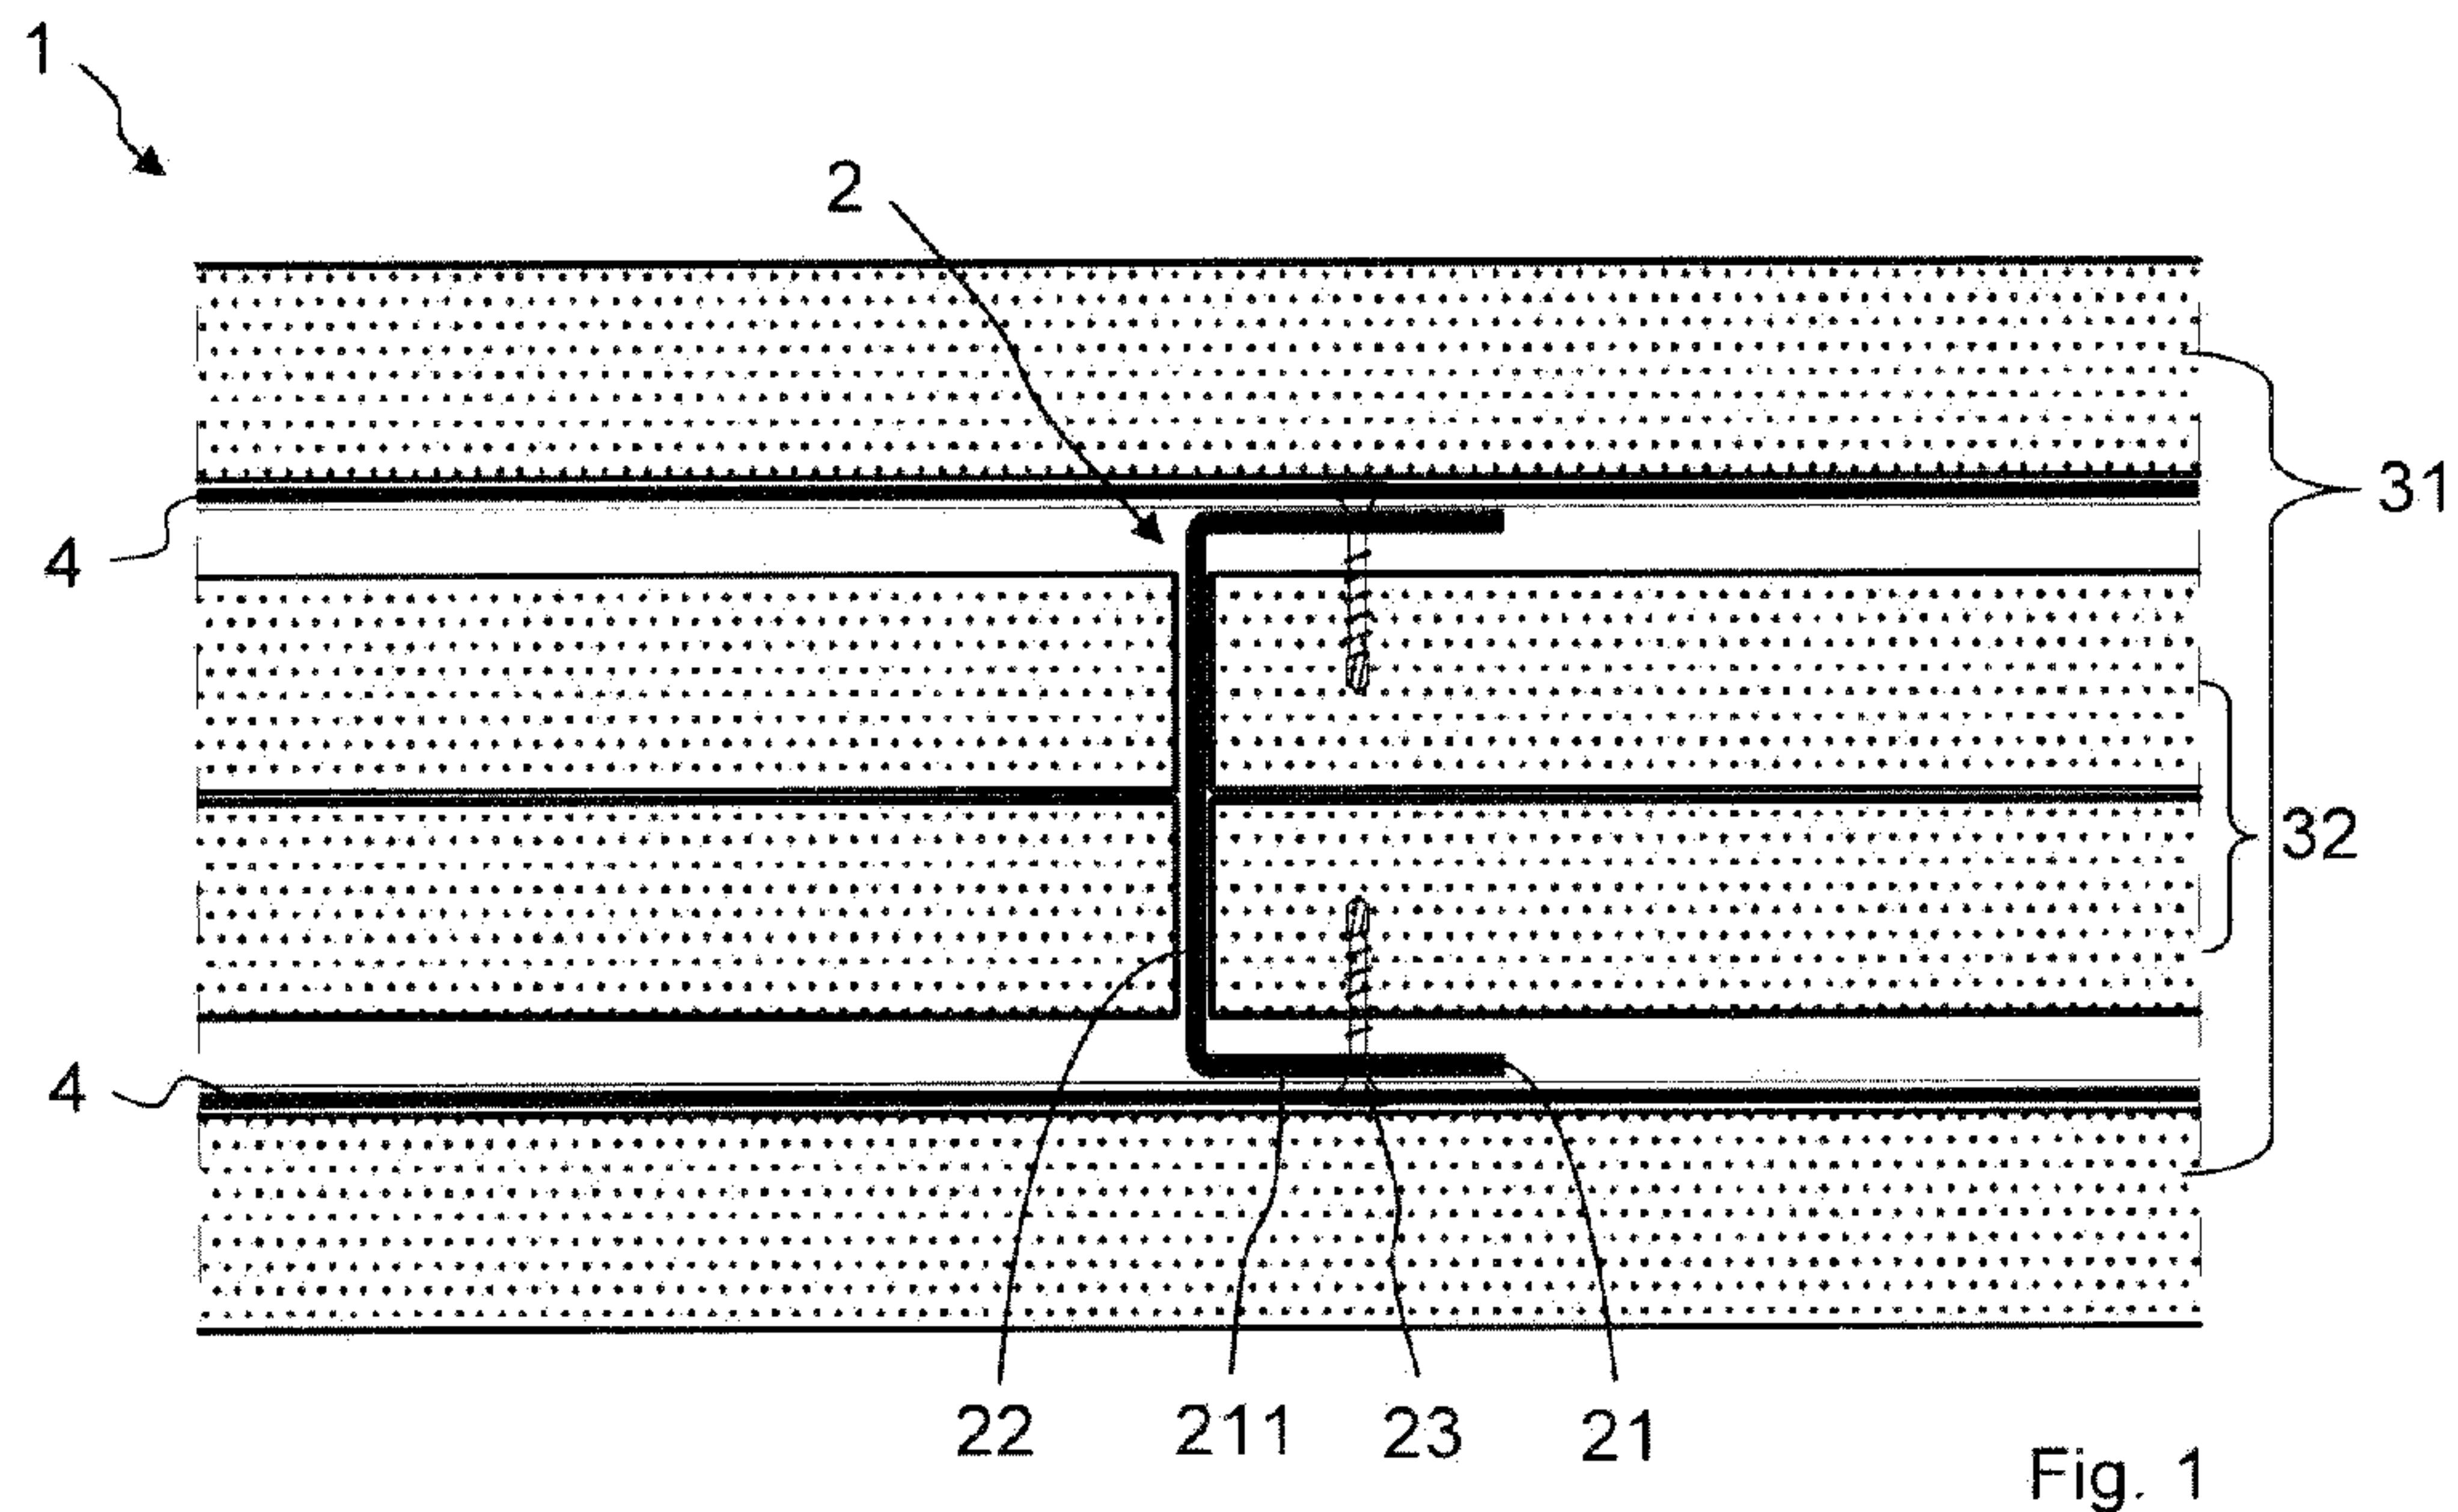

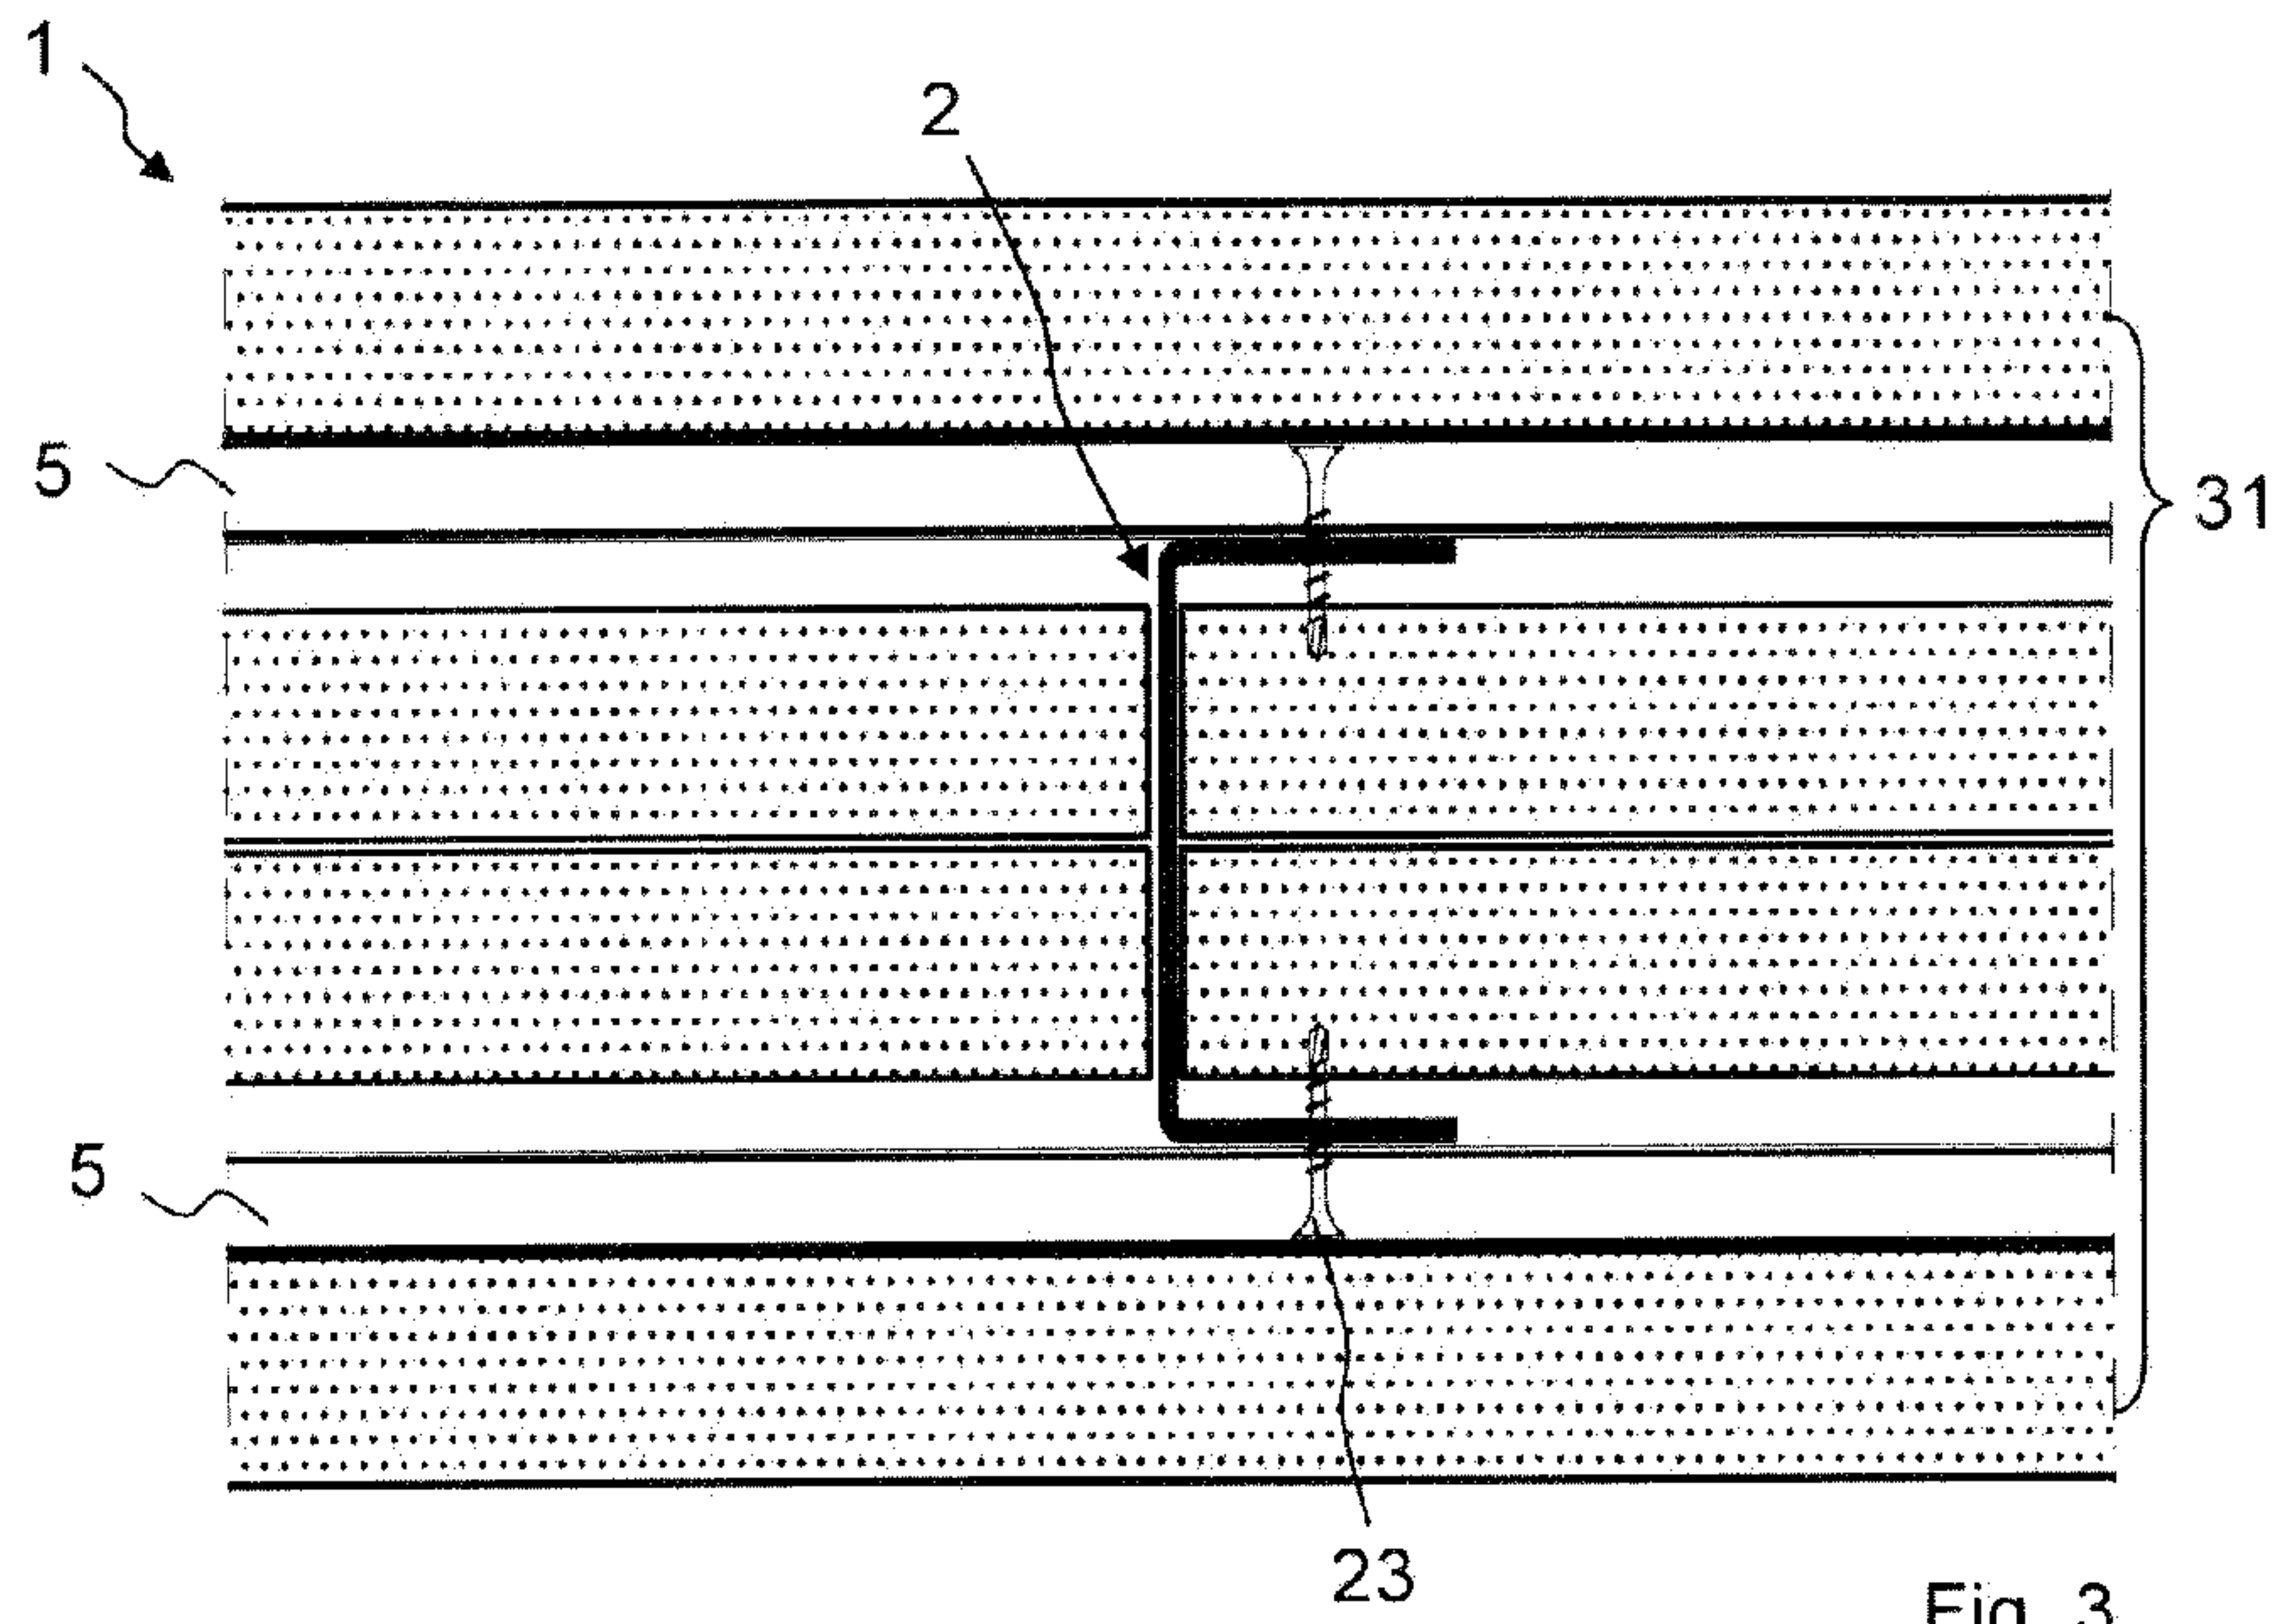


Fig. 3

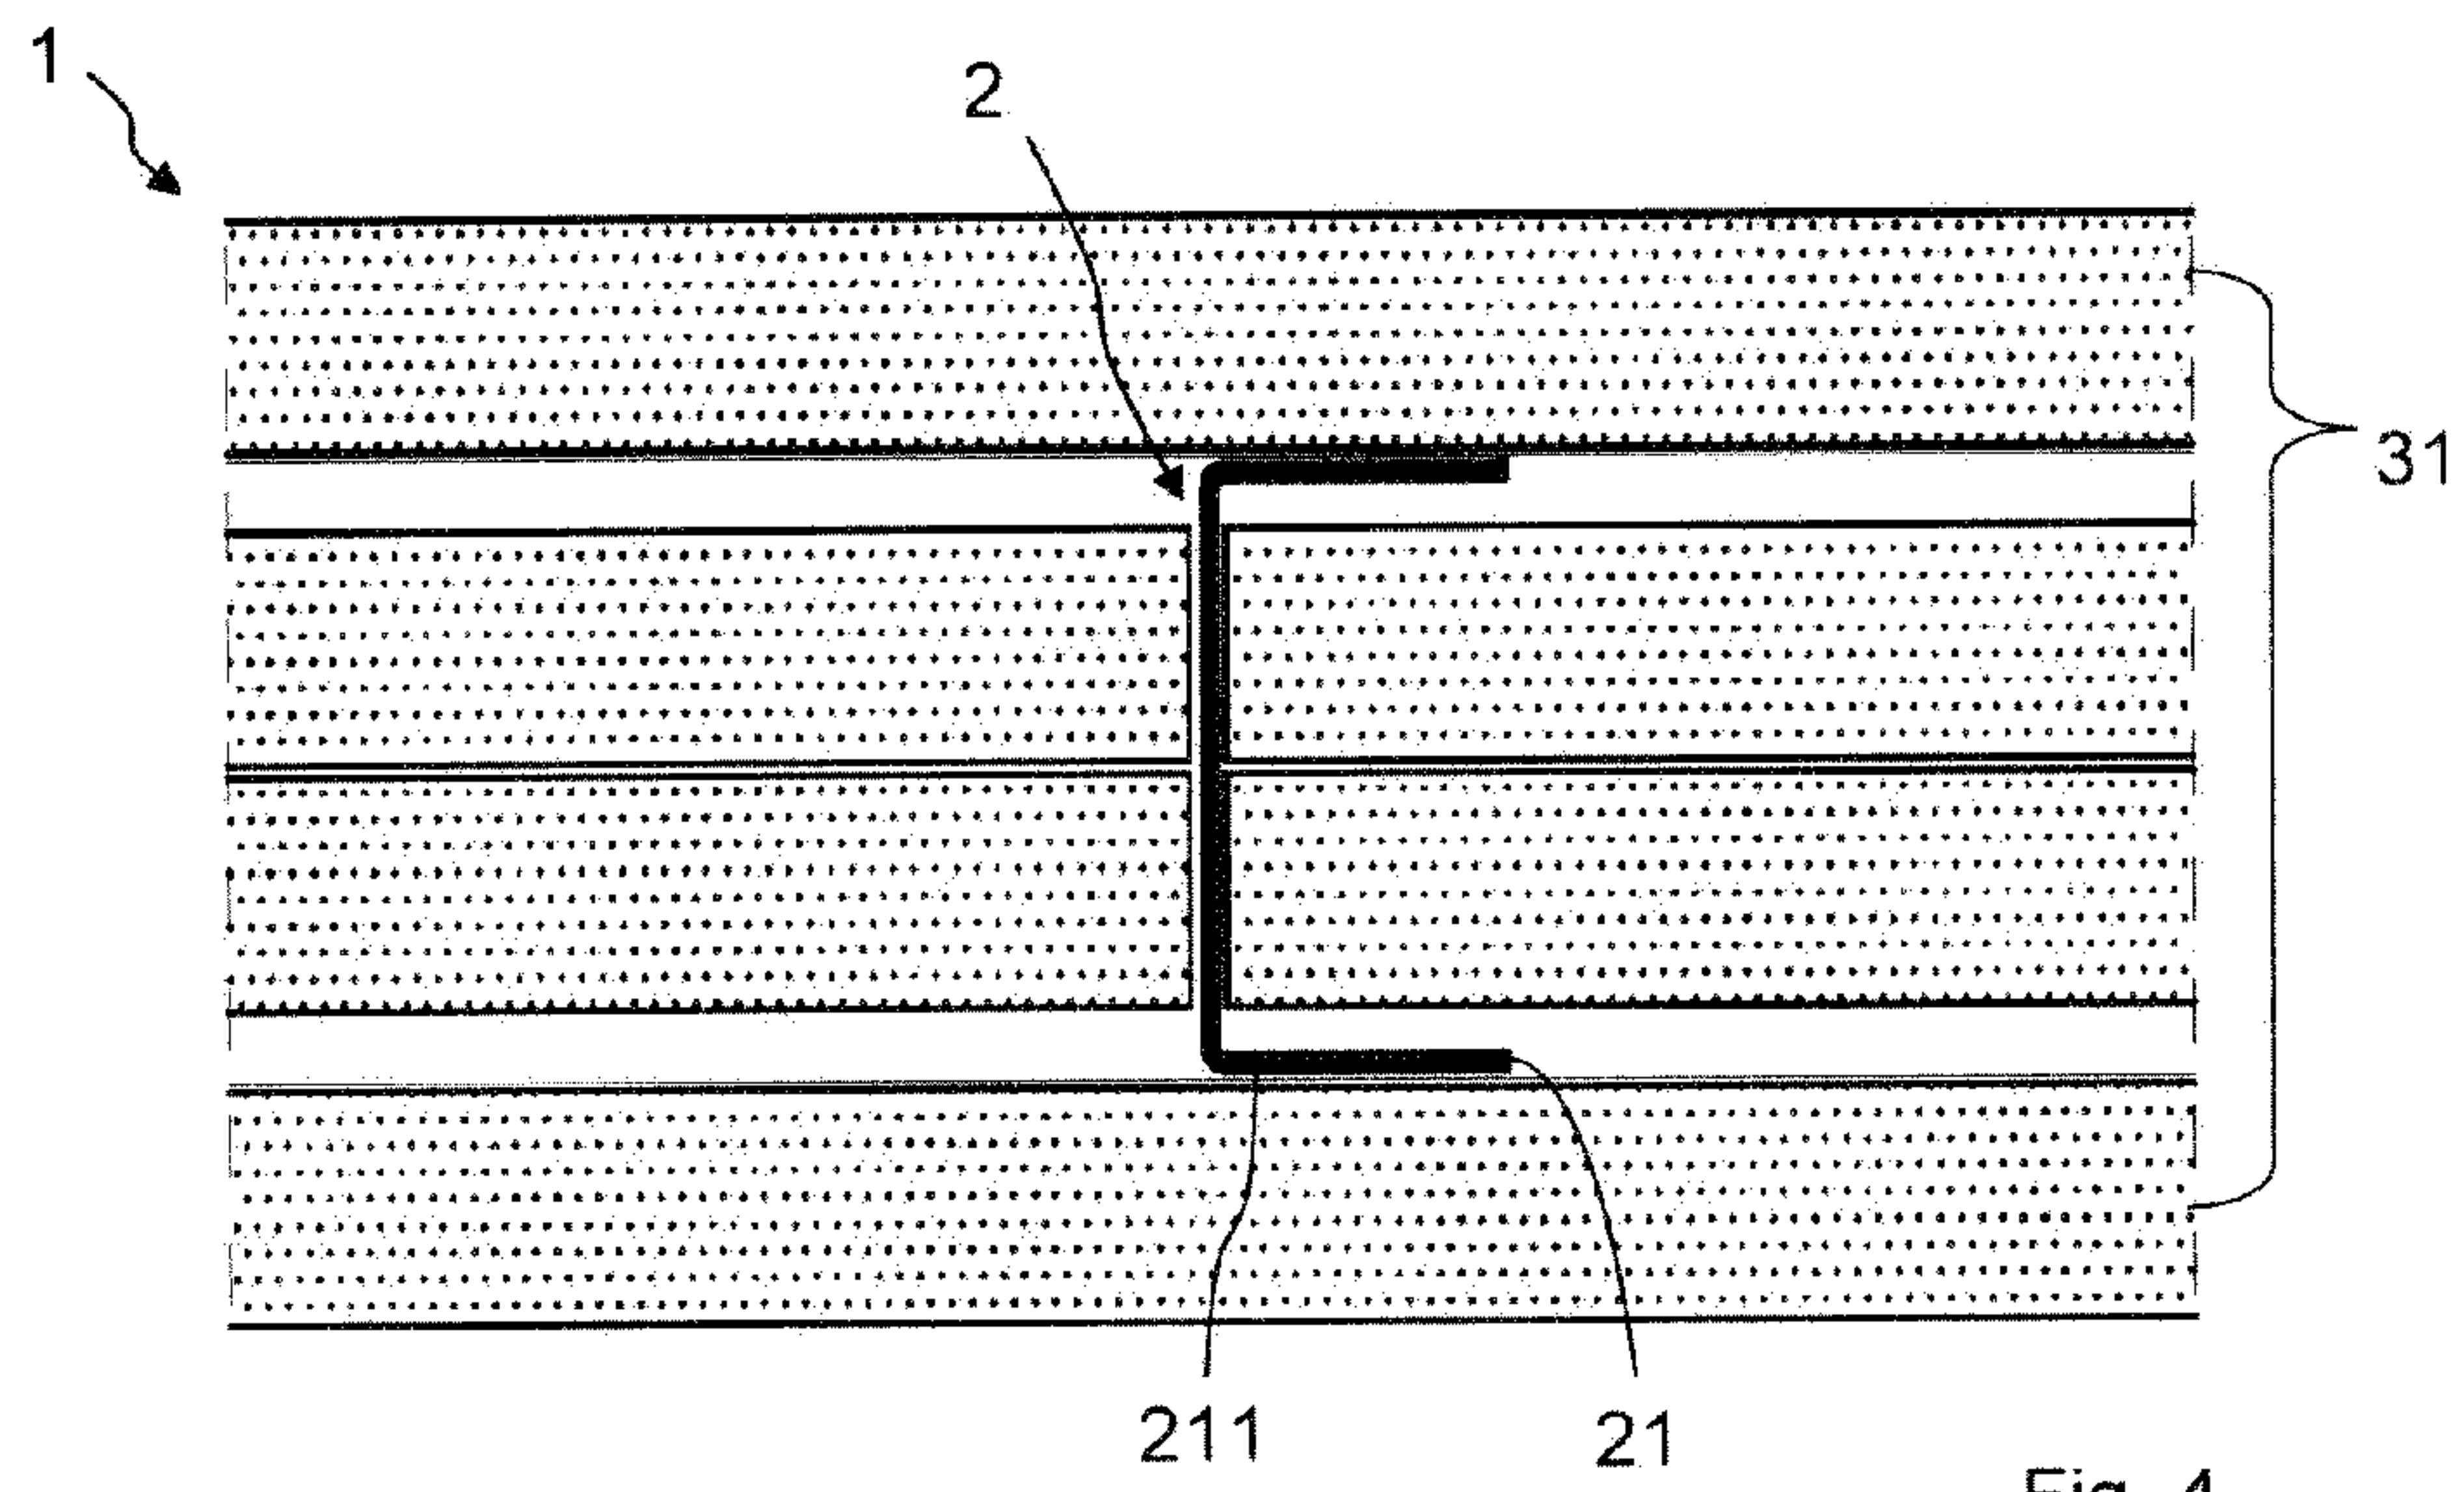


Fig. 4

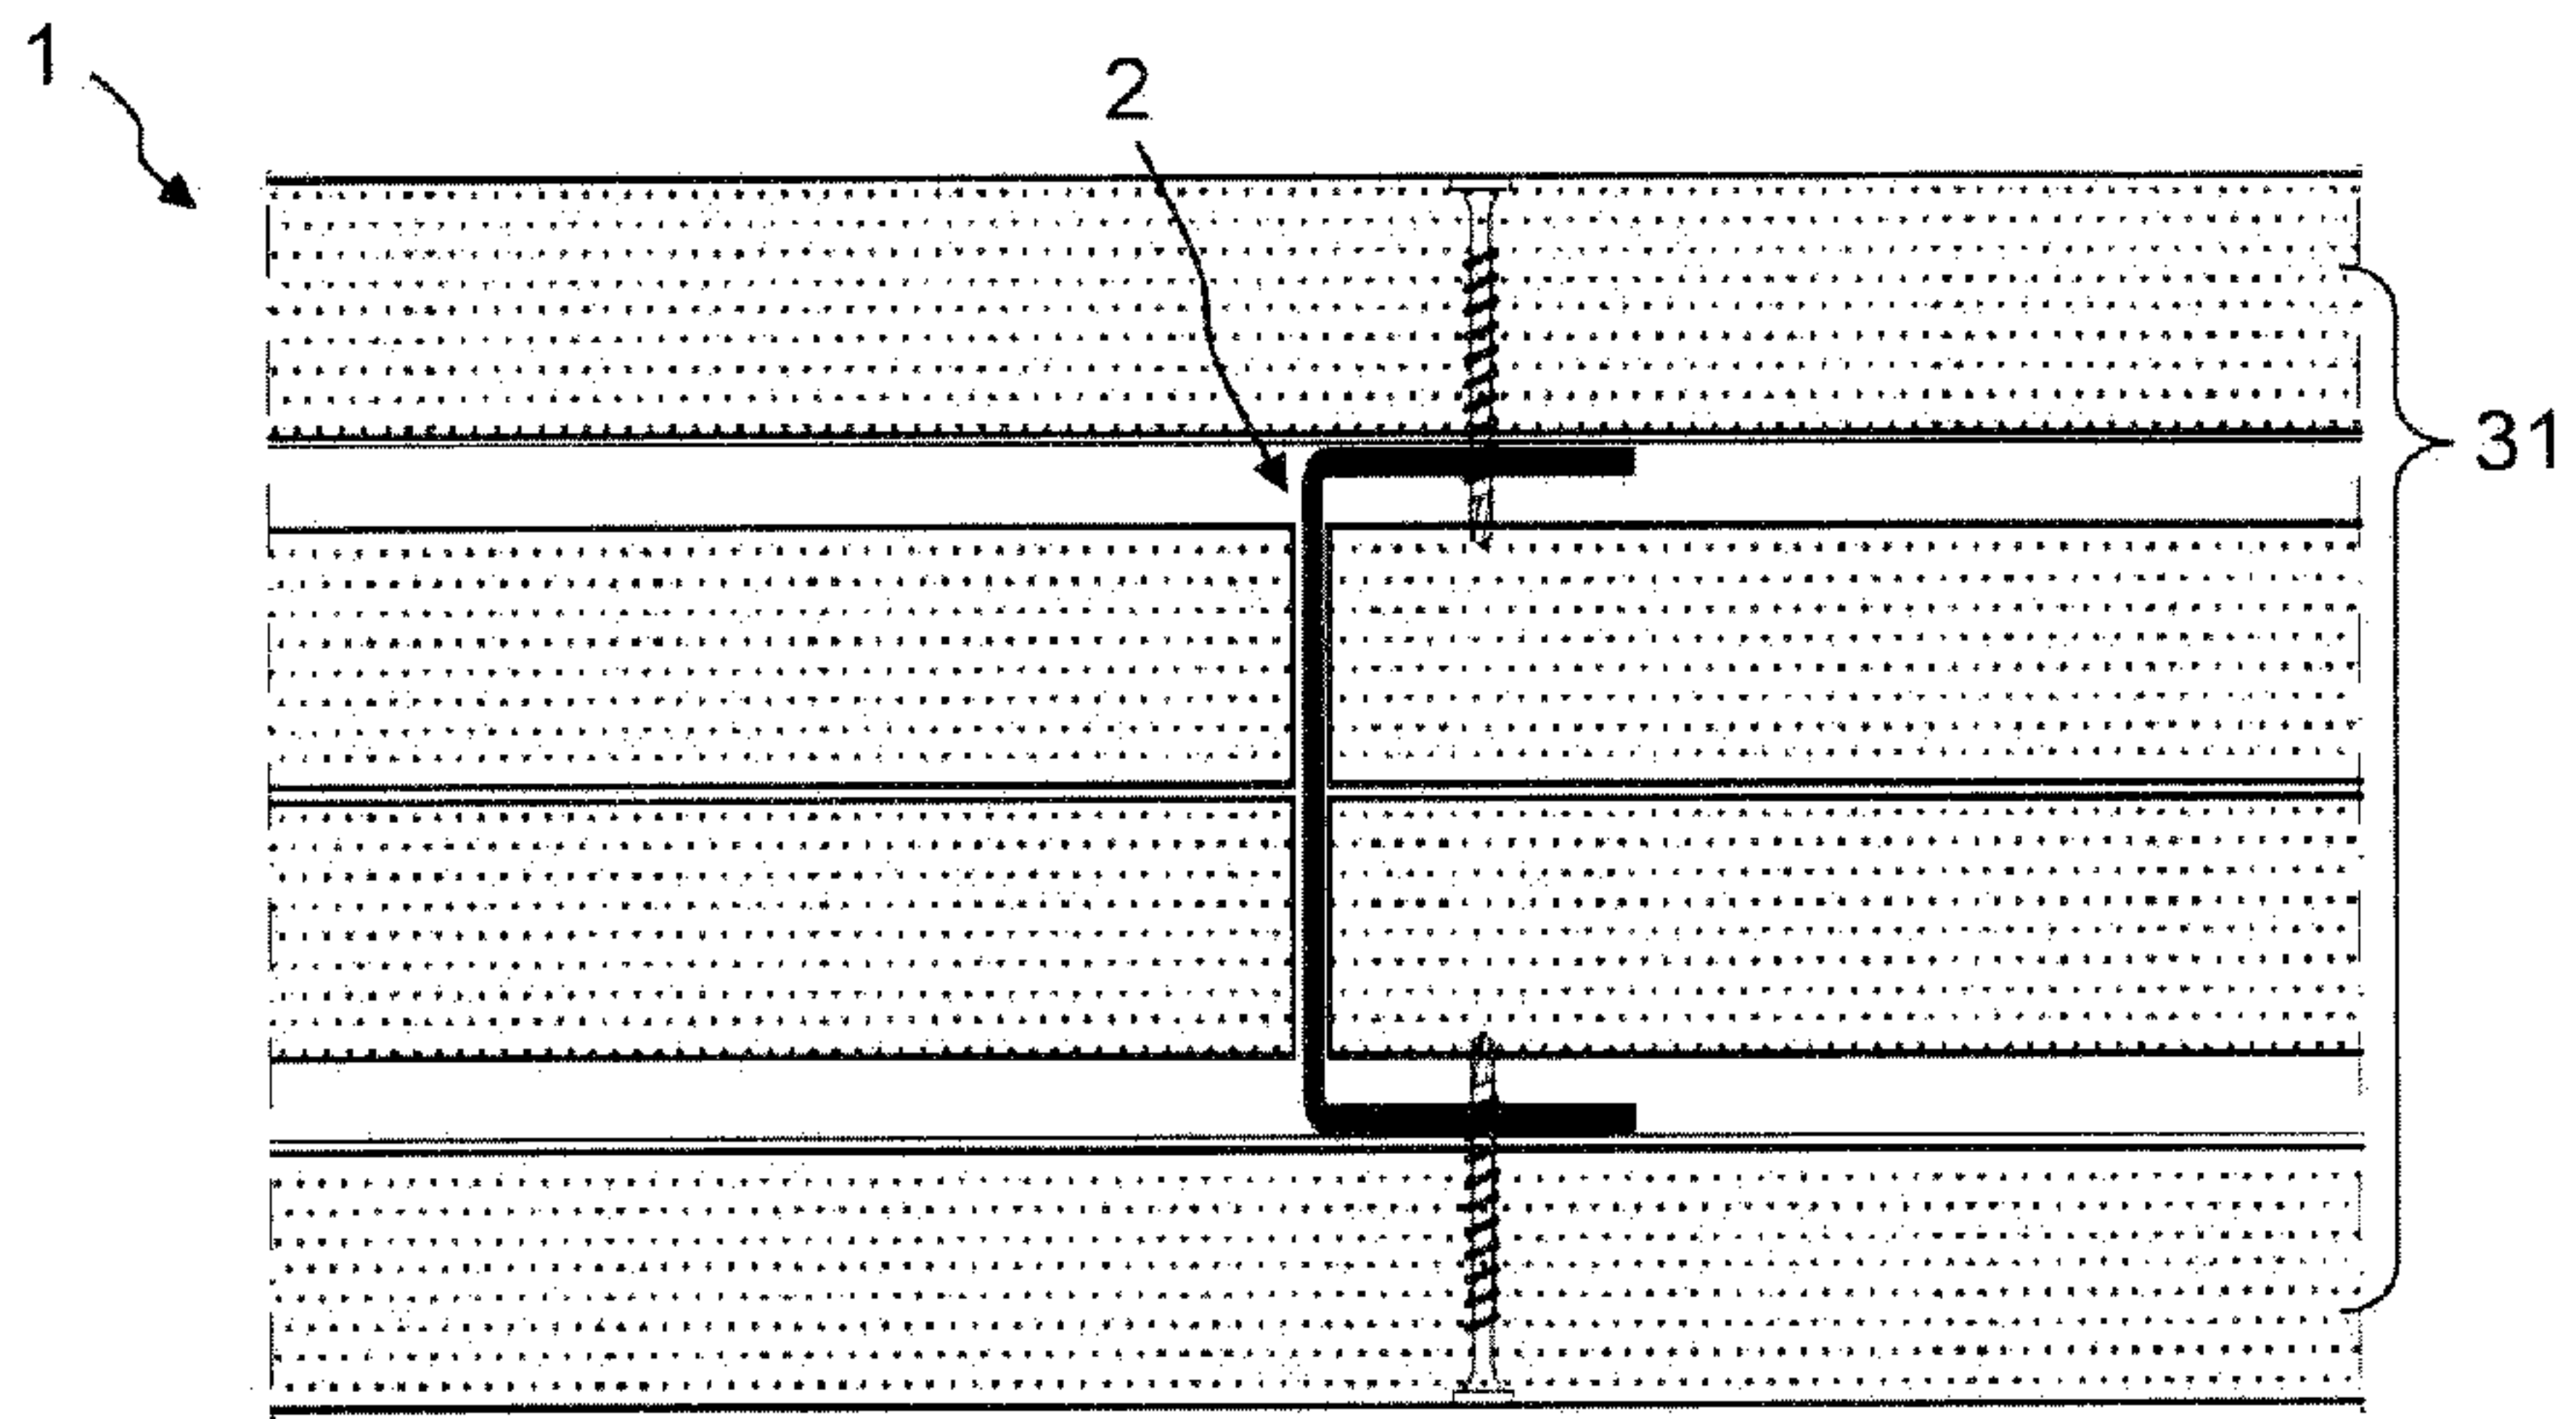


Fig. 5