



(51) International Patent Classification:
H04W 24/02 (2009.01)

(21) International Application Number:
PCT/EP2011/069312

(22) International Filing Date:
3 November 2011 (03.11.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10290607.0 12 November 2010 (12.11.2010) EP

(71) Applicant (for all designated States except US): **ALCATEL LUCENT** [FR/FR]; 3, avenue Octave Gréard, F-75007 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **EWE, Lutz** [DE/DE]; Thomas-Mann-Strasse 9, 70469 Stuttgart (DE). **BAKKER, Hajo-Erich** [DE/DE]; Alemannenstrasse 30-1, 71735 Eberdingen (DE).

(74) Agent: **URLICHS, Stefan**; Alcatel-Lucent Deutschland AG, Intellectual Property & Standards, Lorenzstr. 10, 70435 Stuttgart (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: AUTOMATIC NEIGHBOR RELATION TABLE SETUP

Fig. 1

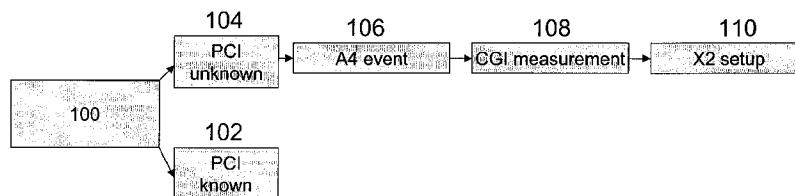

(57) Abstract: The invention relates to a method of adding a cell identity to a neighbour relation table of a base station serving at least one mobile device in a cellular digital wireless telecommunication system, the neighbour relation table storing a set of cell identities of previously detected cells, wherein the method comprises the following steps: - reading the set of cell identities from the neighbour relation table by the base station; - transmitting the set of cell identities from the base station to the at least one mobile device; - measuring signal power of signals received from neighbouring base stations by the at least one mobile device and reporting the cell identity of one of the neighbouring base stations, from which one of the signals has been received, by the at least one mobile device to the serving base station of the mobile device, if both of the following conditions are fulfilled: -signal power of the one of the signals is greater than a signal power threshold; -the cell identity of the neighbouring cell is not an element of the set of cell identities; upon receipt of the report from the at least one mobile device by the serving base station, adding the reported cell identity to the neighbour relation table.



Automatic neighbor relation table setup

Description

Field of the invention

The invention relates to the field of mobile telecommunication, more specifically to
5 automatic neighbor relation table setup in mobile telecommunication.

Background and related art

According to Third Generation Partnership Project (3GPP) specifications mobile de-
10 vices in a cellular digital telecommunication network can be set into an Automatic
Neighbor Relation (ANR) setup mode via a Radio Resource Control (RRC) mes-
sage. In this mode the mobile devices in the respective cell measure signal power
signals from neighboring base stations. If the signal of a neighboring base station
has a signal power above a signal power threshold for at least a time period also
15 called time-to-trigger (TTT), the physical cell identity (PCI) of this cell is reported to
the serving base station of the respective mobile device.

The ANR mode serves for the serving base station to get to know PCIs of its
neighbors. For example if a new cell is introduced into an existing network, the
20 neighboring base stations set their mobile devices into the ANR setup mode. Some
mobile devices will be located near the newly introduced cell and measure signals
from the neighboring cell. The physical cell identity of the newly introduced cell is
then reported to the serving base station of the respective mobile device. If the PCI
is not yet known to the serving base station, the serving base station transmits a
25 signal to the mobile device having reported the newly introduced cell. The signal is
indicative for the mobile device to measure a cell global identity (CGI) of the newly
discovered cell. The serving base station then establishes via X2 interface a con-
nection to the base station of the newly introduced cell.

The report of the PCI from the mobile device to the base station is called according to 3GPP specifications an A4 event. The A4 event is triggered always when a mobile device measures a signal power from a neighboring base station for a certain time period above a signal threshold.

In „ANRF for UTRAN“ (3GPP Draft; R3-102739; 2010-10-1) by ZTE et al. it is described that the RNC keeps a NRT for each cell that the RNC has. For each NR, the NRT contains the Target Cell Identifier (TCI), which identifies the target cell. For UTRAN, the TCI corresponds to the UTAN Cell PLMN-Id + LAI + RAC + Cell Identity(RNC ID) + PSC + UARFCN of the target cell.

Summary

It is an object of the present invention to provide an improved method of adding a cell identity to a neighbor relation table, an improved base station apparatus, an improved mobile device, and improved computer-readable storage media for such an improved mobile device and such an improved base station apparatus.

This object is achieved by the method, the base station apparatus, the mobile device, and the computer-readable storage media according to the independent claims. Embodiments of the invention are given in the dependent claims.

The invention relates to a method of adding a cell identity to a neighbor relation table of a base station serving at least one mobile device in a cellular digital wireless telecommunication system. The neighbor relation table stores a set of cell identities of previously detected cells. The previously detected cells may have been detected by other mobile devices and/or the serving base station and/or other base stations. A mobile device may be understood herein for example as a mobile telephone, a mobile computer, a personal digital assistant, or a smartphone.

The set of cell identities is read from the neighbor relation table by the base station. The neighbor relation table of the base station may also be empty. In this case the set of cell identities comprises no cell identity. In other words, the set of cell identities

ties may also be empty. The set of cell identities is then transmitted from the base station to the at least one mobile device. The mobile device stores the set of cell identities. The mobile device measures signal power of signals received from neighboring base stations and reports the set identity of one of the neighboring base stations to the serving base station, if the following two conditions are fulfilled. The signal power of the one of the signals is greater than a signal power threshold and the cell identity of the neighboring cell is not an element of the set of cell identities. In other words, the cell identity is only reported to the neighboring cell, if the serving base station has not indicated to the at least one mobile device that the cell identity is already known to the serving base station.

Upon receipt of the report from the at least one mobile device by the serving base station, the reported cell identity is added to the neighbor relation table of the serving base station.

In other words, the serving base station transmits information about neighboring cells already known to the serving base station to the at least one mobile device. The mobile device then transmits only an additional cell identity, if the cell identity has not been transmitted to the at least one mobile device by the serving base station before.

According to embodiments of the invention cell global identity of the neighboring cell is transmitted to the serving base station, if the two conditions are fulfilled. Then, a wired connection is established between the base station and the one of the neighboring base stations. This wired connection is preferably established via the X2 interface according to 3GPP standards.

Embodiments of the invention are advantageous, because it is avoided that cell identities already known to the serving base station are transmitted from the at least one mobile device to the serving base station. The at least one mobile device stores information about cell identities known to the serving base station. If the cell identity is already known to the serving base station, the at least one mobile device does not transmit the respective cell identity to the serving base station. Unnecessary data transmissions are avoided. In other words, according to 3GPP standards unneces-

sary A4 events are avoided, because the at least one mobile device stores information about physical cell identities already known to the serving base station.

According to embodiments of the invention further cell identities are reported from a
5 neighbor relation table of the one of the neighboring base stations to the serving
base station. The further cell identities are then added to the neighbor relation table
of the serving base station. In other words, the neighbor relation table of the serving
base station is updated with cell identities of neighbors of the one of the neighboring
base stations. These base stations may also be referred to as neighbor's neighbors
10 of the serving base station.

According to embodiments of the invention information is transmitted to that at least
one mobile device from the serving base station. The information causes the at least
one mobile device to measure signal power of signals received from the neighboring
15 base stations and to report the cell identity of the one of the neighboring base sta-
tion, if the two conditions are fulfilled. In other words, the serving base station
transmits an RRC message to the at least one mobile device switching the at least
one mobile device to the ANR setup mode. Alternatively, the at least one mobile
device may for example be already switched to the ANR setup mode before.

20

According to embodiments of the invention the set of cell identities is transmitted to
every mobile device in the cell of the serving base station, whenever at least one
cell identity has been added to the set of cell identities. In other words, when the
neighbor relation table of the serving base station is updated, the updated set of cell
25 identities is transmitted to every mobile device in the cell. This is advantageous, be-
cause every mobile device always stores information about every cell identity known
to the serving base station.

According to embodiments of the invention the set of cell identities is transmitted to
30 every mobile device in the cell of the serving base station only once, when the re-
spective mobile device establishes a connection to the base station after having
been moved into the cell or after having been switched on. This is advantageous
because unnecessary data transmissions are avoided. This is especially advanta-
geous, when a new cell is added to an already existing network. In this case usually

every neighboring base station of the serving base station is already known to the serving base station except for the base station of the newly added cell.

According to embodiments of the invention a further set of cell identities is transmitted to the at least one mobile device. The further set of cell identities is indicative of cell identities, to which a handover of the at least one mobile device is avoided. This set of cell identities may also be referred to as a blacklist for handover procedures according to 3GPP standards. The further set of cell identities is not identical to the set of cell identities. The further set of cell identities is a blacklist for handovers according to 3GPP standards. The set of cell identities may be referred to as a blacklist for A4 events according to 3GPP standards.

According to embodiments of the invention the mobile device detects the CGI of the neighbouring base station automatically after having reported the respective cell identity to the serving base station. The CGI is also transmitted automatically by the mobile device to the serving base station automatically. Transmission of the CGI may be performed after having transmitted the cell identity or together with the cell identity. Signaling effort is reduced by transmitting the cell identity together with the CGI.

20

It is not possible to use only one blacklist for both purposes. For the handover a blacklist would be used as an A4 event blacklist, no handovers would be possible to any neighboring cell of the serving base station already known to the serving base station.

25

In another aspect the invention relates to a base station apparatus with means for reading the set of cell identities from the neighbor relation table, means for transmitting the set of cell identities to the at least one mobile device and means for receiving a report about a cell identity from the at least one mobile device. The base station apparatus further comprises means for adding the reported cell identity to the neighbor relation table.

30

In another aspect the invention relates to a computer-readable storage medium comprising instructions that when executed by a base station apparatus according

to embodiments of the invention cause the base station apparatus to perform a method according to embodiments of the invention. The method comprises reading the set of cell identities from the neighbor relation table, transmitting the set of cell identities to the at least one mobile device, and receiving a report about the cell identity from the at least one mobile device, and adding the reported cell identity to the neighbor relation table.

It is to be noted that the cell identity may for example be a physical cell identity according to 3GPP standards.

In yet another aspect the invention relates to a mobile device with means for receiving a set of cell identities from a serving base station. The mobile device further comprises means for measuring signal power of signals received from neighboring base stations and means for reporting a cell identity of one of the neighboring base stations, from which one of the signals has been received, to the serving base station. Two conditions have to be fulfilled before a cell identity is reported to the serving base station. First, the signal power of the one of the signals has to be greater than a signal power threshold. Second, the cell identity of the neighboring cell is not an element of the set of cell identities.

In yet another aspect the invention relates to a computer-readable storage medium comprising instructions that when executed by a mobile device according to embodiments of the invention cause the mobile device to receive a set of cell identities from a serving base station, measure signal power of signals received from neighboring base stations, and report a cell identity of one of the neighboring base stations. The cell identity has to be the cell identity of the base station, from which one of the signals has been received fulfilling two conditions. Firstly, the signal power of the one of the signals has to be greater than a signal power threshold and secondly, the cell identity of the neighboring cell is not an element of the set of cell identities.

Brief description of the drawings

In the following embodiments of the invention are explained in greater detail, by way of example only, making reference to the drawings in which:

Fig. 1 is a schematic view of a method according to embodiments of the invention; and

Fig. 2 is a block diagram of a base station apparatus and a mobile device according to embodiments of the invention.

Detailed description

Like numbered elements in these Figs. are either identical elements or perform the same function. Elements which have been discussed previously will not necessarily be discussed in later Figs. if the function is identical.

Fig. 1 is a schematic view of a method according to embodiments of the invention. At step 100 a mobile device detects a signal of a neighboring cell of the serving cell with a signal power above a signal power threshold for a time period being longer than a time period threshold. The physical cell identity of the neighboring cell is read by the mobile device and compared to a set of physical cell identities stored in a data storage of the mobile device. The set of cell identities has previously been transmitted from the serving base station to the mobile device and comprises physical cell identities of the neighbor relation table of the serving base station. In other words, the mobile device stores information about the physical cell identities of neighbor cells of the serving base station.

After measuring of signal power two cases have to be distinguished. The physical cell identity of the neighboring cell may be known to the serving base station. This corresponds to step 102 of Fig. 1. Step 104 of Fig. 1 represents the case that the physical cell identity of the neighboring cell is not known to the serving base station.

The physical cell identity of the neighboring cell is compared with the set of physical cell identities stored in the mobile device. If the set of physical cell identities is in the set of the physical cell identities, the mobile device takes no further action. In other

words, unnecessary A4 events according to 3GPP standards are avoided, because the mobile device stores information about the physical cell identities known to the serving base station.

- 5 If the physical cell identity of the neighboring cell is not comprised by the set of physical cell identities stored in the mobile device, an A4 event 106 is transmitted to the serving base station.

After the A4 event 106 a CGI measurement 108 is performed by the mobile device.

- 10 The CGI measurement may be performed automatically by the mobile device or the CGI measurement may be triggered from the serving base station. CGI measurement 108 may be performed automatically by the mobile device, because the mobile device estimates that a CGI measurement is necessary, because the physical cell identity of the neighboring cell is not part of the set of physical cell identities stored
15 in the mobile device.

In step 110 a connection between the serving base station and the base station of the neighboring cell is established via X2 interface.

- 20 Fig. 2 is a block diagram of a base station 200 and a mobile device 202. The base station apparatus 200 comprises a processor 204, a data storage 206 comprising program instructions 208, and an antenna 210. The mobile device 202 comprises a processor 212, a data storage 214 comprising program instructions 216, and an antenna 218.

25

The processor 204 of base station 200 is adapted to execute program instructions 208. When executing program instructions 208 the processor 204 reads a set of cell identities from the neighbor relation table of the base station 200. The neighbor relation table may also be stored in data storage 206. Processor 204 further causes the
30 base station apparatus to transmit the set of cell identities to the mobile device 202 via antenna 210. Mobile device 202 receives the set of cell identities via antenna 218 and stores the set of cell identities in data storage 214.

Processor 212 of mobile device 202 is adapted to execute program instructions 216 stored in data storage 214. Program instructions 216 cause the processor 212 to measure signal power of signals received from neighboring base stations. If the signal power of one of the measured signals is greater than a signal power and the cell identity of the neighboring cell with this signal is not an element of the set of cell identities stored in data storage 214, the cell identity is reported by mobile device 202 via antenna 218 to base station 200. Base station 200 receives the cell identity via antenna 210. The reported cell identity is then added to the neighbor relation table of base station 200.

10

Additionally, an updated set of cell identities may then be transmitted from base station 200 to mobile device 202.

List of reference numerals

100	Measure signal power
102	PCI known
104	PCI unknown
106	A4 event
108	CGI measurement
110	X2 setup
200	Base station
202	Mobile device
204	Processor
206	Data storage
208	Program instructions
210	Antenna
212	Processor
214	Data storage
216	Program instructions
218	Antenna

C l a i m s

- 5 1. A method of adding a cell identity to a neighbour relation table of a base station serving at least one mobile device in a 3GPP cellular digital wireless telecommunication system, the neighbour relation table storing a set of cell identities of previously detected cells, wherein the method comprises the following steps:
- 10 - reading the set of cell identities from the neighbour relation table by the base station;
- transmitting the set of cell identities from the base station to the at least one mobile device;
- measuring signal power of signals received from neighbouring base stations by the at least one mobile device and reporting the cell identity of one of the neighbouring base stations, from which one of the signals has been received, by the at least one mobile device to the serving base station of the mobile device, if both of the following conditions are fulfilled:
- 15 ▪ signal power of the one of the signals is greater than a signal power threshold;
- the cell identity of the neighbouring cell is not an element of the set of cell identities;
- 20 - upon receipt of the report from the at least one mobile device by the serving base station, adding the reported cell identity to the neighbour relation table.
- 25
2. Method according to claim 1, wherein the method further comprises the steps of:
- 30 - transmitting a cell global identity of the neighbouring cell to the serving base station, if the two conditions are fulfilled; and
- establishing a wired connection between the base station and the one of the neighbouring base stations.

3. Method according to claim 2, wherein the method further comprises the step of:

- reporting further cell identities from a neighbour relation table of the one of the neighbouring base stations to the serving base station; and
- adding the further cell identities to the neighbour relation table of the serving base station.

4. Method according to any one of the preceding claims, wherein the method comprises further the step of:

- transmitting information to the at least one mobile device from the serving base station, wherein the information causes the at least one mobile device to measure signal power of signals received from the neighbouring base stations and to report the cell identity of the one of the neighbouring base stations.

5. Method according to any one of the preceding claims, wherein the set of cell identities is transmitted to every mobile device in the cell of the serving base station, whenever at least one cell identity has been added to the set of cell identities.

6. Method according to any one of the claims 1-4, wherein the set of cell identities is transmitted to every mobile device in the cell of the serving base station only once, when the respective mobile device establishes a connection to the base station after having been moved into the cell or after having been switched on.

7. Method according to any one of the preceding claims, wherein a further set of cell identities is transmitted to the at least one mobile device, the further set of cell identities being indicative of cell identities, to which a handover of the at least one mobile device is avoided.

8. Method according to any one of the preceding claims, wherein the cell global identity of the neighbouring cell is transmitted automatically to the serving

base station after reporting the cell identity of the neighbouring base station to the serving base station.

9. Method according to any one of the preceding claims, wherein the cell identity of the neighbouring base station and the cell global identity of the neighbouring cell are transmitted automatically within one report to the serving base station.

10. A base station apparatus for a 3GPP cellular digital wireless telecommunication system comprising

- means for reading the set of cell identities from the neighbour relation table, the neighbour relation table being adapted for storing a set of cell identities of previously detected cells;
- means for transmitting the set of cell identities to the at least one mobile device;
- means for receiving a report about a cell identity from the at least one mobile device; and
- means for adding the reported cell identity to the neighbour relation table.

11. A computer-readable storage medium comprising instructions that when executed by a base station apparatus cause the base station apparatus to perform a method of adding a cell identity to a neighbour relation table of a base station serving at least one mobile device in a 3GPP cellular digital wireless telecommunication system, the neighbour relation table storing a set of cell identities of previously detected cells, wherein the method comprises the following steps:

- reading the set of cell identities from the neighbour relation table;
- transmitting the set of cell identities to the at least one mobile device;
- receiving a report about a cell identity from the at least one mobile device, adding the reported cell identity to the neighbour relation table.

12. A mobile device for a 3GPP cellular digital wireless telecommunication system comprising

- means for receiving a set of cell identities from a serving base station, the set of cell identities received from the base station having been read from a neighbour relation table of the base station;
- means for measuring signal power of signals received from neighbouring base stations; and
- means for reporting a cell identity of one of the neighbouring base stations, from which one of the signals has been received, to the serving base station, if both of the following conditions are fulfilled:
 - signal power of the one of the signals is greater than a signal power threshold;
 - the cell identity of the neighbouring cell is not an element of the set of cell identities.

13. A computer-readable storage medium comprising instructions that when executed by a mobile device for a 3GPP cellular digital wireless telecommunication system cause the mobile device to:

- receive a set of cell identities from a serving base station, the set of cell identities received from the base station having been read from a neighbour relation table of the base station;
- measure signal power of signals received from neighbouring base stations; and
- report a cell identity of one of the neighbouring base stations, from which one of the signals has been received, to the serving base station, if both of the following conditions are fulfilled:
 - signal power of the one of the signals is greater than a signal power threshold;
 - the cell identity of the neighbouring cell is not an element of the set of cell identities.

Fig. 1


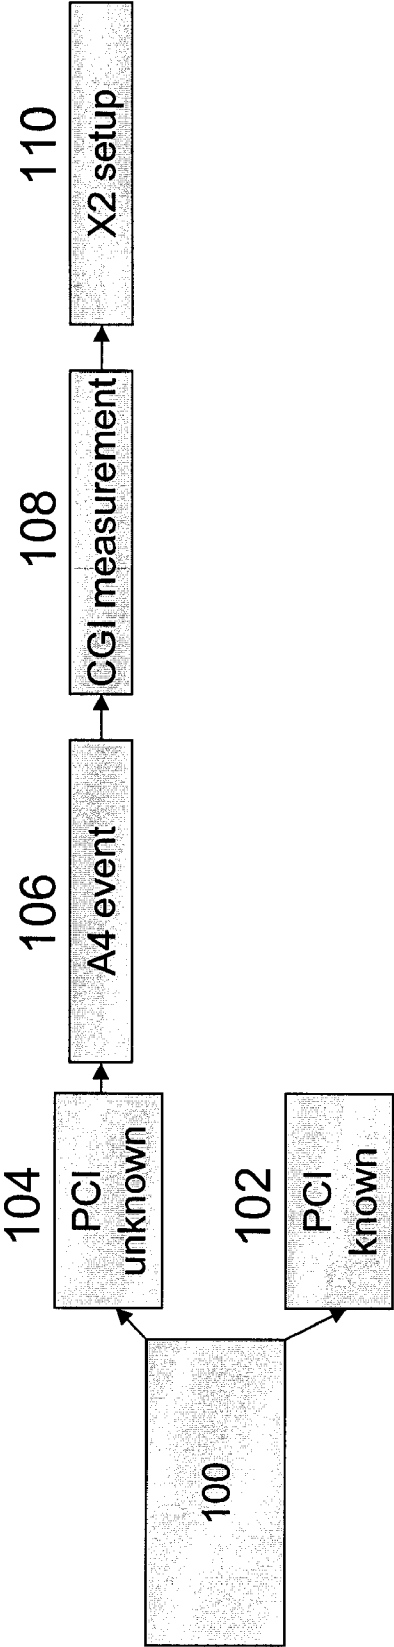


Fig. 2

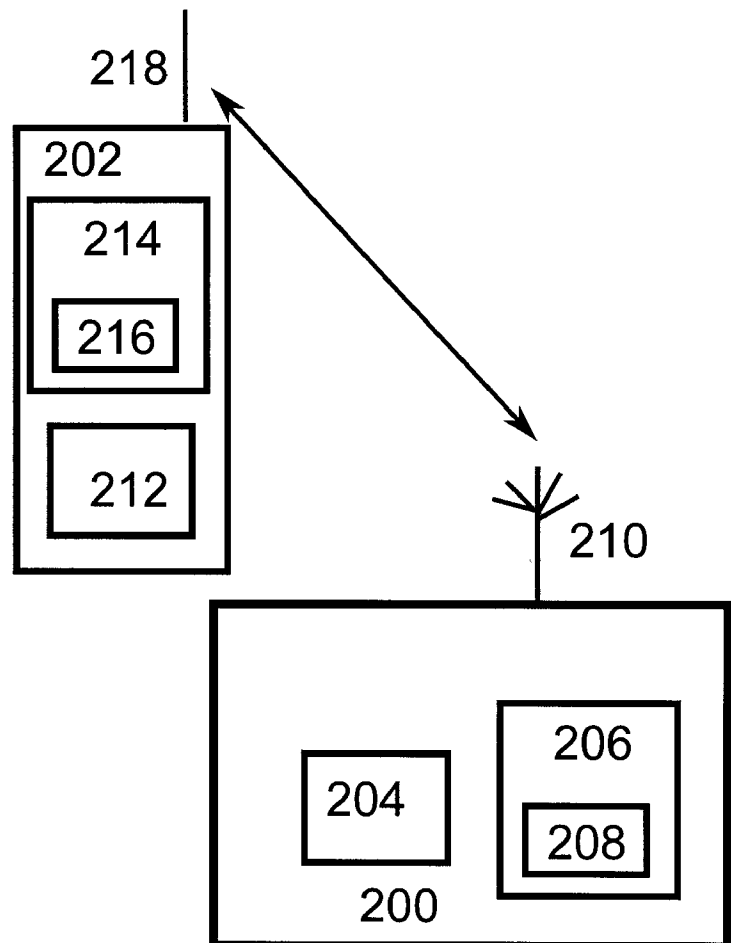

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/069312

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W24/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ZTE ET AL: "ANRF for UTRAN", 3GPP DRAFT; R3-102739, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG3, no. Xi'an; 20101011, 1 October 2010 (2010-10-01), XP050453470, section 2.2.1 Intra-UTRAN case ----- -/--	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

1 December 2011

Date of mailing of the international search report

27/01/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Zembery, Peter

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/069312

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	"LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification (3GPP TS 36.331 version 9.3.0 Release 9)", TECHNICAL SPECIFICATION, EUROPEAN TELECOMMUNICATIONS STANDARDS INSTITUTE (ETSI), 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS ; FRANCE, vol. 3GPP RAN 2, no. V9.3.0, 1 July 2010 (2010-07-01), XP014047472, section 5.5.4.5 -----	1-13
A	US 2009/264130 A1 (CATOVIC AMER [US] ET AL) 22 October 2009 (2009-10-22) paragraphs [0032] - [0034], [0045] -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/069312

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009264130 A1	22-10-2009	AU 2009239413 A1	29-10-2009
		CA 2720130 A1	29-10-2009
		CN 102017701 A	13-04-2011
		EP 2283676 A1	16-02-2011
		JP 2011518531 A	23-06-2011
		KR 20110002869 A	10-01-2011
		TW 201010462 A	01-03-2010
		US 2009264130 A1	22-10-2009
		WO 2009132034 A1	29-10-2009
