

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 May 2006 (11.05.2006)

PCT

(10) International Publication Number
WO 2006/048445 A1

(51) International Patent Classification:
G03F 7/027 (2006.01) **G03F 7/031** (2006.01)

(21) International Application Number:
PCT/EP2005/055745

(22) International Filing Date:
4 November 2005 (04.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04105557.5 5 November 2004 (05.11.2004) EP
60/630,101 22 November 2004 (22.11.2004) US

(71) Applicant (for all designated States except US):
AGFA-GEVAERT [BE/BE]; Septestraat 27, B-2640
Mortsel (BE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WILLIAMSON,**
Alexander [BE/BE]; c/o AGFA-GEVAERT, Corporate IP
Department 3800, Septestraat 27, B-2640 Mortsel (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PHOTOPOLYMERIZABLE COMPOSITION

(57) Abstract: A composition that is photopolymerizable upon absorption of light and/or heat, the composition comprising a binder, a polymerizable compound, a sensitizer and a photoinitiator, characterized in that the composition comprises with respect to its non-volatile compounds at least 0.01 wt.-% of a polythiol compound selected from one of the following formulae (IIIa) or (IIIb) as defined in claim 1, and wherein the composition when coated on a support has a sensitivity of 150 $\mu\text{J}/\text{cm}^2$ or higher, in combination with a high hardness.



WO 2006/048445 A1

Photopolymerizable composition**[DESCRIPTION]**

5

FIELD OF THE INVENTION

The present invention relates to a composition that is photopolymerizable upon absorption of light, the composition comprising a binder, a polymerizable compound, a sensitizer and a photoinitiator.

The present invention also relates to a photopolymer printing plate precursor comprising in this order the photopolymerizable composition of the present invention; and to a method of making a lithographic printing plate therewith.

BACKGROUND OF THE INVENTION

Compositions that are photopolymerizable on absorption of light are well known in the art. Such compositions usually comprise a binder, a polymerizable compound, a sensitizer and a photoinitiator and are disclosed in e.g. EP 1 349 006 A. From said document it is also known, that radical chain transfer agents as described in EP 107 792 can be used to achieve a high sensitivity and that such radical chain transfer agents preferably are sulfur compounds like the mono-thiols 2-mercaptobenzothiazole, 2-mercaptobenzoxazole or 2-mercaptobenzimidazole.

As there is an ongoing trend to do the exposure of photopolymerizable compositions with low-power light sources like Laser-LED's, the sensitivity of the known compositions comprising mono-thiols is still unsatisfactory. Moreover the optimization of photopolymerizable compositions and of printing plate precursors often is accompanied by a loss in sensitivity. This is e.g. the case when stabilizing the composition against environmental effects or

- 2 -

when limiting the absorption spectra to allow for room light handling. Therefore means are needed to compensate for such a sensitivity loss.

Specific aliphatic polythiols for radiation curable compositions are known from e.g. US 4,120,721, wherein the composition forms a solid cured polythioether on exposure, but does not disclose a sensitizer plus photoinitiator system in combination with specific polythiols. The same holds for US 3,993,549, wherein the composition is based on a particulate urea; FR 2,227,558; US 3,753,720; US 3,676,195; and US 3,661,744.

Aliphatic thiols that have a branched structure in α - and/or β -position of the mercapto group are disclosed in WO 03/72614 and JP 2003-252918 A2 to be suitable for a high sensitivity of photosensitive compositions, wherein the latter of those references discloses such compounds in combination with organoboron complexes.

The use of organoboron complexes is also taught in EP 1 031 579, wherein such boron complexes are combined with a thiol-group-containing compound, that preferably is selected from 5 specific compounds with one, three or four thiol groups.

The polythiols are usually disclosed in the prior art to take part in the photocuring process and to react in combination with electron rich or electron poor polyenes by the thiol-ene mechanism. Therefore they are commonly used in similar stoichiometric amounts as the polyenes and selected in view of the solid polythioether products that are formed by this reaction. Although the invention underlying e.g. WO 03/72614 is said to achieve a high sensitivity, it is disclosed on p. 30 that as the light source generally super-high pressure mercury lamp, metal halide lamp, xenon lamp and the like are used and the example compositions only have a sensitivity of no higher than 10 mJ/cm^2 . This demonstrates the unsatisfactory sensitivity of the compositions of the prior art, as for low power light sources the sensitivity has to be significantly higher than 1 mJ/cm^2 and therefore has to be in the $\mu\text{J/cm}^2$ region (a lower numerical value corresponds to a higher sensitivity, see below).

- 3 -

Therefore there still is a need to find further thiol compounds and a photopolymerizable composition optimized for such compounds, that results in a very high sensitivity, as a broader range of compounds gives a better chance to optimize the photopolymerizable composition, in particular those comprising a binder, a polymerizable compound, a sensitizer and a photoinitiator.

This optimisation with respect to the properties and the costs as well is particularly important when using the photopolymerizable composition for the preparation of a lithographic printing plate precursor.

In addition the known photopolymerizable compositions are still unsatisfactory in that they are not resistant enough after exposure and processing, in particular that they are not hard enough, which results e.g. when used for a lithographic printing plate precursor in a printing plate made from such a precursor that has a short lifetime when used for printing. This lifetime when used for printing is also called run-length on the press.

In lithographic printing, a so-called printing master such as a printing plate is mounted on a cylinder of the printing press. The master carries a lithographic image on its surface and a printed copy is obtained by applying ink to said image and then transferring the ink from the master onto a receiver material, which is typically paper. In conventional, so-called "wet" lithographic printing, ink as well as an aqueous fountain solution (also called dampening liquid) are supplied to the lithographic image which consists of oleophilic (or hydrophobic, i.e. ink-accepting, water-repelling) areas as well as hydrophilic (or oleophobic, i.e. water-accepting, ink-repelling) areas. In so-called "driographic" printing, the lithographic image consists of ink-accepting and ink-abhesive (ink-repelling) areas and during driographic printing, only ink is supplied to the master.

Printing masters are generally obtained by the so-called computer-to-film (CtF) method, wherein various pre-press steps such as typeface selection, scanning, color separation, screening,

- 4 -

trapping, layout and imposition are accomplished digitally and each color selection is transferred to graphic arts film using an image-setter. After processing, the film can be used as a mask for the exposure of an imaging material called plate precursor and after
5 plate processing, a printing plate is obtained which can be used as a master. Since about 1995, the so-called 'computer-to-plate' (CtP) method has gained a lot of interest. This method, also called 'direct-to-plate', bypasses the creation of film because the digital document is transferred directly to a printing plate precursor by
10 means of a so-called plate-setter. A printing plate precursor for CtP is often called a digital plate.

Digital plates can roughly be divided in three categories : (i) silver plates, which work according to the silver salt diffusion transfer mechanism; (ii) photopolymer plates which contain a
15 photopolymerizable composition that hardens upon exposure to light and (iii) thermal plates of which the imaging mechanism is triggered by heat or by light-to-heat conversion. Thermal plates are mainly sensitized for infrared lasers emitting at 830 nm or 1064 nm. Typical photopolymer plates are sensitized for visible light, mainly
20 for exposure by an Ar laser (488 nm) or a FD-YAG laser (532 nm). The wide-scale availability of low cost blue or violet laser diodes, originally developed for data storage by means of DVD, has enabled the production of plate-setters operating at shorter wavelength. More specifically, semiconductor lasers emitting from 350 to 450 nm
25 have been realized using an InGaN material.

Radicals are involved in the hardening reaction of the photopolymerizable composition of photopolymer plates and said hardening reaction is known to be adversely affected by oxygen. To reduce this problem it is known to provide the photosensitive
30 coating with a protective coating, also called oxygen barrier layer, protective overcoat or overcoat layer.

After imaging (exposing) the photopolymer printing plate precursor, the plate is heated for a short time to high temperatures before the overcoat is washed off and the photolayer is developed.

- 5 -

This heating step is hereinafter called pre-heat step. During the pre-heat step typical temperatures, when measured at the back of the plate, from about 90°C to 150°C are used for a short time, typically between 10 seconds and 1 minute. As the conditions of the pre-heat
5 step vary with different types of processors and even for the same processor, a printing plate should exhibit consistent results irrespective to the pre-heat conditions, in particular to the temperature. The range of pre-heat conditions, wherein a printing plate exhibits consistent results is called the pre-heat latitude of
10 said plate.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a high-
15 sensitive composition that is photopolymerisable on absorption of light and in particular such a composition that is suitable to prepare a photopolymer printing plate precursor.

A further object of the present invention is a composition, that when coated on a support to get a lithographic printing plate
20 precursor is hard enough after imaging and processing, to result in printing plate, that has a long lifetime when used for printing.

A further object of the present invention is a photopolymer printing plate precursor comprising the composition of the present invention. The printing plate precursor of the present invention is
25 a flexographic or lithographic printing plate precursor, the latter being highly preferred. Also a method of making a lithographic printing plate, wherein said printing plate precursor is image-wise exposed and thereafter developed, is an aspect of the present invention. Preferred photopolymer printing plate precursors
30 according to the present invention can be exposed with an energy density, measured on the surface of the plate of 100 $\mu\text{J}/\text{cm}^2$ or less. Preferred embodiments of the photopolymerizable composition, of the printing plate precursor, and of the method of making a lithographic

- 6 -


printing plate according to the present invention are defined in the dependent claims.

DETAILED DESCRIPTION OF THE INVENTION


5

The present invention relates to a composition that is photopolymerizable upon absorption of light, the composition comprising a binder, a polymerizable compound, a sensitizer, a photoinitiator and a polythiol compound, characterized in that the composition comprises with respect to its total solid (dried; non-volatile) weight at least 0.01 wt.-% (weight-%), preferably from 0.01 wt.-% to 20 wt.-%, in particular from 0.1 wt.-% to 10 wt.-% and most preferred from 0.1 wt.-% to 5 wt.-% of the polythiol compound and that the polythiol compound is selected from one of the following formulae (IIIa) or (IIIb):

15



20



wherein

R⁸ mutually independent means H or a non-metal atom substituent,

25

A1, A2 mutually independent mean a linear or branched alkyl chain with at most 16 carbon atoms;

L³, L⁴ mutually independent mean linking groups or single bonds,

s means an integer from 1 to 100 and

30

r means 1, 2, 3 or 4,

wherein the product of s times r is at least 2,

and wherein the thiol groups of formulae (IIIa) or (IIIb) may also be present in their tautomeric thione form,

- 7 -

and wherein the composition when coated on a support has a sensitivity of $150 \mu\text{J}/\text{cm}^2$ or higher, preferably $100 \mu\text{J}/\text{cm}^2$ or higher and particularly preferred of $60 \mu\text{J}/\text{cm}^2$ or higher, and wherein for polythioles of formula (IIIa) R^8 means hydrogen, methyl or ethyl and r means 1, 2 or 3.

The sensitivity of the composition as defined in the context of the present invention is the sensitivity of a printing plate precursor obtained by coating said composition in a dry thickness of $1.5 \text{ g}/\text{m}^2$ on an electrochemically roughened and anodically oxidized aluminum sheet as described in the Examples in paragraph A and coating on top of the so obtained photosensitive layer an overcoat layer as defined by table 3 of the Examples in a dry thickness of $2.0 \text{ g}/\text{m}^2$. The sensitivity of said printing plate precursor is then measured by imaging through a 13-step exposure wedge with density increments of 0.15 per step using the imaging conditions described in the examples. The sensitivity is then defined to be the minimum energy density that is necessary for a complete hardening of three wedge steps, wherein the coating is considered as being completely hardened when the density of the material is at least 97% of the density of a plate which has been exposed without a filter. So a higher number (numerical value) of said minimum energy density represents a lower sensitivity.

A linkage group is defined in the context of the present invention to be a single bond or any substituted or unsubstituted polyvalent atom or substituted or unsubstituted polyvalent atom group.

Preferably L^3 , L^4 mutually independent mean alkylene, alkyleneoxy or polyglycerol; or alkylene chain containing acyloxy, ether, carbonate, thioether, hydroxy, phenyl, heterocyclic, amino, thiol, sulphonyl, amido, urethane or urea functions.

For the present invention the following substitution and composition of polythiols (IIIa) and (IIIb) is particularly preferred.



- 8 -

Compounds of formula (IIIa) or (IIIb), wherein for r less than 4 at least one of the R^8 substituents is different from hydrogen.

Compounds of formula (IIIa) or (IIIb), wherein R^8 means hydrogen, methyl or ethyl; and/or s means 1; and/or L^3 means
 5 alkylene; and/or L^4 means alkylene; and/or A^1 and A^2 mean a linear alkylene chain containing up to 16 carbon atoms; and/or r means 2, 3 or 4, in particular 2.

The polythiols of the present invention can be obtained by known synthetic methods.


10 Examples of preferred compounds of formulae (IIIa) and (IIIb) are given in the following.

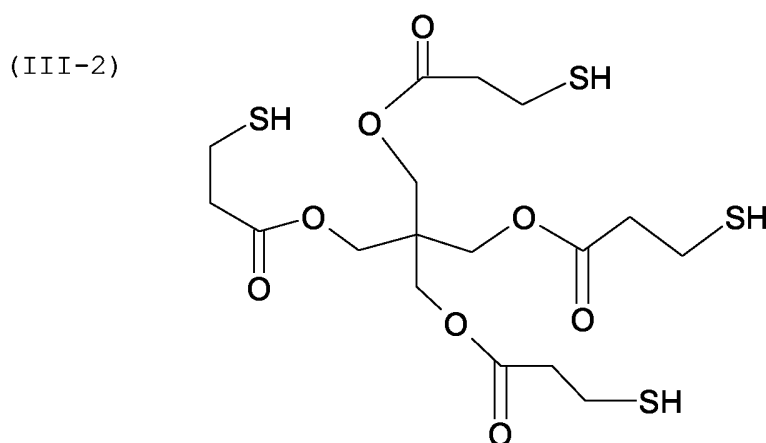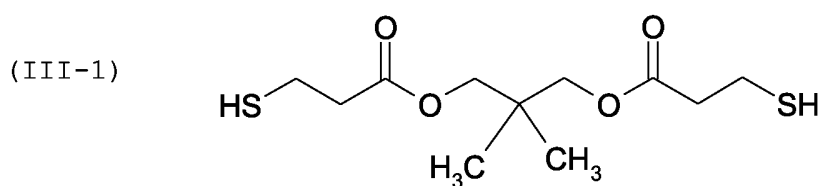

- 9 -


5

(III-3)

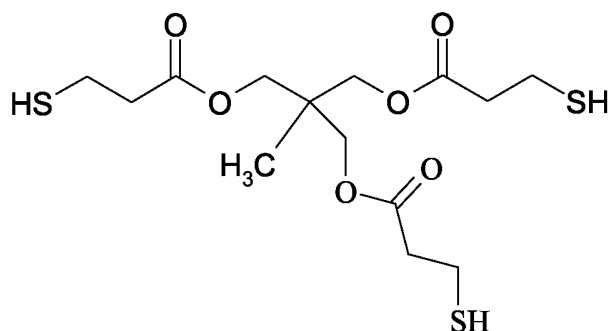


10

(III-4)



15


(III-5)

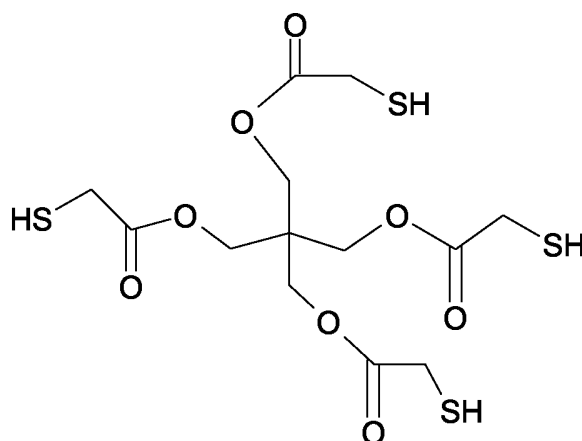

20

25

(III-6)

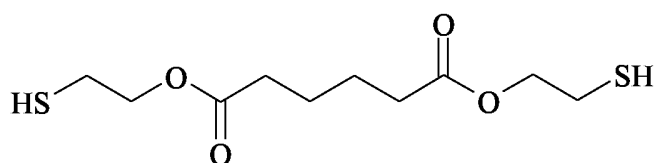

30

Surprisingly it has been found, that there is a positive interaction between the polythiols of the present invention with a composition comprising a binder, a polymerizable compound, a sensitizer and a photoinitiator. Only if said ingredients are present, it is possible to achieve the objects of the present invention, in particular a high sensitivity and a high hardness, and

- 10 -

said positive interaction is particularly pronounced, if the polymerizable compound comprises at least one of the following N-containing groups: primary, secondary or tertiary amino, urethane or urea. Although the underlying mechanism is not completely
5 understood, it has to be different to the thiol-ene mechanism known from the prior art discussed above. This is because the polythiols of the present invention are even effective at very low levels and need not be in stoichiometric relation to the polymerizable compounds of the composition. Even at such low levels an
10 exceptionally high sensitivity and hardness of the composition is achieved.

Moreover said positive interaction is particular pronounced, if the photoinitiator is a hexaaryl-bisimidazole compound or a metallocene compound, in particular a hexaaryl-bisimidazole
15 compound. Although said photoinitiators are known to increase the sensitivity of known photopolymerizable compositions, the increase in sensitivity is higher in combination with the polythiols of the present invention. Therefore it is preferred for the composition of the present invention that the photoinitiator is a hexaaryl-
20 bisimidazole compound.

The composition of the present invention can comprises a radical stabilizer that can be selected from known radical stabilizers, to avoid unwanted polymerization. Compounds useful as radical stabilizers for the composition of the present invention are
25 also known as antioxidants or radical scavengers that are used as additives for e.g. polymers. Preferably the radical stabilizer used in the present invention is a compound selected from the group consisting of phenoles, organic phosphites, organic phosphonites, amines, hydroxylamines, lactones, hydroquinones, divalent sulfur
30 compounds like thioethers and thioesters, metal complexants, wherein phenoles comprise mono-, di- and trihydroxyphenyl compounds, and in particular the radical stabilizer used in the present invention is a compound selected from the group consisting of hindered phenoles, O-alkylated hydroquinones, organic phosphites, organic phosphonites,

- 11 -

aromatic amines, hindered amines, dialkyl hydroxylamines, benzofuranones and dialkyl thiodipropionates.

The photosensitive coating according to the present invention can comprise one, two, three or more different radical stabilizers.

5 In the case where it contains more than one radical stabilizer, said compounds can belong to the same or different classes.

The radical stabilizers according to the present invention are preferably incorporated in the photopolymerizable composition in an amount of 0.01 to 5 wt.%, in particular from 0.015 to 3 wt.%, with
10 respect to the total weight of the non-volatile compounds of the photopolymerizable composition.


Although the composition of the present invention can comprise a radical stabilizer as disclosed above, it surprisingly also gives very good results without using such a compound. Therefore it is
15 also a preferred embodiment of the present invention, wherein the photopolymerizable composition contains no radical stabilizer as defined above.

Although the present invention is also useful for compositions that are photopolymerizable upon absorption of red and/or infrared
20 radiation, it is preferred for those compositions that are photopolymerizable upon absorption of light with a wavelength of 600 nm or less, what comprises the green, blue and ultraviolet spectral range. A sensitizing dye (sensitizer) preferably used in the present invention, when incorporated in the photopolymerizable composition,
25 has an absorption wavelength ranging from 300 to 600 nm, preferably from 350 to 430 nm and particularly preferred from 360 to 420 nm, and makes the photopolymer printing plate sensitive to light within said wavelength ranges.

In a preferred embodiment of the present invention, a
30 sensitizer having a solubility in methyl ethyl ketone of at least 15 g/kg, preferably from 15 to 250 g/kg, measured at 20°C is used.


The known sensitizing dyes can be used in the composition of the present invention. Suitable classes include dialkylaminobenzene compounds like (S-Ia) and (S-Ib)

- 12 -

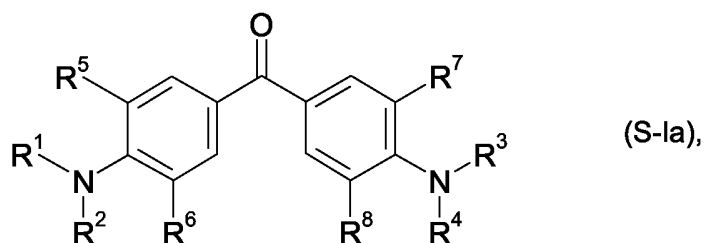


wherein each of R^1 to R^4 , which are independent of one another,
 5 is an alkyl group having 1 to 6 carbon atoms (C_{1-6} alkyl group), and
 each of R^5 to R^8 is a hydrogen atom or a
 C_{1-6} alkyl group, provided that R^1 and R^2 , R^3 and R^4 , R^1 and R^5 , R^2 and
 R^6 , R^3 and R^7 , or R^4 and R^8 , may be bonded to each other to form a
 ring;

10

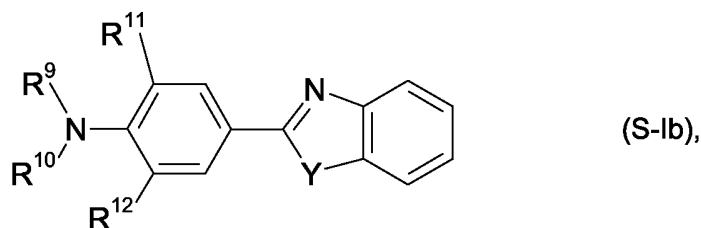

wherein each of R^9 and R^{10} , which are independent of each other,
 is a C_{1-6} alkyl group, each of R^{11} and R^{12} , which are independent of
 15 each other, is a hydrogen atom or a C_{1-6} alkyl group, Y is a sulfur
 atom, an oxygen atom, dialkylmethylene or $-N(R^{13})-$, and R^{13} is a
 hydrogen atom or a C_{1-6} alkyl group, provided that R^9 and R^{10} , R^9 and
 R^{11} , or R^{10} and R^{12} , may be bonded to each other to form a ring, as
 disclosed in EP 1 148 387 A1; compounds according to formula (S-II)

20

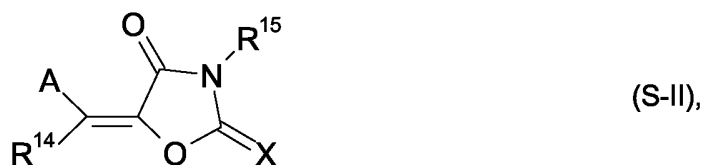







- 13 -

wherein A represents an optionally substituted aromatic ring or heterocyclic ring, X represents an oxygen atom, a sulfur atom or -N(R¹⁶)-, R¹⁴, R¹⁵ and R¹⁶ each independently represent a hydrogen atom or a monovalent nonmetallic atom group and A and R¹⁴, or R¹⁵ and R¹⁶ can be linked together to form an aliphatic or an aromatic ring, as disclosed in EP 1 280 006 A2; 1,3-dihydro-1-oxo-2H-indene compounds as disclosed in EP 1 035 435 A2; the sensitizing dyes disclosed in EP 1 048 982 A1, EP 985 683 A1, EP 1 070 990 A1 and EP 1 091 247 A2; and / or an optical brightening agent.







To achieve a very high sensitivity, an optical brightening agent as a sensitizer is preferred. A typical optical brightener, also known as "fluorescent whitening agent", is a colorless to weakly colored organic compound that is capable of absorbing light having a wavelength in the range from 300 to 450 nm and of emitting the absorbed energy as fluorescent light having a wavelength in the range between 400 and 500 nm. A description of the physical principle and the chemistry of optical brighteners is given in Ullmann's Encyclopedia of Industrial Chemistry, Sixth Edition, Electronic Release, Wiley-VCH 1998. Basically, suitable optical brightener contain π -electron systems comprising a carbocyclic or a heterocyclic nucleus. Suitable representatives of these compounds are e. g. stilbenes, distyrylbenzenes, distyrylbiphenyls, divinylstilbenes, triazinylaminostilbenes, stilbenyltriazoles, stilbenylnaphthotriazoles, bis-triazolstilbenes, benzoxazoles, bisphenylbenzoxazoles, stilbenylbenzoxazoles, bis-benzoxazoles, furans, benzofurans, bis-benzimidazoles, diphenylpyrazolines, diphenyloxadiazoles, coumarins, naphthalimides, xanthenes, carbostyrls, pyrenes and 1,3,5-triazinyl-derivatives.

More specifically, optical brightening agent having a structure according to one of the following formulae are suitable as sensitizer for use in the composition of the present invention :




- 14 -

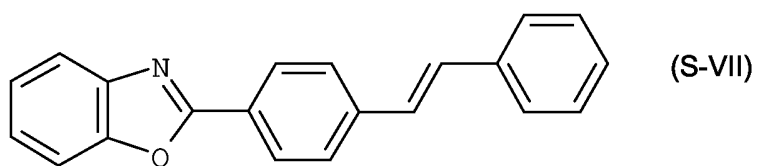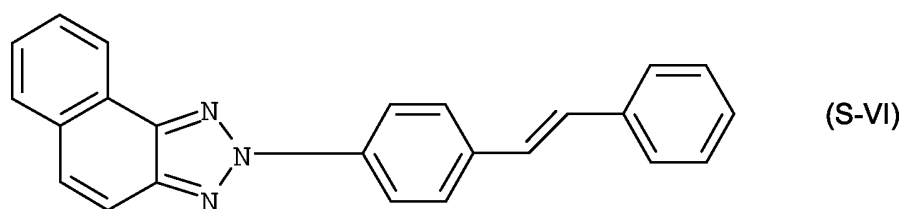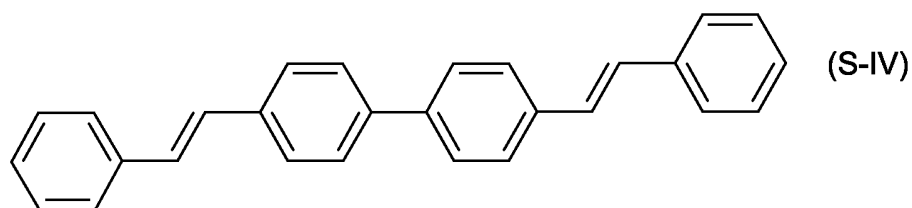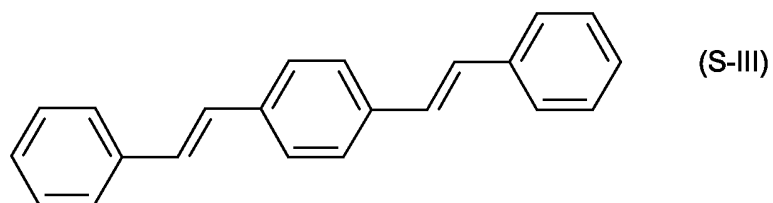





- 15 -

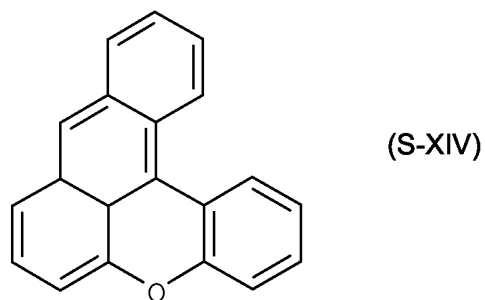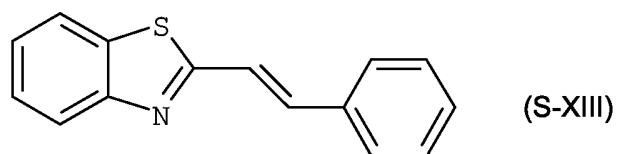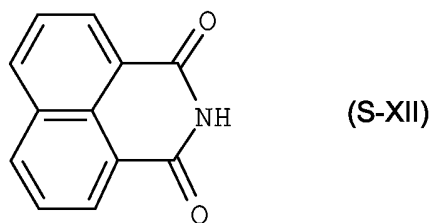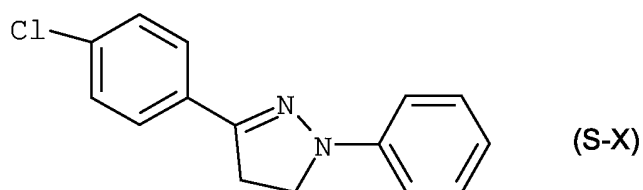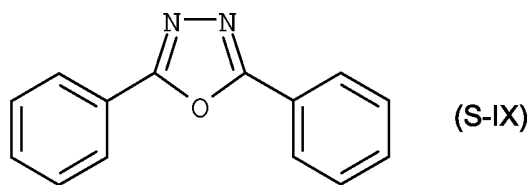

- 16 -

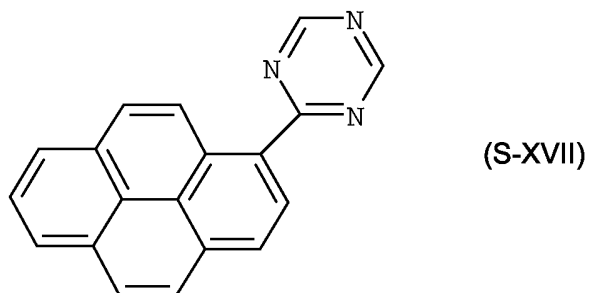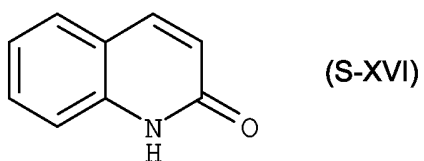

wherein X is one of the following groups, * denoting the position of
5 attachment in the above formulae :




- 17 -

and wherein one or more of the nuclei in each of the above formulae (S-III) to (S-XVII) may be independently substituted by one or more groups selected from a non-metal atom group.

Especially suitable optical brighteners are compounds, which
 5 are able to be dissolved in organic solvents. The optical brighteners can be used as single compound or as mixture of several materials. The overall amount of these compounds range from 0.1 to 10 % by weight, preferably 0.5 to 8 % by weight with respect to the total weight of the non-volatile compounds in the photopolymerizable
 10 composition.

Highly preferred optical brighteners include compounds of formula (S-III-A) to (S-XII-A) and (S-XIV-A) to (S-XVII-A):

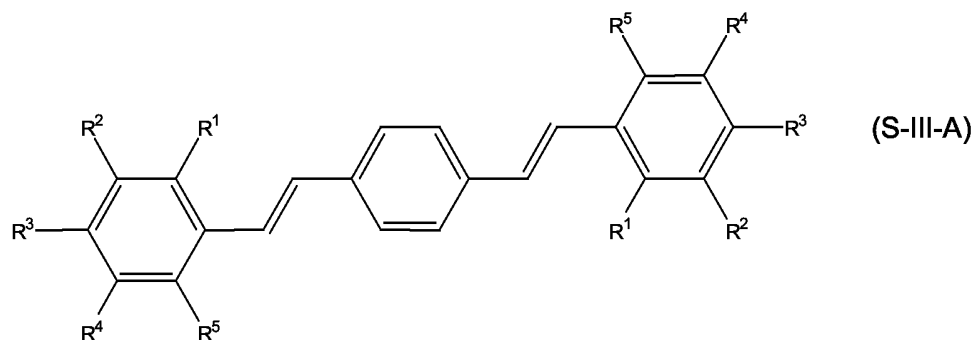


15 wherein


- a) R^1 represents methyl, and R^2 to R^5 each represent H,
- b) R^2 to R^4 represent methoxy, and R^1 and R^5 represent H,
- c) R^1 represents CN, and R^2 to R^5 each represent H or
- d) R^3 represents CN, and R^1 , R^2 , R^4 and R^5 each represent H;

20

- 18 -

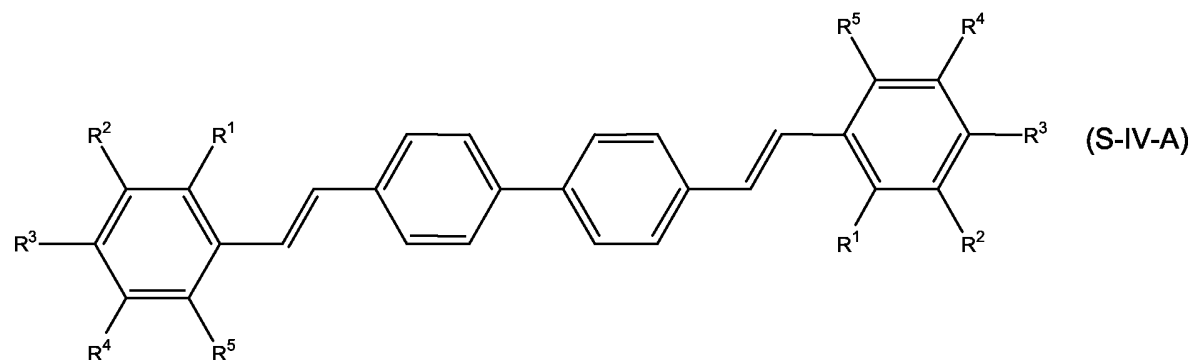

wherein R^1 to R^4 each represent H, and R^5 represents methoxy;

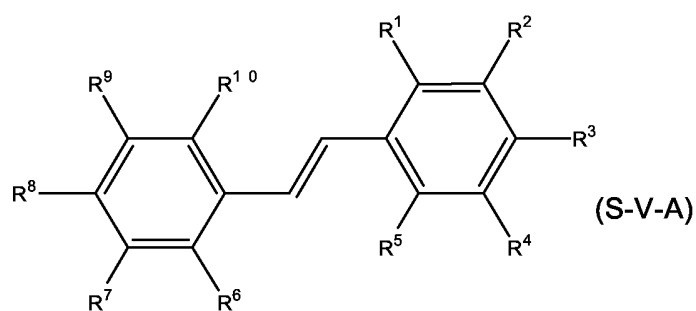


5 wherein

a) R^1 to R^{10} each represent H,

b) R^1 , R^2 and R^4 to R^{10} each represent H, and R^3 represents methoxy or

c) R^1 , R^2 , R^4 to R^7 , R^9 and R^{10} each represent H, and R^3 and R^8 each represent methoxy;

10

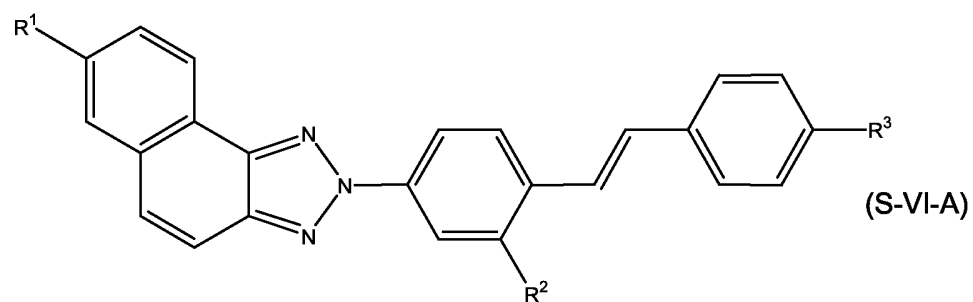


wherein

- 19 -

a) R^1 and R^3 represent H, and R^2 represents phenylsulfonic acid or phenylsulfonic acid salts or

b) R^1 represents H, R^2 represents CN and R^3 represents Cl;

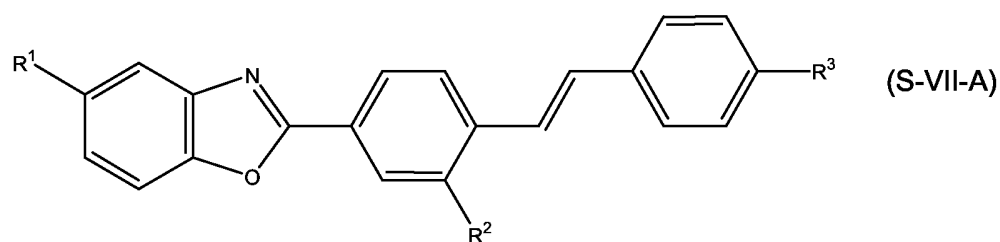


5

wherein

a) R^1 represents t-butyl, R^2 represents H and R^3 represents phenyl,

b) R^1 represents methyl, R^2 represents H, and R^3 represents carboxymethyl or

10 c) R^1 represents H, R^2 represents H, and R^3 represents 2-(4-methyl-oxa-3,3-diazole);

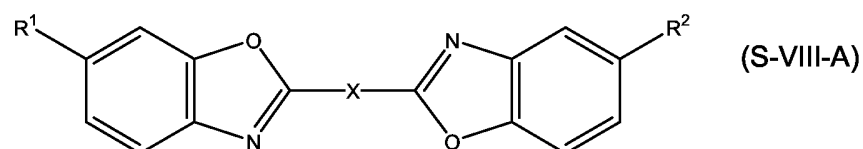

wherein


15 a) X represents 4,4'-stilbenediyl, and R^1 and R^2 each represent H,

b) X represents 2,5-thiophenediyl, and R^1 and R^2 each represent t-butyl,


c) X represents 1,4-naphthalenediyl, and R^1 and R^2 each represent H or

20 d) X represents 1,1-ethenediyl, and R^1 and R^2 each represent methyl;

- 20 -

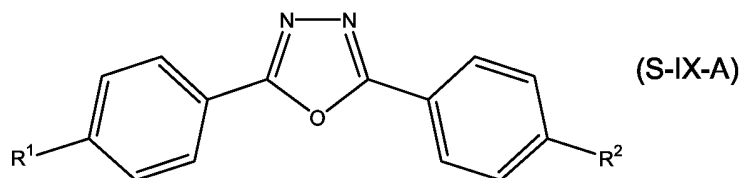

wherein R¹ and R² each represent diethylamino;

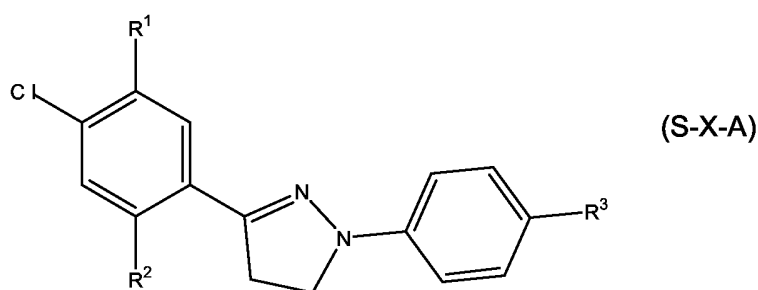

5 wherein

a) R¹ and R² each represent H, and R³ represents SO₂NH₂,

b) R¹ and R² each represent H, and


R³ represents SO₂CH₂CH₂OCH₂CH₂N(CH₃)₂,

c) R¹ and R² each represent H, and

10 R³ represents SO₂CH₂CH₂OCH(CH₃)CH₂N(CH₃)₂,

d) R¹ and R² each represent H, and R³ represents SO₂CH₃ or

e) R¹ and R² each represent H, and R³ represents SO₂CH₂CH₂OH;

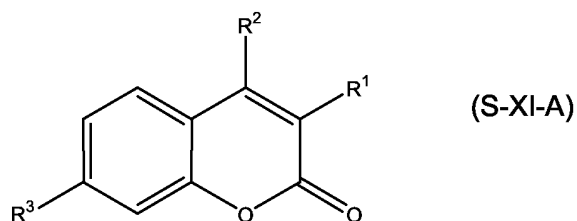

wherein

15 a) R¹ represents H, R² represents Me, and R³ represents diethylamino,


b) R¹ represents phenyl, R² represents H, and

R³ represents 2-N-naphthatriazolyl,

c) R¹ represents H, R² represents methyl, and R³ represents OH,

- 21 -


- d) R^1 represents phenyl, R^2 represents H,
and R^3 represents NH-(4,6-dichloro)-(1,3,5)-triazine or
e) R^1 represents Ph, R^2 represents H, and
 R^3 represents 1-(3-methylpyrazoliny1);

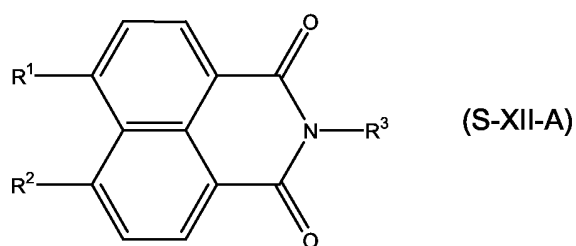

5

wherein


- a) R^1 represents H, R^2 represents methoxy, and R^3 represents methyl;
or
b) R^1 and R^2 each represent OEt, and R^3 represents methyl;

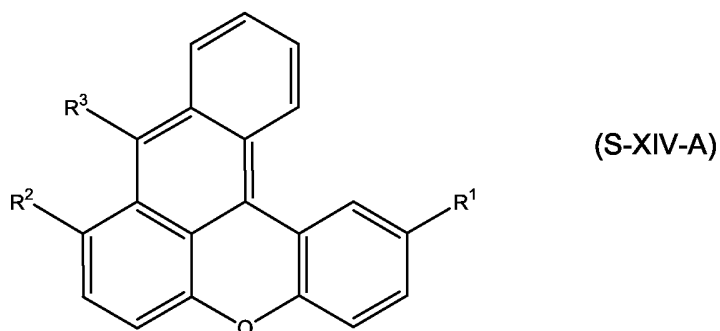

10

wherein

- a) R^1 and R^2 each represent methyl, and R^3 represents H or
b) R^1 and R^2 each represent methyl, and R^3 represents carboxymethyl;

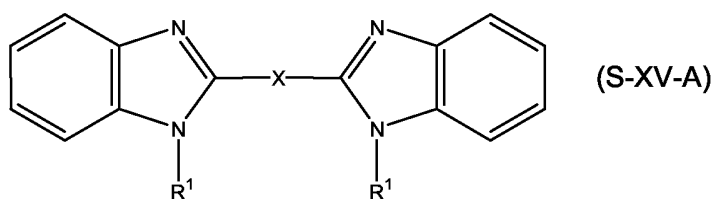


15

- 22 -


wherein

a) X represents 1,2-ethenediyl, and R¹ represents Me or

b) X represents 4,4'-stilbenediyl, and R¹ represents methyl;

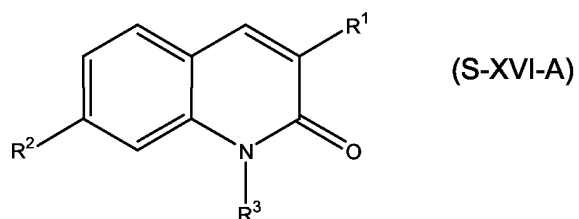


5 wherein R¹ represents Ph, R² represents diethylamino, and R³ represents ethyl; and

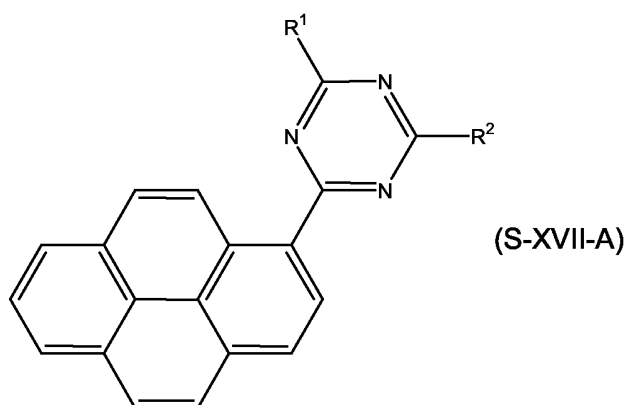

wherein R¹ and R² each represent methoxy.

10 From those sensitizers, the following compounds of formulae (S-III-B) and/or (S-IV-B) are particularly preferred:

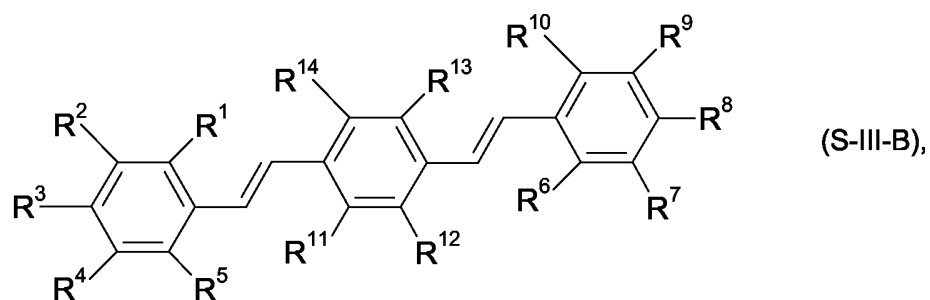


- 23 -

wherein

R^1 to R^{14} independently represent a hydrogen atom, an alkyl group, an alkoxy group, a cyano group or a halogen atom,

5

and at least one of R^1 to R^{10} represents an alkoxy group having more than 1 carbon atom;

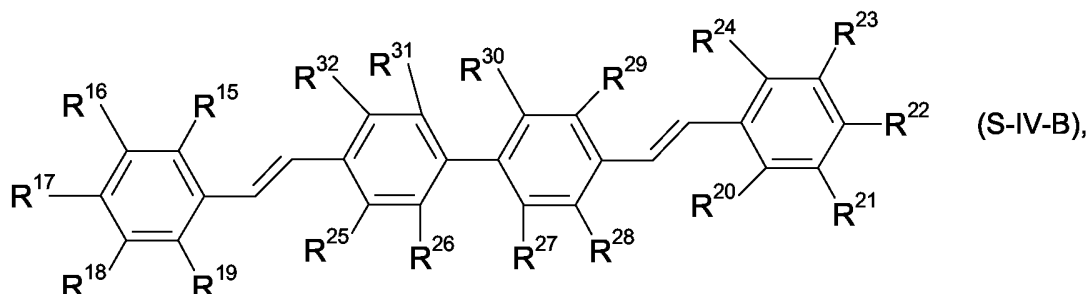

10

wherein

R^{15} to R^{32} independently represent a hydrogen atom, an alkyl group, an alkoxy group, a cyano group or a halogen atom, and at least one of R^{15} to R^{24} represents an alkoxy group having more than 1 carbon atom.

15

The alkyl and alkoxy groups of the present invention can be optionally substituted and their substituent can be selected to adjust the solubility of the sensitizer and may be, for example, halogen, ester, ether, thioether or hydroxy. The alkyl or alkoxy groups may be straight chain or cyclic, but a branched chain is preferred for the sensitizers of formulae (S-III-B) and (S-IV-B).

20

Particular advantages are achieved with sensitizers of formula (S-III-B), wherein R^1 , R^5 , R^6 , R^{10} , R^{11} , R^{12} , R^{13} and R^{14} independently represent a hydrogen atom, a fluorine atom or a chlorine atom, in particular R^1 , R^5 , R^6 , and R^{10} being a hydrogen atom; R^2 to R^4 , R^7 to R^9 , independently are alkoxy groups; and at least two of the alkoxy



25

- 24 -


groups are branched and have from 3 to 15 carbon atoms. Especially preferred for the present invention are sensitizers of formulae (S-III-B) as disclosed above, wherein R^2 , R^4 , R^7 , R^9 independently represent a methoxy group and R^3 and R^8 independently are branched alkoxy groups having 3 to 15 carbon atoms.

Particular advantages are also achieved with sensitizers of formula (S-IV-B), wherein R^{15} , R^{19} , R^{20} , R^{24} , R^{25} to R^{32} , independently represent a hydrogen atom, a fluorine atom or a chlorine atom, in particular R^{15} , R^{19} , R^{20} , R^{24} being a hydrogen atom; R^{16} to R^{18} , R^{21} to R^{23} , independently are alkoxy groups; and at least two of the alkoxy groups are branched and have from 3 to 15 carbon atoms. Especially preferred for the present invention are sensitizers of formulae (IVa) as disclosed above, wherein R^{16} , R^{18} , R^{21} , R^{23} independently represent a methoxy group and R^{17} and R^{22} independently are branched alkoxy groups having 3 to 15 carbon atoms.


The following structures are examples of preferred sensitizers of the present invention and their solubility S is given in brackets as g sensitizer/kg methyl ethyl ketone measured at 20°C.

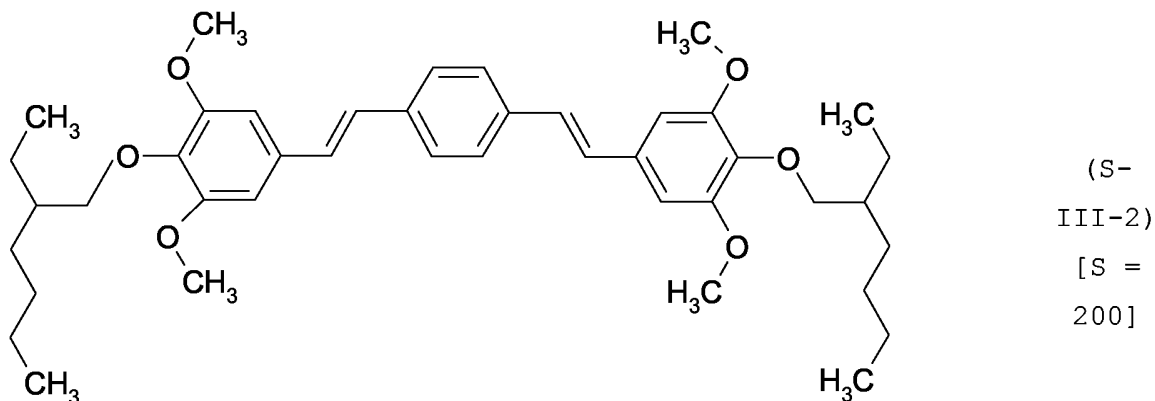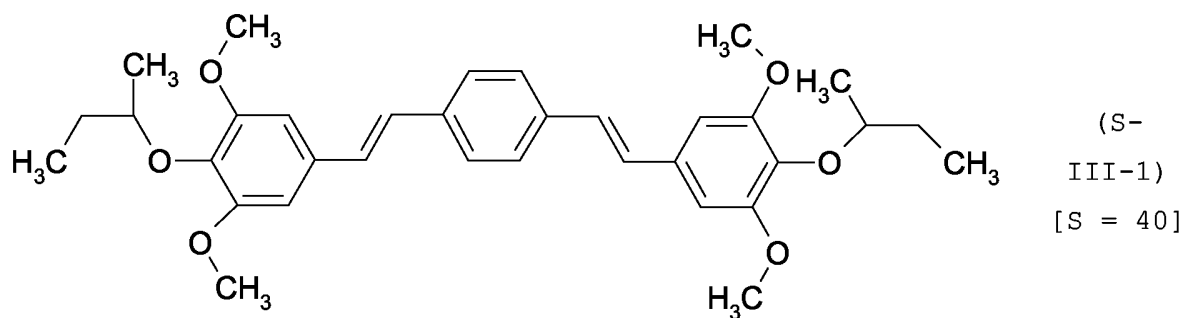

- 25 -

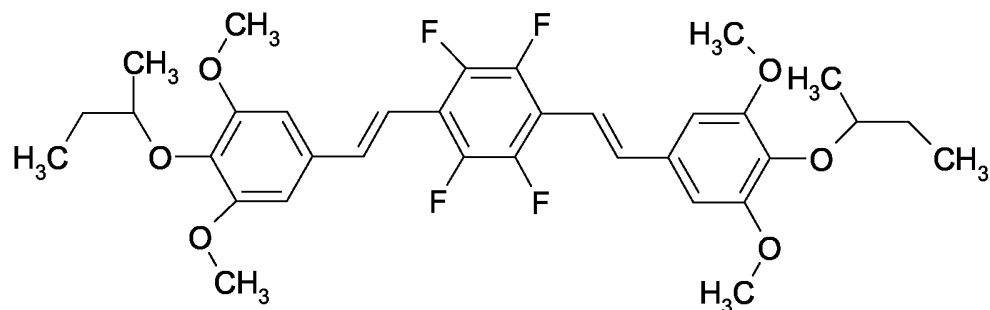


[S = 40]

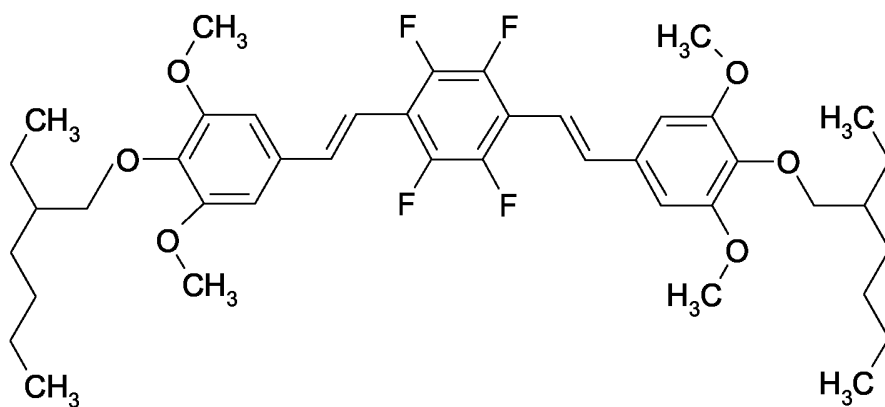


[S =

200]



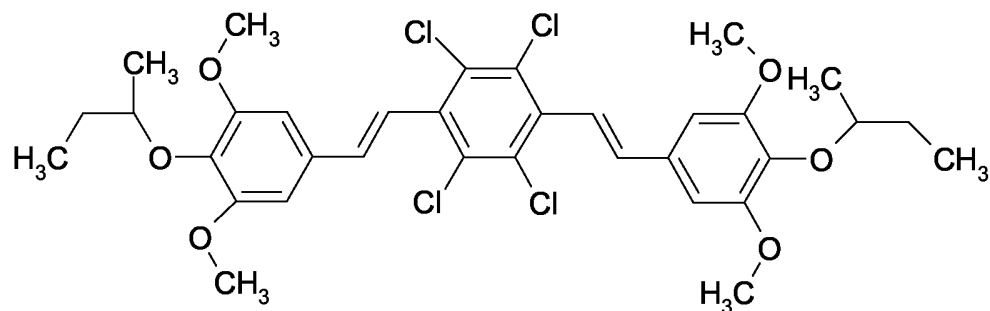



[S = 8]

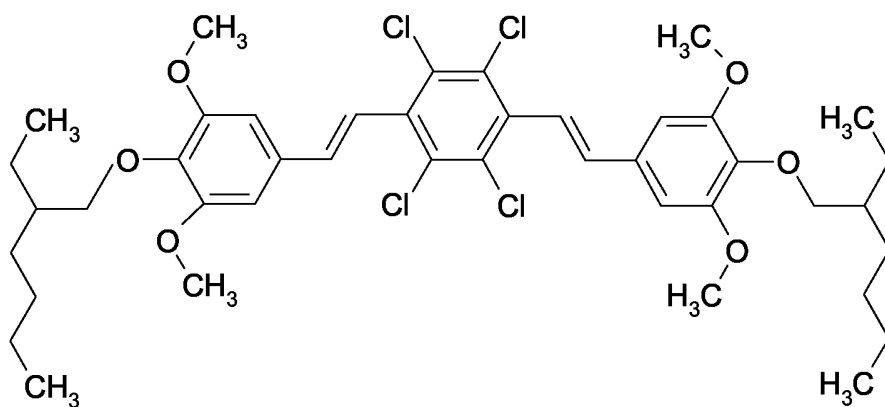


[S = 60]

- 26 -

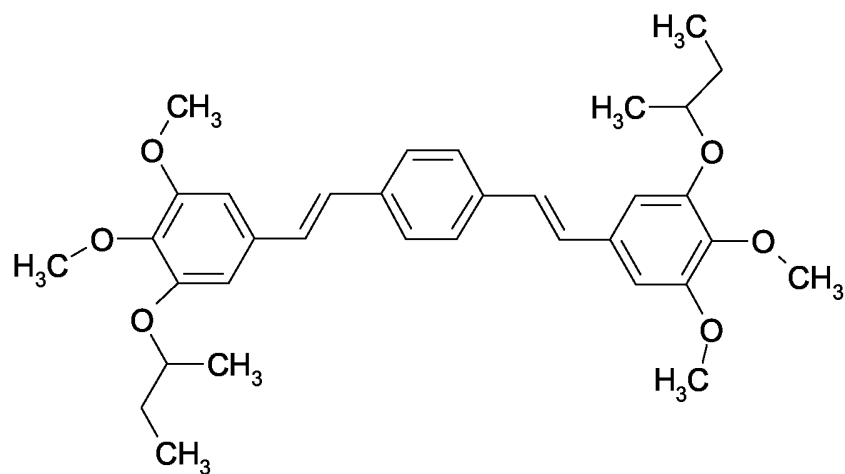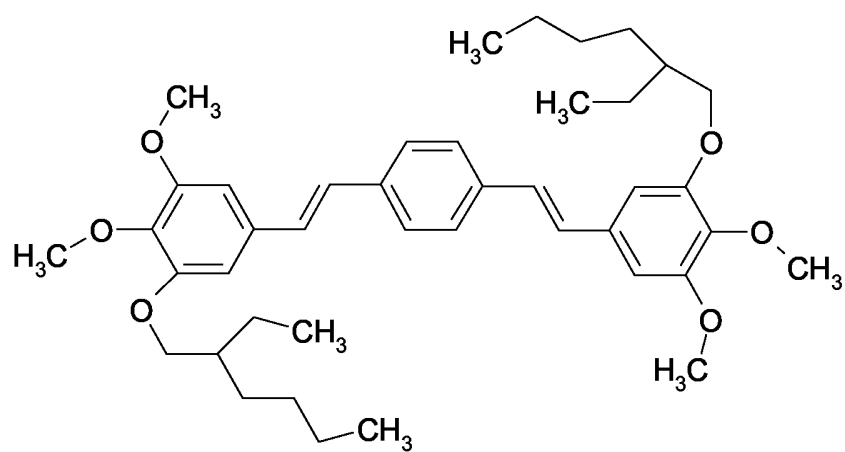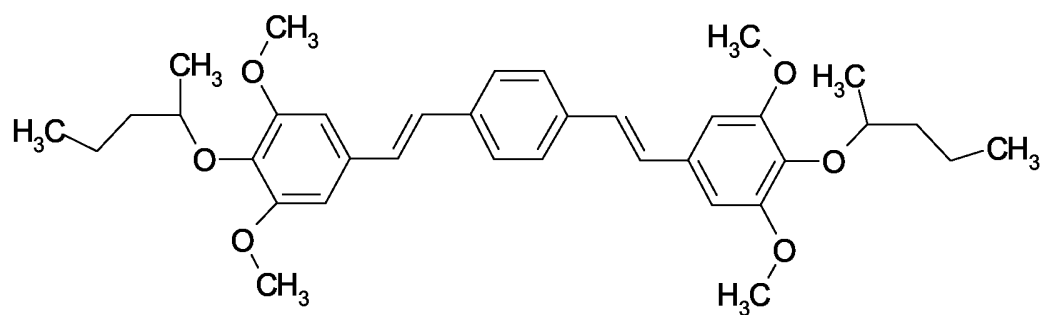
(S-
III-7)(S-
III-8)(S-
III-9)
[S = 60]

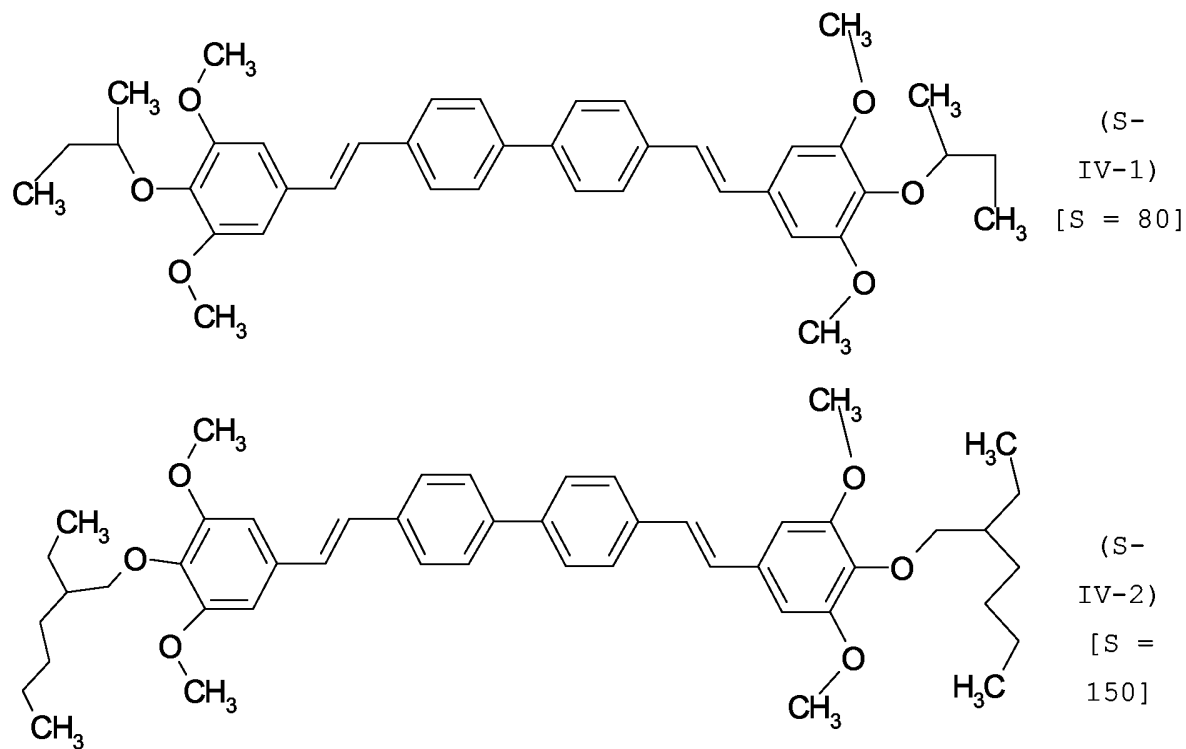

The sensitizers useful for the present invention can be synthesised by known methods and the synthesis of the highly preferred sensitizers of formulae (S-III-B) and (S-IV-B) preferably
 5 can be done in analogy to the synthesis of sensitizer (S-III-1) as disclosed in the following.

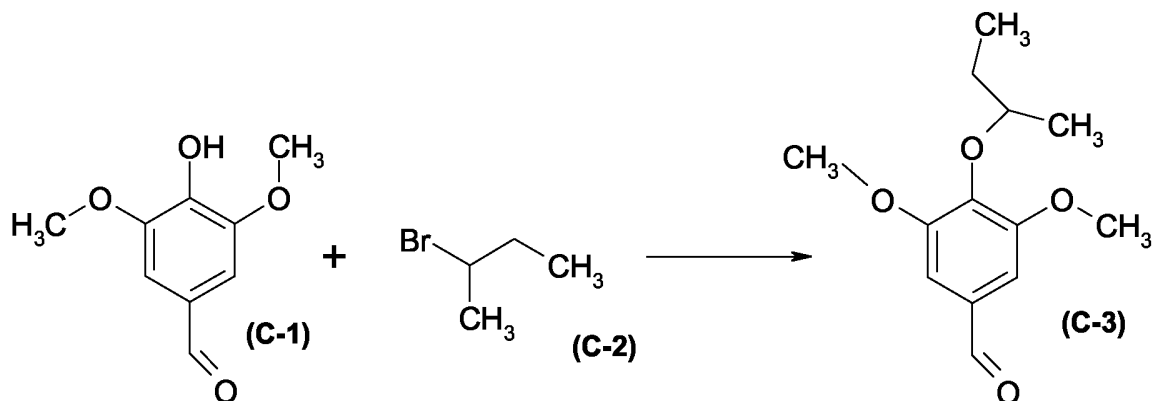Synthesis of intermediate (C-3)

To a mixture of 8.365 kg (45.0 mol) syringaldehyde **(C-1)** and
5 1.494 kg (9.0 mol) potassium iodide is added 20.25 L sulfolane at
room temperature. After heating up this mixture to 30°C under
nitrogen, 3.12 kg (47.25 mol) of KOH in water and 2.80 kg (20.25
mol) K₂CO₃ are added. After warming the reaction mixture to 75°C,
12.78 kg (90.0 mol) 2-bromo butane **(C-2)** is added over a period of
10 30 minutes. Heating at 75°C is continued for 24 hours, followed by
cooling to 25°C. Then 25 L Water is added and the reaction product
is extracted with 18 L methyl t-butyl ether (MTBE). The organic
phase is consecutively a) two times washed with 6.0 L of a 7.5 wt.%
K₂CO₃ solution in water respectively, b) two times washed with 13.5 L
15 of pure water respectively and finally, c) two times washed with 4.5
kg of a 20 wt.% NaCl solution in water respectively. The solvent
(MTBE) is removed by distillation under reduced pressure of 50 mBar
at 75°C and thereby are obtained 7.845 kg (theoretical yield of 75
%) of the crude intermediate **(C-3)** as a yellow oil, that is used in
20 the synthesis of **(S-III-1)** without further purification.

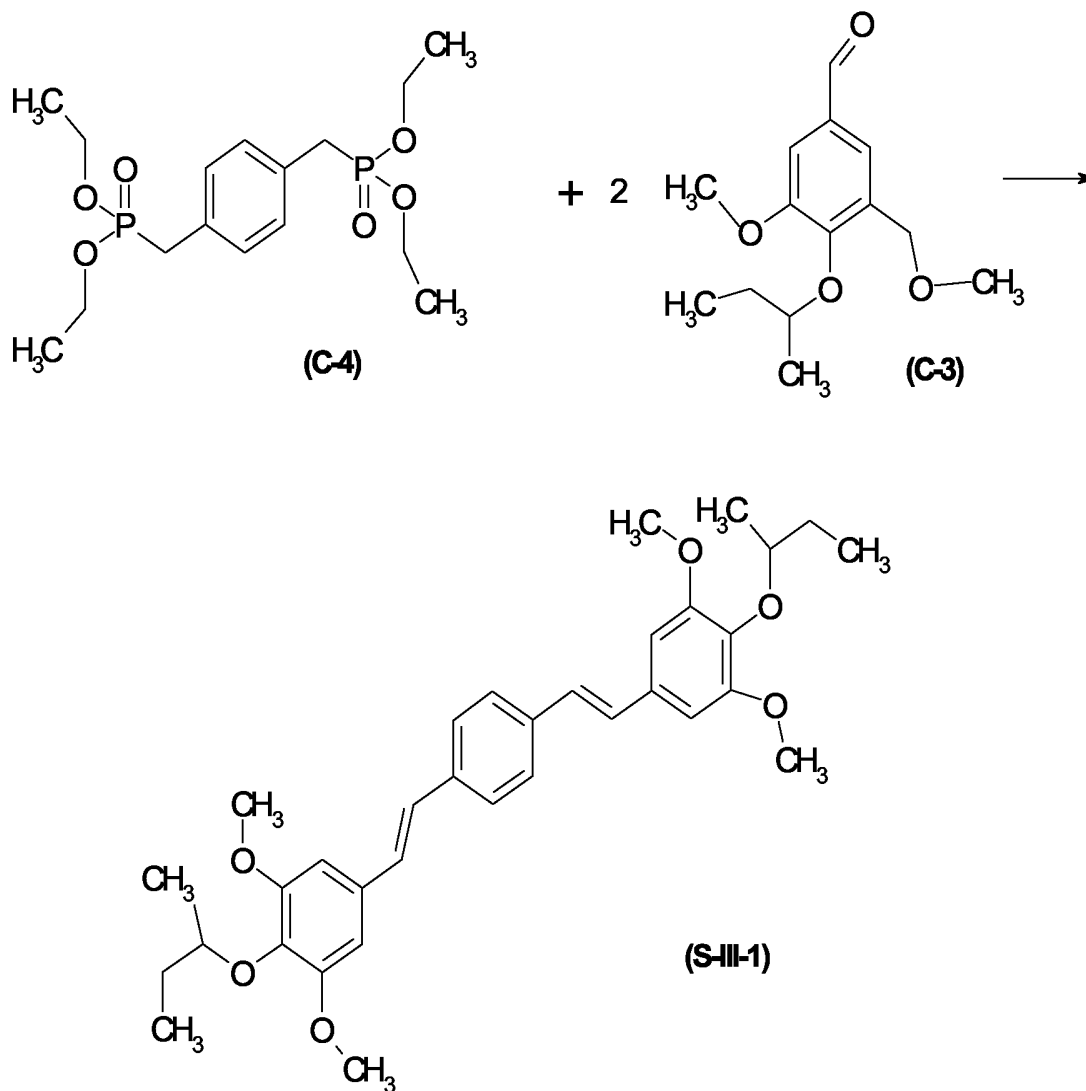Synthesis of sensitizer (S-III-1)

To a mixture of 9.63 kg (25.46 mol) p-xylylene-bis-phosphonate
 5 (C-4) and 12.13 kg (50.92 mol) of the crude intermediate (C-3) in 20
 L THF, 4.70 kg (71.3 mol) of KOH is added at room temperature. After
 heating the stirred reaction mixture at reflux for 3.5 hours, the
 reaction product is precipitated by adding a mixture of 25.2 kg
 methanol and 9.9 kg water, followed by further cooling to 20°C. The
 10 crystalline product (S-III-1) is filtered off, washed with several
 portions of methanol/water on the filter and dried at 50°C. The

- 30 -

yield is 9.05 kg (theoretical yield of 67 %) of **(S-III-1)** having a melting point of 154°C.

A suitable synthesis for the p-xylylene-bis-phosphonate **(C-4)** is known from the literature, e.g. from B.P. Lugovkin and B.A.

5 Arbuzov, Doklady Akademii Nauk SSSR (1948), 59, pages 1301 to 1304.

In a preferred embodiment of the present invention the sensitizer is a fluorene compound that is conjugated via a double or triple bond with an aromatic or heteroaromatic group.

10 The fluorene compound sensitizer that is preferred for the present invention has at least two pi-substituents, that together comprise at least a total of 16 pi-electrons that are in conjugation with the pi-electrons of the fluorene ring system. To make possible the conjugation, said pi-substituents are bound to positions 1 to 8
15 of the fluorene ring system. Preferably one of said two pi-substituents is bound to position 2 and the other to position 7 of the fluorene ring system and each of said two pi-substituents comprises at least 8 pi-electrons that are in conjugation with the pi-electrons of the fluorene ring system.


20 The term "pi-electron" as used for the characterization of the sensitizers of the present invention means a) electrons that are localized in orbitals perpendicular to the atom-atom bonds and b) free electron pairs. For carbon, nitrogen and oxygen atoms pi-electrons usually are located in p-orbitals.

25 The terms "conjugated" or "in conjugation with" as used for the characterization of the sensitizers of the present invention, is commonly known for systems having alternating sequences of single and multiple bonds and/or atoms with a free electron pair and multiple bonds. The pi-electrons of e.g. two double bonds separated
30 by a single bond are said to be conjugated, if the geometry of the molecule allows an overlap of the orbitals of the two double bonds, so that their four pi-electrons are delocalised. In particular the geometry is such that the molecular part that has a conjugated

- 31 -

(delocalized) pi-electron system has a planar basic molecular skeleton.

The fluorene ring system and its numbering is demonstrated with the following formula:

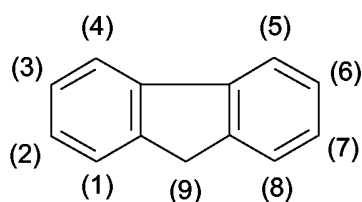


In a preferred embodiment of the present invention the sensitizer has a pi-substituent comprising a linking group with a carbon-carbon double or triple bond that links the fluorene ring system with an aryl or heteroaryl (hetaryl) group. The linking group can also comprise more than one conjugated double bond, as long as conjugation is possible from the pi-electrons of the fluorene ring system to the aryl or heteroaryl group of the pi-substituent.

Preferably the pi-substituent is selected from the groups -L-aryl or -L-heteroaryl, wherein L means an alkenylene or alkynylene group and particularly preferred an ethenylene (vinylene) or ethynylene (-CC-) group. For the pi-substituents preferred aryl groups are phenyl groups and preferred hetaryl groups are six ring heterocycles like pyridinyl groups and five ring heterocycles. Examples for preferred sensitizers according to the present invention are distyrylfluorene compounds, diheteroaryl vinylfluorene compounds and diarylethynyl fluorene compounds.

In a particular preferred embodiment of the present invention the sensitizer has a structure according to one of formulae (S-VIII), (S-XIX) or (S-XX):

- 32 -

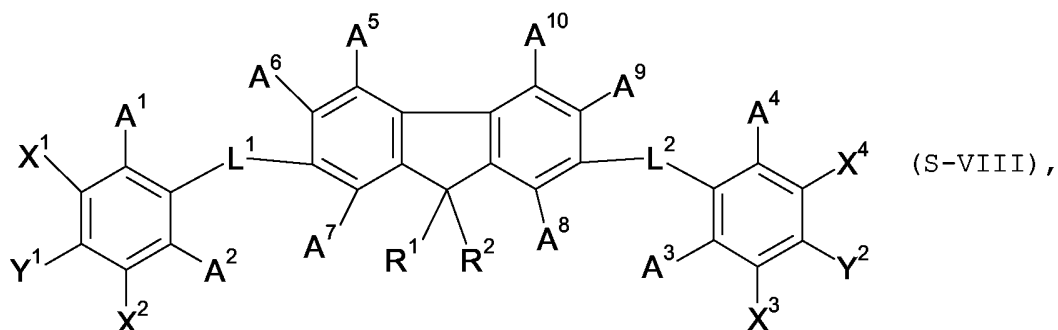


wherein

A¹ to A¹⁰, X¹ to X⁴ and Y¹, Y² mutually independent mean a substituent selected from a non-metallic atom group,

L¹, L² mutually independent mean a linking group selected from
-CR³=CR⁴- or ethynylene and

R¹ to R⁴ mutually independent mean a substituent selected from a non-metallic atom group,

and wherein one or more pairs of said substituents can jointly mean
the remaining atoms to form a ring,

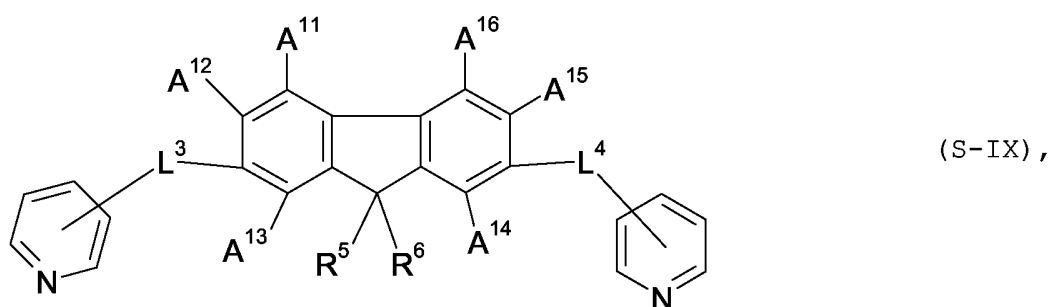

wherein

A¹¹ to A¹⁶ mutually independent mean a substituent selected from a non-metallic atom group,

L³, L⁴ mutually independent mean a linking group selected from
-CR⁷=CR⁸- or ethynylene and


- 33 -

R⁵ to R⁸ mutually independent mean a substituent selected from a non-metallic atom group,

wherein the pyridinyl groups are unsubstituted or substituted by one to four substituents selected from a non-metallic atom group,

5 L³, L⁴ are bond to a carbon atom of the pyridyl group,

and wherein one or more pairs of said substituents can jointly mean the remaining atoms to form a ring, or

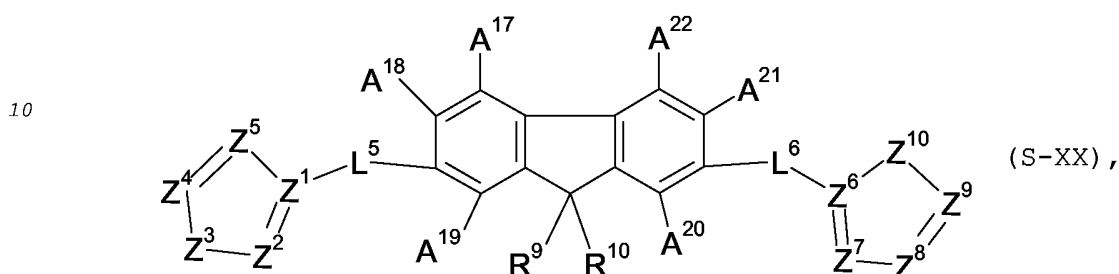

15

wherein

A¹⁷ to A²² mutually independent mean a substituent selected from a non-metallic atom group,

20 L⁵, L⁶ mutually independent mean a linking group selected from -CR¹¹=CR¹²- or ethynylene,

R⁹ to R¹² mutually independent mean a substituent selected from a non-metallic atom group,

25 Z¹ to Z⁴ and Z⁶ to Z⁹ mutually independent mean nitrogen or carbon atoms that can be unsubstituted or can be substituted by a substituent selected from a non-metallic atom group,

Z⁵, Z¹⁰ mutually independent mean O, S, C, CR¹³, CR¹⁴R¹⁵ or NR¹⁶ and

R¹³ to R¹⁶ mutually independent mean a substituent selected from a non-metallic atom group,

30 and wherein one or more pairs of said substituents can jointly mean the remaining atoms to form a ring.

Said one or more pairs of substituents that jointly can mean the remaining atoms to form a ring preferably are selected from A¹ with X¹; X¹ with Y¹; Y¹ with X²; X² with A²; A³ with X³; X³ with Y²;

- 34 -

Y² with X⁴; X⁴ with A⁴; A⁵ with A⁶; R¹ with R²; A⁹ with A¹⁰; A¹, A²,
A⁶ or A⁷ with R³ or R⁴ of L¹; A³, A⁴, A⁸ or A⁹ with R³ or R⁴ of L²;
A¹¹ with A¹²; A¹⁵ with A¹⁶; A¹² or A¹³ with R⁷ or R⁸ of L³; A¹⁴ or A¹⁵
with R⁷ or R⁸ of L⁴; A¹⁷ with A¹⁸; A²¹ with A²²; A¹⁸ or A¹⁹ with R¹¹
5 or R¹² of L⁵; and A²⁰ or A²¹ with R¹¹ or R¹² of L⁶.


In a particular preferred embodiment of the present invention, said
one or more pairs of substituents that jointly can mean the
remaining atoms to from a ring are selected from R¹ with R²; A¹, A²,
A⁶ or A⁷ with R³ or R⁴ of L¹; A³, A⁴, A⁸ or A⁹ with R³ or R⁴ of L²;
10 A¹² or A¹³ with R⁷ or R⁸ of L³; A¹⁴ or A¹⁵ with R⁷ or R⁸ of L⁴; A¹⁸ or
A¹⁹ with R¹¹ or R¹² of L⁵; and A²⁰ or A²¹ with R¹¹ or R¹² of L⁶.

In a further preferred embodiment of the present invention the
sensitizer has a structure according to one of formulae (S-XVIII),
(S-XIX) or (S-XX), wherein L¹, L² mutually independent mean
15 -CR³=CR⁴-; L³, L⁴ mutually independent mean -CR⁷=CR⁸-; and L⁵, L⁶
mutually independent mean -CR¹¹=CR¹²-. In this embodiment it is
particularly preferred, when R³, R⁴, R⁷, R⁸, R¹¹ and R¹² mean a
hydrogen atom.


In another preferred embodiment of the present invention the
20 sensitizer has a structure according to one of formulae (S-XVIII),
(S-XIX) or (S-XX), wherein
A¹ to A²² mean hydrogen, and/or
X¹ to X⁴ mutually independent mean a substituent selected from
hydrogen, alkoxy or alkylthio, and/or
25 Y¹, Y² mutually independent mean a substituent selected from alkoxy
or alkylthio, and/or
R¹, R², R⁵, R⁶, R⁹, R¹⁰ mutually independent mean straight chain or
branched alkyl and/or
L¹ to L⁶ mean -CH=CH-.

30 Further advantages with respect to the sensitivity can be
achieved with sensitizers of the following general formulae (S-
XVIII-A) and/or (S-XVIII-B):

- 35 -

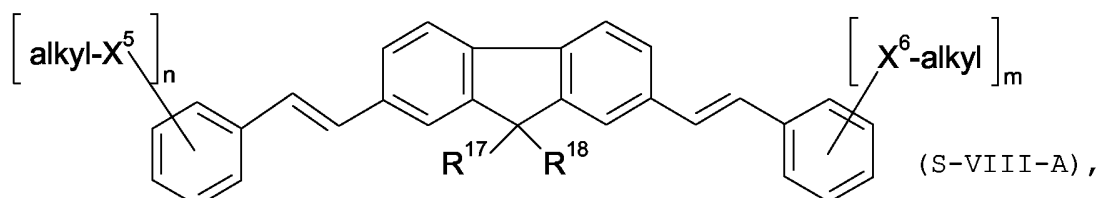

5

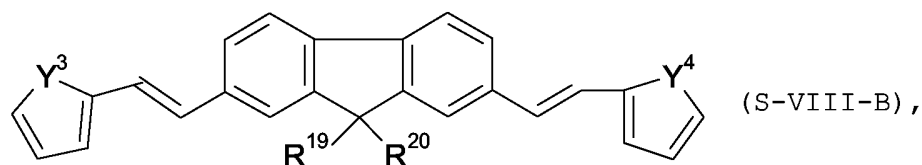

wherein the alkyl groups mutually independent mean an
 10 unsubstituted linear or branched alkyl group having 1 to 20 carbon
 atoms and preferably having 1 to 10 carbon atoms,
 X^5 and X^6 mutually independent mean O or S, preferably O,
 n , m mutually independent mean an integer from 1 to 3, preferably 3,
 Y^3 , Y^4 mutually independent mean O, S, NH or N-alkyl, preferably O
 15 or S,
 R^{17} to R^{20} mutually independent mean an unsubstituted linear or
 branched alkyl group having 1 to 20 carbon atoms and preferably
 having 1 to 10 carbon atoms,
 and wherein the substituents alkyl-X^5 and alkyl-X^6 are bound at
 20 positions 3 and/or 4 and/or 5 of the phenylrings respectively. In
 the case where n and/or m are 1, the single substituent is
 preferably bound at position 4 (para position) of the phenyl ring
 concerned.


Further advantages with respect to the sensitivity can be
 25 achieved with symmetrical sensitizers. A symmetrical sensitizer
 according to the present invention means a compound of formula (S-

- 36 -


XVIII), wherein $A^1 = A^4$, $A^2 = A^3$, $A^6 = A^9$, $A^5 = A^{10}$, $A^7 = A^8$, $X^1 = X^4$, $X^2 = X^3$, $Y^1 = Y^2$, $R^1 = R^2$, and $L^1 = L^2$; a compound of formula (S-XIX), wherein $A^{11} = A^{16}$, $A^{12} = A^{15}$, $A^{13} = A^{14}$, $R^5 = R^6$, $L^3 = L^4$ and wherein the two pyridyl rings have the same substitution; or a
 5 compound of formula (S-XX), wherein $A^{17} = A^{22}$, $A^{18} = A^{21}$, $A^{19} = A^{20}$, $R^9 = R^{10}$, $L^5 = L^6$ and wherein the two 5 ring heterocycles have the same substitution.

Sensitizers of structures (S-XVIII) and (S-XX) are preferred over those of structure (S-XIX) and sensitizers of structure (S-XVIII) are particularly preferred.
 10


The following structures are examples of preferred sensitizers of the present invention:

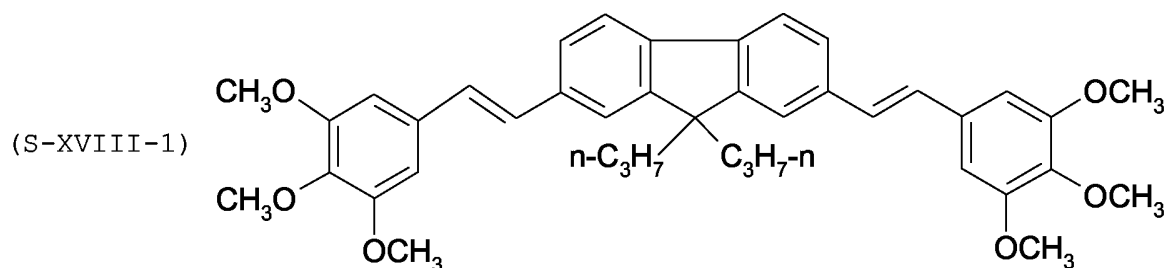


15 (S-XVIII-2) :

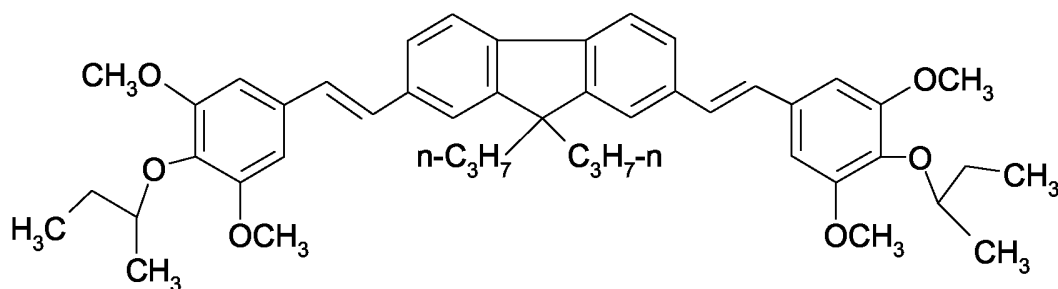


- 37 -

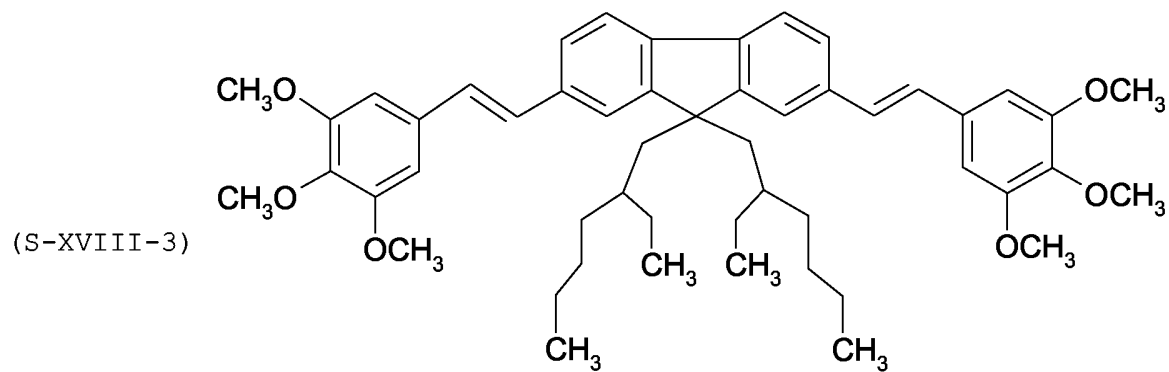

(S-XVIII-4) :

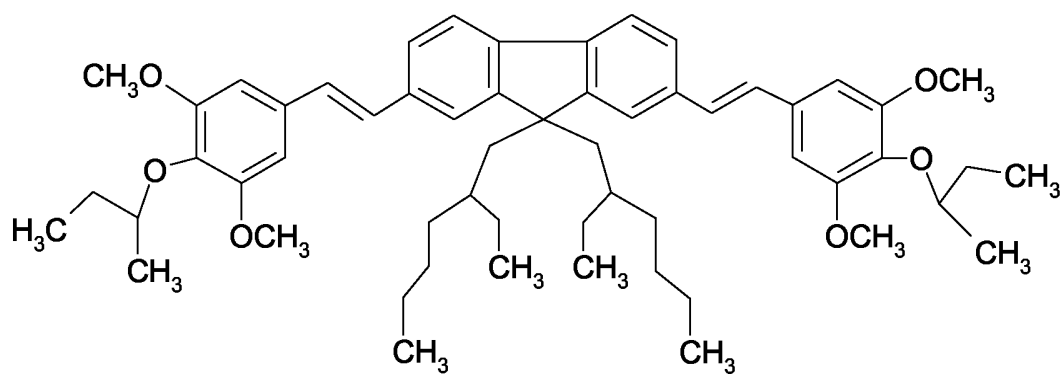


5

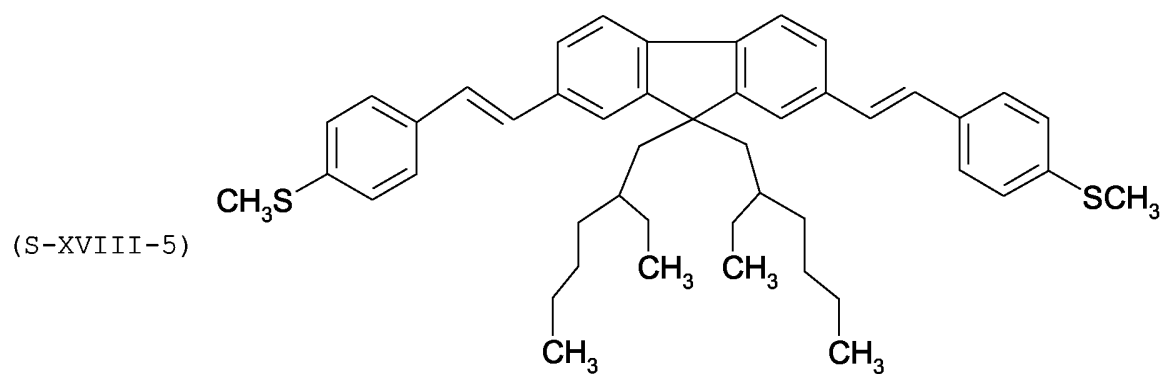


- 38 -

(S-XVIII-6)

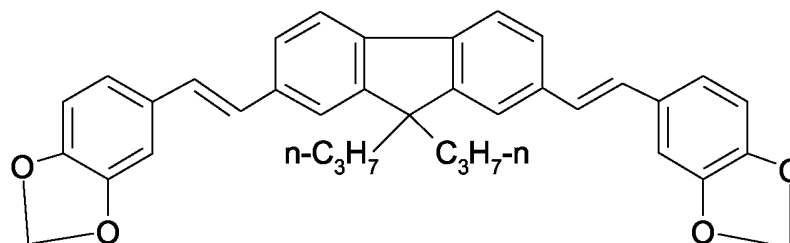

(S-XX-1)

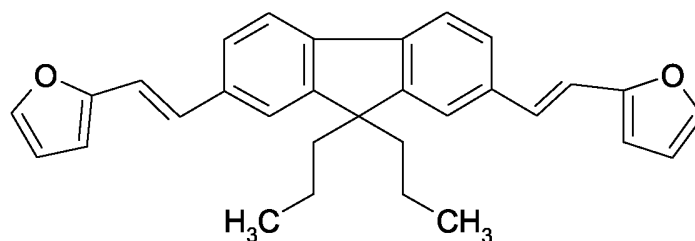

5

The sensitizer of the present invention can be used as a single compound or as a mixture of compounds of formulae (S-XVIII) and/or (S-XIX) and/or (S-XX). The overall amount of these compounds ranges from 0.1 to 10 % by weight, preferably 0.5 to 8 % by weight with respect to the total weight of the non-volatile compounds in the composition. The sensitizer of the present invention can also be combined with known sensitizers.


Preferred fluorene compound sensitizers useful for the present invention have a good solubility in common solvents. It has been found, that such sensitizers are particularly advantageous, that have a solubility of 0.5 g, in particular 1.5 g sensitizer per 100 mL methylethylketone or more.

The fluorene compound sensitizers useful for the present invention can be synthesised by known methods, e.g. as described in J.M. Kauffman, G. Moyna, J. Org. Chem., 2003, 68, p. 839-853 and particularly preferred the synthesis can be done in analogy to the synthesis of sensitizer (S-XVIII-2) as described in the following.

25


- 39 -

Synthesis of sensitizer S-XVIII-2

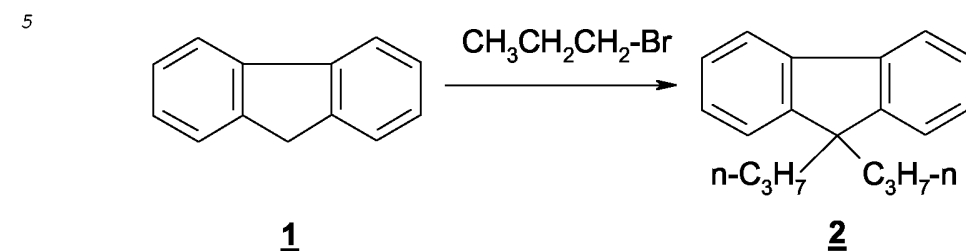Step 1: 9,9-Dipropylfluorene (2)

To a solution of fluorene (1) (41.5g) in dimethylformamide (300 mL) at 20°C was added sodium hydride (24.7g) in portions. The red solution was stirred for 2 hours at 35°C until no more gas was evolved. To this solution was added 1-bromopropane (62.7g) drop-wise over 1 hour at 5°C and then the mixture was stirred for 1 hour at 40°C.


The suspension was poured into ice-water (1.5L) and the resultant oil was dissolved in methylene chloride (0.5L). The organic phase was washed with water, dried over magnesium sulfate and the solvent was removed under reduced pressure. The residue was purified by vacuum distillation (122-125°C/0.5 mmHg). After cooling, 2 was obtained as a crystalline product (47.0g, 74%).

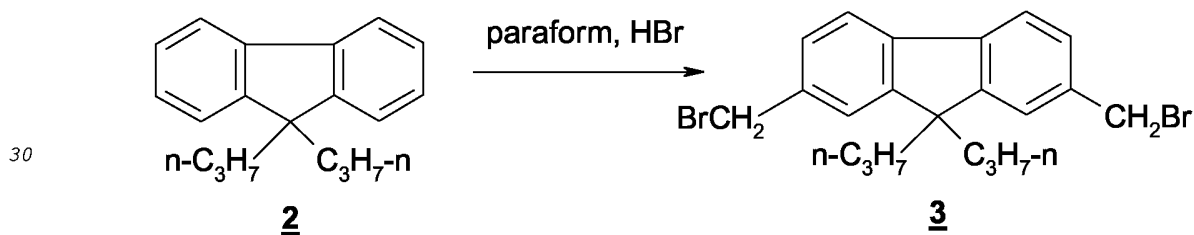Step 2: 2,7-Bis(bromomethyl)-9,9-dipropylfluorene (3)

- 40 -


To a solution of 9,9-dipropylfluorene **2** (25.0g) in acetic acid (50mL) was added paraformaldehyde (paraform) (18.0g) at 15°C. To the mixture was then added a solution of hydrogen bromide in acetic acid (250 mL, 30% w/w) over 0.5 hours, and the solution was stirred at 60°C for 5 hours. The reaction mixture was poured into ice-water (1.0L) and stirred for 0.5 hours. The precipitate was filtered off and purified by stirring in acetonitrile (200 mL) at 40°C, filtering and drying to give **3** as a yellow powder (33.g, 77%).

Step 3: 2,7-Bis(diethylphosphonomethyl)-9,9-dipropylfluorene (**4**)

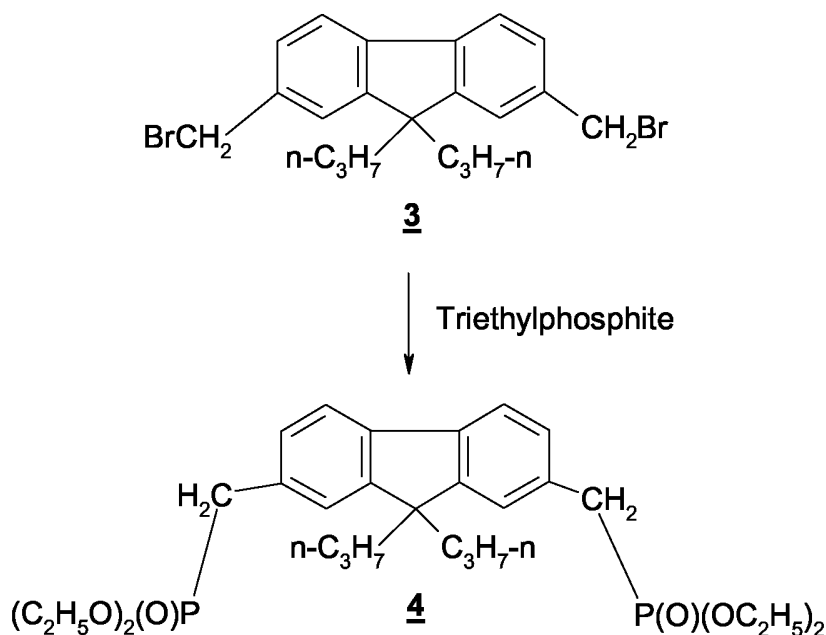

A mixture of 2,7-Bis(bromomethyl)-9,9-dipropylfluorene (**3**) (33.0g) and triethylphosphite (40 mL) was stirred for 3 hours at 150°C. Excess triethylphosphite was removed at reduced pressure at 100°C and the resultant oil crystallized from hexane. After drying, **4** was obtained as a white powder (31.5g, 67.5%).

Step 4: sensitizer S-XVIII-2

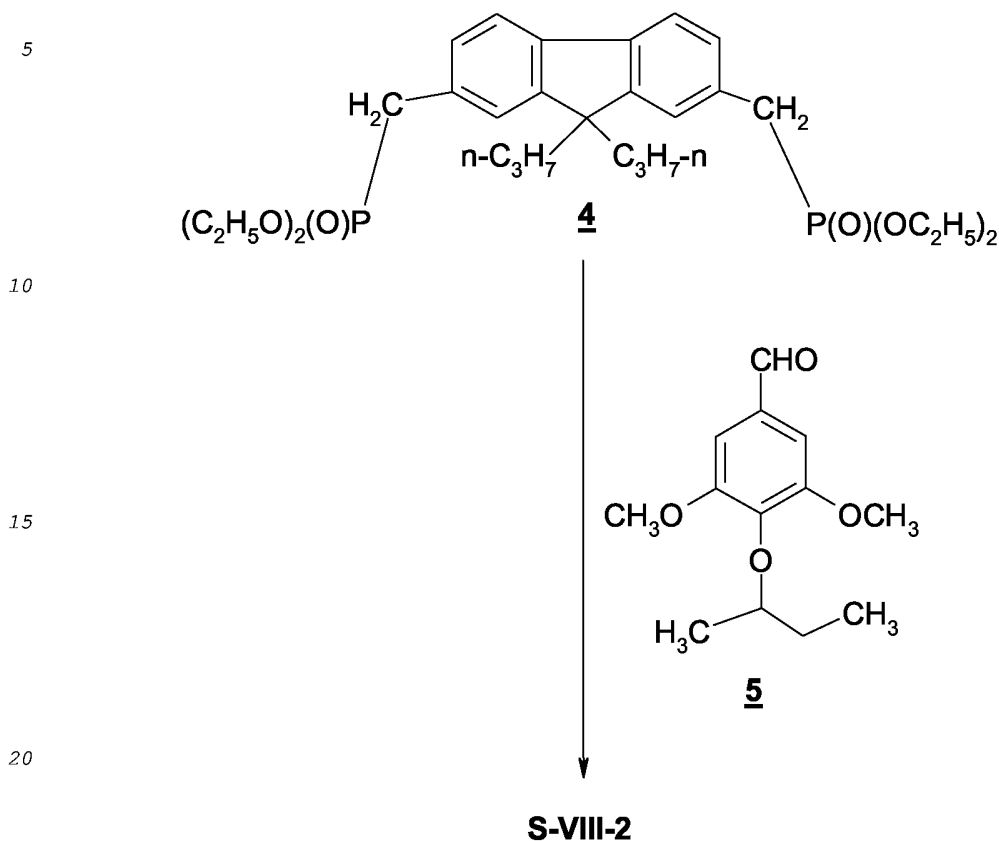

To a solution of 2,7-Bis(diethylphosphonomethyl)-9,9-dipropylfluorene (**4**) (26.8g) and 3,5-dimethoxy-4-(1-methylpropoxy)-benzaldehyde (**5**) (26.2g) in tetrahydrofuran (200 mL) was added potassium hydroxide (8.4g) and dimethylsulfoxide (5.0mL). The suspension was stirred at 70°C for 4 hours and then isopropanol (150mL) was added. The solvent of the supernatant solution was removed at reduced pressure and the resultant oil was stirred in methanol (200 mL). The precipitate was filtered off and purified by stirring in boiling ethanol (200 mL) two times. After drying, **S-XVIII-2** was obtained as a yellow powder (25.8g, 72%).

- 42 -

The known photopolymerization initiators can be used in the composition of the present invention, but as disclosed above, in a preferred embodiment of the present invention the photopolymerizable composition according to the present invention comprises a hexaaryl-
5 bisimidazole (HABI; dimer of triaryl-imidazole) compound as a photopolymerization initiator alone or in combination with further photoinitiators.

A procedure for the preparation of hexaarylbisimidazoles is described in DE 1470 154 and their use in photopolymerizable
10 compositions is documented in EP 24 629, EP 107 792, US 4 410 621, EP 215 453 and DE 3 211 312. Preferred derivatives are e. g. 2,4,5,2',4',5'-hexaphenylbisimidazole, 2,2'-bis(2-chlorophenyl)-4,5,4',5'-tetraphenylbisimidazole, 2,2'-bis(2-bromophenyl)-4,5,4',5'-tetraphenylbisimidazole, 2,2'-bis(2,4-dichlorophenyl)-
15 4,5,4',5'-tetraphenylbisimidazole, 2,2'-bis(2-chlorophenyl)-4,5,4',5'-tetrakis(3-methoxyphenyl)bisimidazole, 2,2'-bis(2-chlorophenyl)-4,5,4',5'-tetrakis(3,4,5-trimethoxyphenyl)-bisimidazole, 2,5,2',5'-tetrakis(2-chlorophenyl)-4,4'-bis(3,4-dimethoxyphenyl)bisimidazole, 2,2'-bis(2,6-dichlorophenyl)-
20 4,5,4',5'-tetraphenylbisimidazole, 2,2'-bis(2-nitrophenyl)-4,5,4',5'-tetraphenylbisimidazole, 2,2'-di-o-tolyl-4,5,4',5'-tetraphenylbisimidazole, 2,2'-bis(2-ethoxyphenyl)-4,5,4',5'-tetraphenylbisimidazole and 2,2'-bis(2,6-difluorophenyl)-4,5,4',5'-tetraphenylbisimidazole. The amount of the HABI photoinitiator
25 typically ranges from 0.01 to 30 % by weight, preferably from 0.5 to 20 % by weight, relative to the total weight of the non volatile components of the photopolymerizable composition.

A very high sensitivity can be obtained in the context of the present invention by the combination of an optical brightener as
30 sensitizer and a hexaarylbisimidazole as photoinitiator, sensitizers of formulae (S-III) and (S-IV) being particularly preferred.

Suitable classes of photoinitiators other than hexaarylbisimidazole compounds include aromatic ketones, aromatic onium salts, organic peroxides, thio compounds, ketoxime ester com-

- 43 -

pounds, borate compounds, azinium compounds, metallocene compounds, active ester compounds and compounds having a carbon-halogen bond, but preferably the composition comprises a non-boron comprising photopolymerization initiator and particularly preferred the
5 photopolymerization initiator comprises no boron compound. Many specific examples of photoinitiators suitable for the present invention can be found in EP-A 1 091 247.

Preferably hexaarylbisimidazole compounds and/or metallocene compounds are used alone or in combination with other suitable
10 photoinitiators, in particular with aromatic ketones, aromatic onium salts, organic peroxides, thio compounds, ketoxime ester compounds, azinium compounds, active ester compounds or compounds having a carbon halogen bond.

In a preferred embodiment of the present invention the
15 hexaarylbisimidazole compounds make more than 50 mol-%, preferably at least 80 mol-% and particularly preferred at least 90 mol-% of all the photoinitiators used in the photopolymerizable composition of the present invention.

20 The non-metallic atom group according to the present invention preferably consists of a hydrogen atom or alkyl, alkenyl, alkynyl, aryl, heterocyclyl, hydroxy, carboxy, carbalkoxy, halogeno, alkoxy, aryloxy, heterocyclyloxy, alkylthio, arylthio, heterocyclylthio, alkylseleno, arylseleno, heterocyclylseleno, acyl, acyloxy,
25 alkylsulfonyl, aminosulfonyl, acylamino, cyano, nitro, amino or mercapto groups, wherein heterocycle means a saturated, unsaturated or aromatic heterocycle and acyl means the remaining residue of an aliphatic, olefinic or aromatic carbon, carbaminic, sulfonic, amidosulfonic or phosphonic acid.

30 In a preferred embodiment of the present invention the non-metallic atom group consists of a hydrogen atom or alkyl, alkenyl, aryl, heterocyclyl, hydroxy, carboxy, carbalkoxy, halogeno, alkoxy, aryloxy, heterocyclyloxy, alkylthio, arylthio, heterocyclylthio, acyl, acyloxy, acylamino, cyano, nitro, amino, or mercapto groups,

- 44 -

wherein heterocycle has the same meaning as given above and acyl means the remaining residue of an aliphatic, olefinic or aromatic carbon, sulfonic, amidosulfonic or phosphonic acid.

Alkyl, alkylene, alkenyl, alkenylene, alkynyl and alkynylene groups according to the present invention can be linear (straight chain), branched or cyclic.

The alkyl, alkylene, alkenyl, alkenylene, alkynyl, alkynylene, aryl, heterocyclyl, alkoxy and alkylthio groups of the present invention can be optionally substituted by a substituent selected from the non-metallic atom group of the present invention and the substituents can be selected to adjust the solubility of the sensitizer and preferably may be halogeno, alkoxy, alkylthio, carbalkoxy, acyloxy or hydroxy.

A ring according to the present invention means a carbo- or heterocycle, that can be substituted by substituents selected from e.g. the non-metallic atom group of the present invention, that can be saturated, unsaturated or aromatic and that itself can be substituted by further rings. Preferably the ring is a 5 to 8 membered ring, and in particular a 5 or 6 membered ring.

20

The binder can be selected from a wide series of organic polymers. Compositions of different binders can also be used. Useful binders include for example chlorinated polyalkylenes in particular chlorinated polyethylene and chlorinated polypropylene; poly(methacrylic acid) alkyl esters or alkenyl esters in particular poly(methyl (meth)acrylate), poly(ethyl (meth)acrylate), poly(butyl (meth)acrylate), poly(isobutyl (meth)acrylate), poly(hexyl (meth)acrylate), poly((2-ethylhexyl) (meth)acrylate) and poly(alkyl (meth)acrylate); copolymers of (meth)acrylic acid alkyl esters or alkenyl esters with other copolymerizable monomers, in particular with (meth)acrylonitrile, vinyl chloride, vinylidene chloride, styrene and/or butadiene; poly(vinyl chloride) (PVC); vinylchloride/(meth)acrylonitrile copolymers; poly(vinylidene chloride) (PVDC); vinylidene chloride/(meth)acrylonitrile

- 45 -

copolymers; poly(vinyl acetate); poly(vinyl alcohol); poly
(meth)acrylonitrile; (meth)acrylonitrile/styrene copolymers;
(meth)acrylamide/alkyl (meth)acrylate copolymers;
(meth)acrylonitrile/butadiene/styrene (ABS) terpolymers;
5 polystyrene; poly(α -methylstyrene); polyamides; polyurethanes;
polyesters; cellulose or cellulose compounds like methyl cellulose,
ethyl cellulose, acetyl cellulose, hydroxy-(C₁₋₄-alkyl)cellulose,
carboxymethyl cellulose; poly(vinyl formal) and poly(vinyl butyral).
Particularly suitable are binders that are insoluble in water, but
10 on the other hand are soluble or at least swellable in aqueous-
alkaline solutions. Further effective binders are polymers that are
soluble in common organic coating solvents.

Particular suitable for the purpose of the present invention
are binders containing carboxyl groups, in particular polymers or
15 copolymers containing monomeric units of α,β -unsaturated carboxylic
acids and/or monomeric units of α,β -unsaturated dicarboxylic acids,
preferably acrylic acid, methacrylic acid, crotonic acid,
vinylacetic acid, maleic acid or itaconic acid. By the term
"copolymers" are to be understood in the context of the present
20 invention polymers containing units of at least 2 different
monomers, thus also terpolymers and higher mixed polymers.
Particular useful examples of copolymers are those containing units
of (meth)acrylic acid and units of alkyl (meth)acrylates, allyl
(meth)acrylates and/or (meth)acrylonitrile as well as copolymers
25 containing units of crotonic acid and units of alkyl (meth)acrylates
and/or (meth)acrylonitrile and vinylacetic acid/alkyl (meth)acrylate
copolymers. Also suitable are copolymers containing units of maleic
anhydride or maleic acid monoalkyl esters. Among those are, for
example, copolymers containing units of maleic anhydride and
30 styrene, unsaturated ethers or esters or unsaturated aliphatic
hydrocarbons and the esterification products obtained from such
copolymers. Further suitable binders are products obtainable from
the conversion of hydroxyl-containing polymers with intramolecular
dicarboxylic anhydrides. Further useful binders are polymers in

- 46 -


which groups with acid hydrogen atoms are present, some or all of which are converted with activated isocyanates. Examples of these polymers are products obtained by conversion of hydroxyl-containing polymers with aliphatic or aromatic sulfonyl isocyanates or
5 phosphinic acid isocyanates. Also suitable are polymers with aliphatic or aromatic hydroxyl groups, for example copolymers containing units of hydroxyalkyl (meth)acrylates, allyl alcohol, hydroxystyrene or vinyl alcohol, as well as epoxy resins, provided they carry a sufficient number of free OH groups.

10 The organic polymers used as binders have a typical mean molecular weight M_w between 600 and 200 000, preferably between 1 000 and 100 000. Preference is further given to polymers having an acid number between 10 to 250, preferably 20 to 200, or a hydroxyl number between 50 and 750, preferably between 100 and 500. The amount of
15 binder(s) generally ranges from 10 to 90 % by weight, preferably 20 to 80 % by weight, relative to the total weight of the non-volatile components of the composition.

The polymerizable compound can be selected from a wide series
20 of photo-oxidizable compounds, in particular from those that comprise at least one of the following N-containing groups: primary, secondary or tertiary amino, urethane or urea. From the compounds comprising at least one primary, secondary or tertiary amino group, those comprising at least a tertiary amino group are preferred.
25 Radically polymerizable compounds containing at least one urethane and/or urea group and/or a tertiary amino group are particularly preferred. By the term "urea group" has to be understood in the context of the present invention a group of the formula $>N-CO-N<$, wherein the valences on the nitrogen atoms are saturated by hydrogen
30 atoms and hydrocarbon radicals (with the proviso that not more than one valence on either of the two nitrogen atoms is saturated by one hydrogen atom). However, it is also possible for one valence on one nitrogen atom to be bonded to a carbamoyl ($-CO-NH-$) group, producing a biuret structure.


- 47 -

Also suitable are compounds containing a photo-oxidizable amino, urea or thio group, which may be also be a constituent of a heterocyclic ring. Compounds containing photo-oxidizable enol groups can also be used. Specific examples of photo-oxidizable groups are triethanolamino, triphenylamino, thiourea, imidazole, oxazole, thiazole, acetylacetonyl, N-phenylglycine and ascorbic acid groups. Particularly suitable compounds are monomers containing photo-oxidizable groups corresponding to the following formula (XVIII):



wherein

R represents an alkyl group having 2 to 8 carbon atoms ((C₂-C₈) alkyl group), a (C₂-C₈) hydroxyalkyl group or a (C₆-C₁₄) aryl group,

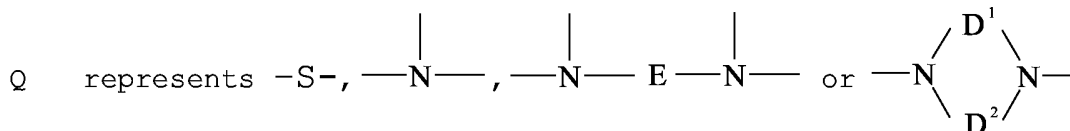

wherein

E represents a divalent saturated hydrocarbon group of 2 to 12 carbon atoms, a divalent 5- to 7-membered, saturated iso- or heterocyclic group, which may contain up to 2 nitrogen, oxygen and/or sulfur atoms in the ring, a divalent aromatic mono- or bicyclic isocyclic group of 6 to 12 carbon atoms or a divalent 5- or 6-membered aromatic heterocyclic group; and

D¹ and D² independently represent a saturated hydrocarbon group of 1 to 5 carbon atoms,

R¹ and R² independently represent a hydrogen atom, an alkyl or alkoxyalkyl group,

R³ represents a hydrogen atom, a methyl or ethyl group,

X¹ represents a straight-chained or branched saturated hydrocarbon group of 1 to 12 carbon atoms,

- 48 -

X^2 represents a (c+1)-valent hydrocarbon group in which up to 5 methylene groups may have been replaced by oxygen atoms,

a is an integer from 0 to 4,

b is 0 or 1,

5 c is an integer from 1 to 3,

m is an integer from 2 to 4 and

n is an integer from 1 to m.

Compounds of this nature and processes for their preparation are described in EP 287 818. If a compound of general formula
10 (XVIII) contains several radicals R or several radicals according to the structure indicated between square brackets, i. e. if $(n-m) > 1$ and $n > 1$, these radicals can be identical or different from one another. Compounds according to formula (XVIII) wherein $n = m$ are particularly preferred. In this case, all radicals contain
15 polymerizable groups. Preferably, the index a is 1; if several radicals are present, a cannot be 0 in more than one radical. If R is an alkyl or hydroxyalkyl group, R generally contains 2 to 6, particularly 2 to 4 carbon atoms. Aryl radicals R are in general mononuclear or binuclear, preferably however mononuclear, and may be
20 substituted with (C_1-C_5) alkyl or (C_1-C_5) alkoxy groups. If R^1 and R^2 are alkyl or alkoxy groups, they preferably contain 1 to 5 carbon atoms. R^3 is preferably a hydrogen atom or a methyl group. X^1 is preferably a straight-chained or branched aliphatic and/or cycloaliphatic radical of preferably 4 to 10 carbon atoms. In a
25 preferred embodiment, X^2 contains 2 to 15 carbon atoms and is in particular a saturated, straight-chained or branched aliphatic and/or cycloaliphatic radical containing this amount of carbon atoms. Up to 5 methylene groups in these radicals may have been replaced by oxygen atoms; in the case of X^2 being composed of pure
30 carbon chains, the radical generally has 2 to 12 carbon atoms, preferably 2 to 6 carbon atoms. X^2 can also be a cycloaliphatic group of 5 to 10 carbon atoms, in particular a cyclohexane diyl group. The saturated heterocyclic ring formed by D^1 , D^2 and both nitrogen atoms generally has 5 to 10 ring members in particular 6 ring members. In

- 49 -

the latter case the heterocyclic ring is preferably a piperazine and the radical derived therefrom a piperazine-1,4-diyl radical. In a preferred embodiment, radical E is an alkane diyl group which normally contains about 2 to 6 carbon atoms. Preferably the divalent
5 5- to 7-membered, saturated, isocyclic group E is a cyclohexane diyl group, in particular a cyclohexane-1,4-diyl group. The divalent, isocyclic, aromatic group E is preferably an ortho-, meta- or para-phenylene group. The divalent 5- or 6-membered aromatic heterocyclic group E, finally, contains preferably nitrogen and/or sulphur atoms
10 in the heterocyclic ring. c is preferably 1, i. e. each radical in the square bracket generally contains only one polymerizable group, in particular only one (meth)acryloyloxy-group.

The compounds of formula (XVIII) wherein b = 1, which accordingly contain two urethane groups in each of the radicals
15 indicated in the square brackets, can be produced in a known way by conversion of acrylic esters or alkacrylic esters which contain free hydroxyl groups with equimolar amounts of diisocyanates. Excess isocyanate groups are then, for example, reacted with tris(hydroxyalkyl)amines, N,N'-bis(hydroxyalkyl) piperazines or
20 N,N,N',N'-tetrakis(hydroxyalkyl)alkylenediamines, in each of which individual hydroxyalkyl groups may have been replaced by alkyl or aryl groups R. If a = 0, the result is a urea grouping. Examples of the hydroxyalkylamine starting materials are diethanolamine, triethanolamine, tris(2-hydroxypropyl)amine, tris(2-
25 hydroxybutyl)amine and alkyl-bis-hydroxyalkylamines. Examples of suitable diisocyanates are hexamethylene diisocyanate, 2,2,4-trimethylhexamethylene diisocyanate, 1,4-cyclohexylene diisocyanate (= 1,4-diisocyanatocyclohexane) and 1,1,3-trimethyl-3-isocyanatomethyl-5-isocyanatocyclohexane. The hydroxy-containing
30 esters used are preferably hydroxyethyl (meth)acrylate, hydroxypropyl (meth)acrylate and hydroxyisopropyl (meth)acrylate.


The polymerizable compounds of formula (XVIII) wherein b = 0 are prepared converting the above-described hydroxyalkylamino compounds

- 50 -


with isocyanate-containing acrylic or alkacrylic esters. A preferred isocyanate-containing ester is isocyanato-ethyl (meth)acrylate.

Further polymerizable compounds comprising photooxidisable groups suitable for the purpose of the invention are compounds

5 according to the following formula (XIX):



wherein a' and b' independently represent integers from 1 to 4 and
10 Q, R¹, R², R³, n and m have the same meaning as above and Q can also be a group of the formula >N-E'-N< wherein the radical E' corresponds to the following formula (XX):




15

wherein c has the same meaning as in formula (I) and (p)C₆H₄ represents para-phenylene.


The compounds of formula (XIX) can be prepared analogously to those of formula (XVIII), except that the conversion products of
20 hydroxyalkyl acrylates or alkacrylates and diisocyanates are replaced by the corresponding acrylic and alkacrylic glycidic esters. Compounds of formula (XX) and processes to their preparation are disclosed in EP 316 706.

Further useful polymerizable compounds containing
25 photooxidisable groups are acrylic and alkacrylic esters of the following formula (XXI):


- 51 -




wherein

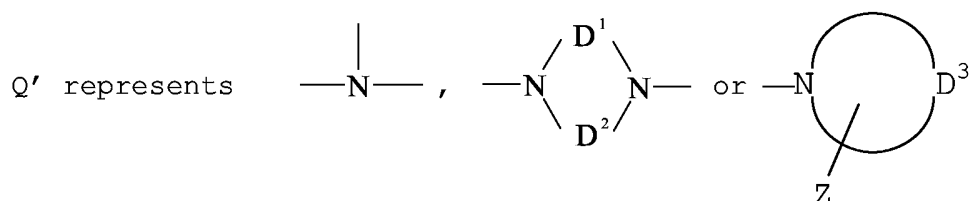

wherein D¹ and D² independently represent a saturated hydrocarbon group of 1 to 5 carbon atoms and D³ represents a saturated hydrocarbon group of 4 to 8 carbon atoms, which together with the nitrogen atom forms a 5- or 6-membered heterocyclic ring;
 X^{1'} represents -C_iH_{2i-1}- or

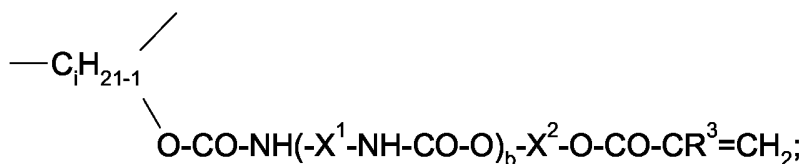

Z represents a hydrogen atom or a radical of the following formula:



i, k independently represent integers from 1 to 12;

n' represents an integer from 1 to 3; and

a is 0 or 1; provided that a is 0 in at least one of the radicals bonded to Q;

X¹, R³, a and b have the same meaning as given in the above formula (VIII); and

X² represents a divalent hydrocarbon group in which up to 5 methylene groups may be replaced by oxygen atoms.

In formula (XXI) index a is preferably 0 or 1 and i preferably represents a number between 2 and 10. Preferred radicals Q are piperazine-1,4-diyl (D¹ = D² = CH₂-CR₂), piperidine-1-yl (D³ = (CH₂)₅, Z = H) and 2-(2-hydroxyethyl)-piperidine-1-yl (D³ = (CH₂)₅, Z = CH₂CH₂OH).

- 52 -

Of the compounds of formula (XXI), those which apart from a urea group contain at least one urethane group are preferred. Here again, by the term "urea group" has to be understood the group of formula $>N-CO-N<$ already mentioned above. Compounds of formula (XXI) and processes for their preparation are disclosed in EP 355 387.

Also suitable polymerizable compounds are reaction products of mono- or diisocyanates with multifunctional alcohols, in which the hydroxy groups are partly or completely esterified with (meth)acrylic acid. Preferred compounds are materials, which are synthesized by the reaction of hydroxyalkyl-(meth)acrylates with diisocyanates. Such compounds are basically known and for instance described in DE 28 22 190 and DE 20 64 079.


The amount of polymerizable compound comprising photooxidisable groups generally ranges from 5 to 75 % by weight, preferably from 10 to 65 % by weight, relative to the total weight of the non volatile compounds of the photopolymerizable composition.

Moreover, the composition can contain polyfunctional (meth)acrylate or alkyl(meth)acrylate compounds as crosslinking agents. Such compounds contain more than 2, preferably between 3 and 6 (meth)acrylate and/or alkyl(meth)acrylate groups and include in particular (meth)acrylates of saturated aliphatic or alicyclic trivalent or polyvalent alcohols such as trimethylol ethane, trimethylol propane, pentaerythritol or dipentaerythritol.

The total amount of polymerizable compounds generally ranges from about 10 to 90 % by weight, preferably from about 20 to 80 % by weight, relative to the total weight of the non volatile components of the photopolymerizable composition of the present invention.

The following specific example is a preferred polymerizable compound:

- 53 -

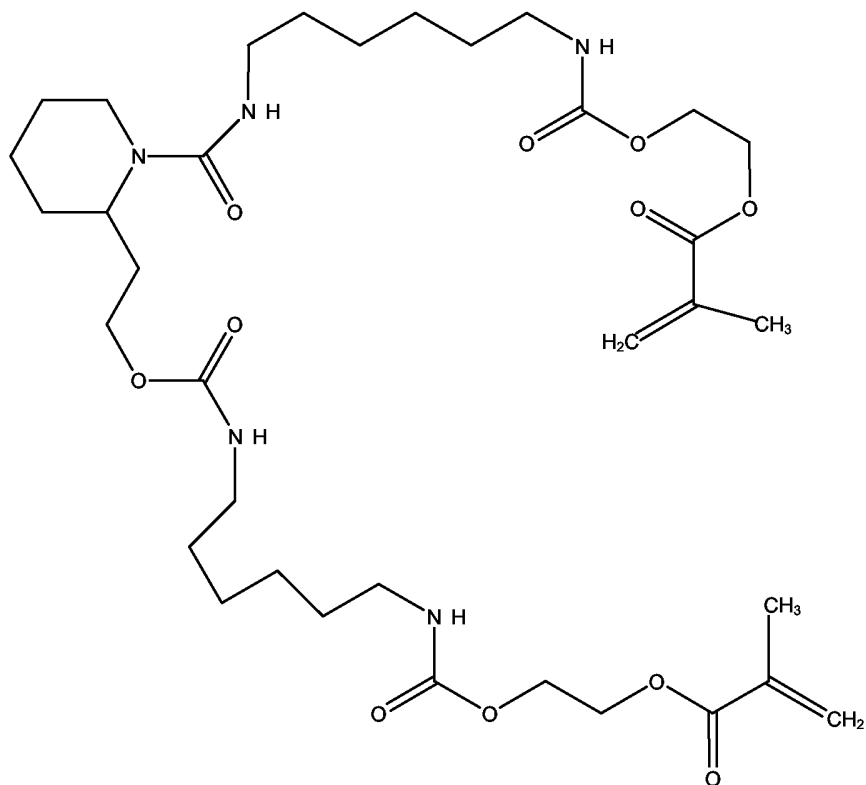

It can be useful to combine the polythiol compounds of the present invention with known sulfur containing compounds such as those described in EP 107 792, in particular with thiols like e. g. 2-mercaptobenzothiazole, 2-mercaptobenzoxazole or 2-mercaptobenzimidazole. The amount of such additional sulfur containing compounds generally ranges from 0.01 to 10 % by weight, preferably from 0.1 to 2 % by weight, relative to the total weight of the non volatile components of the photopolymerizable composition.

Optionally pigments, e.g. predispersed phthalocyanine pigments, can be added to the composition of the present invention for dyeing the composition and the layers produced therewith. Their amount generally ranges from about 1 to 20 % by weight, preferably from 2 to 15 % by weight and particularly preferred from about 2 to 10 % by weight related to the total weight of the non volatile components of the composition. Particularly suitable predispersed phthalocyanine pigments are disclosed in DE 199 15 717 and DE 199 33 139. Preference is given to metal-free phthalocyanine pigments.

- 54 -

In order to adjust the photopolymerizable composition according to the present invention to specific needs, thermal inhibitors or stabilizers for preventing thermal polymerization may be added. Furthermore additional hydrogen donors, dyes, colored or colorless pigments, color formers, indicators and plasticisers may be present. These additives are conveniently selected so that they absorb as little as possible in the actinic range of the imagewise applied radiation.

In a preferred embodiment of the present invention, the composition is photopolymerizable upon absorption of light in the wavelength range from 300 to 600 nm, preferably 350 to 430 nm, in particular from 380 to 430 nm and particularly preferred from 390 to 420 nm.

The present invention also relates to a photopolymer printing plate precursor comprising the photopolymerizable composition of the present invention on a support, in particular a photopolymer printing plate precursor comprising in this order the photopolymerizable composition of the present invention and a protective coating on a support.

In a preferred embodiment of the present invention, the protective layer has a dry coating weight of less than 2.0 g/m².

The photopolymerizable composition according to the present invention is applied to the support by processes which are known per se to the person skilled in the art. In general, the components of the photopolymerizable composition are dissolved or dispersed in an organic solvent or solvent mixture, the solution or dispersion is applied to the intended support by pouring on, spraying on, immersion, roll application or in a similar and the solvents are removed during the subsequent drying.

The known supports can be used for the photopolymer printing plate of the present invention, like e. g. foils, tapes or plates made of metal or plastics and in the case of screen-printing also of Perlon gauze. Preferred metals are aluminium, aluminium alloys, steel and zinc, aluminium and aluminium alloys being particularly

- 55 -

preferred. Preferred plastics are polyester and cellulose acetates, polyethyleneterephthalate (PET) being particularly preferred.

In most cases it is preferred, to treat the surface of the support mechanically and/or chemically and/or electrochemically to optimally adjust the adherence between the support and the photosensitive coating and/or to reduce the reflection of the imagewise exposed radiation on the surface of the support (antihalation).

The most preferred support to be used for the present invention is made of aluminium or an aluminium alloy, its surface is electrochemically roughened, thereafter anodized and optionally treated with a hydrophilizing agent like e. g. poly(vinylphosphonic acid).

The protective overcoat according to the present invention preferably comprises at least one type of poly(vinyl alcohol), in particular a poly(vinyl alcohol) wherein the mean degree of saponification is less than 93 mol-%.

The degree of saponification is related to the production of poly(vinyl alcohols). As the monomer of poly(vinyl alcohol), vinyl alcohol, is nonexistent, only indirect methods are available for the production of poly(vinyl alcohol). The most important manufacturing process for poly(vinyl alcohol) is the polymerization of vinyl esters or ethers, with subsequent saponification or transesterification. The preferred starting material for the poly(vinyl alcohol) of the present invention is a vinyl alcohol esterified by a mono carboxylic acid and in particular vinyl acetate, but derivatives of vinyl acetate, vinyl esters of di carboxylic acids, vinyl ethers and the like can also be used. The degree of saponification as defined for the present invention is the molar degree of hydrolysis irrespective of the process used for the hydrolysis. Pure poly(vinyl alcohol) has e. g. a degree of saponification of 100 mol-%, but commercial products often have a degree of saponification of 98 mol-%. The poly(vinyl alcohols) as used for the present invention contain mainly 1,3-diol units, but

- 56 -

may also contain small amounts of 1,2-diol units. In the partially saponified poly(vinyl alcohols) the ester or the ether group can be distributed statistically or blockwise. Preferred partially saponified poly(vinyl alcohols) of the present invention have a viscosity of a 4 % aqueous solution at 20°C of 4 to 60 mPa•s, preferably of 4 to 20 mPa•s and in particular of 4 to 10 mPa•s.

Poly(vinyl alcohols) preferred for the present invention are commercially available e. g. under the tradename Mowiol. Those products are characterised by two appended numbers, meaning the viscosity and the degree of saponification. For example, Mowiol 8 - 88 or Mowiol 8/88 mean a poly(vinyl alcohol) having as 4 % aqueous solution at 20°C a viscosity of ca 8 mPa•s and a degree of saponification of 88 mol-%. Although the use of only one type of poly(vinyl alcohol) is sufficient to achieve an advantage, it is preferred to use a mixture of two or more compounds, because this allows a more accurate adjustment and a better optimization of further properties of the printing plate precursor. Preferably poly(vinyl alcohols) differing in viscosity as defined above and/or in saponification degree are combined. Particularly preferred are mixture of poly(vinyl alcohols) that differ in viscosity of their 4 % aqueous solutions at 20°C for at least 2 mPa•s or that differ in saponification degree for at least 5 mol-%. Most preferred are mixtures comprising at least 3 types of poly(vinyl alcohols), wherein at least two compounds differ in viscosity as defined above for at least 2 mPa•s and at least two compounds differ in saponification degree for at least 5 mol-%.

According to a preferred embodiment of the present invention the overall mean saponification degree of all poly(vinyl alcohols) used in the protective layer has to be less than 93 mol-%. In a particular preferred embodiment of the present invention said overall mean saponification degree ranges from 71 mol-% to less than 93 mol-% and in particular from 80 mol-% to 92,9 mol-%.

As long as said mean overall saponification limit of 93 mol-% is not reached, one of the poly(vinyl alcohols) used in a mixture

- 57 -

can have a mean saponification degree of more than 93 mol-% and even up to 100 mol-%.

The overall mean saponification degree of the poly(vinyl alcohols) used in the protective overcoat of a printing plate precursor can be determined experimentally via ^{13}C -NMR. To measure the ^{13}C -NMR spectra, approximately 200 mg of the protective overcoat are dissolved in 1.0 ml DMSO and from this solution a 75 MHz ^{13}C -NMR spectrum is taken, whose resonances can easily be interpreted and allow to calculate the degree of saponification. Such values are listed in the Examples, in Table 3, as experimental values. A good correlation is obtained between said experimental values and the values known from the product specification of the poly(vinyl alcohols). The latter values are hereinafter called theoretical values of the mean saponification degree and can easily be calculated, when mixture of poly(vinyl alcohols) are used.

Preferably poly(vinyl alcohol)s are used for the present invention in 50 to 99.9 weight percent (wt.%) relative to the total weight of the non-volatile compounds of the protective overcoat.

Apart from poly(vinyl alcohol)s other water soluble polymers can be added to the layer such as poly(vinyl pyrrolidone), poly(ethylene oxide), gelatin, gum arabic, oxygen binding polymers with aliphatic amine groups known from EP 352 630 B1, methyl vinylether/maleic anhydride copolymers, poly(carboxylic acids), copolymers of ethylene oxide and poly(vinyl alcohol), carbon hydrates, hydroxy ethyl cellulose, acidic cellulose, cellulose, poly(arylic acid) and mixtures of these polymers.

Preferably the poly(vinyl pyrrolidone) is only used in small quantities compared to the poly(vinyl alcohol). In a preferred embodiment of the present invention poly(vinyl pyrrolidone) is used from 0 to 10 parts by weight of the poly(vinyl alcohol) used, from 0 to 3 parts by weight being particularly preferred. Most preferred no poly(vinyl pyrrolidone) compounds are used.

- 58 -

In addition to the poly(vinyl alcohol) of the present invention and the optional watersoluble polymers disclosed above, the known ingredients of protective layers can be used.

Examples of known ingredients suitable for the protective layer of the present invention are surface wetting agents, coloring agents, complexants, polyethylenimines and biocides.

The protective layer has to be transparent for actinic light. Preferably it is homogeneous, substantially impermeable to oxygen, waterpermeable, and can be washed off preferably with the conventional developer solutions used to form a printing relief after imagewise exposure of the photosensitive layer. Said photosensitive layer is removed imagewise, whereas the protective layer is removable over the entire area of the element created. The wash-off of the protective layer can be done in a separate step, but can be done during the development step as well.

The dry coating weight of the protective overcoat can be measured by the following procedure. A plate is exposed for 4 hours to daylight. Next the plate is pre-heated between 104°C and 127°C (temperature measured via a thermostrip (THERMAX commercially available from TMC) at the back of the plate). The plate is cut to a size of 100 mm X 100 mm and weighted on an analytical balance with 0.01 mg accuracy (=Weight A). Next the protective overcoat is washed off with water (25°C) for 2 minutes. Then the plate is rinsed with demineralised water and dried in an oven at 100°C. After drying the plate is allowed to cool down to room temperature, and the weight is determined using the same analytical balance as described earlier (=Weight B). The dry coating weight in g/m² of the protective overcoat is calculated using the formula below :

Dry coating weight (g/m²) = 100 X (Weight A - Weight B)

The protective layer can be coated on the photosensitive layer with known techniques and the coating solution preferably contains water or a mixture of water and an organic solvent. To allow a

- 59 -

better wetting, the coating solution preferably contains, related to the solid content, up to 10 wt.%, and particular preferred up to 5 wt.% of a surface active agent. Suitable representatives of surface active agents comprise anionic, cationic and nonionic surface active agents like sodium alkylsulfates and -sulfonates having 12 to 18 carbon atoms, an example of which is sodium dodecylsulfate, N-cetyl- and C-cetyl betaine, alkylaminocarboxylate and -dicarboxylate, and polyethylene glycols with a mean molar weight up to 400.

In addition, further functions can be added to the protective layer. For example, it can be possible to improve the safelight suitability without decreasing the sensitivity of the layer by adding a coloring agent, e. g. a water-soluble dye, that has excellent transmission to the light having a wavelength of 300 to 450 nm and that absorbs the light having a wavelength of 500 nm or more. This principle can easily be varied for different wavelengths to adjust the effective spectral sensitivity distribution of the printing plate precursor as needed.

The present invention also relates to a method of making a lithographic printing plate comprising the steps of providing a photopolymer printing plate of the present invention, exposing said printing plate precursor with a laser, preferably with a laser having an emission wavelength in the range from 300 to 600 nm, in particular from 300 to 450 nm, heating the plate to a temperature, when measured at the back of the plate, of 90°C to 150°C, for a time between 10 seconds and 1 minute, washing off the protective coating and processing the printing plate precursor in an aqueous alkaline developer

In preferred embodiment of the process of the present invention the exposure is done with a laser having an emission wavelength in the range from 380 to 430 nm, in particular in the range from 390 to 420 nm, and the exposure is carried out at an energy density, measured on the surface of the plate, of 100 $\mu\text{J}/\text{cm}^2$ or less.

The processing of the printing plate precursor of the present invention is done in the usual manner. After image-wise exposure a

- 60 -

pre-heat step is performed to improve the crosslinking of the photosensitive layer. Usually the pre-heat step is then followed by the development step, wherein the complete overcoat layer and the unexposed part of the photosensitive layer are removed. The removal
5 (wash-off) of the overcoat layer and the development of the photosensitive layer can be done in two separate steps in this order, but can also be done in one step simultaneously. Preferably the overcoat layer is washed-off with water before the development step. The wash-off can be done with cold water, but it is preferred
10 to use hot water to accelerate the process. What remains on the support after the development step are the exposed and thereby photopolymerized parts of the photosensitive layer. The developer solution used for the development of the exposed printing plate precursors of the present invention preferably is an aqueous
15 alkaline solution having a pH of at least 11, a pH from 11.5 to 13.5 being particularly preferred. The developer solution can contain a small percentage, preferably less than 5 wt.%, of an organic, water-miscible solvent. To adjust the pH of the solution, an alkali hydroxide is preferably used.

20 Examples of preferred, additional ingredients of the developer solution comprise alone or in combination alkali phosphates, alkali carbonates, alkali bicarbonates, an organic amine compound, alkali silicates, buffering agents, complexants, defoamers, surface active agents and dyes, but the suitable ingredients are not limited to the
25 preferred examples and further ingredients can be used.

The method of development employed is not particularly limited, and may be conducted by soaking and shaking the plate in a developer, physically removing non-image portions while being dissolved in a developer by means of e. g. a brush, or spraying a
30 developer onto the plate so as to remove non-image portions. The time for development is selected depending upon the above method used so that the non-image portions can adequately be removed, and is optionally selected within a range of 5 seconds to 10 minutes.

- 61 -

After the development, the plate may be subjected to a hydrophilic treatment by means of, e. g., gum arabic optionally applied to the printing plate as the case requires (gumming step).

- 62 -

Examples

A. Preparation (coating) of the photosensitive layer

A composition was prepared (pw = parts per weight; wt.% =
5 weight percentage) by mixing the components as specified in table 1.
A composition such as this was divided equally into portions of
26.21 g, and to each portion was added an amount of co-initiator
according to table 2. The resulting composition was coated on an
electrochemically roughened and anodically oxidized aluminum sheet,
10 the surface of which has been rendered hydrophilic by treatment with
an aqueous solution of polyvinyl phosphonic acid (oxide weight 3
g/m²) and was dried for 1 minute at 120°C (circulation oven). The
resulting thickness of the layer was 1.5 g/m².
For each composition (experiment), two coatings were made.

15

Table 1

Component	Parts per weight (g)
a solution containing 32.4 wt.% of a methacrylate/methacrylic acid copolymer (ratio methylmethacrylate: methacrylic acid of 4:1 by weight; acid number: 110 mg KOH/g) in 2-butanone (viscosity 105 mm ² /s at 25°C).	16.075
a solution containing 88.2 wt.% of a reaction product from 1 mole of 2,2,4-trimethyl-hexamethylenediisocyanate and 2 moles of hydroxyethylmethacrylate (viscosity 3.30 mm ² /s at 25°C)	14.538
Heliogene blue D 7490® dispersion (9.9 wt.%, viscosity 7.0 mm ² /s at 25 °C), trade name of BASF AG	17.900
2,2'-bis(2-chlorophenyl)-4,4',5,5'-tetraphenyl-1,2-bisimidazole	1.448
1,4-di[3,5-dimethoxy-4-(1-methylpropoxy)styryl]benzene	0.958
Edaplan LA 411® (1 % in Dowanol PM®, trade mark of Dow Chemical Company)	2.250
2-butanone	78.538
propyleneglycol-monomethylether (Dowanol PM®, trade mark of Dow Chemical Company)	130.358

Table 2

Example	Experiment	Co-initiator	Amount Co-initiator (g)	Amount Co-initiator (mmol)
1	A	TH-1	0.0010	0.00598
1	B	TH-1	0.0020	0.0120
1	C	TH-1	0.0040	0.0239
1	D	TH-1	0.0068	0.0407
1	E	TH-1	0.0100	0.0598
1	F	TH-1	0.0150	0.0897
1	G	TH-1	0.0300	0.179
1	H	TH-1	0.0500	0.299
1	I	TH-1	0.1000	0.598
2	J	TH-1	0.0068	0.0407
2	K	III-1	0.0796	0.284
2	L	TH-3	0.0796	0.452
2	M	TH-2	0.0061	0.0403
2	N	TH-2	0.0068	0.0450
2	O	III-2	0.0796	0.163
2	P	III-2	0.1592	0.326

On top of the photosensitive layer a solution in water with the composition as defined in table 3 was coated and was dried at 110°C
 5 for 2 minutes.

TH-1 means mercaptobenzthiazole (MBT) and

TH-2 means mercaptobenzoxazole (MBO).

TH-3 means Neopentylalcohol mono(3-mercaptopropionate)

Table 3

Component	Parts by Weight (g)
partially hydrolyzed polyvinylalcohol (degree of hydrolysis 88 %, viscosity 4 mPa•s in a solution of 4 wt.% at 20 °C) .	17.03
partially hydrolyzed polyvinylalcohol (degree of hydrolysis 88 %, viscosity 8 mPa•s in a solution of 4 wt.% at 20 °C) .	7.43
fully hydrolyzed polyvinylalcohol (degree of hydrolysis 98 %, viscosity 6 mPa•s in a solution of 4 wt.% at 20 °C) .	14.87
CA 24 E	0.26
Metolat FC 355	0.38
Lutensol A8 (90%)	0.032
Water	960

The so formed protective overcoat had a dry thickness of 2.0 g/m².

5 The imaging was carried out with an experimental violet platesetter device (flat bed system) equipped with a violet laser diode emitting between 392 and 417 nm. The following imaging conditions were used :

Scanning speed : 1000 m/sec
10 Variable image plane power : 0 to 10.5 mW
Spot diameter : 20 µm
Addressability : 1270 dpi
Fixed laser energy setting of 86 µJ/cm²

15 After imaging the plate was processed in a Agfa VSP85 processor at a speed of 1.2 m/min. During the processing the plate was first heated (pre-heat step), next the protective overcoat was washed off

- 66 -

and the photolayer was processed in a water based alkaline developer (Agfa PD91) at 28 °C. After a water rinsing and gumming step the printing plate was ready. A 13-step exposure wedge with density increments of 0.15 was used to determine sensitivity of the plate.

5 The results of the exposure tests are shown in table 4 as the sum of the density of the UGRA step wedges measured by a Gretag Macbeth D19C densitometer (cyan setting). One fully hardened step = 1.00. Higher values indicate higher sensitivity of the plate.

10 In the table is given for every experiment (composition) the mean value measured for two plates that were separately coated, and therefore a highly reliable value. By this experimental procedure were eliminated variations in results due to slight differences in temperature during exposure, laser power, brush pressure in
15 developing bath and human error in making of stock solutions and coatings. In experiment 2 the value for composition J is the mean value from 6 plates, to have a very reliable reference point.

Table 4

Example	Experiment	Co-initiator	UGRA Sum mean value	
1	A	TH-1	0.06	comparison
1	B	TH-1	1.93	comparison
1	C	TH-1	3.05	comparison
1	D	TH-1	3.92	comparison
1	E	TH-1	4.00	comparison
1	F	TH-1	4.12	comparison
1	G	TH-1	4.06	comparison
1	H	TH-1	3.86	comparison
1	I	TH-1	3.31	comparison
2	J	TH-1	3.86	comparison
2	K	III-1	4.48	invention
2	L	TH-3	no image	comparison
2	M	TH-2	3.33	comparison
2	N	TH-2	3.89	comparison
2	O	III-2	4.60	invention
2	P	III-2	4.23	invention

The absolute sensitivity for all examples of the present invention was higher than 100 $\mu\text{J}/\text{cm}^2$ (lower numerical values) To illustrate, an UGRA sum of 3.86 for experiment J corresponds to a sensitivity of 68 $\mu\text{J}/\text{cm}^2$. It can be clearly seen that the multi-functional thiol co-initiators give rise to plates with a higher sensitivity than standard mono-functional co-initiators such as mercaptobenzthiazole (TH-1) or mercaptobenzoxazole (TH-2).



Comparison of III-1 with TH-3 also surprisingly shows that an SH functionality of more than 1 is essential for this type of compounds. Experiments A to I show that varying the concentration of (TH-1) in the photolayer over a wide range does not lead to sensitivity as high as plates containing the multi-functional thiols of the present invention. For each multi-functional thiol of the

- 68 -

present invention, an optimum concentration in the photolayer can be found by common optimisation experiments.

[CLAIMS]

1. A composition that is photopolymerizable upon absorption of light, the composition comprising a binder, a polymerizable compound, a sensitizer, a photoinitiator and a polythiol compound, characterized in that the composition comprises with respect to its total solid weight at least 0.01 wt.-% of the polythiol compound and that the polythiol compound is selected from one of the following formulae (IIIa) or (IIIb):



wherein

R^8 mutually independent means H or a non-metal atom substituent,

A^1, A^2 mutually independent mean a linear or branched alkyl chain with at most 16 carbon atoms,

L^3, L^4 mutually independent mean linking groups or single bonds,

s means an integer from 1 to 100 and

r means 1, 2, 3 or 4,

wherein the product of s times r is at least 2,

and wherein the thiol groups of formulae (IIIa) or (IIIb) may also be present in their tautomeric thione form,

and wherein the composition when coated on a support has a sensitivity of 150 $\mu\text{J}/\text{cm}^2$ or higher and

wherein for polythioles of formula (IIIa) R^8 means hydrogen, methyl or ethyl and r means 1, 2 or 3.

2. The composition according to claim 1, wherein

- 70 -

L³, L⁴ mutually independent mean alkylene, alkyleneoxy or polyglycerol; or alkylene chain containing acyloxy, ether, carbonate, thioether, hydroxy, phenyl, heterocyclic, amino, thiol, sulphonyl, amido, urethane or urea functions.

5

3. The composition according to any of the preceding claims, wherein R⁸ means hydrogen, methyl or ethyl, s means 1, L³, L⁴ mean alkylene and r means 2.

10

4. The composition according to any of the preceding claims, wherein said photoinitiator is a hexaaryl-bisimidazole compound.

5. The composition according to any of the preceding claims further comprising a further sulfur containing compound as a chain transfer agent.

15

6. A photopolymer printing plate precursor, wherein said precursor comprises a composition according to any of the preceding claims on a support.

7. A photopolymer printing plate precursor according to claims 6, wherein the minimum exposure for image formation, measured on the surface of the plate, is 100 µJ/cm² or less.

20

8. A method of making a lithographic printing plate comprising the steps of providing a photopolymer printing plate precursor as defined in any of the claims 6 or 7, exposing said printing plate precursor with a laser having an emission wavelength in the range from 300 to 600nm nm, heating the plate to a temperature, when measured at the back of the plate, of 90°C to 150°C, for a time between 10 seconds and 1 minute, washing off the protective

25

- 71 -

coating and processing the printing plate precursor in an aqueous alkaline developer.

9. A method according to claim 8, wherein said printing plate precursor is exposed with a laser having an emission wavelength
5 in the range from 380 to 600 nm.

10. A method according to any of the claims 8 or 9, wherein the exposure of the lithographic printing plate precursor is carried out at an energy density, measured on the surface of the plate, of 100 $\mu\text{J}/\text{cm}^2$ or less.
10

15

20

25

30

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2005/055745

A. CLASSIFICATION OF SUBJECT MATTER
G03F7/027 G03F7/031

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/072614 A (SHOWA DENKO K.K.) 4 September 2003 (2003-09-04) cited in the application page 46 - page 48; example 7; table 1 page 51, line 11	1,2,4-7
A	----- EP 0 213 701 A (W.R. GRACE & CO.) 11 March 1987 (1987-03-11) page 6; example 10 page 7; example 14	1-10
A	----- EP 0 924 569 A (BROTHER KOGYO KABUSHIKI KAISHA) 23 June 1999 (1999-06-23) page 6; example 1 page 7; example 1; table 1 ----- -/--	1-10

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

7 March 2006

Date of mailing of the international search report

15/03/2006

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dupart, J.-M.

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2005/055745

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 436 806 A (F.J. RENDULIC ET AL.) 13 March 1984 (1984-03-13) column 16; example 2 -----	1-10
A	EP 1 349 006 A (AGFA-GEVAERT N.V.) 1 October 2003 (2003-10-01) cited in the application claims -----	1-10
A	US 4 234 676 A (P.R. HEIN ET AL.) 18 November 1980 (1980-11-18) column 15 - column 16; example 1 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2005/055745

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03072614	A	04-09-2003	AU 2003224454 A1	09-09-2003
EP 0213701	A	11-03-1987	AU 5938286 A	22-01-1987
			BR 8603192 A	24-02-1987
			JP 62030753 A	09-02-1987
			NZ 216312 A	29-04-1988
EP 0924569	A	23-06-1999	JP 11184084 A	09-07-1999
			US 6242149 B1	05-06-2001
US 4436806	A	13-03-1984	NONE	
EP 1349006	A	01-10-2003	JP 2003295426 A	15-10-2003
US 4234676	A	18-11-1980	NONE	