




(86) Date de dépôt PCT/PCT Filing Date: 1994/06/22
(87) Date publication PCT/PCT Publication Date: 1995/01/05
(45) Date de délivrance/Issue Date: 2005/03/15
(85) Entrée phase nationale/National Entry: 1995/11/28
(86) N° demande PCT/PCT Application No.: US 1994/007022
(87) N° publication PCT/PCT Publication No.: 1995/000225
(30) Priorité/Priority: 1993/06/24 (08/083,076) US

(51) Cl.Int.⁶/Int.Cl.⁶ B01D 27/06, B01D 27/08
(72) Inventeur/Inventor:
SPEARMAN, MICHAEL R., US
(73) Propriétaire/Owner:
POROUS MEDIA CORPORATION, US
(74) Agent: BERESKIN & PARR

(54) Titre : FILTRE EN FORME DE BOITE
(54) Title: BOX FILTER

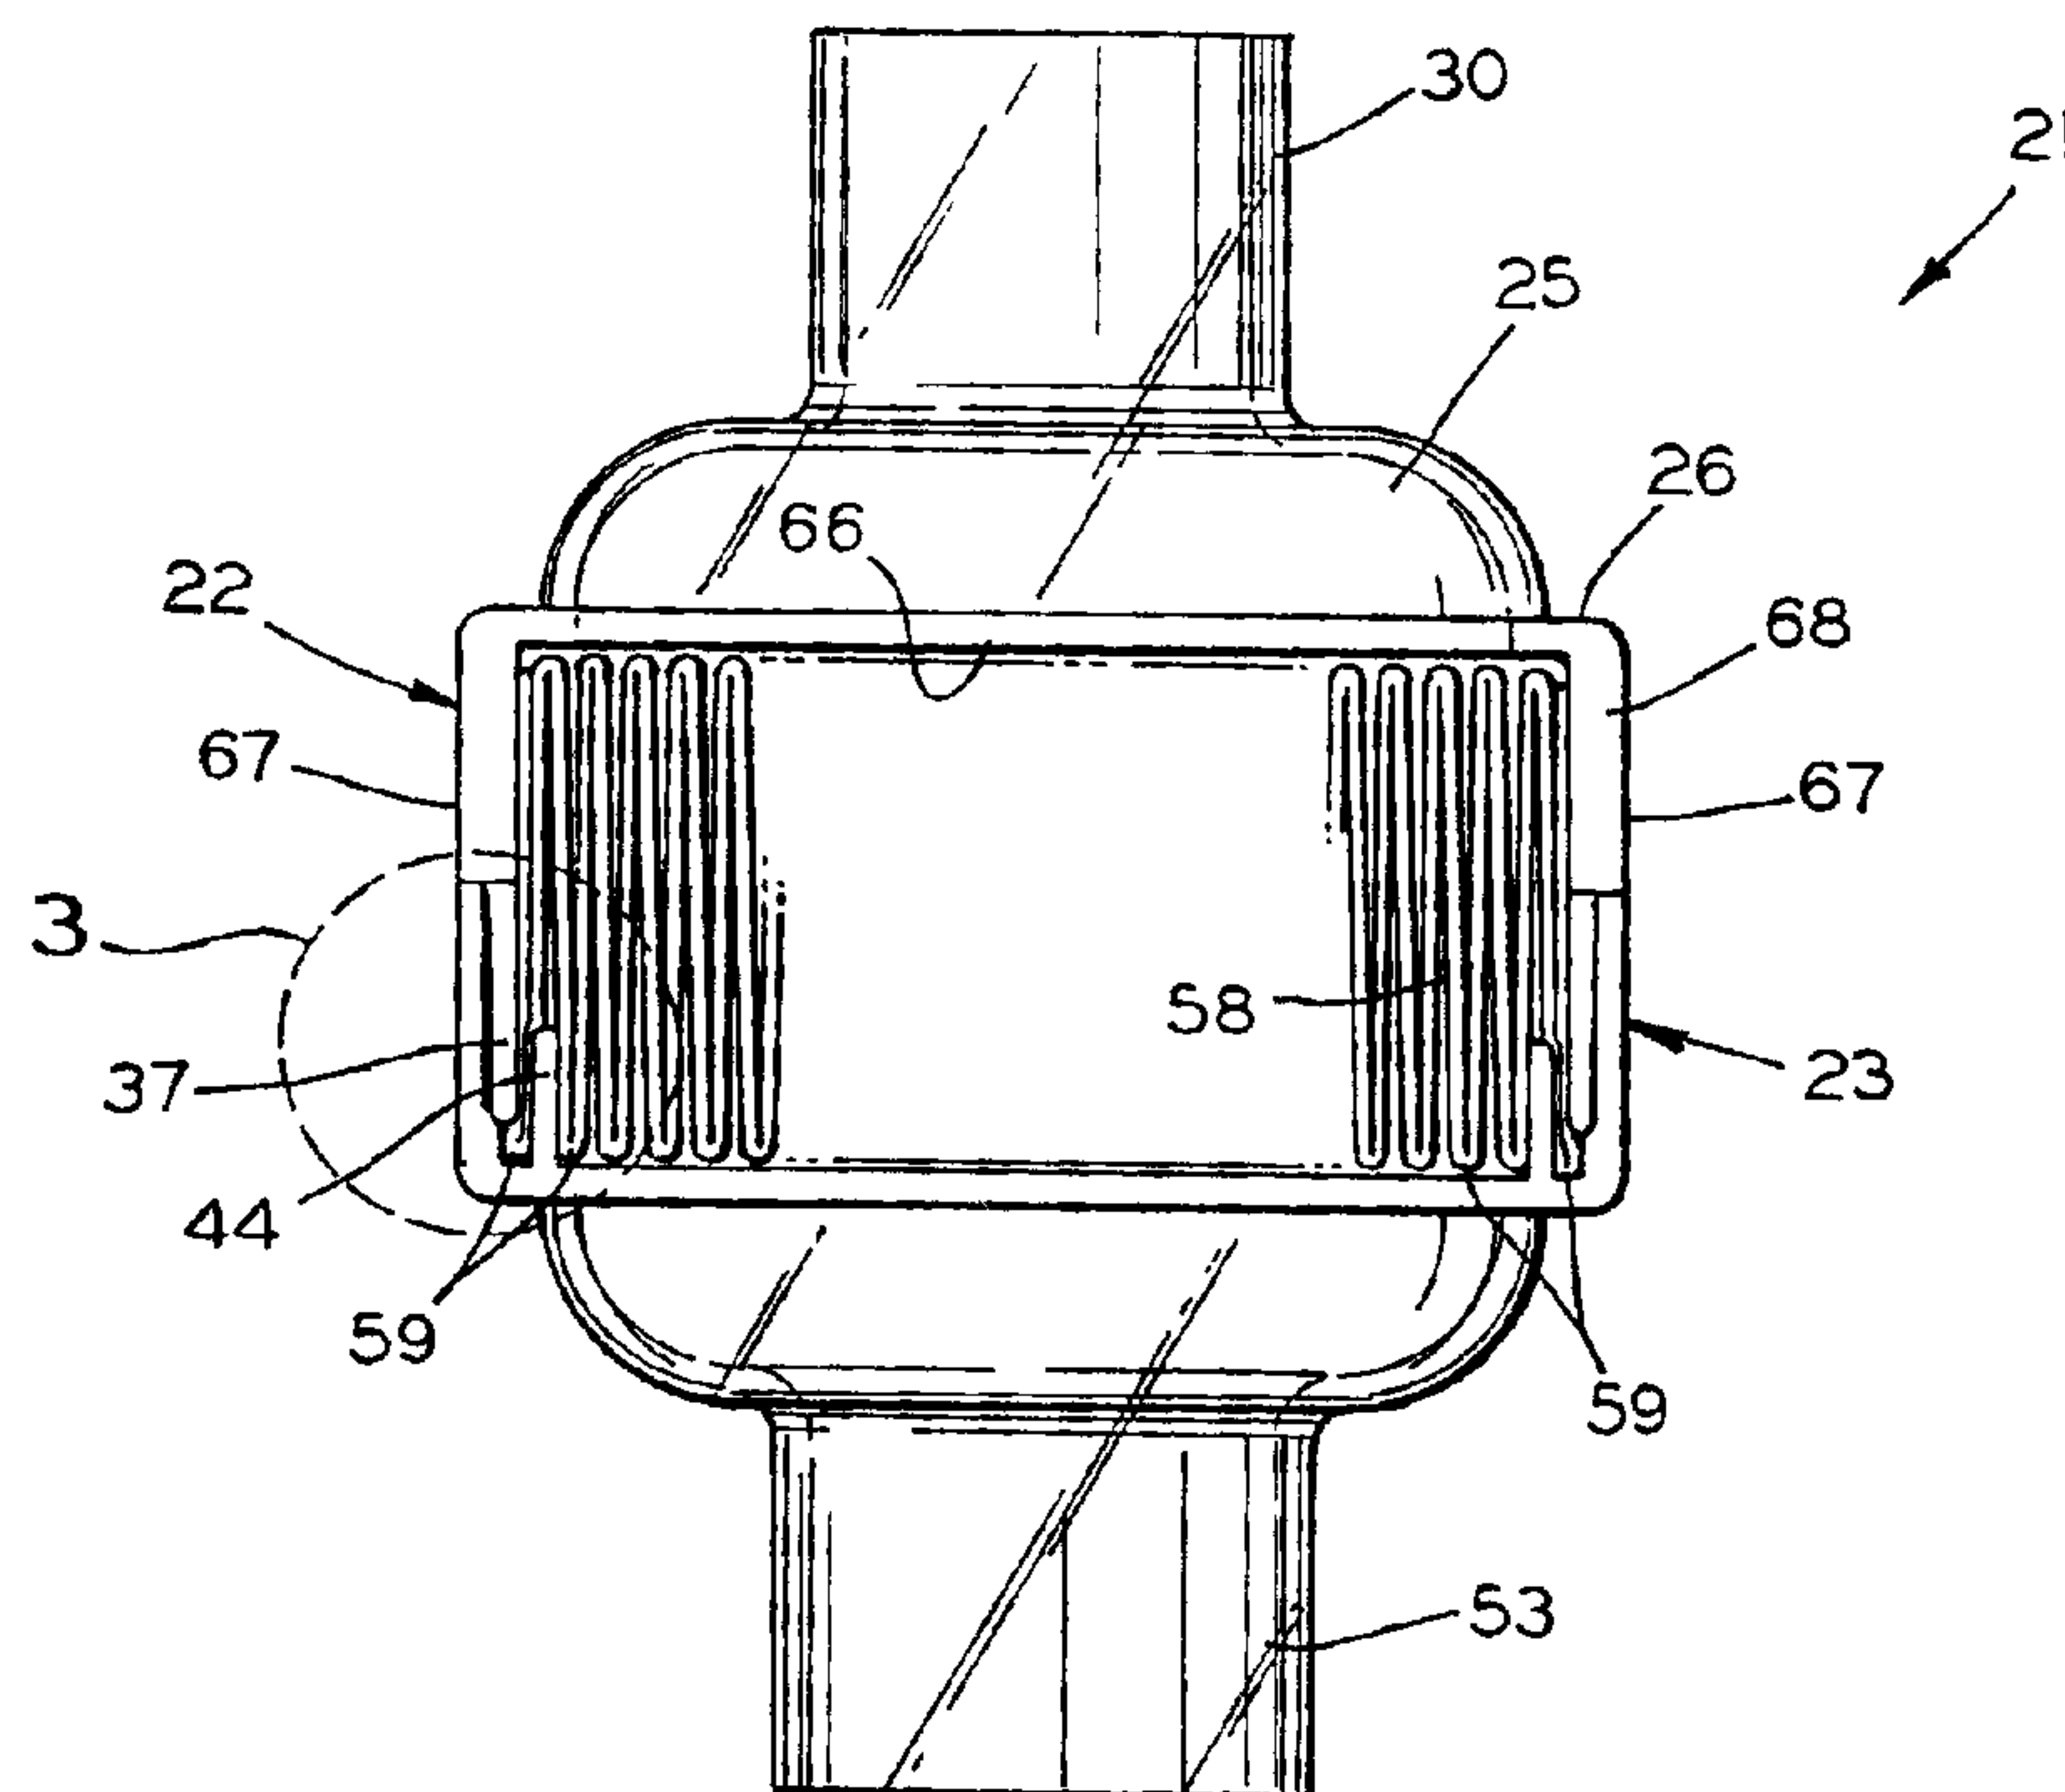

(57) **Abrégé/Abstract:**

A disposable box filter having a housing (21) comprising mating channel-shaped male (22) and female portions (23) defining a generally box-shaped fluid chamber, with a pair of fluid ports (30 and 53), and a filter element in corrugated shoe form (58) extending across the fluid chamber. The corrugated filter has generally vertically extending pleats (59) or extremities which are mechanically sealed at each end between a pair of vertical axially extending portions of the filter housing.




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B01D 27/06	A1	(11) International Publication Number: WO 95/00225 (43) International Publication Date: 5 January 1995 (05.01.95)
(21) International Application Number: PCT/US94/07022 (22) International Filing Date: 22 June 1994 (22.06.94) (30) Priority Data: 08/083,076 24 June 1993 (24.06.93) US (71) Applicant: POROUS MEDIA CORPORATION [US/US]; 1350 Hammond Road, St. Paul, MN 55110 (US). (72) Inventor: SPEARMAN, Michael, R.; 4311 Pondview Drive, St. Paul, MN 55110 (US). (74) Agent: DOLGORUKOV, D., Edward; Marshall & Melhorn, 8th floor, Four SeaGate, Toledo, OH 43604 (US).		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). 2163978 Published <i>With international search report.</i> <i>With amended claims.</i>

(54) Title: BOX FILTER**(57) Abstract**

A disposable box filter having a housing (21) comprising mating channel-shaped male (22) and female portions (23) defining a generally box-shaped fluid chamber, with a pair of fluid ports (30 and 53), and a filter element in corrugated sheet form (58) extending across the fluid chamber. The corrugated filter has generally vertically extending pleats (59) or extremities which are mechanically sealed at each end between a pair of vertical axially extending portions of the filter housing.

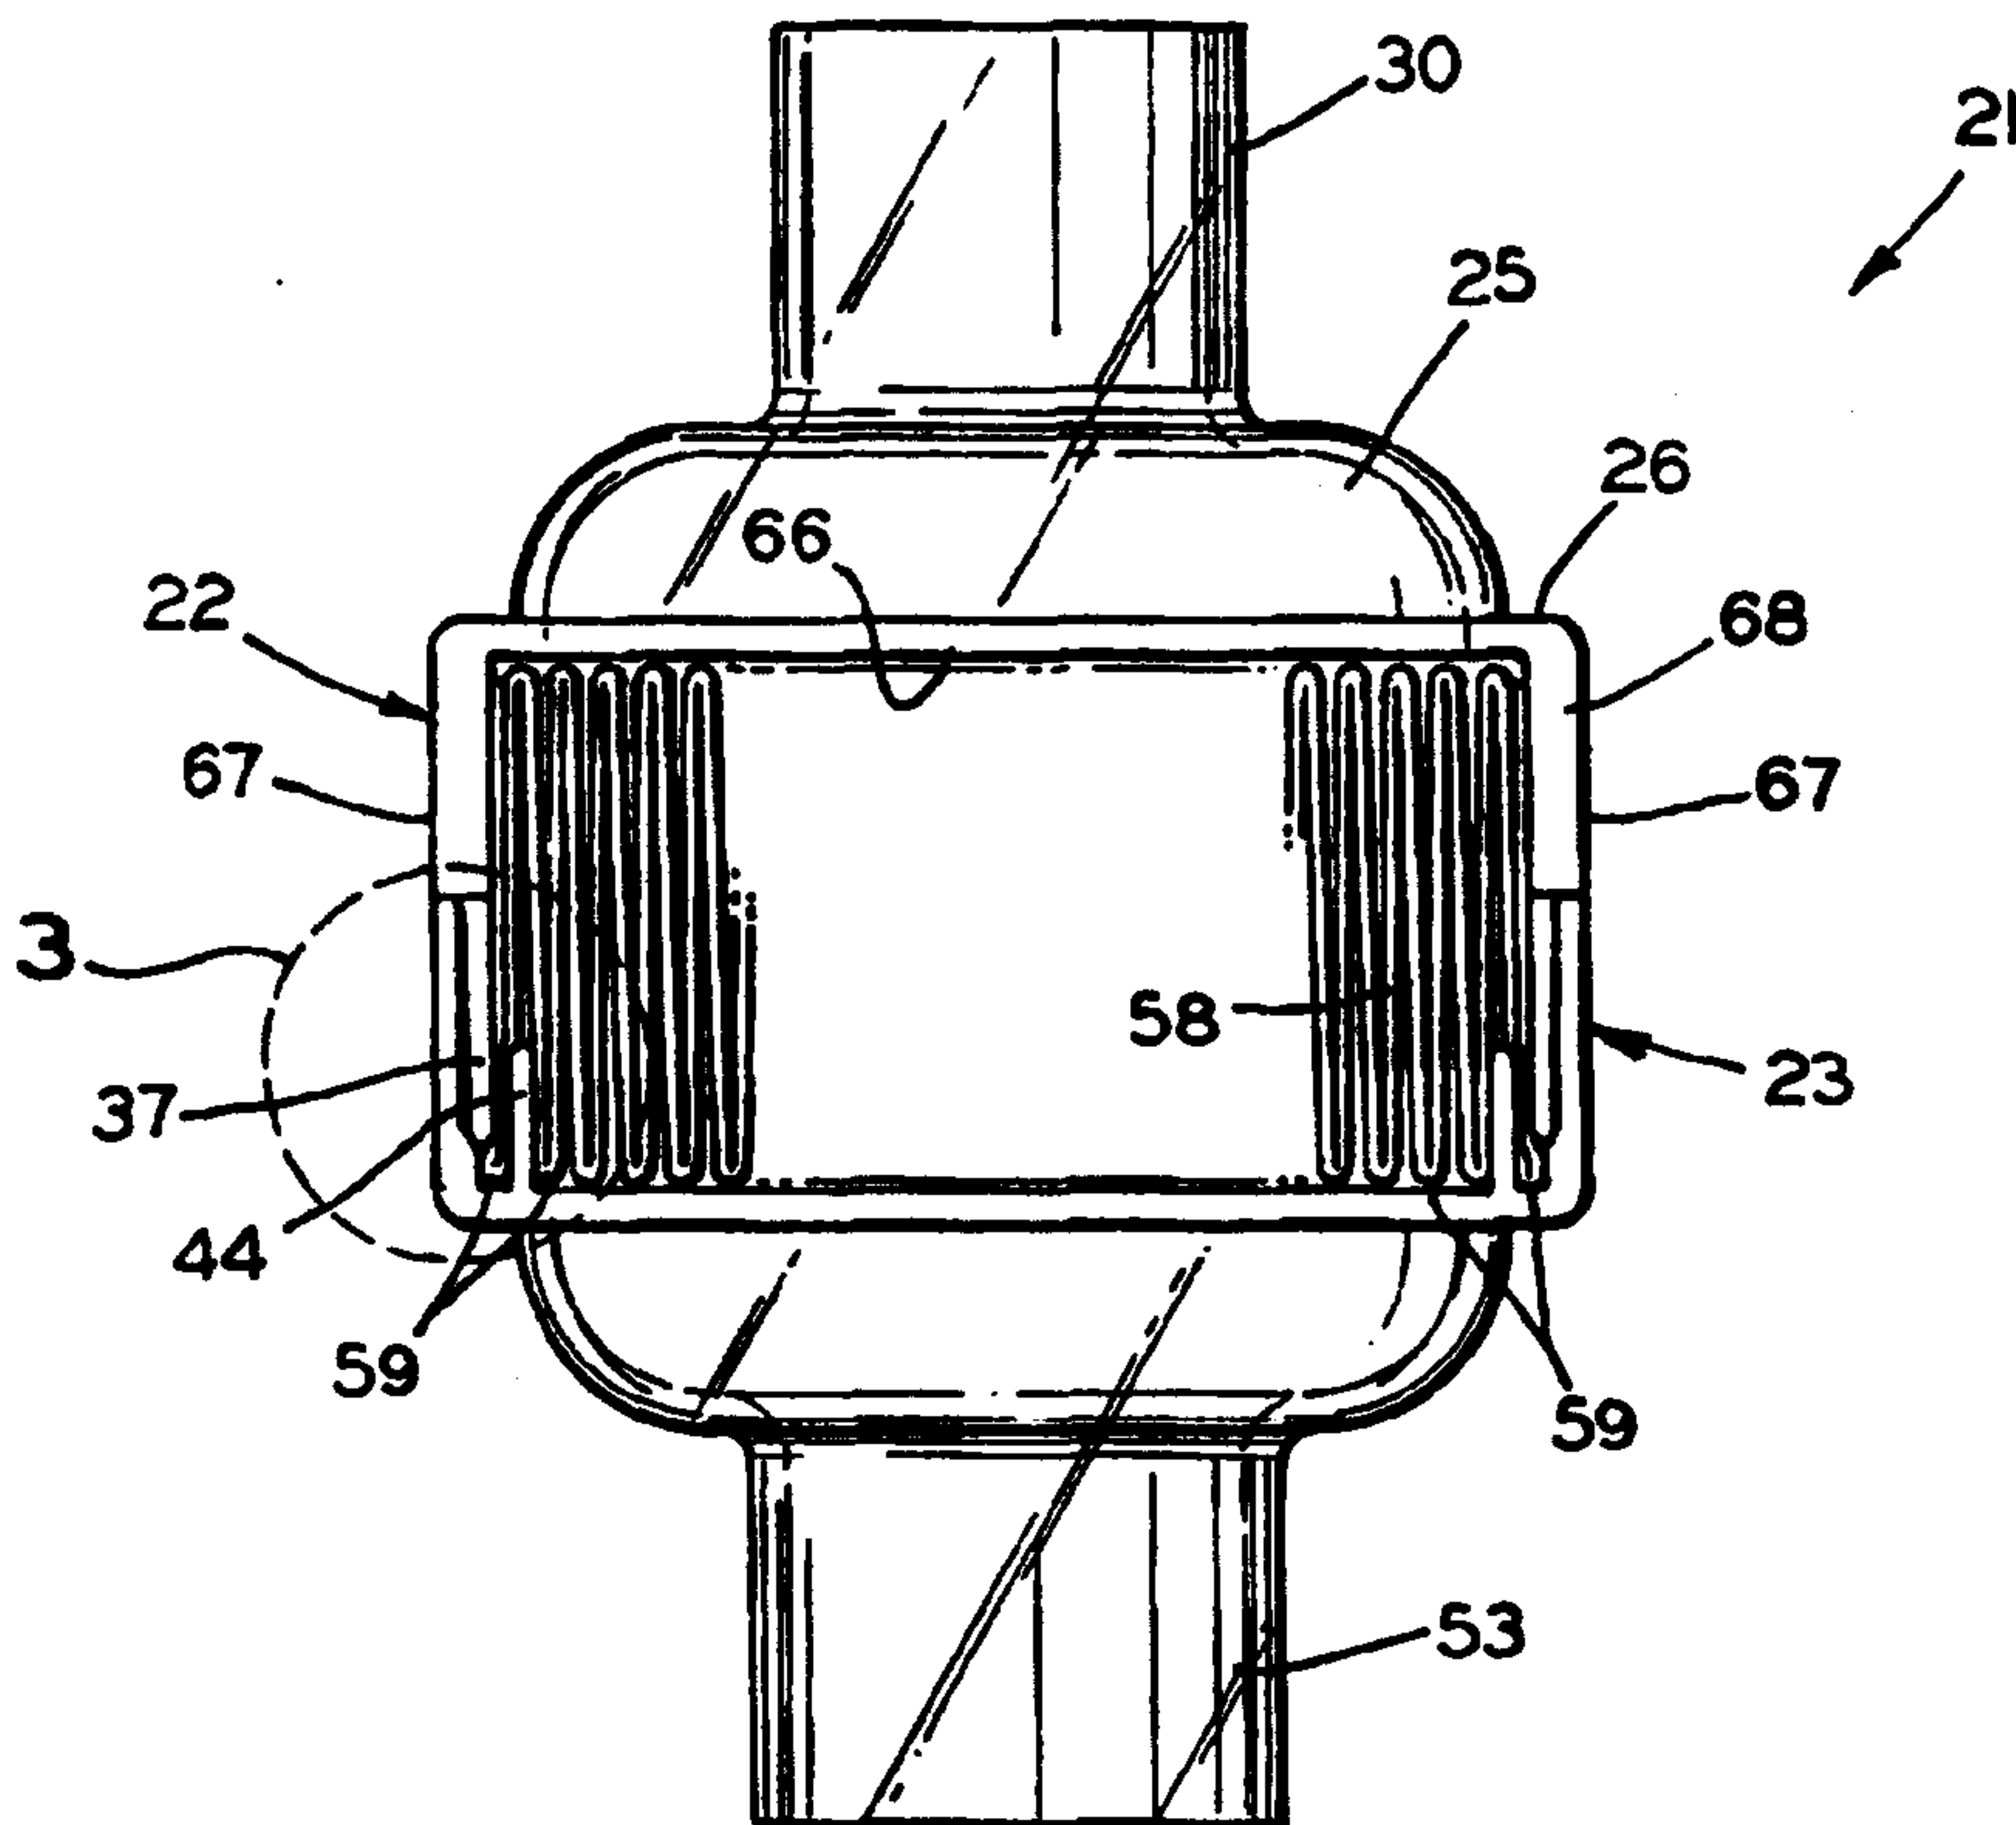

1

TITLE

BOX FILTER

BACKGROUND OF THE INVENTION

5

Field of the Invention

The present invention relates to filters and filter housings. More particularly, the present invention relates to a disposable box filter useable in medical and other applications which is of low cost and capable of being made absolutely sterile before use.

DESCRIPTION OF THE PRIOR ART

Box filters, because of their unique configuration, low cost, and ease of manufacture, have been found very useful in medical applications, as well as in other applications. It is quite important in medical applications that a filter be capable of being made absolutely sterile before use. To avoid the necessity of cleaning and sterilizing operations after use, it is also desirable that the filter be disposable. For a filter to be disposable, it must necessarily be of low cost. Many attempts at making a true, low cost, disposable box filter have been found in the prior art. None of them have been entirely successful.

25

One such prior art patent is the U.S. Letters Patent 3,765,537. While this filter is satisfactory in use, it has significant limitations which arise during the manufacturing process. The filter sheet is held tightly between an internal wall and a top wall of the filter housing and is bonded in place. This requires an open pore filter sheet. This limits the type of filter element that can be used in the housing, and also increases the manufacturing cost.

30

Another such attempt in the prior art is shown in U.S. Letters Patent 3,815,754. In an attempt to eliminate the limitations imposed by having to bond through open pores of the filter sheets, this patent attempts simply to
5 pinch the sheet between an inner wall of the housing and the ends of a pair of vertical walls. While this design eliminated the limitation on the type of filter element that could be used to obtain a sufficient seal, the resultant filter was found not suitable for use at
10 relatively high pressure differentials.

In an attempt to solve the problems of the prior art still present after the inventions disclosed in U.S. Letters Patents 3,765,537 and 3,815,754, the filter shown
15 in U.S. Letters Patent 4,187,182 was developed. In this patent, the filter sheet is pinched between the edge of the inner side walls and other portions of the housing. However, this filter increases manufacturing expense by requiring the pleats of the corrugated filter element to be trimmed specially at positions midway of the height of
20 the filter element, thus increasing greatly the manufacturing costs.

Thus, those skilled in the box filter art continued to search for a solution to the problem of providing a truly low cost disposable box filter.

25

SUMMARY OF THE INVENTION

To solve the problems present in the prior art, a disposable box filter is provided having a housing comprising mating, channel shaped, male and female
30 portions defining a generally box shaped fluid chamber, with a pair of fluid ports, and a filter element in corrugated sheet form extending across the fluid chamber.

The corrugated filter has generally vertically extending pleats or extremities which are mechanically sealed at each end.

In the preferred embodiment of the invention, the housing of the filter assembly comprises mating male and female portions which form a box-shaped fluid chamber defined by an upper wall having a port or inlet therein, a lower wall having a port or outlet therein, and a pair of opposed side walls connecting the upper wall and the lower wall, and forming a pair of opposed open end walls. A pleat or pleats at each end of the corrugated filter element are mechanically sealed between generally vertical wall portions of the filter housing, one of which has been deformed and pressed in the direction of the filter paper by riding a ramp portion of the filter housing while the filter is being ultrasonically welded.

In the preferred embodiment illustrated, the disposable filter assembly is a rectangular box and substantially square sided. However, any type of box-like shape can be used. It is important to note that in the present invention, in contrast to prior art box filters, the pleat or pleats of the corrugated filter are sealed in a vertical orientation, and do not need to be bent or trimmed in a horizontal orientation, as in the prior art.

Thus, one of the objects of the present invention is to provide a disposable box filter capable of being made absolutely sterile before use.

A further object of the present invention is to provide a box filter which can be mass-produced at low cost.

A still further object of the present invention is to provide a box filter having a corrugated filter element

which is sealed in the box filter housing with the pleat or pleats of the corrugated filter remaining in a generally vertical orientation.

5 A still further object of the present invention is to provide for a disposable box filter usable at high pressure differentials.

Further objects and advantages of this invention will be apparent from the following description and appended claims, reference being made to the accompanying drawings
10 forming a part of the specification, wherein like reference characters designate corresponding parts in the several views.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Figure 1 is an exploded perspective view of a construction embodying the present invention.

Figure 2 is an end view of the construction shown in Figure 1 after assembly, but before the end caps are potted in place.

20 Figure 3 is an enlarged view of the indicated portion of the construction of Figure 2.

Figure 3A is a view similar to Figure 3, but showing the mating housing portions after ultrasonic welding.

25 Figure 4 is an exploded elevational view of the male and female housing portions of the construction shown in Figure 3.

Figure 5 is a fragmentary view, similar in part to Figure 2, but showing a modification of the present invention where only a single thickness of the corrugated
30 filter is "pinched" between vertical wall portions of the filter housing.

It is to be understood that the present invention is not limited in its application to the details of construction and arrangement of parts illustrated in the accompanying drawings, since the invention is capable of other embodiments, and of being practiced or carried out in various ways within the scope of the claims. Also, it is to be understood that the phraseology and terminology employed herein is for the purpose of description, and not of limitation.

10

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The disposable filter assembly shown in Figures 1-5 is generally designated by the numeral 20. The filter assembly 20 includes a molded plastic housing, generally designated by the numeral 21 (Figs. 2 and 4), and including a male portion 22 and a female portion 23. The upper or male housing portion 22 includes an upper plenum wall 24. The upper plenum wall 24 includes a plenum 25, a rim 26, an upper port or inlet 30, and an upper rib 31.

20 Since the disposable box filter assembly 20 is reversible, it can easily be understood by those skilled in the art that the upper port 30 can serve as an inlet or outlet, and thus that these terms may be used interchangeably.

25 Also found on the male housing portion 22 are a plurality of reinforcing ribs 32, and a pair of opposed downwardly depending side walls 34 having a grooved portion 35, an ultrasonic energy ridge or portion 36, and a tapered or wedge-shaped portion or wall 37.

30 The lower or female portion 23 of the plastic housing 21 includes a tongue portion 40, a first wall portion or first portion 41, a ramp portion 42, and a second portion

or second wall portion 43, which is of greater thickness than the first portion 41. Also found on the lower or female portion 23 is a lower plenum wall 50 including a lower plenum 51, a lower rim 52, a lower port or inlet 53 and a lower ridge 54.

The plastic housing 21 may be made of any practical transparent, opaque, or solid material. For most applications of the disposable box filter assembly 20, it is believed that a transparent plastic housing 21 will be preferred. Depending on the particular application, the housing may be made from many materials. A preferred material is K-Resin (KROI Grade). The housing may also be made from ABS, styrene, polycarbonate, nylon, polyester, or other thermoplastic materials.

Referring to Figure 2, there is shown the plastic housing 21 having the male or upper housing portion 22 completely assembled and ultrasonically welded to the lower or female housing portion 23, and containing a corrugated filter 58. The plastic housing 21 assembled to this stage of manufacture shows the almost completed disposable filter assembly 20 before the end caps 60 are potted on. The corrugated filter 58 is has a predetermined number of pleats 59. The number of pleats required will depend on the particular application. Also, depending on the particular application, is the selection of the material for the corrugated filter 58. Widely used filter media are such as glass fiber and polypropylene, which can have a thickness in the range of .013" to .022". A typical thickness range is from .015" to .016".

The novel sealing means of the present invention is best shown in Figures 2-3A. As hereinbefore discussed, the prior art box filters required the sealing of the

filter media to be done in a generally horizontal plane trapped between what may generally be called a top wall and a side wall of the filter. In some cases, the paper was even bonded to the filter housing to get a proper seal. All of these types of housings or sealing arrangements cause various problems in the art.

The box filter of the present invention is the first box filter to eliminate these problems by sealing the filter media in a generally vertical orientation. It can be seen in Figure 2 that one pleat 59 of the corrugated filter 58 is trapped between the tapered portion 37 of the downwardly depending side wall 34 forming a portion of the male housing 22, and the upstanding ridge 44 forming a portion of the lower or female housing portion 23.

By designing the plastic housing 21 with the ultrasonic manufacturing process in mind, a unique and novel way of providing sufficient force on the pleat is provided such that a purely mechanical seal may be attained between the filter 58 and the housing 21 without any cutting or special bending or treatment of the filter media.

An enlargement of a portion of the male and female housings are shown in Figure 3 and 3A to illustrate this. As shown in Figure 3, when the male housing portion 22 is inserted into the female portion 23, the tongue 40 of the female housing 23 will enter the grooved portion 35 of the male housing 22 permitting the ultrasonic ridge 36 to come in contact with the first portion 41 of the upstanding wall 39. The dimensions are so selected that when the ultrasonic ridge 36 touches first wall portion 41, the lower extremity of the wedge-shaped or tapered portion 37

of the downwardly depending side wall 34 is in close proximity or touching the ramp portion 42.

As shown in Figure 3A, as the ultrasonic welding manufacturing process is applied to the male and female housing portions 22, 23, the ultrasonic energy ridge 36 is progressively melted until the tongue 40 reaches proximate the bottom of the groove 35, and the housing portions have moved closer together. A typical dimension for the ultrasonic energy ridge is .018", but other dimensions may be chosen, depending on the application. This amount of movement causes the wedge-shaped portion 37 of the downwardly depending wall 34 to attempt to move down the ramp portion 42 toward the U-shaped channel 75, separating second portion 43 and upstanding ridge 44.

A preferred embodiment is to have the ramp 42 form an angle of 60° with the horizontal. Other angles may be used if desired.

As tapered portion 37 moves down the ramp portion 42, it is forced in a lateral direction toward the upstanding ridge 44 of the female housing portion. Figure 3A shows this movement without the corrugated filter installed for ease of understanding. As illustrated in Figure 2, the filter pleats 59 are compressed to about one-half their thickness, which is sufficient to compress the media to obtain a fluid-tight seal. For a media in the typical .015" to .016" range, it is preferred to compress the media to one-half to one-third of that thickness. For other media, different amounts of compression may be needed.

The versatility of the box filter of the present invention is shown by referring to Figure 5. In contrast to the embodiment shown in Figure 2, wherein an entire

pleat 29 is compressed between the ridge 44 and the wedge-shaped or tapered wall portion 37, a single thickness of filter paper or media, indicated by the numeral 65, is compressed between the ridge 44 and the tapered wall 37.

5 Depending on the media and its compressibility, many types of media may be accommodated in a single filter housing just by reversing how the filter 58 is inserted. The modification of the invention as shown in Figure 5 is particularly applicable to filter medias which compress
10 very little. The ability to simply reverse the position of insertion of the filter 58 in the housing 21 permits many of these media to be used in the filter housing of the present invention without any modification.

15 The tapered portion 37 may have vertical side walls or tapered side walls and still be within the scope of the present invention. However, it has been found that a 5° taper, which is the preferred draft for the molding process, produces very satisfactory results.

20 Referring to Figures 2 and 4, it can be seen that when the male housing portion 22 and the female housing portion 23, which are generally channel shaped in nature, are assembled, there is formed a generally box-shaped or rectangular chamber 66. The shape of the filter chamber 66 is defined by the upper plenum wall 24, the lower
25 plenum wall 50, and a pair of opposed side walls 67, each of which is formed by a portion of the male housing 22 and the female housing 23. Also formed by assembly of the housing is a pair of open opposed end walls 68. To complete the assembly of the disposable filter assembly
30 20, end caps 60 are potted on to the opposed end walls 68 with potting compounds well known in the art. The particular compound used will depend upon the filter

application. Potting compound is applied to the end walls 68, as well as to the rectangular wall portions 70 of the end caps 60. When the end cap 60 is then applied, the end cap is sealed not only to the opposed end wall 68 to close the chamber 65, but to the ends of the filter 58 in a fluid-tight manner, thereby forcing air to flow directly from upper port 30 through the corrugated filter 58 and exit lower port 53. The upper ridge 31 and the lower ridge 54 add strength to the corrugated filter 58, and prevents its distortion.

It can be readily understood by one skilled in the art that as long as the vertical sealing means of the present invention is maintained, the actual shape of the housing can vary substantially.

Thus, by analyzing the problems present in the art wherein the filter media of the corrugated filter used in the box filter assemblies was being sealed in generally a horizontal direction, and deciding instead to seal it in a vertical direction, and designing a housing to seal the same, while at the same time, utilizing the attributes of the ultrasonic welding process, a novel method and apparatus of providing a box filter is provided.

WHAT IS CLAIMED IS:

- 5 1. A disposable filter assembly including:
- 10 a) a housing comprising mating channel-shaped male and female portions, the mating male and female portions forming a box-shaped fluid chamber defined by an upper plenum wall having an inlet therein, a lower plenum wall having an outlet therein, a pair of opposed side walls connecting the upper plenum wall and the lower plenum wall, and a pair of opposed, open, end walls, each of said pair of opposed side walls including a pair of generally vertical wall portions, the vertical wall portions of said male housing portion having been deformed and traveled laterally while said filter assembly has been ultrasonically welded together,
- 15 b) a corrugated filter element extending across said box-shaped fluid chamber, from one of the opposed side walls to the other, and across the line of fluid flow between the inlet and the outlet, a pleat at each end of said corrugated filter element mechanically held in a fluid-tight seal in a generally vertical position, proximate the entire bottom edges of said filter elements by lateral forces applied by said generally vertical wall portions of said opposed side walls, and
- 20 c) end caps closing said opposed end walls and sealing said filter element to said end caps.
- 25
- 30

2. A filter housing including:

a) a male housing portion including:

- i) an upper plenum wall,
- ii) a fluid port in said upper plenum wall, and
- iii) a pair of opposed downwardly depending side walls, each of said downwardly depending side walls depending from said upper plenum wall and including:
 - a) a grooved portion,
 - b) an ultrasonic energy portion,
 - c) a wedge-shaped elongated portion, and

b) a mating female housing portion, including:


- i) a lower plenum wall,
- ii) a fluid port in said lower plenum wall,
- iii) a pair of opposed, upstanding side walls, each of said upstanding side walls upstanding from said lower plenum wall and including,
 - a) a tongue portion,
 - b) a first wall portion,
 - c) a ramp portion, and
 - d) a second wall portion, and
- iv) a pair of opposed upstanding ridges located internally of said housing, parallel to and spaced a predetermined distance from said pair of opposed side wall portions;

12a

said downwardly depending sidewalls of said male
portion moving laterally towards said upstanding
sidewalls of said mating female housing portion
as an ultrasonic welding process is applied,
thereby applying lateral pressure to a pleat of a
filter placed there between.

5

10

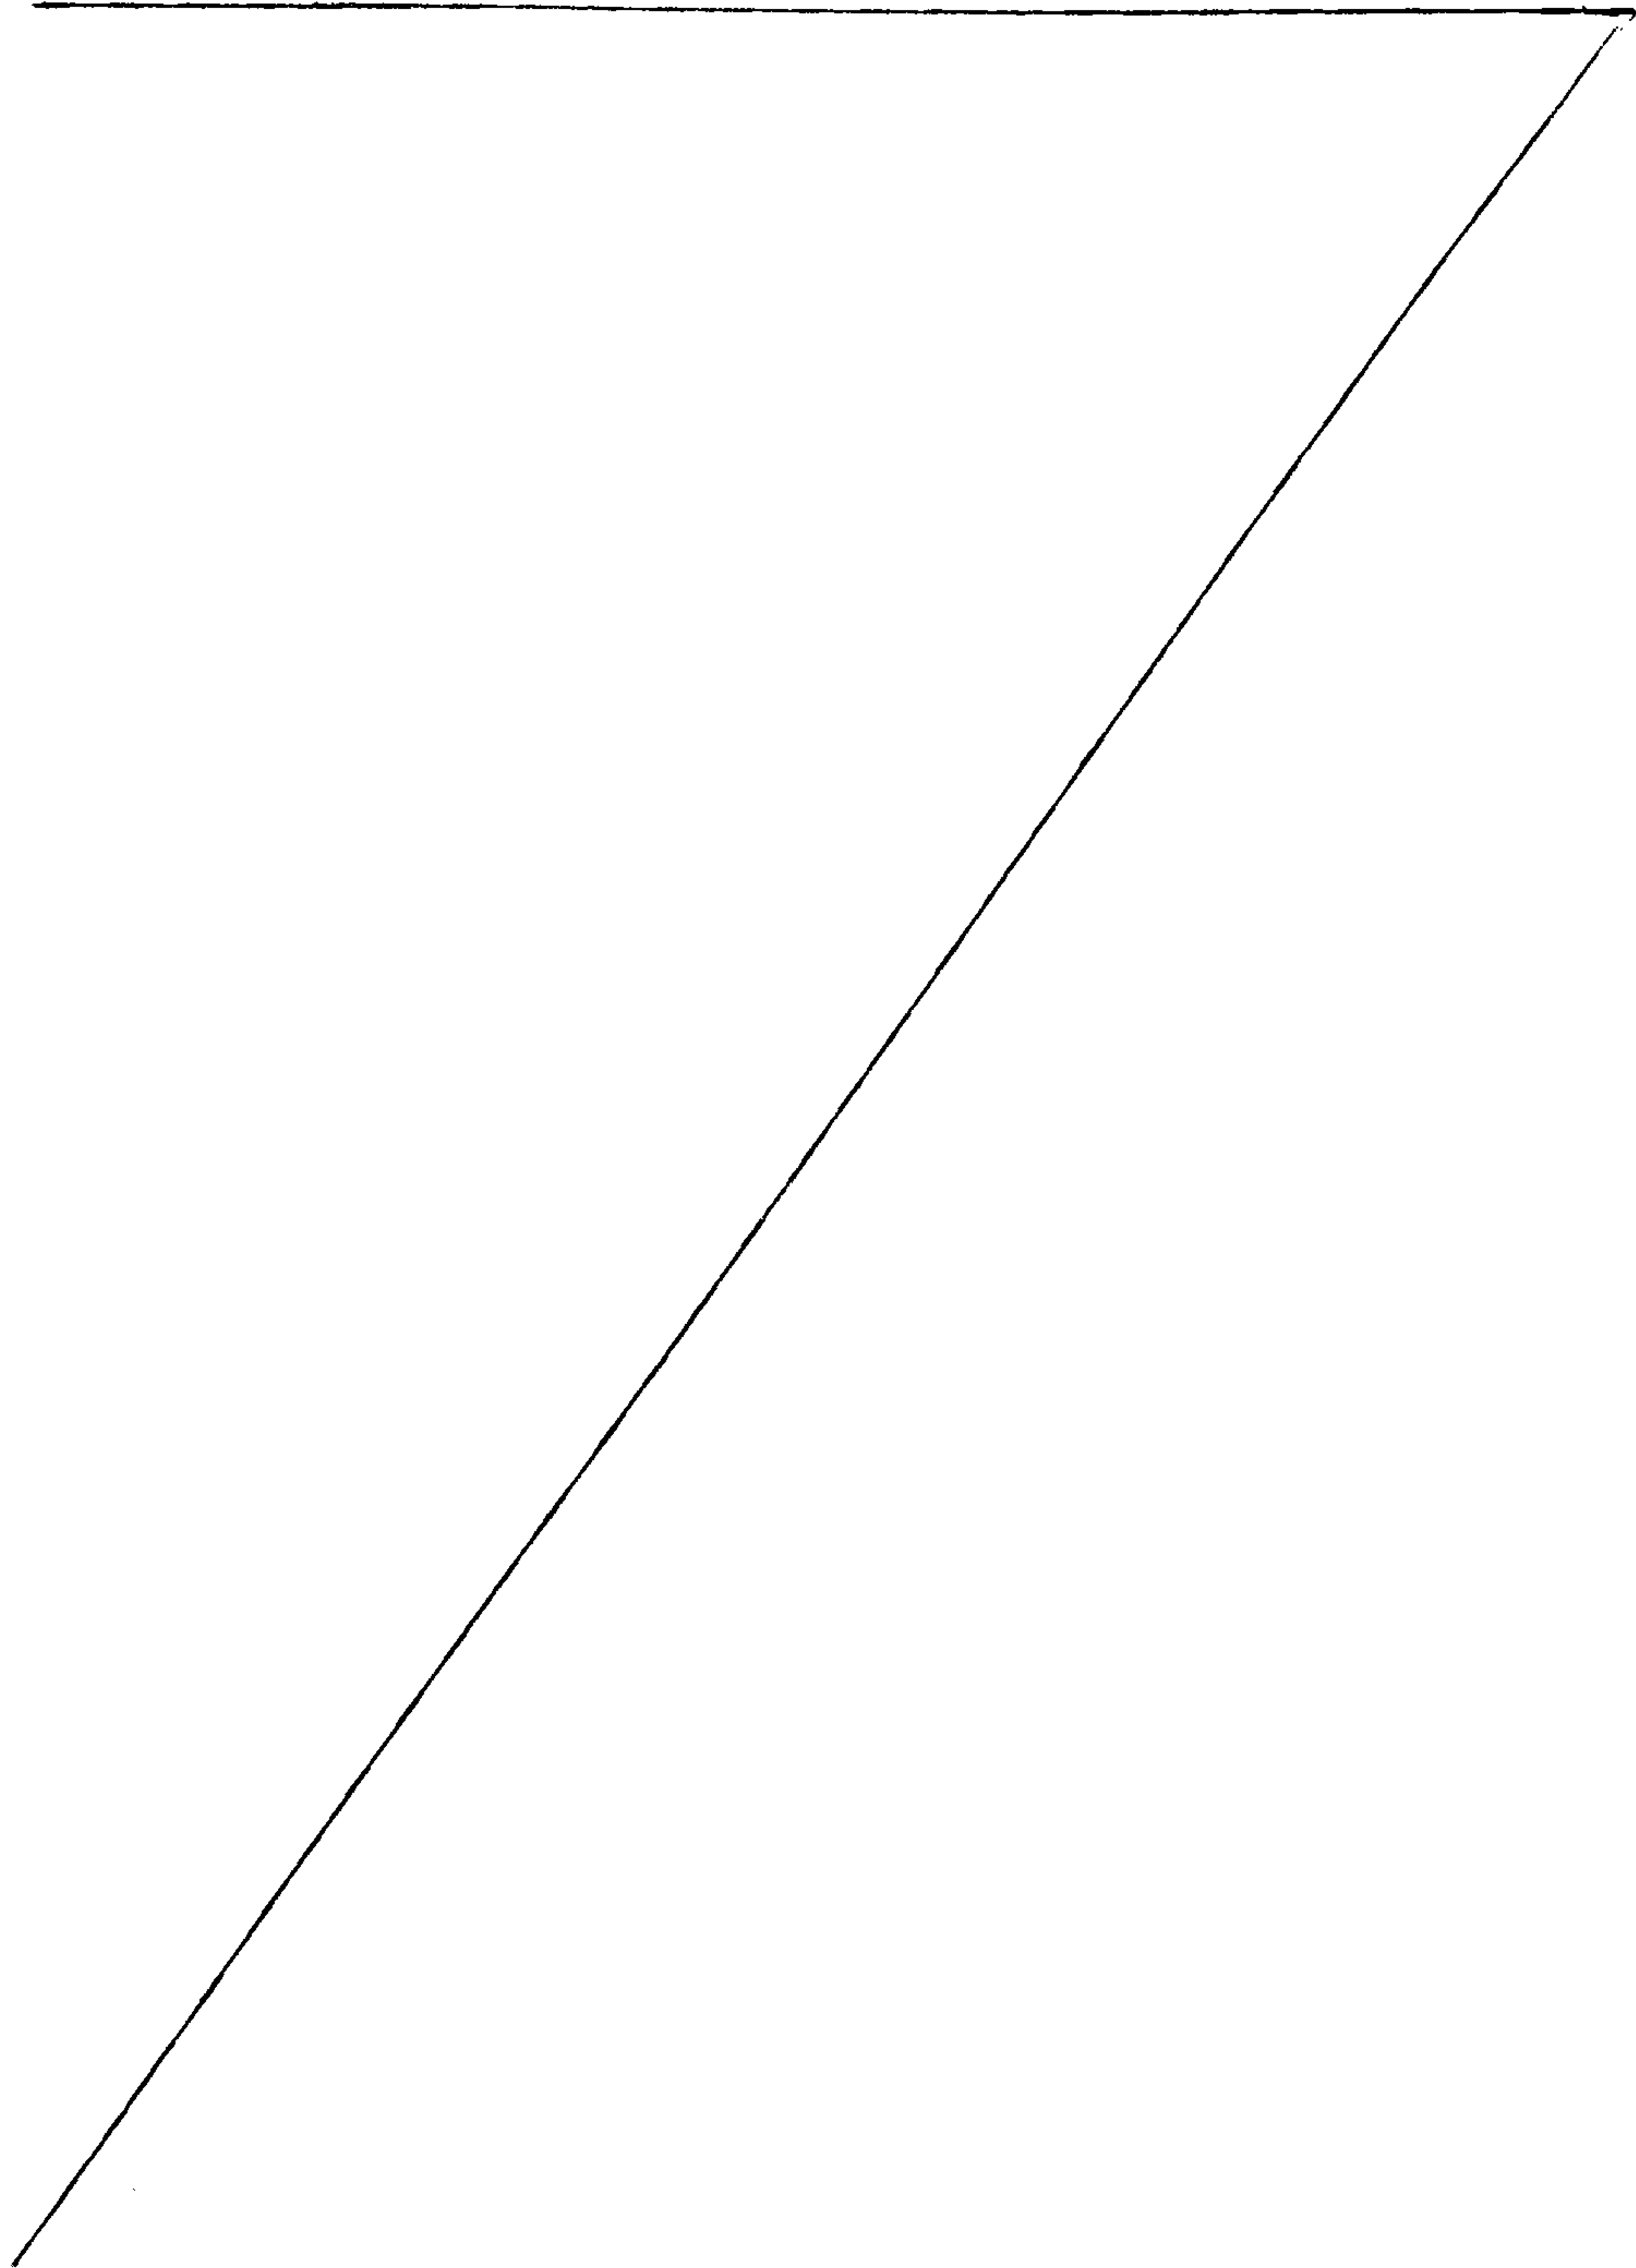

3. The filter housing defined in claim 2, wherein the ramp portion of each of said pair of opposed upstanding side walls is in close proximity to the downwardly depending side wall portion of each of said male housing portions when the ultrasonic energy portion of the male portion is in contact with the first wall portion of the female housing portion.

4. The filter housing defined in claim 3, wherein a U-shaped channel is formed between each of the pair of upstanding ridges and each of the second wall portions of upstanding side walls.

5. The filter housing defined in claim 2, wherein after said ultrasonic energy ridge is melted by welding, the wedge-shaped elongated portion of each of the downwardly depending side wall portions of said male housing have contacted and traveled down a distance on each of the ramp portions of the opposed upstanding side wall portions of the female housing, thereby placing each of said opposed downwardly depending side walls closer to each of the opposed upstanding ridges.

6. The filter housing defined in claim 5, and further including a corrugated filter element extending between each of said wedge-shaped elongated portions of said male housing portion, and having at least one pleat at each end of said corrugated filter element being trapped between the wedge-shaped elongated portions of said male housing portion and said opposed upstanding ridges of said female housing portion.

7. The filter housing defined in claim 4, and further including a corrugated filter element extending between each of said wedge-shaped elongated portions of said male housing portion, and having at least one pleat
5 at each end of said corrugated filter element placed in said U-shaped channel.

8. The filter housing defined in claim 6, wherein each of said male housing portions includes a pair of
10 opposed upper end wall portions and each of said female housing portions include a pair of lower opposed end wall portions, said upper and lower end wall portions forming a pair of opposed end walls.

15 9. The filter housing defined in claim 8, and further including a pair of end caps closing said open opposed end walls.

20 10. The filter housing defined in claim 9, wherein said end caps are potted on to said opposed end walls and seal said filter element to said end caps.

2163978

34707022

15 07 JUN 1995

11. A method of sealing a corrugated filter within
a box filter housing including an inlet, an outlet, an
upper housing portion and a lower housing portion and end
caps, said method including the steps of:

- a) providing a housing wherein a pleat can be
inserted and sealed in a generally vertical
orientation between a generally vertical wall
portion of an upper housing portion and a
generally vertical wall portion of a lower
housing portion along the entire length of the
pleat, the generally vertical wall portion of
the upper housing portion designed to move
laterally toward the generally vertical wall
portion of the lower housing portion as an
ultrasonic welding process is being used to
bond the upper housing portion to the lower
housing portion,
- b) inserting a corrugated filter within said
housing wherein a pleat at each end of the
corrugated filter is inserted in a generally
vertical orientation between said generally
vertical wall portion of said upper housing
portion and said generally vertical wall
portion of said lower housing portion,
- c) ultrasonically welding said upper housing
portion to said lower housing portion, thereby
causing said generally vertical wall portion of
said upper housing portion to move laterally
towards a generally vertical wall portion of
said lower housing portion, thereby applying
lateral pressure to said pleats to

AMENDED SHEET

mechanically seal said pleats in said filter housing in said generally vertical orientation, and

- d) potting on end caps to said filter housing to seal said corrugated filter media in position between said inlet and said outlet.

12. The method defined in claim 11, wherein the movement of the generally vertical wall portion of the upper housing portion toward the generally vertical wall portion of the lower housing portion is sufficient to compress the media from one-third to one-half of its original thickness.

13. A method of sealing a corrugated filter within a box filter housing including an inlet, an outlet, an upper housing portion and a lower housing portion and end caps, said method including the steps of:

- a) providing a housing wherein a single layer of filter media can be inserted and sealed in a generally vertical orientation between a generally vertical wall portion of an upper housing portion and a generally vertical wall portion of a lower housing portion along the entire length of the single layer of filter media, the generally vertical wall portion of the upper housing portion designed to move laterally toward the generally vertical wall portion of the lower housing portion as an ultrasonic welding process is being used to

bond the upper housing portion to the lower housing portion,

- 5 b) inserting a corrugated filter within said housing wherein a single layer of filter media at each end of the corrugated filter is inserted in a generally vertical orientation between said generally vertical wall portion of said upper housing portion and said generally vertical wall portion of said lower housing portion,
- 10
- c) ultrasonically welding said upper housing portion to said lower housing portion, thereby causing said generally vertical wall portion of said upper housing portion to move laterally towards a generally vertical wall portion of said lower housing portion, thereby applying lateral pressure to said single layer of filter media to mechanically seal said single layer of filter media in said filter housing in said generally vertical orientation, and
- 15
- d) potting on end caps to said filter housing to seal said corrugated filter media in position between said inlet and said outlet.
- 20
- 25

14. The method defined in claim 13, wherein the movement of the generally vertical wall portion of the upper housing portion toward the generally vertical portion of the lower housing portion is sufficient to compress the media from one-third to one-half of its original thickness.

30

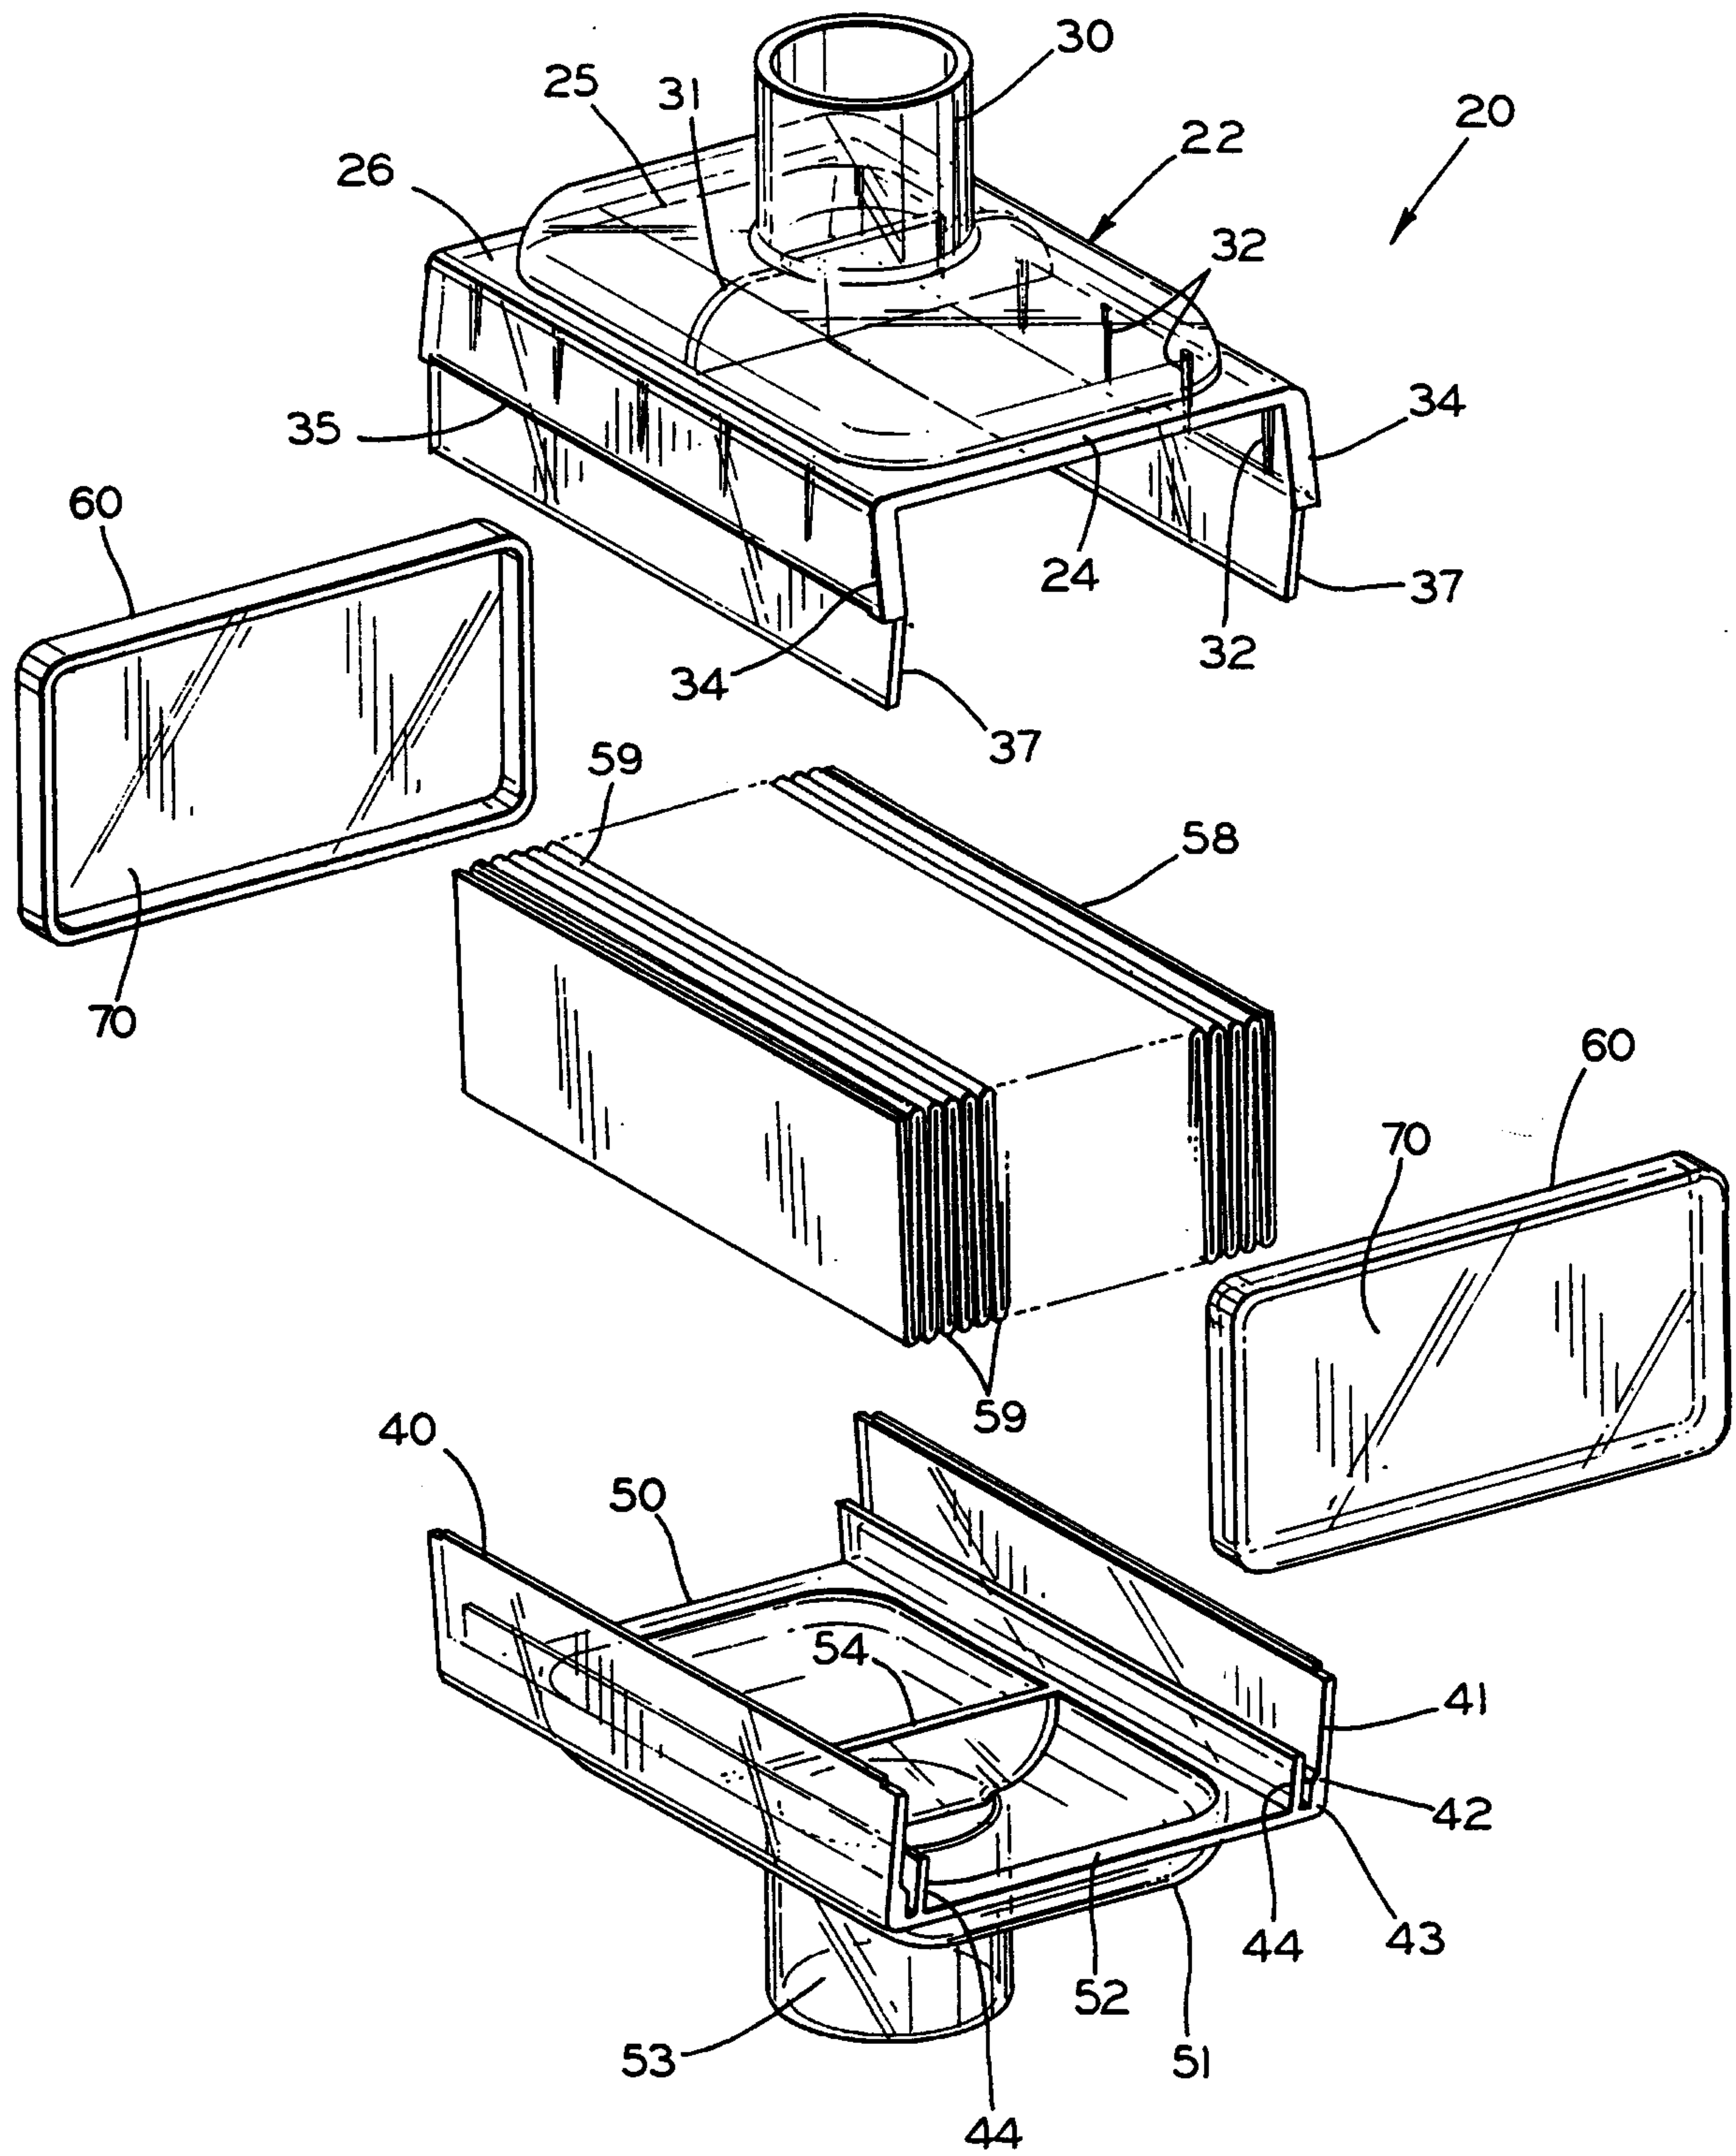


FIG. 1

2/3

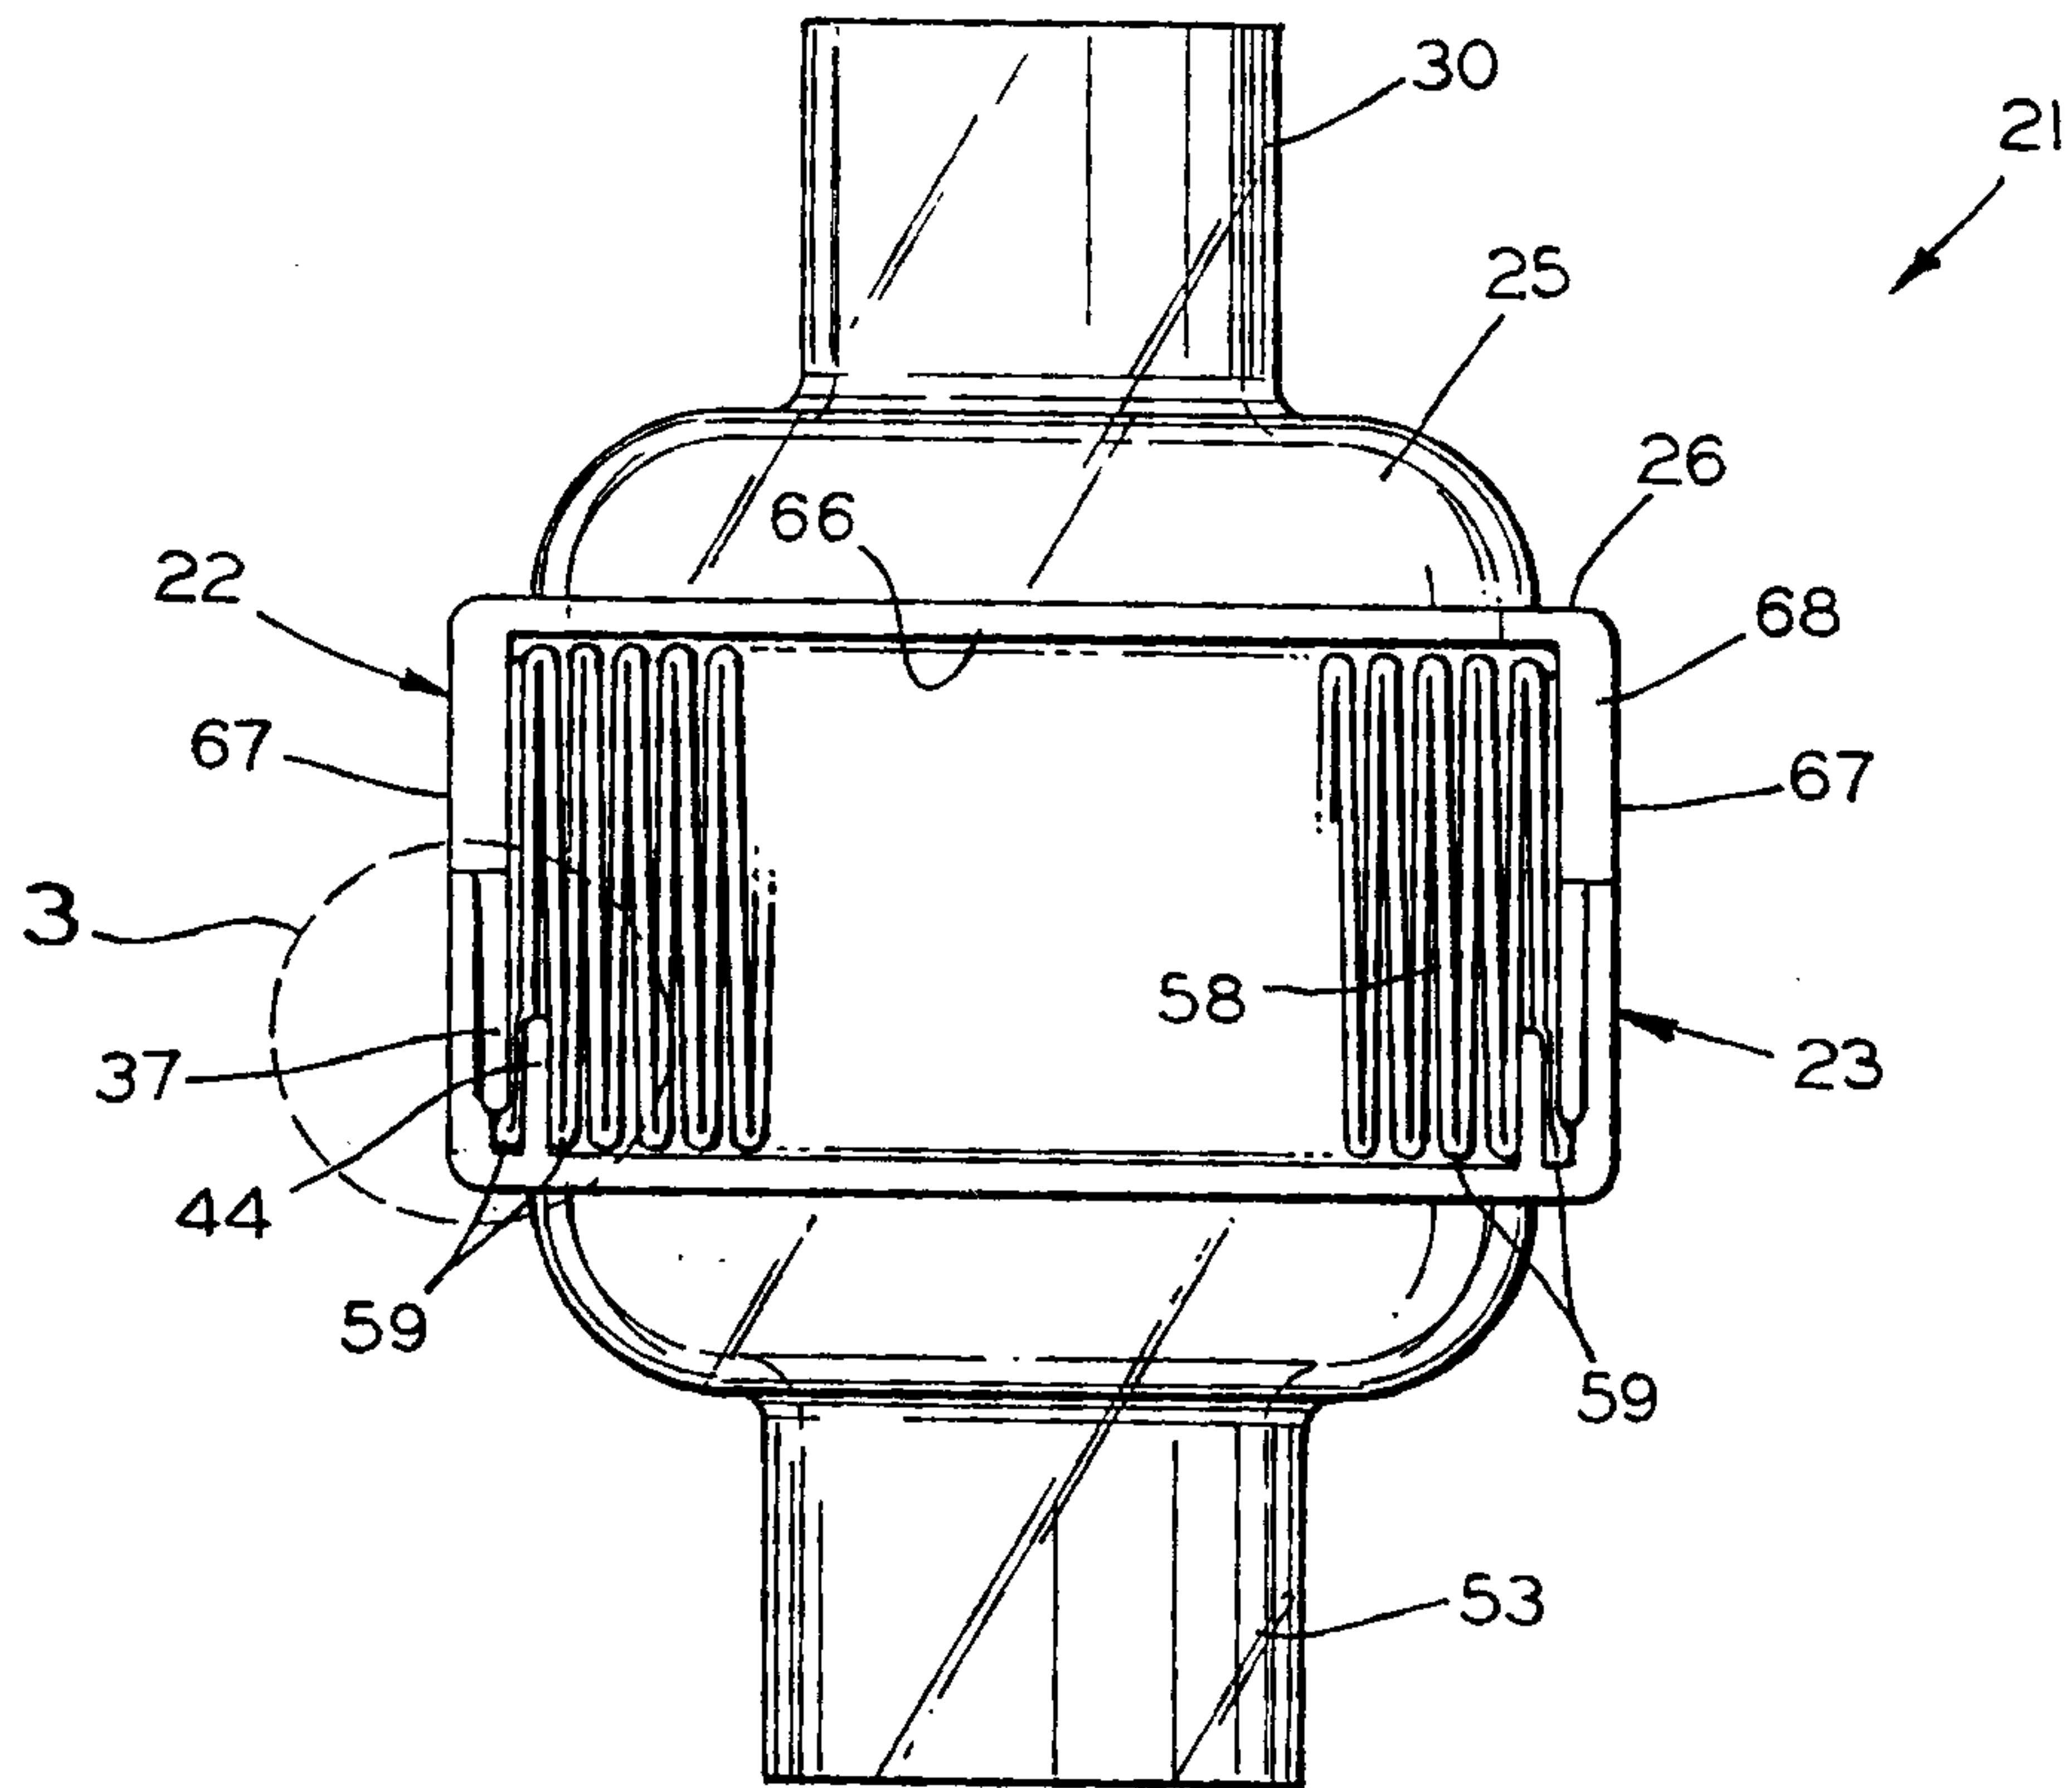


FIG. 2

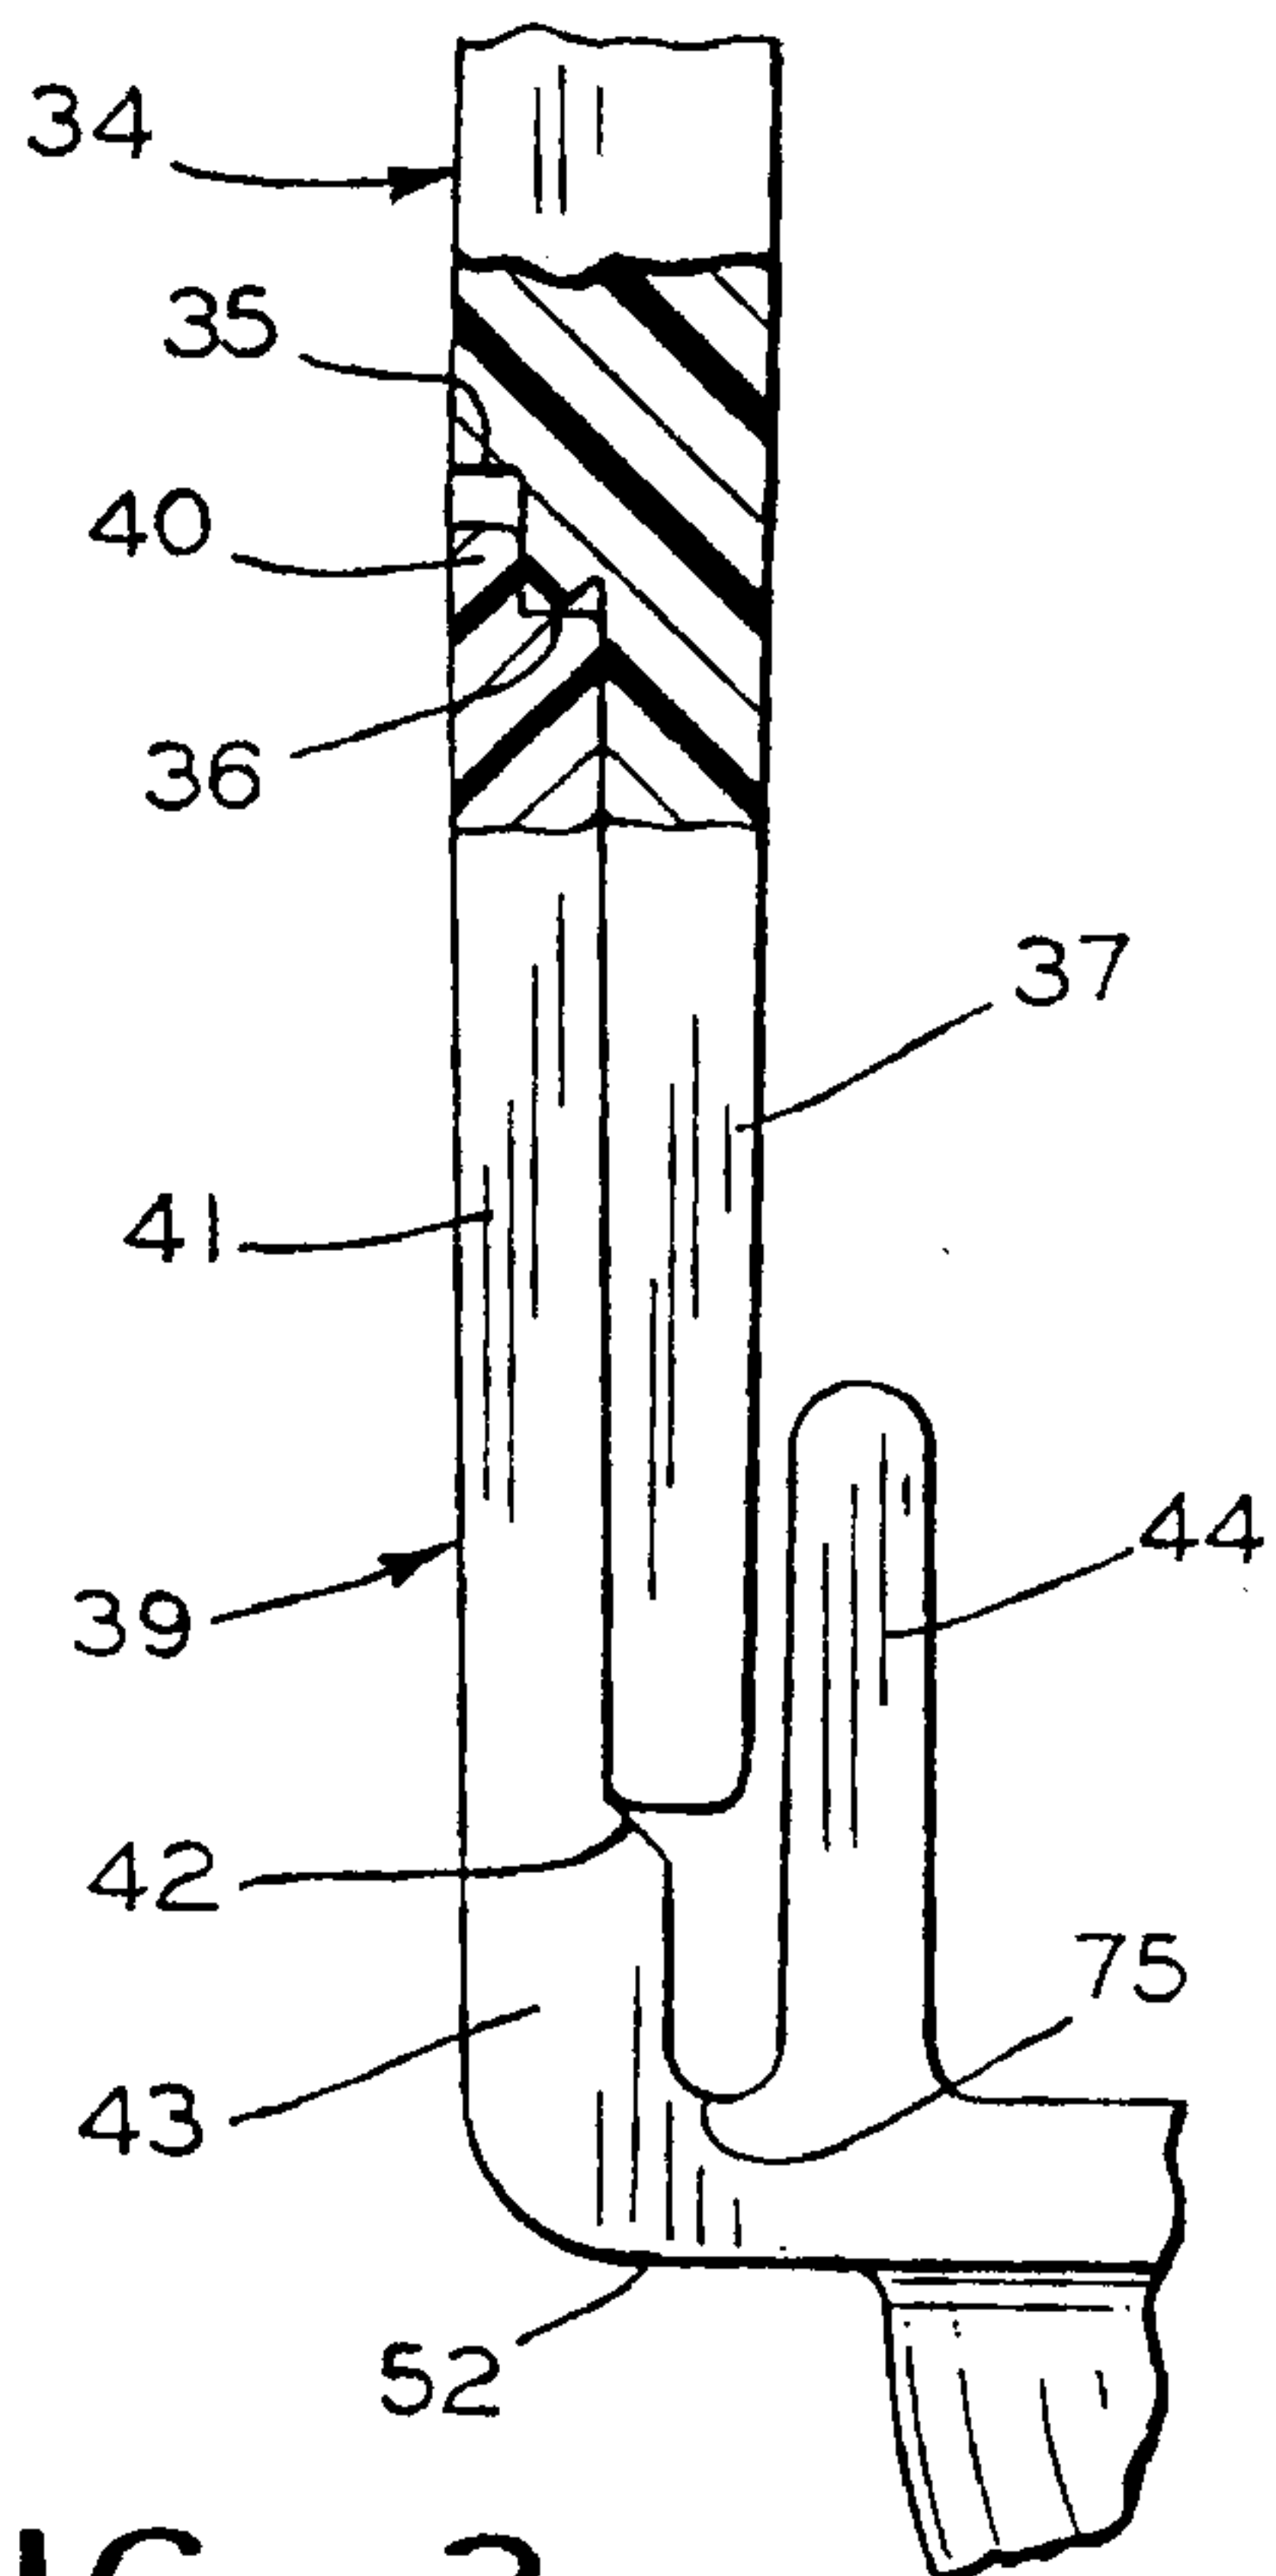


FIG. 3

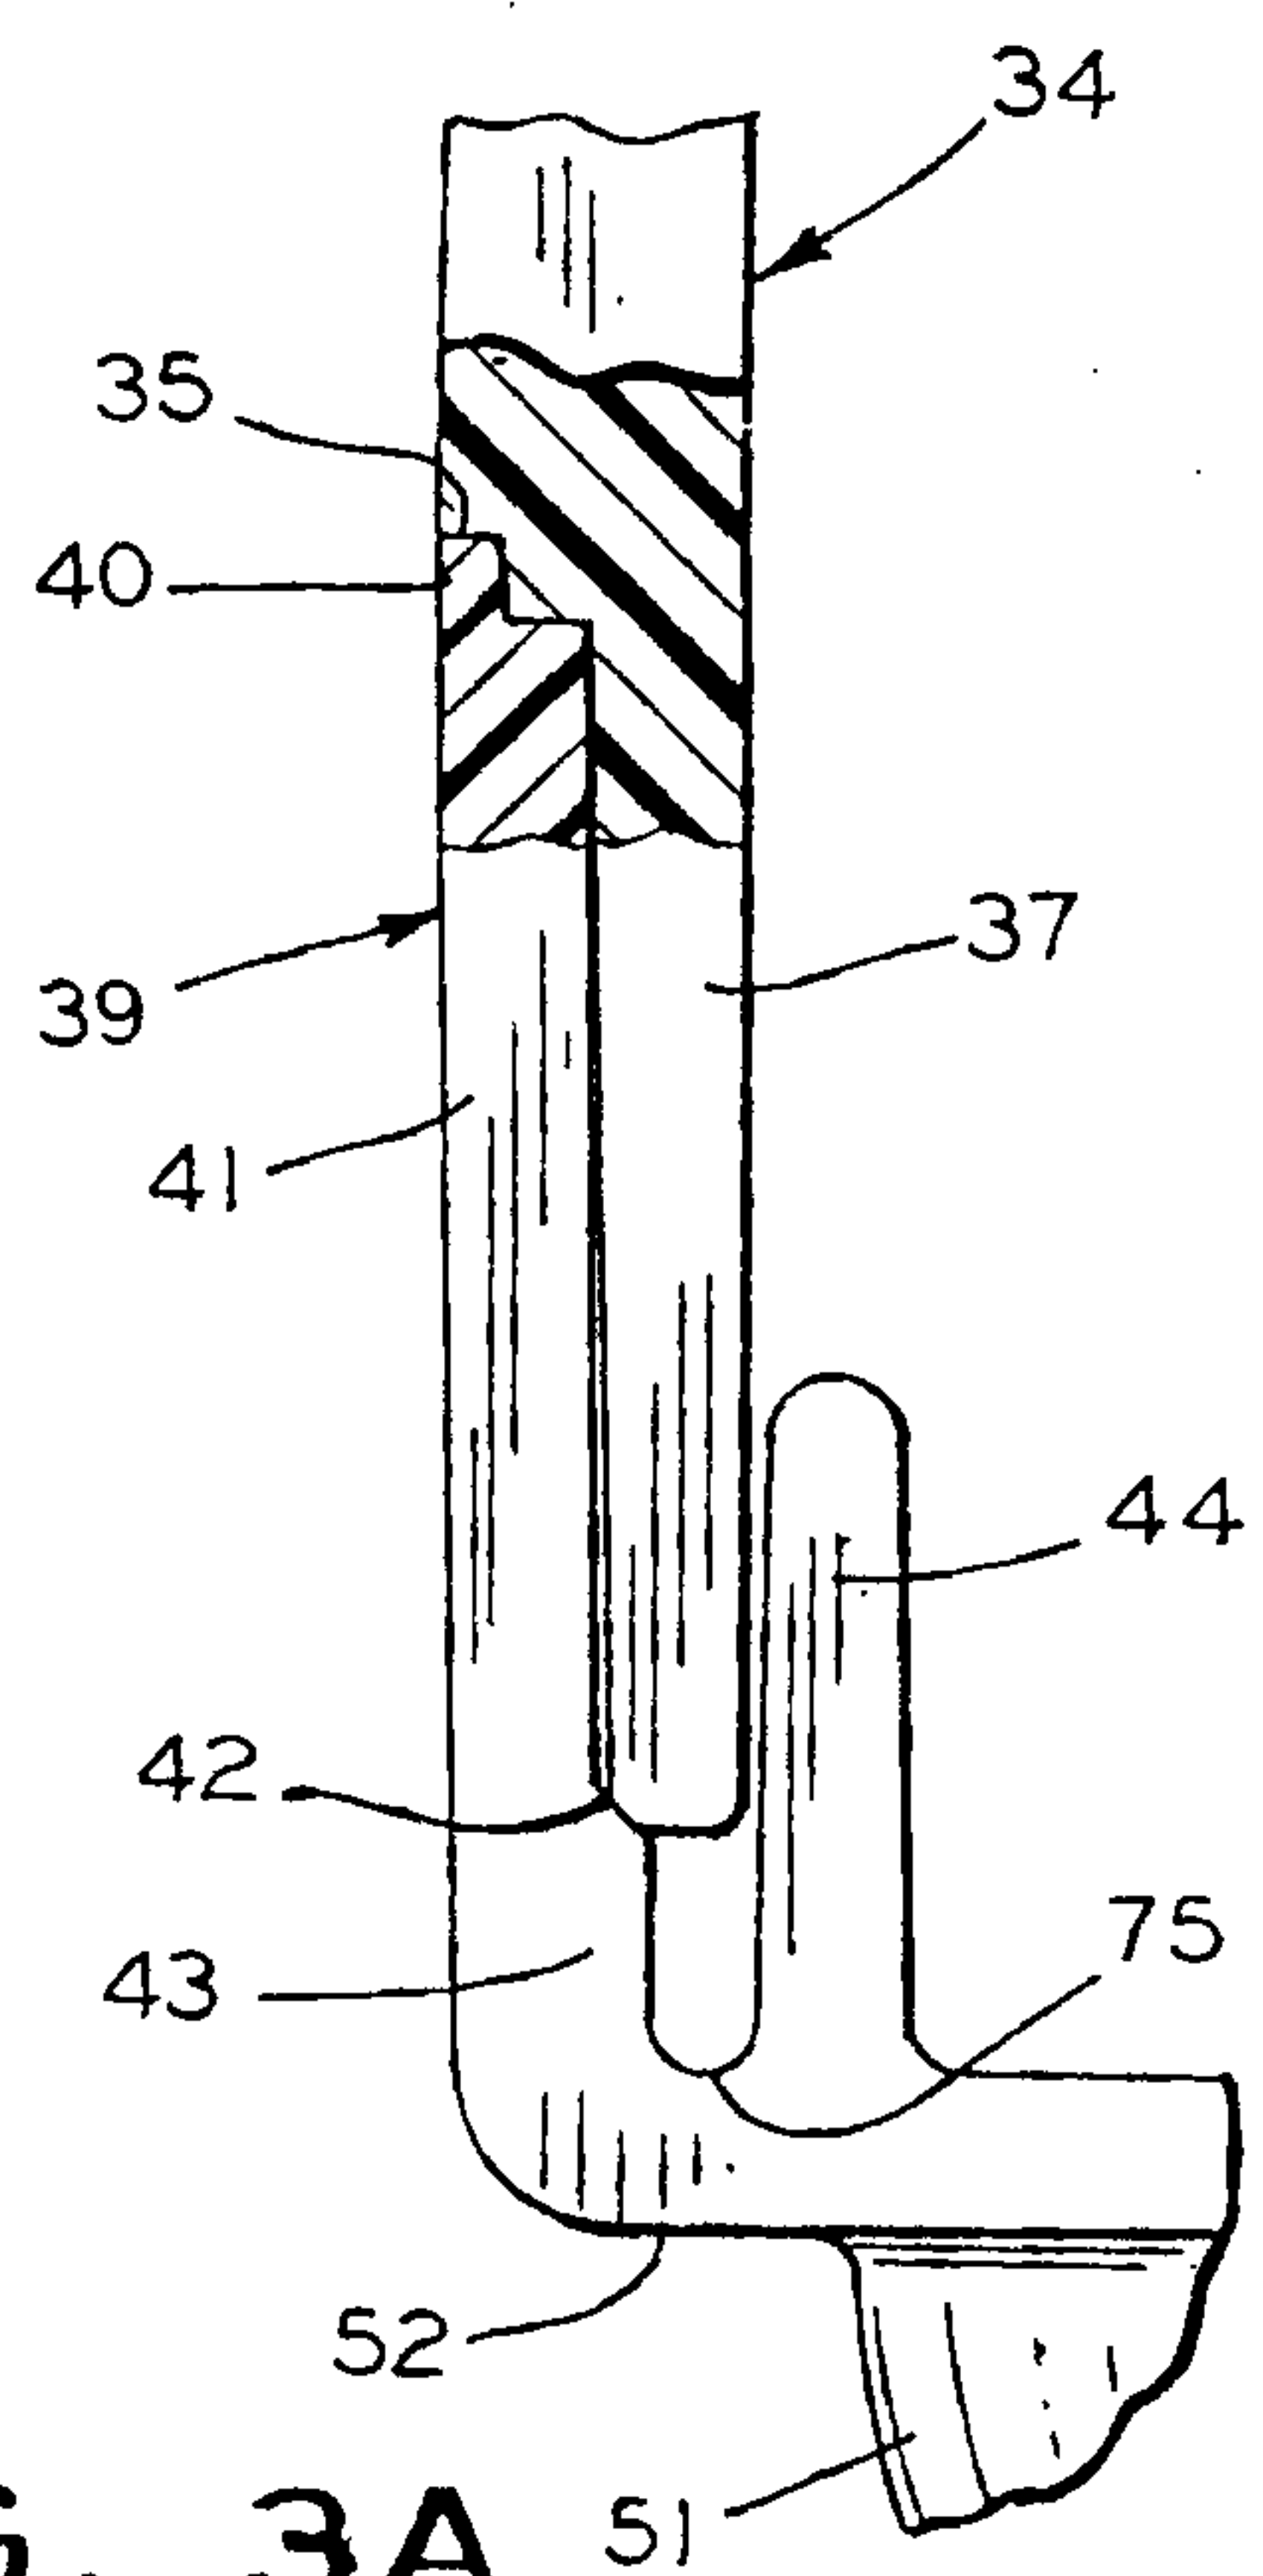


FIG. 3A

3/3

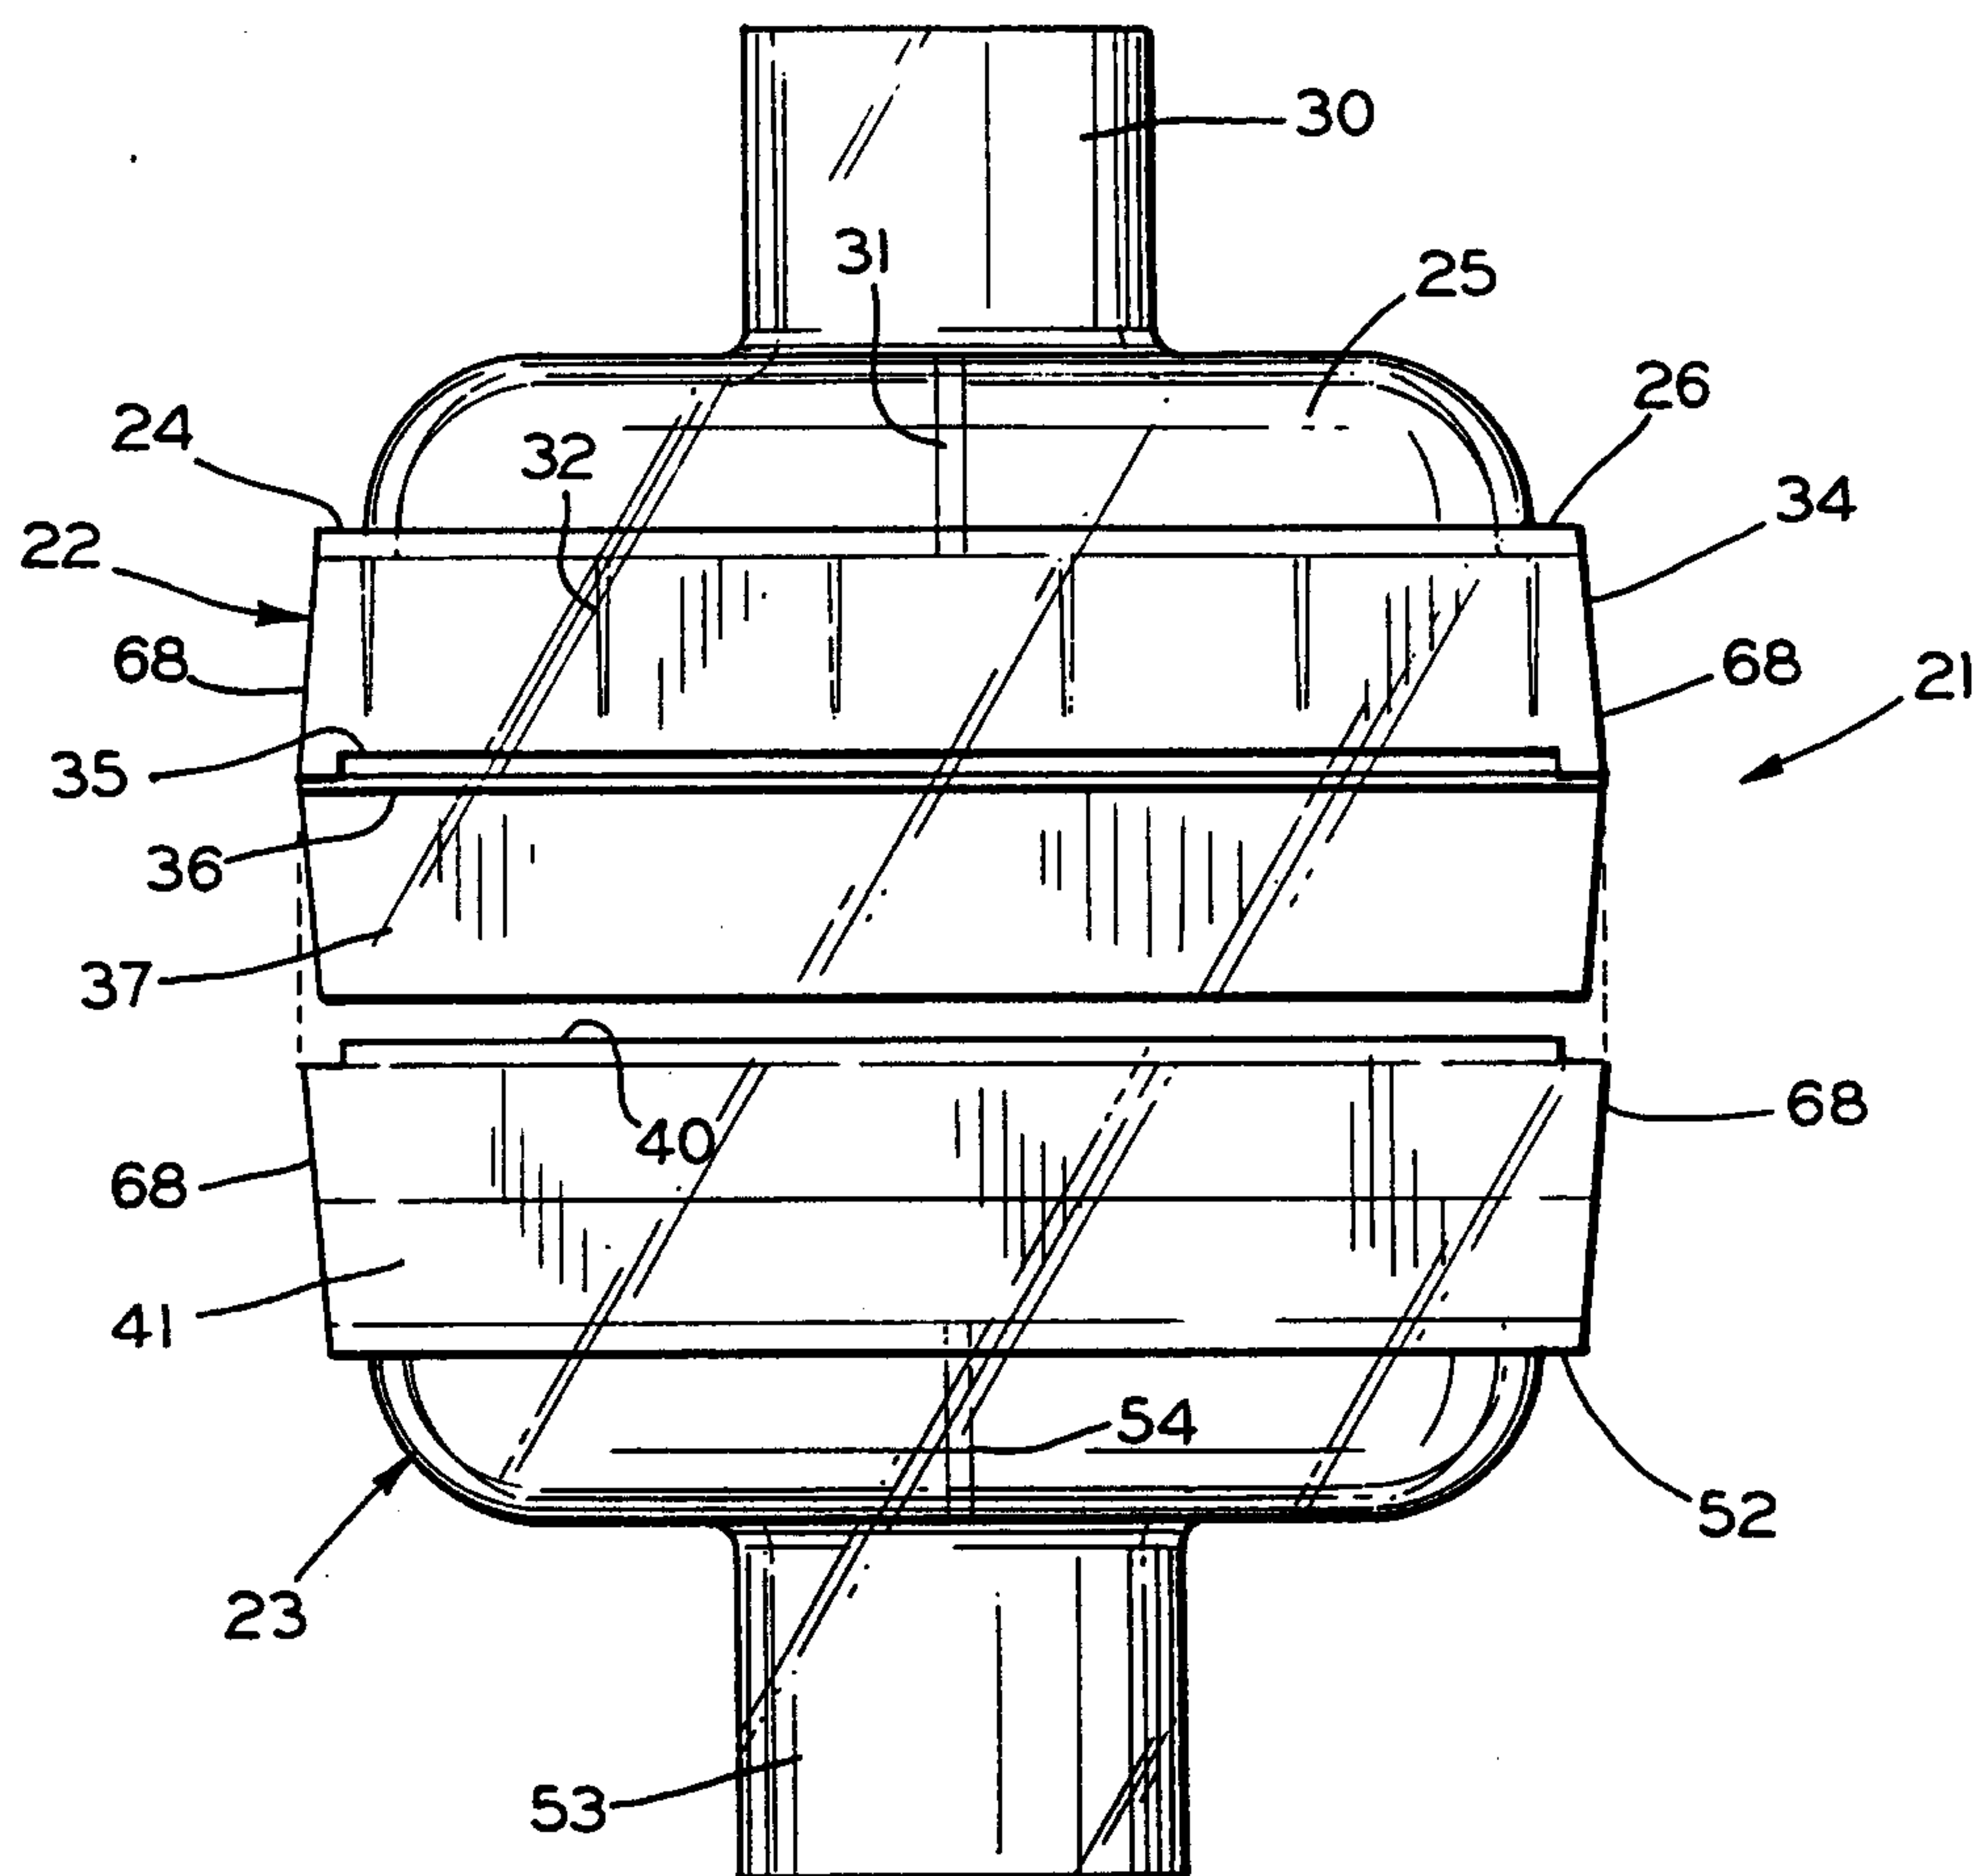


FIG. 4

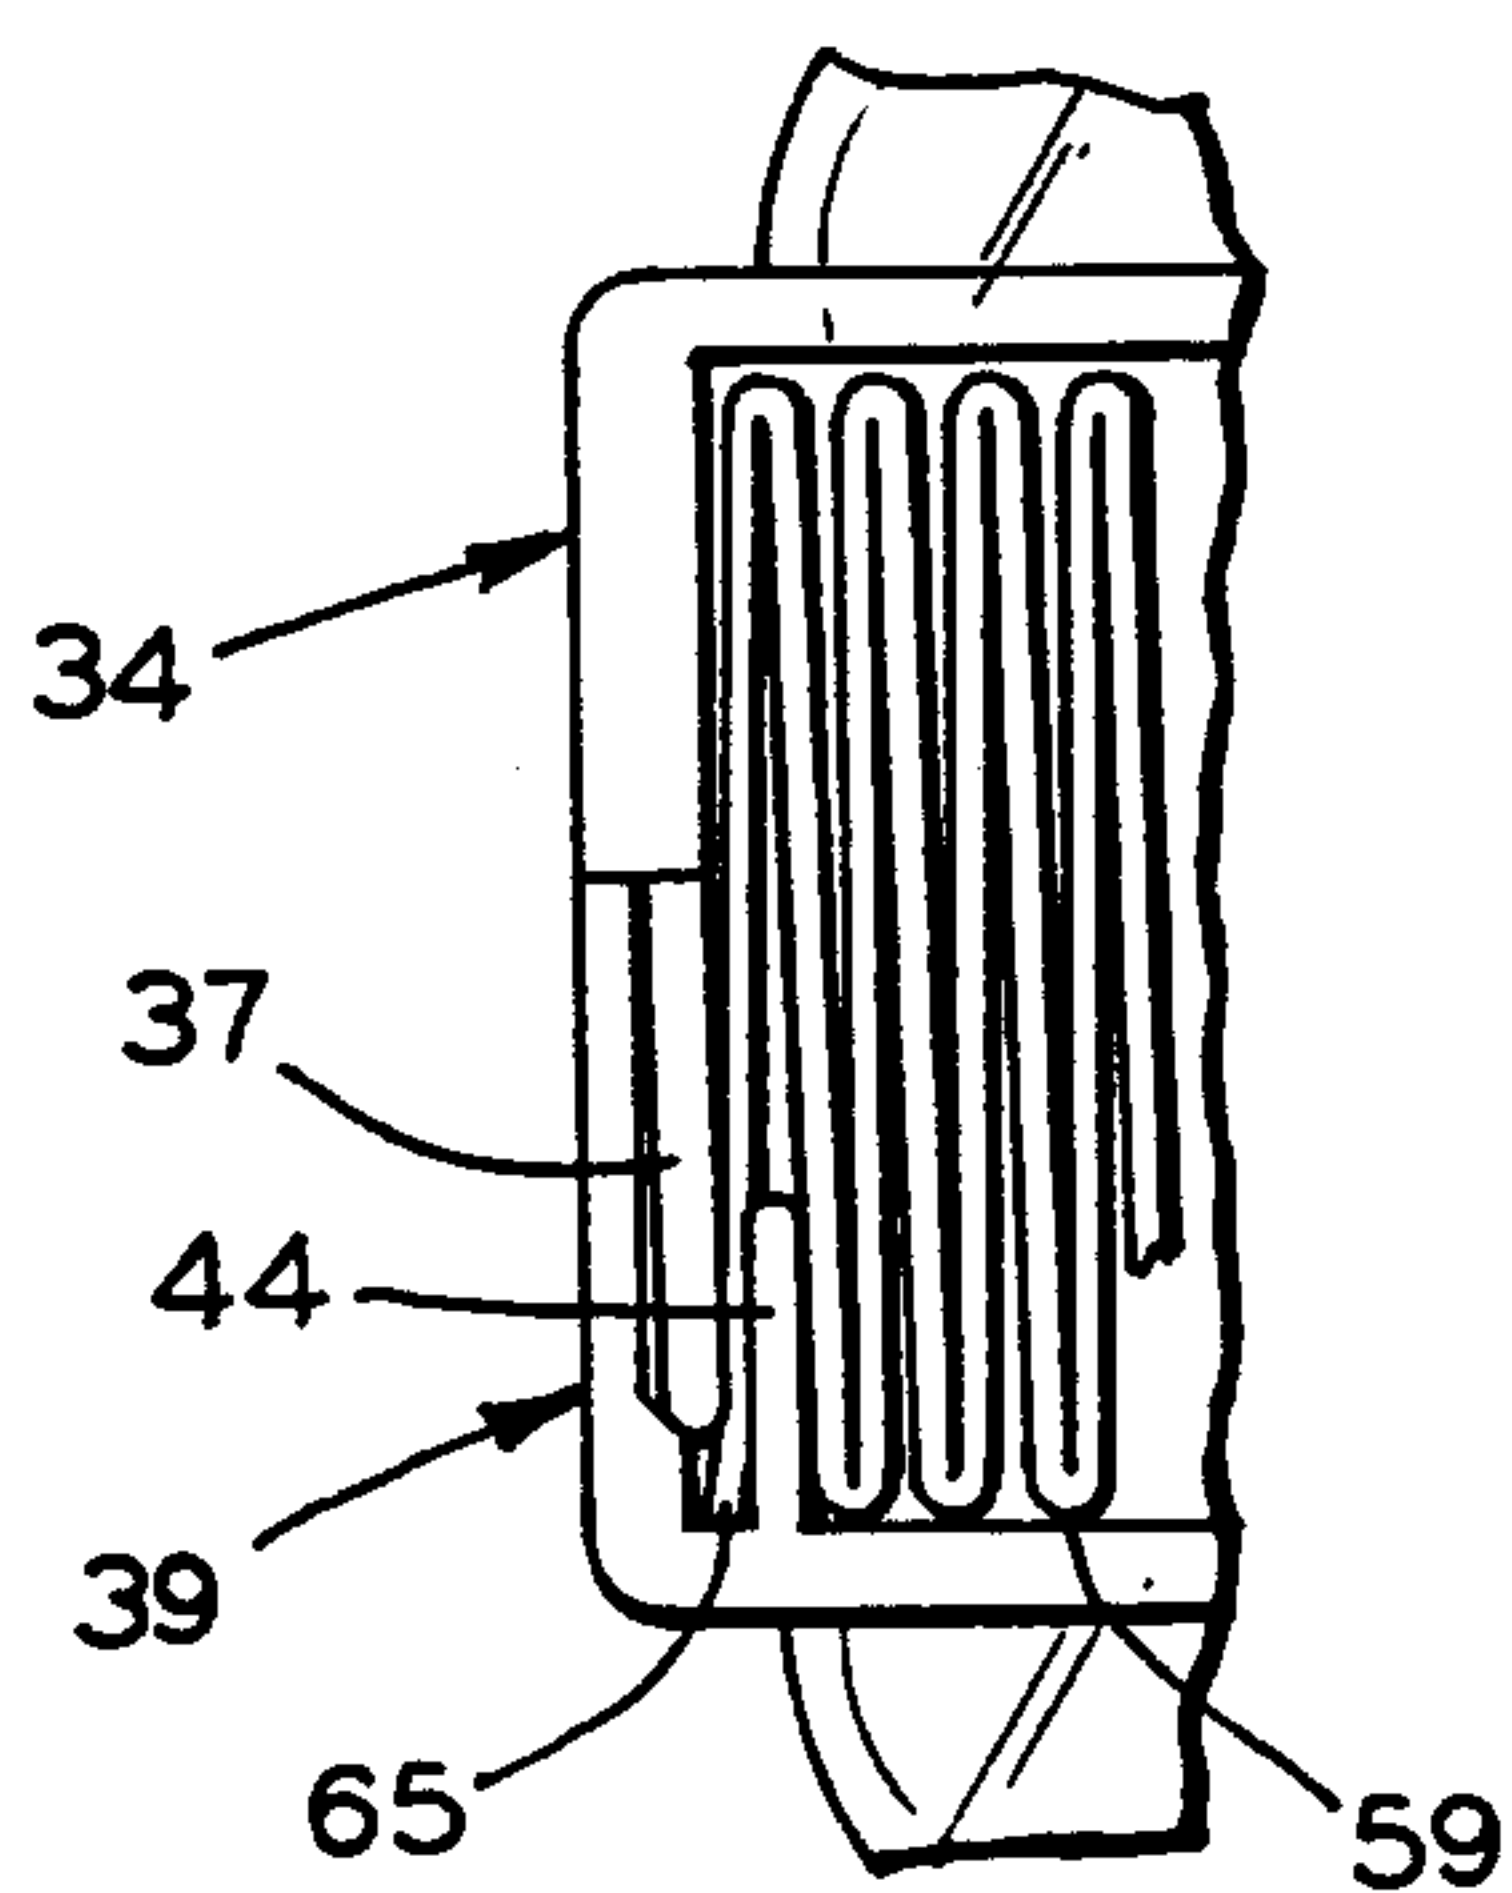


FIG. 5

