

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number

WO 2018/209434 A1

(43) International Publication Date
22 November 2018 (22.11.2018)

(51) International Patent Classification:
B32B 5/00 (2006.01) *B82Y 30/00* (2011.01)
B32B 33/00 (2006.01)

(74) Agent: ROBIC LLP; 1001 Square-Victoria, Bloc E - 8th Floor, Montréal, Québec H2Z 2B7 (CA).

(21) International Application Number:
PCT/CA2018/050571

(22) International Filing Date:
14 May 2018 (14.05.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/506,279 15 May 2017 (15.05.2017) US

(71) Applicant: NATIONAL RESEARCH COUNCIL OF CANADA [CA/CA]; 1200 Montreal Road, Ottawa, Ontario K1A 0R6 (CA).

(72) Inventors: ASHRAFI, Behnam; National Research Council Canada, 5145 Decelles Avenue, Montreal, Québec H3T 2B2 (CA). JAKUBINEK, Michael; National Research Council Canada, 100 Sussex Drive, Ottawa, Ontario K1A 0R6 (CA). LAQUA, Kurtis; National Research Council Canada, 5145 Decelles Avenue, Montreal, Québec H3T 2B2 (CA). MARTINEZ-RUBI, Yadienka; National Research Council Canada, 100 Sussex Drive, Ottawa, Ontario K1A 0R6 (CA). SIMARD, Benoit; National Research Council Canada, 100 Sussex Drive, Ottawa, Ontario K1A 0R6 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(54) Title: STRETCHABLE NANOCOMPOSITE SKIN MATERIAL AND RELATED STRUCTURES

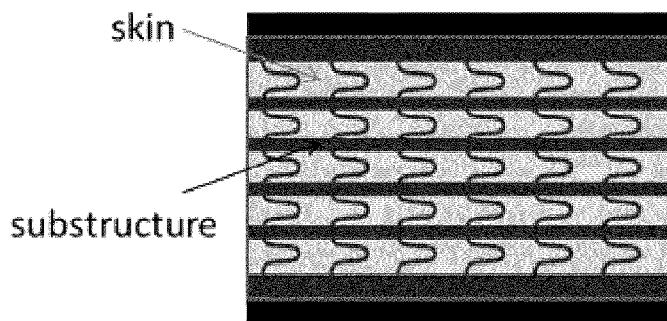


FIG. 9A

(57) Abstract: A stretchable multiple-layer nanocomposite material is provided and includes at least a nanocomposite material layer comprising a network of nanotubes modified with an elastomeric polymer; and at least one additional layer laminated with the nanocomposite material layer. The number of nanocomposite layers and additional layers, the nature and composition thereof, may be varied in a surface direction and/or a thickness direction so as to provide tailored mechanical and physico-chemical properties to a resulting skin that can be used to produce morphing or deployable structures.



Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

STRETCHABLE NANOCOMPOSITE SKIN MATERIAL AND RELATED STRUCTURES

5

TECHNICAL FIELD

The technical field generally relates to nanocomposite materials and more particularly to a stretchable nanocomposite skin material and related structures thereof.

BACKGROUND

10 Nanocomposite materials are good candidates to be used as deformable materials, while offering desirable mechanical resistance properties. Typically, nanotubes are dispersed in polymer or nanotube sheets are subsequently infused with polymer resin to produce a deformable nanocomposite, such as a bendable or stretchable nanocomposite.

15 Regarding advances in the domain of nanocomposites, US patent application published under No. 2015/147573 provides examples (see examples 32 and 90) showing methods for fabrication of elastomerically deformable carbon nanotube sheets, including deposition of a nanofiber sheet on an elongated elastomeric sheet (porous elastomeric textile or porous silicon rubber sheet), such that the

20 resulting deformable sheet can be elastically relaxed and re-stretched repeatedly to the initial elongation without undergoing a substantial resistance change. Methods may further include overcoating with a second elastomeric sheet. The principle of the method may also be extended to produce elastomerically deformable stacks comprising one or more nanotube electrode sheets that are

25 laminated between sheets of elastomer.

Another example of a deformable nanocomposite material is provided by Martinez-Rubi Y et al. *Nanotube-Buckypaper/Polyurethane Composites with Enhanced Mechanical Properties*. 20th International Conference on Composite Materials,

Copenhagen, 19-24th July 2015 (Referred hereinafter as Martinez-Rubi). Martinez-Rubi discloses a non-woven sheet of a carbon nanotube/thermoplastic polyurethane composite (CNT/TPU). The CNT/TPU composite sheet can be used as an interlayer between sheets of ultra-high molecular weight polyethylene (UHMWPE).

A further example of a deformable nanocomposite material is provided by Koerner H, et al. *Deformation–morphology correlations in electrically conductive carbon nanotube-thermoplastic polyurethane nanocomposites*. *Polymer*. 46 (2005) 4405-4420. Koerner discloses a single layer CNT/TPU composite sheet or film which is stretchable.

Morphing and deployable structures require a deformable skin to enable shape change while maintaining a continuous outer surface over a support structure. In existing implementations, the skin can be reshaped with minimal area change (e.g., bending), but there is a need for a skin which is able to stretch by incorporating changes in area. Existing stretchable materials include elastomeric polymers such as silicones, rubber, thermoplastic polymers, shape memory polymers, and nonwovens. Each of these available materials may be a candidate to be used as skin material, but has disadvantages including insufficient stiffness for aerodynamic load, permeability, timescale of the transition, etc.

Conceiving a material that can stretch to a sufficient extent, stretch reversibly where required, and also offer required stiffness to support loads is a challenge for the development of improved morphing and deployable structure technologies.

SUMMARY

In a first aspect, there is provided a stretchable multiple-layer nanocomposite material comprising at least a nanocomposite material layer comprising a network of nanotubes modified with an elastomeric polymer; and at least one additional 5 layer laminated with the nanocomposite material layer.

In some implementations, the network of nanotubes is provided by a non-woven sheet of nanotubes. The nanotubes may be oriented, either randomly or in controlled alignment, within a plane defined by the nanocomposite material layer.

In some implementations, the nanotubes comprise carbon nanotubes, boron-10 nitride nanotubes, boron-carbon-nitrogen nanotubes, silicon-carbide nanotubes, other nanoparticles, hybrids thereof or a combination thereof. The nanotubes include single-walled nanotubes and multi-walled nanotubes. The nanocomposite material layer may have a nanotube content between 5 wt% and 90 wt%, optionally between 10 wt% and 40 wt%.

15 In some implementations, the elastomeric polymer comprises thermoplastic elastomers, thermoplastic polyurethane, rubber, silicone rubber or a combination thereof.

Each of the previously mentioned layers may be combined in various combinations and the material may include several layers of the same type.

20 In some implementations, the nanocomposite material layer is a first nanocomposite material layer and the at least one additional layer is another nanocomposite material layer comprising nanotubes differing in nature from the nanotubes of the first nanocomposite material layer. Optionally, the nanocomposite material layer is a first nanocomposite material layer and the at 25 least one additional layer may be another nanocomposite material layer having a nanotube content which is different from the first nanocomposite material layer. Alternatively, the nanocomposite material layer is a first nanocomposite material

layer and the at least one additional layer may be another nanocomposite material layer similar to the first nanocomposite material layer.

Furthermore, the at least one additional layer may be a neat polymer layer, a composite polymer layer, or a reinforced polymer layer including at least one elastomeric polymer. The elastomeric polymer of the at least one additional layer may be the same as the one included in the nanocomposite material layer. Alternatively, the elastomeric polymer of the at least one additional layer may be different from the one included in the nanocomposite material layer.

In some implementations, the multiple-layer material may have mechanical properties varying across a surface area thereof. At least the nanocomposite material layer may have mechanical properties varying across a surface area thereof.

For example, the multiple-layer material may have a nanotube content varying across the surface area. The nanotube content may be higher in a specific area of the nanocomposite layer to enhance stiffness of the material. In another example, the material may have a polymer content varying across the surface area. The polymer content may be higher in another specific area of the multiple-layer nanocomposite material to enhance stretchability of the material. In yet another example, the nature of elastomeric polymer and/or the nature of the nanotubes may change across the surface area of the multiple-layer material.

In some implementations, the multiple-layer material comprises a plurality of layers which number varies across the surface area of the material. The number of layers may be tailored to obtain a given material thickness and properties profile adapted for use as a skin material.

In further implementations, the multiple-layer material has a nanotube:polymer ratio tailored to provide a given stretchability profile to the skin material for application in a morphing structure or a deployable structure.

In another aspect, there is provided a skin material for direct application as a skin on a substructure, the skin material comprising a nanotube network modified with a polymer. The polymer may comprise an elastomeric polymer selected to provide stretchability to the skin material.

5 In some implementations, the skin material includes a non-woven nanotube layer modified with the polymer. In addition, at least one additional layer may be laminated on the non-woven nanotube layer modified with the polymer.

Optionally, the at least one additional layer is one or more of a nanocomposite layer. Further optionally, the at least one additional layer is a layer of neat or 10 reinforced elastomeric polymer comprising thermoplastic polyurethane, silicone rubber, rubber or a combination thereof.

In some implementations, the skin material includes a plurality of laminated layers tailored to obtain a material thickness between 0.05 mm and 20 mm. Optionally, the material thickness is between 0.5 mm and 3 mm.

15 In some implementations, the skin material has a composition tailored to provide a reversible stretch capacity from 5 to 50% and an elastic modulus from 50 MPa to 10 GPa. Optionally, the reversible stretch capacity is of 20% and the elastic modulus is of 500 MPa.

In some implementations, the skin material has a nanotube:polymer ratio tailored 20 to provide a one-time stretch capacity of at least 100% and a stiffness from 50 MPa to 10 GPa. Optionally, the one-time stretch capacity is of at least 200% stretch and the stiffness of 500 MPa.

In another aspect, there is provided a stretchable skin material being the stretchable multiple-layer nanocomposite material defined above.

25 In another aspect, there is provided a skin being directly applied onto a support surface as the stretchable multiple-layer nanocomposite material or skin material defined above. In some implementations, the nature of the nanotubes included in

the material are selected to provide heating, sensing, EMI shielding, neutron shielding properties or a combination thereof to the skin.

In another aspect, there is provided a morphing structure produced by direct application of a skin material as defined above onto a support structure. The 5 morphing structure may be at least a portion of a morphing aircraft, comprising a wing leading edge, a wing trailing edge, a tail fin, a nose cone or a combination thereof.

In another aspect, there is provided a deployable structure produced by direct application of a skin material as defined above onto a deployable support structure.

10 The deployable support structure may reversibly unfold and/or inflate resulting in stretching of the skin material. Optionally, the skin material is maintained in a stretched state by internal air pressure when the support structure is deployed, the internal air pressure being higher than a pressure external to the deployable structure. The deployable structure may be at least a portion of a deployable space 15 habitat or a deployable military habitat.

In another aspect, there is provided a structure including a sub-structure and a skin as defined above to form at least part of an outer surface of the structure by application onto the sub-structure.

While the skin material will be described in conjunction with exemplary 20 implementations, it will be understood that it is not intended to limit the scope of the material to such implementations. On the contrary, it is intended to cover all alternatives, modifications and equivalents as may be included as defined by the present description. The objects, advantages and other features of the skin material and related applications will become more apparent and be better 25 understood upon reading of the following non-restrictive description, given with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Implementations of the stretchable multiple-layer nanocomposite material for a skin material, a skin, a morphing structure or a deployable structure are represented in and will be further understood in connection with the following 5 figures.

Figure 1 is an SEM image of a non-woven nanocomposite sheet (also referred to as buckypaper composite) using multi-walled carbon nanotubes modified with thermoplastic polyurethane (CNT-TPU, also referred to as NT-PU).

Figures 2A and 2B are schematic representation of the lamination process for two 10 respective combinations of layers of the nanocomposite material.

Figure 3 is a graph showing cycling loading of a neat polyurethane sheet and a related polyurethane-modified carbon nanotube sheet.

Figure 4 is a thermal image of a powered skin material sample showing heating capacity.

15 Figure 5 includes two graphs of respective power density and temperature versus voltage which may be delivered by the ~1-inch powered skin material sample from Figure 4.

Figure 6 is a graph of a load versus displacement under stretching load showing initial pre-stretch and subsequent cycling for a stretchable single-layer 20 polyurethane-nanotube composite material.

Figure 7A includes two photographs showing respectively multiple individual layers of CNT-TPU, and a multilayer skin material resulting from lamination of the multiple individual layers of CNT-TPU.

25 Figure 7B includes two photographs showing respectively two upper and lower layers of CNT-TPU and an intermediate layer of TPU, and a multilayer skin material resulting from lamination of the three layers. Figure 8A is an annotated photograph

of a 12" x 36" skin manufactured with varied composition in both the vertical (thickness) direction and the horizontal (surface) direction immediately after lamination (before cutting away unused area of a neat polyurethane sheet).

Figure 8B is an annotated photograph of the 12" x 36" skin of Figure 8A during 5 stretching of a full area of the skin.

Figure 9A is a schematic representation of a stretchable morphing structure including a skin formed with the skin material applied on a sub-structure.

Figure 9B is a photograph of a sub-structure according to Figure 9A produced by 3D printing.

10 While the invention will be described in conjunction with example embodiments, it will be understood that it is not intended to limit the scope of the invention to these embodiments. On the contrary, it is intended to cover all alternatives, modifications and equivalents as may be included as defined by the appended claims.

DETAILED DESCRIPTION

Lamination of non-woven sheets of nanotubes modified with an elastomeric polymer produces a tailorable, stretchable skin material. Details regarding implementations of the stretchable skin material, manufacture thereof, resulting 5 skin and skin applications in morphing and deployable structures are provided hereinafter.

It should be noted that the same numerical references or annotations refer to similar elements. Furthermore, for the sake of simplicity and clarity, namely so as to not unduly burden the figures with several references, not all figures contain 10 references to all the components and features, and references to some components and features may be found in only one figure, and components and features of the present disclosure which are illustrated in other figures can be easily inferred therefrom. The embodiments, geometrical configurations, materials mentioned and/or dimensions shown in the figures are optional, and are given for 15 exemplification purposes only. Therefore, the descriptions, examples, methods and materials presented in the claims and the specification are not to be construed as limiting but rather as illustrative only.

Moreover, although the embodiments of the skin material and corresponding compositions and structures thereof consist of certain geometrical configurations 20 as explained and illustrated herein, not all of these components and geometries are essential and thus should not be taken in their restrictive sense. It is to be understood, as also apparent to a person skilled in the art, that other suitable components and cooperation thereinbetween, as well as other suitable configurations, may be used for the skin material as will be briefly explained herein 25 and as can be easily inferred herefrom by a person skilled in the art.

In the present description, an embodiment is an example or implementation of the inventions. The various appearances of “one embodiment,” “an embodiment”, “some embodiments”, or “some implementations” do not necessarily all refer to the same embodiments. Although various features of the invention may be described

in the context of a single embodiment, the features may also be provided separately or in any suitable combination. Conversely, although the invention may be described herein in the context of separate embodiments for clarity, the invention may also be implemented in a single embodiment.

5 It is further to be understood that where the claims or specification refer to "a" or "an" element, such reference is not to be construed that there is only one of that element. It is to be understood that where the specification states that a component, feature, structure, or characteristic "may", "might", "can" or "could" be included, that particular component, feature, structure, or characteristic is not
10 required to be included.

Single-layer nanocomposite material implementations

In a first implementation, there is provided a stretchable nanocomposite material including a non-woven sheet of carbon nanotubes defining a network of nanotubes which are combined with an elastomeric polymer, as a single layer. Combination
15 of the nanotube network and polymer produces a polymer modified nanotube network. It should be noted that combination of the elastomeric polymer with the nanotubes refers to the association of the polymer with the nanotube surface or incorporation of the polymer within the nanotube network.

20 The nanotubes include carbon nanotubes (CNTs), boron nitride nanotubes (BNNTs), boron carbon nitrogen nanotubes (BCNNTs), silicon carbide nanotubes (SiCNTs), other nanoparticles, and hybrids or combinations thereof. The nanotubes include single-wall nanotubes and multi-wall nanotubes. The nanotubes may be substantially pure, doped, functionalized or a combination thereof.

25 It should be understood herein that nature of the nanotubes includes type (CNT, BNNT, BCNNT, SiCNT), dimension, structure (single-wall, multi-wall), state (doped/functionalized/pure).

The elastomeric polymer may include thermoplastic elastomers (such as thermoplastic polyurethanes), silicones, rubbers and combinations thereof. It

should be noted that stiffness is herein defined as a resistance to deformation by stretching or bending.

Stretchability is further defined herein as a capacity to elongate under a stress imposed in a primary direction (axial load). The elongation may be permanent and

5 further described as one-time stretching or maximal stretching. The elongation may be reversible and further described as reversible stretching. Stretchability is to be distinguished from bendability, the latter referring to a capacity to bend, i.e. to deform (with minimal area change and no substantial elongation) when an external load is applied perpendicularly to the primary direction.

10 It should be understood that the content of nanotubes and elastomeric polymer may vary to meet selected mechanical strength criteria without departing from the scope of the present invention. For example, the nanotube content of the material may be increased to enhance stiffness of the material, and the elastomeric polymer content may be increased to enhance stretchability of the material. Consequently,

15 manufacture of the stretchable nanocomposite material sheet may include controlling a nanotube:polymer ratio according to a mechanical strength criteria of the nanocomposite material sheet. Optionally, the material has a nanotube content ranges between 5 wt% and 90 wt%, an elastomeric polymer content between 10 wt% and 95 wt%, so as to reach a stiffness between 0.1 and 10 GPa and a

20 stretchability between 10 and 1000%. The resulting sheet is thin and porous, i.e. having a thickness between 0.005 mm and 1 mm, optionally between 0.05 mm and 0.15 mm, and a porosity between 10 and 90 vol%.

In another implementation, the single-layer nanocomposite material may be manufactured as a single-layer non-woven sheet of nanotubes modified with an
25 elastomeric polymer according to several methods. For example, in a first step, an elastomeric polymer component is dissolved within a suitable solvent (e.g. acetone, THF, choloroform). Separately, the nanotubes are dispersed (e.g. sonically) in a polymer non-solvent (e.g. alcohol). The components are then combined to form a homogeneous suspension. Control of the solvent system and
30 nanotube concentration is employed to fabricate sheets of tailorable composition

and properties, following filtration of the suspension, where the polymer is associated with the nanotube surface and the nanotube:polymer ratio can be tailored to adjust the properties from more extensible to more stiff. The material output of that method is a thin, porous, non-woven sheet of polyurethane-modified 5 nanotubes with a controllable, high nanotube content by weight.

Figure 1 is an SEM image of a single-layer NT-TPU composite manufactured according to the above-described method. Martinez-Rubi et al., Nanotube-buckypaper/polyurethane composites with enhanced mechanical properties, 20th ICCM, Copenhagen, 19-24th July 2015, and Ashrafi et al., Highly stretchable strain 10 sensor based on Polyurethane-Impregnated Carbon Nanotube Buckypaper, ProcASC, 2016, are herein incorporated by reference.

In some implementations, the resulting single-layer nanocomposite material is then pre-stretched. Figure 6 shows an example of pre-stressing and strain stress cycling of a nanotube-polyurethane composite to achieve stable cycling for a 15 stretchable material.

Multi-layer nanocomposite material implementations

In another implementation, there is provided a stretchable multi-layer nanocomposite material including at least one stretchable non-woven nanocomposite material sheet. As defined above, the stretchable non-woven 20 nanocomposite material sheet includes a network of nanotubes which are modified with an elastomeric polymer, as a single layer. At least one additional layer is laminated on the stretchable non-woven nanocomposite material sheet. The at least one additional layer may be another stretchable non-woven nanocomposite material sheet, a sheet of neat elastomeric polymer, or a sheet of reinforced 25 elastomer.

Advantageously, layering enables to reach a given material thicknesses while keeping the nanotube orientation primarily in the plane of the material. It should be noted that the nanotubes are randomly aligned within the plane of the single-layer

sheet, and this alignment is maintained during superposition of a plurality of single-layer sheets, while achieving a targeted thickness. In the exemplary implementation illustrated in Figure 7A, a multiple-layer nanocomposite material sheet is produced from a stack of superposed multiple single-layer sheets of the 5 same material by lamination.

In some implementations, the manufacture of the material may include controlling the number of layers in accordance with a targeted thickness for the multiple-layer nanocomposite material.

Experimentation shows that lamination of multiple single-layer non-woven 10 nanocomposite material sheets enables to increase a thickness of the material while substantially keeping or even improving the stretchability provided by a single-layer sheet of the same material. Additional properties may therefore be conferred by lamination such as enhanced mechanical resistance, enhanced stretchability and impermeability of the resulting multi-layer material.

15 It should be noted that the additional layers which are laminated on the single-layer non-woven nanocomposite sheet may therefore be made of any available material able to stretch and/or offering suitable mechanical resistance. Lamination offers multiple possibilities of layer combinations to obtain tailored mechano-chemical properties for the resulting material. Results of the lamination in terms of 20 mechanical properties depend on whether the laminated sheets are identical or different in composition, as well as on pressure and temperature. The resulting multi-layer material is thicker and densified that can retain a similar or enhanced range of properties to the initial non-laminated sheets.

25 Lamination techniques include hot pressing, vacuum bagging and autoclave. For example, single-layer polyurethane-modified nanotube sheets are first layered to form a stack of single-layer sheets and then laminated in a hot press to form a thicker, densified multiple-layer nanotube-polyurethane composite sheet.

Figures 2A and 2B offer schematic representation of lamination of multiple polyurethane-modified nanotube material layers (referred to as NT-PU layers in

these Figures or CNT-TPU within the description) and at least one neat polyurethane (PU) layer. The at least one additional polyurethane layer may be laminated as a surface layer as seen on Figure 2A or as an intermediate layer in a sandwich-like structure as seen on Figure 2B. Optionally, a release film as seen

5 on Figures 2A and 2B may be used on the external surface of the exposed layers of the material to facilitate release of the material subsequently to the hot pressing step. The sandwich-like combination from Figure 2B includes stiffer layers near the top and bottom and thereby provides high bending stiffness while using less of the stiff material and improving the reversible stretch capacity. Figure 7B provides a

10 photograph of such resulting sandwich-like combination as skin material. The structure of this material provides for an increased resistance to bending loads (i.e., higher modulus of elasticity in bending than the polymer) while minimizing the increase in actuation force (i.e., minimizing increase in the elastic modulus in tension).

15 The approach of layering also provides for additional control by varying the composition of the multiple-layer nanocomposite material sheet vertically from layer-to-layer, or across the surface area of the sheet.

In some implementations, the additional stretchable non-woven nanocomposite material layer may differ from the first stretchable non-woven nanocomposite

20 material layer in various ways. For example, the type of nanotubes may be varied such that the multi-layer nanocomposite material includes a first non-woven single-layer sheet of CNTs modified with thermoplastic polyurethane and a second non-woven single-layer sheet of BNNTs modified with thermoplastic polyurethane. Further optionally, the type of elastomeric polymer may be varied such that the

25 multi-layer nanocomposite material sheet includes a first non-woven single-layer sheet of CNTs modified with thermoplastic polyurethane and a second non-woven single-layer sheet of CNTs modified with silicone rubber. As it may be appreciated, one skilled in the art would understand that various combinations of layers may be performed according the type and number of available nanotubes and polymer

30 combinations.

Vertical variation of the mechanical properties may be performed for example by stacking, before lamination, single-layer nanocomposite material sheets having different compositions (nanotube nature and content, polymer nature and content).

Additionally, nanotubes from a first layer may be oriented in one direction whereas

- 5 the nanotubes from an adjacent layer may be oriented in another direction (within the plane of the sheet) to influence anisotropic properties.

In other implementations, the multi-layer material may have varying mechanical and physico-chemical properties along a surface area of the material. For example, higher stretch under uniform load (or higher stiffness) may be provided in certain

- 10 areas of the multi-layer material by decreasing (or increasing) the ratio of nanotube:polymer and increasing (or decreasing) the number of neat elastomeric polymer layers in these areas.

Variation of the mechanical properties across the surface area of the multiple-layer sheet may be obtained by joining side-by-side two or more multiple-layer or single-

- 15 layer nanocomposite material sheets. For example, two single-layer nanocomposite material sheets having different composition may be joined side-by-side to obtain another larger single-layer material sheet having varying mechanical properties across a surface area thereof. Lamination of one or more additional layers is performed on the larger single-layer material sheet to produce

- 20 the final multiple-layer nanocomposite material sheet having mechanical properties varying across the surface area of the sheet. Another way to obtain variation of the properties across the surface area may include producing two multiple-layer nanocomposite material sheets having two different sets of mechanical properties and joining them side-by-side through hot pressing to
- 25 produce a larger multiple-layer material sheet having mechanical properties varying across the surface area of the sheet.

Skin material implementations

The stretchable multi-layer nanocomposite material produced by lamination can be directly used as skin material to form a stretchable skin.

It should be noted that skin material refers herein to a continuous multiple-layer material that is applied to a sub-structure so as to form an outer surface of a structure. A compliant skin refers herein to a skin able to react in compliance with the shape of the sub-structure and the tensile load applied thereon.

A compliant skin includes bendable skins and stretchable skins. Skin material performance is tailored according to various criteria including the ratio of nanotubes to elastomeric polymer, the type of nanotubes, the functionalization of the nanotubes, the lamination pattern of the multiple-layer material and the composition of each layer. Stretchable skin material may be advantageously used as a morphing or deployable skin.

In some implementations, the combined stretchability (offered by the elastomeric polymer) and stiffness (offered by the nanotubes) of the multi-layer nanocomposite material enables to produce a suitable morphing skin that can change shape according to the sub-structure modifications and/or load applied thereon, while maintaining sufficient stiffness for keeping integrity of the outer surface and associated mechano-chemical properties.

To ensure adequate mechanical resistance and stretchability, the at least one layer of nanocomposite material forming the skin material may be characterized by a nanotube content between 10 wt% and 90 wt%, optionally between 10 and 45 wt%, further optionally between 20 and 40 wt%. Lamination may be performed to obtain a skin material with a thickness between 0.05 mm and 20 mm, optionally between 0.5 mm and 1.5 mm, further optionally between 0.5 mm and 3 mm, while keeping the morphing ability.

Morphing or deployable structure implementations

The multi-layer nanocomposite material is used as a skin material to form a morphing or deployable structure. The skin material is directly applied as a stretchable skin on an underlying sub-structure, providing a continuous aerodynamic surface and supporting loads across the underlying sub-structure while enabling significant stretch (area change).

It should be noted that direct application of the skin material as a skin refers to the ability of using the skin material defined herein as a skin without the need to combine the skin material with additional reinforcing means, layer or material. It

should also be noted that the skin material is attached to the surface of the sub-structure by means available to one skilled in the art according to the application and material surface of the sub-structure. It should further be noted that choice of the sub-structure design and material is to be chosen in accordance with the skin material to be used as a skin.

It should further be noted that the skin material may be continuously supported by the sub-structure in certain areas and discontinuously supported in other areas of the resulting structure.

For example, the skin may be applied to a substructure (see Figure 9B) to form a stretchable morphing structure (see Figure 9A).

In some implementations, the method of manufacture of the stretchable skin, based on the multi-layer nanocomposite material described herein, includes tailoring the mechanical resistance properties and stretchability to the outer surface of the underlying sub-structure to which the skin is attached. For example, the sub-structure may include an unfolding area and the stretchable skin may be manufactured such that a portion thereof is capable of higher stretching when the corresponding area of the sub-structure is unfolded.

The morphing structures encompassed herein include morphing wings in aeronautic domain. The deployable structures encompassed herein include

deployable habitats such as deployable military habitats and deployable space habitats.

In some implementations, the skin material defined herein may be used as part of a morphing wing to form a morphing leading edge in place of slats in a high-lift

5 system. The multi-layer nanocomposite material is used as skin material to form the morphing leading edge of the wing, thereby increasing the wing area by changing shape while maintaining a continuous surface due to the stretch of the skin material. Presence of the nanotube network offers required stiffness to support aerodynamic loads and minimize secondary support-structure weight.

10 It should be understood that the laminated non-woven sheets of nanotubes modified with elastomeric polymer may be used as a skin material on any parts of a wing or plane, including wing trailing edge, tail fin or nose cone, to offer a morphing continuous surface and improve aerodynamic efficiency for any take-off, landing and cruise conditions, and to improve maneuverability of the aircraft.

15 In other implementations, the skin material may be used as at least a portion of the outer surface of a deployable structure and the material may be maintained in a stretched state by internal air pressure when the support structure is deployed, the internal air pressure being higher than a pressure external to the deployable structure.

20 An example of tailoring mechanical properties over the area of the multilayer assembly (or skin) would be to have higher loadbearing ability in some areas (e.g., right at the front of the leading edge or in an impact-prone location) and hence accepting less stretch in those areas. The location where the stretchable skin is bonded to the rest of the structure can also be subject to stress concentration and
25 hence modulating the mechanical properties approaching that location may be beneficial.

For example, one or more lower stiffness surface or internal layers, are relevant for surface finish and optimizing properties, respectively. Adding a surface layer of

different nanotube content, neat elastomer, or a different elastomer composition could be beneficial for wear, paintability or bonding between the skin and structure.

It should be noted that maximal reversible stretch capacity may be favored when

developing a stretchable skin for morphing structures, whereas maximal one-time

5 stretch may be favored when developing skin for deployable structures. In addition, differences in impact resistance may be tailored to the shape of the plane or habitat.

Multifunctional material implementations

Advantageously, the nanotube network may be selected and optimized to meet

10 the requirements of a stretchable skin material while simultaneously performing one or more functions including heating, sensing, EMI shielding, neutron shielding and combinations thereof. A multifunctional skin material and resulting multifunctional morphing or deployable structures are thereby provided.

In some implementations, carbon nanotubes (CNTs) are selected to provide an

15 electrical network within the skin material and thereby impart at least one of a heating function or a sensing function to the skin material.

For example, the heating skin material may be applied to a wing such that the outer

surface of the wing is able to be heated to control the temperature-dependent mechanical properties and/or make the skin de-iceable in flight by heating to allow

20 morphing thereof.

In another example, the sensing skin material may be applied to a deployable

structure and thereby provides health-monitoring of the outer surface to detect damage to the skin resulting from cycling or impacts.

In yet another example, the conductive skin material may be applied to form an

25 enclosure and provides EMI shielding to the inside of the enclosure.

In other implementations, BNNTs may be used in place of or in addition to CNTs

to provide thermal properties to the skin material. The BNNTs network of the

composite material thereby provides neutron radiation shielding to a deployable space structure.

It should be understood that any one of the above-mentioned aspects of each nanocomposite sheet, multi-layer nanocomposite material, skin material, morphing and deployable structures, and manufacture method related thereto may be combined with any other of the aspects thereof, unless two aspects clearly cannot be combined due to their mutually exclusivity. For example, the various manufacture steps and/or structural elements of the non-woven nanocomposite material sheet described herein-above, herein-below and/or in the appended Figures, may be combined with any of the general manufacture method or features of the multifunctional morphing structure descriptions appearing herein and/or in accordance with the appended claims.

EXPERIMENTAL RESULTS

Experiments have been performed to evaluate the mechanical properties of several samples of polyurethane-modified CNT non-woven sheets, and of single sheets versus multilayer laminated material.

5 In this section, the term “about” means within an acceptable error range for the particular value as determined by one of ordinary skill in the art, which will depend in part on how the value is measured or determined, i.e. the limitations of the measurement system. It is commonly accepted that a 10% precision measure is acceptable and encompasses the term “about”. The symbol “~” is to be understood
10 as “about”.

UAFTM 472 refers to a polyurethane adhesive tape based on thermoplastic ester, and TecoflexTM 80A and 100A are polyether based aliphatic thermoplastic polyurethanes.

15 Table 1. Comparison of tensile properties of several polyurethane-modified CNT sheets using industrial grade MWCNTs to the neat polyurethanes.

Material	Modulus (MPa)	Strength (MPa)	Failure Strain
UAF 472 (0%CNT)	~100	~6	>500%*
UAF 472 - 20%CNT	~350	~28	~200%
UAF 472 – 30%CNT	~2300	~34	~80%
Tecoflex 80A (0%CNT)	~7	~2.5	660%*,**
Tecoflex 80A-25%CNT	~400	~35	~260%
Tecoflex 100A (0%CNT)	~45	~10	370%*,**

Tecoflex 100A-25%CNT	~1100	~50	~170%
----------------------	-------	-----	-------

*did not fail in test, **literature value

Table 2. Comparison of a single CNT-TPU layer sample and a multilayer laminate composed of fifteen layers thereof.

Number of Layers	Thickness	Modulus (MPa)	Strength (MPa)	Failure Strain
1	100 μ m	730 \pm 90	24 \pm 2	0.58 \pm 0.1
15 (laminated)	800 μ m	450 \pm 60	28 \pm 4	1.2 \pm 0.8

5

Table 2 shows that lamination of multiple layers can modify the mechanical properties, in particular the modulus and the failure strain, in addition to increasing thickness. In this case, fifteen (15) layers were employed and the final thickness was less than that of the combined constituent layers prior to lamination. As there 10 is no significant reduction in mass, the lamination step significantly decreases the porosity and hence increases the volume content of both CNTs and polyurethane.

In other cases (e.g., see Table 3) higher stiffness is observed from the densified multilayer. These exemplary cases indicate that morphological changes are dependent on both the single layer composition and the lamination conditions, in 15 addition to a simple layering effect to increase thickness. While lamination has non-negligible effect, it is possible to tailor properties in a similar range where they provide much higher stiffness than an elastomer skin but still a high stretchability. The overall composition may be affected by pressing conditions, and lamination may also reduce the impact of roughness of the individual layers.

Table 3. Comparison of a single CNT-TPU layer sample with hot-press compressed and multilayer laminated versions composed of several layers thereof.

	Density (g/cm³)	Elastic modulus (MPa)	Strength (MPa)	Failure Strain
Single layer	0.76	460	25	0.71
Single layer, pressed	0.85	560	25	0.46
3-layer, laminated	1.11	640	34	0.39
5-layer, laminated	1.16	940	41	0.39

5 Referring to Figure 3, cyclic tests were also performed to estimate the reversible stretch capability for a non-woven polyurethane-modified CNT sheet (from Table 1) and the same type of neat polyurethane sheet. The substantially vertical loop shows reversible stretch with a modulus (slope of the line) much greater than the neat polyurethane (substantially horizontal loop). Cycling with over 20%

10 deformation was therefore observed with greatly increased slope (higher stiffness), which confirms the nanocomposite can provide the target stretch with substantially better load carrying capacity. Based on these and similar measurements for nanotube-polyurethane composite sheets, a likely range for elastic strain and stiffness (elastic modulus) of skin material based on elastomeric polymer-modified

15 nanotubes was established.

Table 4. Comparative properties for samples of skin material of about 1.5 mm in thickness and derived from the combination of a particular CNT-TPU sheet (about 0.1 mm in thickness) and a neat polyurethane layer.

material	Tensile Modulus (MPa)	Reversible Strain (%)	Bending Modulus (MPa)
TPU sheet	7	40	16
Sandwich (CNT-TPU TPU CNT-TPU)	13	28	105
Sandwich (2CNT-TPU TPU 2CNT-PU)	20	23	175
Individual CNT-TPU layer*	120	13	NA*

*Individual CNT-TPU layer is about 100 microns thick and too thin to measure in

5 this bending test

Referring to Table 4, in an example where polyurethane-modified CNT sheets were laminated with neat polyurethane layers to form a sandwich architecture (e.g., as seen in Figure 7B), the bending stiffness of the skin (as represented by the modulus of elasticity in bending) is substantially increased while minimizing the 10 increase in tensile stiffness (as represented by the tensile modulus) and hence the actuator force required to stretch the skin and structure. This skin architecture also increases the stretchability (reversible strain) in comparison to the individual NT-PU layer. Table 4 lists properties for example skin materials using this sandwich architecture.

15 It should be noted that the estimated ability of the resulting skin material to stretch by at least 20%, predicts for example that the skin material should provide sufficient elasticity to allow a leading edge of an airfoil to droop and to accommodate stretching with sufficient stiffness and strength for aircraft wings.

Other experiments have been performed to validate heating capacity of the 20 polyurethane-CNTs skin material by powering the material connected to

electrodes. Figure 5 illustrates the use of the carbon nanotube network of the skin for electrical heating. Test conditions differed from a real wing skin in terms of size and heat losses of the surroundings but the graphs from Figure 6 however validate that power density suitable for de-icing requirements may be reached and that the 5 skin withstands suitably high temperature. Those small voltages lead to high power density because of the small area. The experimentations demonstrate that the skin can put out high power and withstand high temperature.

Figures 8A and 8B illustrate a 12" x 36" skin manufactured with varied composition in both the vertical (thickness) direction (neat polyurethane sheet layered between 10 CNT-TPU nanocomposite layers) and the horizontal (surface) direction (adjacent CNT-TPU sheets joined together to make up the surface).

CLAIMS

1. A stretchable multiple-layer nanocomposite material comprising at least:
 - a nanocomposite material layer comprising a network of nanotubes modified with an elastomeric polymer; and
 - 5 at least one additional layer laminated with the nanocomposite material layer.
2. The material of claim 1, wherein the network of nanotubes is provided by a non-woven sheet of nanotubes.
- 10 3. The material of claim 2, wherein the nanotubes are randomly oriented within the plane of the nanocomposite material layer.
4. The material of any one of claims 1 to 3, wherein the nanotubes comprise carbon nanotubes, boron-nitride nanotubes, boron-carbon-nitrogen nanotubes, silicon-carbide nanotubes, other nanoparticles, hybrids thereof or a combination thereof.
- 15 5. The material of any one of claims 1 to 4, wherein the nanotubes include single-walled nanotubes and multi-walled nanotubes.
6. The material of any one of claims 1 to 5, wherein the nanocomposite material layer has a nanotube content between 5 wt% and 90 wt%.
- 20 7. The material of claim 6, wherein the nanotube content is between 10 wt% and 40 wt%.
8. The material of any one of claims 1 to 7, wherein the elastomeric polymer comprises thermoplastic elastomers, thermoplastic polyurethane, rubber, silicone rubber or a combination thereof.
9. The material of any one of claims 1 to 8, wherein the nanocomposite material 25 layer is a first nanocomposite material layer and the at least one additional layer is

another nanocomposite material layer comprising nanotubes differing in nature from the nanotubes of the first nanocomposite material layer.

10. The material of any one of claims 1 to 8, wherein the nanocomposite material

layer is a first nanocomposite material layer and the at least one additional layer is

5 another nanocomposite material layer having a nanotube content which is different from the first nanocomposite material layer.

11. The material of any one of claims 1 to 8, wherein the nanocomposite material

layer is a first nanocomposite material layer and the at least one additional layer is

another nanocomposite material layer similar to the first nanocomposite material

10 layer.

12. The material of any one of claims 1 to 8, wherein the at least one additional

layer is a neat polymer layer, a composite polymer layer, or a reinforced polymer

layer including at least one elastomeric polymer.

13. The material of claim 12, wherein the elastomeric polymer of the at least one

15 additional layer is the same as the one included in the nanocomposite material layer.

14. The material of claim 12, wherein the elastomeric polymer of the at least one

additional layer is different from the one included in the nanocomposite material

layer.

20 15. The material of any one of claims 1 to 14, having mechanical properties varying across a surface area thereof, and wherein at least the nanocomposite material layer has mechanical properties varying across a surface area thereof.

16. The material of claim 15, having a nanotube content varying across the surface area.

25 17. The material of claim 16, wherein the nanotube content is higher in a specific area of the nanocomposite layer to enhance stiffness of the material.

18. The material of any one of claims 15 to 17, having a polymer content varying across the surface area.
19. The material of claim 18, wherein the polymer content is higher in another specific area of the multiple-layer nanocomposite material to enhance stretchability
5 of the material.
20. The material of any one of claims 15 to 19, wherein the nature of elastomeric polymer changes across the surface area of the material.
21. The material of any one of claims 15 to 20, wherein the nature of the nanotubes changes across the surface area of the material.
10
22. The material of any one of claims 1 to 21, comprising a plurality of layers which number varies across the surface area of the material.
23. The material of any one of claims 1 to 22, comprising a number of layers tailored to obtain a given material thickness and properties profile adapted for use as a skin material.
15
24. The material of claim 23, having a nanotube:polymer ratio tailored to provide a given stretchability profile to the skin material for application in a morphing structure or a deployable structure.
25. A skin material for direct application as a skin on a substructure, the skin material comprising a nanotube network modified with a polymer.
20
26. The skin material of claim 25, wherein the polymer comprises an elastomeric polymer selected to provide stretchability to the skin material.
27. The skin material of claim 25 or 26, comprising a non-woven nanotube layer modified with the polymer.
25
28. The skin material of claim 27, comprising at least one additional layer which is laminated on the non-woven nanotube layer modified with the polymer.

29. The skin material of claim 28, wherein the at least one additional layer is one or more of a nanocomposite layer.

30. The skin material of claim 29, wherein the at least one additional layer is a layer of neat or reinforced elastomeric polymer comprising thermoplastic polyurethane, 5 silicone rubber, rubber or a combination thereof.

31. The skin material of any one of claims 25 to 30, comprising a plurality of laminated layers tailored to obtain a material thickness between 0.05 mm and 20 mm.

32. The skin material of claim 31, wherein the material thickness is between 0.5 10 mm and 3 mm.

33. The skin material of any one of claims 25 to 32, having a composition tailored to provide a reversible stretch capacity from 5 to 50% and an elastic modulus from 50 MPa to 10 GPa.

34. The skin material of claim 33, wherein the reversible stretch capacity is of 20% 15 and the elastic modulus is of 500 MPa.

35. The skin material of any one of claims 25 to 34, having a nanotube:polymer ratio tailored to provide a one-time stretch capacity of at least 100% and a stiffness from 50 MPa to 10 GPa.

36. The skin material of claim 35, wherein the one-time stretch capacity is of at 20 least 200% stretch and the stiffness of 500 MPa.

37. A stretchable skin material being the material defined in any one of claims 1 to 24.

38. A skin being directly applied onto a support surface as the material as defined in any one of claims 1 to 36.

39. The skin of claim 38, wherein the nature of the nanotubes included in the material are selected to provide heating, sensing, EMI shielding, neutron shielding properties or a combination thereof to the skin.

40. A morphing structure produced by direct application of a skin material as 5 defined in any one of claims 25 to 37 onto a support structure.

41. The morphing structure of claim 40, being at least a portion of a morphing aircraft, comprising a wing leading edge, a wing trailing edge, a tail fin, a nose cone or a combination thereof.

42. A deployable structure produced by direct application of a skin material as 10 defined in any one of claims 25 to 37 onto a deployable support structure.


43. The deployable structure of claim 42, wherein the deployable support structure reversibly unfolds and/or inflates resulting in stretching of the skin material.

44. The deployable structure of claim 42 or 43, wherein the skin material is maintained in a stretched state by internal air pressure when the support structure 15 is deployed, the internal air pressure being higher than a pressure external to the deployable structure.

45. The deployable structure of any one of claims 42 to 44, being at least a portion of a deployable space habitat or a deployable military habitat.

46. A structure including a sub-structure and a skin as defined in claim 38 or 39 to 20 form at least part of an outer surface of the structure by application onto the sub-structure.

FIGURES

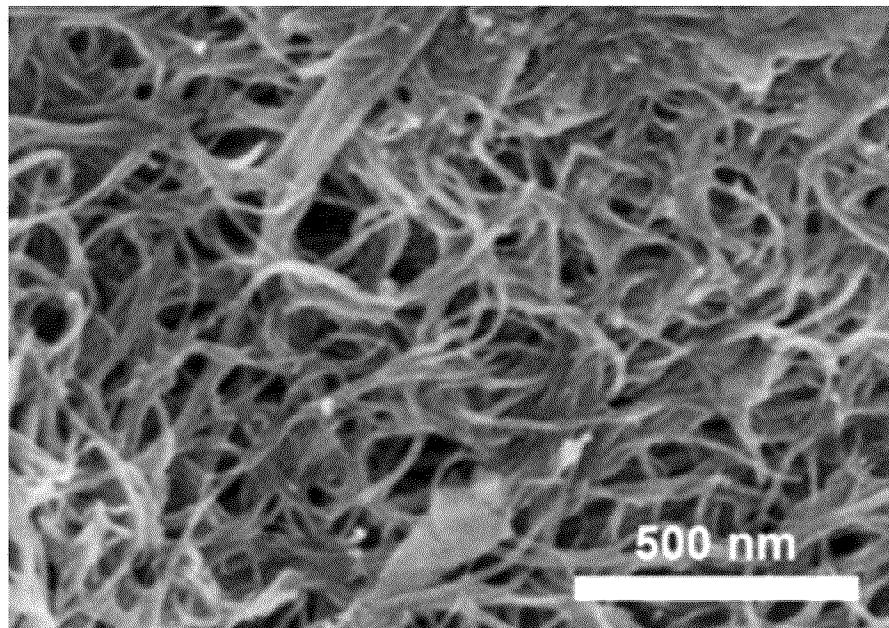

5

FIG. 1

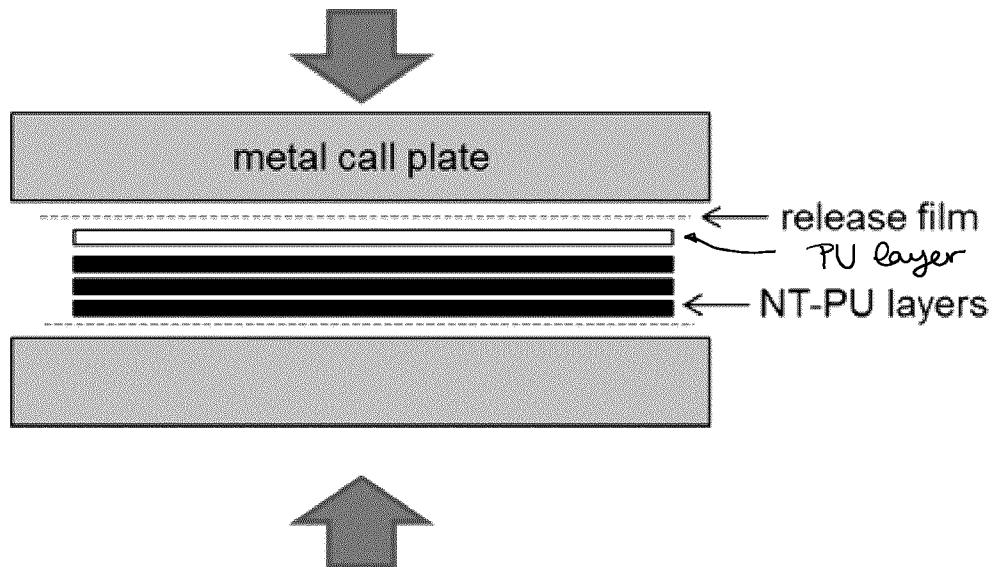


FIG. 2A

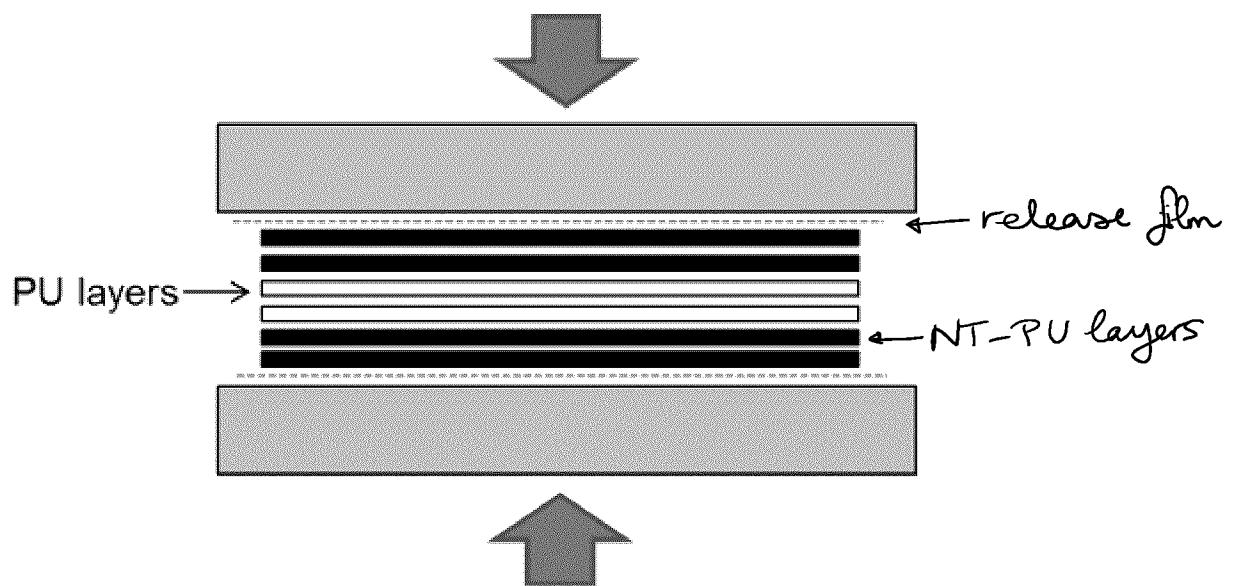


FIG. 2B

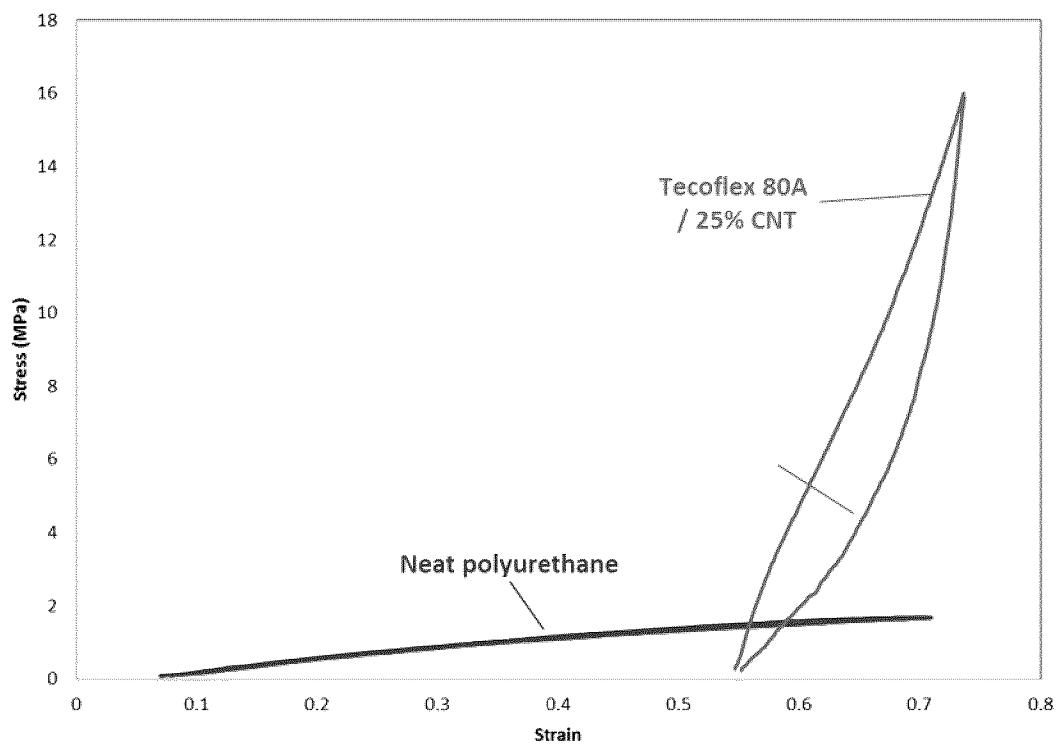


FIG. 3

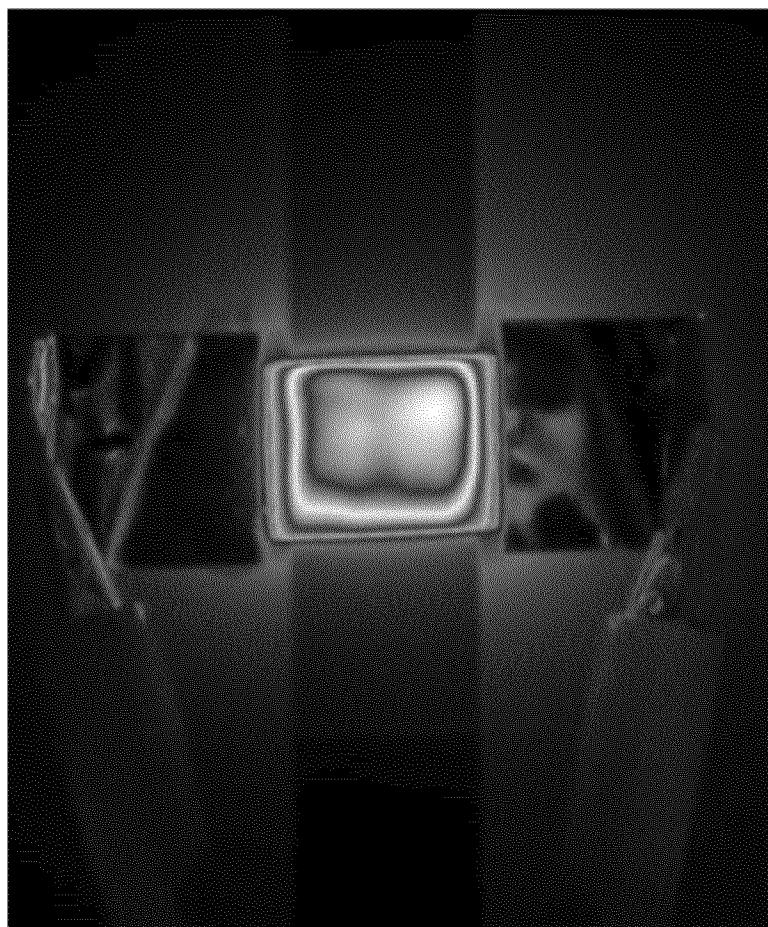


FIG. 4

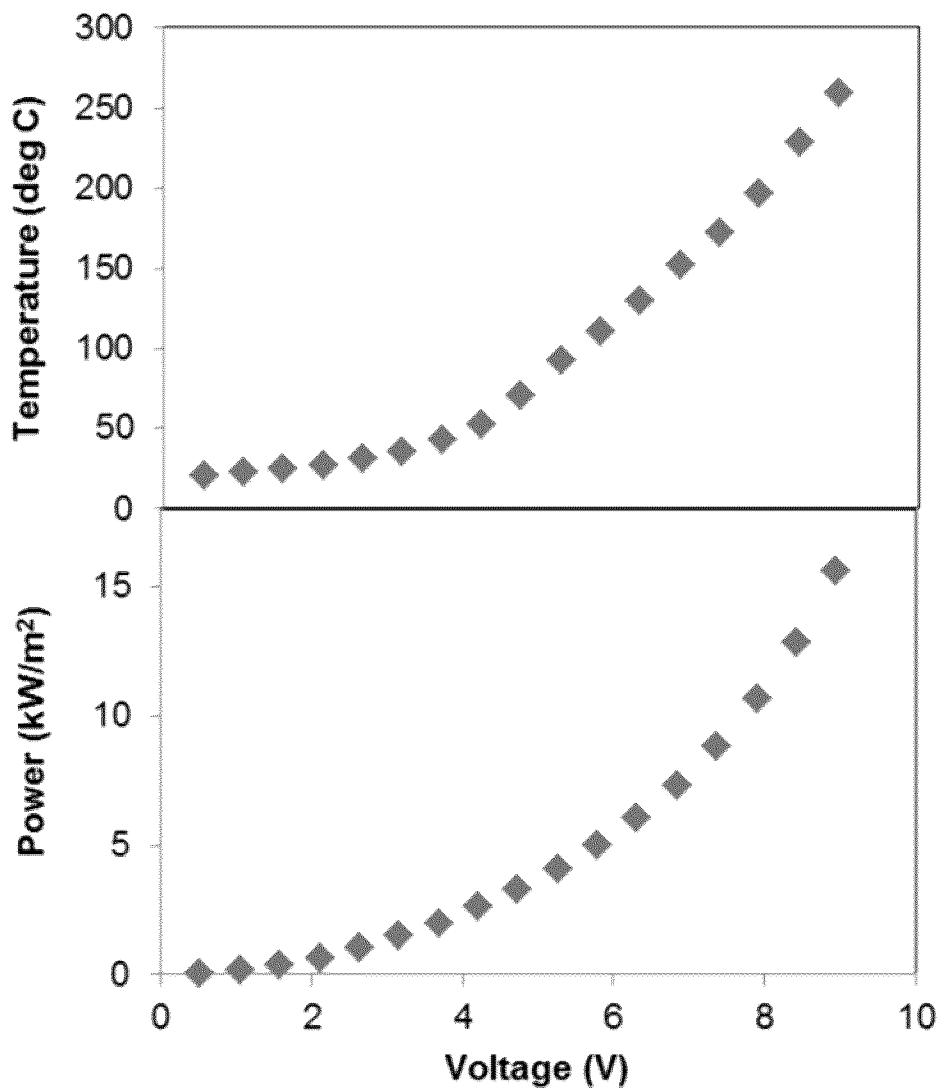


FIG. 5

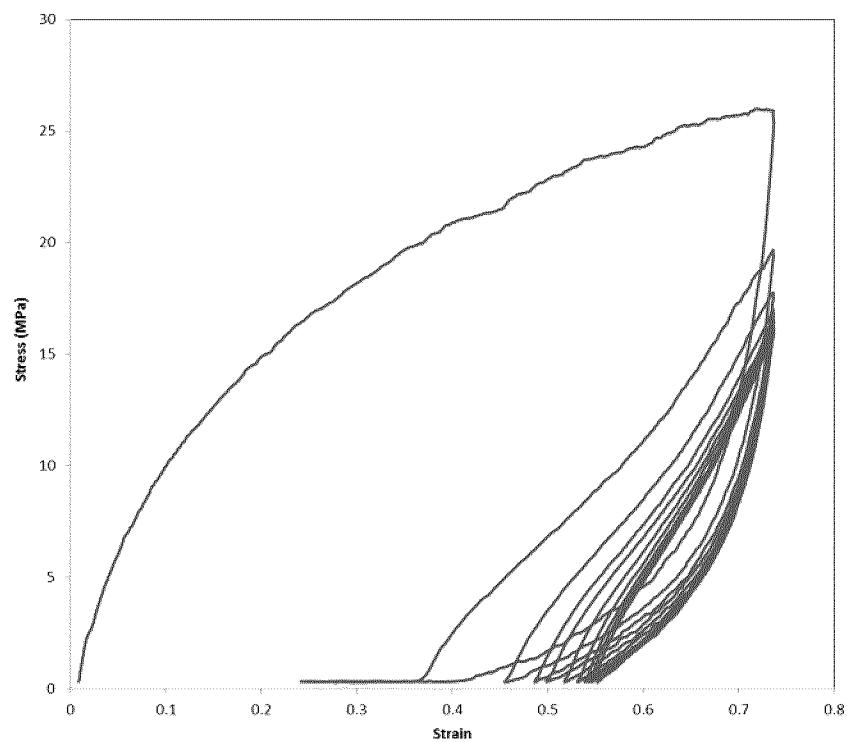


FIG. 6

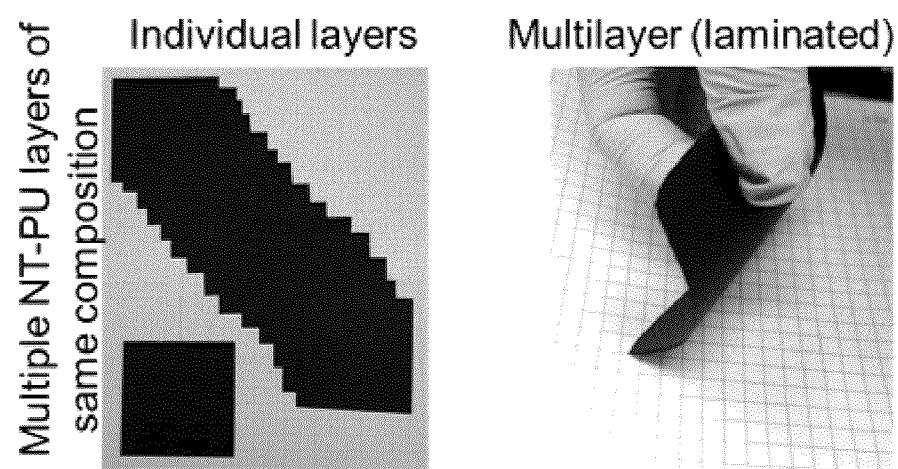


FIG. 7A

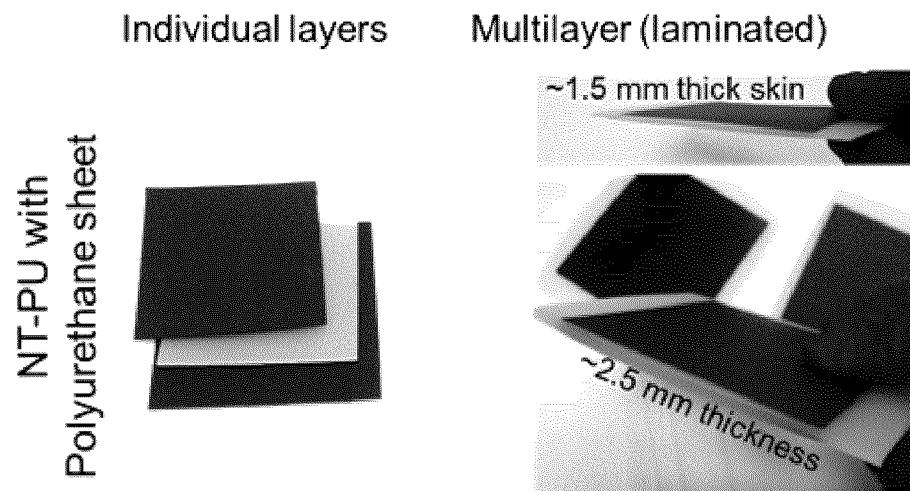


FIG. 7B

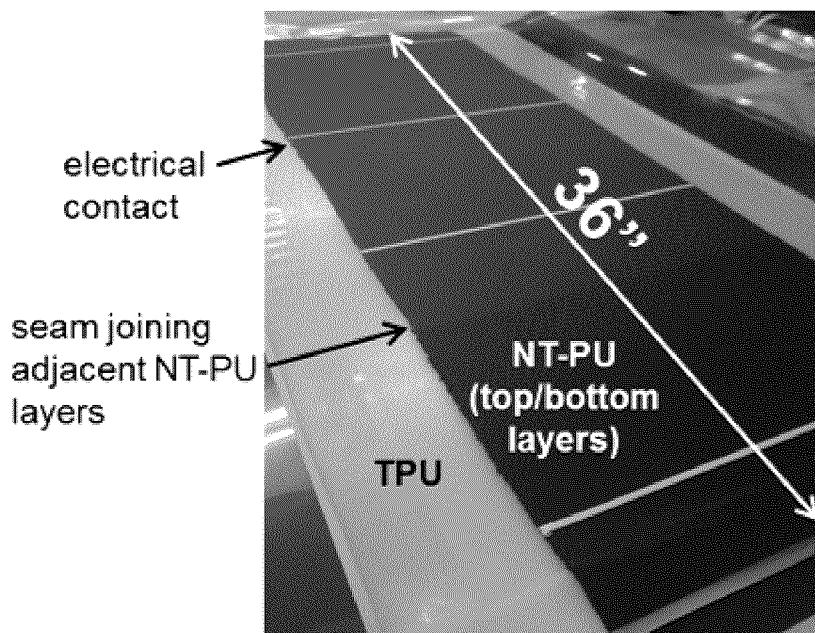


FIG. 8A

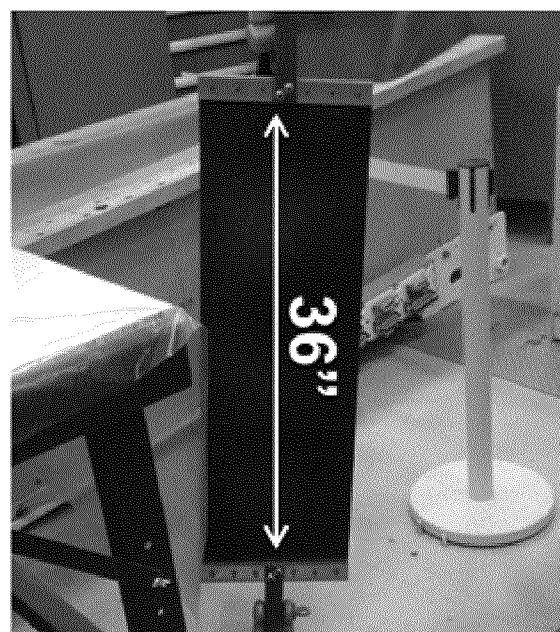


FIG. 8B

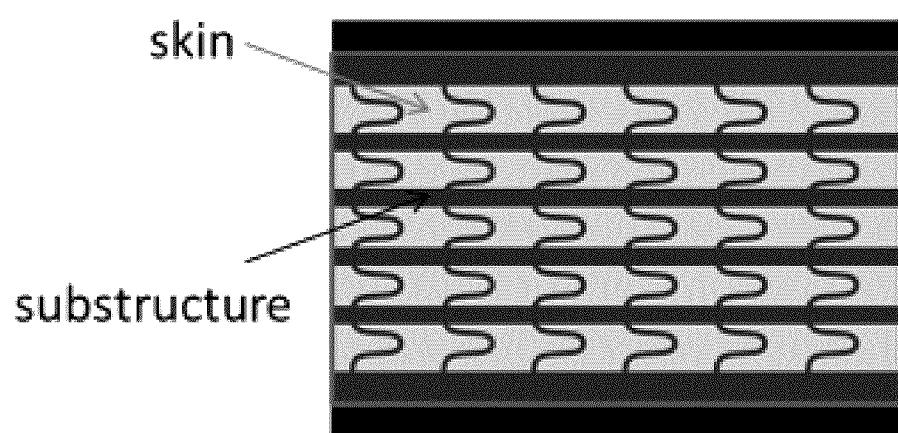


FIG. 9A

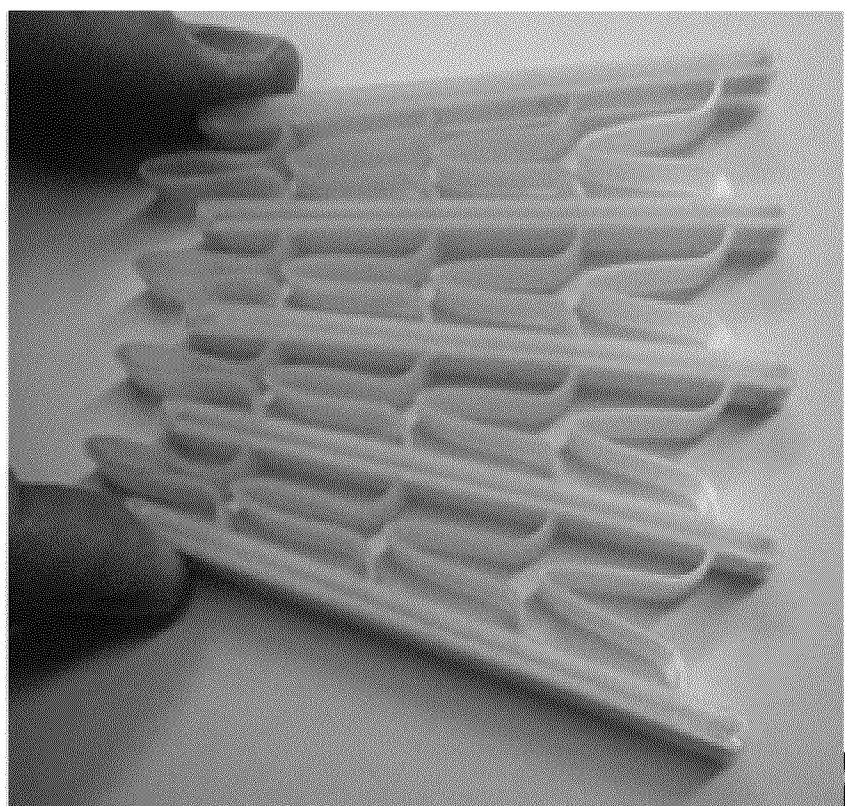


FIG. 9B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2018/050571

A. CLASSIFICATION OF SUBJECT MATTER
IPC: **B32B 5/00** (2006.01), **B32B 33/00** (2006.01), **B82Y 30/00** (2011.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B32B, B82Y

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

Keywords searched: (nanotube and (stretch* or elongate* or elastic) and (elastomer* or thermoplastic polyurethane or rubber or silicone) and (nanocomposite or composite or laminate or layer or sheet or web) and (modif* or incorp* or dispers* or impregnate* or infiltrat* or filtrate*))
Publication Date: = <2018/05/14; IPC = B32B* or B82Y*

Databases searched and search string:

Questel Orbit: Keywords + Publication date + Pub. Date

Canadian Patent Database (CPD): Keywords + Publication date + Pub. Date

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015/0147573 A1 (ZHANG, M. et al.) 28 May 2015 (28-05-2015)	25-30, 38-40, 42, 45 & 46
Y	Abstract; and paragraphs 0034, 0038, 0042, 0213, 0222-0226, 0321, 0322, 0392, 0412, 0536 & 0714.	1-46
Y	US 2010/0264376 A1 (KORZHENKO, A. et al.) 21 October 2010 (21-10-2010) Abstract; paragraphs 0001-003, 0005-0007, 0009, 0019, 0023-0026, 0040, 0049, 0050, 0059, 0060, 0064, 0067 & 0068; and claims 1, 3, 4 & 5.	1-46
Y	US 2010/0308279 A1 (ZHOU, C. et al.) 9 December 2010 (09-12-2010) Abstract; paragraphs 0003, 0005, 0067-0069, 0075 & 0128; and claims 1, 3, 9 & 11.	1-46
Y	US 2011/0260116 A1 (PLEE, D. et al.) 27 October 2011 (27-10-2011) Abstract; paragraphs 0002, 0010-0015, 0017, 0019, 0022, 0029, 0031, 0032, 0043, 0047, 0083, 0088, 0103, 0117, 0123, 0132 & 0136; and claims 1, 3 & 8.	1-46

Further documents are listed in the continuation of Box C.

See patent family annex.

* “A” “E” “L” “O” “P”	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier application or patent but published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family
--------------------------------------	--	--

Date of the actual completion of the international search
20 July 2018

Date of mailing of the international search report
31 July 2018 (31-07-2018)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 819-953-2476

Authorized officer

Benjamin Chan (819) 639-8445

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2018/050571

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2007/0213450 A1 (WINEY, K.I. et al.) 13 September 2007 (13-09-2007) Abstract; paragraphs 0003, 0004, 0007, 0017, 0020, 0023 & 0025; and claims 1, 6 & 28.	1-46
A	CA 2,774,987 A1 (SHAH, T.K. et al.) 26 May 2011 (26-05-2011) Whole document.	
A	CA 2,776,999 A1 (SHAH, T.K. et al.) 13 October 2010 (13-10-2010) Whole document.	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2018/050571

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2015147573A1	28 May 2015 (28-05-2015)	US2015147573A1 US9512545B2 AU2005335123A1 AU2005335123B2 CN101437663A CN101437663B CN103276486A CN103276486B CN105696138A CN105696139A EP1814713A2 EP1814713A4 HK1224344A1 JP2008523254A JP5350635B2 JP2012111691A JP5799363B2 JP2016020552A JP6088008B2 JP2016053240A JP6088075B2 JP2016065358A JP6088076B2 JP2015134981A JP6150840B2 JP2016130025A JP6152192B2 JP2017002456A JP6282327B2 JP2017031549A JP6312759B2 JP2013174038A JP2016216888A JP2018066106A KR20130115399A KR101458846B1 KR20080009043A KR101536669B1 US2008170982A1 US8926933B2 US2015308018A1 US9481949B2 US2016083872A1 US9605363B2 US2016312387A1 US9631301B2 US2017001866A1 US9688536B2 US9815699B1 US2017327377A1 US2016251778A1 US9845554B2 US2017137290A1 US9862607B2 US2017096750A1 US9944529B2 US2016273133A1 WO2007015710A2 WO2007015710A3	28 May 2015 (28-05-2015) 06 December 2016 (06-12-2016) 08 February 2007 (08-02-2007) 03 February 2011 (03-02-2011) 20 May 2009 (20-05-2009) 19 June 2013 (19-06-2013) 04 September 2013 (04-09-2013) 15 December 2017 (15-12-2017) 22 June 2016 (22-06-2016) 22 June 2016 (22-06-2016) 08 August 2007 (08-08-2007) 26 July 2017 (26-07-2017) 18 August 2017 (18-08-2017) 03 July 2008 (03-07-2008) 27 November 2013 (27-11-2013) 14 June 2012 (14-06-2012) 21 October 2015 (21-10-2015) 04 February 2016 (04-02-2016) 01 March 2017 (01-03-2017) 14 April 2016 (14-04-2016) 01 March 2017 (01-03-2017) 28 April 2016 (28-04-2016) 01 March 2017 (01-03-2017) 27 July 2015 (27-07-2015) 21 June 2017 (21-06-2017) 21 July 2016 (21-07-2016) 21 June 2017 (21-06-2017) 05 January 2017 (05-01-2017) 21 February 2018 (21-02-2018) 09 February 2017 (09-02-2017) 18 April 2018 (18-04-2018) 05 September 2013 (05-09-2013) 22 December 2016 (22-12-2016) 26 April 2018 (26-04-2018) 21 October 2013 (21-10-2013) 07 November 2014 (07-11-2014) 24 January 2008 (24-01-2008) 15 July 2015 (15-07-2015) 17 July 2008 (17-07-2008) 06 January 2015 (06-01-2015) 29 October 2015 (29-10-2015) 01 November 2016 (01-11-2016) 24 March 2016 (24-03-2016) 28 March 2017 (28-03-2017) 27 October 2016 (27-10-2016) 25 April 2017 (25-04-2017) 05 January 2017 (05-01-2017) 27 June 2017 (27-06-2017) 14 November 2017 (14-11-2017) 16 November 2017 (16-11-2017) 01 September 2016 (01-09-2016) 19 December 2017 (19-12-2017) 18 May 2017 (18-05-2017) 09 January 2018 (09-01-2018) 06 April 2017 (06-04-2017) 17 April 2018 (17-04-2018) 22 September 2016 (22-09-2016) 08 February 2007 (08-02-2007) 09 April 2009 (09-04-2009)

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/CA2018/050571

US2010264376A1	21 October 2010 (21-10-2010)	US2010264376A1 CN102361929A EP2236556A1 FR2943349A1 FR2943349B1 JP2010222582A KR20110118831A WO2010109118A1	21 October 2010 (21-10-2010) 22 February 2012 (22-02-2012) 06 October 2010 (06-10-2010) 24 September 2010 (24-09-2010) 26 October 2012 (26-10-2012) 07 October 2010 (07-10-2010) 01 November 2011 (01-11-2011) 30 September 2010 (30-09-2010)
US2010308279A1	09 December 2010 (09-12-2010)	US2010308279A1 AU2006292615A1 CA2622559A1 EP1924631A2 EP1924631A4 JP2009508999A WO2007035442A2 WO2007035442A3	09 December 2010 (09-12-2010) 29 March 2007 (29-03-2007) 29 March 2007 (29-03-2007) 28 May 2008 (28-05-2008) 07 March 2012 (07-03-2012) 05 March 2009 (05-03-2009) 29 March 2007 (29-03-2007) 22 November 2007 (22-11-2007)
US2011260116A1	27 October 2011 (27-10-2011)	US2011260116A1 US8808580B2 CN102947372A CN102947372B EP2561011A1 EP2561011B1 FR2959231A1 FR2959231B1 KR20130092420A KR101802545B1 WO2011131890A1	27 October 2011 (27-10-2011) 19 August 2014 (19-08-2014) 27 February 2013 (27-02-2013) 11 May 2016 (11-05-2016) 27 February 2013 (27-02-2013) 06 January 2016 (06-01-2016) 28 October 2011 (28-10-2011) 20 April 2012 (20-04-2012) 20 August 2013 (20-08-2013) 28 December 2017 (28-12-2017) 27 October 2011 (27-10-2011)
US2007213450A1	13 September 2007 (13-09-2007)	US2007213450A1 US7285591B2	13 September 2007 (13-09-2007) 23 October 2007 (23-10-2007)
CA2774987A1	26 May 2011 (26-05-2011)	CA2774987A1 AU2010321535A1 AU2010321535B2 BR112012007560A2 CN102648086A EP2504161A1 EP2504161A4 JP2013511413A KR20120101373A US2011123735A1 WO2011063423A1	26 May 2011 (26-05-2011) 05 April 2012 (05-04-2012) 26 March 2015 (26-03-2015) 16 August 2016 (16-08-2016) 22 August 2012 (22-08-2012) 03 October 2012 (03-10-2012) 09 April 2014 (09-04-2014) 04 April 2013 (04-04-2013) 13 September 2012 (13-09-2012) 26 May 2011 (26-05-2011) 26 May 2011 (26-05-2011)
CA2776999A1	13 October 2011 (13-10-2011)	CA2776999A1 AU2010259234A1 AU2010259234B2 AU2010321536A1 AU2010350689A1 AU2010350690A1 AU2010350691A1 AU2010353294A1 AU2010353294B2 BR112012012260A2 BR112012012264A2 CA2750484A1 CA2776411A1 CA2776752A1 CA2777001A1 CA2780354A1 CN102317200A CN102317200B CN102596713A	13 October 2011 (13-10-2011) 11 August 2011 (11-08-2011) 20 November 2014 (20-11-2014) 19 April 2012 (19-04-2012) 19 April 2012 (19-04-2012) 19 April 2012 (19-04-2012) 07 June 2012 (07-06-2012) 29 January 2015 (29-01-2015) 26 April 2016 (26-04-2016) 26 April 2016 (26-04-2016) 16 December 2010 (16-12-2010) 13 October 2011 (13-10-2011) 13 October 2011 (13-10-2011) 26 May 2011 (26-05-2011) 17 November 2011 (17-11-2011) 11 January 2012 (11-01-2012) 09 April 2014 (09-04-2014) 18 July 2012 (18-07-2012)

CN102596715A	18 July 2012 (18-07-2012)
CN102597304A	18 July 2012 (18-07-2012)
CN102597304B	11 February 2015 (11-02-2015)
CN102597345A	18 July 2012 (18-07-2012)
CN102597345B	11 February 2015 (11-02-2015)
CN103079805A	11 February 2015 (11-02-2015)
EP2398955A2	28 December 2011 (28-12-2011)
EP2398955A4	05 March 2014 (05-03-2014)
EP2504226A2	03 October 2012 (03-10-2012)
EP2504226A4	15 October 2014 (15-10-2014)
EP2504229A2	03 October 2012 (03-10-2012)
EP2504229A4	21 January 2015 (21-01-2015)
EP2504464A1	03 October 2012 (03-10-2012)
EP2504464A4	21 January 2015 (21-01-2015)
EP2504474A2	03 October 2012 (03-10-2012)
EP2504474A4	07 January 2015 (07-01-2015)
EP2513250A2	24 October 2012 (24-10-2012)
EP2513250A4	27 May 2015 (27-05-2015)
JP2012518076A	09 August 2012 (09-08-2012)
JP5577356B2	20 August 2014 (20-08-2014)
JP2013511606A	04 April 2013 (04-04-2013)
JP5643835B2	17 December 2014 (17-12-2014)
JP2013511414A	04 April 2013 (04-04-2013)
JP5799021B2	21 October 2015 (21-10-2015)
JP2013511429A	04 April 2013 (04-04-2013)
JP2013511655A	04 April 2013 (04-04-2013)
JP2013520328A	06 June 2013 (06-06-2013)
KR20110125220A	18 November 2011 (18-11-2011)
KR20120089344A	09 August 2012 (09-08-2012)
KR20120094055A	23 August 2012 (23-08-2012)
KR20120101446A	13 September 2012 (13-09-2012)
KR20120104600A	21 September 2012 (21-09-2012)
KR20120120172A	01 November 2012 (01-11-2012)
US2011143087A1	16 June 2011 (16-06-2011)
US8545963B2	01 October 2013 (01-10-2013)
US2011024694A1	03 February 2011 (03-02-2011)
US8585934B2	19 November 2013 (19-11-2013)
US2011132245A1	09 June 2011 (09-06-2011)
US8601965B2	10 December 2013 (10-12-2013)
US2011133031A1	09 June 2011 (09-06-2011)
US8662449B2	04 March 2014 (04-03-2014)
US2011135491A1	09 June 2011 (09-06-2011)
US2012160966A1	28 June 2012 (28-06-2012)
WO2010144161A2	16 December 2010 (16-12-2010)
WO2010144161A3	27 January 2011 (27-01-2011)
WO2011063424A1	26 May 2011 (26-05-2011)
WO2011126517A2	13 October 2011 (13-10-2011)
WO2011126517A3	26 January 2012 (26-01-2012)
WO2011126518A2	13 October 2011 (13-10-2011)
WO2011126518A3	19 September 2013 (19-09-2013)
WO2011126519A2	13 October 2011 (13-10-2011)
WO2011126519A3	02 February 2012 (02-02-2012)
WO2011142785A2	17 November 2011 (17-11-2011)
WO2011142785A3	14 March 2013 (14-03-2013)
ZA201202437B	25 September 2013 (25-09-2013)
ZA201202438B	27 December 2012 (27-12-2012)
ZA201202441B	24 April 2013 (24-04-2013)
ZA201203545B	24 April 2013 (24-04-2013)