

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2012/123733 A1

(43) International Publication Date  
20 September 2012 (20.09.2012)

WIPO | PCT

(51) International Patent Classification:  
*H01J 49/40 (2006.01)*

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:  
PCT/GB2012/050549

(22) International Filing Date:  
13 March 2012 (13.03.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
1104310.6 15 March 2011 (15.03.2011) GB  
61/476,856 19 April 2011 (19.04.2011) US

(71) Applicant (for all designated States except US): **MICRO-MASS UK LIMITED** [GB/GB]; Floats Road, Wythenshawe, Manchester M23 9LZ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HOYES, John Brian** [GB/GB]; Lily Bank Farm Cottage, Higher Banks, Mellor, Stockport SK6 5ND (GB). **LANGRIDGE, David J.** [GB/GB]; 2E Mauldeth Close, Stockport SK4 3NP (GB). **WILDGOOSE, Jason Lee** [GB/GB]; 110 Barcicroft Road, Heaton Mersey, Stockport SK4 3PJ (GB).

(74) Agent: **JEFFREY, Philip M.**; Dehns, St Bride's House, 10 Salisbury Square, London EC4Y 8JD (GB).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ELECTROSTATIC GIMBAL FOR CORRECTION OF ERRORS IN TIME OF FLIGHT MASS SPECTROMETERS

Fig. 4

Principle Planes, Less Parallel but Corrected by Invention

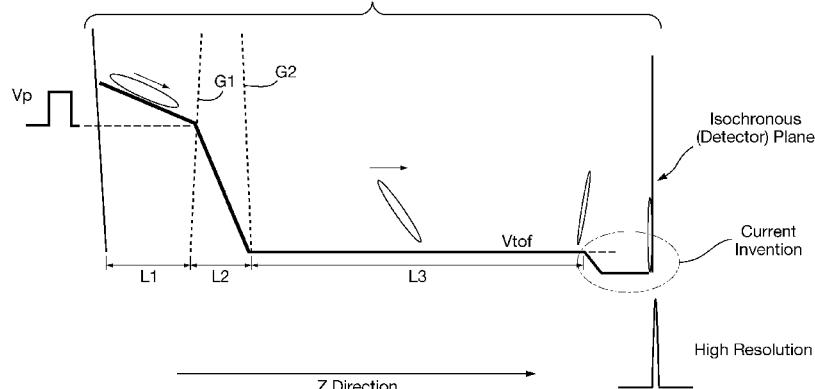

(57) Abstract: A Time of Flight mass analyser is disclosed comprising one or more devices arranged and adapted to correct for tilt in an isochronous plane of ions and to adjust the isochronous plane of the ions so as to be parallel with the plane of detection in an ion detector.

WO 2012/123733 A1

**ELECTROSTATIC GIMBAL FOR CORRECTION OF ERRORS IN TIME OF FLIGHT  
MASS SPECTROMETERS**

5

The present invention relates to a Time of Flight mass analyser and a method of analysing ions.

**CROSS-REFERENCE TO RELATED APPLICATION**

10

This application claims priority from and the benefit of US Provisional Patent Application Serial No. 61/476,856 filed on 19 April 2011 and United Kingdom Patent Application No. 1104310.6 filed on 15 March 2011. The entire contents of these applications are incorporated herein by reference.

15

**BACKGROUND TO THE PRESENT INVENTION**

20

It is well known to those skilled in the art of Time of Flight mass spectrometer design that one of the factors that limit the resolution of Time of Flight mass spectrometers is the optical alignment between the various components that comprise the mass spectrometer. This is especially important in orthogonal acceleration Time of Flight ("oa-TOF") mass spectrometers which commonly comprise a set of parallel electric field regions which are delineated by a series of meshes or grids with precise mechanical separation. The location of these optical components are known as the principle planes of the Time of Flight mass spectrometer. Particular attention is paid to the parallelism and flatness of the principle planes which are commonly aligned to within a few microns to enable high mass resolution.

25

Misalignment of any of the principle planes of an orthogonal acceleration Time of Flight mass analyser such as the pusher electrode, first and second grid electrodes and the ion detector can result in a significantly reduced resolution.

It is desired to provide an improved Time of Flight mass analyser and method of mass analysing ions.

**SUMMARY OF THE INVENTION**

35

According to an aspect of the present invention there is provided a Time of Flight mass analyser comprising:

one or more devices arranged and adapted to correct for tilt in one or more isochronous planes of ions.

40

The one or more isochronous planes of ions preferably comprise ions having a particular mass to charge ratio. The one or more devices preferably correct for tilt in the isochronous plane of substantially all ions having a wide range of mass to charge ratios which are desired to be detected by an ion detector forming part of the Time of Flight mass analyser. The one or more devices according to the preferred embodiment preferably

correct simultaneously for all ions of all mass to charge ratios seen by the spectrometer since the one or more devices preferably correct for a mechanical misalignment which is effectively experienced by all ions of different mass to charge ratios. The apparatus and method according to the preferred embodiment are preferably arranged to correct for

5 misalignment between an isochronous plane of ions (or the isochronous planes of ions) resulting from the ion-optical components of the Time of Flight mass analyser and an isochronous or detector plane of an ion detector. The apparatus and method according to the preferred embodiment preferably adjusts, tilts or corrects an isochronous plane (or the isochronous planes) of the ions so that the isochronous plane is brought back into  
10 alignment with the detector plane of the ion detector i.e. so that the isochronous plane of ions is made substantially parallel with the detector plane of the ion detector.

The Time of Flight mass analyser preferably further comprising an ion detector.

According to a less preferred embodiment the Time of Flight mass analyser may comprise an axial acceleration Time of Flight mass analyser.

15 According to a preferred embodiment the Time of Flight mass analyser comprises an orthogonal acceleration Time of Flight mass analyser.

The Time of Flight mass analyser preferably further comprises an orthogonal acceleration region. The orthogonal acceleration region preferably comprises a pusher or puller electrode and/or a first grid or other electrode and/or a second grid or other  
20 electrode.

The Time of Flight mass analyser preferably further comprises a first field free region between the pusher or puller electrode and the first grid or other electrode.

The Time of Flight mass analyser preferably further comprises a second field free region between the first grid or other electrode and the second grid or other electrode.

25 The Time of Flight mass analyser preferably further comprises a third field free region located either: (i) between the orthogonal acceleration region and the ion detector; or (ii) between the second grid or other electrode and the ion detector.

The one or more devices are preferably arranged and adapted to correct for tilt in one or more isochronous planes of ions preferably having particular mass to charge ratios  
30 so that the one or more isochronous planes are aligned so as to be substantially parallel to a plane of ion detection located upon a surface of or within the ion detector.

The one or more isochronous planes preferably comprise the plane of best fit of ions (preferably having a particular mass to charge ratio) at a particular point in time.

35 The one or more devices may comprise one or more mechanical devices for mechanically correcting for the tilt.

The one or more devices may comprise one or more electrostatic devices for electrostatically correcting for the tilt.

According to the preferred embodiment the one or more devices comprise a first acceleration stage and/or a first deceleration stage.

40 The first acceleration stage and/or the first deceleration stage are preferably arranged and adapted to act upon an ion beam passing through the first acceleration stage and/or the first deceleration stage in a manner such that the time of flight or time of flight

characteristics of ions in the ion beam are varied non-uniformly in a first transverse direction across the ion beam.

The first acceleration stage and/or the first deceleration stage are preferably arranged and adapted to correct for tilt in a first direction.

5 The first acceleration stage and/or the first deceleration stage may be located either: (i) upstream of, downstream of or at intermediate position along the first field free region; (ii) upstream of, downstream of or at intermediate position along the second field free region; (iii) upstream of, downstream of or at intermediate position along the third field free region; or (iv) upstream of, downstream of or at intermediate position along a field free 10 region.

The first acceleration stage and/or the first deceleration stage may comprise a third grid or other electrode and a fourth grid or other electrode, wherein the third grid or other electrode is inclined at an angle  $\alpha$  to the fourth grid or other electrode and wherein  $\alpha \neq 0$ . Preferably,  $\alpha$  is selected from the group consisting of: (i)  $< 5^\circ$ ; (ii)  $5-10^\circ$ ; (iii)  $10-15^\circ$ ; (iv)  $15-20^\circ$ ; (v)  $20-25^\circ$ ; (vi)  $25-30^\circ$ ; (vii)  $30-35^\circ$ ; (viii)  $35-40^\circ$ ; (ix)  $40-45^\circ$ ; (x)  $45-50^\circ$ ; (xi)  $50-55^\circ$ ; (xii)  $55-60^\circ$ ; (xiii)  $60-65^\circ$ ; (xiv)  $65-70^\circ$ ; (xv)  $70-75^\circ$ ; (xvi)  $75-80^\circ$ ; (xvii)  $80-85^\circ$ ; and (xviii)  $> 85^\circ$ .

According to an embodiment the one or more devices may further comprise a second acceleration stage and/or a second deceleration stage.

20 The second acceleration stage and/or the second deceleration stage are preferably arranged and adapted to act upon an ion beam passing through the second acceleration stage and/or the second deceleration stage in a manner such that the time of flight or time of flight characteristics of ions in the ion beam are varied non-uniformly in a second transverse direction across the ion beam.

25 According to the preferred embodiment the second transverse direction is substantially orthogonal to the first transverse direction.

The second acceleration stage and/or the second deceleration stage are preferably arranged and adapted to correct for tilt in a second direction.

According to the preferred embodiment the second direction is substantially orthogonal to the first direction.

30 The second acceleration stage and/or the second deceleration stage is preferably located either: (i) upstream of, downstream of or at intermediate position along the first field free region; (ii) upstream of, downstream of or at intermediate position along the second field free region; (iii) upstream of, downstream of or at intermediate position along the third field free region; or (iv) upstream of, downstream of or at intermediate position along a field free 35 region.

The second acceleration stage and/or the second deceleration stage preferably comprises a fifth grid or other electrode and a sixth grid or other electrode, wherein the fifth grid or other electrode is inclined at an angle  $\beta$  to the sixth grid or other electrode and wherein  $\beta \neq 0$ . Preferably,  $\beta$  is selected from the group consisting of: (i)  $< 5^\circ$ ; (ii)  $5-10^\circ$ ; (iii)  $10-15^\circ$ ; (iv)  $15-20^\circ$ ; (v)  $20-25^\circ$ ; (vi)  $25-30^\circ$ ; (vii)  $30-35^\circ$ ; (viii)  $35-40^\circ$ ; (ix)  $40-45^\circ$ ; (x)  $45-50^\circ$ ; (xi)  $50-55^\circ$ ; (xii)  $55-60^\circ$ ; (xiii)  $60-65^\circ$ ; (xiv)  $65-70^\circ$ ; (xv)  $70-75^\circ$ ; (xvi)  $75-80^\circ$ ; (xvii)  $80-85^\circ$ ; and (xviii)  $> 85^\circ$ .

The tilt in the one or more isochronous planes preferably results from misalignment of one or more ion-optical components.

The Time of Flight mass analyser preferably further comprises a device arranged upstream of the orthogonal acceleration region and adapted to introduce a first order

5 spatial focusing term in order to improve spatial focusing of a beam of ions.

The Time of Flight mass analyser preferably further comprises a beam expander arranged upstream of the orthogonal acceleration region, the beam expander being arranged and adapted to reduce an initial spread of velocities of ions arriving at the orthogonal acceleration region.

10 According to an embodiment one or more acceleration or deceleration stages are provided downstream of the one or more devices.

The one or more acceleration or deceleration stages are preferably arranged and adapted to alter the kinetic energy of the ions so that ions emerging from the one or more acceleration or deceleration stages have substantially the same kinetic energy as they had 15 immediately prior to passing through the one or more devices.

According to another aspect of the present invention there is provided a mass spectrometer comprising a Time of Flight mass analyser as described above.

According to another aspect of the present invention there is provided a method of mass analysing ions comprising:

20 providing a Time of Flight mass analyser; and  
correcting for tilt in one or more isochronous planes of ions.

The method may further comprise electrostatically correcting for tilt in the isochronous plane of ions.

25 The method may further comprise mechanically correcting for tilt in the isochronous plane of ions.

According to another aspect of the present invention there is provided a mass spectrometer comprising:

an orthogonal acceleration region wherein, in use, a packet of ions is orthogonally accelerated into a time of flight region;

30 two inclined electrodes or grids located in the time of flight region; and  
a device arranged and adapted to apply voltages to the electrodes so as to provide a first order correction for tilt in the isochronous plane of ions having a particular mass to charge ratio and which pass, in use, through the time of flight region.

35 According to an aspect of the present invention there is provided an apparatus and a method to correct for alignment errors in the optical components of Time of Flight mass spectrometers by introduction of one or more supplementary acceleration or deceleration stages whose properties vary transversely across the ion beam.

According to an aspect of the present invention there is provided a Time of Flight mass analyser comprising:

40 one or more devices arranged and adapted to correct for tilt in an isochronous plane of ions having a particular mass to charge ratio.

The one or more devices preferably realign the isochronous plane of ion so as to be substantially parallel with a detector plane of an ion detector.

According to another aspect of the present invention there is provided a method of mass analysing ions comprising:

5 providing a Time of Flight mass analyser; and  
correcting for tilt in an isochronous plane of ions having a particular mass to charge ratio.

The method preferably comprises realigning the isochronous plane of ions so as to be substantially parallel with a detector plane of an ion detector.

10 The preferred embodiment relates to an improvement to existing apparatus, specifically Time of Flight mass analysers. The preferred embodiment corrects for errors in mechanical alignment of the optical components that make up a Time of Flight instrument or a Time of Flight mass analyser or mass spectrometer.

15 The preferred embodiment may compensate for mechanical misalignments in the ion optical components in a Time of Flight mass analyser by introducing a small acceleration or deceleration region. The Time of Flight characteristics preferably vary transversely across the extent of the ion beam and preferably exactly counteract the Time of Flight errors caused by component misalignment.

20 The preferred embodiment can allow for a relaxing of parallelism tolerances in the construction of a Time of Flight instrument. The misalignments can be tuned out electrically to bring the instrument back into focus. The potential cost savings for reduced tolerance build analysers are considerable.

The preferred embodiment solves the problem of imperfect alignment of Time of Flight components.

25 According to an embodiment the mass spectrometer may further comprise:  
(a) an ion source selected from the group consisting of: (i) an Electrospray ionisation ("ESI") ion source; (ii) an Atmospheric Pressure Photo Ionisation ("APPI") ion source; (iii) an Atmospheric Pressure Chemical Ionisation ("APCI") ion source; (iv) a Matrix Assisted Laser Desorption Ionisation ("MALDI") ion source; (v) a Laser Desorption  
30 Ionisation ("LDI") ion source; (vi) an Atmospheric Pressure Ionisation ("API") ion source; (vii) a Desorption Ionisation on Silicon ("DIOS") ion source; (viii) an Electron Impact ("EI") ion source; (ix) a Chemical Ionisation ("CI") ion source; (x) a Field Ionisation ("FI") ion source; (xi) a Field Desorption ("FD") ion source; (xii) an Inductively Coupled Plasma ("ICP") ion source; (xiii) a Fast Atom Bombardment ("FAB") ion source; (xiv) a Liquid  
35 Secondary Ion Mass Spectrometry ("LSIMS") ion source; (xv) a Desorption Electrospray Ionisation ("DESI") ion source; (xvi) a Nickel-63 radioactive ion source; (xvii) an Atmospheric Pressure Matrix Assisted Laser Desorption Ionisation ion source; (xviii) a Thermospray ion source; (xix) an Atmospheric Sampling Glow Discharge Ionisation ("ASGDI") ion source; and (xx) a Glow Discharge ("GD") ion source; and/or  
40 (b) one or more continuous or pulsed ion sources; and/or  
(c) one or more ion guides; and/or  
(d) one or more ion mobility separation devices and/or one or more Field

Asymmetric Ion Mobility Spectrometer devices; and/or

- (e) one or more ion traps or one or more ion trapping regions; and/or
- (f) one or more collision, fragmentation or reaction cells selected from the group consisting of: (i) a Collisional Induced Dissociation ("CID") fragmentation device; (ii) a

5 Surface Induced Dissociation ("SID") fragmentation device; (iii) an Electron Transfer Dissociation ("ETD") fragmentation device; (iv) an Electron Capture Dissociation ("ECD") fragmentation device; (v) an Electron Collision or Impact Dissociation fragmentation device; (vi) a Photo Induced Dissociation ("PID") fragmentation device; (vii) a Laser Induced Dissociation fragmentation device; (viii) an infrared radiation induced dissociation device;

10 (ix) an ultraviolet radiation induced dissociation device; (x) a nozzle-skimmer interface fragmentation device; (xi) an in-source fragmentation device; (xii) an in-source Collision Induced Dissociation fragmentation device; (xiii) a thermal or temperature source fragmentation device; (xiv) an electric field induced fragmentation device; (xv) a magnetic field induced fragmentation device; (xvi) an enzyme digestion or enzyme degradation

15 fragmentation device; (xvii) an ion-ion reaction fragmentation device; (xviii) an ion-molecule reaction fragmentation device; (xix) an ion-atom reaction fragmentation device; (xx) an ion-metastable ion reaction fragmentation device; (xxi) an ion-metastable molecule reaction fragmentation device; (xxii) an ion-metastable atom reaction fragmentation device; (xxiii) an ion-ion reaction device for reacting ions to form adduct or product ions; (xxiv) an ion-

20 molecule reaction device for reacting ions to form adduct or product ions; (xxv) an ion-atom reaction device for reacting ions to form adduct or product ions; (xxvi) an ion-metastable ion reaction device for reacting ions to form adduct or product ions; (xxvii) an ion-metastable molecule reaction device for reacting ions to form adduct or product ions; (xxviii) an ion-metastable atom reaction device for reacting ions to form adduct or product

25 ions; and (xxix) an Electron Ionisation Dissociation ("EID") fragmentation device; and/or

- (g) one or more energy analysers or electrostatic energy analysers; and/or
- (h) one or more ion detectors; and/or
- (i) one or more mass filters selected from the group consisting of: (i) a quadrupole mass filter; (ii) a 2D or linear quadrupole ion trap; (iii) a Paul or 3D quadrupole ion trap; (iv)

30 a Penning ion trap; (v) an ion trap; (vi) a magnetic sector mass filter; (vii) a Time of Flight mass filter; and (viii) a Wein filter; and/or

- (j) a device or ion gate for pulsing ions; and/or
- (k) a device for converting a substantially continuous ion beam into a pulsed ion beam.

35 The mass spectrometer may further comprise a stacked ring ion guide comprising a plurality of electrodes each having an aperture through which ions are transmitted in use and wherein the spacing of the electrodes increases along the length of the ion path, and wherein the apertures in the electrodes in an upstream section of the ion guide have a first diameter and wherein the apertures in the electrodes in a downstream section of the ion

40 guide have a second diameter which is smaller than the first diameter, and wherein opposite phases of an AC or RF voltage are applied, in use, to successive electrodes.

BRIEF DESCRIPTION OF THE DRAWINGS

Various embodiments of the present invention will now be described, by way of example only, and with reference to the accompanying drawings in which:

5 Fig. 1A shows space focusing in a linear Time of Flight mass spectrometer and Fig. 1B shows space focusing in a reflectron Time of Flight mass spectrometer;

Fig. 2 shows principle planes of a two stage Wiley McLaren orthogonal acceleration Time of Flight mass spectrometer;

10 Fig. 3 shows principle planes of a two stage orthogonal acceleration Time of Flight mass spectrometer which are non-parallel;

Fig. 4 shows an embodiment of the present invention wherein a supplementary acceleration stage is provided upstream of an ion detector;

15 Fig. 5 shows a preferred embodiment of the present invention;

Fig. 6 shows a preferred embodiment of the present invention wherein two acceleration stages are provided;

Fig. 7A shows a potential energy diagram of typical high performance orthogonal acceleration Time of Flight mass analyser and Fig. 7B shows grid electrodes according to a preferred embodiment

20 Fig. 8 shows a base system mass peak with a resolution of 27k;

Fig. 9 shows a mass peak with a resolution of 11k obtained when the detector is tilted by 0.2°;

Fig. 10 shows a mass peak with a restored resolution of 27k when a detector tilt of 0.2° is corrected for using a 2 kV gimbal in accordance with an embodiment of the present invention;

25 Fig. 11 shows a mass peak with a resolution of 11k obtained when a 2 kV voltage is applied to the base system alone;

Fig. 12 shows the time of flight as a function of position across the detector for various systems;

Fig. 13 shows the effect of a 0.5° tilt in grid electrode #1;

30 Fig. 14 shows the effect of a 2 kV gimbal after grid electrode #1 with a 0.2° detector tilt; and

Fig. 15 shows the effect of 0.2° detector tilt, 2 kV correction after grid electrode #1 with ion kinetic energy restored.

35 DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

Wiley and McLaren (Time-of-Flight Mass Spectrometer with Improved Resolution, Rev. Sci. Instrum. 26, 1150 (1955)) set out the mathematical formalism upon which subsequent Time of Flight instruments have been designed. The concept of compacting an 40 initial positional distribution of ions by combination of acceleration and drift regions is known as spatial focusing. By using two distinct electric field regions, (the first of which is pulsed to an accelerating potential  $V_p$ ) followed by a drift tube (held at  $V_{t0f}$ ), the initial ion

beam is compacted to a narrower spatial distribution in the axial z direction at the plane of the ion detector as shown in the potential energy diagram of Fig. 1A. The ratio of the magnitudes and distances of the two electric fields and the field free drift length are set precisely in accordance with the principle of spatial focusing set out in the Wiley McLaren 5 paper. It is also known that the addition of a reflectron (see Fig. 1B) can provide for spatial focusing in a folded geometry instrument that provides for longer flight times and higher resolution. The following description of the preferred embodiment is equally applicable to both linear and reflectron based geometries.

In the simpler two stage geometry of Fig. 2 the principle planes which define the 10 instrument geometry are the pusher electrode, two grid electrodes G1,G2 and the ion detector. For highest mass resolution these principle planes should be as flat and parallel as possible. Indeed modern instruments employing reflectrons which achieve resolutions of 50,000 or more require overall parallelism of better than 10 microns throughout the instrument and across the entire transverse beam trajectory. Such a high degree of 15 tolerance requires very precise machining over large distances and is therefore expensive and difficult to achieve consistently.

Fig. 3 shows how misaligned principle planes lead to a distortion in the isochronous 20 plane at the ion detector thus degrading instrumental resolution. Unless the magnitude and direction of the misalignments of each of the principle planes is known precisely their quantitative cumulative effect on Time of Flight resolution cannot be predicted. It is known to those skilled in the art that small variations in the axial or z position of the principle 25 planes can be corrected by small changes in the applied voltage that create the electric fields. This is because the solutions for spatial focusing do not depend upon exact distances, but rather a combination of distance and fields so a change in one can compensate for an error in the other. However, in the transverse x and y directions no such degree of freedom exists and computer modeling reveals that a convolution of a multiplicity 30 of such small tilts in the x and y directions of the principle planes leads to an overall tilt in the isochronous plane at the ion detector.

The preferred embodiment relates to an electrostatic method to compensate for 35 these misalignments. The preferred embodiment has the benefit of optimizing the resolution of a spectrometer while relaxing the tolerances required for the positioning of the components at the principle planes while requiring no moving parts.

Fig. 4 shows an embodiment of the invention wherein a small supplementary 35 acceleration stage is placed in the field free region before the ion detector. By adjusting the voltage on the supplementary stage it is possible to correct for the tilt in the isochronous plane caused by the previously described misalignments.

The theory of operation of the preferred device is best understood with reference to Fig. 5. Ions have a kinetic energy defined by the overall acceleration potential of the analyser geometry and traverse the field free region held at potential  $V_{tof}$ . The ions then 40 enter the preferred device which preferably consists of two grids G3,G4 situated in the field free region. The first grid G3 is placed essentially parallel to the principle planes of the instrument and the fourth grid G4 is inclined at an angle  $\alpha$  to the principle plane. The first

grid G3 is held at the same potential as the flight tube whereas the second grid G4 is held at the ion detector potential which may be varied with respect to V<sub>tof</sub>. The nature of the tilt of the incoming ion beam (Case1) may be considered whereby the portion of the ion beam with positive x values is lagging behind that with negative x values. According to the 5 preferred embodiment the voltage is lowered on the second grid G4 and the detector by a value V<sub>acc</sub> to give a net post acceleration. The additional time of flight of the ions in the beam with positive x values,  $\Delta T_1$ , is then less than that of negative x values,  $\Delta T_2$ . By adjusting the magnitude of V<sub>acc</sub> accordingly it is possible to exactly counteract the tilt caused by misalignment and so bring the beam back into time focus thus optimizing the 10 resolution of the spectrometer. It is not always possible to know or predict the sense of the tilt in the isochronous plane and hence the preferred embodiment is preferably able to correct for both senses. Conversely, considering Case 2 it can be seen that by reversing the polarity to give a net post deceleration that the additional time of flight for ions of positive x value  $\Delta T_1'$  is longer than that for negative x values  $\Delta T_2'$ . Again V<sub>acc</sub>' can be 15 adjusted to bring the beam back into time focus and optimize spectrometer resolution. It should also be understood that the time correction provided by the preferred embodiment is linear in x as shown in Fig. 4 and that the distortion caused by the misalignment in the components at the principle planes is also transversely linear in nature.

The device shown in Fig. 5 is only able to correct for errors in a single dimension - 20 in this case a correction in the x direction. In order to correct for errors in the y dimension it is necessary to cascade another device with or after the first device. Such a scheme is shown in Fig. 6.

The typical geometrical parameters for a high resolution commercial orthogonal 25 acceleration Time of Flight instrument are shown in Fig. 7A. Such an instrument is capable with a flight path of about 1 m and ion energy of 14 keV of a mass resolution of 25,000 Full Width Half Maximum (FWHM). If the beam width W<sub>b</sub> (see Fig. 5) is 20 mm and an angular tilt of 1 degree is imposed in one dimension at principle plane P3, then the resolution degrades to 8500 FWHM. Fig. 7B shows the geometry and voltage applied to two grid 30 electrodes according to an embodiment of the present invention that may be used to correct for the misalignment and restore the resolution back to 25,000 FWHM.

Various alternative embodiments are contemplated. According to an embodiment the transversely varying optical element may comprise an electrode rather than a grid i.e. the preferred embodiment may be gridless in its construction.

The preferred embodiment is also applicable to other Time of Flight instruments 35 such as axial MALDI systems. It is also applicable to gridless Time of Flight spectrometers and itself may be gridless.

### Simulations

40 Various simulations were performed based upon a Waters (RTM) Vmode G2 Time of Flight mass spectrometer. Simulations were performed on the basis of a 3 mm tophat

positional spread of ions, 10/40 gauss linear velocity, 70 eV in source axis (1 eV standard deviation), 30 mm beam width in pusher and grid scattering enabled.

For a base system peak (i.e. all grids are flat and wherein no correction grid according to the preferred embodiment is utilised) a resolution of about 27k was observed as shown in Fig. 8. The voltage on the acceleration stage (P2) was 9585 V.

If a tilt in the detector of 0.2° is introduced (i.e. tilting around the centre of the detector with the centre of the ion beam incident on the centre of the detector) then the resolution was observed to degrade to around 11k as shown in Fig. 9.

If an electrostatic gimbal correction is then applied according to an embodiment of the present invention then the performance can be restored. For example, a 5° tilted gimbal located 10 mm before the detector with 2 kV applied corrects for the spread in the ion arrival times and gives a resolution of about 21k. If the system is resolved for P2 volts (to 9514 V) then resolution of about 27k is restored as shown in Fig. 10. In this case the ion kinetic energy is being restored after the gimbal system according to the preferred embodiment and a short (e.g. 1 mm) region is provided with -2kV across it to bring the ions back to their original time of flight volts energy.

With the gimbal just before the detector this kinetic energy correction is not required and a resolution of about 27k is observed.

If 2 kV volts is applied to the base system alone (i.e. with no detector tilt) then the resolution degrades to 11k as shown in Fig. 11 as might be expected since this effect matches the effect of the detector tilt it is set to compensate for.

Fig. 12 plots times of flight of ions as a function of position across the detector (centre at 170 mm) for the four cases discussed above. As expected, the perfect system is "flat" i.e. there is no time of flight dependence on position at the detector. Tilting the detector leads to a 1st order tilt in the time of flight-position plot, such that ions that strike to the right of the detector centre are shifted to longer flight times (consistent with the definition of the angle of tilt used). The correction voltage alone leads to the opposite tilt and a shift in absolute drift time, while the combination of the detector tilt and the gimbal correction leads to the cancellation of the tilts i.e. back to a flat time of flight-position plot (resolving for P2 volts hence the shift in absolute time of flight).

Fig. 13 shows the effect of a tilt of 0.5° in grid electrode #1. This produces the opposite tilt in the time of flight versus position plot, hence (for the same geometry of correction grid) a negative correction voltage is required. In this case -1500 V is applied and the tilt is compensated for. The resolution was again about 11k with the tilt in grid electrode #1 and 26k after correction according to the preferred embodiment.

The gimbal correction grid does not need to be positioned immediately before the detector. According to an embodiment the gimbal correction grid may be located just after grid electrode #1 (i.e. in the first field free region just after the pusher electrode and upstream of grid electrode #2).

Fig. 14 shows the effect of a 2kV gimbal located 10 mm after grid electrode #1 correcting for a 0.2° detector tilt. According to this embodiment the ion kinetic energy is not corrected after the gimbal system. As a result, an additional 2kV of acceleration voltage is

effectively applied to the ions (i.e. a three stage pusher). The resolution based on the FWHM is about 22k although this does not account for the large high mass tail.

Fig. 15 shows the same system but with the kinetic energy restored via a 1 mm 2kV deceleration region after the gimbal. The resolution is about 26k and no large high mass

5 tail is observed. For gimbal positions other than immediately before the detector a deceleration region may be desirable, although tuning of multiple voltages may be sufficient to resolve the geometry (currently just resolving for P2 volts).

The application of a small linear field (in the time of flight direction) to the extraction region during the pre-extraction fill time can also be used to achieve a 1st order correction.

10 In this case the pre-extraction velocity of an beam in the time of flight direction becomes linearly dependent on both the applied field and the distance travelled through the extraction region. This effect results in a linear dependence between position in the extraction region and the time of flight and can be arranged (by choice of field) to cancel out the detrimental effects of mechanical tilts and misalignments.

15 Although the present invention has been described with reference to the preferred embodiments, it will be understood by those skilled in the art that various changes in form and detail may be made without departing from the scope of the invention as set forth in the accompanying claims.

10875702v9

Claims

5 1. A Time of Flight mass analyser comprising:  
one or more devices arranged and adapted to correct for tilt in one or more  
isochronous planes of ions.

10 2. A Time of Flight mass analyser as claimed in claim 1, further comprising an ion  
detector.

3. A Time of Flight mass analyser as claimed in claim 1 or 2, wherein said Time of  
Flight mass analyser comprises an axial acceleration Time of Flight mass analyser.

15 4. A Time of Flight mass analyser as claimed in claim 1 or 2, wherein said Time of  
Flight mass analyser comprises an orthogonal acceleration Time of Flight mass analyser.

5. A Time of Flight mass analyser as claimed in claim 4, further comprising an  
orthogonal acceleration region.

20 6. A Time of Flight mass analyser as claimed in claim 5, wherein said orthogonal  
acceleration region comprises a pusher or puller electrode and/or a first grid or other  
electrode and/or a second grid or other electrode.

25 7. A Time of Flight mass analyser as claimed in claim 6, further comprising a first field  
free region between said pusher or puller electrode and said first grid or other electrode.

8. A Time of Flight mass analyser as claimed in claim 6 or 7, further comprising a  
second field free region between said first grid or other electrode and said second grid or  
30 other electrode.

9. A Time of Flight mass analyser as claimed in any of claims 5-8, further comprising a  
third field free region located either: (i) between said orthogonal acceleration region and  
said ion detector; or (ii) between said second grid or other electrode and said ion detector.

35 10. A Time of Flight mass analyser as claimed in any of claims 2-9, wherein said one or  
more devices are arranged and adapted to correct for tilt in an isochronous plane of ions  
having a particular mass to charge ratio so that said isochronous plane is aligned so as to  
be substantially parallel to a plane of ion detection located upon a surface of or within said  
40 ion detector.

11. A Time of Flight mass analyser as claimed in any preceding claim, wherein said isochronous plane comprises the plane of best fit of ions having a particular mass to charge ratio at a particular point in time.

5 12. A Time of Flight mass analyser as claimed in any preceding claim, wherein said one or more devices comprise one or more mechanical devices for mechanically correcting for said tilt.

10 13. A Time of Flight mass analyser as claimed in any preceding claim, wherein said one or more devices comprise one or more electrostatic devices for electrostatically correcting for said tilt.

14. A Time of Flight mass analyser as claimed in any preceding claim, wherein said one or more devices comprises a first acceleration stage and/or a first deceleration stage.

15 15. A Time of Flight mass analyser as claimed in claim 14, wherein said first acceleration stage and/or said first deceleration stage is arranged and adapted to act upon an ion beam passing through said first acceleration stage and/or said first deceleration stage in a manner such that the time of flight or time of flight characteristics of ions in said ion beam are varied non-uniformly in a first transverse direction across said ion beam.

16. A Time of Flight mass analyser as claimed in claim 14 or 15, wherein said first acceleration stage and/or said first deceleration stage is arranged and adapted to correct for tilt in a first direction.

25 17. A Time of Flight mass analyser as claimed in any of claims 14, 15 or 16, wherein said first acceleration stage and/or said first deceleration stage is located either: (i) upstream of, downstream of or at intermediate position along said first field free region; (ii) upstream of, downstream of or at intermediate position along said second field free region; (iii) upstream of, downstream of or at intermediate position along said third field free region; or (iv) upstream of, downstream of or at intermediate position along a field free region.

35 18. A Time of Flight mass analyser as claimed in any of claims 14-17, wherein said first acceleration stage and/or said first deceleration stage comprises a third grid or other electrode and a fourth grid or other electrode, wherein said third grid or other electrode is inclined at an angle  $\alpha$  to said fourth grid or other electrode and wherein  $\alpha \neq 0$ .

40 19. A Time of Flight mass analyser as claimed in claim 18, wherein  $\alpha$  is selected from the group consisting of: (i)  $< 5^\circ$ ; (ii)  $5-10^\circ$ ; (iii)  $10-15^\circ$ ; (iv)  $15-20^\circ$ ; (v)  $20-25^\circ$ ; (vi)  $25-30^\circ$ ; (vii)  $30-35^\circ$ ; (viii)  $35-40^\circ$ ; (ix)  $40-45^\circ$ ; (x)  $45-50^\circ$ ; (xi)  $50-55^\circ$ ; (xii)  $55-60^\circ$ ; (xiii)  $60-65^\circ$ ; (xiv)  $65-70^\circ$ ; (xv)  $70-75^\circ$ ; (xvi)  $75-80^\circ$ ; (xvii)  $80-85^\circ$ ; and (xviii)  $> 85^\circ$ .

20. A Time of Flight mass analyser as claimed in any of claims 14-19, wherein said one or more devices further comprise a second acceleration stage and/or a second deceleration stage.

5

21. A Time of Flight mass analyser as claimed in claim 20, wherein said second acceleration stage and/or said second deceleration stage is arranged and adapted to act upon an ion beam passing through said second acceleration stage and/or said second deceleration stage in a manner such that the time of flight or time of flight characteristics of ions in said ion beam are varied non-uniformly in a second transverse direction across said ion beam, wherein said second transverse direction is substantially orthogonal to said first transverse direction.

10

22. A Time of Flight mass analyser as claimed in claim 20 or 21, wherein said second acceleration stage and/or said second deceleration stage is arranged and adapted to correct for tilt in a second direction, wherein said second direction is substantially orthogonal to said first direction.

15

23. A Time of Flight mass analyser as claimed in any of claims 7-22, wherein said second acceleration stage and/or said second deceleration stage is located either: (i) upstream of, downstream of or at intermediate position along said first field free region; (ii) upstream of, downstream of or at intermediate position along said second field free region; (iii) upstream of, downstream of or at intermediate position along said third field free region; or (iv) upstream of, downstream of or at intermediate position along a field free region.

25

24. A Time of Flight mass analyser as claimed in any of claims 20-23, wherein said second acceleration stage and/or said second deceleration stage comprises a fifth grid or other electrode and a sixth grid or other electrode, wherein said fifth grid or other electrode is inclined at an angle  $\beta$  to said sixth grid or other electrode and wherein  $\beta \neq 0$ .

30

25. A Time of Flight mass analyser as claimed in claim 24, wherein  $\beta$  is selected from the group consisting of: (i)  $< 5^\circ$ ; (ii)  $5-10^\circ$ ; (iii)  $10-15^\circ$ ; (iv)  $15-20^\circ$ ; (v)  $20-25^\circ$ ; (vi)  $25-30^\circ$ ; (vii)  $30-35^\circ$ ; (viii)  $35-40^\circ$ ; (ix)  $40-45^\circ$ ; (x)  $45-50^\circ$ ; (xi)  $50-55^\circ$ ; (xii)  $55-60^\circ$ ; (xiii)  $60-65^\circ$ ; (xiv)  $65-70^\circ$ ; (xv)  $70-75^\circ$ ; (xvi)  $75-80^\circ$ ; (xvii)  $80-85^\circ$ ; and (xviii)  $> 85^\circ$ .

35

26. A Time of Flight mass analyser as claimed in any preceding claim, wherein said tilt in said one or more isochronous planes results from misalignment of one or more ion-optical components.

40

27. A Time of Flight mass analyser as claimed in any of claims 5-26, further comprising a device arranged upstream of said orthogonal acceleration region and adapted to

introduce a first order spatial focusing term in order to improve spatial focusing of a beam of ions.

28. A Time of Flight mass analyser as claimed in any of claims 5-27, further comprising  
5 a beam expander arranged upstream of said orthogonal acceleration region, said beam expander being arranged and adapted to reduce an initial spread of velocities of ions arriving at said orthogonal acceleration region.
29. A Time of Flight mass analyser as claimed in any preceding claim, further  
10 comprising one or more acceleration or deceleration stages arranged downstream of said one or more devices.
30. A Time of Flight mass analyser as claimed in claim 29, wherein said one or more acceleration or deceleration stages are arranged and adapted to alter the kinetic energy of  
15 said ions so that ions emerging from said one or more acceleration or deceleration stages have substantially the same kinetic energy as they had immediately prior to passing through said one or more devices.
31. A mass spectrometer comprising at Time of Flight mass analyser as claimed in any  
20 preceding claim.
32. A method of mass analysing ions comprising:  
providing a Time of Flight mass analyser; and  
correcting for tilt in one or more isochronous planes of ions.

Fig. 1A

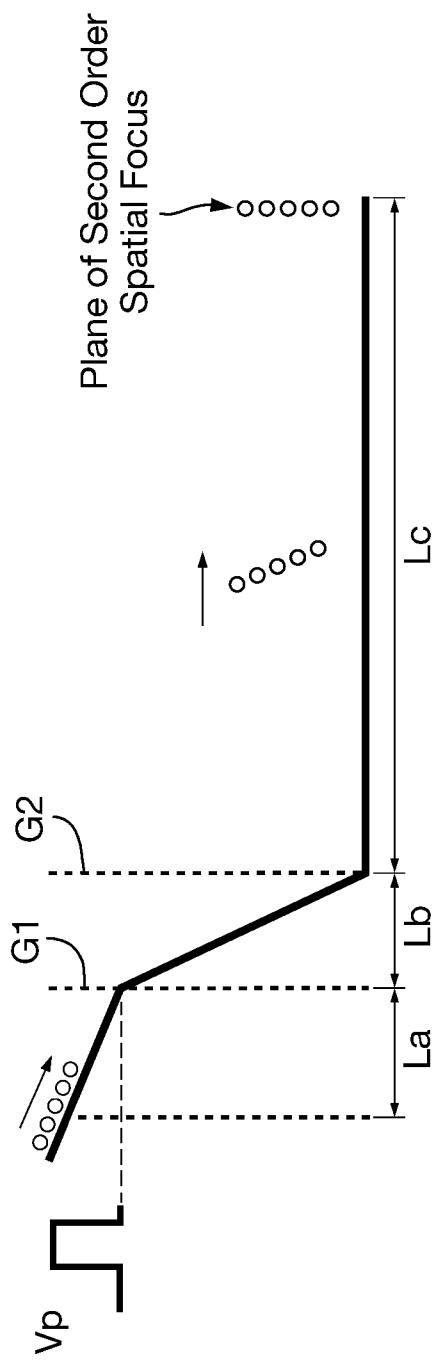
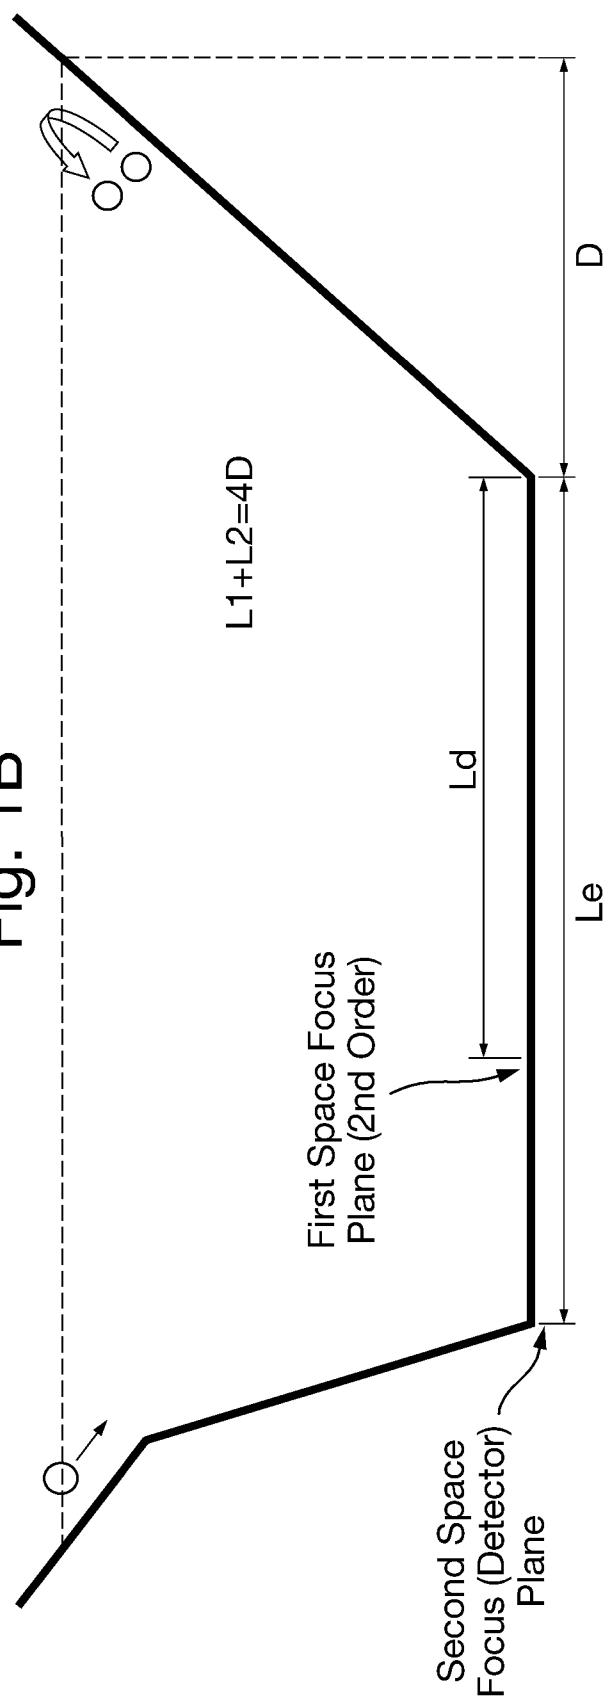


Fig. 1B



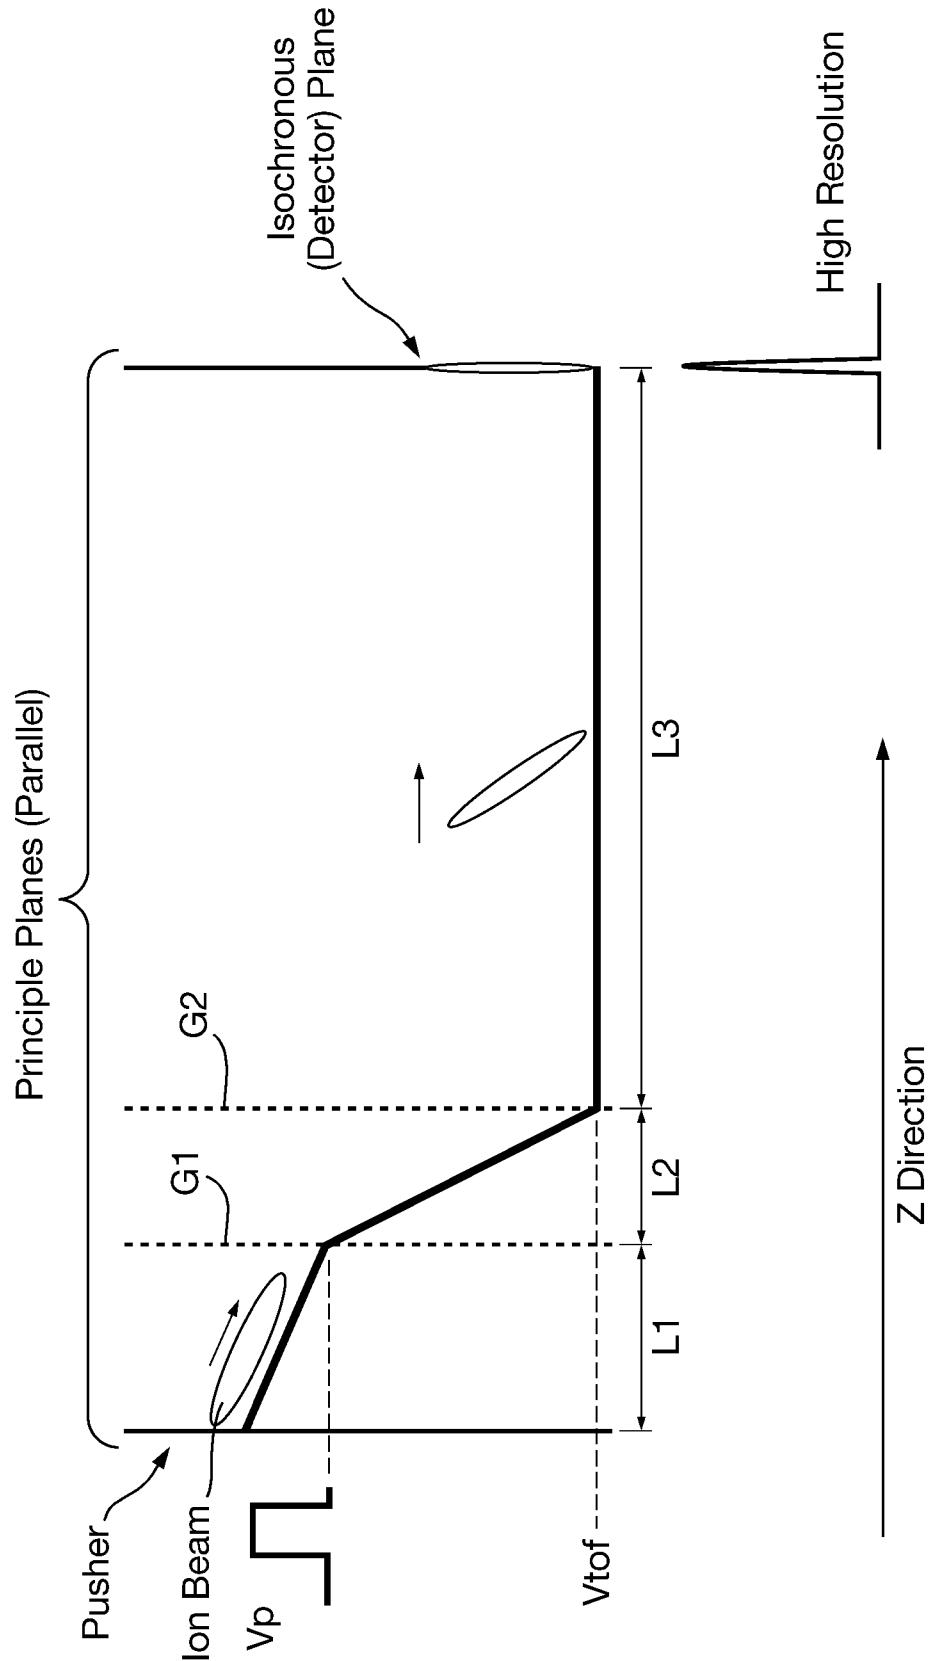
**Fig. 2**

Fig. 3

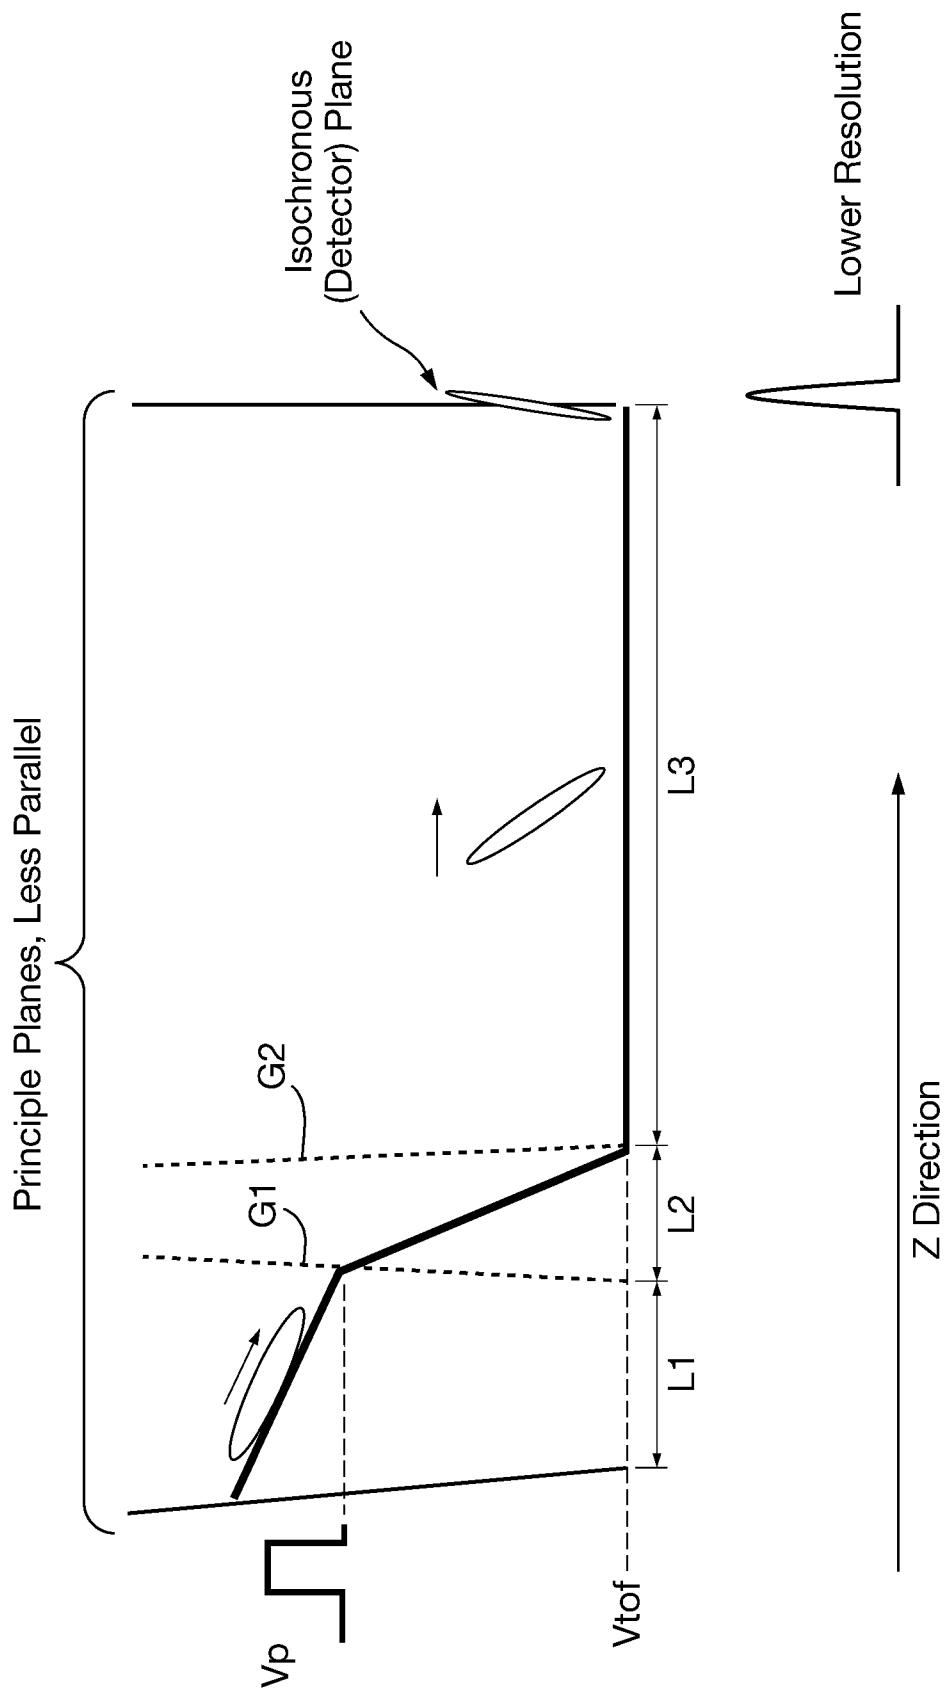


Fig. 4  
Principle Planes, Less Parallel but Corrected by Invention


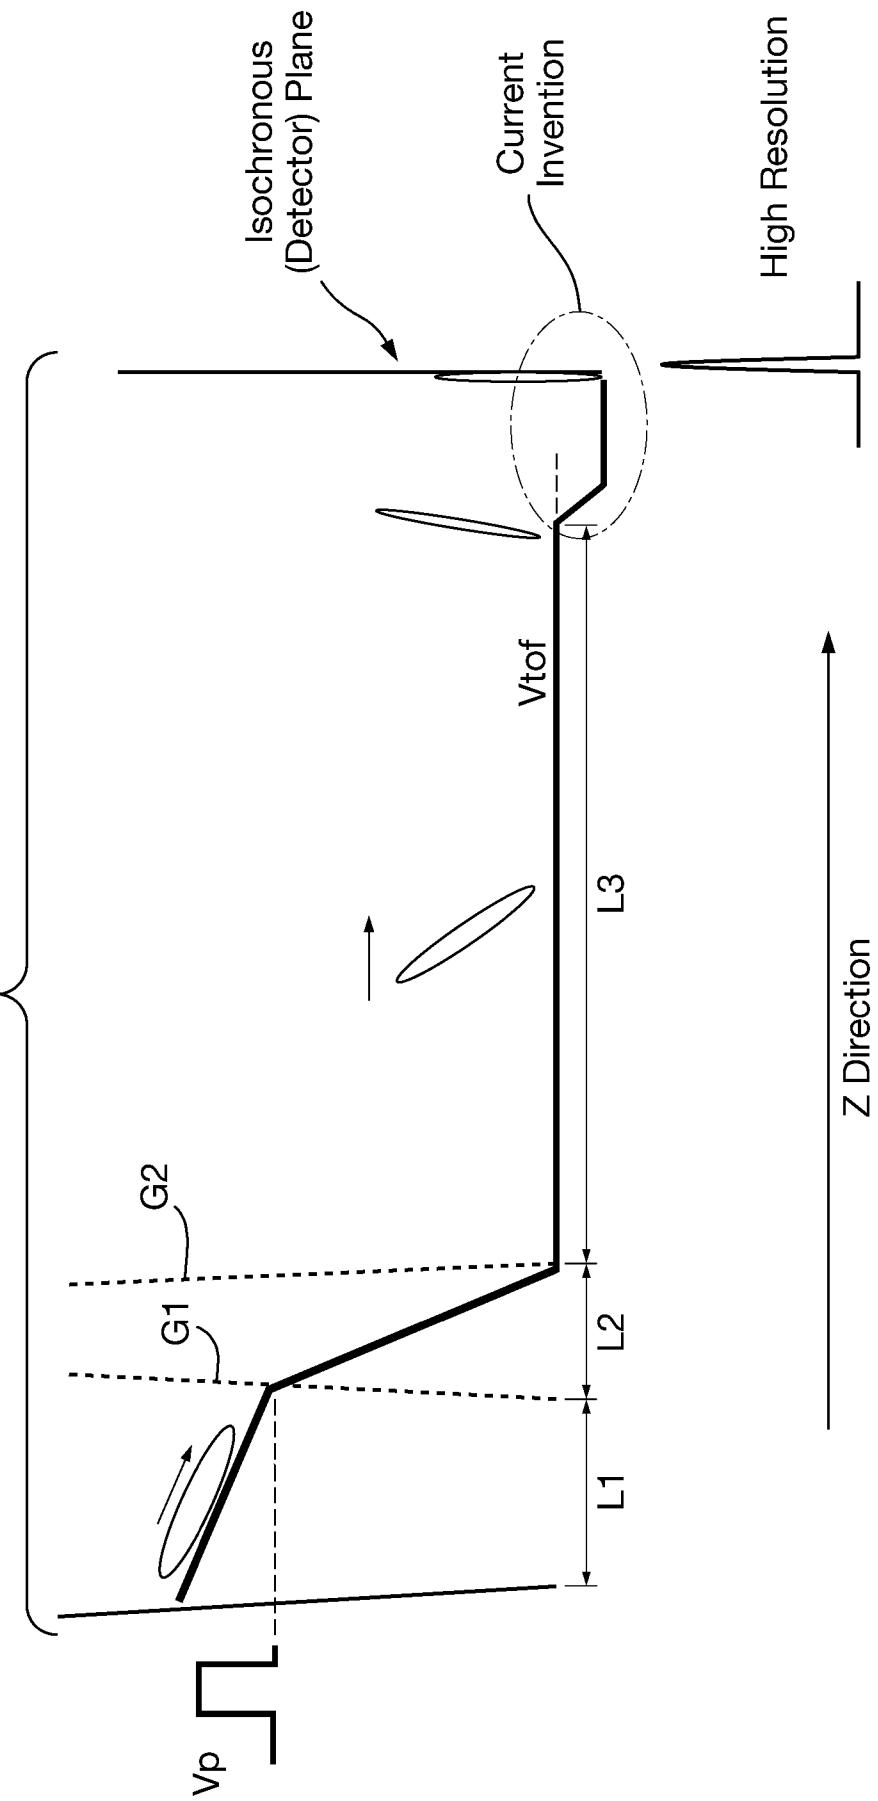


Fig. 5

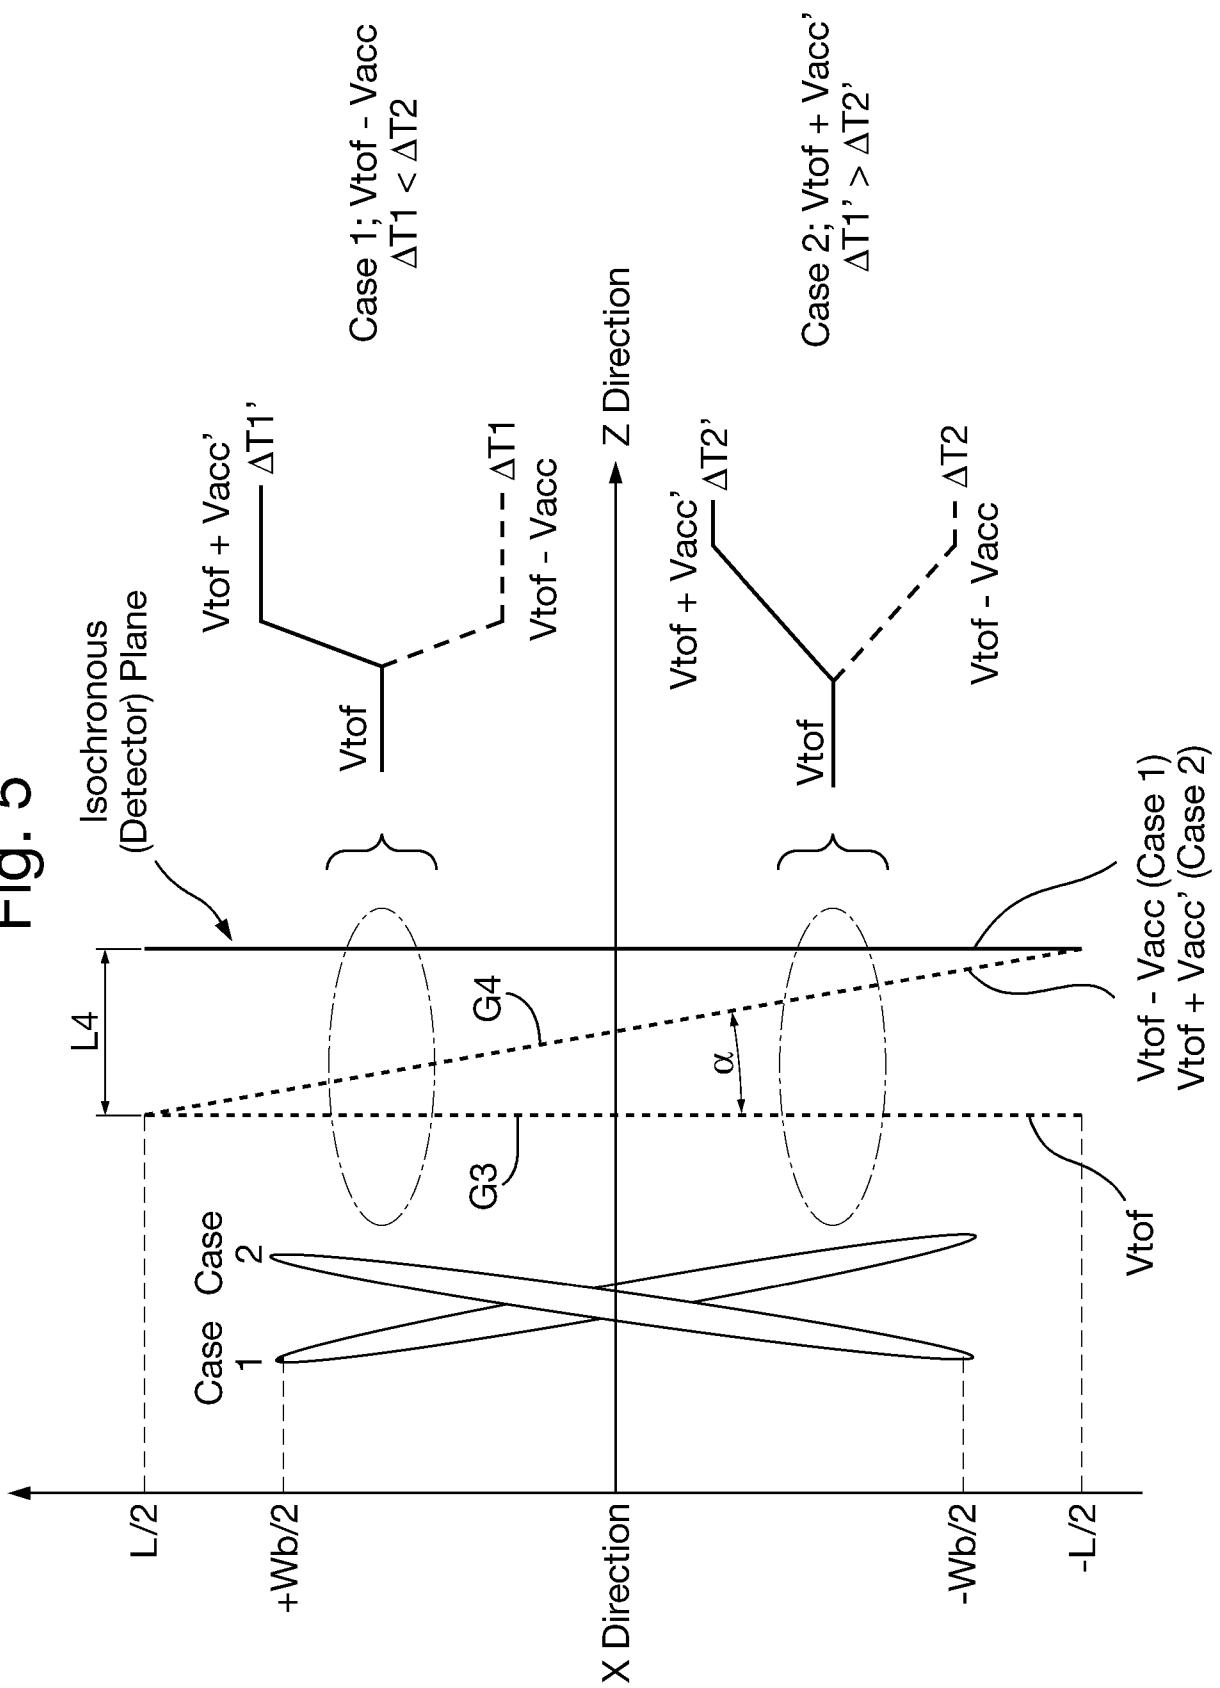

6/11

**Fig. 6**  
 Principle Planes, Less Parallel but Corrected by  
 Invention in Both X & Y Dimensions

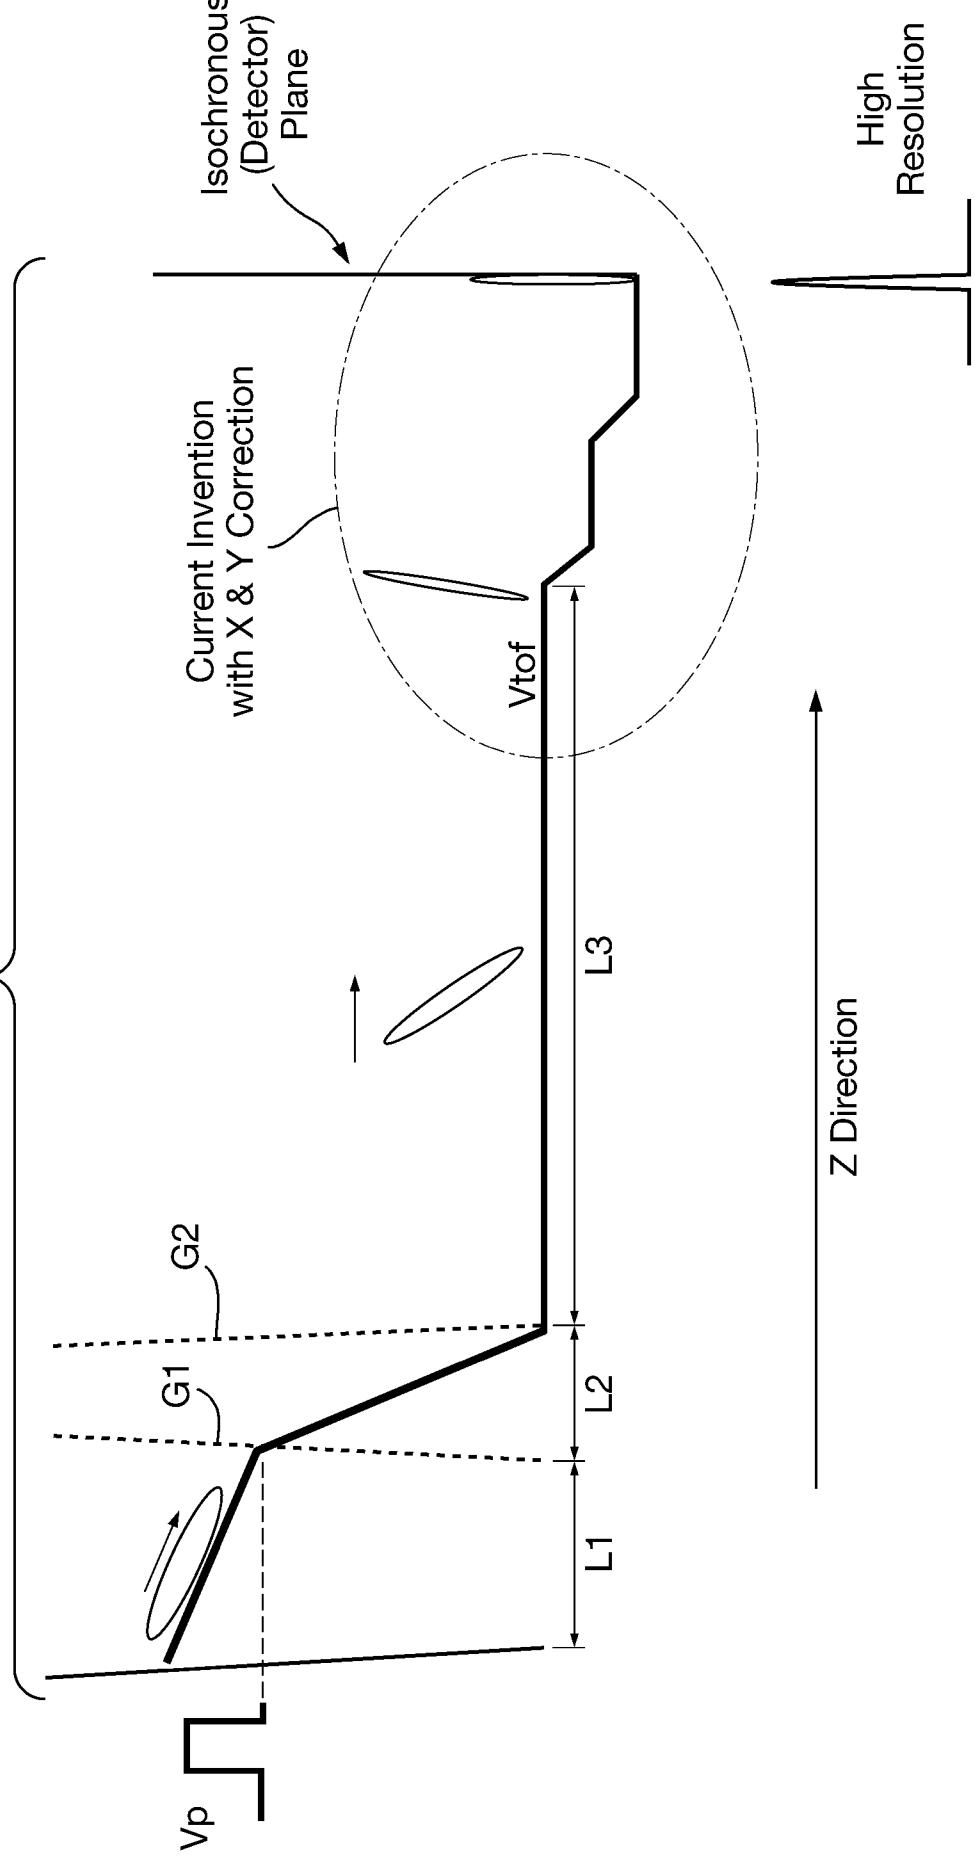


Fig. 7A


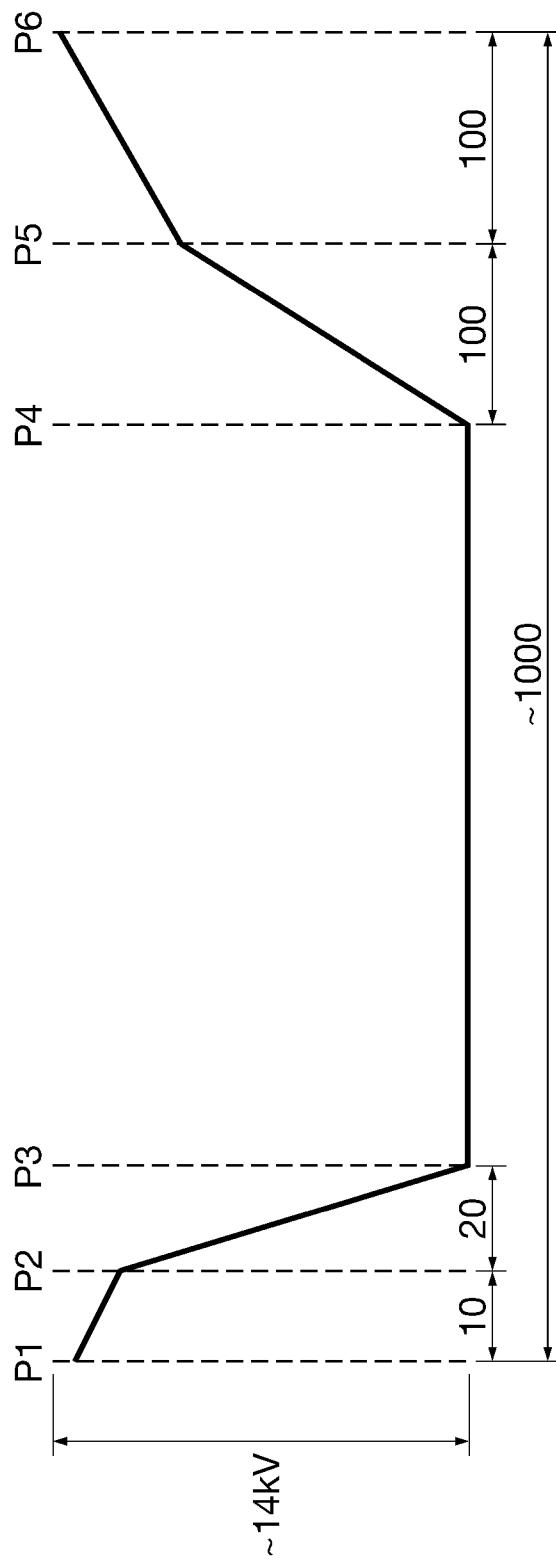


Fig. 7B

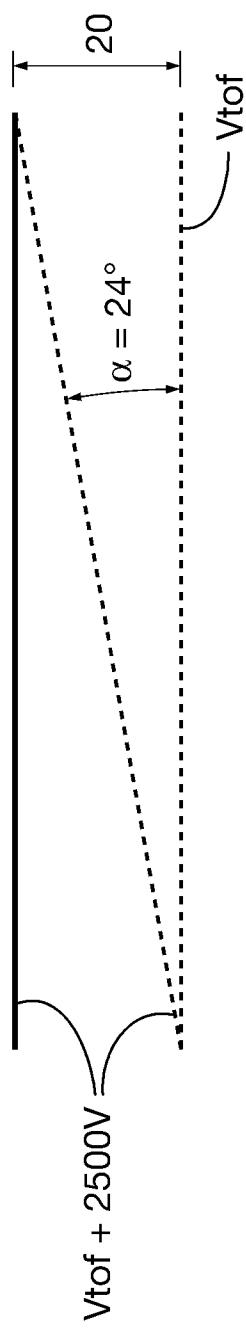

8/11

Fig. 8


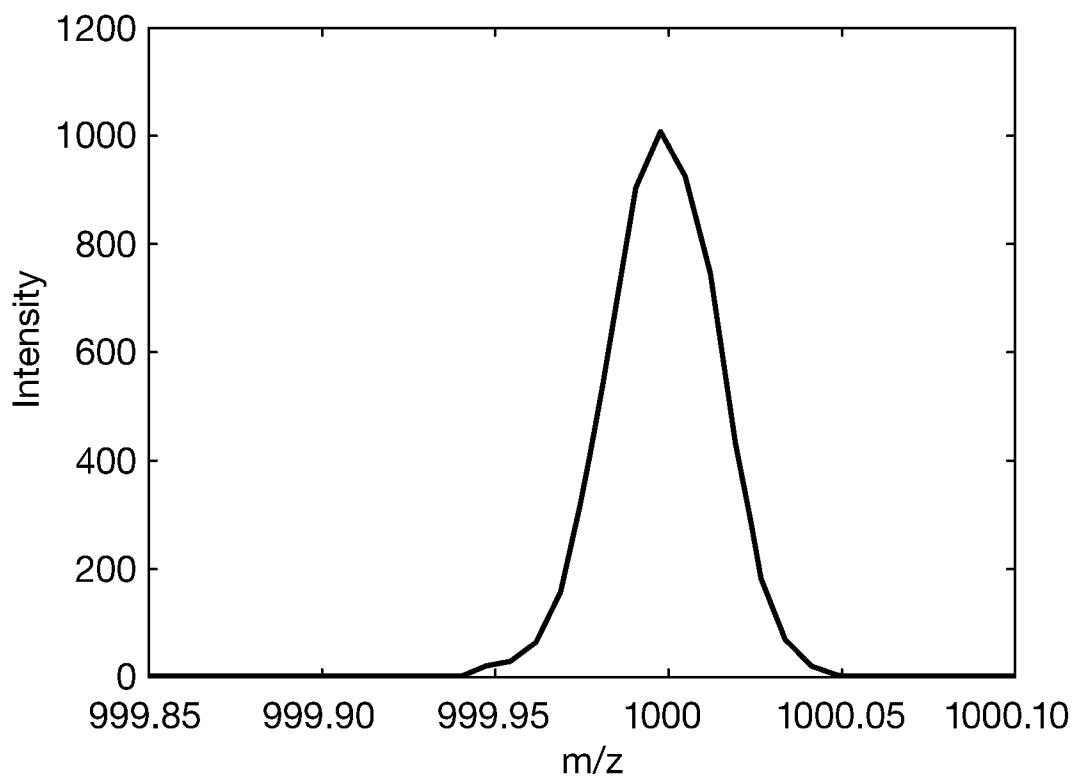


Fig. 9

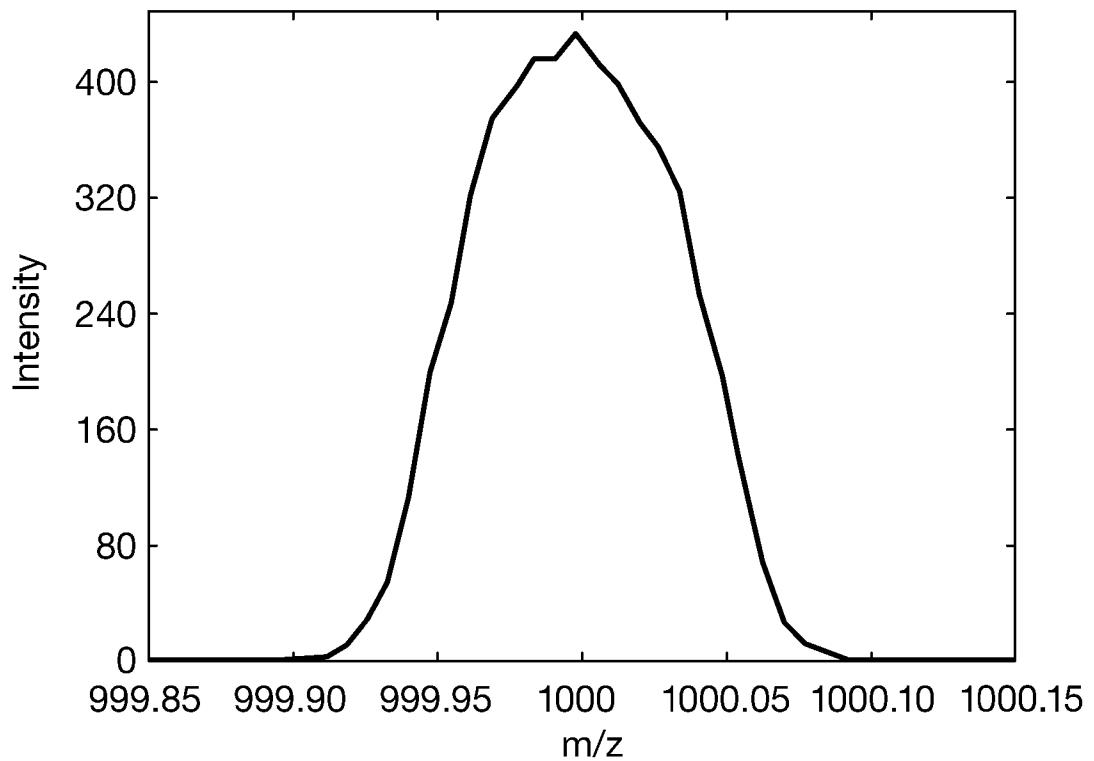

9/11

Fig. 10


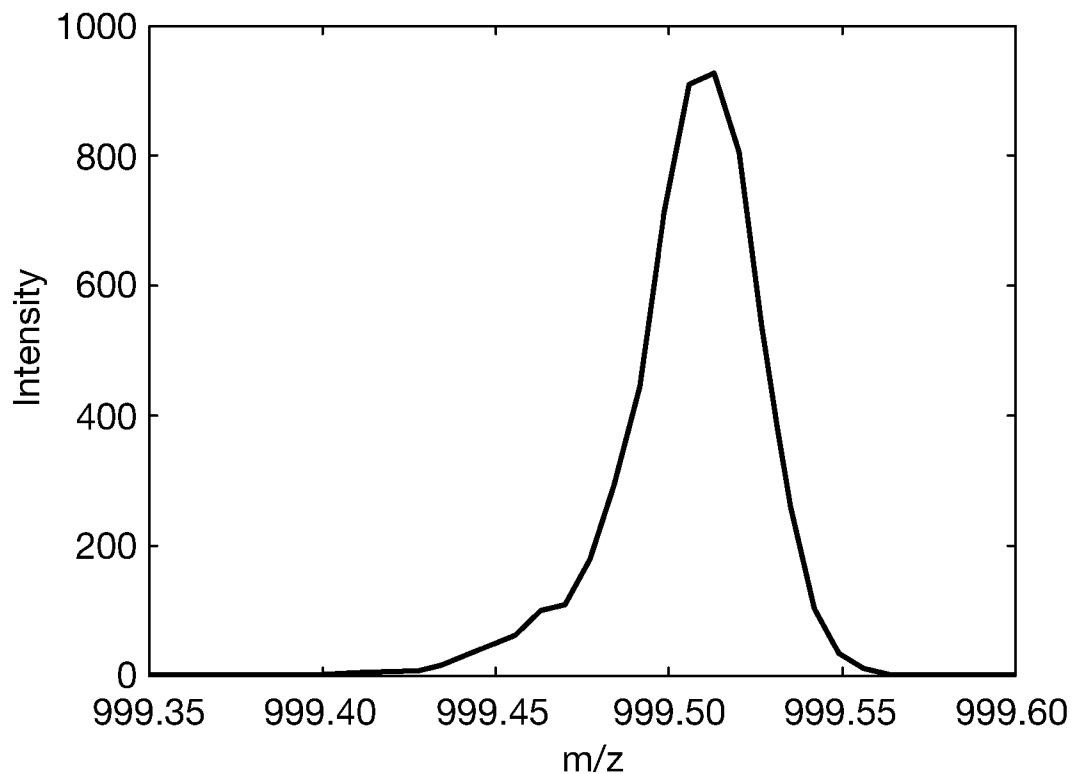


Fig. 11

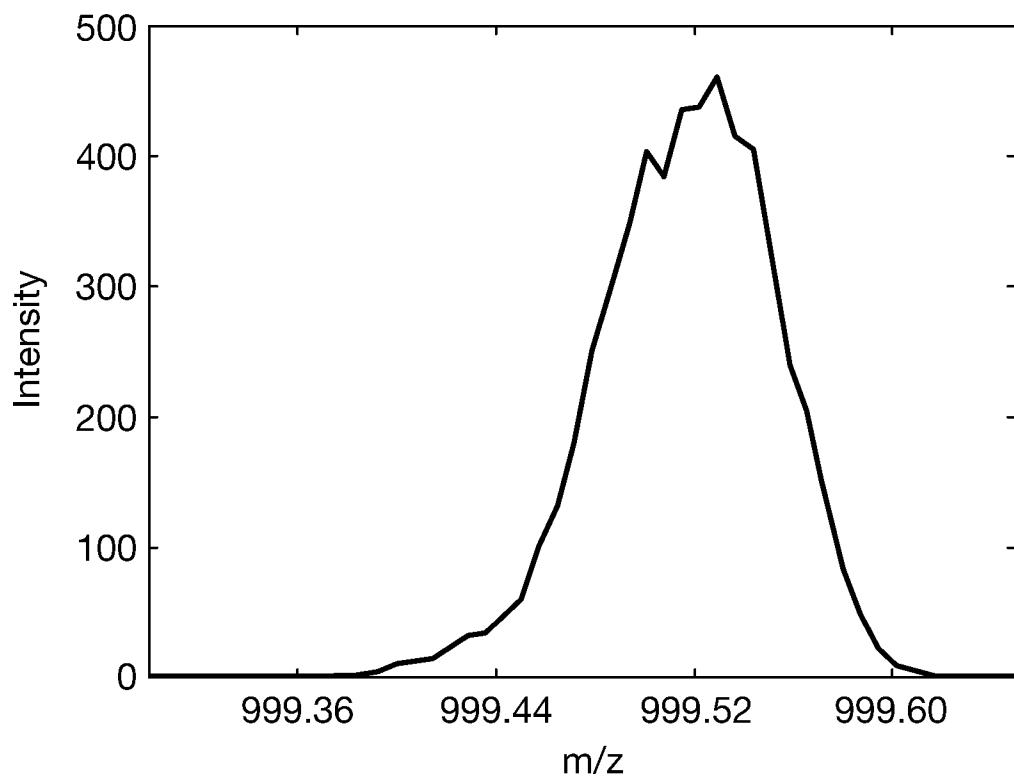

10/11

Fig. 12


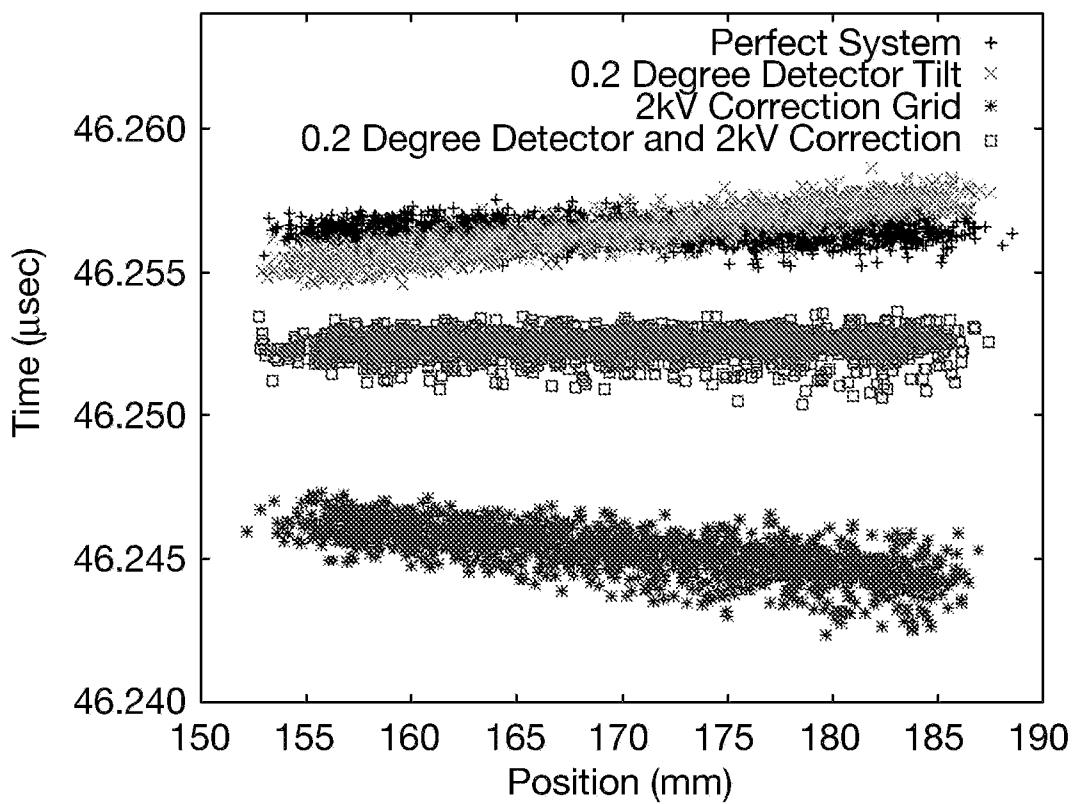


Fig. 13

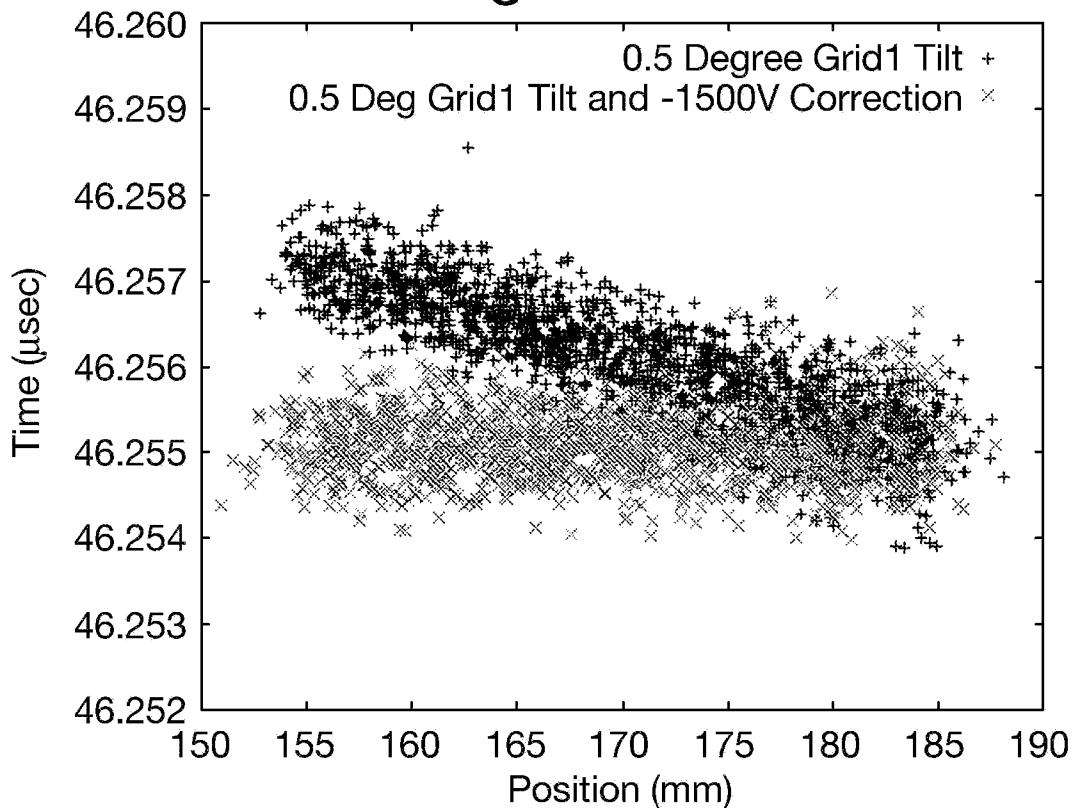

11/11

Fig. 14


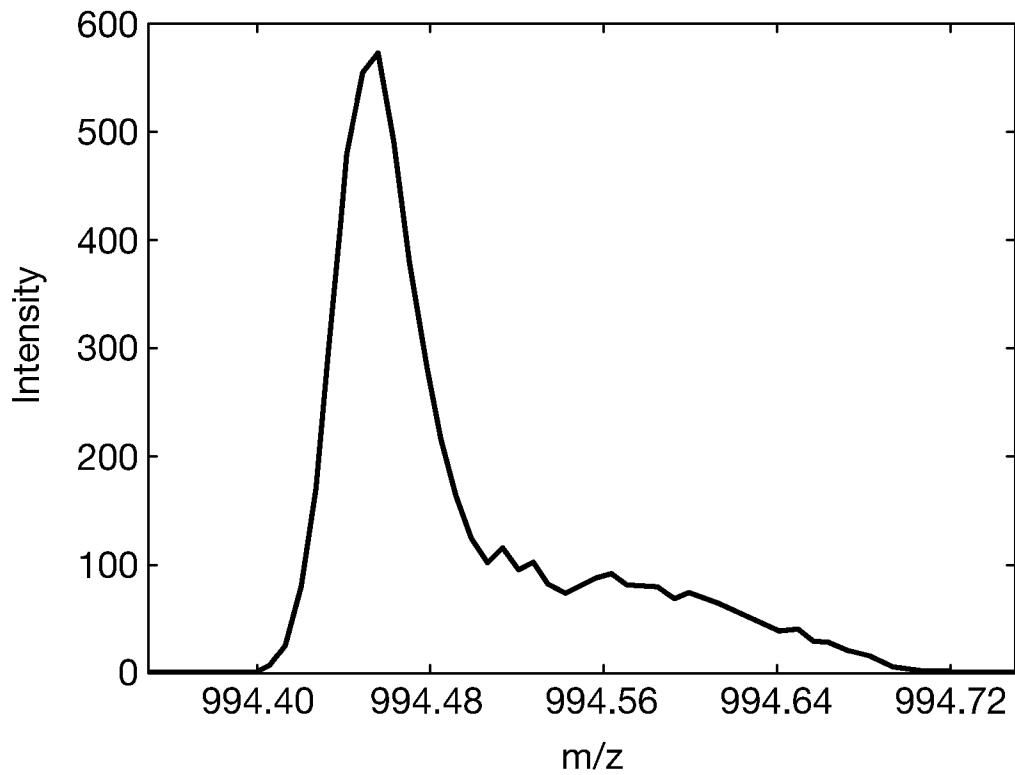


Fig. 15

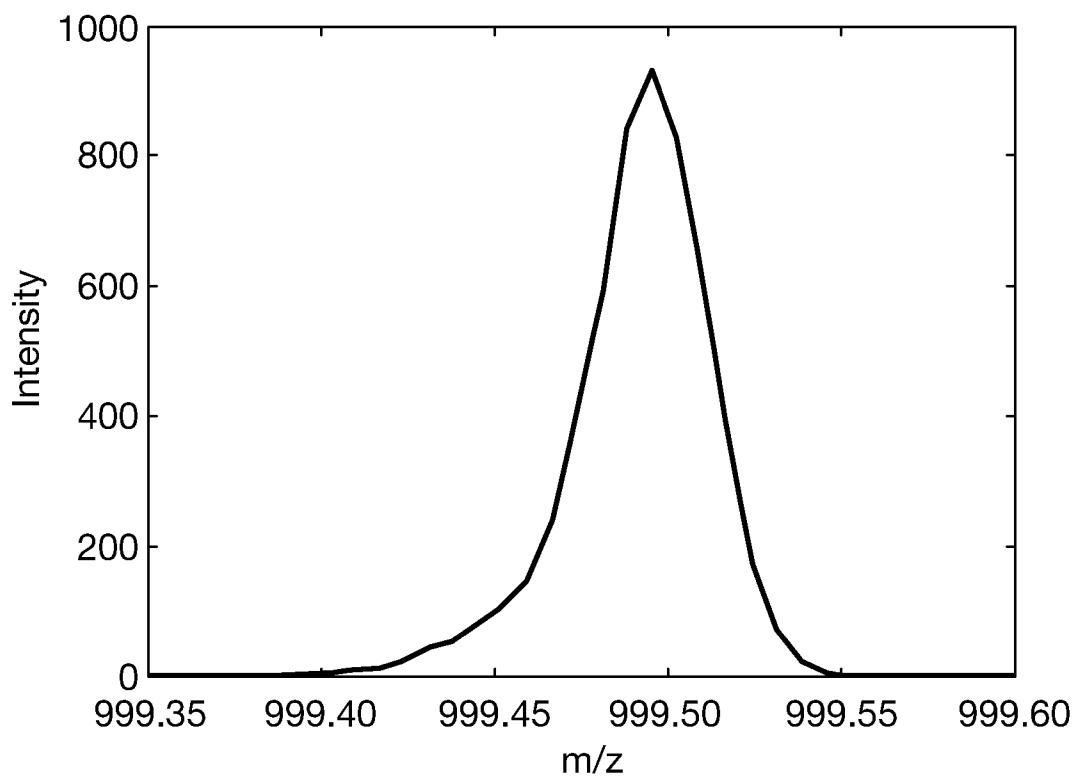

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2012/050549

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. H01J49/40  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/193681 A1 (VESTAL MARVIN L [US]) 5 August 2010 (2010-08-05)  paragraph [0052] - paragraph [0057]; figures 2,3a paragraph [0050] - paragraph [0051] -----	1-3, 7-11, 14-32
X	US 5 654 544 A (DRESCH THOMAS [DE]) 5 August 1997 (1997-08-05) column 1 - column 2; figures 4,5 column 6, line 63 - column 9, line 59 -----	1-17, 26-32
X	WO 03/058673 A2 (AMERSHAM BIOSCIENCES AB [SE]; AXELSSON JAN [SE]) 17 July 2003 (2003-07-17) page 1; figures 1,2 -----	1-15,17, 26,31,32



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
23 July 2012	30/07/2012
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3046	Authorized officer  Rutsch, Gerald

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No  
PCT/GB2012/050549

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2010193681	A1 05-08-2010	US 2010193681	A1 2010090911	05-08-2010 12-08-2010
US 5654544	A 05-08-1997	NONE		
WO 03058673	A2 17-07-2003	AU 2003202541	A1 03058673	24-07-2003 17-07-2003