

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 April 2009 (09.04.2009)

PCT

(10) International Publication Number
WO 2009/045439 A1

- (51) International Patent Classification:
F41H 3/00 (2006.01) *F41H 11/02* (2006.01)
- (21) International Application Number:
PCT/US2008/011366
- (22) International Filing Date: 1 October 2008 (01.10.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/976,796 2 October 2007 (02.10.2007) US
- (71) Applicant (for all designated States except US): DOUBLESLOT, INC. [US/US]; 1200 Valley House Dr., Rohnert Park, California 94928 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SCOTT, Miles L. [US/US]; c/o Doubleslot, Inc., 1200 Valley House Dr., Rohnert Park, California 94928 (US). SHULMAN, Alan [US/US]; 4614 Morris Ct., Santa Rosa, California 95405 (US).
- (74) Agent: THAYER, Linda J.; Finnegan, Henderson, Farabow, Garrett & Dunner LLP, 901 New York Avenue, N. W., Washington, D.C., District of Columbia, 20001-4413 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report

[Continued on next page]

(54) Title: LASER BEAM PATTERN PROJECTOR

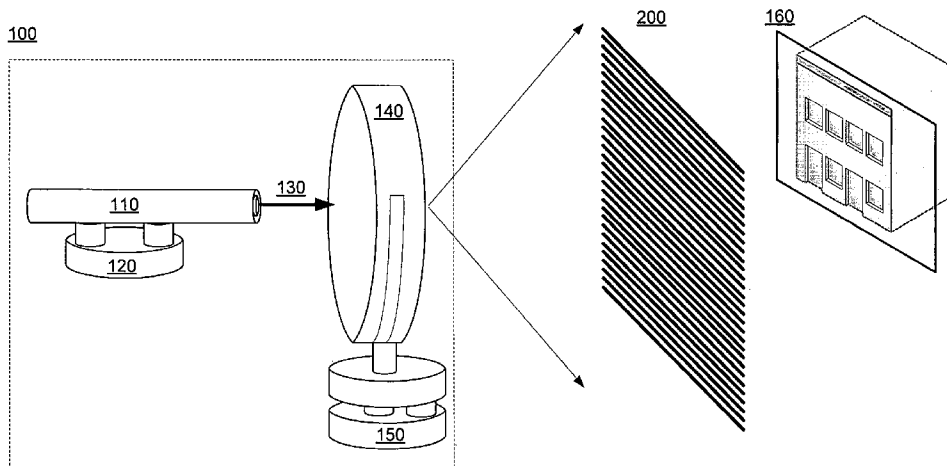


FIG. 1

(57) Abstract: Methods and systems consistent with some embodiments presented provide methods for denying visual access to a first area from a target area. In some embodiments, methods for denying visual access from a target area may include generating a structured light pattern and projecting the structured light pattern from onto the target area. The structured light pattern may be moved at a rate and in a pattern to deny visual access of a first area from the target area. In some embodiments, the rate and the pattern may be chosen based on characteristics of the target area.

WO 2009/045439 A1



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

LASER BEAM PATTERN PROJECTOR

DESCRIPTION

Cross-Reference to Related Applications

[001] The present application claims the benefit of priority of U.S. Provisional Application No. 60/976,796, filed October 2, 2007, entitled "Laser Beam Pattern Projector," the disclosure of which is expressly incorporated herein by reference in its entirety.

BACKGROUND

Technical Field

[002] Embodiments consistent with the presently-claimed invention are related to laser projection systems and, in particular, to methods and systems for creating an area of denied visual access.

Discussion of Related Art

[003] Non-lethal directed energy systems are increasingly used by law enforcement because of their ability to reduce fatalities and collateral damage. Some directed weapon systems use electromagnetic energy, such as lasers, to visually impair identified visual systems temporarily or to warn of suspected threats prior to using other protective measures. Other directed energy systems may be used proactively to protect a person or an object from unknown targets that may be in the surrounding area. For example, local authorities may wish to secure an area in preparation for a public appearance by a government official or a moving vehicle.

[004] In certain situations, however, existing directed energy systems utilizing lasers may be of limited effectiveness. For example, existing system may be ineffective when applied to large geographic areas. Existing systems have to blanket a large area with a more or less uniform illumination or scan the area with a single spot or line. The first case requires a very high power source; while the second approach is limited by the time required to scan a large area with a single spot or line. The scan time may limit dwell time and may require impractical rates of motion for large areas or multiple systems. In another example, some existing systems are designed to cause temporary vision impairment over a narrow range within a target area at some distance from the object or person to be protected. Often, these systems are aimed by an operator at a single location or manually swept across a target area. As a result, the ability to neutralize an undisclosed threat in a broad area is limited by the operator. Further, sufficient dwell time may not be available to cause the desired effects of aversion or disruption. Some existing systems have difficulty denying visual access across target areas having varying geographic and structural conditions. Some systems, for example, may be safely operated when targets are at an extended distance or widely dispersed. These systems, however, may create eye safety concerns when used at closer distances, such as in narrow corridors or within a building.

SUMMARY

[005] Provided herein is a method for denying visual access to a first area from a target area which comprises generating a structured light pattern and projecting the structured light pattern from the first area or some other area with proper geometry onto the target area. The structured light pattern may be moved at

a rate and in a pattern to deny visual access of the first area from the target area. The rate and the pattern may be chosen based on characteristics of the target area. In some embodiments, moving the structured light pattern at the rate and in the pattern based on characteristics of the target area may include determining a rate of motion and a dwell time associated with the structured light pattern based on a size of the target area and a density of the structured light pattern, and adjusting a pointing angle of a light source and a diffractive optic element based on the determination.

[006] There is also provided a system that includes a light source, a diffractive optic element configured to generate a structured light pattern in response to receiving optical signal, and a positioning unit configured to create an area of denied visual access by adjusting the pointing angle between the light source and the target area.

[007] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention. Further embodiments and aspects of the presently-claimed invention are described with reference to the accompanying drawings, which are incorporated in and constitute a part of this specification.

BRIEF DESCRIPTION OF THE DRAWINGS

[008] **FIG. 1** shows a block diagram illustrating an exemplary system for creating an area of denied visual access.

[009] **FIGS. 2A, 2B, 2C, and 2D** show exemplary images generated by transmitting a light source through a diffractive optic element in a manner.

[010] **FIG. 3** shows a flowchart illustrating steps in an exemplary method for creating an area of denied visual access.

DETAILED DESCRIPTION

[011] Reference will now be made in detail to embodiments, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[012] **FIG. 1** shows a block diagram illustrating components in system **100** for creating an area of denied visual access. As shown in **FIG. 1**, system **100** comprises a light source **110** and a diffractive optic element **140**. Light source **110** may be, for example, a laser or a partially coherent light source. Lasers may be, for example, a laser diode, a solid state laser, or a gas laser. In certain embodiments, light source **110** may be a green diode-pumped solid state (DPSS) laser. DPSS lasers may operate in continuous wave (CW), quasi-CW, analog modulated, or pulsed mode. The laser wavelength may be chosen based on the application, with exemplars of near UV or visible for biological visual systems (for example, human eyes), and the full range of optical wavelengths for electronic visual systems. Alternatively, light source **110** may be a partially coherent light source, such as a light emitting diode (LED).

[013] Diffractive optic element **140** may be a passive optical element having a surface consisting of complex microstructures forming a surface relief profile. In some embodiments, diffractive optic element **140** may be formed from a polymer substrate, such as polyimide or typical optical materials such as fused silica, germanium, or glass. The diffractive optic element **140** may be configured as a transmissive or reflective element. The surface relief profile may be created using various techniques including, but not limited to, lithography, direct machining, and replication. In some cases, a particular fabrication technique may be used based on

the geometry and complexity of the microstructures required to produce a particular relief pattern. For example, lithographic techniques similar to those used in semiconductor manufacturing may be used to create very complex multiple-layer microstructures. In some embodiments, the surface relief profile may be generated by a computer program executed by a processor. The computer program, for example, may execute instructions to create a particular surface relief profile corresponding to a desired structured light pattern. The computer program may be adapted for use with a variety of fabrication techniques, including those previously discussed. Diffractive optic element **140** may be comprised of multiple components lenses, diffraction gratings and other optics, which together act as a diffractive optic system, even though referred to herein as an "element." In some embodiments, a non-diffractive optic element (not shown) may be used in combination with diffractive optic element **140** to produce a desired structured light pattern. For example, a non-diffractive optic element, such as a Fresnel optic element, a traditional ground optic element, or a cast optic element, may be used to create a line in response to receiving an optical signal. Diffractive optical element **140** may be coupled to receive the resulting line output from the non-diffractive optic element to repeat the line, or other projected pattern elements, forming a structured pattern.

[014] Diffractive optic element **140** may be an active optical element. This element may be a liquid crystal, DLP™, or Liquid Crystal on Silicon (LCOS) micro-display panel configured as a spatial light modulator. An active optical element may be driven by a computer, an electronics board, or play back of pre-calculated data series. In response to receiving the data series, the active optic element may create a structured light patterns that varies based on the received data series. For example, in some cases, using an active the process of using an active optical

element to create a structured light pattern may be similar to the process used to send electronic data to a desk top projector. The difference, however, being that the pattern on the micro-display panel is a diffractive pattern where pixels have a phase shift component rather than a gray scale value. The active diffractive optic element **140** may be either reflective or transmissive.

[015] In certain embodiments, light source **110** may be mounted on optional positioning unit **120** with diffractive optic element **140** mounted to the light source **110** so that both devices move together. Positioning unit **120** and optical mount **150** enable light source **110** and diffractive optic element **140** to be moved and repositioned along multiple axes.

[016] In certain embodiments, light source **110** may be mounted on an optional positioning unit **120**. Similarly, diffractive optic element **140** may be mounted on an optical mount **150**. Positioning unit **120** and optical mount **150** allow light source **110** and diffractive optic element **140** to be moved and repositioned along multiple axes. Positioning unit **120** and/or optical mount **150** may be, for example, one or a combination of, actuators, optical mounts, gimbals, or similar devices. For example, in some embodiments, positioning unit **120** or optical mount **150** may be a positioning system consisting of multiple piezoelectric actuators. The range of motion, in this case, may be based on the number of piezoelectric actuators or other electromechanical factors. For example, by using six piezoelectric actuators, positioning unit **120** and/or optical mount **150** can move in six independent axes. The operation of positioning unit **120** and optical mount **150** may be controlled by one or a combination of software, firmware or hardware. Operating parameters may include, but are not limited to, speed of adjustment, resolution of movement, and pivot point. In some embodiments, positioning unit **120** and/or optical mount

150 may be a gimbal with some small degree of freedom of motion. Using a gimbal may allow the light source **110** and/or diffractive optic element **140** to move in a random pattern determined by external forces such as the motion of a vehicle upon which system **100** may be mounted.

[017] Light source **110** projects an optical signal **130** toward diffractive optic element **140**. Diffractive optic element **140** receives optical signal **130** from light source **110**, and transforms optical signal **130** into a structured light pattern, illustrated by image **200**. FIGS. **2A**, **2B**, **2C**, and **2D** show exemplary structured light patterns that may be generated. As shown in FIG. **2A**, image **200** may be comprised of a series of lines. The spacing of the line may be changed depending on various factors, such as the surface relief profile of diffractive optic element **140**. The lines may be parallel or arranged in some other fashion. Similarly, as shown in FIG. **2C**, image **200** may be one or more circles. The circles may be concentric, overlapping, or otherwise arranged. The circles may comprise closely spaced dots or lines. Other exemplary patterns for image **200** are a dot-array as shown in FIG. **2B** or a cross as shown in FIG. **2D**, although other patterns are also possible.

[018] Returning now to FIG. **1**, image **200** is projected onto target area **160**. Target area **160** is the area potentially containing a threat whose vision the system seeks to block. In certain embodiments, image **200** is moved around in target area **160** to create a moving pattern, as optical mount **120** redirects the light source **110**, and thus optical signal **130** in a different direction. Image **200**, in some cases, may also be projected in a stationary manner for some periods of time. By moving image **200** around in target area **160**, an area of denied visual access may be created. Moving image **200** may create an aversion response when image **200** is viewed by a human or disable the use of an electronic visual system.

[019] In certain embodiments, a green DPSS laser may be used as light source **110**. It is known that the human eye has a heightened sensitivity to green light. As a result, the aversion response caused by viewing image **200** when it is created using a green laser may be enhanced.

[020] In some embodiments, light source **110** may be a DPSS laser operating in quasi-CW, amplitude modulated, analog or pulsed amplitude modulated, or wavelength modulated. In these cases, it may be necessary to coordinate the pulse rate of the laser with the movement of the structured light pattern that is image **200**. Further the modulation of the light source may be chosen to create effects in visual systems.

[021] In some embodiments, light source **110** may have a variable output power, such that the light source may be made brighter or dimmer, manually or automatically. For example, light source **110** may be made brighter or stronger if system **100** is farther away from target area **160**, or dimmer if system **100** is closer. Alternatively or additionally, system **100** may be adjusted to produce a stronger light to increase the protection of the field of denied visual access or to frustrate countermeasures that may try to block the light. In some embodiments, light source **110** may be adjusted automatically in response to conditions perceived by system **100**. For example, system **100** may comprise a detector that detects the level of ambient light, or whether it is night or day, or whether there is precipitation, or the amount of optical signal **130** return energy. The detector may provide information to system **100** to adjust the system selectable output power. System **100** may also be configured based on the structural and geographic features of target area **160**. For example, higher output power may be required based on the distance between system **100** and target area **160**. In some embodiments, the distance may be

determined using a remote distance measuring device, such as a laser radar, a map, a global positioning system, or other similar device or technique.

[022] Consistent with some embodiments, light source **110** may be a partially-coherent light source, such as a light emitting diode. Partially-coherent light sources may produce a more distributed energy spectrum compared to energy emanating from a coherent light source. Accordingly, the resulting structured light pattern may be less defined. Partially-coherent light sources may also require more power to project image **200** on to target area **160** at a given distance as compared to using a coherent light source.

[023] **FIG. 3** shows a flowchart illustrating steps in an exemplary method for creating an area of denied visual access. It will be readily appreciated by one having ordinary skill in the art that the illustrated procedure can be altered to delete steps, move steps, or further include additional steps.

[024] In step **310**, an image is generated by projecting an optical signal through the diffractive optic element. An optical signal is emitted by, for example, light source **110** (as shown in **FIG. 1**) in the direction of a diffractive optic element, such as diffractive optic element **140** (also shown in **FIG. 1**). The passing of the optical signal through a diffractive optic element creates a structured light pattern, or image. The structured light pattern may have various dimensions and qualities depending, at least in part, on the surface relief profile or refractive index of the optic element or the incident angle between the optical signal and the diffractive optic element.

[025] In some embodiments, a user may select one of a plurality of diffractive optic elements, each producing a distinct structured light pattern. For example, in a system comprising multiple diffractive optic elements, a user may

select, using a computer controlled or mechanical interface, one of a plurality of diffractive optic elements. In a similar manner, a user may select one of a plurality of light sources to use in combination with one of a plurality of diffractive optic elements. In some embodiments, the selected combination of diffractive optic element and laser source may be configured to maintain eye-safe operation when viewed from a target area.

[026] In some embodiments, changes in the incident angle between the optical signal and the diffractive optic element may cause a proportional change in the spacing between the elements of the structured light pattern. By adjusting the incident angle between optical signal and the diffractive optic element, the spacing between the elements of the structured light pattern may be expanded or contracted accordingly.

[027] In step **320**, an image is projected onto a target area. The strength of the light or the structured light pattern that is used may be based on a number of factors, including environmental factors such as weather or light conditions, the distance to a target area from diffractive optic element, and the structural and geographic features of the target area. For example, if the light source projecting the light is determined to be far away from target area, the light may be projected at a higher power. If closer, the light may be projected at a lower power. Other factors may include non-environmental factors, such as the characteristics of an electronic visual system.

[028] In some embodiments, the power at which the light is projected may be adjusted manually and, in some cases, it may be adjusted automatically based on detected environmental factors. For example, the environmental factors may be detected by a detector within the light source itself, in another part of the system **100**,

or from an external source. In some embodiments, for example, the light source may be adjusted remotely, such as by a wireless signal transmitted from a location other than where the light source is.

[029] In certain embodiments, a particular structured light pattern may be better suited for the geographic or structural elements of a particular target area. For example, if the target area is a narrow corridor in between two structures or within a single structure, a diffractive optic element may be chosen that produces a dense structured light pattern, such as multiple parallel lines, a dot array, or concentric circles. Under these circumstances, the area of denied visual access may be smaller. Thus, using a dense structured light pattern may provide more effective distribution of the light energy across the area of denied visual access. Alternatively, a less dense pattern may be chosen in certain situations and under certain conditions. For example, in a large area of denied visual access, the structured light pattern may be more disperse to effectively distribute the light energy across the larger area.

[030] Consistent with some embodiments, patterns projected onto any portion of the target area are configured to be eye-safe when viewed from the target area consistent with Federal Aviation Administration (FAA), Occupational Safety and Health Administration (OSHA) or other standards that may be applicable to the area of implementation.

[031] In step **330**, the image is moved throughout the target area. The image may be moved by, for example, steering optical signal **130** to a new pointing position. In some embodiments, steering optical signal **130** may include using optical beam steering components between the output of light source **110** and diffractive optic element **140** to adjust the x and y positions of optical signal **130**

without moving light source **110**. That is, light source **110** may be stationary, while optical signal **130** may be steered to a new pointing position using optical beam steering techniques. In other embodiments, similar optical beam steering techniques and components may be used to adjust the pointing position by steering the structured light pattern as it leaves diffractive optic element **140**. In this case, optical beam steering components may be coupled to receive the output of diffractive optic element.

[032] In some embodiments, moving the image throughout target area **160** may include scanning the small area between the replicated pattern elements. For example, a projected structured light pattern **200** may be an array of lines with angular spacing of 1 degree between lines. Thus, by sweeping or steering the optical signal through 1 degree the projected pattern **200** would sweep through the 1 degree and illuminate all of the space between the lines in their initial stationary position. Redirection or scanning of optical signal **130** may be accomplished in any manner necessary to obtain the speed and resolution desired for a particular design application. In some embodiments, if diffractive optic element **140** is remotely located from light source **110** it may need to be adjusted to keep optical signal **130** within the aperture of diffractive optical element **140**.

[033] In some embodiments, the pointing position may be changed by adjusting the position of the light source relative to a fixed diffractive optic element. Changes to the position of the light source may be made in a controlled or pre-determined manner, in a random or pseudo random manner, or using a combination of both methods. For example, as shown in **FIG. 1**, light source **110** may be moved in multiple dimensions using positioning unit **120**, causing a corresponding change to the pointing position of optical signal **130** coupled to diffractive optic element **140**.

Here, positioning unit **120** may be moved based on computer control, operator control, remote control, or a combination thereof. Further, the manner in which light source **110** is moved may be based on several factors, such as pattern spacing of the projected image, structural and geographic characteristics of the target area, environmental factors, or the type and/or severity of the threat. In some embodiments, the pre-determined or controlled movement may occur in some type of pattern, such as sweeping from one direction to another, in a circular motion, or in another suitable pattern. For certain applications, image **200** may be moved quickly and for others image **200** may be moved more slowly. Image **200** may also be repeatedly moved and stopped in either a periodic or aperiodic fashion, such that image **200** is stationary for some period of time.

[034] In other embodiments, changes to the position of the light source relative to a fixed diffractive optic element may be made in a random or pseudo random manner. For example, a light source may experience random motion resulting from external forces such as the motion of a vehicle upon which the system may be mounted. System **100** may also be carried by a person, either stationary or moving. In this manner, system **100** may move with the person or vehicle. The transferred motion changes the pointing position of optical signal **130** coupled to diffractive optic element **140** by moving the position of light source **110**, and thereby moving the output optical signal **130**. The resulting induced random scan pattern causes image **200** to move across and illuminate target area **160** in a like manner, sufficiently redistributing the received energy associated with the structured light pattern throughout target area **160**. For example, in operation, the elements of the structured light pattern associated with image **200** may repeat every five degrees. Thus, a stationary image **200** may have spaces between the pattern elements that

would be free from illumination, and thus not subject to denial of visual access when projected onto a target area. The random movement of light source **110** as described above, would be designed to slightly exceed the five degree variation. Accordingly, the induced random movement of light source **110** may create a scan pattern with sufficient variation to cover the space between the elements of the structured light pattern, and thereby illuminate the entire target area.

[035] In some embodiments, both light source **110** and diffractive optic element **140** are coupled together and may be moved in a random pattern in response to external forces as previously described. In other embodiments light source **110** and diffractive optic element **140** may be moved in a pre-determined or controlled manner using positioning unit **120** and optical mount **150** as previously described. Additionally or alternatively, one of light source **110** or diffractive optic element **140** may be moved in a random manner while the other component is moved in a pre-determined or controlled manner.

[036] Returning to step **330**, adjustments to the pointing angle may be configured to control the rate of motion and dwell time of the corresponding image projected onto target area **160**. In some embodiments, the dwell time and the rate of motion may be determined based on the size of target area **160**. The dwell time determines the duration of time that the image remains stationary within a portion of target area **160**. The dwell time may be configured to cause image **200** to remain stationary long enough to create an ocular aversion response in the human eye without causing permanent injury to the eye. Alternatively, the dwell time may be configured to cause image **200** to remain stationary long enough to disrupt a biological or electronic visual system, sensor, or detector. In some cases, the disruption may be configured to affect principles of operation of the sensor. For

example, the dwell time may be configured to disrupt the frame capture operation of a sensor associated with an electronic visual system. The rate of motion determines the sweep rate of the image across target area **160**. In other words, the sweep rate defines how often the image reappears at a fixed location. The sweep rate may be configured to continually place the image at each location within target area **160** at a rate that prevents an observer in target area **160** from focusing on the object to be protected.

[037] In other embodiments, when the light source is a pulsed laser, the pulse rate of the laser may also be a factor in determining the rate of motion and dwell time. To provide complete coverage of the target area, the pulse rate of the laser may be coordinated with the movement of the spots within structured light pattern that is the image. For example, if the spots comprising the structured light pattern move half of the original spot spacing for each laser pulse, pattern coverage remains sufficient. However, if spots move one and one-half of the original spot spacing for each laser pulse, blind spots may be created in the pattern.

[038] By moving the image across a target area, an observer attempting to view the object to be protected from the target area will experience repeated ocular aversion responses. Ocular aversions may include, blinking, watery eyes, or pupil shrinkage. The degree of ocular aversion experienced is based, at least in part, on the broadcast intensity, sweep rate, and the dwell time of the moving image. For increased effectiveness, the sweep rate and dwell time provide repeated illumination of all locations within the target area sufficient to cause and/or recreate the aversion response. Similarly electronic visual systems may be disrupted by creating harmonic interference or overloading the system with excessive illumination.

[039] In certain embodiments, the image may be moved throughout a target area in a pattern designed to prevent the use of visual systems or detectors in the target area. For example, the image may be moved across target area **160** based on a determined sweep rate and dwell time on an area equal to or greater than the receiving system's integration time. The sweep rate and dwell time may be configured to repeatedly expose the sensor associated with the visual system or detector to an excessive amount of energy, rendering the system inoperable.

[040] Other embodiments will be apparent to those skilled in the art from consideration of the specification and practice of one or more embodiments of the inventions disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the inventions being indicated by the following claims.

WHAT IS CLAIMED IS:

1. A method for denying visual access to a first area from a target area, the method comprising:
 - generating a structured light pattern;
 - projecting the structured light pattern onto the target area; and
 - moving the structured light pattern at a rate and in a pattern to deny visual access of the first area from the target area, the rate and the pattern chosen based on characteristics of the target area..
2. The method of claim 1, wherein the rate and the pattern chosen are based on characteristics of the target area, a sensor in the target area, and principles of operation of the sensor.
3. The method of claim 2, wherein the sensor is an electronic sensor.
4. The method of claim 2, wherein the sensor is a biological sensor.
5. The method of claim 1, wherein generating the structured light pattern comprises projecting an optical signal through an optic element, wherein the optical signal is one of a time sequential, a continuous wave, a analog or a pulsed amplitude modulated, or a wavelength modulated signal.
6. The method of claim 5, wherein the optic element comprises a diffractive optic element, a Fresnel optic element, traditional ground optic element, or a cast optic element.

7. The method of claim 1, wherein projecting the structured light pattern onto the target area comprises:

selecting at least one of a plurality of diffractive optic elements based on at least one of environmental factors, distance to the target area, and structural or geographic features of the target area.

8. The method of claim 7, further comprising:

adjusting an output power of a light source based on at least one of the environmental factors, the distance to the target area, and the structural or the geographic features of the target area.

9. The method of claim 8, wherein the distance is determined using a remote distance measuring device.

10. The method of claim 9, wherein the remote distance measuring device includes a laser radar, a map, or a global positioning system.

11. The method of claim 1, wherein moving the structured light pattern at the rate and in the pattern based on characteristics of the target area comprises:

determining a rate of motion and a dwell time associated with the structured light pattern based on a size of the target area and a density of the structured light pattern; and

adjusting a pointing angle between a light source and a target area based on the determination.

12. The method of claim 11, wherein the dwell time is configured based on a pulse rate of the light source.
13. The method of claim 11, wherein the dwell time is configured to create an ocular aversion response in a human eye without causing permanent injury to the human eye.
14. The method of claim 11, wherein the dwell time is configured to disrupt a visual system, wherein the visual system is electronic or biological.
15. The method of claim 11, wherein the rate of motion is configurable.
16. The method of claim 11, wherein adjusting the pointing angle between the light source and the target area comprises adjusting a position of the light source relative to a position of the diffractive optic element, wherein the diffractive optic element remains stationary relative to the position of the light source.
17. The method of claim 16, wherein adjusting the position of the light source comprises one of:
 - adjusting a positioning unit associated with the light source; and
 - inducing random motion in response to an external source.
18. The method of claim 11, wherein the pointing angle is an angle between an initial position and an adjusted position of the light source.

19. The method of claim 11, wherein adjusting the pointing angle between the light source and the target area comprises adjusting a position of the light source and a position of the diffractive optic element relative to each other.

20. The method of claim 19, wherein adjusting the position of the light source and the position of the diffractive optic element comprises one of:

adjusting a positioning unit associated with the light source;

adjusting an optical mount associated with the diffractive optic element; and

inducing random motion in response to an external source.

21. A system comprising:


a light source;

an optic element configured to generate a structured light pattern in response to receiving optical signal; and

a positioning unit configured to create an area of denied visual access by adjusting an incident angle between the light source and the area of denied visual access.

22. The system of claim 21, further comprising a detector configured to adjust output power of the light source based on at least one of environmental factors, distance to the target area, structural or the geographic features of the target area, optical signal return energy, or a known parameter of a visual system or a detector.

23. The system of claim 21, wherein the light source comprises at least one of a laser and a partially-coherent light source.
24. The system of claim 23, wherein the laser comprises one of a laser diode, a solid state laser, or a gas laser.
25. The system of claim 23, wherein the partially-coherent light source includes a light emitting diode.
26. The system of claim 21, wherein the optic element comprises an active optical element configured to receive electronic data.
27. The method of claim 21, wherein the optic element comprises a diffractive optic element, a Fresnel optic element, traditional ground optic element, or a cast optic element.
28. The system of claim 21, wherein the structured light pattern comprises one of a dot-array, multiple parallel lines, a cross, and a pattern of concentric circles.
29. The system of claim 21, wherein the positioning unit comprises at least one of:
- an actuator;
 - a gimbal; and
 - an optical mount.

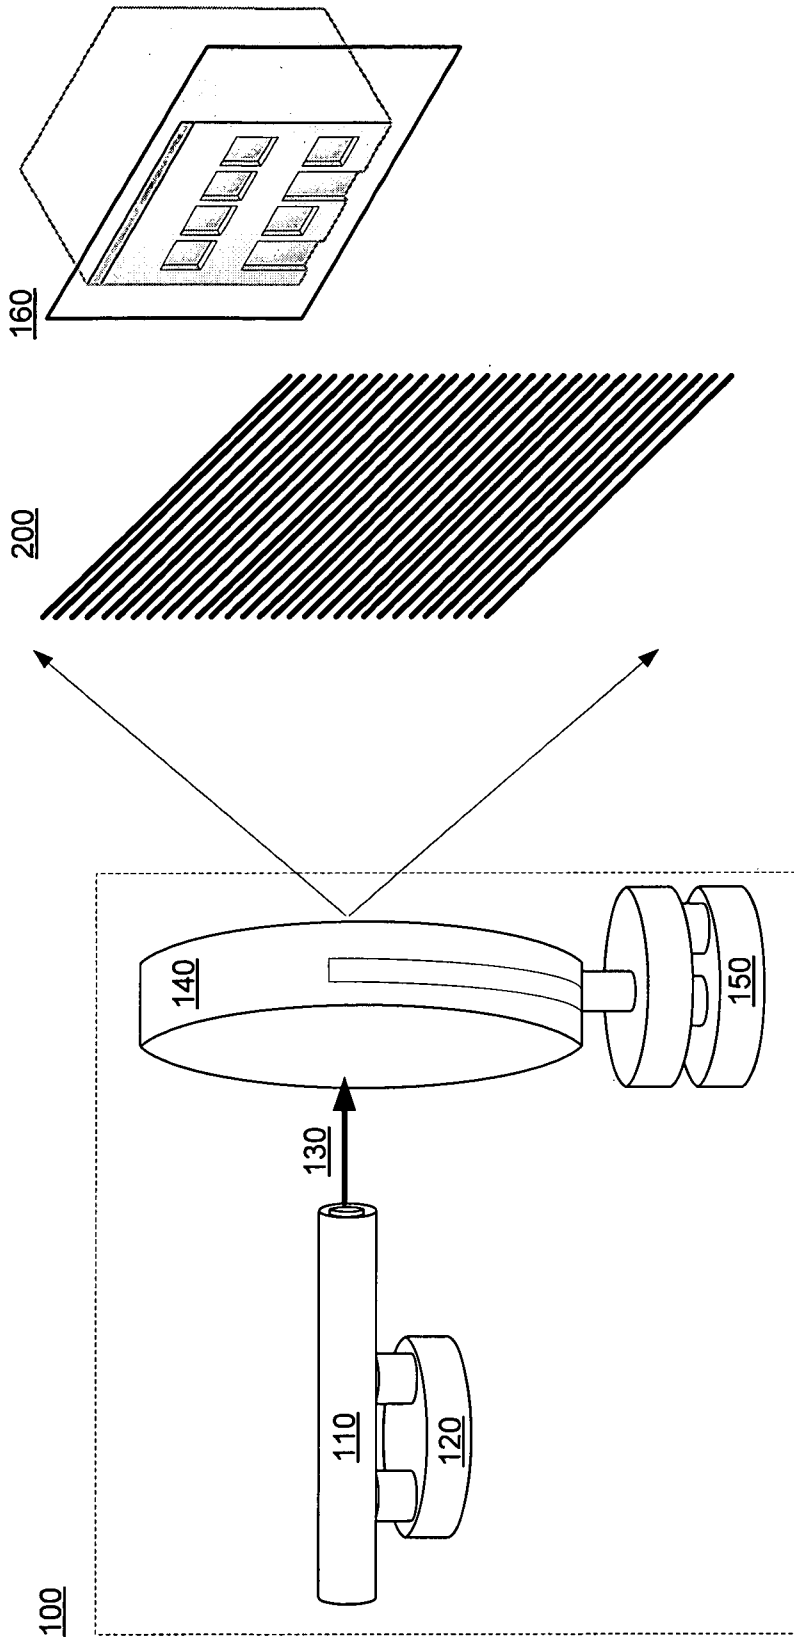

200

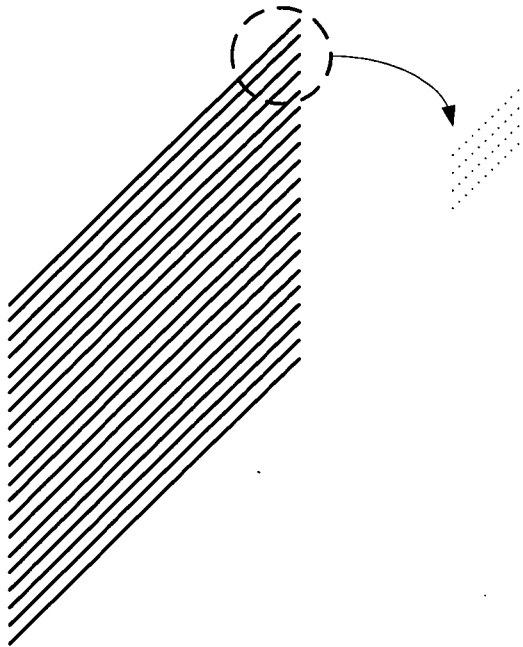


FIG. 2A

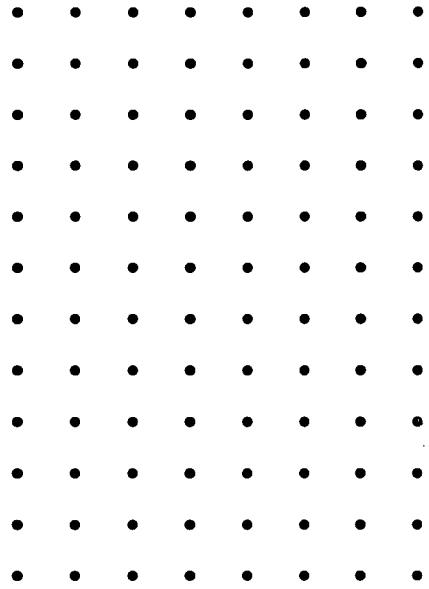


FIG. 2B

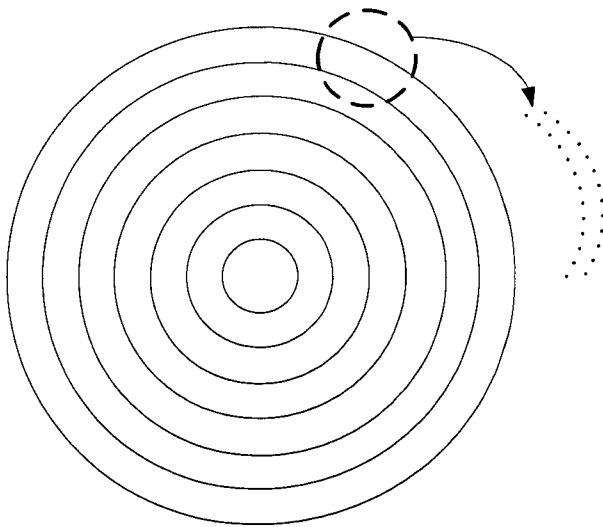


FIG. 2C

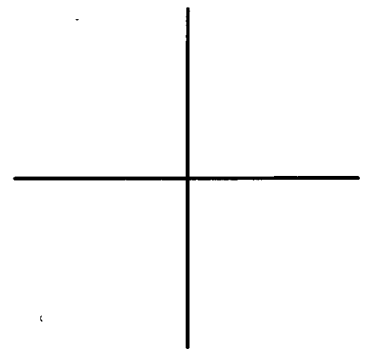


FIG. 2D

300

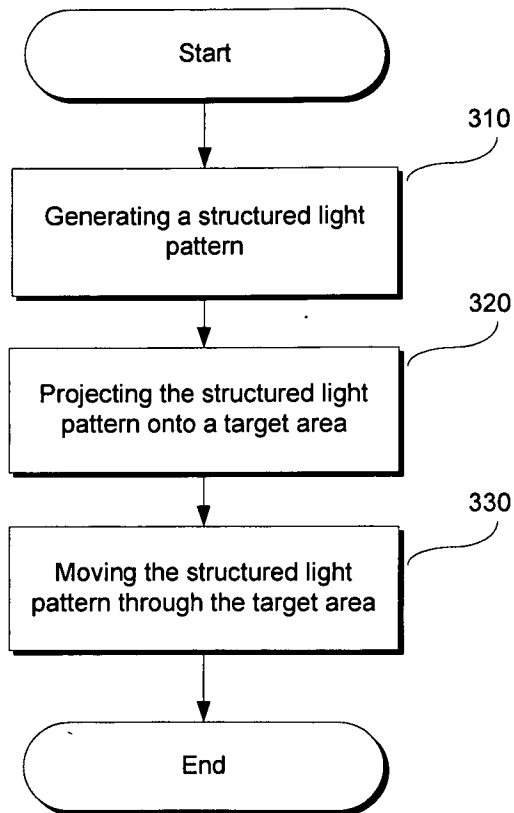


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/011366

A. CLASSIFICATION OF SUBJECT MATTER
INV. F41H3/00 F41H11/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F41H H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 703 314 A (MEEKER DELBERT BRENT [US]) 30 December 1997 (1997-12-30) column 1, line 66 - column 2, line 7 column 3, line 66 - column 4, line 38	1-29
A	WO 2006/057579 A (SAAB AB [SE]; AAKERLUND HANS [SE]) 1 June 2006 (2006-06-01) page 1, line 23 - page 2, line 12 claim 1	1-29

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

2 February 2009

12/02/2009

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Pigniez, Thierry

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/011366

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5703314	A	30-12-1997	NONE
WO 2006057579	A	01-06-2006	EP 1815207 A1 08-08-2007 US 2008074306 A1 27-03-2008