



- (51) International Patent Classification:  
*F02D 13/04* (2006.01)
- (21) International Application Number:  
PCT/US2013/037516
- (22) International Filing Date:  
22 April 2013 (22.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/637,881 25 April 2012 (25.04.2012) US
- (71) Applicant: INTERNATIONAL ENGINE INTELLEC-  
TUAL PROPERTY COMPANY, LLC [US/US]; 2701  
Navistar Drive, Lisle, Illinois 60532 (US).
- (72) Inventors; and
- (71) Applicants : BARTKOWICZ, Michael D. [US/US]; 307  
Greenwood Pl, Oswego, Illinois 60543 (US). GOTTE-


MOLLER, Paul [US/US]; 12209 South 93rd Avenue, Pa-  
los Park, Illinois 60464 (US). CATTANI, Luis Carlos  
[US/US]; 1163 Shoreline Drive, Aurora, Illinois 60504  
(US).

(74) Agent: BACH, Mark C.; 2701 Navistar Road, Lisle,  
Illinois 60532 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,  
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,  
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,  
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,  
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,  
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,  
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,  
ZM, ZW.

[Continued on next page]

(54) Title: ENGINE BRAKING

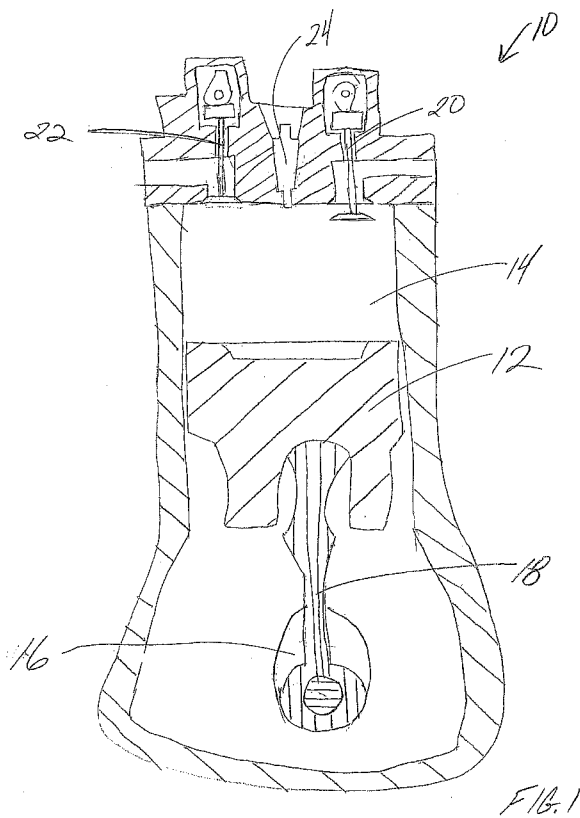

(57) Abstract: A system and method for controlling the quantity of compressed air that may enter into an engine cylinder during the intake stroke of a piston during an engine braking event. A control throttle may be positioned to restrict the quantity of compressed air that may enter into the cylinder during the intake stroke. The control throttle may also be positioned downstream of the engine and configured to adjustably restrict the quantity of exhaust gas that may be delivered to a turbine. By restricting the exhaust gas delivered to the turbine, the power generated by the turbine that is used by the compressor to compress intake air may also be reduced. Moreover, by controlling the power available to the compressor, the quantity of compressed intake air may be controlled, which allows for control of the quantity of compressed air that enters into the cylinder during the compression stroke.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
  - as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- Published:**
- with international search report (Art. 21(3))
  - with amended claims (Art. 19(1))

**Declarations under Rule 4.17:**

- as to the identity of the inventor (Rule 4.17(i))

Attorney Docket No. D7426

## ENGINE BRAKING

### BACKGROUND

[0001] Engine braking, including compression release brakes, are typically used to slow down momentum of a vehicle having an internal combustion engine after the driver has released, or is no longer engaging, the accelerator, such as releasing the operator's foot from the accelerator pedal. Engine braking may provide a way for slowing the movement of a vehicle that assists, or in certain circumstances operates in lieu of, traditional service brakes, such as friction brakes or magnetic brakes.

[0002] Traditionally, an engine brake, such as, for example, two or four-cycle Jake brake, develops its braking horse power by converting a moving vehicles forward momentum into mechanical work. More specifically, when the driver is not engaging the vehicle's accelerator, and the supply of fuel to the cylinders is shut off, the rolling of the tires or wheels of the vehicle causes the continued movement of the vehicle's drivetrain. Such continued movement of the drivetrain forces the crankshaft to continue to rotate, which is translated into the continued displacement of the pistons within the cylinders. Accordingly, as such displacement of the pistons includes the pistons undergoing a compression stroke, air within the cylinder continues to be compressed as the pistons are displaced toward a top dead center position in the cylinder. With compression release braking, the pressure of such compressed air in the cylinder provides a force that generally opposes this displacement of the piston. Moreover, the opposing force, or engine braking horsepower, of the compressed air during such a compression stroke may slow the movement of the pistons, and thereby assist in slowing the momentum of the vehicle.

[0003] Further, when the piston approaches, reaches, or passes an upper position in the cylinder, such as the top dead center position, the compressed air may be released from the cylinder, such as through an exhaust valve in the cylinder head. An intake valve may then be re-opened so that intake air that is to be pressurized by the subsequent compression stroke enters into the cylinder during an intake stroke. According to certain applications, this process may continue to be repeated until the engine speed and/or vehicle is reduced to a

desired level, such as, for example, the crankshaft being reduced to a range of revolutions per minute (rpm) (e.g. 1000 rpm).

**[0004]** One of the parameters that influence the amount of power developed by a compression release brake is the amount of compressed air delivered to the cylinder by the turbocharger during the intake stroke. For compression release brakes, engine control systems typically control the turbine side of the turbocharger to limit boost performance of the compressors that compress the air that enters the cylinder during an intake stroke. For example, a turbine(s) often uses exhaust gas to generate power that is used by compressor(s) to increase the pressure, and thus mass, of air that is supplied to the cylinder during an intake stroke. Systems may therefore limit or reduce the quantity of exhaust gas used by the turbine to reduce the amount of compressed air delivered to the power cylinder by the compressor(s) during the intake stroke. One example of decreasing the quantity of exhaust gas used to operate the turbine is by changing the position of the vane located at the inlet of the turbine of a variable-geometry turbocharger (VGT). Such alteration of the vane position may result in a reduction in exhaust energy available to, and power generated by, the turbine, and thereby decreases the amount of power available to the compressor to compress air. Such a reduction in compressor power may result in a reduction in the quantity of compressed air that is delivered to the intake valve and associated engine cylinder during the intake stroke.

**[0005]** However, such adjustments of the turbine vane may be, at least during certain operating conditions, insufficient to decrease the quantity of air being compressed by the compressor. For example, at high engine speeds, even with a change in the vane position, the turbine may still generate sufficient power for the compressor to compress a larger quantity of air than is desired for the engine brake. As a consequence, a larger than desired quantity of compressed air may enter into the engine cylinder during the intake stroke of an engine braking event. Moreover, such an overload of compressed air in the cylinder may result in an over boost in the force opposing the displacement of the piston during the compression stroke(s), thereby causing undue stresses on engine components, including an overload of the camshaft brake lobe. Further, such over boost may result in the production of unacceptable camshaft hertz stresses when the exhaust valve is open as the piston attains a top dead cylinder position in the cylinder.

## BRIEF SUMMARY

**[0006]** An aspect of an illustrated embodiment is a system for controlling the quantity of compressed air that may enter into the cylinder of an engine during the intake stroke of a piston during an engine braking event. The system includes a control throttle that is positioned upstream of the cylinder. The control throttle is configured to adjustably restrict a quantity of compressed air that may enter into the cylinder during the intake stroke of the piston. The system also includes an engine control unit that is configured to control the position of the control throttle so as to control the quantity of compressed air being restricted by the control throttle.

**[0007]** According to another embodiment, a system is provided for controlling the quantity of exhaust gas from an engine braking event that may enter into a turbine of a turbocharger. The system includes a control throttle positioned upstream of the turbine. The control throttle is operably connected to an auxiliary exhaust line. The control throttle is configured to adjustably divert at least a portion of the exhaust gas from the engine braking event into at least a portion of the auxiliary exhaust line. The auxiliary exhaust line is configured to allow the diverted exhaust gas flowing through the auxiliary exhaust line to bypass the turbine. Further, the system includes an engine control unit that is configured to control the position of the control throttle so as to control the quantity of exhaust gas diverted into the auxiliary exhaust line.

**[0008]** Additionally, according to another embodiment, a method is provided for controlling the quantity of compressed air that may enter into the cylinder of an engine during the intake stroke of a piston during an engine braking event. The method includes initiating an engine braking event. Further, an engine control unit determines the quantity of air being compressed by a compressor. The position of a control throttle is adjusted so as to control the quantity of compressed air entering into the cylinder during the intake stroke of the piston.

**[0009]** According to another embodiment, a method is provided for controlling the quantity of exhaust gas from an engine braking event that may enter into a turbine of a turbocharger. The method includes initiating an engine braking event. Additionally, an

engine control unit determines the quantity of exhaust gas being exhausted from the engine during the engine braking event. The method further includes adjusting the position of a control throttle to control the quantity of exhaust gas flowing through an auxiliary exhaust line. Additionally, the exhaust gas flowing through the auxiliary exhaust line is diverted around the turbine so that the exhaust gas flowing through the auxiliary exhaust line bypasses the turbine.

#### BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

**[0010]** Figure 1 is an exemplary representation of a portion of a four-stroke internal combustion engine.

**[0011]** Figure 2 illustrates an engine system that includes a control throttle in the intake air stream that is configured to control the amount of air delivered to the cylinder of an engine during the intake stroke of an engine braking event.

**[0012]** Figure 3 illustrates an engine system that includes a control throttle along an auxiliary exhaust line that is configured to allow exhaust gases to bypass the turbine of a turbocharger.

**[0013]** Figure 4 illustrates an engine system that includes a control throttle along the exhaust line that is configured to allow exhaust gases to bypass the turbine of a turbocharger.

#### DETAILED DESCRIPTION

**[0014]** For illustration purposes, Figure 1 is an exemplary representation of a portion of a four-stroke internal combustion engine 10. More specifically, Figure 1 illustrates a piston 12 housed in a cylinder 14 of the engine 10. The piston 12 may be operably connected to the crankshaft 16, such as by a connecting rod 18. The control of air into and out of the cylinder 14 may be controlled by the actuation of intake and exhaust valves 20, 22, respectively. Additionally, fuel may be introduced into the cylinder 14 by a variety of different devices, such as, for example, through a fuel injector 24.

**[0015]** In an effort to assist slowing and/or stopping the movement of the vehicle, some vehicles are equipped with an engine brake. The activation of the engine brake may be manually controlled by the operator of the vehicle, such as, for example, by switch that

provides the option of turning the engine brake feature on or off. Alternatively, the engine brake may be activated or deactivated automatically, such as, for example by the engine control unit (ECU). Accordingly, during certain periods of vehicle operation, such as, for example, while driving on a flat road with minimal traffic, the benefits of an engine brake may be unnecessary. In such situations, the engine brake may be deactivated. However, during other periods of operation, such as while attempting to reduce the speed of a vehicle that is descending downhill grades, such as mountainous or hilly areas, the engine brake may be activated such that the engine brake may assist in reducing and/or controlling the speed of the vehicle. Further, in such situations, the use of the engine brake may prevent wear, damage and/or a total loss of the vehicle's service brakes that can otherwise lead to runaway vehicle situations.

**[0016]** Figure 2 illustrates an engine system 30 that includes a control throttle 32 in the intake air stream that is configured to control the amount of air delivered to the cylinder 34 of an engine 36 during an intake stroke of an engine braking event. As shown, air for use in the operation of the engine system 30, such as for use during the internal combustion process, may flow along an intake line 38 that includes various hoses and/or tubes. For example, as shown in FIG. 2, air passes along a first portion of the intake line 38 and into a low pressure compressor 40 before flowing along a second portion of the intake line 38 to the interstage cooler 42. The air then flows through a high pressure compressor 44 and high pressure charged air cooler 46 before flowing through the another portion of the intake line 38 to an intake manifold 48.

**[0017]** The air may flow through the intake manifold 48 and to cylinders 34 of the engine 26, where the air may be used in a combustion event(s) that is used to displace the pistons of the engine 36, thereby transmitting the force of the combustion event(s) into mechanical power that is used to drive the drivetrain of the associate vehicle. The resulting hot exhaust gas produced by the combustion event(s) may flow out of the cylinders 34 and engine 36 through an exhaust port(s) and along an exhaust line 50.

**[0018]** At least a portion of the hot exhaust gas from the engine 36 may be diverted from the exhaust line 50 and to an exhaust gas recirculation (EGR) system 52. The EGR system

52 is configured to recirculate the diverted exhaust gas back to the intake manifold 48. However, before the EGR system 52 recirculates exhaust gas, the exhaust gas is typically cooled by an EGR cooler 54 or heat exchanger. A coolant, such as antifreeze mixtures or non-aqueous solutions, among others, typically circulates through the EGR cooler 54. According to some designs, the coolant and/or the heated exhaust gases flow through tubes, a jacket, or other forms of conduits in the EGR cooler 54. The EGR cooler 54 may be configured so that heated exhaust gases flow around and/or over tubes containing flowing coolant, or vice versa, causing heat from the exhaust gas to be transferred to the coolant. The EGR cooler 54 may also include fins that assist with the transfer of heat from the exhaust gas to the coolant. After exiting the EGR cooler 54, the cooled exhaust gas is delivered to the intake manifold 48, thereby allowing the cooled exhaust gas to enter into the cylinders 34 with the air that was delivered to the intake manifold 48 through the intake line 38.

**[0019]** Exhaust gas that is not diverted to the EGR system 52 may continue to flow along the exhaust line 50 and be delivered to a high pressure turbine 54. The exhaust gas, and the heat entrained therein, may then at least assist in driving the high pressure turbine 54. Power generated by the high pressure turbine 54 may at least in part be used to power or drive the high pressure compressor 44. According to certain embodiments, the high pressure turbine 54 may be a variable geometry turbine (VGT).

**[0020]** Exhaust gas exiting the high pressure turbine 54 may then flow along the exhaust line 50 to a low pressure turbine 56. The low pressure turbine 56 may also be configured to be driven by the exhaust gas, and the heat entrained therein. Additionally, operation of the low pressure turbine 36 may be used to power or drive the low pressure air compressor 40. Exhaust gas exiting the low pressure turbine 56 may then be released from the exhaust line 50. For example, the exhaust gas may be outputted from the low pressure turbine 56 to an exhaust gas after-treatment system, an ancillary system that continues to utilize heat entrained in the exhaust gas, and/or into the environment.

**[0021]** In the embodiment illustrated in Figure 2, the compressors 40, 44 and their associated turbines 54, 56 may provide two-stage turbochargers in series. The compressors 40, 44 may typically be used to generate a wide range of air flow needed to satisfy air flow

requirements for combustion events and the EGR system 52 during various engine 36 and/or vehicle operating conditions. According to other embodiments, rather than using a two-stage turbochargers, the engine system 30, may employ a single turbocharger, including, for example, a VGT.

**[0022]** In the embodiment illustrated in Figure 2, the amount of compressed air that is delivered to the cylinders 34 may be controlled by a control throttle 32. For example, the control throttle 32 may be a throttle plate or butterfly valve that is operably connected to, or is inserted in, the intake line 38 or the intake manifold 48. For example, the control throttle 32 may be housed in a throttle housing that intersects a portion of the intake line 38. Further, the control throttle 32 is positioned to restrict or prohibit the flow of air past the control throttle 32. For example, the control throttle 32 may be adjusted from a first position, where the control throttle provides minimal restriction, if any, to the flow of air along the intake line 38, to a second position, in which the control throttle 32 generally substantially restricts and/or blocks the flow of air past the control throttle 32 and/or into the cylinder(s) 34. The control throttle 32 may also be adjusted between various positions so as to allow for adjustments, and further control, of the quantity of compressed air that is allowed to flow past the control throttle 32 and subsequently into the cylinder(s) 34 during the intake stroke of an engine braking event.

**[0023]** The operation of the control throttle 32 may be controlled by an electronic control unit or module (ECU) 58. The ECU 58 may include logic or a control strategy that utilizes the information provided to the ECU 58 indicative of the quantity of compressed air being outputted by the high pressure compressor 44 and/or being delivered to the intake manifold 48. For example, one or more sensors 60, such as pressure and/or flow sensors, may be positioned along the intake line 38 and/or intake manifold 48 that provide information reflecting the quantity of compressed air that may enter into the cylinder(s) 34 during the intake stroke of piston during an engine braking event. Using at least this information as well as the associated control strategy or logic, the ECU 58 may determine when during the braking event the position of the control throttle 32 is to be moved, or adjusted, to either restrict or increase the quantity of compressed air available to enter into the cylinder(s) 34 during the intake stroke. The ECU 58 may then provide a signal used to operate an actuator

62 that is operably connected to the control throttle 32, and which may cause the adjustment of the position of the control throttle 32. A variety of different types of actuators 62 may be employed for adjusting the position of the control throttle 32, including, for example, electric, pneumatic/electro-pneumatic, and electro-hydraulic actuators. Further, by controlling the quantity of compressed air that enters the cylinders 34 during the intake stroke of an engine braking event, the quantity of air that exits the engine 36 and which subsequently enters the turbine 54 may also be controlled.

**[0024]** Figure 3 illustrates an engine system 70 that includes a control throttle 32 along an auxiliary exhaust line 72 that is configured to allow exhaust gases, such as the compressed air released from the cylinder 14 during the engine braking event, to bypass the turbine 54 of a turbocharger 74. In the embodiment illustrated in Figure 3, similar to the exhaust line 50, a first end 82 of the auxiliary exhaust line 72 may also be operably connected to the exhaust manifold 74 of the engine 36. When the control throttle 32 is in a closed position, the exhaust gas may be prevented from flowing past the control throttle 32 and through the auxiliary exhaust line 72, and thereby allow at least a substantial quantity of the exhaust gas to enter into the exhaust line 50. However, when the control valve 32 is not in a closed position, at least a portion of the exhaust gas removed from the cylinders 14 flows through the auxiliary exhaust line 72, while the remainder of the exhaust gas enters the exhaust line 50. The auxiliary exhaust line 72 allows exhaust gas flowing there through to bypass at least one turbine 54, 56. The auxiliary exhaust line 72 may then deliver the exhaust gas to a location downstream of turbine(s) 54, 56. For example, as shown in Figure 3, a second end 84 of the auxiliary exhaust line 72 may be operably connected to the exhaust line 50 downstream of the high pressure turbine 54 of a first turbocharger 74 and a low pressure turbine 56 of a second turbocharger 78. Alternatively, for example, the auxiliary exhaust line 72 may deliver the exhaust gas to an exhaust gas treatment device or system or vent the exhaust gas into the atmosphere.

**[0025]** By allowing exhaust gas in the auxiliary exhaust line 72 to bypass the turbine 54, the mass flow of exhaust gas used to operate the turbine 54 is reduced to only that gas supplied to the turbine 54 through the exhaust line 50. Such a reduction in the quantity of exhaust gas delivered, and thereby used to drive, the turbine 54 may result in a reduction in

the amount of power generated by the turbine 54 that is to be used to operate the corresponding compressor 44 of the turbocharger 74. Such reduction in the power used to operate the compressor 44 may reduce the amount of air compressed by the compressor 44, and thereby decrease the quantity of compressed air that may enter into the cylinder(s) 14 during the intake stroke of an engine braking event. For embodiments in which the turbocharger 74 is a variable-geometry turbocharger, the amount of exhaust gas energy available to the turbine 54 may be further reduced by adjusting the position of the vane located at the inlet of the turbine 54, 56.

**[0026]** As shown in Figure 3, a sensor 60, such as, for example, a pressure or flow sensor may be positioned along the exhaust line 50. The sensor 60 may provide information to the ECU 58 that is used by the ECU 58 to determine if the position of the control throttle 32 should be adjusted so as to adjust or change the quantity of exhaust gas that is allowed to flow through the auxiliary exhaust line 72. Moreover, by sensing the condition or quantity of exhaust gas entering or flowing through the exhaust line 50, the ECU 58 may be able to determine whether a reduction in the amount of exhaust gas being delivered to the turbine(s) 54, 56 is necessary so as to cause a reduction in the quantity of air being compressed by the compressor(s) 40, 44. In addition, or in lieu of having the sensor 60 positioned along the exhaust line 50, the sensor 60 may also be positioned along the intake line 38 or intake manifold 48, as illustrated in Figure 2. Again, according to certain embodiments, the ECU 58 may be able to control the positioning of the control throttle 32 through the operation of an actuator 62.

Figure 4 illustrates an engine system 80 that includes a control throttle 32 along the exhaust line 50 that is configured to allow exhaust gases to bypass the turbine 54 of a turbocharger 74. As shown, according to certain embodiments, the control throttle 32 may be positioned along the exhaust line 50 and configured to divert at least a portion of the exhaust gas flowing through the exhaust line 50 upstream of the turbine 54 into the auxiliary exhaust line 72. Accordingly, a first end 82 of the auxiliary exhaust line 72 may be operably connected to the control throttle 32, or the housing containing the control throttle 32, such that the control throttle 32 may divert exhaust gas out of the exhaust line 50 and into the auxiliary exhaust line 72. Similar to the embodiment shown in Figure 3, the second end 84 of the auxiliary

exhaust line 72 may be operably connected to the exhaust line 50 or an exhaust treatment system downstream of one or more turbines 54, 56.

## CLAIMS

1. A system for controlling the quantity of compressed air that may enter into the cylinder of an engine during the intake stroke of a piston during an engine braking event, the system comprising:

a control throttle positioned upstream of the cylinder, the control throttle configured to be adjustably positioned to restrict a quantity of compressed air that may enter into the cylinder during the intake stroke of the piston; and

an engine control unit configured to control the position of the control throttle so as to control the quantity of compressed air being restricted by the control throttle.

2. The system of claim 1, further including a variable geometry turbocharger, the variable geometry turbocharger including a compressor upstream of the control throttle and a turbine downstream of the engine, and further including a vane located at approximately the inlet of the turbine, the vane being configured to be adjustable so as to reduce the air flow mass of an exhaust gas from the engine that flows into the turbine during the engine braking event.

3. The system of claim 2 further including a sensor, the sensor configured to provide information to the engine control unit that is used by the engine control unit to determine whether the position of the control throttle is to be adjusted.

4. The system of claim 3, wherein the sensor is a pressure sensor.

5. The system of claim 3 wherein the control throttle is positioned within the intake line.

6. The system of claim 3 wherein the control throttle is housed in a housing operably connected to the intake line.

7. A system for controlling the quantity of exhaust gas from an engine braking event that may enter into a turbine of a turbocharger, the system comprising:

a control throttle positioned upstream of the turbine, the control throttle operably connected to an auxiliary exhaust line, the control throttle configured to adjustably divert at least a portion of the exhaust gas from the engine braking event into at least a portion of the auxiliary exhaust line, the auxiliary exhaust line positioned to allow the diverted exhaust gas flowing through the auxiliary exhaust line to bypass the turbine; and

an engine control unit configured to control the position of the control throttle so as to control the quantity of exhaust gas diverted into the auxiliary exhaust line.

8. The system of claim 7, wherein the turbocharger is a variable geometry turbocharger, and wherein a position of a vane located at approximately the inlet of the turbine is adjustable so as to reduce the air flow mass of the exhaust gas flowing into the turbine during an engine braking event.

9. The system of claim 7 further including a sensor, the sensor configured to provide information to the engine control unit that is used by the engine control unit in to determine whether to adjust the position of the control throttle.

10. The system of claim 9, wherein the sensor is a pressure sensor.

11. The system of claim 7, wherein the control throttle is positioned along a section of the auxiliary gas line.

12. The system of claim 7 wherein the control throttle is operably connected to both the exhaust line and the auxiliary exhaust line, the control throttle being configured to receive exhaust gas through the exhaust line and divert at least a portion of the received exhaust gas into the auxiliary exhaust line.

13. A method for controlling the quantity of compressed air that may enter into the cylinder of an engine during the intake stroke of a piston during an engine braking event, the method comprising:

initiating an engine braking event;

determining, by an engine control unit, the quantity of air being compressed by a compressor; and

adjusting the position of a control throttle to control the quantity of compressed air entering into the cylinder during the intake stroke of the piston.

14. The method of claim 14 including the step of sensing the pressure of the compressed air, the sensed pressure being used by the engine control unit in determining the quantity of air that is to be restricted by the control throttle.

15. A method for controlling the quantity of exhaust gas from an engine braking event that may enter into a turbine of a turbocharger, the method comprising:

initiating an engine braking event;

determining, by an engine control unit, the quantity of exhaust gas being exhausted from the engine during the engine braking event;

adjusting the position of a control throttle to control the quantity of exhaust gas flowing through an auxiliary exhaust line; and

diverting the exhaust gas flowing through the auxiliary exhaust line around the turbine so that the exhaust gas flowing through the auxiliary exhaust line bypasses the turbine.

**AMENDED CLAIMS**  
**received by the International Bureau on 08 August 2013 (08.08.2013)**

1. A system for controlling the quantity of compressed air that may enter into the cylinder of an engine during the intake stroke of a piston during an engine braking event, the system comprising:

a control throttle positioned upstream of the cylinder, the control throttle configured to be adjustably positioned to restrict a quantity of compressed air that may enter into the cylinder during the intake stroke of the piston; and

an engine control unit configured to control the position of the control throttle so as to control the quantity of compressed air being restricted by the control throttle.

2. The system of claim 1, further including a variable geometry turbocharger, the variable geometry turbocharger including a compressor upstream of the control throttle and a turbine downstream of the engine, and further including a vane located at approximately the inlet of the turbine, the vane being configured to be adjustable so as to reduce the air flow mass of an exhaust gas from the engine that flows into the turbine during the engine braking event.

3. The system of claim 2 further including a sensor, the sensor configured to provide information to the engine control unit that is used by the engine control unit to determine whether the position of the control throttle is to be adjusted.

4. The system of claim 3, wherein the sensor is a pressure sensor.

5. The system of claim 3 wherein the control throttle is positioned within the intake line.

6. The system of claim 3 wherein the control throttle is housed in a housing operably connected to the intake line.

7. A system for controlling the quantity of exhaust gas from an engine braking event that may enter into a turbine of a turbocharger, the system comprising:

a control throttle positioned upstream of the turbine, the control throttle operably connected to an auxiliary exhaust line, the control throttle configured to adjustably divert at least a portion of the exhaust gas from the engine braking event into at least a portion of the auxiliary exhaust line, the auxiliary exhaust line positioned to allow the diverted exhaust gas flowing through the auxiliary exhaust line to bypass the turbine; and

an engine control unit configured to control the position of the control throttle so as to control the quantity of exhaust gas diverted into the auxiliary exhaust line wherein the control throttle is positioned along a section of the auxiliary gas line.

8. The system of claim 7, wherein the turbocharger is a variable geometry turbocharger, and wherein a position of a vane located at approximately the inlet of the turbine is adjustable so as to reduce the air flow mass of the exhaust gas flowing into the turbine during an engine braking event.

9. The system of claim 7 further including a sensor, the sensor configured to provide information to the engine control unit that is used by the engine control unit in to determine whether to adjust the position of the control throttle.

10. The system of claim 9, wherein the sensor is a pressure sensor.

11. The system of claim 7 wherein the control throttle is operably connected to both the exhaust line and the auxiliary exhaust line, the control throttle being configured to receive exhaust gas through the exhaust line and divert at least a portion of the received exhaust gas into the auxiliary exhaust line.


12. A method for controlling the quantity of compressed air that may enter into the cylinder of an engine during the intake stroke of a piston during an engine braking event, the method comprising:

initiating an engine braking event;

determining, by an engine control unit, the quantity of air being compressed by a compressor; and

adjusting the position of a control throttle to control the quantity of compressed air entering into the cylinder during the intake stroke of the piston.

13. The method of claim 12 including the step of sensing the pressure of the compressed air, the sensed pressure being used by the engine control unit in determining the quantity of air that is to be restricted by the control throttle.

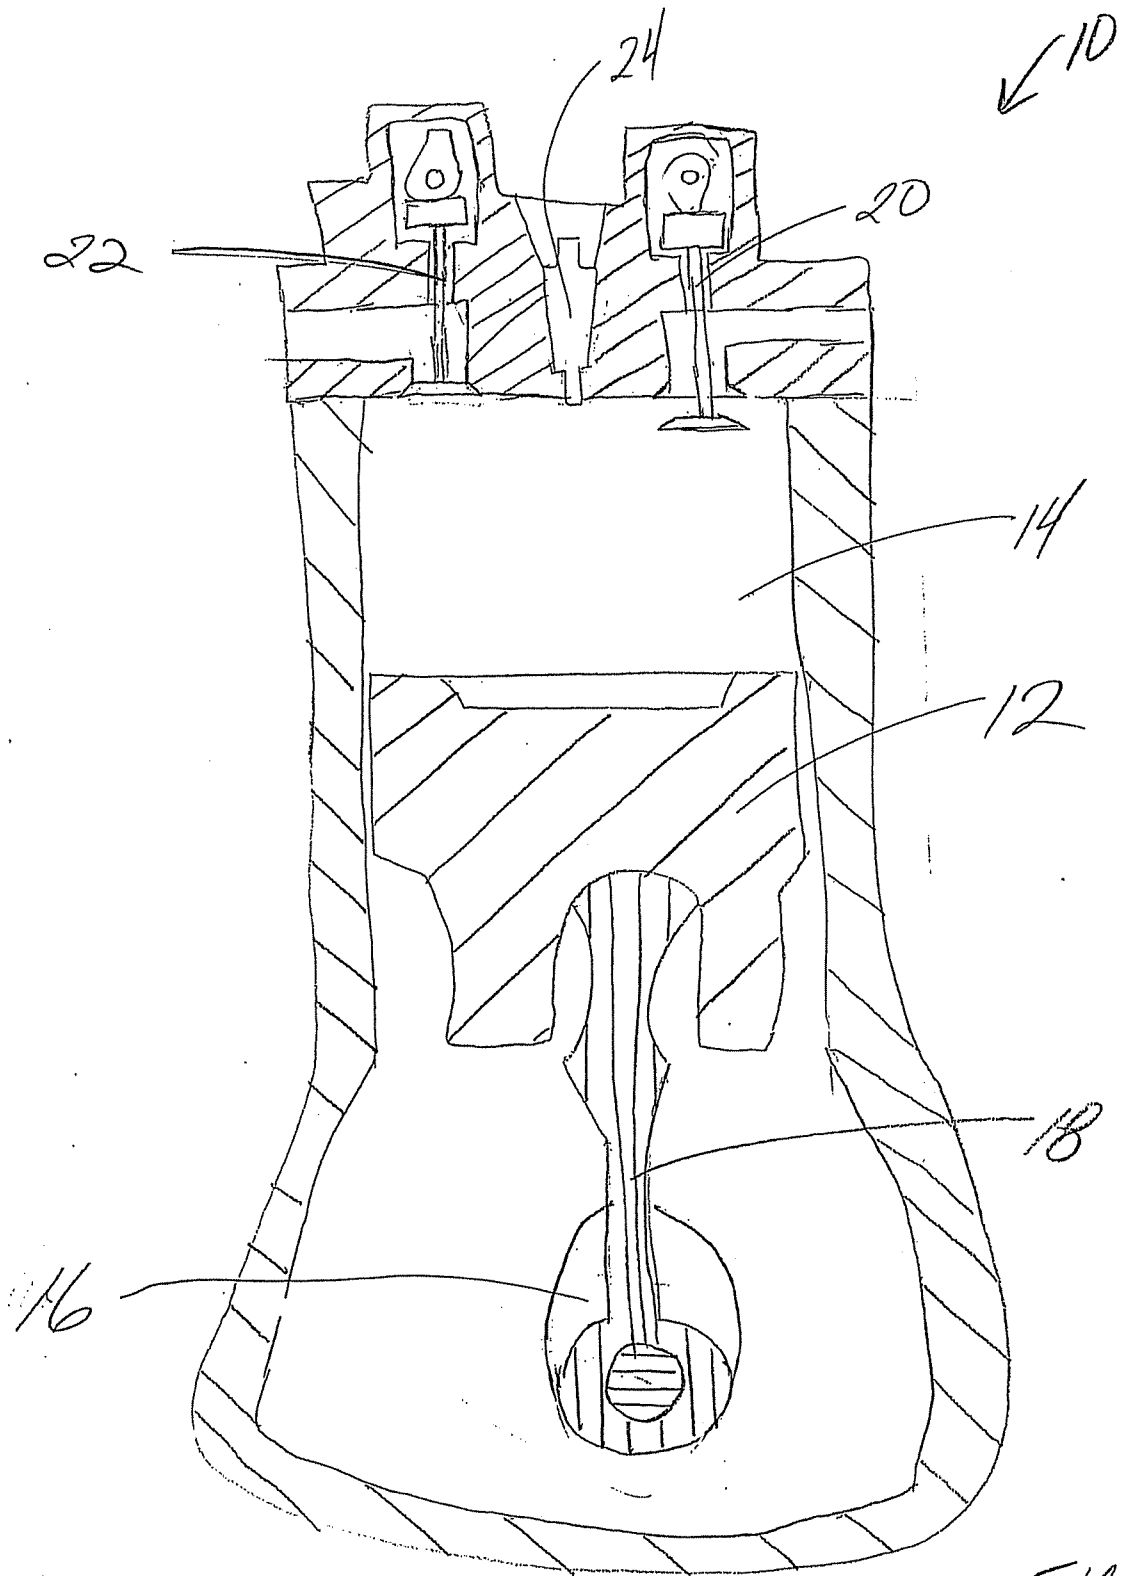

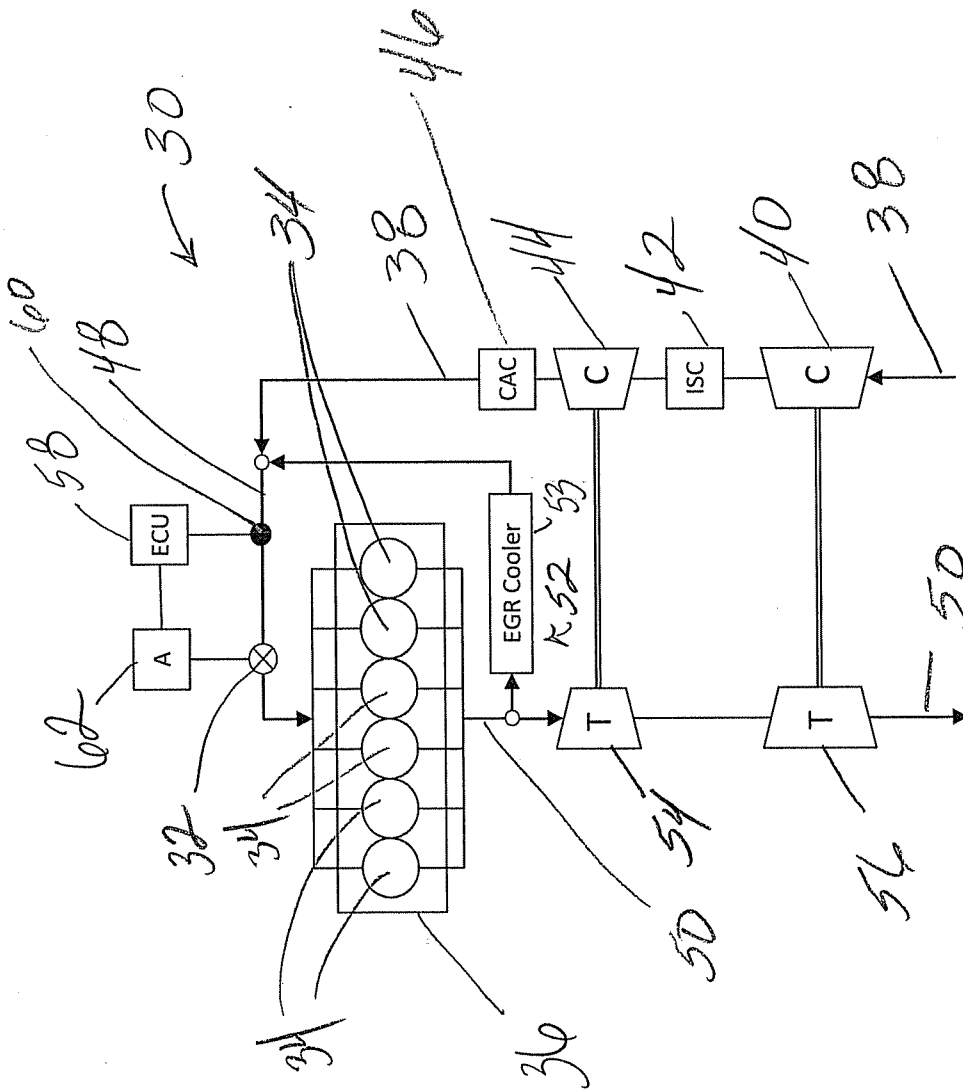


FIG. 2

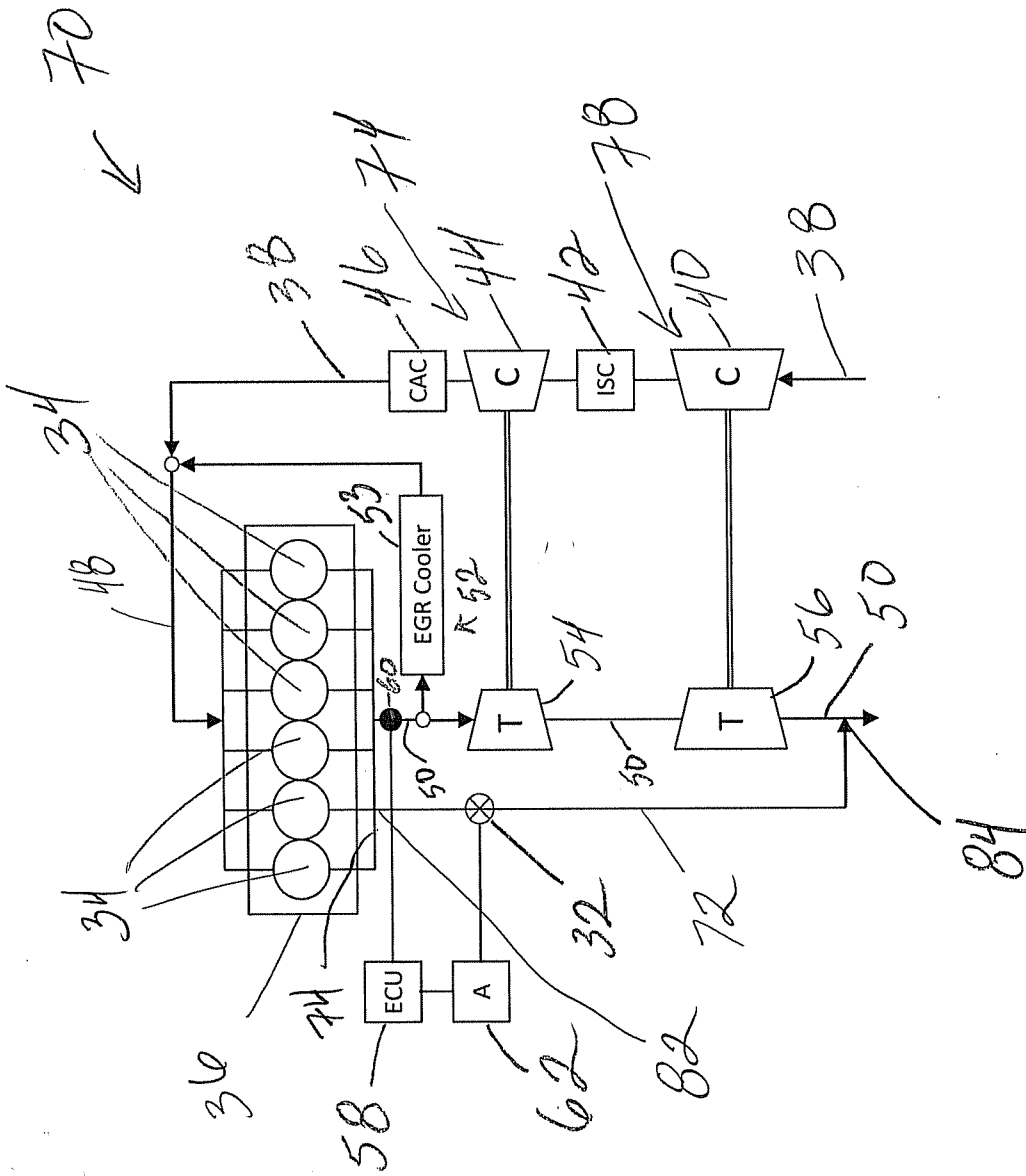


FIG. 3

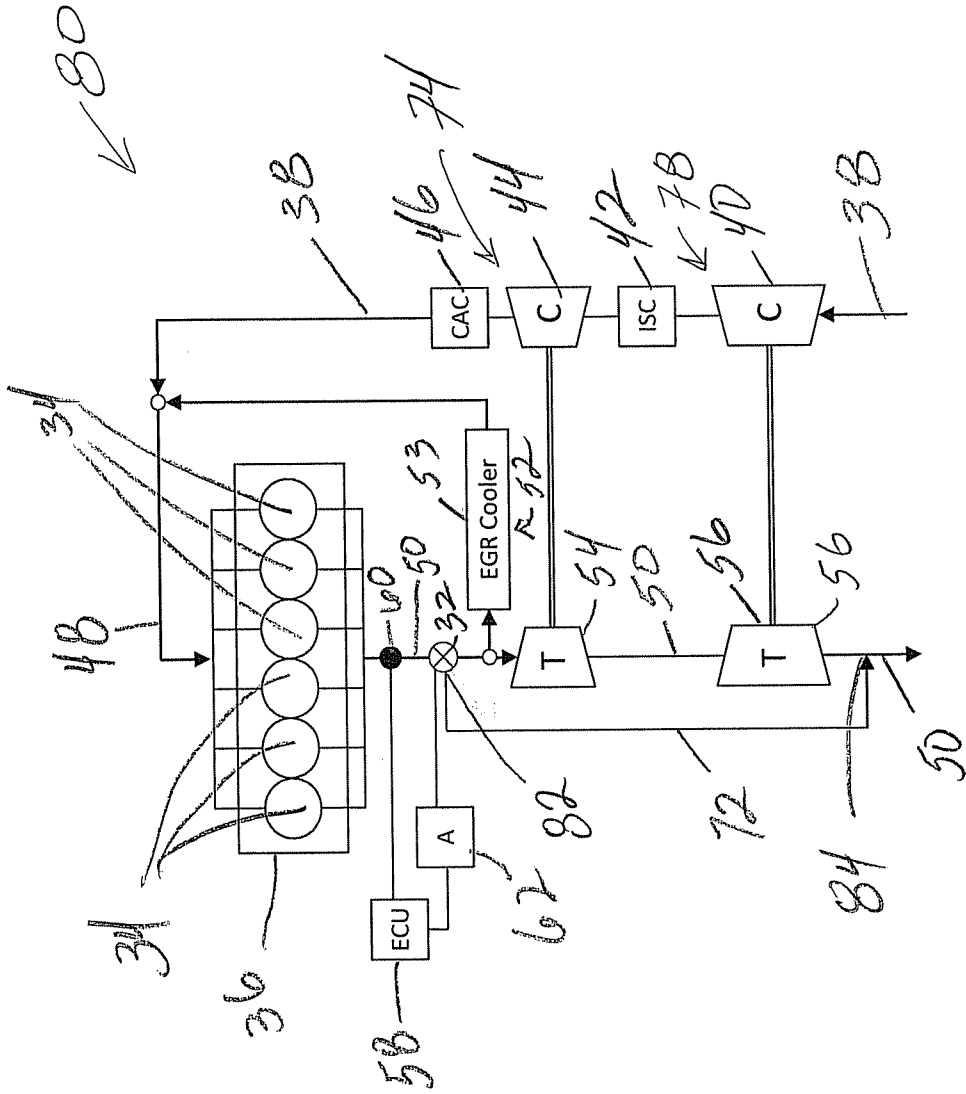


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2013/037516

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - F02D 13/04 (2013.01)

USPC - 123/320

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - F02D 9/06, 13/04 (2013.01)

USPC - 60/597, 605.2, 611; 123/320, 323

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CPC - F02D 9/06, 13/04; Y02T 10/42 (2013.01)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Patent

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| X         | US 2003/0172653 A1 (MAYER et al) 18 September 2003 (18.09.2003) entire document    | 7-10, 12, 15          |
| ---       |  | -----                 |
| Y         |  | 2-6, 11               |
| Y         | US 2011/0036088 A1 (XIN et al) 17 February 2011 (17.02.2011) entire document       | 1-6, 11, 13-14        |
| Y         | US 2012/0067331 A1 (PIPIS JR et al) 22 March 2012 (22.03.2012) entire document     | 1-6, 13-14            |

Further documents are listed in the continuation of Box C.

|   |  |
|---|--|
| * Special categories of cited documents:  | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  |
| "A" document defining the general state of the art which is not considered to be of particular relevance  | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone   |
| "E" earlier application or patent but published on or after the international filing date   | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "&" document member of the same patent family  |
| "O" document referring to an oral disclosure, use, exhibition or other means  |  |
| "P" document published prior to the international filing date but later than the priority date claimed  |  |

Date of the actual completion of the international search

23 July 2013

Date of mailing of the international search report

30 JUL 2013

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents  
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774