




(86) Date de dépôt PCT/PCT Filing Date: 2006/06/13
(87) Date publication PCT/PCT Publication Date: 2006/12/21
(45) Date de délivrance/Issue Date: 2018/01/16
(85) Entrée phase nationale/National Entry: 2007/12/12
(86) N° demande PCT/PCT Application No.: JP 2006/311877
(87) N° publication PCT/PCT Publication No.: 2006/134948
(30) Priorité/Priority: 2005/06/14 (JP2005-174399)

(51) Cl.Int./Int.Cl. *H04J 11/00* (2006.01)
(72) Inventeurs/Inventors:
HIGUCHI, KENICHI, JP;
SAWAHASHI, MAMORU, JP
(73) Propriétaire/Owner:
NTT DOCOMO, INC., JP
(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : STATION DE BASE, STATION MOBILE ET PROCEDE
(54) Title: BASE STATION, MOBILE STATION AND METHOD

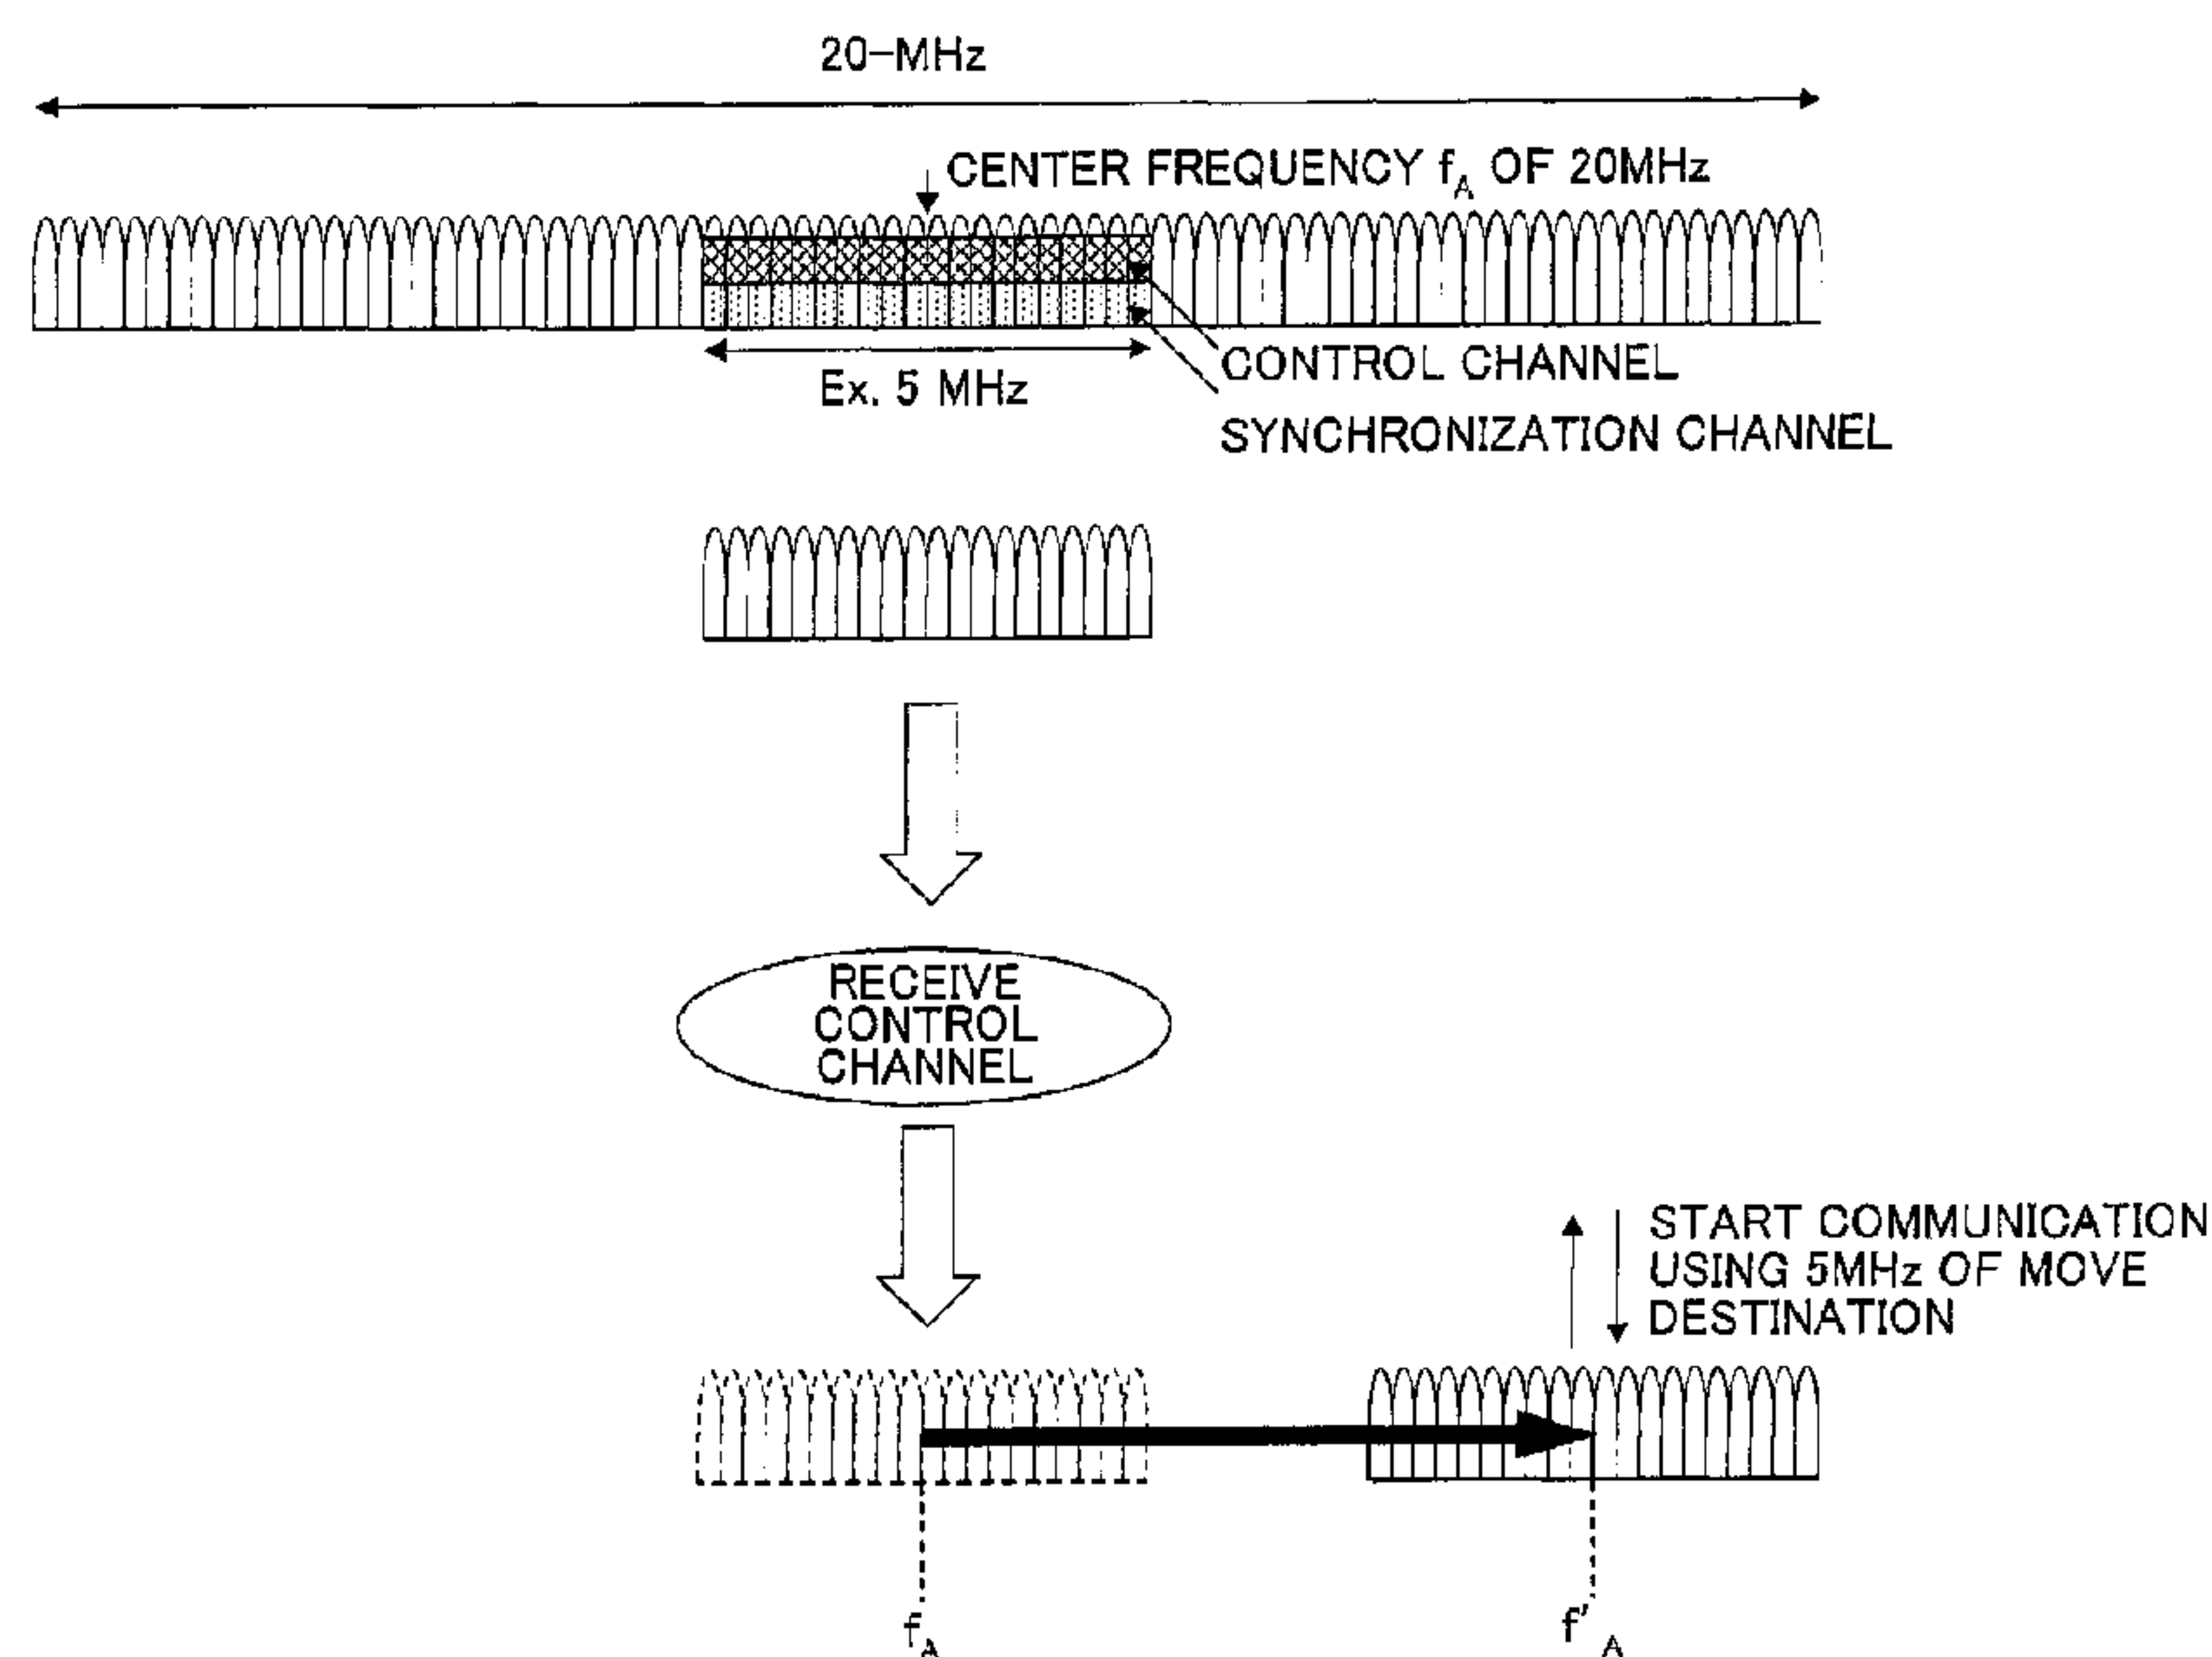

(57) Abrégé/Abstract:

A base station performs communication of an orthogonal frequency division multiplexing (OFDM) scheme with a mobile station by using any one of equal to or greater than two frequency bands. The base station includes means that transmits a synchronization channel and a control channel using a band that includes a center frequency f_A on a raster of a first band (20MHz) and that has a bandwidth equal to or greater than that of a second band (5MHz of the end). The control channel includes center frequency information for specifying a center frequency f'_A of the second band. Since the mobile station moves to a desired band after obtaining center frequency information using a band including the center frequency on a raster, the mobile station can connect to the desired band without searching frequencies that are not on the raster.

-23-

ABSTRACT

A base station performs communication of an orthogonal frequency division multiplexing (OFDM) scheme with a mobile station by using any one of equal to or greater than two frequency bands. The base station includes means that transmits a synchronization channel and a control channel using a band that includes a center frequency f_A on a raster of a first band (20MHz) and that has a bandwidth equal to or greater than that of a second band (5MHz of the end). The control channel includes center frequency information for specifying a center frequency f_A' of the second band. Since the mobile station moves to a desired band after obtaining center frequency information using a band including the center frequency on a raster, the mobile station can connect to the desired band without searching frequencies that are not on the raster.

-1-

SPECIFICATION

TITLE OF THE INVENTION

BASE STATION, MOBILE STATION AND METHOD

5 TECHNICAL FIELD

The present invention generally relates to a technical field of radio communication, and more particularly, relates to a base station, a mobile station and a method that can be used for a
10 plurality of bands.

BACKGROUND ART

In existing communication systems related to a Wideband Code Division Multiple Access (W-CDMA)
15 scheme and a GSM scheme and the like, a center frequency of a band used for communication is defined to agree with a predetermined frequency called a raster or a frequency raster. The frequency raster is arranged on a frequency axis at
20 every 200 kHz, for example. Therefore, a mobile station searches frequency rasters on the frequency axis in series (searches for each 200kHz) so as to specify the center frequency of the operator so that the mobile station can connect to a downlink.
25 Following non-patent documents 1 and 2 describe downlink cell search.

[non-patent document 1]3GPP, TS25.101, "User Equipment(UE)radio transmission and reception(FDD)", pp.12-14

30 [non-patent document 2]Keiji Tachikawa, "W-CDMA mobile communication scheme", MARUZEN, pp.35-45

DISCLOSURE OF THE INVENTIONPROBLEM TO BE SOLVED BY THE INVENTION

35 By the way, a wireless communication system supporting an orthogonal frequency division multiplexing (OFDM) scheme that uses a plurality of

-2-

wide and narrow bands is being studied. The reason for adopting the OFDM scheme is that it has a merit that it can effectively suppress multipath propagation interference and intersymbol interference and the like. In this radio communication system, consideration is given such that various operators can provide services, in which a wide band such as 20 MHz and a part (5 MHz, for example) of the band can be chosen according to apparatus configuration of the mobile station, apparatus configuration of the base station, application and the like.

Fig.1 schematically shows spectrum on the radio communication system of the OFDM scheme having a plurality of bandwidths. In a cell A, communication of the OFDM scheme is performed in each of a wide bandwidth of 20 MHz and a narrow bandwidth of 5 MHz. The narrow bandwidth of 5 MHz is located at a right end of the wide bandwidth of 20 MHz on the frequency axis. Also in a cell B different from the cell A, communication of the OFDM scheme is performed using the bandwidth of 5 MHz. The band at the cell B is positioned apart from the band of 20 MHz of the cell A on the frequency axis. As mentioned above, frequency rasters are set at predetermined intervals on the frequency axis. In the example shown in the figure, the frequency rasters are set at every Δ_{raster} Hz starting from the point of X Mz on the left side. A center frequency f_A of the band of 20 MHz of the cell A is positioned on a frequency raster $X+2\Delta_{\text{raster}}$. A center frequency f_B of the band of 5 MHz of the cell B is positioned on a frequency raster $X+5\Delta_{\text{raster}}$.

On the other hand, a sub-carrier spacing is determined independently of the frequency raster, a spacing between frequency rasters is not necessarily an integral multiple of the sub-carrier

-3-

spacing. Therefore, even when the center frequency f_A of the wide frequency band of 20 MHz is positioned on a raster, it can be predicted that a center frequency f_A' of a part of the band of 5 MHz is not always positioned on a raster. Therefore, it is feared that there is a problem in that a procedure for a mobile station that wants to use the frequency band of 5 MHz in the cell A to connect to a downlink and a process required for searching for a center frequency are complicated.

An object of the present invention is to provide a base station, a mobile station and a method that can make it easy to connect to a downlink signal in a mobile communication system in which communication of the OFDM scheme is performed using any one of more than one frequency band.

MEANS FOR SOLVING THE PROBLEM

In the present invention, a base station that performs communication of an OFDM scheme with a mobile station by using any one of equal to or greater than two frequency bands is used. The base station includes means that transmits a synchronization channel and a control channel using a band that includes a center frequency on a raster of a first band and that has a bandwidth equal to or greater than that of a second band. The control channel includes center frequency information for specifying a center frequency of the second band.

EFFECT OF THE INVENTION

According to the present invention, in a mobile communication system in which communication of an OFDM scheme is performed by using any one of equal to or greater than two frequency bands, it becomes easy to connect to a downlink signal.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 schematically shows spectrum on a radio communication system of an OFDM scheme having a plurality of bandwidths;

5 Fig.2 shows a block diagram of a transmitter according to an embodiment of the present invention;

Fig.3 shows a block diagram of a receiver according to an embodiment of the present invention;

10 Fig.4 is a diagram showing a mapping example of a synchronization channel;

Fig.5 is a diagram showing principle for detecting a center of the band;

15 Fig.6 is a diagram showing a configuration example of a control channel;

Fig.7A is a diagram showing a flowchart of operation according to an embodiment of the present invention;

20 Fig.7B is a diagram showing operation on a frequency axis according to an embodiment of the present invention ;

Fig.8 is a block diagram of a transmitter according to an embodiment of the present invention;

25 Fig.9 is a block diagram of a receiver according to an embodiment of the present invention;

Fig.10 shows principle for detecting the center of the band;

Fig.11 is a diagram showing another mapping example of the synchronization channel;

30 Fig.12 is a diagram showing still another mapping example of the synchronization channel;

Fig.13 is a diagram showing still another mapping example of the synchronization channel;

35 Fig.14 is a diagram showing still another mapping example of the synchronization channel;

Fig.15 is a diagram showing another configuration example of the control channel;

-5-

Fig.16 is a diagram showing an example of scrambling code by which a control channel is multiplied;

Fig.17 is a diagram showing an example of scrambling code by which a control channel is multiplied;

Fig.18 is a diagram showing a configuration example of the control channel;

Fig.19 is a diagram showing another configuration example of the control channel;

Fig.20 is a diagram showing still another configuration example of the control channel.

Description of reference signs

MUX multiplexing unit
FFT fast Fourier transform unit
IFFT inverse fast Fourier transform unit
GI guard interval inserting unit or removing unit
RF radio unit

PREFERRED EMBODIMENTS FOR CARRYING OUT THE INVENTION

According to an embodiment of the present invention, a synchronization channel is transmitted from the base station to the mobile station using a band that includes a center frequency f_A on a raster of a first band (20MHz) and that has a bandwidth equal to or greater than that of a second band (5MHz of the end). Using a band near the center, a control channel that includes center frequency information for specifying a center frequency f_A' of the second band is transmitted from the base station to the mobile station. Since the mobile station moves to a desired band after obtaining center frequency information using a band including the center frequency on a raster, the mobile station can connect to the desired band without searching frequencies that are not on the raster.

-6-

The synchronization channel and the control channel may be transmitted using a band that includes the center frequency on the raster of the first band and that has a bandwidth same as that of the second band. Accordingly, the mobile station can fairly connect to a downlink irrespective of bandwidths to be used. The synchronization channel and/or the control channel may be transmitted using the whole of the first band. Accordingly, information that is different according to the bandwidth used for communication can be included in the control channel.

The synchronization channel may be mapped in the frequency direction at intervals each wider than a sub-carrier spacing. Since other information can be assigned to sub-carriers where the synchronization channel is not mapped, information transmission efficiency can be improved.

The control channel may be coded using two-dimensional scrambling code that is mapped to the band that includes the center frequency on the raster of the first band and that has a bandwidth equal to or greater than that of the second band in two-dimensional scrambling code that is mapped over the first band and equal to or greater than one transmission time interval. Accordingly, the mobile station can demodulate the control channel without switching scrambling code after synchronization is established.

Basic control information that is transmitted using the band that includes the center frequency on the raster of the first band and that has a bandwidth same as that of the second band may include control information common to any mobile station using any band, and control information that is transmitted using a third band other than the second band may include control information specific

-7-

to a mobile station that uses the third band.

A mobile station according to an embodiment of the present invention includes: means that receives a downlink signal transmitted using
5 any one of equal to or greater than two frequency bands; means that detects a synchronization channel and a control channel transmitted from a base station using a band that includes a center frequency on a raster of a first band and that has a
10 bandwidth equal to or greater than that of a second band; means that extracts center frequency information from the control channel; and means that changes a frequency band for receiving a signal according to the center frequency information.

15 [Embodiment 1]

Fig.2 schematically shows a transmitter according to an embodiment of the present invention. The transmitter is typically provided in a base station. The transmitter includes a multiplexing
20 unit (MUX) for multiplexing transmission data and a synchronization pattern, an IFFT unit for performing inverse fast Fourier transform on the multiplexed data, a guard interval adding unit (GI) for adding a guard interval to a signal, on which the inverse
25 Fourier transform has been performed, modulated by the OFDM scheme, and for outputting symbols to be transmitted, and a radio unit (RF) for converting a signal format of the symbols to be transmitted to a signal format for transmission using a radio
30 frequency.

Fig.3 shows a block diagram of a receiver according to an embodiment of the present invention. The receiver is typically provided in a mobile station. The receiver includes a radio unit (RF)
35 for converting a signal received by an antenna to a symbol of a digital format, a guard interval removing unit (GI) for removing the guard interval

-8-

from the symbol to output an effective symbol, a FFT unit for performing fast Fourier conversion on the data of the effective symbol to perform modulation of the OFDM scheme, and a correlation detection unit
5 for calculating correlation between the data modulated in the OFDM scheme and a predetermined synchronization pattern to detect a correlation peak.

Fig.4 shows mapping examples of a synchronization channel that is multiplexed in the
10 multiplexing unit shown in Fig.2. The base station and the mobile station can perform communication in any of various wide and narrow frequency bands, and the example shown in the figure shows mapping examples of the synchronization channel when 20 MHz,
15 10 M Hz or 5 MHz is used for the communication. When the base station uses a bandwidth of 20 MHz, the transmitter of the base station maps the data of the synchronization channel onto entire sub-carriers. For simplicity, although 40 sub-carriers are shown
20 for 20 MHz, more sub-carriers exist actually. In the figure, each number of 1 - 40 shows a phase of code. When the synchronization channel indicates a synchronization pattern using data sequence of d_1 , d_2 , ..., d_{40} , the data sequence is arranged in a
25 frequency axis direction and is mapped to each sub-carrier. In the figure, the number "1", "2", ... correspond to d_1 , d_2 , ... respectively.

When the base station uses the band of 20 MHz and also the mobile station uses the same band
30 of 20 MHz, the mobile station can easily find a center frequency of the band of 20 MHz by cell search so that the mobile station can connect to a downlink to perform communication after that. When the mobile station uses a band of 5 MHz whose center
35 frequency is different from that of the band of 20 MHz, following operation is performed. The mobile station supplies a synchronization pattern of

$d_{16}, d_{17}, \dots, d_{25}$ to the correlation detection unit shown in Fig.3. By doing so, as shown in Fig.5, the mobile station can detect the center frequency f_A of the band of 20 MHz. The correlation detection unit performs correlation calculation by shifting the phase between the received signal and a replica of the synchronization channel $d_{16}, d_{17}, \dots, d_{25}$, so that a frequency by which the correlation value reaches its peak is detected. In the correlation calculation, even when they are displaced only by one sub-carrier, the correlation value becomes small. Accordingly, the center of the band can be detected accurately. As the synchronization pattern, PN code sequence, Gold code sequence and other various sequences can be used. This is because it is only necessary that a peak can be obtained and the position can be identified by performing correlation calculation.

In the present example, in a cell where a mobile station using a band of 5 MHz resides, bandwidths of 20 MHz, 10 MHz and 5 MHz are prepared so that the mobile station can use any of them. In addition to that the base station can perform transmission by mapping the synchronization channel onto entire sub-carriers as shown in Fig.4(1), the base station transmits control information for all users (common control channel) using a band of 5 MHz centered on the center frequency f_A as shown in Fig.6. As described being related to Fig.5, a mobile station using the band of 5 MHz can also detect the center frequency f_A , and the mobile station can properly demodulate the control channel transmitted using the band of 5 MHz centered on the frequency f_A . The common control channel includes center frequency information that can specify a position of a center frequency f_A' (that is not normally positioned on a raster) of the band of 5 MHz that uses a part of the band of 20 MHz. The

-10-

center frequency information may include information indicating how far the frequency f_A' is apart from the frequency f_A on the raster, for example. The mobile station demodulates the common control
5 channel, reads the center frequency information, adjusts a frequency synthesizer in the radio unit (such as the RF unit shown in Fig.3), so as to adjust the center of the band of 5 MHz received by the mobile station to the frequency f_A' . After that,
10 the mobile station can communicate a data channel and the like using 5 MHz that is on the right end of the band of 20 MHz.

Fig.7A shows a flowchart of operation according to an embodiment of the present invention.
15 Fig.7B schematically shows a situation in which the mobile station connects to a downlink according to the flow. An operation example is described by referring to both of the figures. A control channel and a synchronization channel are transmitted from
20 the base station using the band (central band) of 5 MHz including the center frequency of the band of 20 MHz. The control channel and the synchronization channel are configured to have a pattern common to any mobile station regardless of bandwidths to be
25 used for communication by the mobile station (regardless of bandwidths such as 5MHz, 10MHz, 20MHz and the like). In step 1, the synchronization channel and the control channel are transmitted from the base station, and the mobile station receives
30 the synchronization channel by performing cell search to establish synchronization. In step 2, the mobile station receives the control channel and demodulates it so as to read frequency information. The frequency information includes information on
35 frequency band assigned to the mobile station (such as shift amount between central band and band (use permitted band) permitted to use). The frequency

-11-

information may include base station information indicating that the bandwidth of the cell is 20 MHz (this is not essential). In step 3, the mobile station adjusts a frequency for receiving signals to a band permitted to use reported by the control channel so as to change the band for communication. After that, the mobile station starts data communication using the use permitted band (having a bandwidth of 5 MHz, for example). As mentioned above, the center frequency f_A of the central band is positioned on the raster, but the center frequency f_A' of the use permitted band is not necessarily positioned on the raster. Therefore, it is not easy that the mobile station detects the center frequency of the use permitted band without the above-mentioned frequency information. Any mobile station can easily detect the center frequency on the raster of the central band and can demodulate the control channel. Thus, the mobile station can easily shift the center frequency of communication to a desired frequency that is not on the raster.

As shown in Fig.7, the mobile station that uses 5 MHz detects the center frequency f_A of the band of 20 MHz first, and receives the common control channel that is transmitted using the central band of 5 MHz. It is necessary that the base station prepares such a control channel as transmission data and adds it to the synchronization channel to transmit them to the mobile station under the base station. The mobile station moves to the band of 5 MHz on the right end that is permitted to use according to instruction information of the control channel. After that, communication is performed using the moved band.

By the way, in the examples of Figs.2 and 3, although the synchronization channel is

-12-

5 multiplexed and demultiplexed in the frequency domain, multiplexing and demultiplexing may be performed in a time domain as shown in Figs.8 and 9. This is because it is only necessary that the mobile station can detect the center of the band of 20 MHz and can demodulate the control channel.

[Embodiment 2]

10 Fig.10 also shows a mapping example of the synchronization channel. But, in the example of Fig.10, although the base station can perform communication only in a band of 5 MHz, the mobile station has a capability that can use a band of 20 MHz. In this case, the mobile station cannot perform communication using the entire band of 20 MHz. As shown in Fig.4 (3), the base station transmits, to the mobile station under the base station, a data sequence having 10 pieces of data such as d_{16} , d_{17} , ..., d_{25} that are a part of the data sequence of 40 pieces of data as a pattern of the synchronization channel. The mobile station
15 prepares the data sequence of 40 pieces of data such as d_1 , d_2 , ..., d_{40} shown in Fig.4 (1), calculates correlation between the sequence and the received signal to detect a peak position. As shown in Fig.10, the mobile station detects the center
20 frequency f_A of the band of 5 MHz to establish synchronization, and receives the control channel transmitted using the band, and ascertains that the base station can perform communication only by 5 MHz.

30 Which band the base station uses for communication may be announced by the downlink control channel, or it may be determined in the mobile station as described in the following example. As an example, the mobile station derives three
35 kinds of correlation values as shown in Fig.10. A first correlation value is a correlation value on a data sequence of $d_{16} \sim d_{25}$ near the center. A second

-13-

correlation value is a correlation value on a data sequence of $d_{11} \sim d_{30}$ in which both sides are added to the data sequence of $d_{16} \sim d_{25}$ near the center, and a third correlation value is a correlation value on the data sequence of $d_1 \sim d_{40}$ over the entire region. For example, when the base station transmits the synchronization channel only in the band of the 5 MHz like the above-mentioned example, each of the first, second and third correlation values indicates a same size of peak. However, when the base station transmits the synchronization channel using the band of 10 MHz as shown in Fig.4(2), the first correlation value is smaller than the second correlation value, and the size of the second correlation value is almost the same as the size of the third correlation value. The reason is that, the longer the data sequence is, the larger the peak of the correlation value is. In addition, when the base station transmits the synchronization channel using the entire band of 20 MHz, the first, the second and the third correlation values are obtained in order of increasing size. Therefore, by calculating the first to third correlation values and comparing them, the band of the base station can be specified.

[Embodiment 3]

Fig.11 shows another mapping example of the synchronization channel. As long as synchronization is maintained in the mobile station, the synchronization channel is not necessarily inserted into the entire region of the band that is used. In the example of the figure, the synchronization channel is intermittently inserted at every two sub-carriers in the frequency axis direction. In addition, the synchronization channel may be inserted not only in the frequency axis direction but also in the time axis direction as

-14-

shown in Fig.12. Anyway, since another signal can be mapped onto sub-carriers to which the synchronization channel is not inserted, mapping amount of synchronization channel can be limited to
5 a minimum amount so that information transmission rate can be improved.

As mentioned above, the mapping pattern of the synchronization channel may be different according to the bandwidth supported in the cell, or
10 the synchronization channel may be transmitted using a same bandwidth near the center regardless of the band by which the mobile station performs communication as shown in Fig.13. In this case, as described in Fig.10, it may become difficult that
15 the mobile station determines the band of the base station. However, from the viewpoint of equalizing cell detection accuracy irrespective of bandwidth that is used, it is desirable that the band to which the synchronization channel is inserted is common.

20 Fig.14 shows an example in which, the synchronization channel is transmitted using 5 MHz when a band equal to or greater than 5 MHz is used, and mapping of the synchronization channel is different according to bandwidths when a band
25 narrower than 5 MHz is used. If fairness of cell detection accuracy is required even when there are significantly wide and narrow bands in bands that can be used, it is feared that enough cell detection accuracy cannot be adequately obtained when using a
30 wideband. The reason is that the synchronization channel configuration of the case of wideband becomes largely different from optimum one. In this case, by adopting the configuration shown in Fig.14, both of the cell detection accuracy and fairness can
35 be considered.

[Embodiment 4]

Fig.15 shows a configuration of a common

-15-

control channel that is different from the common control channel shown in Fig.6. In the configuration example of Fig.15, a first band of 5 MHz that is the center includes control information for all users and control information for users using the band of 5 MHz. The latter control information includes center frequency information indicating relationship etc. between the center frequency f_A and the center frequency f_A' of the band to be used. In a second band that is both sides of the first band each being 2.5 MHz, redundant information of the control information for all users and control information for users using a band of 10 MHz are transmitted. The former redundant information is represented as redundant bits derived according to various algorithms of error correction coding that are performed on the control information. The latter control information includes center frequency information and the like for users using the band of 10 MHz. In a third band that is both sides of the second band, control information and redundant information for all users and control information for users using a band of 10 MHz are transmitted. By transmitting the control information and the like by dispersing it according to bands used by the user, transmission contents of the control channel can be changed according to classes of the mobile station, for example.

[Embodiment 5]

Scrambling code specific to a base station may be applied to a control channel and a data channel that are transmitted from the base station in addition to the synchronization channel. In this case, if scrambling code is set independently for each bandwidth used for communication, processes for the mobile station to decode a control channel after synchronization is established may become

-16-

complicated. In the present embodiment, scrambling code is determined using an entire or a part of two-dimensional code defined in a predetermined period and in the entire region of the band of 20 MHz.

5 Fig.16 is a figure showing an example of scramble code by which a control channel and the like is multiplied. In the example shown in the figure, two-dimensional code covering 40 sub-carriers in the frequency direction and 8 symbols in
10 the time direction is defined first. Adjacent symbols are shifted in phase by one sub-carrier with each other in the frequency axis direction. When the base station transmits the control channel and the like using the entire band of 20 MHz, the
15 control channel is multiplied by the whole scrambling code, and is transmitted. When the base station uses only the band of 5 MHz, scrambling code mapped to the band of 5 MHz including the center frequency f_A is used. When the base station uses
20 only the band of 10 MHz, scrambling code mapped to the band of 10 MHz including the center frequency f_A is used. Therefore, the mobile station can demodulate the control channel without switching scrambling code after synchronization is established
25 so as to be able to connect to the downlink easily.

The two-dimensional code over the entire band of 20 MHz and 8 symbols may not be a repetition pattern shown in Fig.16. Fig.17 shows a case in which the two-dimensional code is prepared by a
30 series of data sequences which is not the repetition pattern. Also by using such two-dimensional code, effect the same as those above-mentioned can be obtained.

[Embodiment 6]

35 In the first embodiment and the like, a minimum bandwidth of a use band of the mobile station is 5 MHz, and the synchronization channel

-17-

and the control channel are transmitted using a central band of 5 MHz. However, the synchronization channel and the control channel may be transmitted using a bandwidth other than 5 MHz. In the example
5 shown in Fig.18, a band usable for the mobile station is 1.25 MHz, and the central band is 1.25MHz. Fig.19 is similar to Fig.15 in the fourth embodiment, but is different in that the minimum bandwidth of the center is 1.25MHz. In addition, by combining
10 the configuration examples shown in Figs.18 and 19, the control channel may be transmitted using a band of 1.25 MHz and a central band of 5 MHz. Accordingly, fairness among mobile stations can be considered while providing effect of wideband
15 (improvement of quality of control channel and the like) for users using a bandwidth equal to or greater than 5 MHz.

As mentioned above, preferred embodiments of the present invention are described. But, the
20 present invention is not limited to these embodiments. Variations and modifications can be made within the scope of the present invention. Although the present invention is described by classifying it into several embodiments for the sake
25 of convenience of explanation, the classification into each embodiment is not essential, and one or more embodiment may be used as necessary.

30

35

- 18 -

WHAT IS CLAIMED IS:

1. A base station apparatus, wherein a plurality of
bandwidths is defined for use in a communication
5 system, each of the plurality of bandwidths having a
common center frequency, the base station apparatus
comprising:
transmission means for transmitting transmission data
by using a bandwidth from among equal to or
10 greater than two defined bandwidths of the
plurality of bandwidths in a band centered on the
common center frequency; and
multiplexing means for multiplexing a synchronization
channel into a center band of a predetermined
15 width having as center frequency the common
center frequency of the bandwidth used in the
transmission means irrespective of the bandwidth
used in the transmission means.
- 20 2. The base station apparatus as claimed in claim 1,
wherein the multiplexing means multiplexes the
synchronization channel only into the center band.
3. The base station apparatus as claimed in claim 1 or 2,
25 wherein the multiplexing means multiplexes a control
channel into the center band.
4. A base station apparatus, wherein a plurality of
bandwidths is defined for use in a communication
30 system, each of the plurality of bandwidths having a
common center frequency, the base station apparatus
comprising:
transmission means for transmitting transmission data
by using a bandwidth from among equal to or

- 19 -

greater than two defined bandwidths of the plurality of bandwidths in a band centered on the common center frequency; and multiplexing means for multiplexing a control channel into a center band of a predetermined width having as center frequency the common center frequency of the bandwidth used in the transmission means irrespective of the bandwidth used in the transmission means.

10

5. The base station apparatus as claimed in claim 4, wherein the multiplexing means multiplexes the control channel only into the center band.

15

6. The base station apparatus as claimed in any one of claims 3-5, wherein the control channel to be multiplexed in the multiplexing means includes information for specifying the bandwidth used in the transmission means.

20

7. The base station apparatus as claimed in any one of claims 1-6, wherein the transmission means uses a bandwidth from among equal to or greater than three defined bandwidths.

25

8. The base station apparatus as claimed in any one of claims 1-7, wherein a plurality of candidates of bandwidths that can be used in the transmission means are respectively defined as the maximum bandwidths that can be used by the base station apparatus.

30

9. A transmission method, wherein a plurality of bandwidths is defined for use in a communication system, each of the plurality of bandwidths having a

- 20 -

common center frequency, the transmission method comprising the steps of:

transmitting downlink transmission data by using a
bandwidth from among equal to or greater than two
5 defined bandwidths of the plurality of bandwidths
in a band centered on the common center
frequency; and

10 multiplexing a synchronization channel into a center
band of a predetermined width having as center
frequency the common center frequency of the
bandwidth used in the step of transmitting
irrespective of the bandwidth to be used in the
step of transmitting.

15 10. The transmission method as claimed in claim 9, where
the step of multiplexing includes multiplexing the
synchronization channel only into the center band.

20 11. The transmission method as claimed in claim 9 or 10,
wherein the step of multiplexing includes multiplexing
a control channel into the center band.

25 12. A transmission method, wherein a plurality of
bandwidths is defined for use in a communication
system, each of the plurality of bandwidths having a
common center frequency, the transmission method
comprising the steps of:

30 transmitting downlink transmission data by using a
bandwidth from among equal to or greater than two
defined bandwidths of the plurality of bandwidths
in a band centered on the common center
frequency; and

multiplexing a control channel into a center band of a
predetermined width having as center frequency

- 21 -

the common center frequency of the bandwidth used in the step of transmitting irrespective of the bandwidth to be used in the step of transmitting.

- 5 13. The transmission method as claimed in claim 12,
wherein the step of multiplexing includes multiplexing
the control channel only into the center band.
- 10 14. The transmission method as claimed in any one of
claims 11-13, wherein the control channel to be
multiplexed in the step of multiplexing includes
information for specifying the bandwidth used in the
step of transmitting.
- 15 15. The transmission method as claimed in any one of
claims 9-14, wherein the step of transmitting uses a
bandwidth from among equal to or greater than three
defined bandwidths.
- 20 16. The transmission method as claimed in any one of
claims 9-15, wherein a plurality of candidates of
bandwidths that can be used in the step of
transmitting are respectively defined as the maximum
bandwidths that can be used by a base station
25 apparatus.
- 30 17. A communication system, wherein a plurality of
bandwidths is defined for use in the communication
system, each of the plurality of bandwidths having a
common center frequency, the communication system
comprising:
a base station for transmitting transmission data by
using a bandwidth from among equal to or greater
than two defined bandwidths of the plurality of

- 22 -

- bandwidths in a band centered on the common center frequency, and for multiplexing a synchronization channel into a center band of a predetermined width having as center frequency the common carrier frequency of the bandwidth used in the step of transmitting irrespective of the bandwidth to be used in the step of transmitting; and
- 5 a mobile station for receiving the synchronization channel from the base station to be synchronized with the base station, and for receiving the transmission data from the base station.
- 10
18. The communication system as claimed in claim 17, wherein the base station multiplexes the synchronization channel only into the center band.
- 15
19. A receiving apparatus, wherein a plurality of bandwidths is defined for use in a communication system, each of the plurality of bandwidths having a common center frequency, the receiving apparatus comprising:
- 20 receiving means for receiving transmission data transmitted by using a bandwidth from among equal to or greater than two defined bandwidths of the plurality of bandwidths in a band centered on the common center frequency, and for receiving a synchronization channel multiplexed into a center band of a predetermined width having as center frequency the common center frequency of the bandwidth used irrespective of the bandwidth that
- 25 is used; and
- 30

- 23 -

processing means for processing the synchronization channel and the transmission data received by the receiving means.

- 5 20. The receiving apparatus as claimed in claim 19,
wherein the synchronization channel received by the
receiving means is multiplexed only into the center
band.
- 10 21. The receiving apparatus as claimed in claim 19 or 20,
wherein the receiving means receives a control channel
multiplexed into the center band.
- 15 22. The receiving apparatus as claimed in claim 21,
wherein the control channel received by the receiving
means includes information for specifying the
bandwidth that is used.
- 20 23. The receiving apparatus as claimed in claim 22, the
processing means comprising:
first processing means for establishing
synchronization based on the synchronization
channel received by the receiving means;
second processing means for obtaining information on a
25 bandwidth by demodulating the control channel
received by the receiving means after
establishing synchronization by the first
processing means; and
third processing means for demodulating the
30 transmission data received by the receiving means
based on the information on the bandwidth
obtained by the second processing means.

- 24 -

24. A receiving apparatus, wherein a plurality of
bandwidths is defined for use in a communication
system, each of the plurality of bandwidths having a
common center frequency, the receiving apparatus
5 comprising:
receiving means for receiving transmission data
transmitted by using a bandwidth from among equal
to or greater than two defined bandwidths of the
plurality of bandwidths in a band centered on the
10 common center frequency, and for receiving a
control channel multiplexed into a center band of
a predetermined width having as center frequency
the common center frequency of the bandwidth
irrespective of the bandwidth that is used; and
15 processing means for processing the control channel
and the transmission data received by the
receiving means.
25. The receiving apparatus as claimed in claim 24,
20 wherein the control channel received by the receiving
means is multiplexed only into the center band.
26. The receiving apparatus as claimed in claim 24 or 25,
wherein the control channel received by the receiving
25 means includes information for specifying the
bandwidth that is used.
27. The receiving apparatus as claimed in claim 26, the
processing means comprising:
30 first processing means for establishing
synchronization based on a synchronization
channel received by the receiving means;
second processing means for obtaining information on a
bandwidth by demodulating the control channel

- 25 -

- received by the receiving means after
establishing synchronization by the first
processing means; and
third processing means for demodulating the
5 transmission data received by the receiving means
based on the information on the bandwidth
obtained by the second processing means.
28. A receiving method, wherein a plurality of bandwidths
10 is defined for use in a communication system, each of
the plurality of bandwidths having a common center
frequency, the receiving method comprising the steps
of:
receiving transmission data transmitted by using a
15 bandwidth from among equal to or greater than two
defined bandwidths of the plurality of bandwidths
in a band centered on the common center
frequency, and receiving a synchronization
channel multiplexed into a center band of a
20 predetermined width having as center frequency
the common center frequency of the bandwidth
irrespective of the bandwidth that is used; and
processing the synchronization channel and the
transmission data that are received.
- 25
29. The receiving method as claimed in claim 28, wherein
the synchronization channel received in the step of
receiving is multiplexed only into the center band.
- 30 30. The receiving method as claimed in claim 28 or 29,
wherein the step of receiving includes receiving a
control channel multiplexed into the center band.

- 26 -

31. The receiving method as claimed in claim 30, wherein the control channel received in the step of receiving includes information for specifying the bandwidth that is used.
- 5
32. The receiving method as claimed in claim 31, the step of processing comprising:
a step of establishing synchronization based on the synchronization channel that is received;
10 a step of obtaining information on a bandwidth by demodulating the control channel that is received after establishing synchronization; and
a step of demodulating the transmission data based on the information on the bandwidth.
- 15
33. A receiving method, wherein a plurality of bandwidths is defined for use in a communication system, each of the plurality of bandwidths having a common center frequency, the receiving method comprising the steps of:
20 of:
receiving transmission data transmitted by using a bandwidth from among equal to or greater than two defined bandwidths of the plurality of bandwidths in a band centered on the common center
25 frequency, and receiving a control channel multiplexed into a center band of a predetermined width having as center frequency the common center frequency of the bandwidth irrespective of the bandwidth that is used; and
30 processing the control channel and the transmission data that are received.

- 27 -

34. The receiving method as claimed in claim 33, wherein the control channel received in the step of receiving is multiplexed only into the center band.
- 5 35. The receiving method as claimed in claim 33 or 34, wherein the control channel received in the step of receiving includes information for specifying the bandwidth that is used.
- 10 36. The receiving method as claimed in claim 35, the step of processing comprising:
a step of establishing synchronization based on a
synchronization channel that is received;
a step of obtaining information on a bandwidth by
15 demodulating the control channel that is received
after establishing synchronization; and
a step of demodulating the transmission data based on the information on the bandwidth.

FIG.1

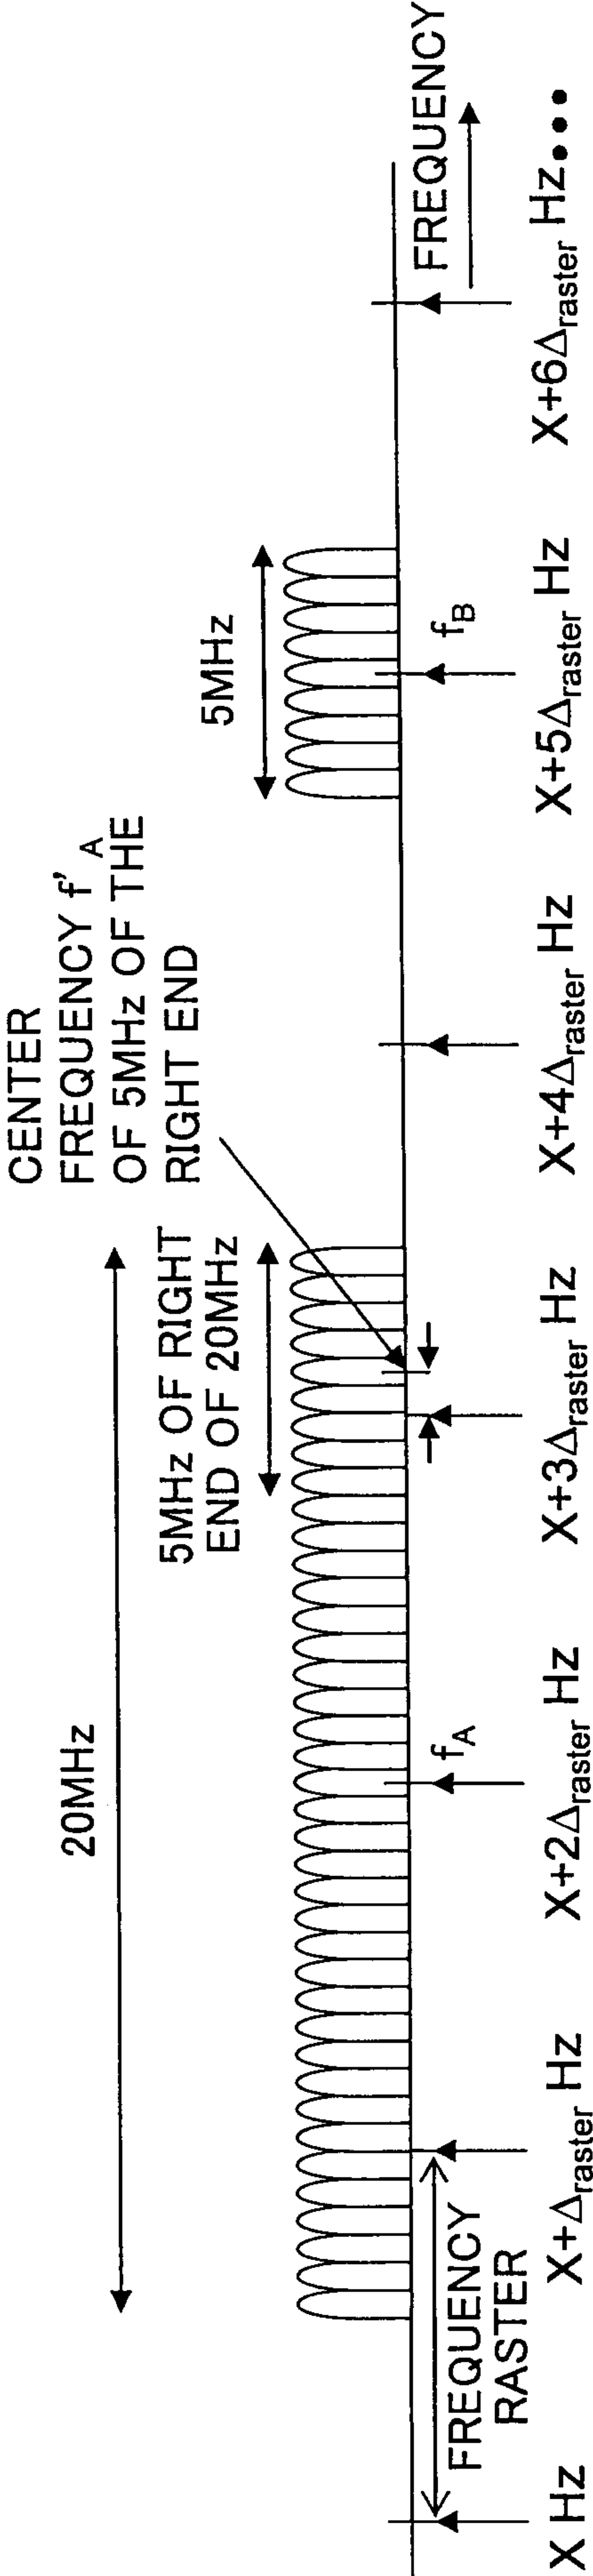


FIG.2

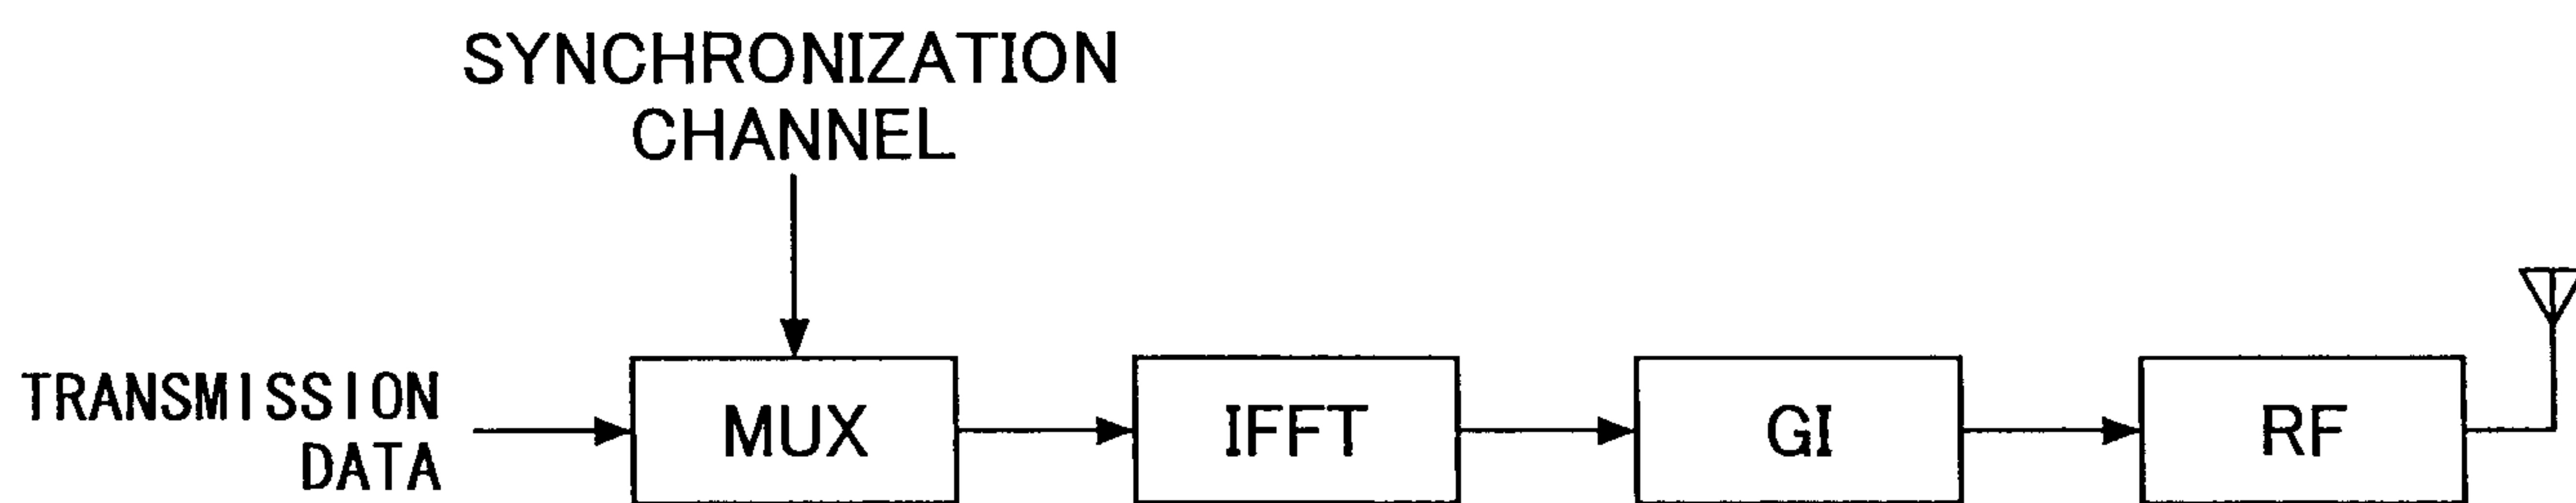


FIG.3

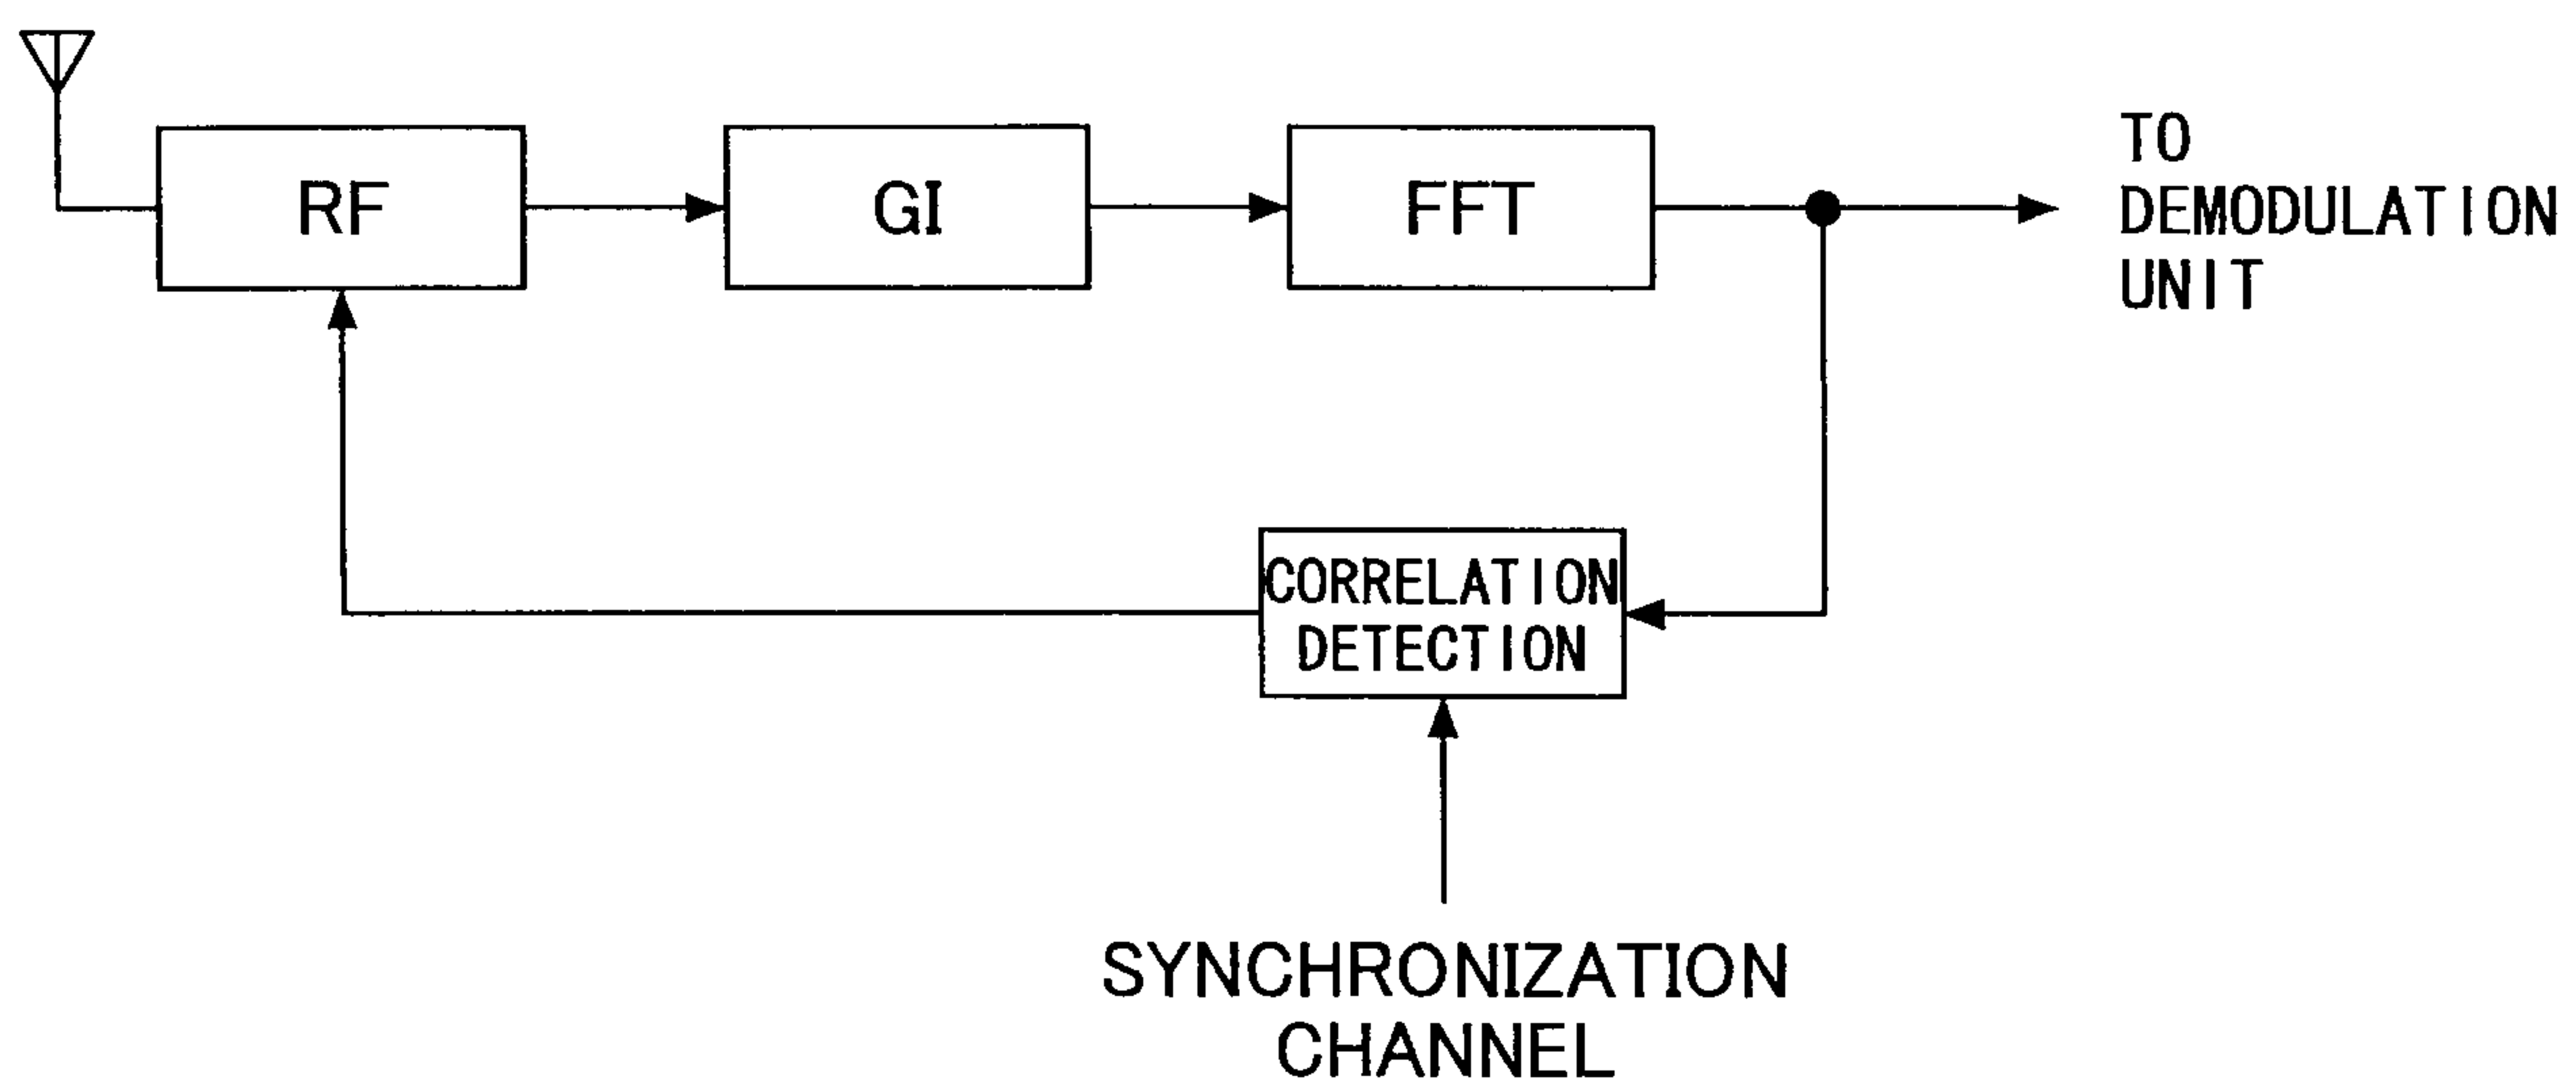


FIG.4

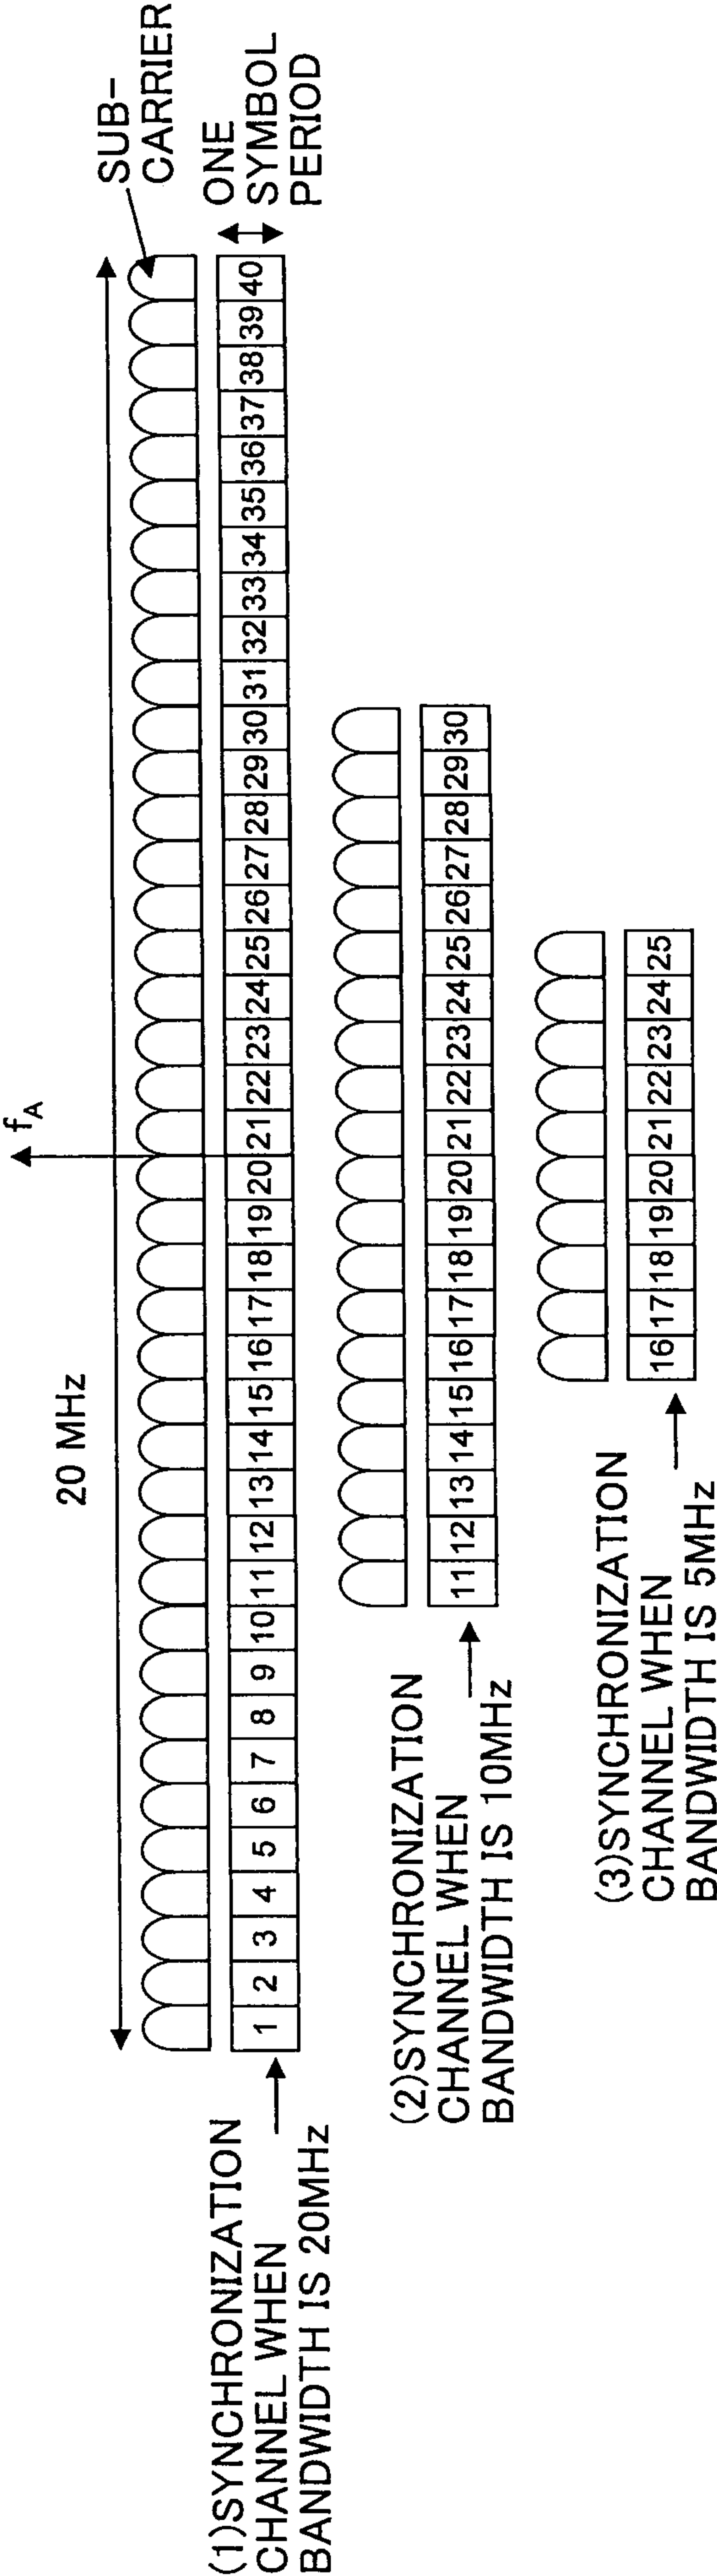


FIG.5

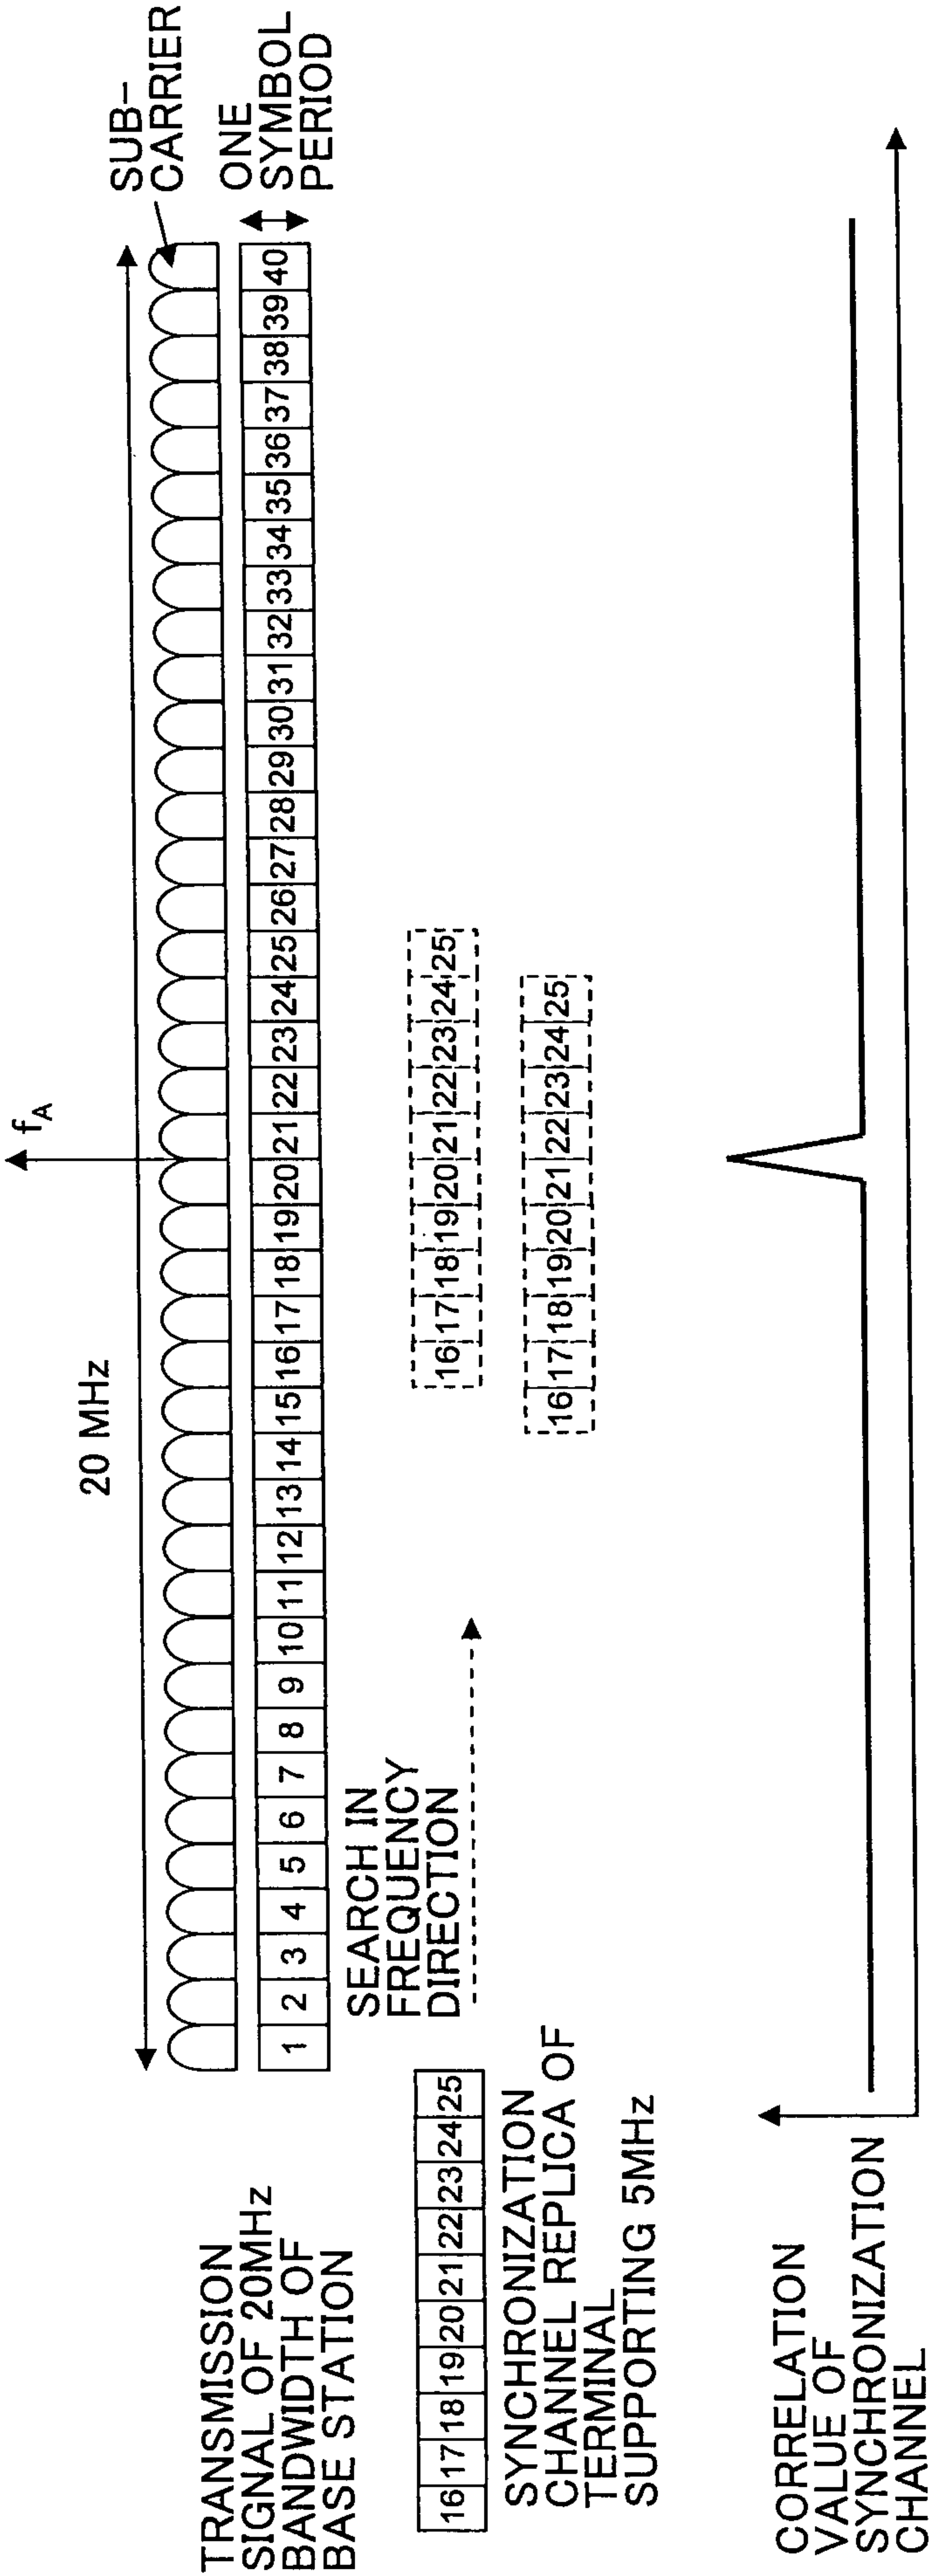


FIG.6

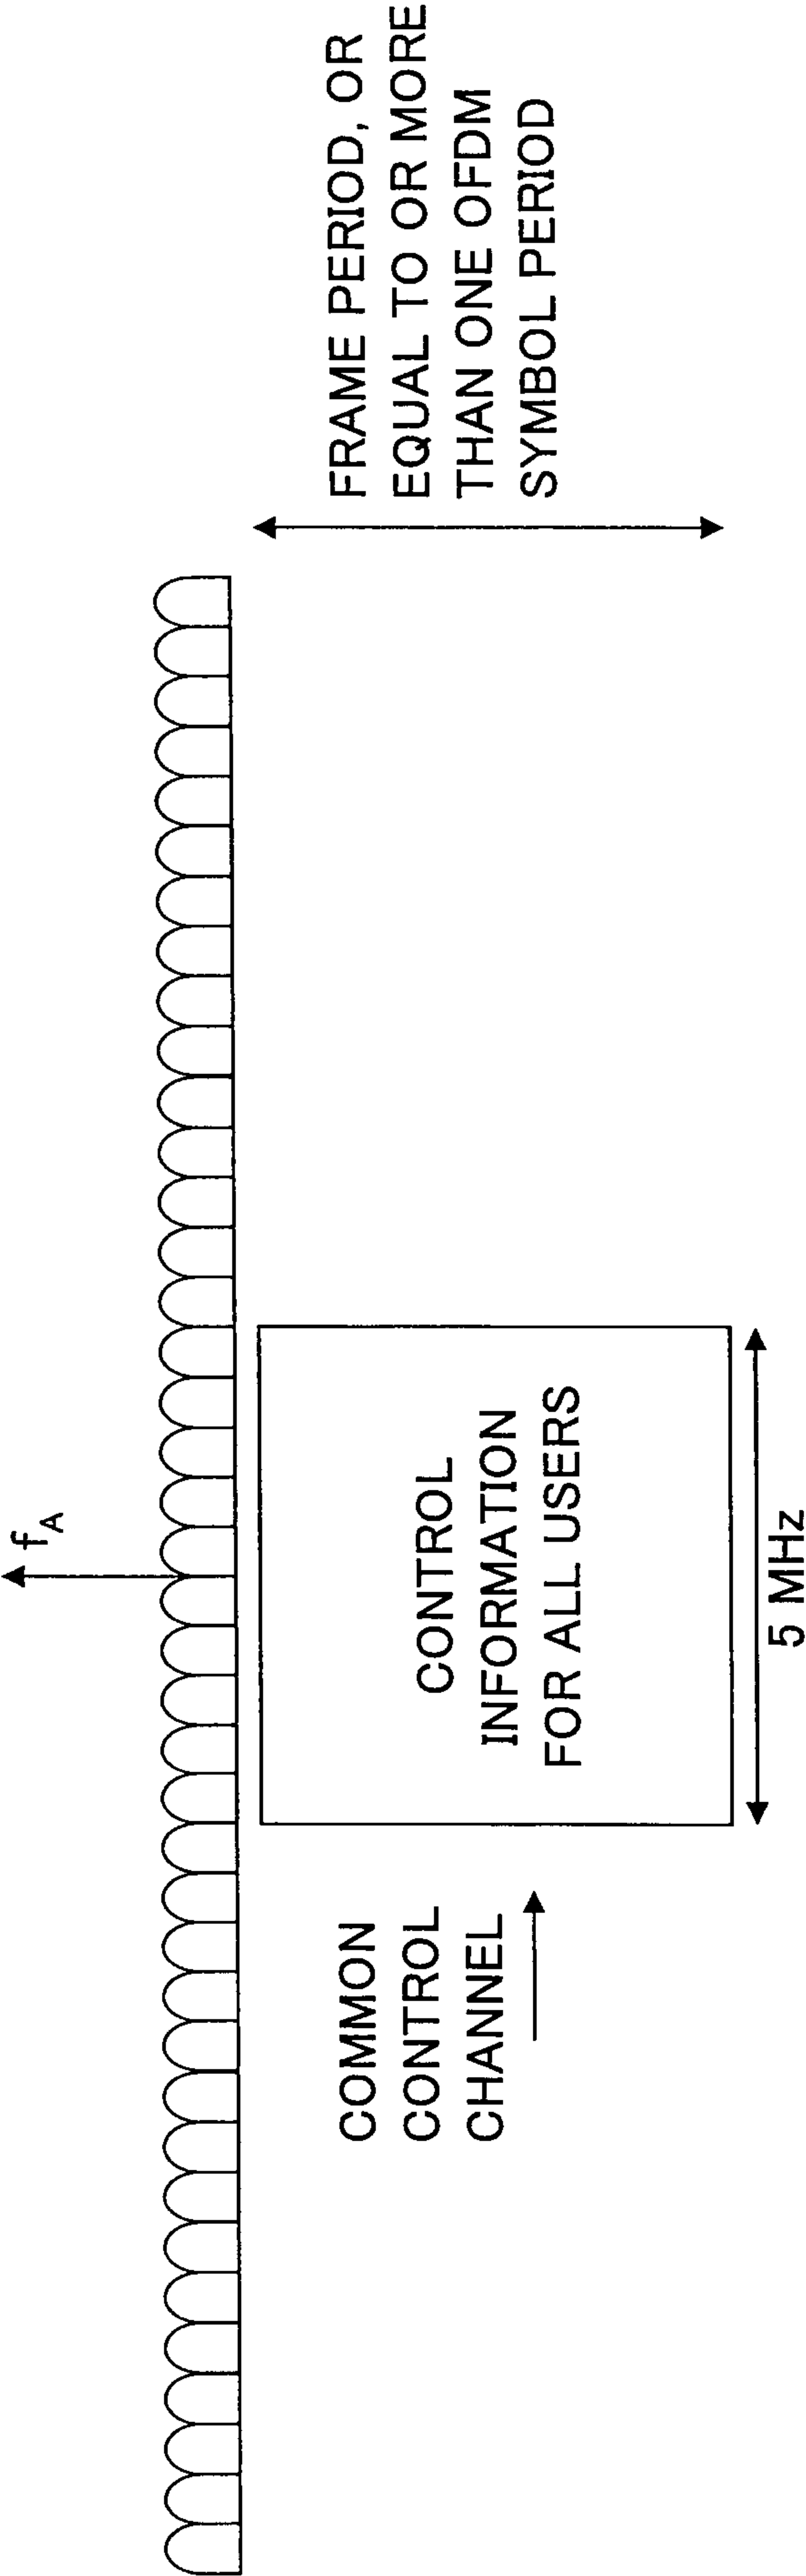
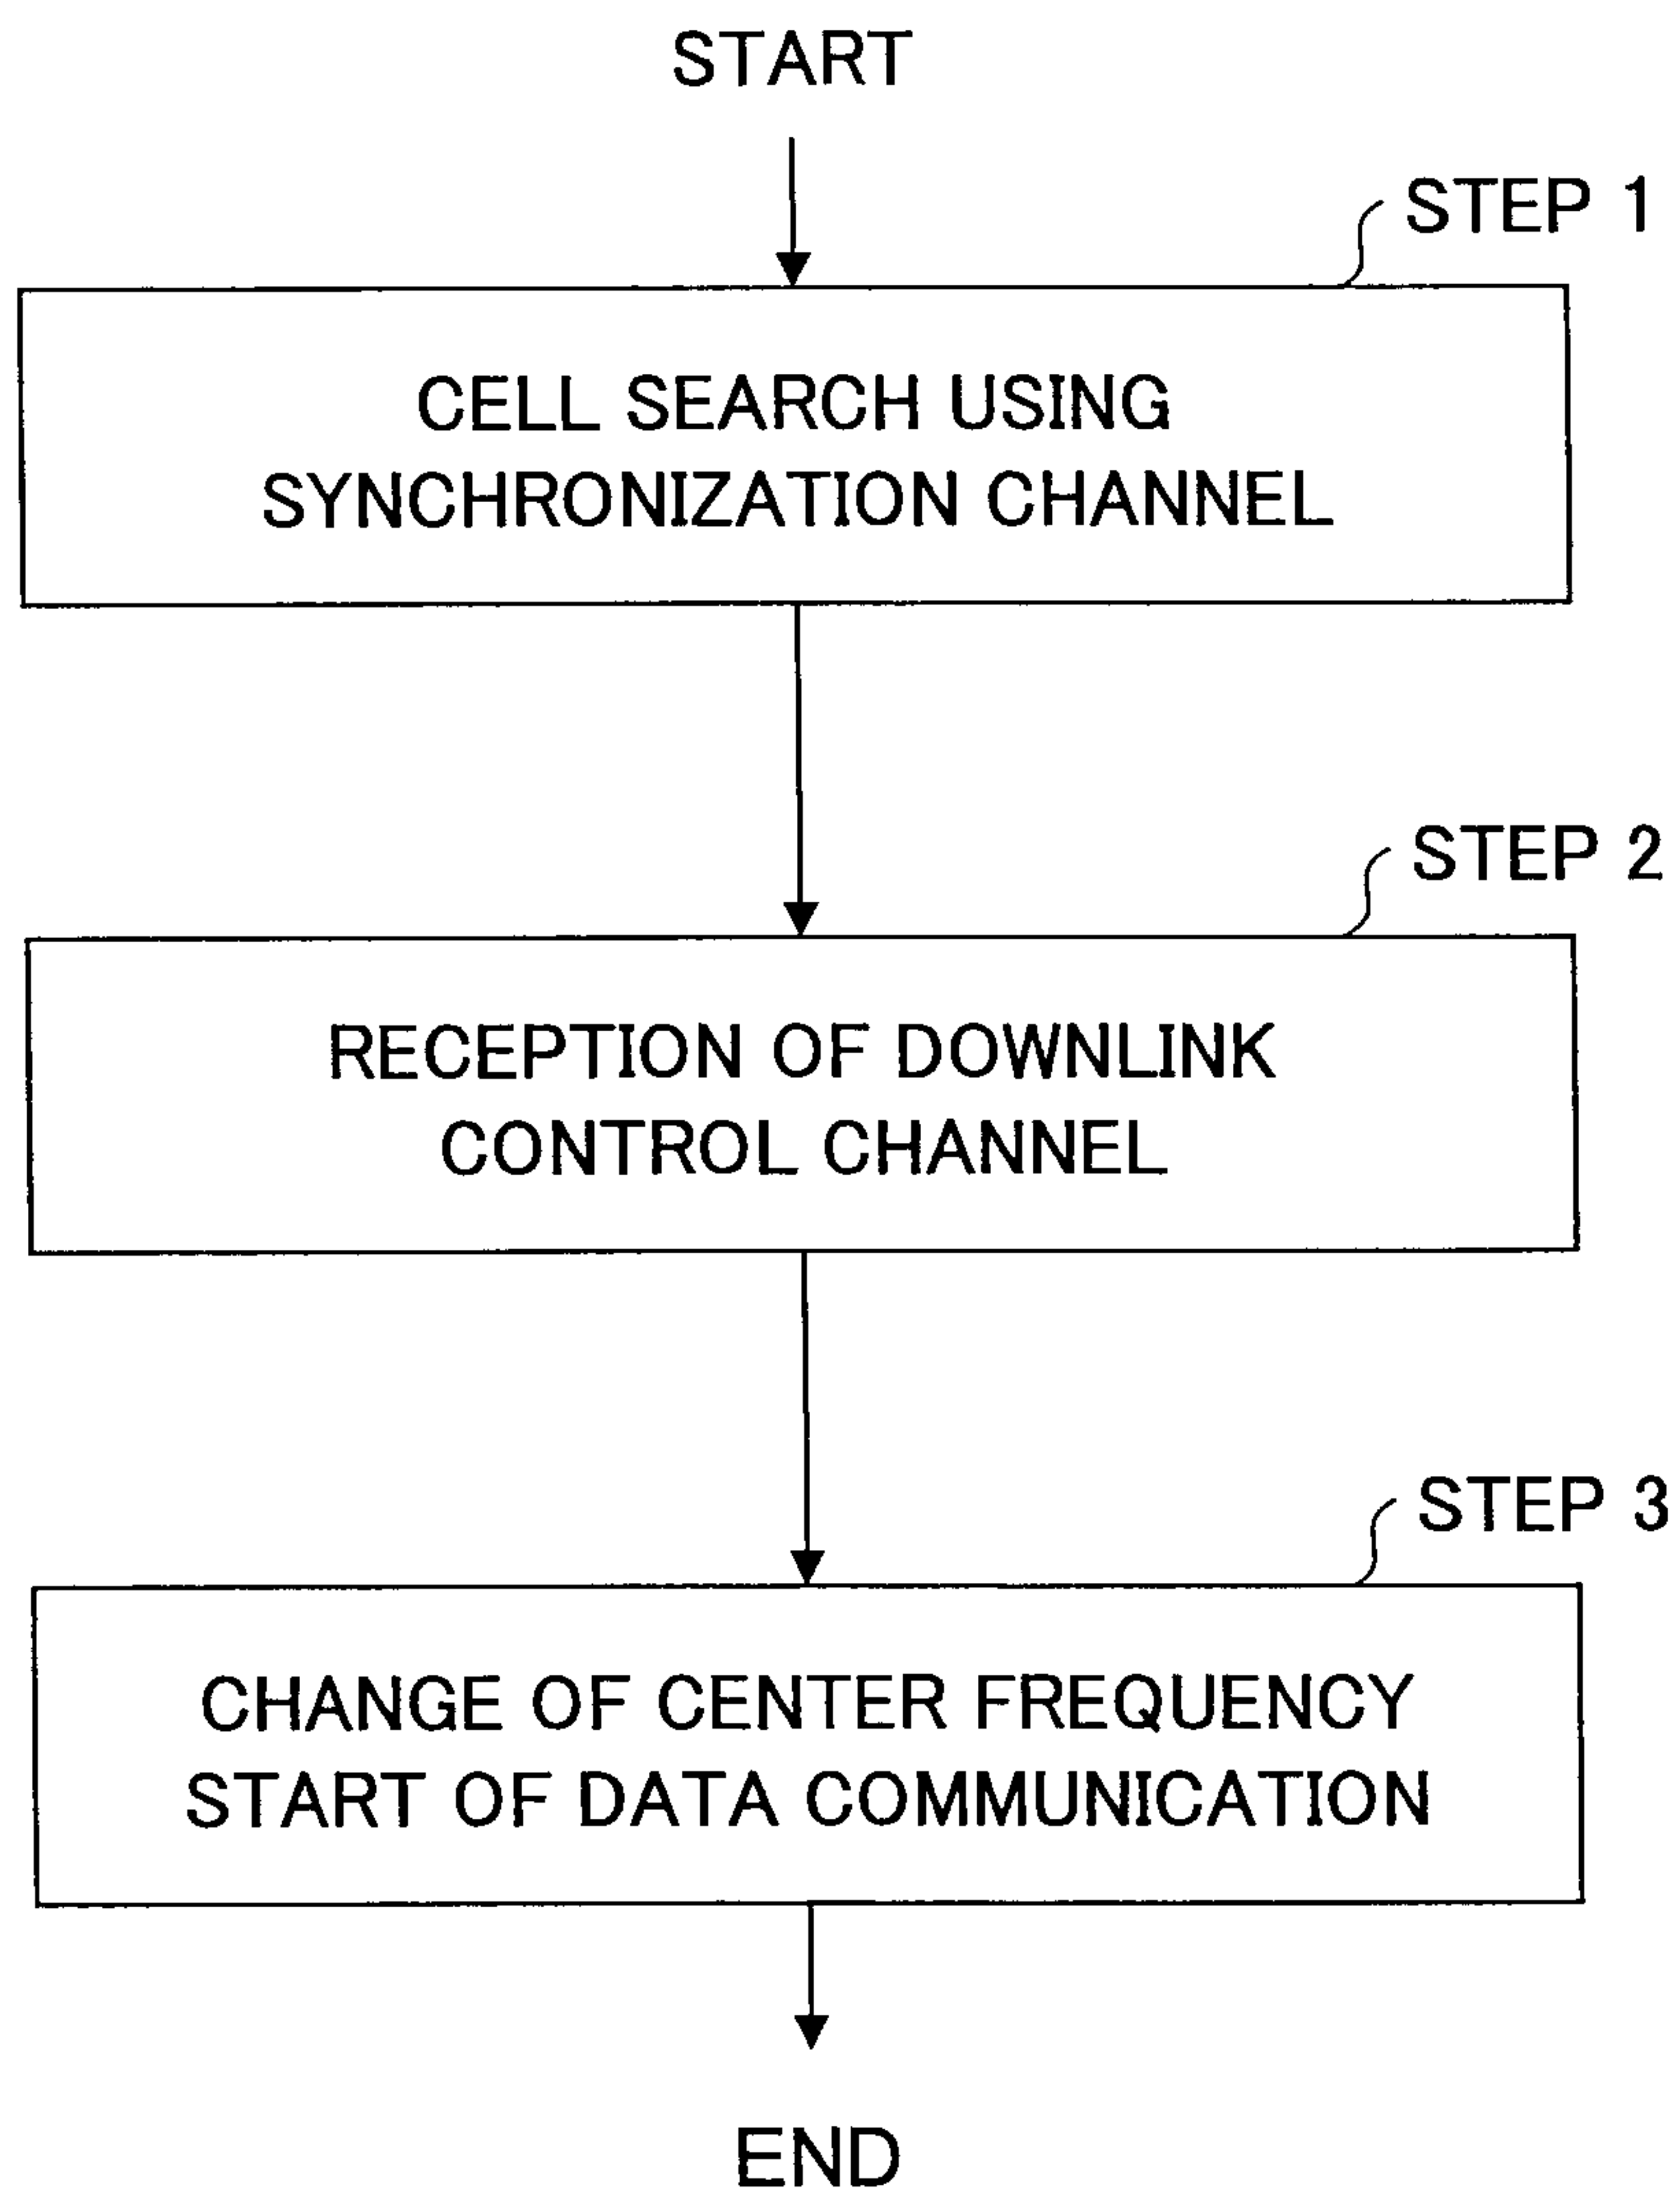


FIG.7A



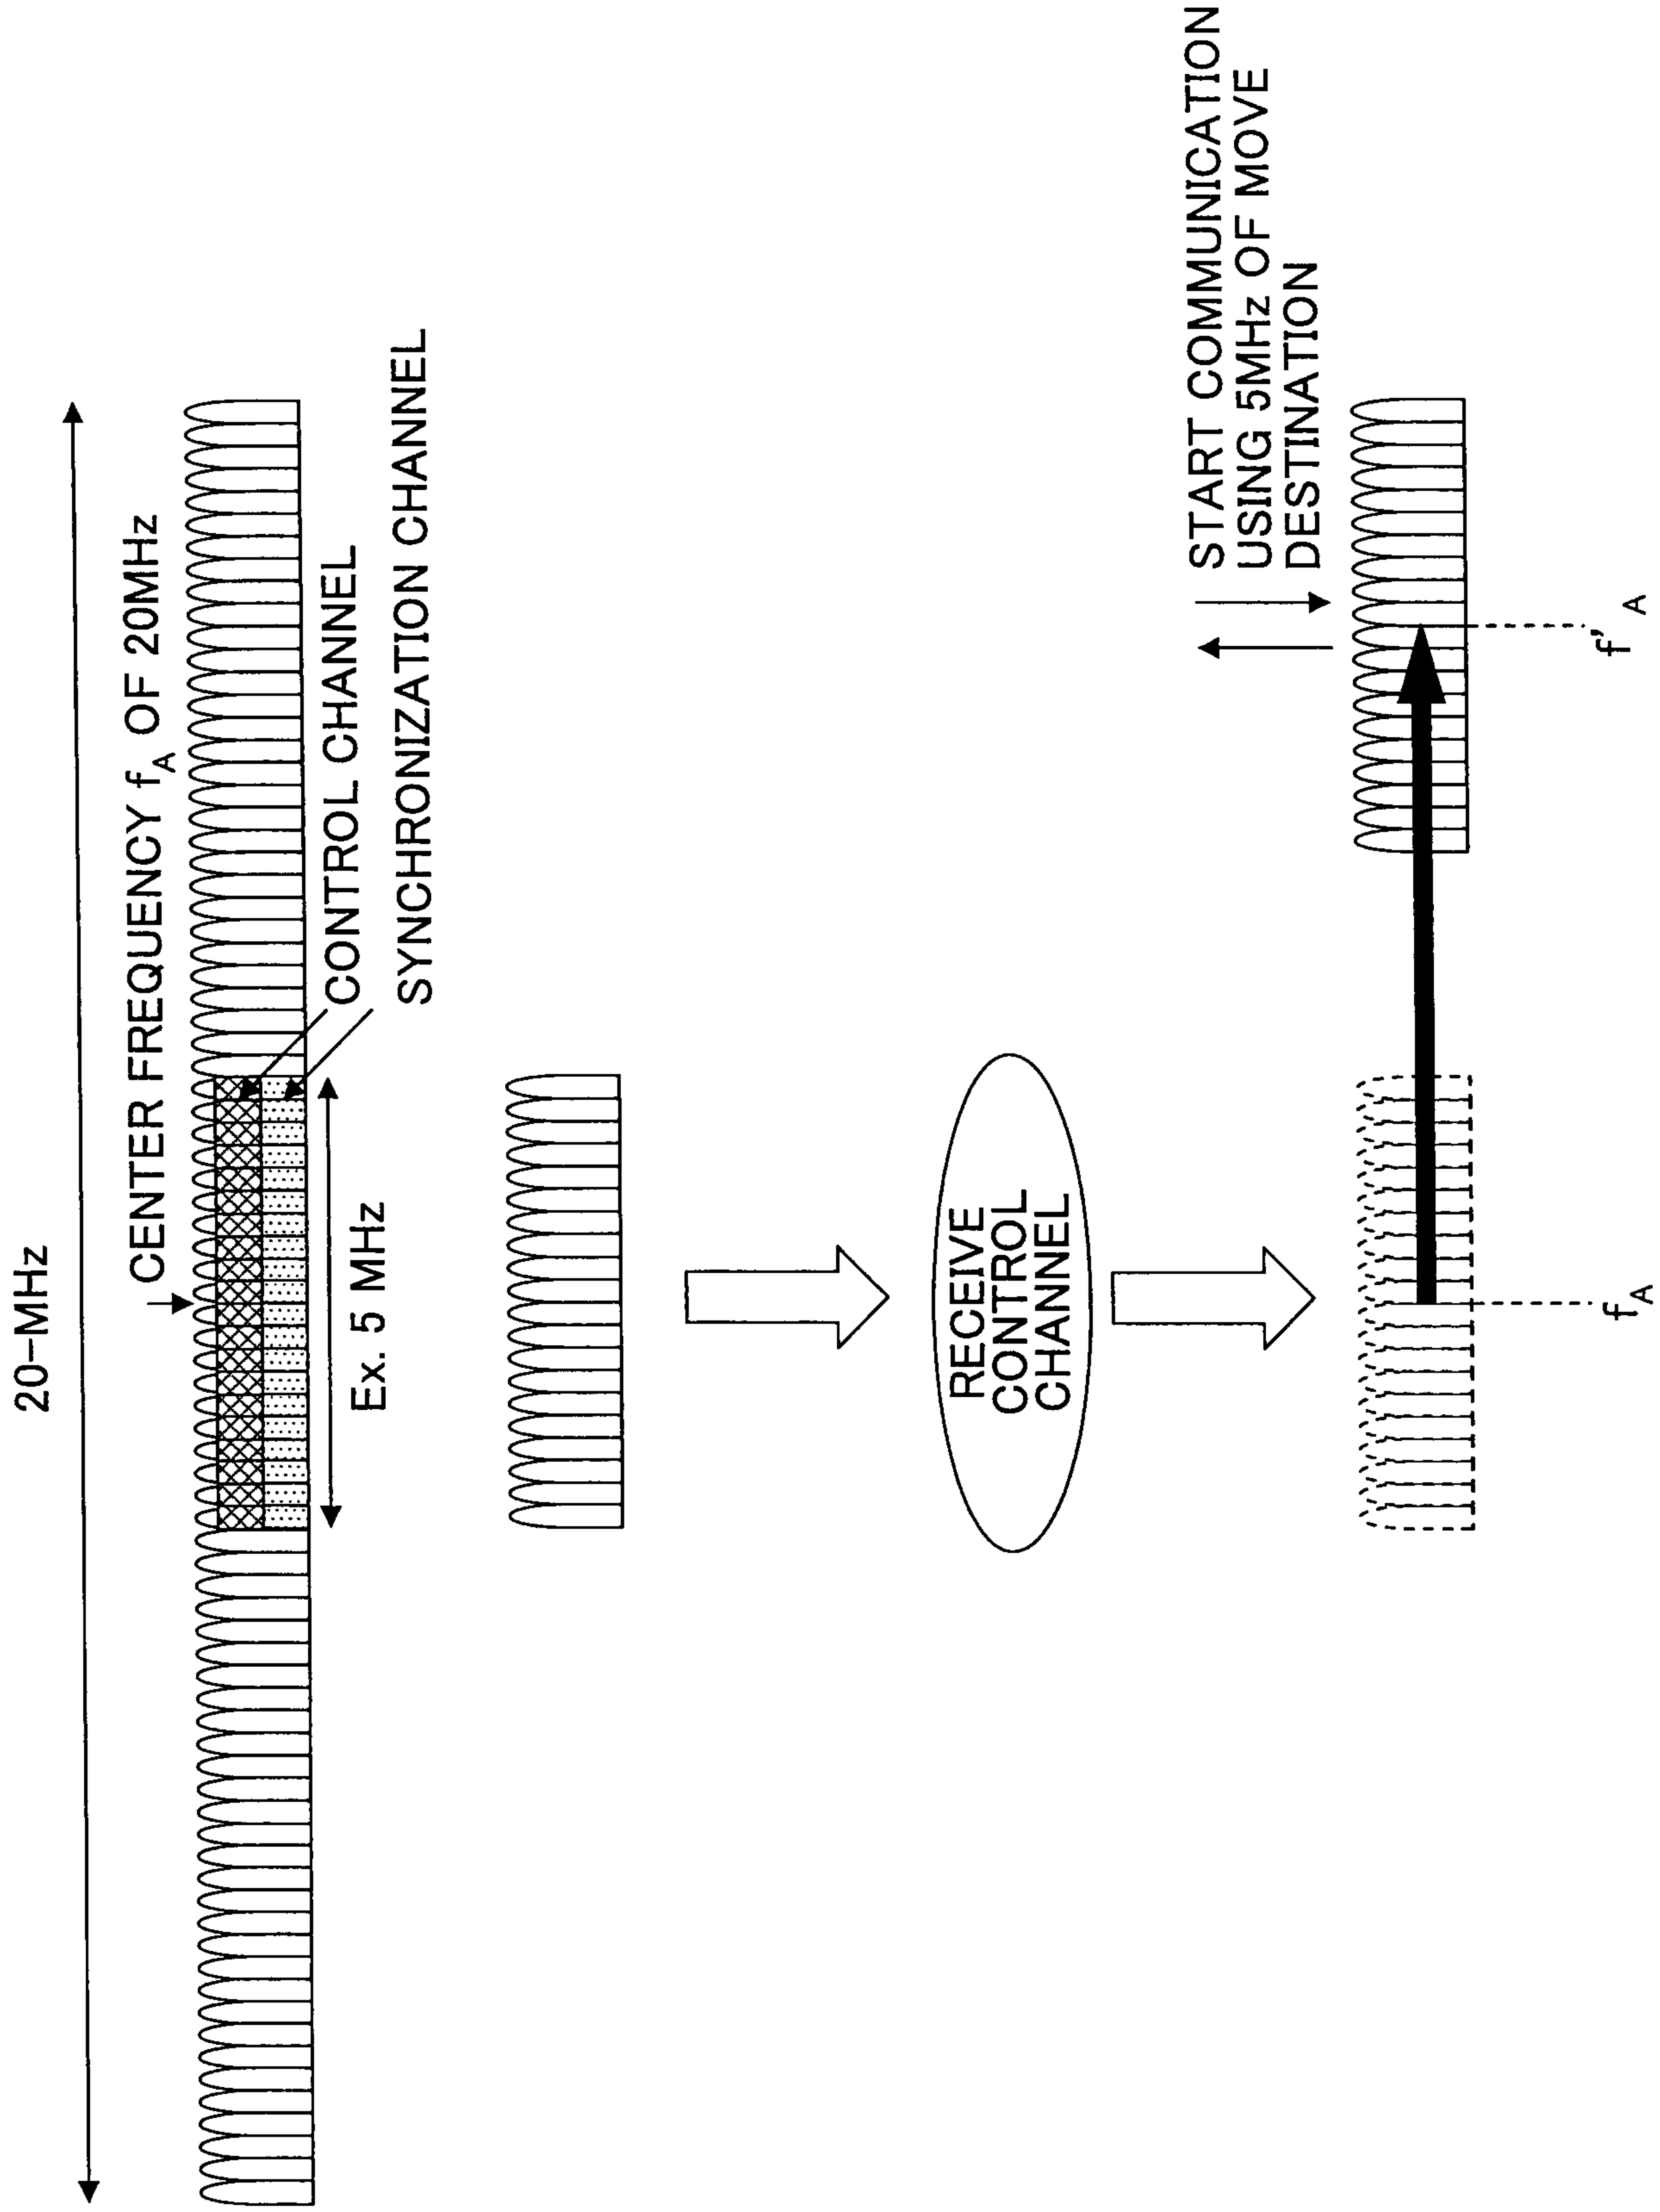


FIG.7B

FIG.8

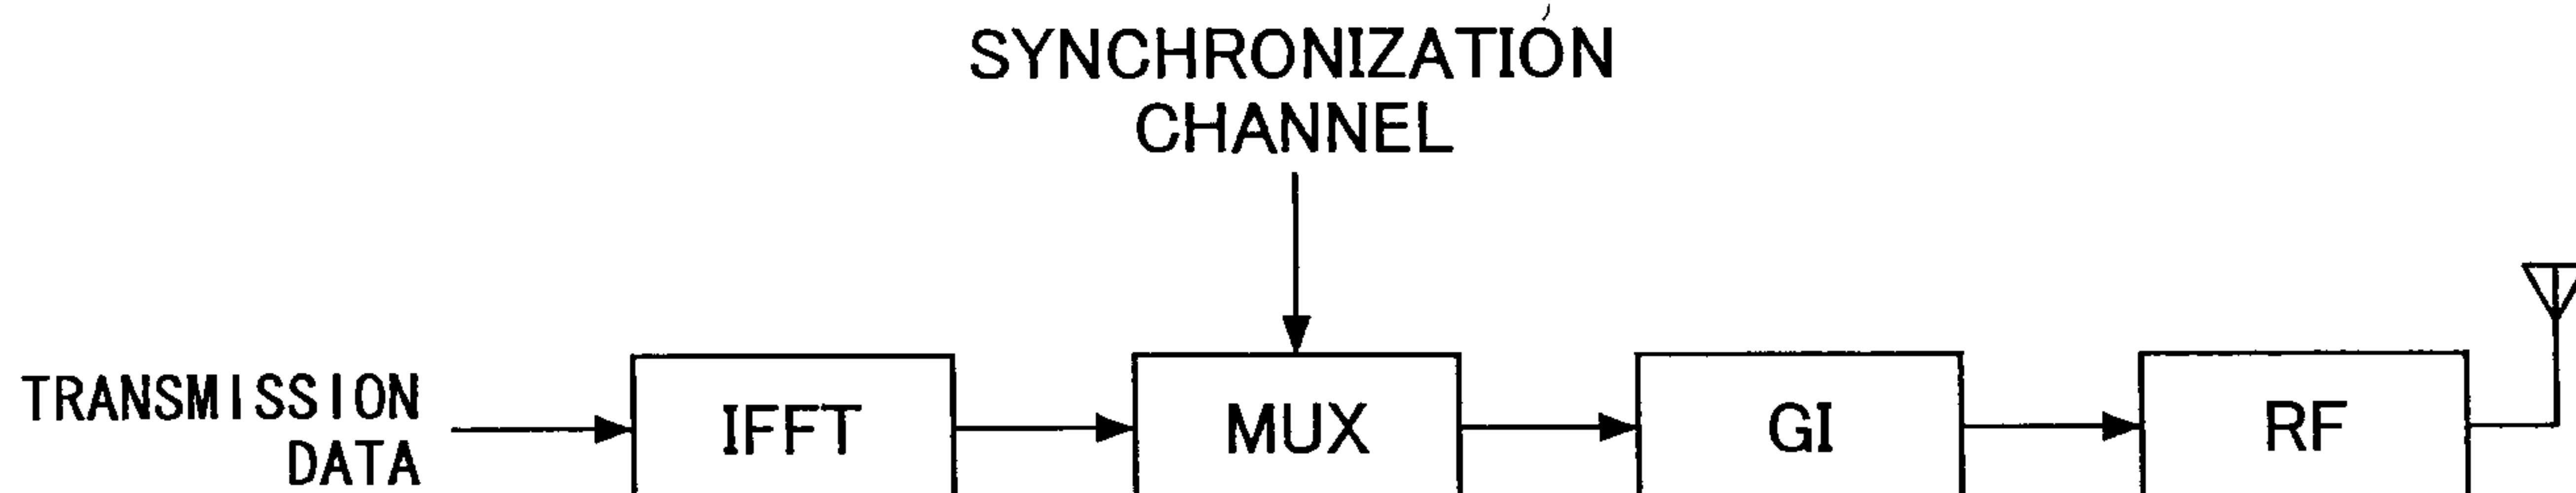


FIG.9

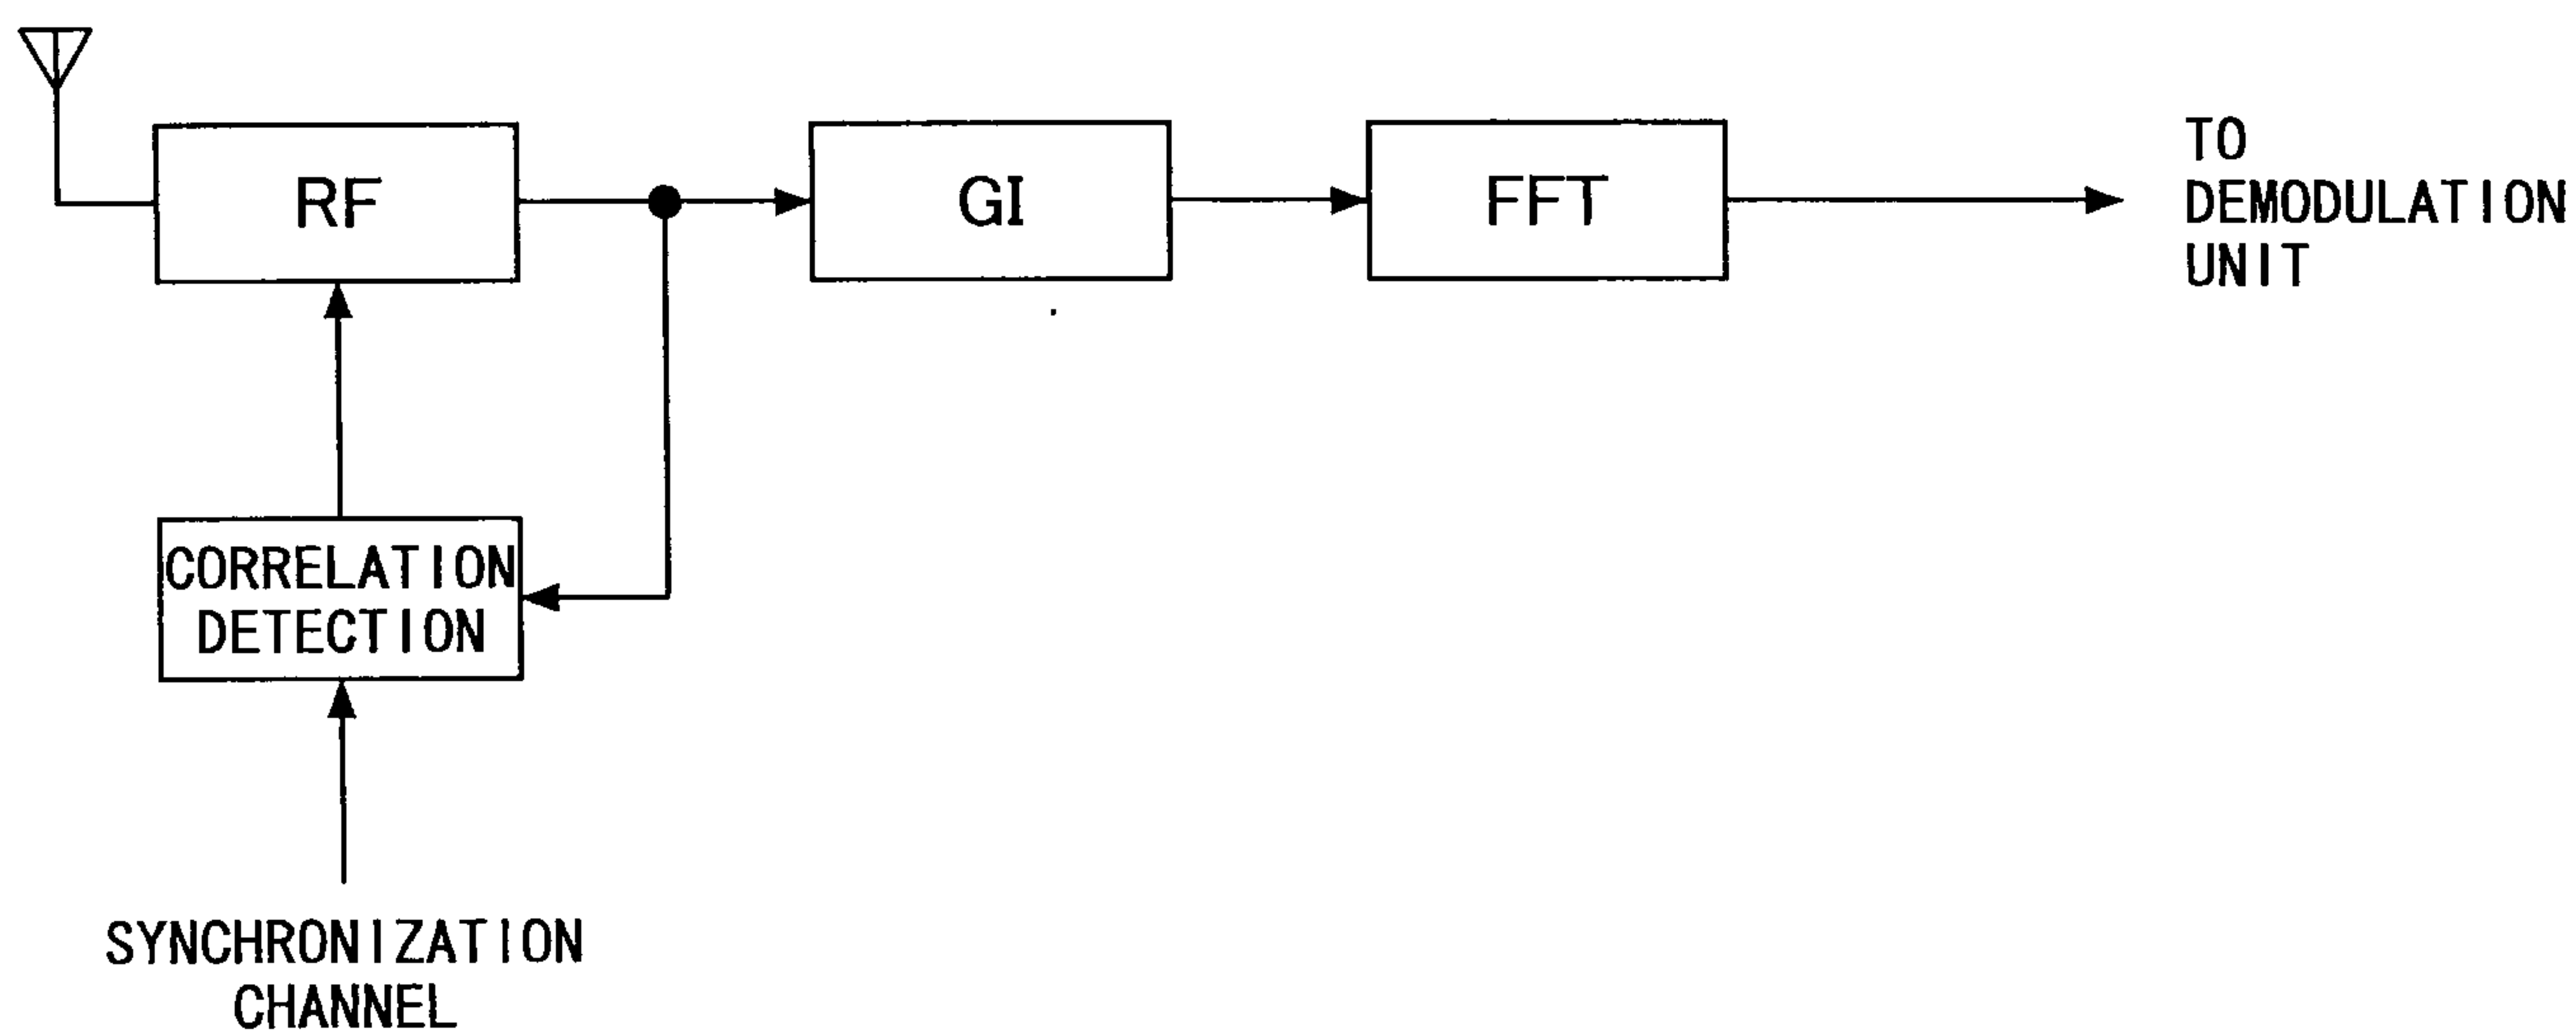


FIG.10

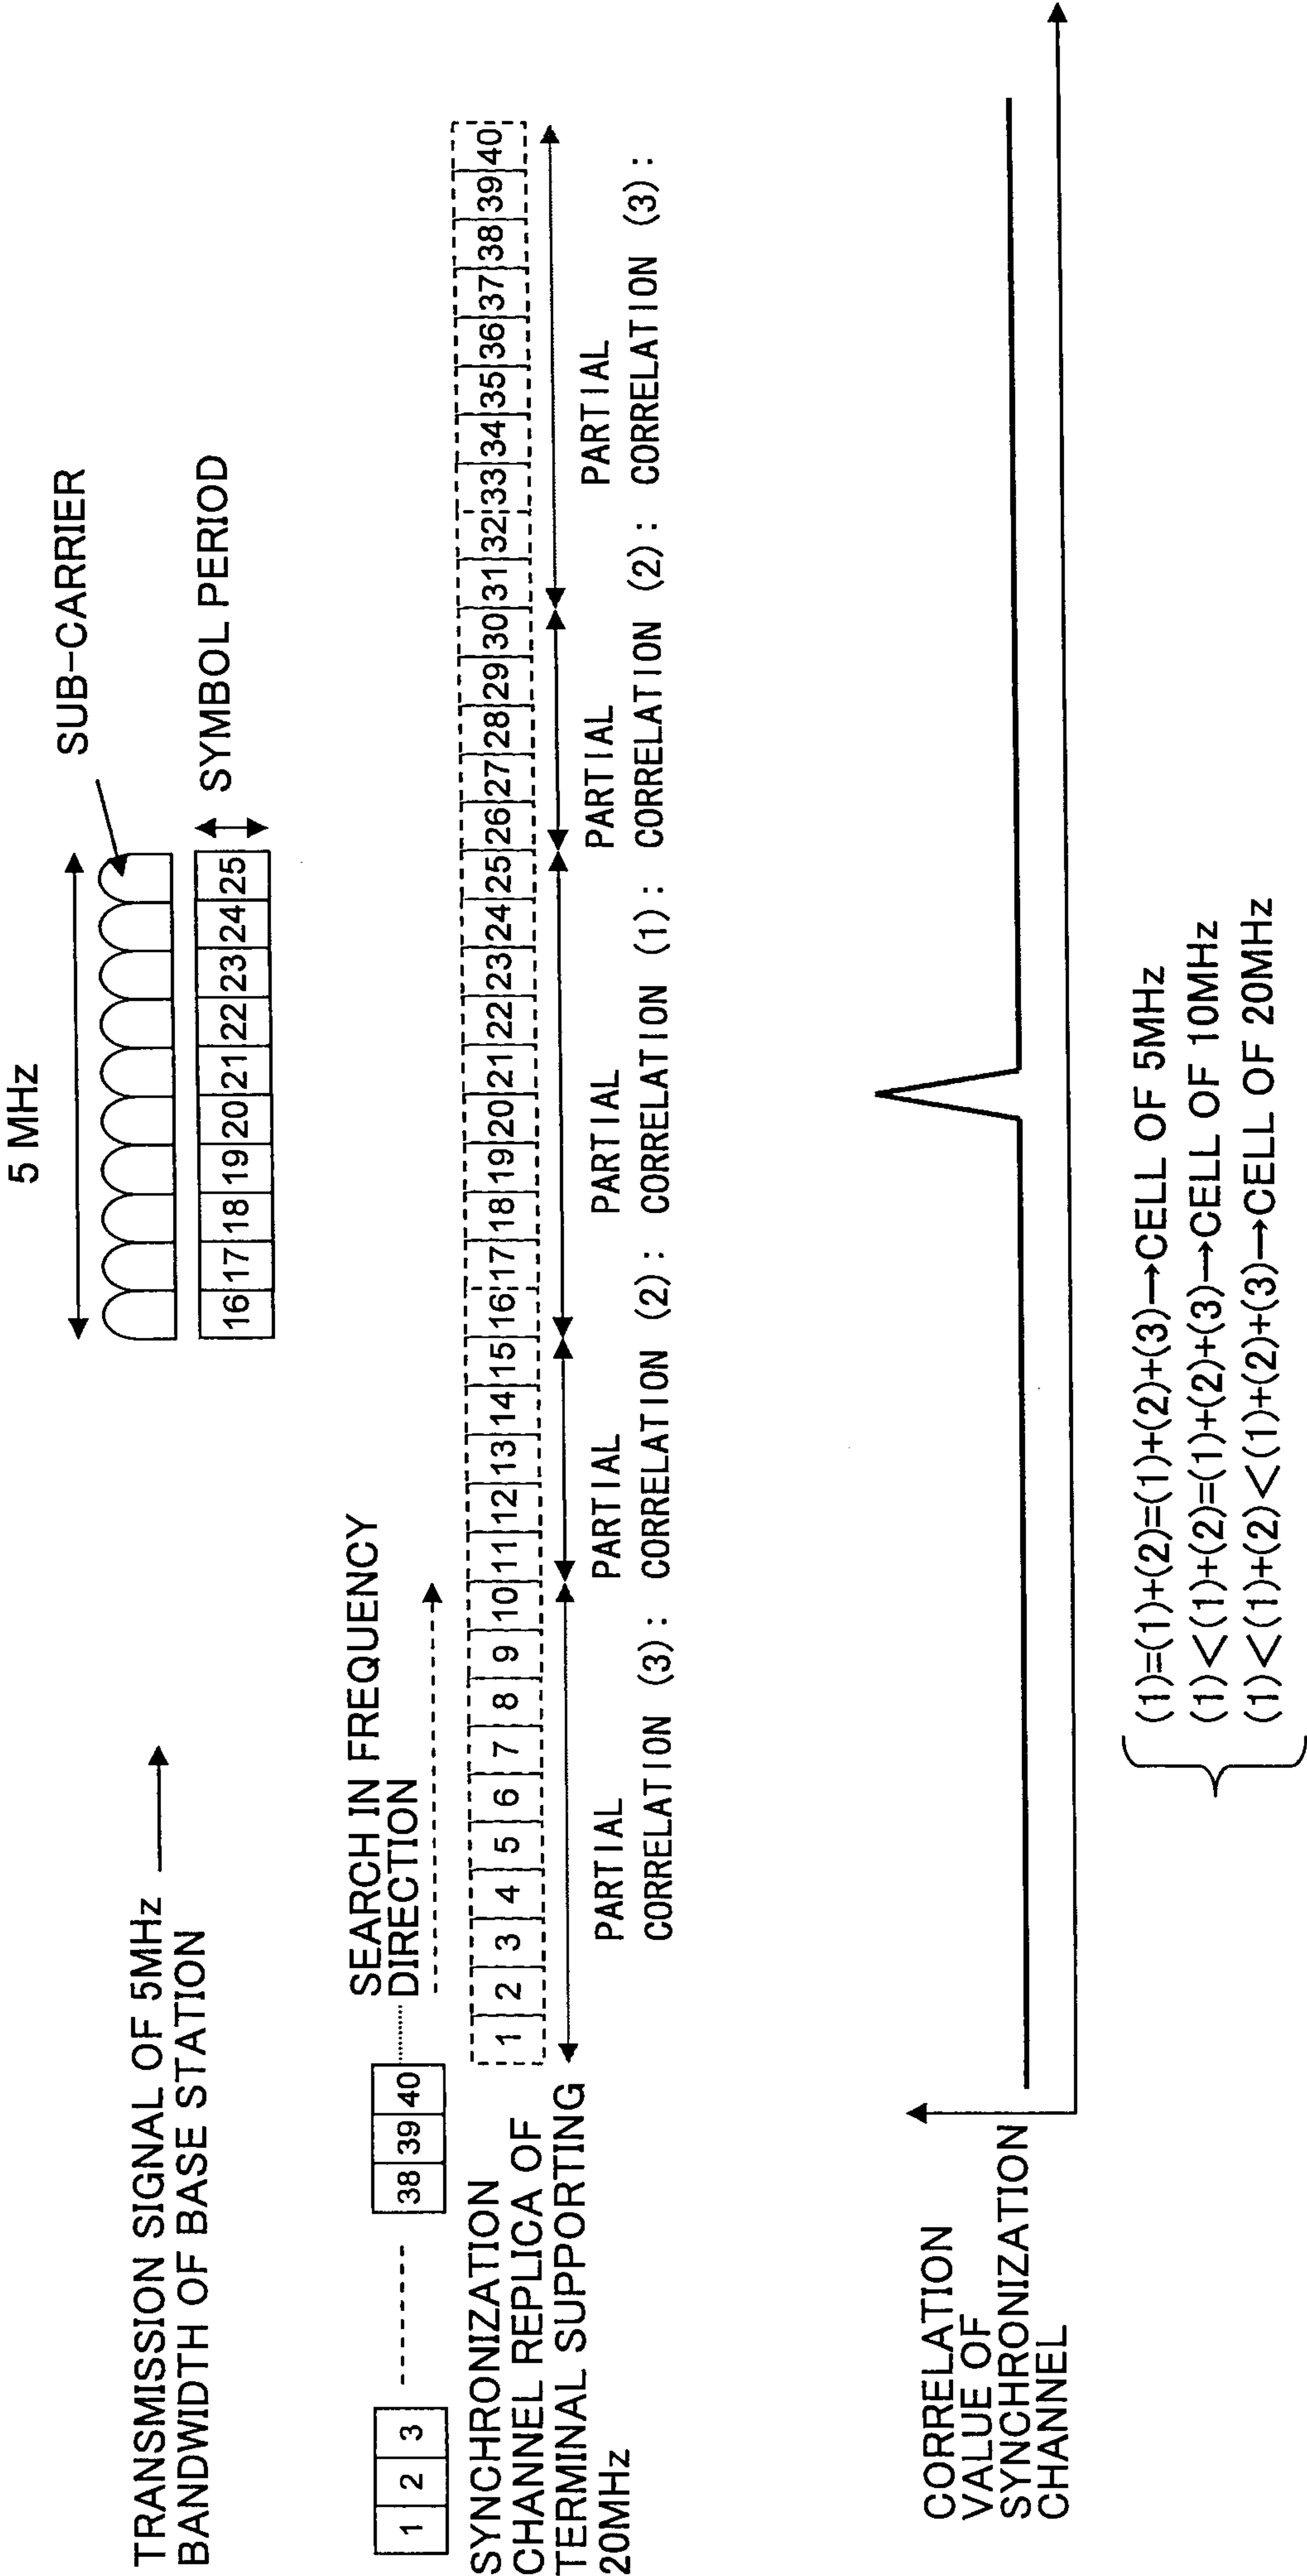


FIG.11

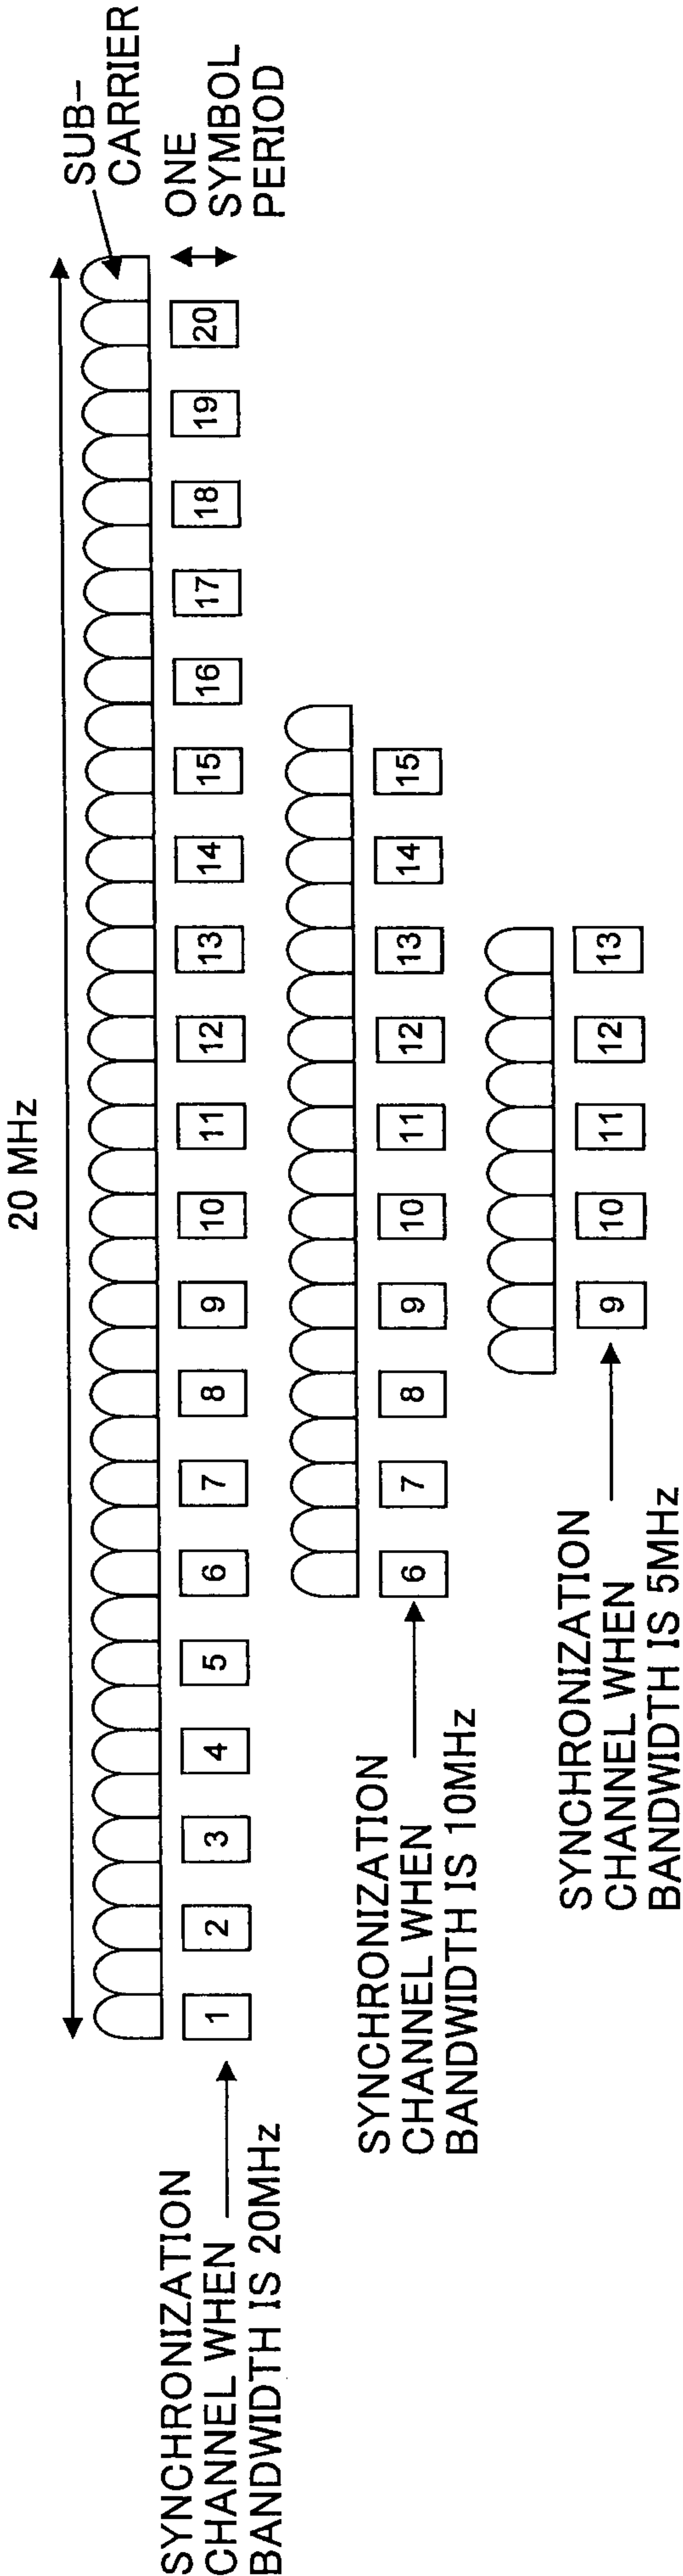


FIG.12

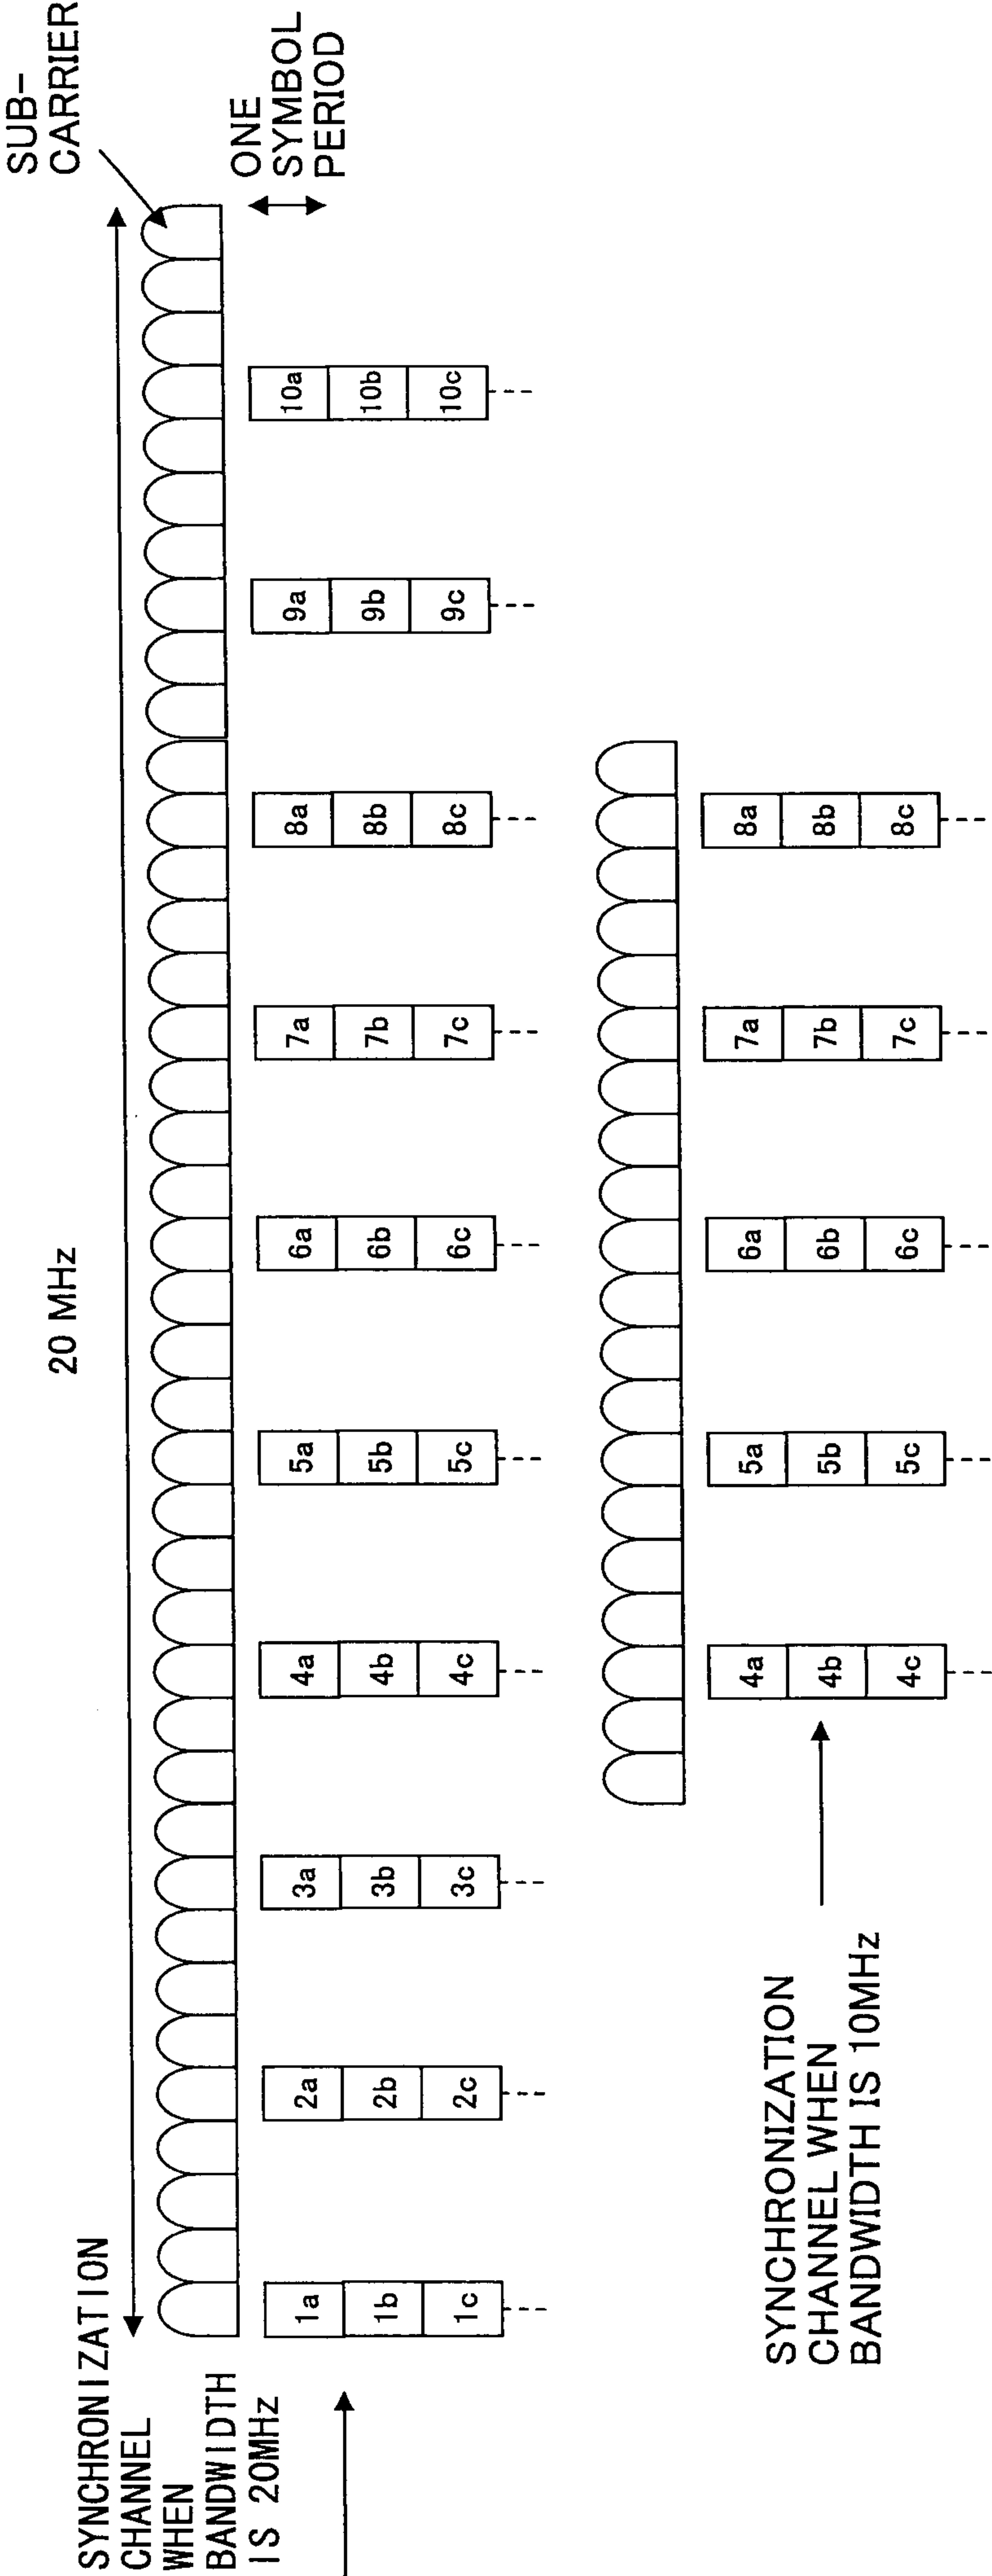


FIG.13

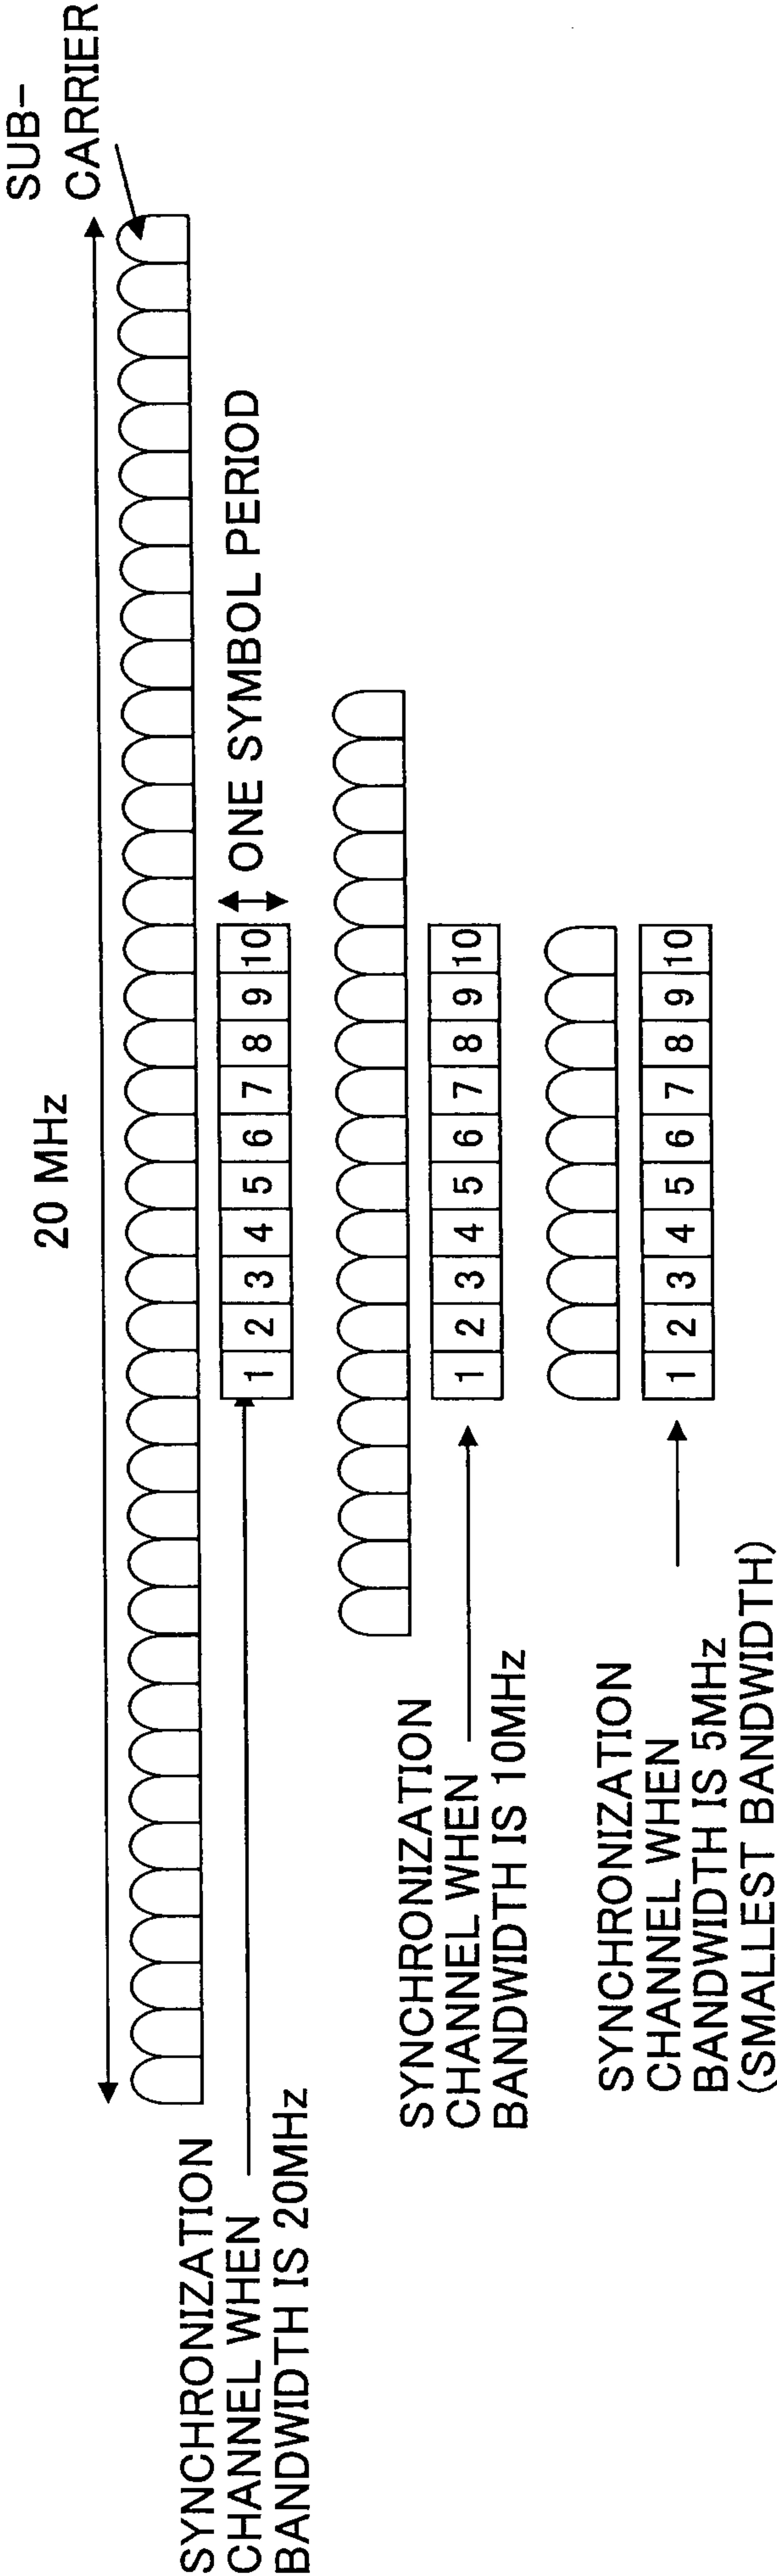


FIG.14

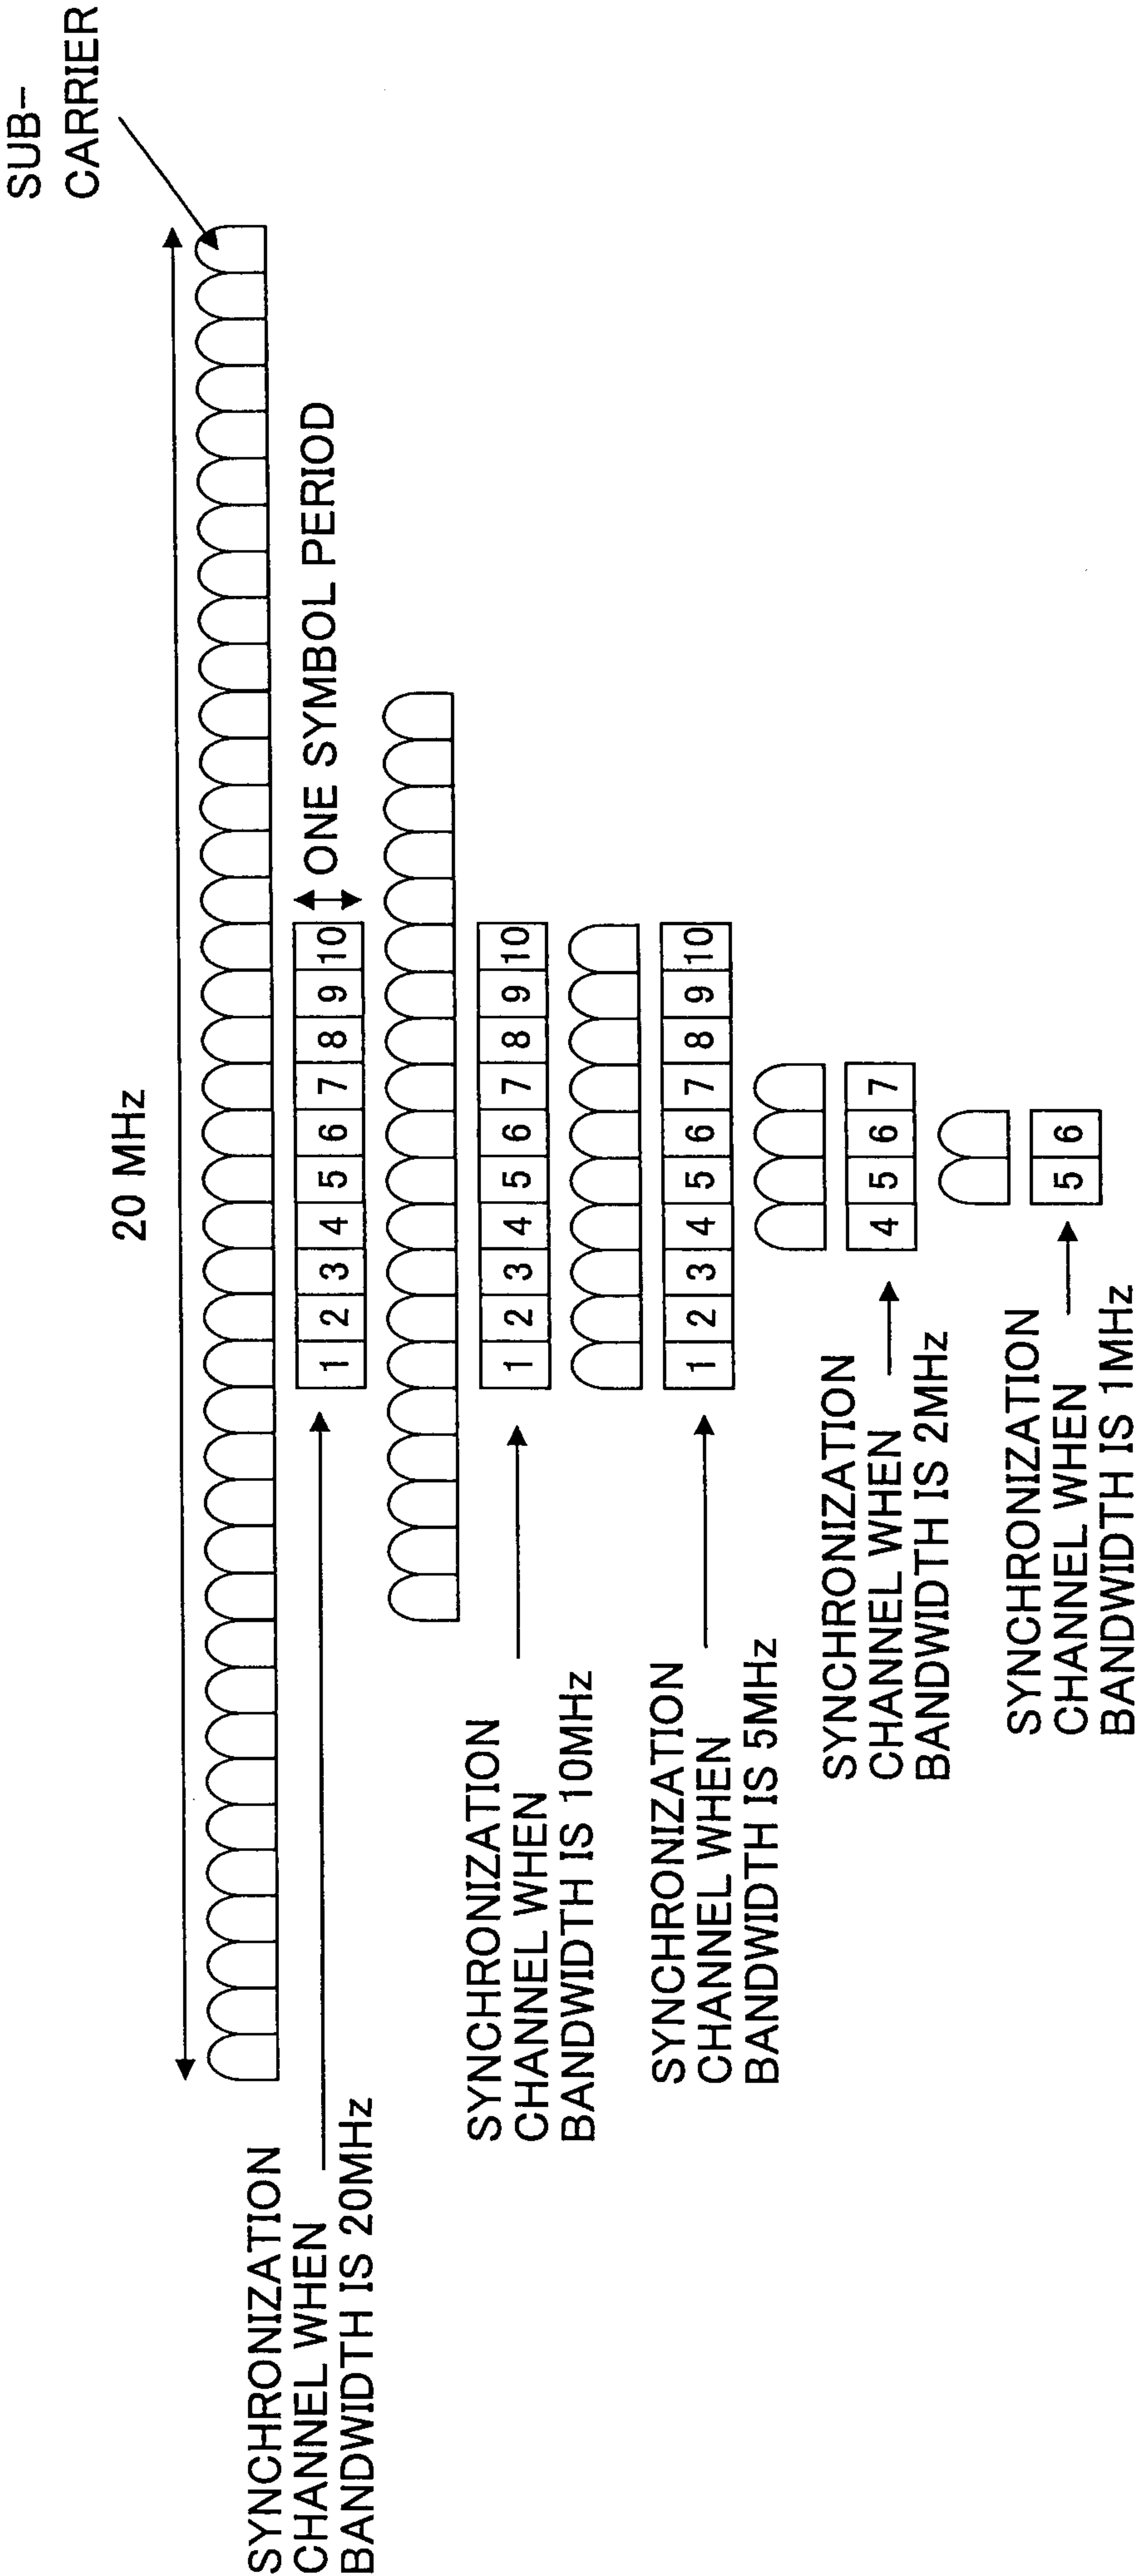


FIG.15

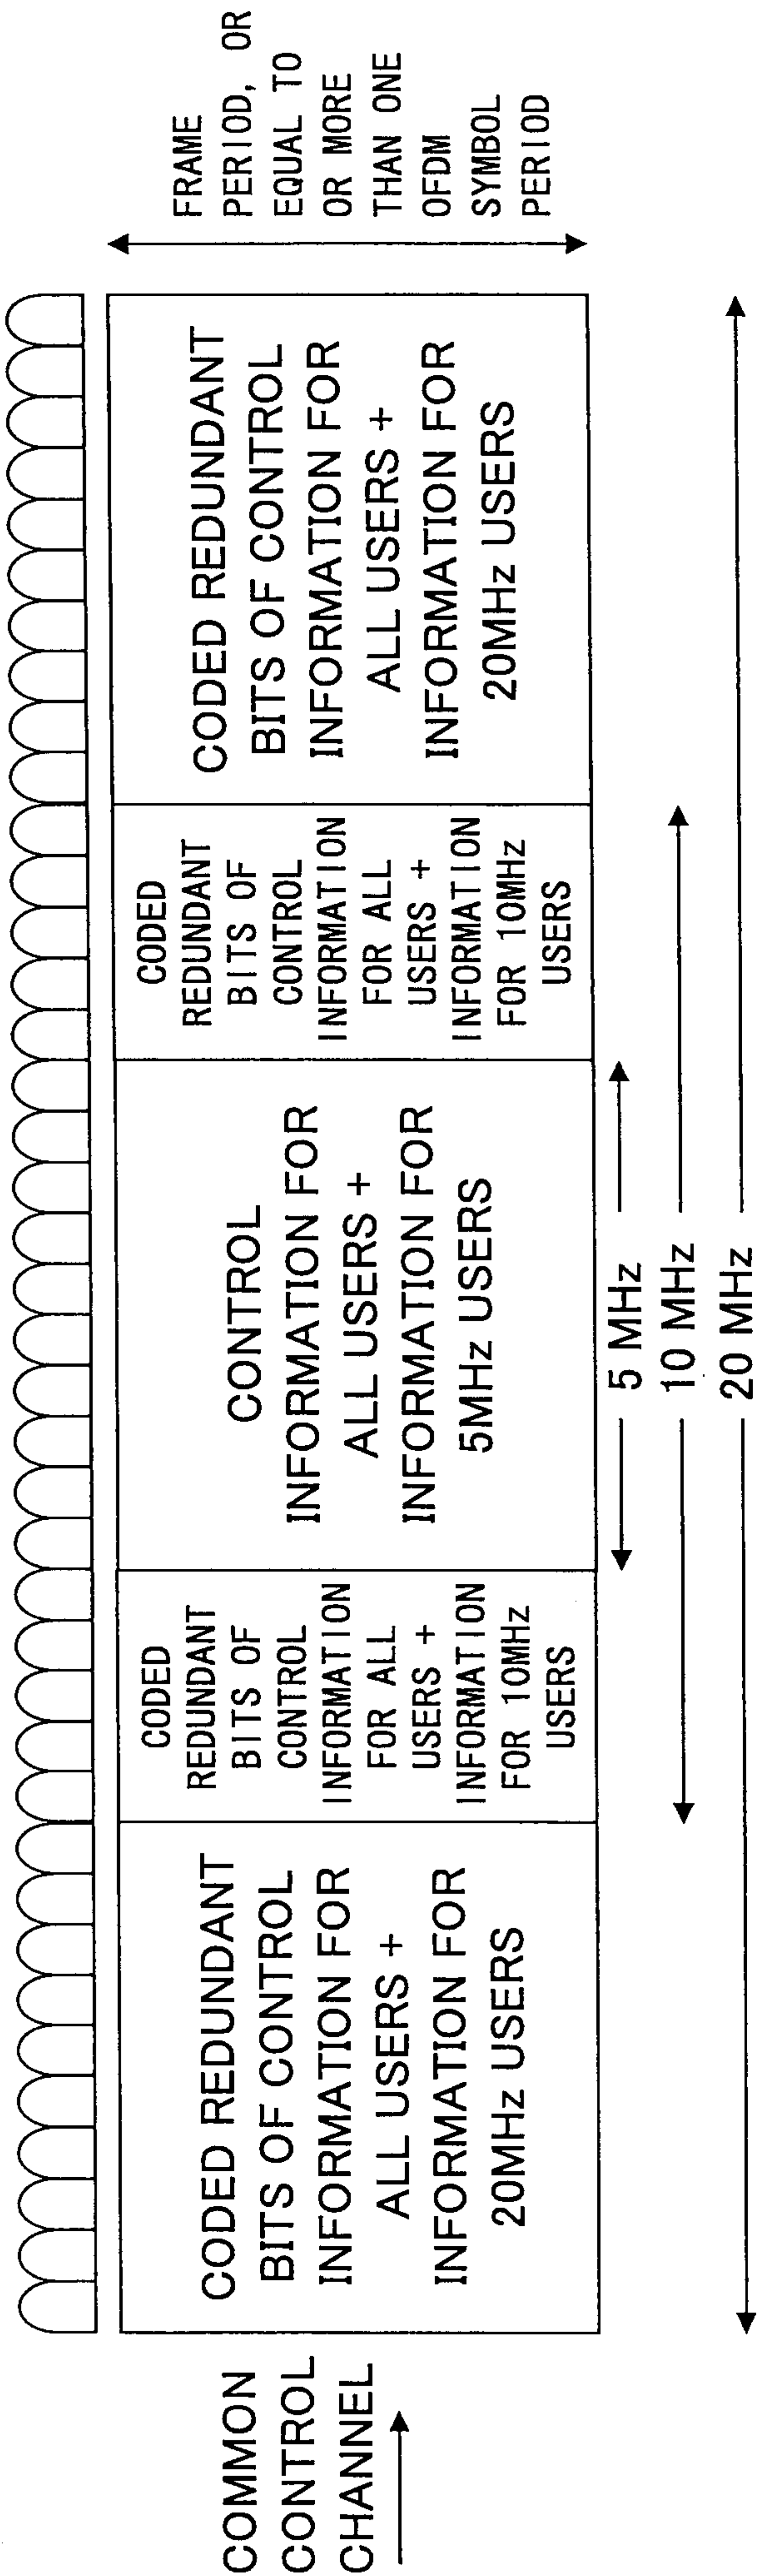


FIG.16

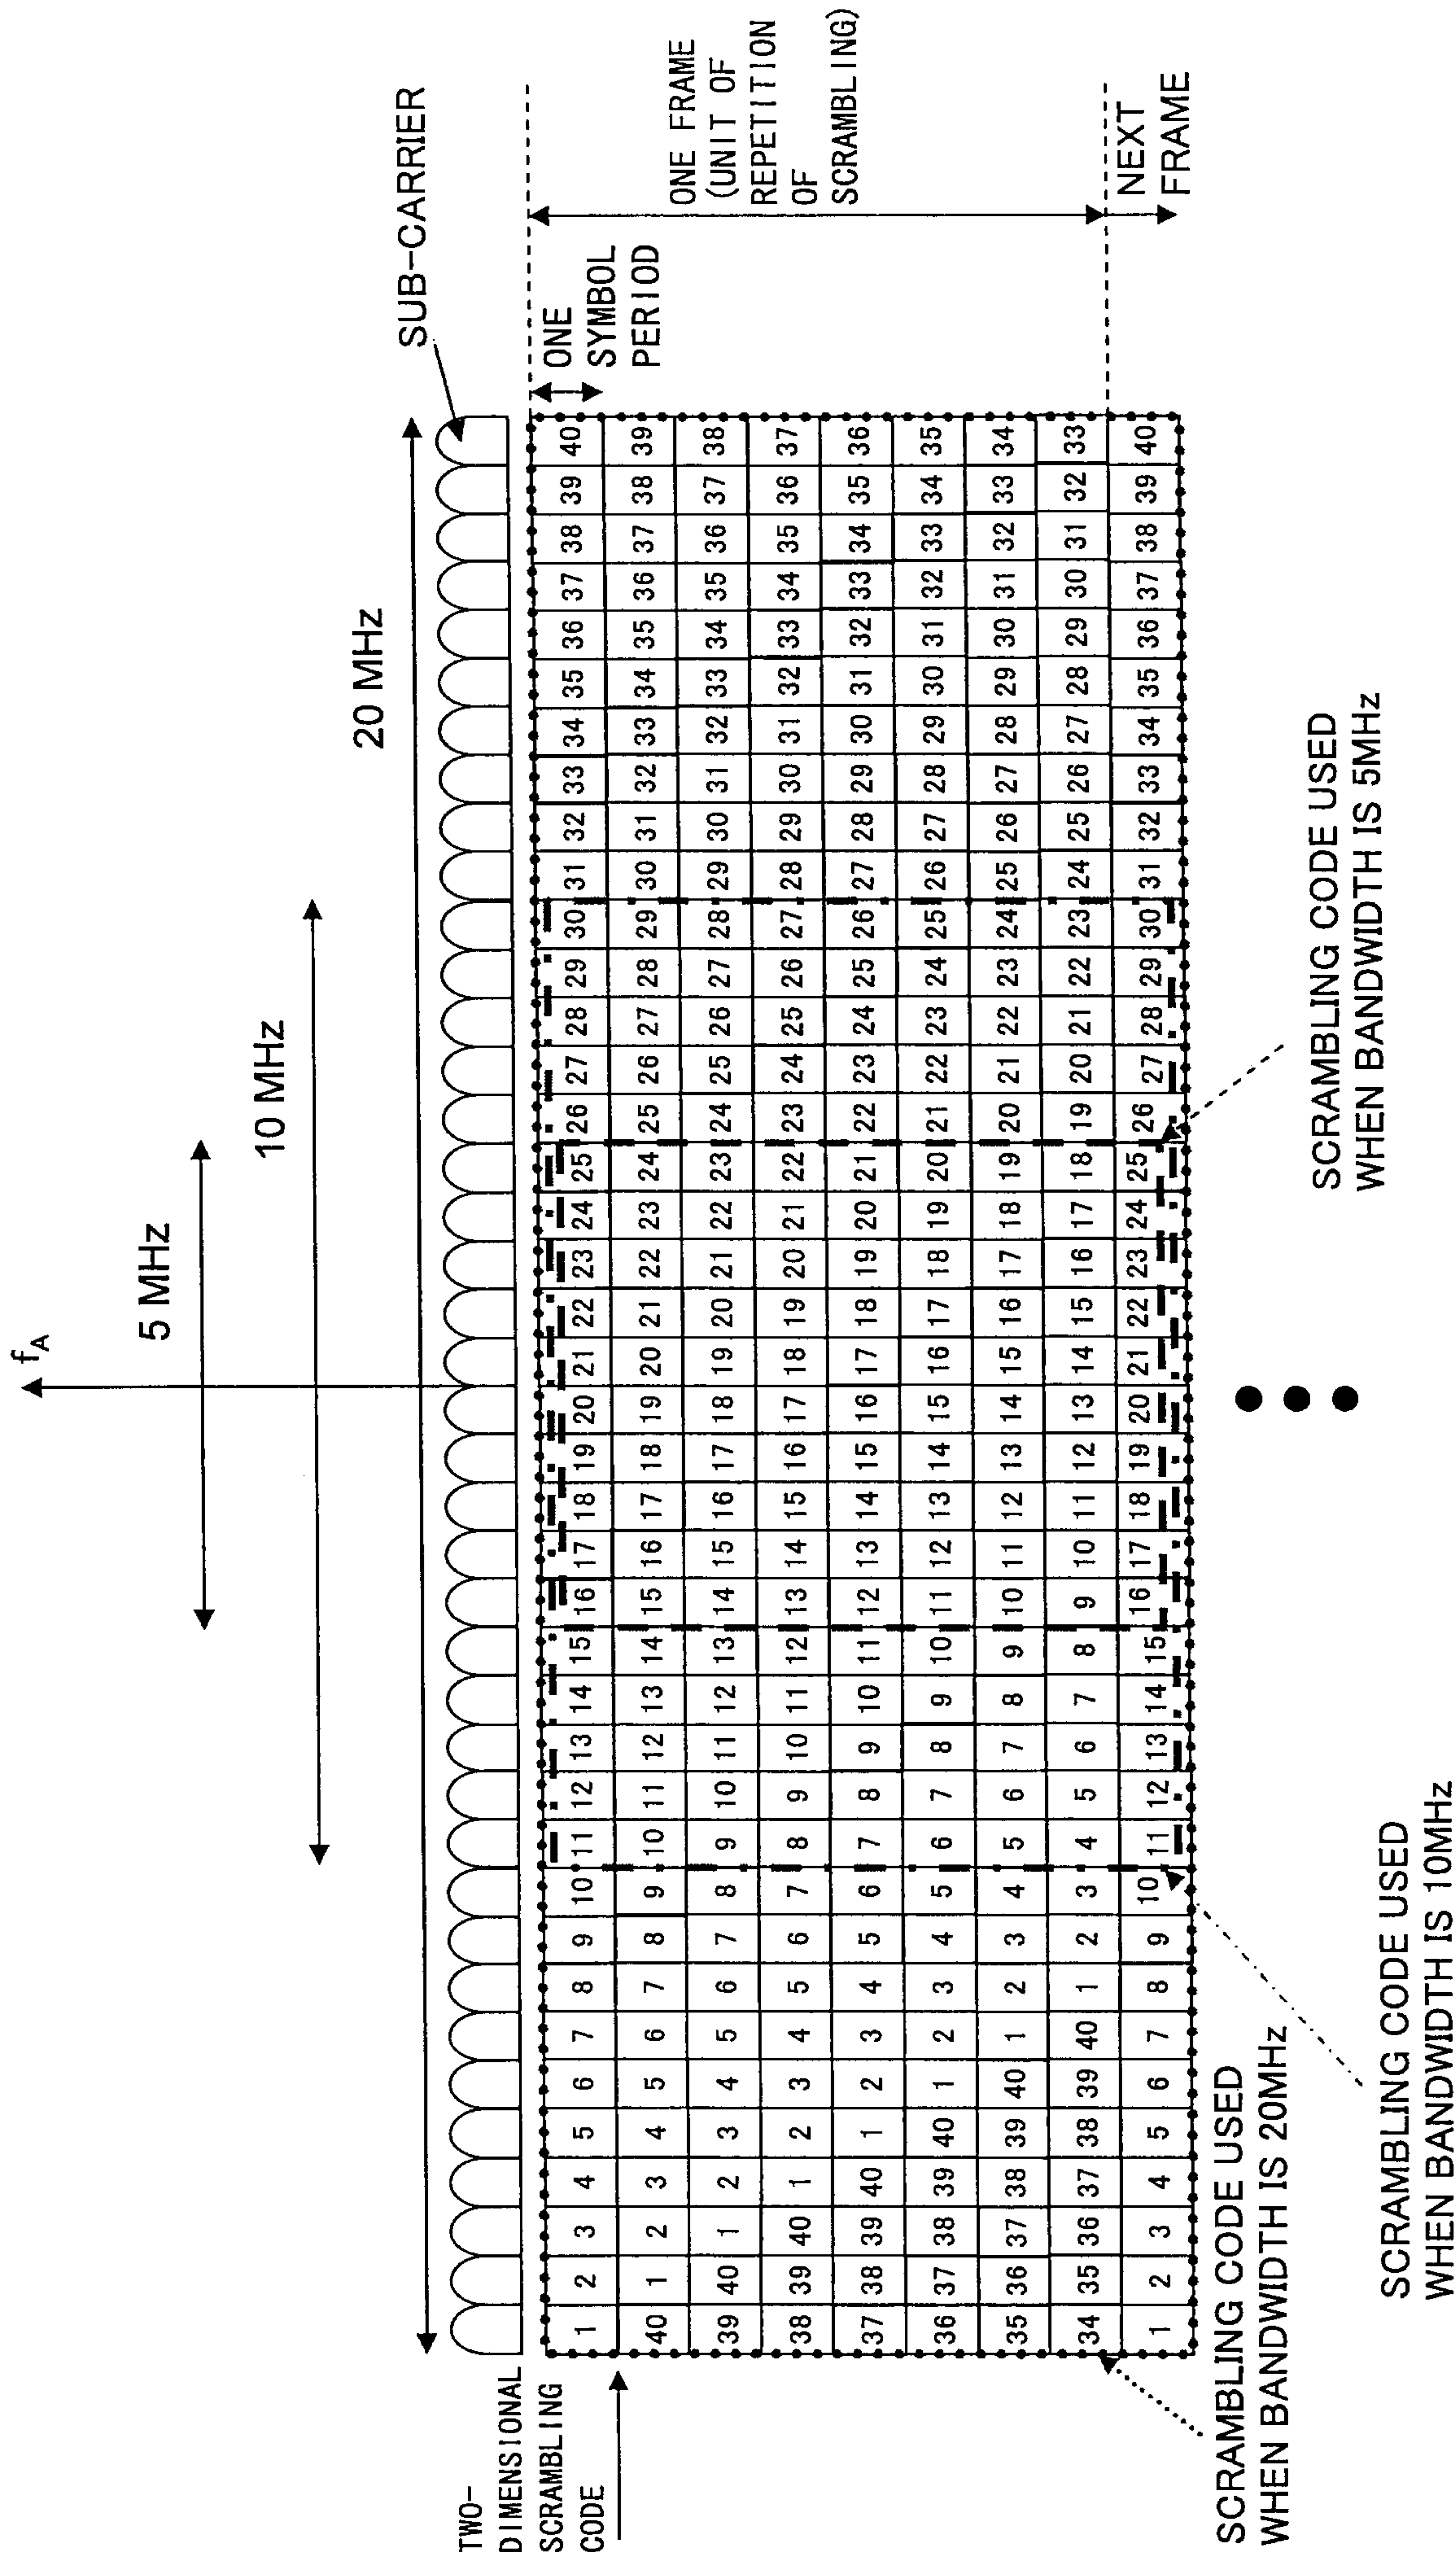


FIG. 17

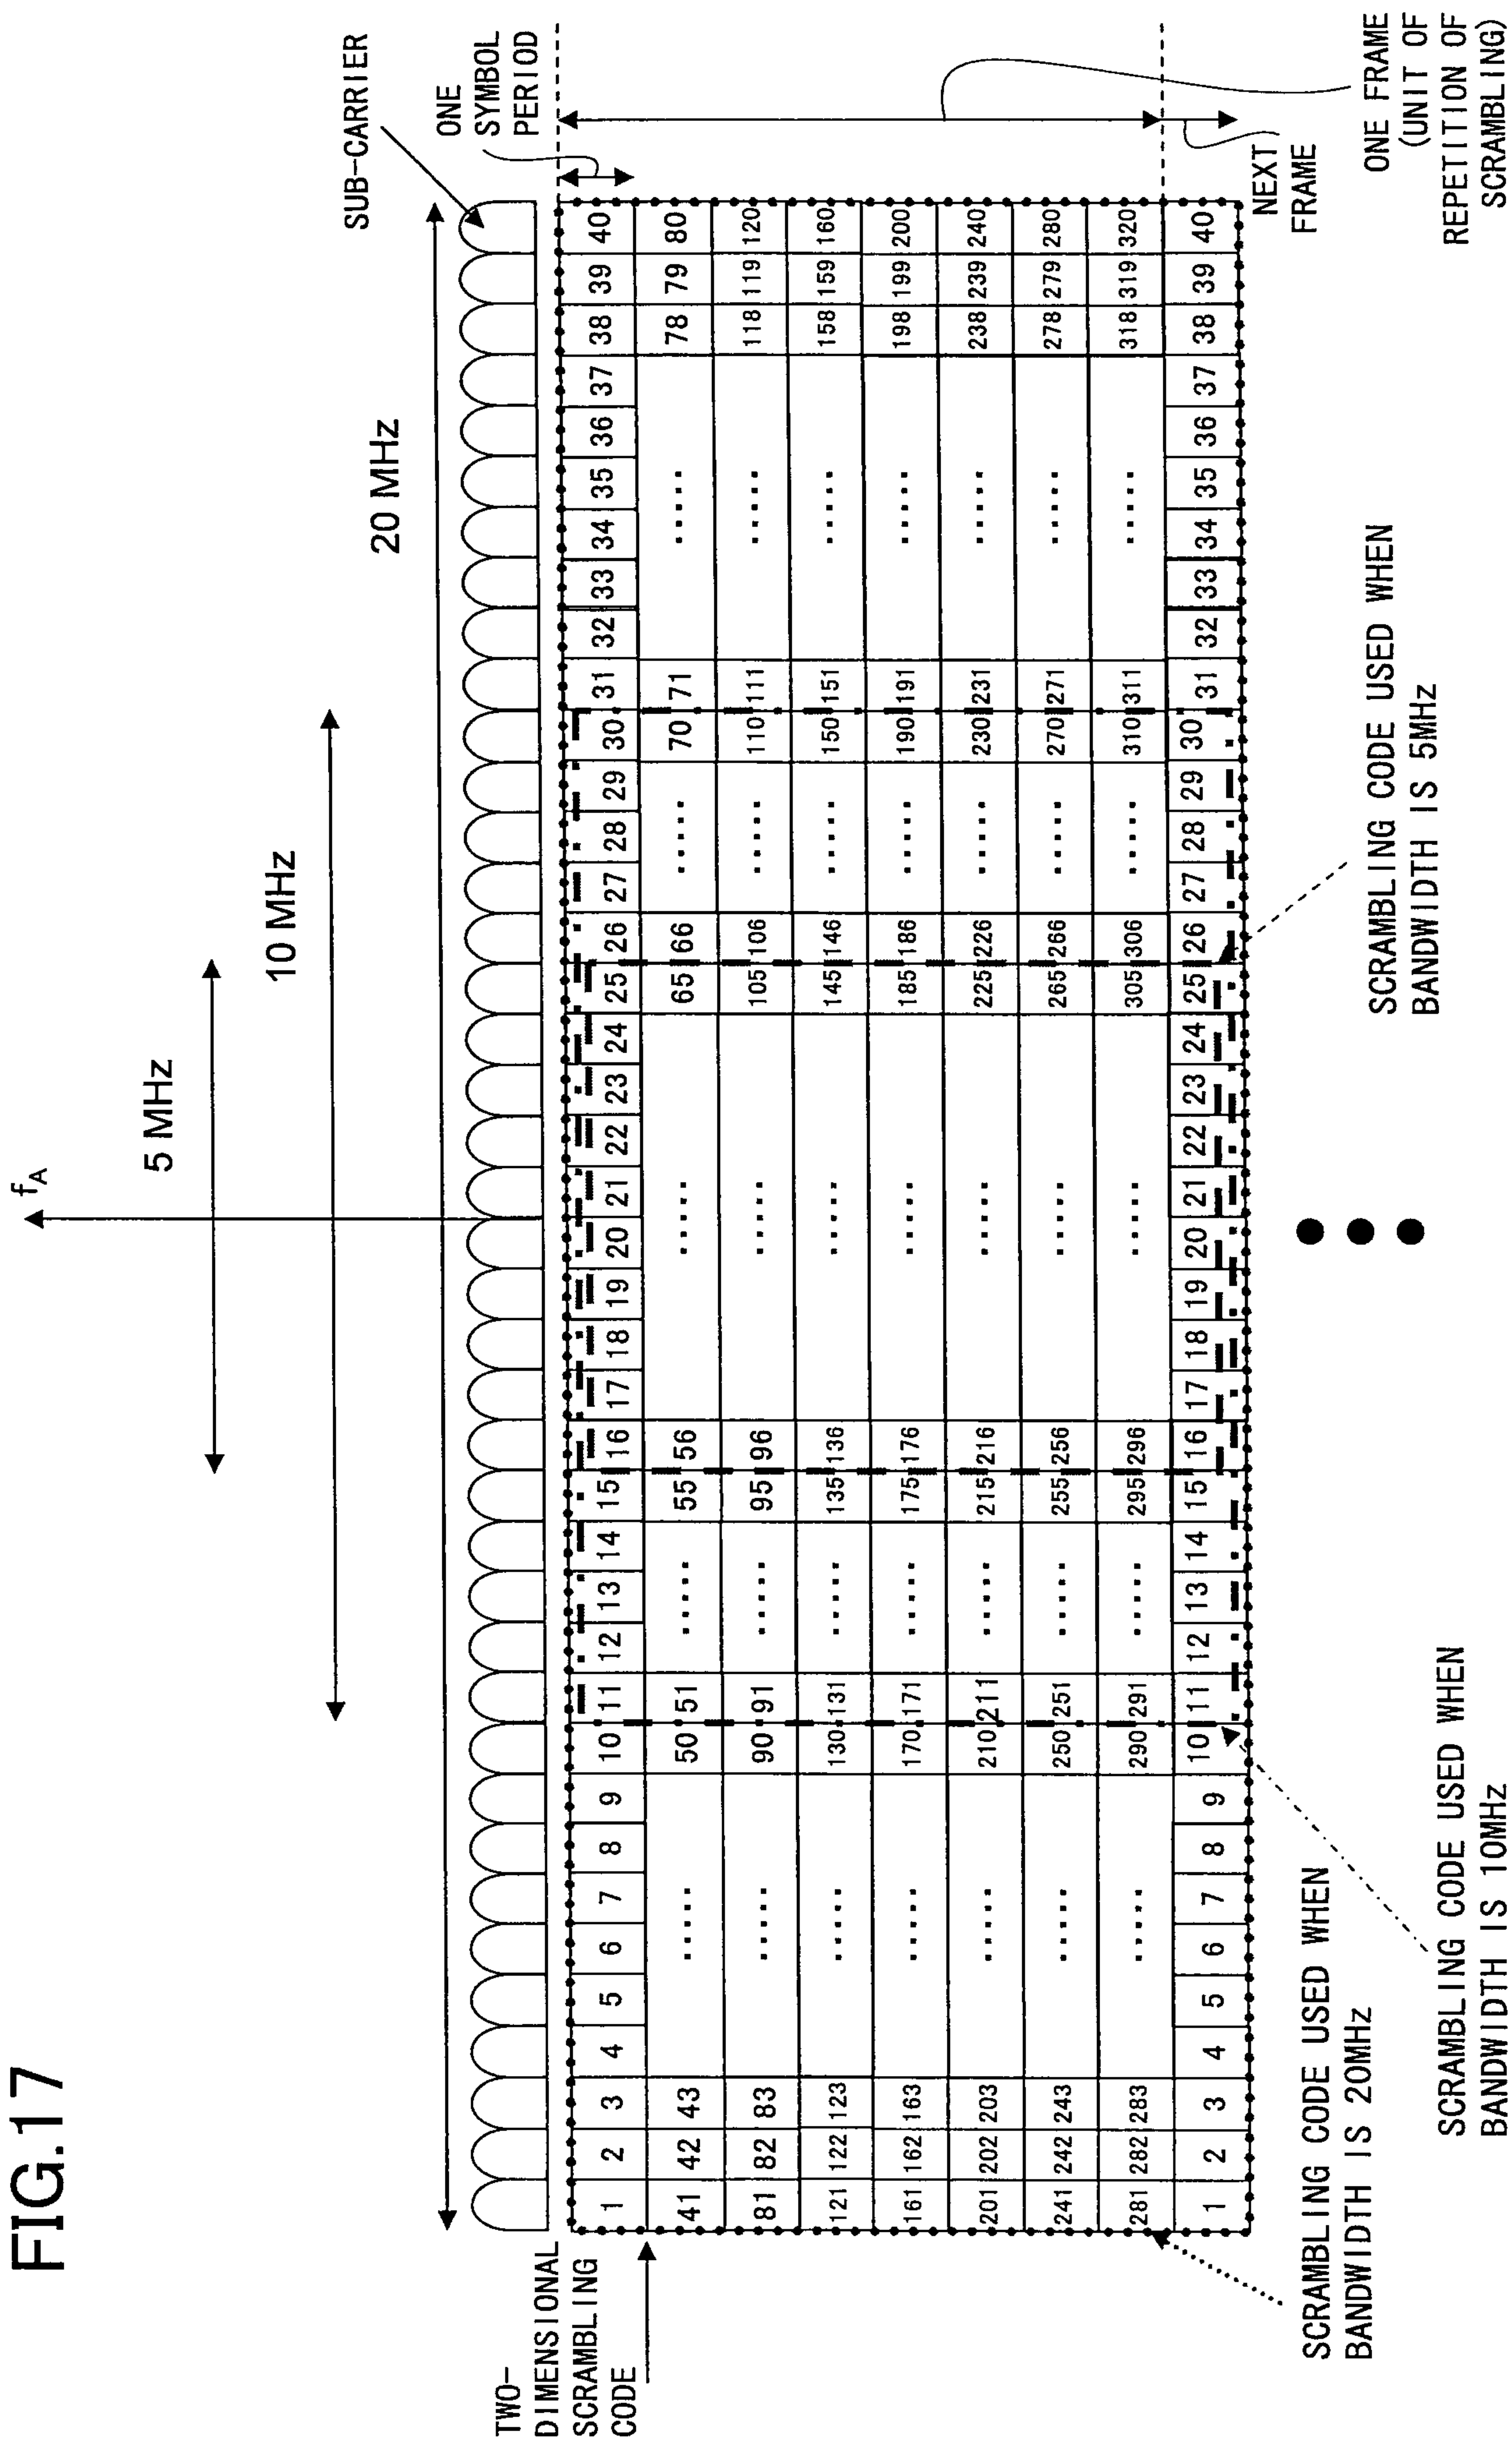


FIG.18

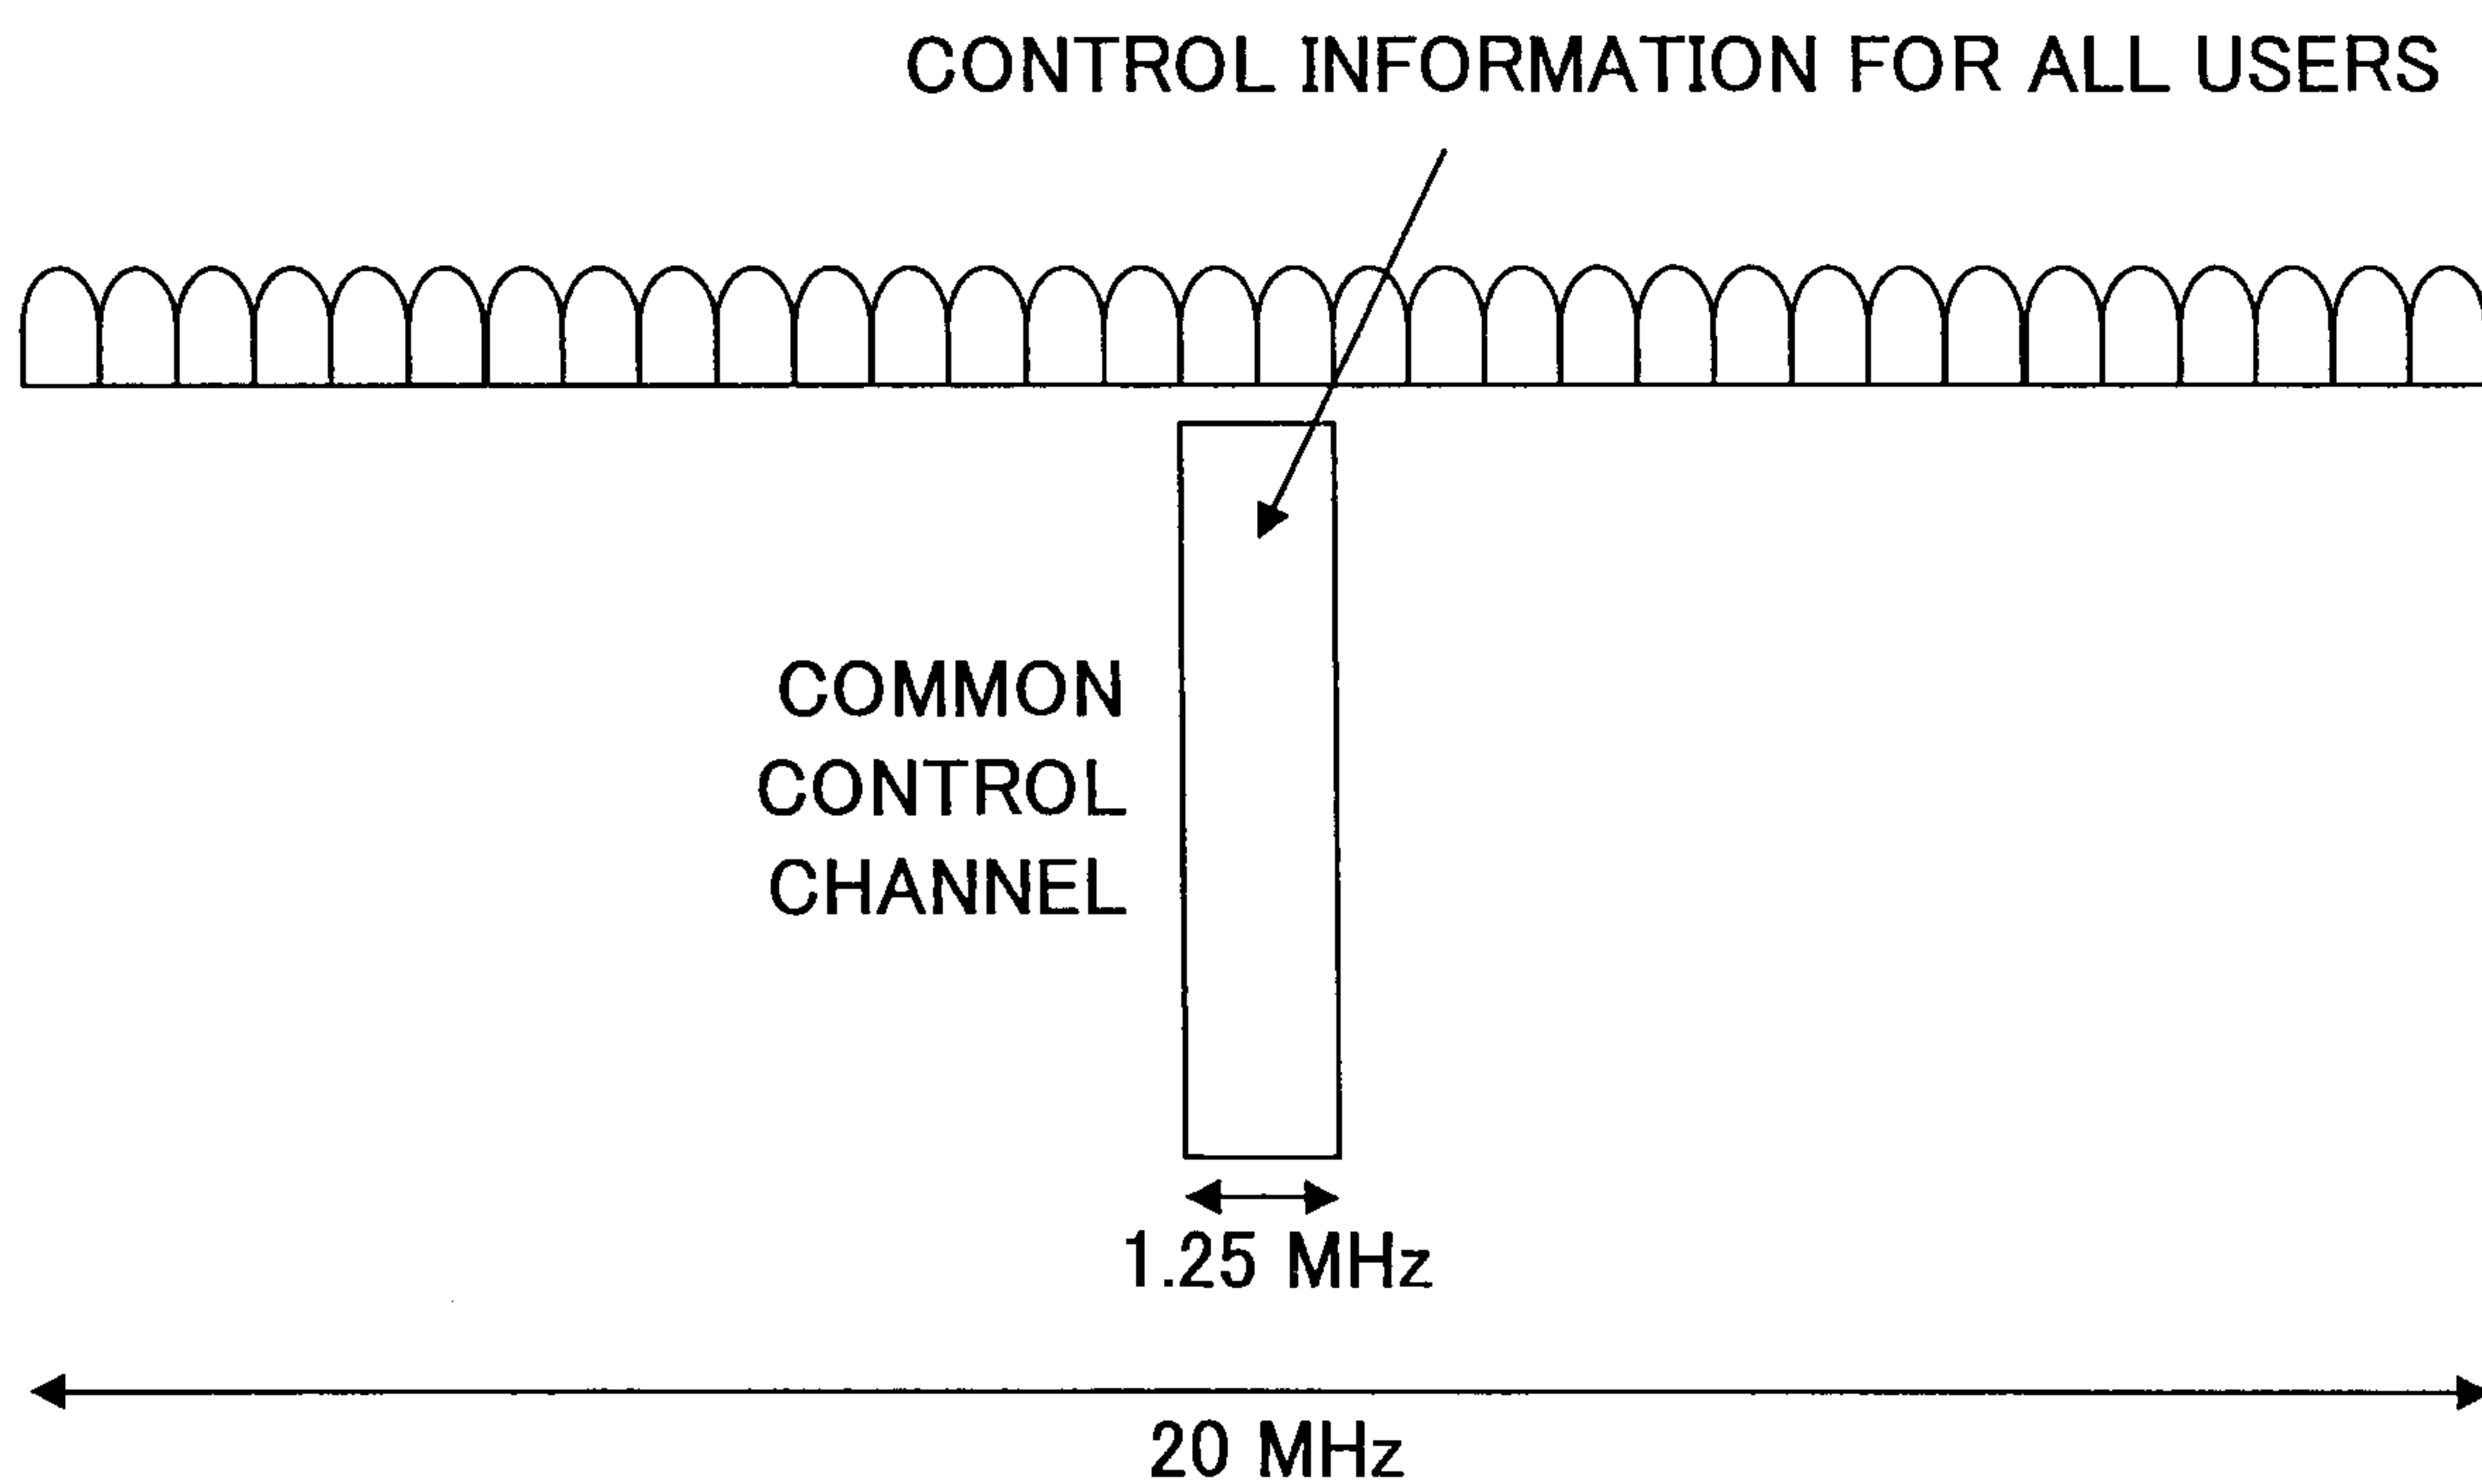


FIG.19

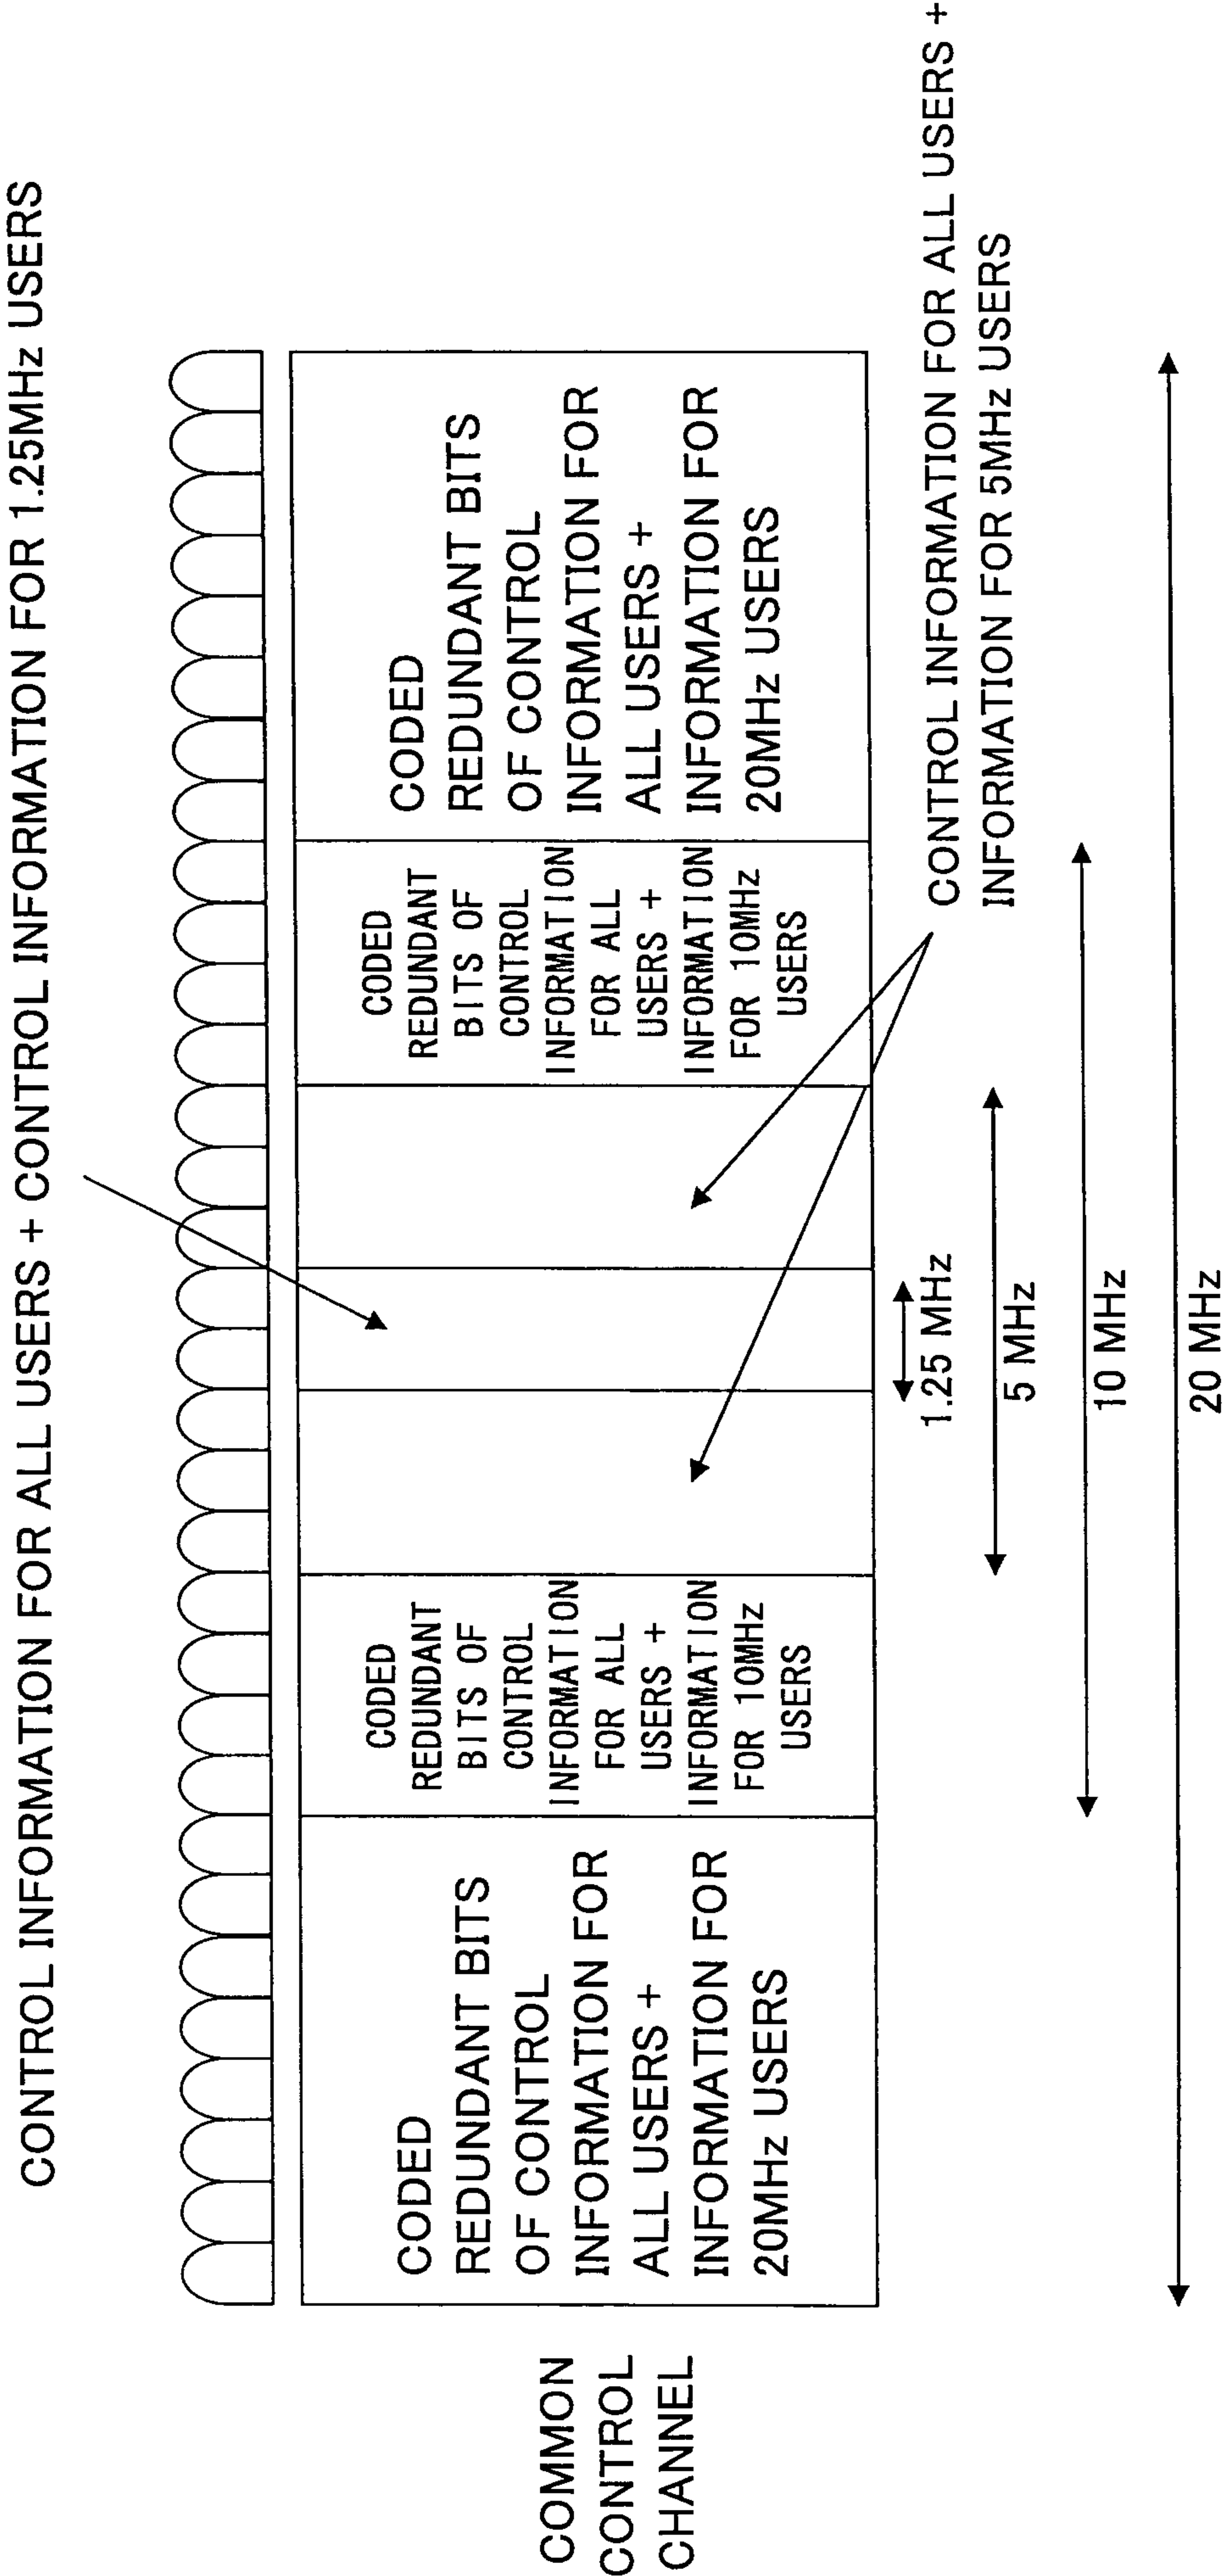


FIG.20

