



HU000025014T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 025 014**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 12 173893**(51) Int. Cl.: **H04N 13/00** (2006.01)(22) A bejelentés napja: **2006. 03. 30.**

(96) Az európai bejelentés bejelentési száma:

EP 20060173893

(97) Az európai bejelentés közzétételi adatai:

EP 2506582 A1 **2012. 10. 03.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2506582 B1 **2015. 01. 28.**

(30) Elsőbbségi adatok:

20050027011 **2005. 03. 31.** **KR**

(72) Feltalálók(k):

Lee, Yung-Lyul, Seoul (KR)

(73) Jogosult(ak):

Samsung Electronics Co., Ltd., Suwon-si,
Gyeonggi-do, 443-742 (KR)**Industry-academia Cooperation Group Of**
Sejong University, Seoul 143-747 (KR)

(74) Képviselő:

Sipos József, DANUBIA Szabadalmi és Jogi
Iroda Kft., Budapest

(54) **Berendezés és eljárás összetett nézetű (Multi-View) videó kódolására kamera paraméterek használatával, berendezés és eljárás összetett nézetű videó előállítására kamera paraméterek használatával, és az eljárások megvalósítására szolgáló programot tároló**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 506 582 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
28.01.2015 Bulletin 2015/05

(51) Int Cl.:
H04N 13/00 (2006.01)

(21) Application number: **12173893.4**

(22) Date of filing: **30.03.2006**

(54) **Apparatus and method for encoding multi-view video using camera parameters, apparatus and method for generating multi-view video using camera parameters, and recording medium storing program for implementing the methods**

Vorrichtung und Verfahren zum Codieren von Mehrfachansichts-Video unter Verwendung von Kameraparametern, Vorrichtung und verfahren zum erzeugen von Mehrfachansichts-Video unter Verwendung von Kameraparametern und ein Programm zum Implementieren der Verfahren Speicherndes Aufzeichnungsmedium

Appareil et procédé pour l'encodage de video multivue au moyen de parametres de camera, appareil et procédé pour la generation de video multivue au moyen de parametres de camera, et support d'enregistrement stockant un programme pour la mise en oeuvre desdits procedes

(84) Designated Contracting States:
DE FR GB HU NL

(30) Priority: **31.03.2005 KR 20050027011**

(43) Date of publication of application:
03.10.2012 Bulletin 2012/40

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
06732735.3 / 1 864 508

(73) Proprietors:
• **Samsung Electronics Co., Ltd.**
Suwon-si, Gyeonggi-do, 443-742 (KR)
• **Industry-academia Cooperation**
Group Of Sejong University
Seoul 143-747 (KR)

(72) Inventor: **Lee, Yung-Lyul**
Seoul (KR)

(74) Representative: **Davies, Robert Ean**
Appleyard Lees
15 Clare Road
Halifax
Yorkshire HX1 2HY (GB)

(56) References cited:

- **OHM J-R: "STEREO/MULTIVIEW VIDEO ENCODING USING THE MPEG FAMILY OF STANDARDS", PROCEEDINGS OF SPIE, SPIE, US, vol. 3639, 25 January 1999 (1999-01-25), pages 242-255, XP008022007, ISSN: 0277-786X, DOI: 10.1117/12.349385**
- **GARY SULLIVAN ET AL: "Draft Amendments 3 and 4 (multi-view profile and ITU extension data) to Recommendation H.262 ISO/IEC IS-13818-2 (MPEG-2)", 2. VCEG MEETING; 08-09-1997 - 11-09-1997; SUNRIVER, OREGON,US; (VIDEOCODING EXPERTS GROUP OF ITU-T SG. 16),, no. q15b19, 25 August 1997 (1997-08-25), XP030002658, ISSN: 0000-0474**
- **"STEREOSCOPIC TELEVISION MPEG-2 MULTI-VIEW PROFILE", , 1 January 1998 (1998-01-01), pages 1-7, XP55034056, DOI: http://www.itu.int/dms_pub/itu-r/opb/rep/R-REP-BT.2017-1998-PDF-E.pdf Retrieved from the Internet: URL:http://www.itu.int/dms_pub/itu-r/opb/rep/R-REP-BT.2017-1998-PDF-E.pdf [retrieved on 2012-07-27]**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 506 582 B1

Description**Technical Field**

[0001] The present invention relates to encoding and decoding video, and more particularly, to encoding multi-view video using camera parameters and generating multi-view video using camera parameters.

Background Art

[0002] Video encoding using the Moving Picture Experts Group Layer 4 (MPEG-4) and H.264 standards involves encoding video captured by a camera and focuses mainly on an increase in the efficiency of encoding. However, in the fields of realistic communications or virtual reality, a scene is captured by several cameras to form a three-dimensional (3D) multi-view video. Thus, a method of effectively compress-encoding and reproducing a multi-view video that is formed is necessary.

[0003] A conventional multi-view encoding method is disclosed in U.S. Patent Application Publication No. 2004/0027452A1.

[0004] XP008022007 discloses an overview of techniques that ISO Moving Pictures Experts Group (MPEG) has defined in the MPEG-2 and MPEG-4 standards, or that can be applied in the context of these standards. Section 2.1 discloses the MPEG-2 multiview profile which defines a syntax extension for MPEG-2, which provides the ability to encode parameters of the acquisition cameras, like orientation, position, size of image plane and focal length.

Disclosure of Invention**Technical Problem**

[0005] However, conventional methods of compress-encoding and reproducing video are related to compress-encoding and reproducing video taken by a camera, and therefore it is difficult to apply such methods to multi-view video.

Technical Solution

[0006] The present invention provides a method for generating multi-view video using camera parameters as defined by the claims.

[0007] The present invention also provides a computer readable recording medium storing a program for executing the above methods.

[0008] According to one aspect of the present invention, there is provided a method of encoding multi-view video, the method including receiving a plurality of video data from at least one multi-view camera; determining whether each of the plurality of the video data which is received includes camera parameters in predetermined video units; and adaptively encoding each of the plurality

of the video data in the predetermined

Advantageous Effects

[0009] As described above, according to aspects of the present invention, video is adaptively encoded according to whether the video has the camera parameters and whether the camera parameters are reliable, thereby increasing the efficiency of video compression. Also, intermediate-view frames are adaptively generated according to camera parameter information included in an input bitstream, thereby improving the quality of video to be displayed.

Description of Drawings

[0010] The above and other aspects of the present invention will become more apparent by describing in detail exemplary embodiments thereof with reference to the attached drawings in which:

FIG. 1 illustrates positions of cameras for obtaining multi-view video;

FIG. 2 illustrates videos captured by a plurality of cameras according to time;

FIG. 3 is a diagram illustrating spatial-temporal prediction coding used in exemplary embodiments of the present invention;

FIG. 4 is a block diagram of an apparatus for encoding multi-view video according to an exemplary embodiment of the present invention;

FIG. 5 is a flowchart illustrating a method of encoding multi-view video according to an exemplary embodiment of the present invention;

FIG. 6 is a block diagram of an apparatus for encoding multi-view video according to another exemplary embodiment of the present invention;

FIG. 7 is a flowchart illustrating a method of encoding multi-view video according to another exemplary embodiment of the present invention;

FIG. 8 is a block diagram of an apparatus for decoding multi-view video according to an exemplary embodiment of the present invention;

FIG. 9 is a diagram illustrating a method of generating intermediate-view video according to an exemplary embodiment of the present invention;

FIG. 10 is a diagram illustrating a method of generating intermediate-view video according to another exemplary embodiment of the present invention; and

FIG. 11 is a flowchart illustrating a method of decoding multi-view video using an apparatus for decoding the multi-view video according to an exemplary embodiment of the present invention.

Mode for Invention

[0011] Hereinafter, exemplary embodiments of the present invention will be described in detail with refer-

ence to the accompanying drawings.

[0012] FIG. 1 illustrates positions of a plurality of cameras installed for receiving and encoding multi-view video in a one-dimensional line. In exemplary embodiments of the present invention, it is assumed that cameras are installed in a two-dimensional (2D) arrangement along an i-axis and a j-axis. However, a case where cameras are installed one-dimensionally, i.e., when $i = 0$, will first be described.

[0013] FIG. 2 is a coordinate system used to organize frames captured by a plurality of cameras according to time. In FIG. 2, a frame captured by a predetermined camera at a predetermined instant of time is indicated with $f(i,j,t)$. Here, i and j denote positions of a camera, and t denotes time. Referring to FIGS. 1 and 2, the cameras are installed in a one-dimensional line, that is, $i = 0$ for all of the cameras. For instance, $f(0,0,0)$ denotes a first frame captured by a central camera.

[0014] FIG. 3 is a diagram illustrating spatial-temporal prediction coding used in exemplary embodiments of the present invention. Referring to FIG. 3, frame $f(0,0,2)$, which is a frame captured by the central camera can be encoded with reference to adjacent frames $f(0,-1,2)$, $f(0,-1,1)$, $f(0,0,1)$, $f(0,1,1)$, and $f(0,1,2)$. The spatial-temporal prediction coding allows more frames to be referred to during the coding, thereby improving the quality of a reproduced video.

[0015] FIG. 4 is a block diagram of an apparatus for encoding multi-view video according to an exemplary embodiment of the present invention. The apparatus includes a camera parameters detector 420, a multi-view video encoder 440, and a camera parameter information inserting unit 460.

[0016] The camera parameters detector 420 detects camera characteristics information, e.g., camera parameter information, regarding each frame from video data received from a plurality of cameras. The camera parameters may be divided into intrinsic parameters and extrinsic parameters.

[0017] The intrinsic parameters include a focal length, a principal point, pixel width and height, a skew angle, the numbers of horizontal and vertical pixels on a camera sensor, a radial distortion coefficient, and a tangential distortion coefficient. The extrinsic parameters include location information of a camera, such as the coordinates of the camera in a world coordinate system, and a radian or an angle on coordinates x , y , and z .

[0018] The camera parameters detector 420 detects whether each frame of the input multi-view video has the camera parameters and transmits the result of detection to the multi-view video encoder 440.

[0019] Since some of the plurality of cameras forming the multi-view video may not transmit the camera parameters, whether the camera parameters exist must be determined. When video input from a camera does not have the camera parameters, it is impossible to interpolate multi-view video (i.e., intermediate-view video) using the input video when encoding adjacent videos.

[0020] For example, referring to FIG. 3, if a frame $f(0,0,1)$ has the camera parameters but a frame $f(0,-1,1)$ does not have the camera parameters, it is impossible to interpolate a frame $f(0,-1/2,1)$ between the frames $f(0,0,1)$ and $f(0,-1,1)$. In this case, when a frame $f(0,-2,1)$ has the camera parameters, the frame $f(0,-1/2,1)$ must be interpolated using the frames $f(0,0,1)$ and $f(0,-2,1)$.

[0021] Determining whether the camera parameters exist in each video may also be useful for encoding video data, which will later be described.

[0022] Accordingly, a process of detecting whether the camera parameters exist in each of the videos input from n cameras used to capture multi-view video is required.

[0023] In the present exemplary embodiment, it is assumed that the camera parameters are included in slice headers in units of slices of input video, and whether the camera parameters are included in the slice header of the input video is determined. Alternatively, the camera parameters may be included in a position other than the slice header of the input video in units of other than slices, e.g., in units of macro blocks.

[0024] The multi-view video encoder 440 encodes each input frame according to whether there is camera parameter information of each input frame. For instance, when all the frames $f(0,-1,1)$, $f(0,0,1)$, and $f(0,1,1)$ illustrated in FIG. 3 have the camera parameters, the frame $f(0,0,1)$ can be reproduced by interpolation using a decoder (not shown) based on the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$. Thus, it is possible to skip compressing the frame $f(0,0,1)$, skip transmitting the result of compressing the frame $f(0,0,1)$, or to compress and transmit difference data obtained from a difference between the frame $f(0,0,1)$ and an interpolation frame $f(0,0,1)$ obtained by interpolating the frame $f(0,0,1)$ using the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$.

[0025] According to the present exemplary embodiment, it is possible to selectively skip compressing multi-view video that can be interpolated by the decoder, skip transmitting the compressed video, or to compress and transmit a difference between a current frame and interpolation video, thereby increasing the efficiency of video compression without degrading video quality.

[0026] The camera parameter information inserting unit 460, which may additionally be included in the present exemplary embodiment, inserts the camera parameter information that indicates whether each video has the camera parameters, into a predetermined point of a bitstream encoded by the multi-view video encoder 440.

[0027] According to the present exemplary embodiment, the camera parameter information is a 1-bit Camera_Parameter_Existing_Flag that is inserted as a syntax element into a slice header of each video in units of slices. The encoded bitstream into which the camera parameter information is inserted is transmitted to the decoder.

[0028] Alternatively, it is possible to insert the camera

parameter information in units of macro blocks, and transmit the camera parameter information as additional information separated from information regarding the video.

[0029] FIG. 5 is a flowchart illustrating a method of encoding multi-view video using the apparatus of FIG. 4 according to an exemplary embodiment of the present invention. Referring to FIG. 5, a plurality of video data are received from an at least one multi-view camera (operation 520).

[0030] Next, whether a current frame and adjacent frames have camera parameters is determined (operation 540).

[0031] Next, adaptive encoding is performed on a current frame according to whether the current frame and the adjacent frames have the camera parameters (operation 560). If the current frame does not have the camera parameters, the current frame is encoded for compression. If the current frame has the camera parameters, then whether the adjacent frames have the camera parameters is determined. When the adjacent videos have the camera parameters, adaptive encoding is performed on the current frame on the basis of the adjacent frames using the multi-view video encoder 440.

[0032] Next, information indicating whether the camera parameters exist in an adjacent frame is added to the encoded current frame (operation 580). Operation 580 is optional.

[0033] Operations 560 and 580 will now be described in greater detail with reference to FIG. 3. If the current frame $f(0,0,1)$ and the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$ illustrated in FIG. 3 have the camera parameters, the camera parameters of the current frame $f(0,0,1)$ are transmitted without encoding the current frame $f(0,0,1)$. A camera parameter flag indicating that the current frame $f(0,0,1)$ has the camera parameters is inserted into a bitstream, e.g., into a slice header, to be transmitted. In this case, the current frame $f(0,0,1)$ is reproduced by decoding the current frame $f(0,0,1)$ using its camera parameters, the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$, and the camera parameters of the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$.

[0034] Alternatively, when the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$ have the camera parameters, only the camera parameters of the current frame $f(0,0,1)$, and a difference between the current frame $f(0,0,1)$ and interpolation frame $f(0,0,1)$ obtained by interpolating the current frame $f(0,0,1)$ using the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$ are transmitted. Similarly, a camera parameter flag indicating that the camera parameters of the current frame $f(0,0,1)$ exist is inserted into a bitstream to be transmitted. In this case, the current frame $f(0,0,1)$ is reproduced by decoding the current frame $f(0,0,1)$ using its camera parameters, the difference and the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$ and their camera parameters.

[0035] When only one of the frames closest to the current frame has the camera parameters, it is possible to

transmit only the camera parameters of the current frame $f(0,0,1)$ without encoding the current frame $f(0,0,1)$. In this case, when reproducing the current frame $f(0,0,1)$, the current frame $f(0,0,1)$ is decoded using its camera parameters, the closest frame having the camera parameters, and the camera parameters of the closest videos. Further, the current frame $f(0,0,1)$ can be reproduced using a nearby frame, e.g., frame $f(0,-1,2)$, which has the camera parameters and is close to an adjacent frame that does not have the camera parameters, and the camera parameter of the nearby frame. The current frame $f(0,0,1)$ may be reproduced based on the frame $f(0,-1,2)$ when the frame $f(0,-1,2)$ is a P frame and the current frame $f(0,0,1)$ is a B frame based on the frame $f(0,-1,2)$.

[0036] FIG. 6 is a block diagram of an apparatus for encoding multi-view video according to another exemplary embodiment of the present invention. The apparatus includes a camera parameters detector 620, a camera parameter reliability determination unit 640, a multi-view video encoder 660, and a camera parameter information inserting unit 680.

[0037] The operation of the camera parameters detector 620 is the same as that of the camera parameters detector 420 of FIG. 4.

[0038] The camera parameter reliability determination unit 640 determines whether the camera parameters of a frame are reliable when the camera parameters are determined to exist in the frame by the camera parameters detector 620. In the present exemplary embodiment, when camera zooming and panning are used in capturing the video, the camera parameters of the video are determined to be unreliable. Alternatively, the reliability of the camera parameters may be determined by predetermined conditions, e.g., camera tilting, a change in camera position, and a change in a focal length, in addition to camera zooming and panning.

[0039] If all the frames $f(0,-1,1)$, $f(0,0,1)$, and $f(0,1,1)$ have reliable camera parameters, the frame $f(0,0,1)$ can be reproduced by a decoder by interpolation using the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$. Therefore, the frame $f(0,0,1)$ may not be encoded, the result of encoding the frame $f(0,0,1)$ may not be transmitted, or the frame $f(0,0,1)$ and difference between the frame $f(0,0,1)$ and the interpolation frame $f(0,0,1)$ obtained by interpolating the frame $f(0,0,1)$ using the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$ may be encoded and transmitted. In this case, even if the frame $f(0,0,1)$ is not transmitted, the camera parameters of the frame $f(0,0,1)$ must be transmitted to the decoder to reproduce the frame $f(0,0,1)$.

[0040] On the other hand, if all the frames $f(0,-1,1)$, $f(0,0,1)$, and $f(0,1,1)$ have the camera parameters but the camera parameters are not reliable for frame $f(0,-1,1)$ due to use of camera zooming or panning, for example, in capturing frame $f(0,-1,1)$, frame $f(0,0,1)$ cannot be reproduced from the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$ by the decoder. Accordingly, the frame $f(0,0,1)$ must be compressed and transmitted, or a difference between the frame $f(0,0,1)$ and the interpolation frame $f(0,0,1)$,

which is obtained by interpolating the frame $f(0,0,1)$ using the adjacent frames $f(0,1,1)$ and $f(0,-1,2)$, must be compressed and transmitted. This is because an interpolation frame obtained by interpolating a frame using frames whose camera parameters are not reliable due to camera panning may distort an image.

[0041] As described above, the multi-view video encoder 660 performs adaptive encoding on input video according to whether the camera parameters exist, which is determined by the camera parameters detector 620, and the reliability of the camera parameters, which is determined by the camera parameter reliability determination unit 640.

[0042] The camera parameter information insertion unit 680, which is optional, divides 2-bit camera parameter information of each frame (i.e.,

[0043] Camera_Parameter_Existing_Flag indicating whether the camera parameters exist and Guaranteed_Camera_Parameter_Flag regarding the reliability of the camera parameters) into two 1-bit information values, and inserts the two bits as a syntax element into a slice header of each video to be transmitted in units of slices. Alternatively, the 2-bit camera parameter information may be inserted into the slice header in units of macro blocks or transmitted as additional information separately from the video.

[0044] FIG. 7 is a flowchart illustrating a method of encoding multi-view video using the apparatus of FIG. 6 according to an exemplary embodiment of the present invention. Referring to FIG. 6, a plurality of video data are received from at least one multi-view camera (operation 710).

[0045] Next, whether a current frame and adjacent frames have the camera parameters is determined (operation 720).

[0046] Next, when it is determined that the current frame and the adjacent frames have the camera parameters (operation 730), the method proceeds to operation 740. If it is determined in operation 730 that either the current video or the adjacent frames do not have the camera parameters, the method proceeds to operation 750.

[0047] Next, whether the camera parameters of the current frame and the adjacent frames are reliable is determined (operation 740).

[0048] Next, adaptive encoding is performed on the current frame according to the results of operations 720 and 740 (operation 750). For instance, when either the current frame or the adjacent frames do not have the camera parameters, the current video is encoded.

[0049] Referring to FIG. 3, when all the current frame $f(0,0,1)$ and the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$ have reliable camera parameters, only the camera parameters of the current frame $f(0,0,1)$ are transmitted without being encoded. In this case, when reproducing the current frame $f(0,0,1)$, the current frame $f(0,0,1)$ is decoded using its camera parameters, the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$, and their camera parameters.

[0050] When all the frames $f(0,-1,1)$, $f(0,0,1)$, and $f(0,1,1)$ have camera parameters but the camera parameters of the frame $f(0,-1,1)$ are not reliable due to camera zooming or panning when capturing the frame $f(0,-1,1)$, a decoder cannot reproduce the frame $f(0,0,1)$ from the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$. Therefore, the frame $f(0,0,1)$ must be compressed and transmitted, or a difference between the frame $f(0,0,1)$ and interpolation frame $f(0,0,1)$ obtained by interpolating the frame $f(0,0,1)$ using the adjacent frames $f(0,1,1)$ and $f(0,-1,2)$ is compressed and transmitted.

[0051] Next, the camera parameter information specifying whether the camera parameters exist and are reliable is inserted into the encoded video data (operation 760). Operation 760 is optional.

[0052] If it is determined in operation 720 that the current frame has camera parameters but it is determined in operation 740 that the camera parameters are not reliable, a camera parameter flag indicating that the camera parameters of the current frame exist but are not reliable is inserted into a slice header of an encoded bitstream. In the present exemplary embodiment, the camera parameter information indicating whether the camera parameters exist and are reliable is inserted as a 2-bit flag into a slice header in units of slices.

[0053] FIG. 8 is a block diagram of an apparatus for decoding multi-view video according to an exemplary embodiment of the present invention. The apparatus includes a bitstream reproducing and camera parameters extracting unit 820 and a multi-view video generating unit 840.

[0054] The bitstream reproducing and camera parameters extracting unit 820 determines whether each video has camera parameters while reproducing frames of input bitstreams. In the present exemplary embodiment, whether each video has the camera parameters is determined using 1-bit camera parameter information (i.e., Camera_Parameter_Existing_Flag) which is inserted into a slice header of each frame. The camera parameters are determined to exist when the Camera_Parameter_Existing_Flag is '1', and determined not to exist when the Camera_Parameter_Existing_Flag is '0'.

[0055] The multi-view video generating unit 840 generates multi-view video, and interpolation video at each point in time, e.g., at an intermediate view, based on the camera parameter information extracted by the bitstream reproducing and camera parameters extracting unit 820.

[0056] For example, referring to FIG. 3, when only the frames $f(0,-1,1)$ and $f(0,1,1)$ have the camera parameters, an encoder does not transmit data regarding the frame $f(0,0,1)$ or transmits only a difference between the frame $f(0,0,1)$ and an interpolation frame $f(0,0,1)$ obtained by interpolating the frame $f(0,0,1)$ using the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$. In this case, the frame $f(0,0,1)$ is reproduced using its camera parameters, the adjacent frames $f(0,-1,1)$ and $f(0,1,1)$, and their camera parameters.

[0057] A situation where the Camera_Parameter_Existing_Flag of each of the input frames $f(0,0,0)$, $f(0,0,1)$, and $f(0,-1,0)$ is '1' and the Camera_Parameter_Existing_Flag of the frame $f(0,-1,1)$ is '0', (i.e., when the frames $f(0,0,0)$, $f(0,0,1)$, and $f(0,-1,0)$ have the camera parameters but the video $(0,-1,1)$ does not have camera parameters) will now be described with reference to FIG. 9.

[0058] Referring to FIG. 9, when an intermediate-view frame $f(0,0,1/2)$ between frames $f(0,0,1)$ and $f(0,0,0)$ is to be interpolated, the multi-view video generating unit 840 checks the camera parameter flags of the frames $f(0,0,1)$ and $f(0,0,0)$, and interpolates the intermediate-view frame $f(0,0,1/2)$ using the frames $f(0,0,1)$ and $f(0,0,0)$ only when both the camera parameter flags are '1'. In this case, since both the camera parameter flags are assumed to be '1', the intermediate-view frame $f(0,0,1/2)$ can be generated based on the frames $f(0,0,1)$ and $f(0,0,0)$.

[0059] Since the flag of the camera parameter of the frame $f(0,-1,1)$ is '0', i.e., the camera parameters of the frame $f(0,-1,1)$ do not exist, intermediate-view frame $f(0,-1,1/2)$ between frames $f(0,-1,1)$ and $f(0,-1,0)$ is interpolated using only the frame $f(0,-1,0)$. Otherwise, if the flag of the camera parameters of the frame $f(0,-1,2)$ has the value of '1', the intermediate view frame $f(0,-1,1/2)$ is generated using the frames $f(0,-1,0)$ and $f(0,-1,2)$.

[0060] To generate an intermediate-view frame $f(0,-1/2,1/2)$ among the frames $f(0,-1,1)$, $f(0,0,1)$, $f(0,0,0)$, and $f(0,-1,0)$, the multi-view video generating unit 840 checks the flags of the camera parameters of the frames $f(0,-1,1)$, $f(0,0,1)$, $f(0,0,0)$, and $f(0,-1,0)$ and interpolates the intermediate-view frame $f(0,-1/2,1/2)$ using the frames $f(0,-1,1)$, $f(0,0,1)$, $f(0,0,0)$, and $f(0,-1,0)$ which have the camera parameter flags set to be '1'. In present exemplary embodiment, the flag of the camera parameters of the frame $f(0,-1,1)$ is '0', that is, the camera parameters of the frame $f(0,-1,1)$ does not exist, and thus, the intermediate-view frame $f(0,-1/2,1/2)$ is interpolated using the frames $f(0,0,1)$, $f(0,0,0)$, and $f(0,-1,0)$.

[0061] Multi-view video is generated by the multi-view video generating unit 840, and intermediate-view videos that are selectively generated are transmitted to and displayed on a display unit (not shown).

[0062] As described above, according to an exemplary embodiment of the present invention, intermediate-view frame is adaptively generated according to whether each frame has camera parameters, thereby improving the quality of the intermediate view frame.

[0063] An apparatus for decoding multi-view video according to another exemplary embodiment of the present invention will now be described with reference to FIG. 8. Referring FIG. 8, the bitstream reproducing and camera parameters extracting unit 820 determines whether each frame has camera parameters while reproducing frames included in an input bitstream. In the present exemplary embodiment, whether each frame has camera parameters and whether the camera parameters are reliable are

determined according to 2-bit parameter information (i.e., Camera_Parameter_Existing_Flag and Guaranteed_Camera_Parameter_Flag) which is included in a slice header of each frame.

[0064] The multi-view video generating unit 840 generates multi-view video, and selectively generates intermediate-view interpolation video based on the camera parameter information detected by the bitstream reproducing and camera parameters extracting unit 820.

[0065] Referring to FIG. 3, when the frames $f(0,-1,1)$ and $f(0,1,1)$ have reliable camera parameters and the frame $f(0,0,1)$ is not transmitted, a decoder reproduces the frame $f(0,0,1)$ using reliable videos (e.g., the frames $f(0,-1,1)$ and $f(0,1,1)$, which are adjacent to the frame $f(0,0,1)$ and have the camera parameters) the camera parameters of the reliable videos, and the camera parameters of the frame $f(0,0,1)$.

[0066] If the frames $f(0,-1,1)$ and $f(0,1,1)$ have camera parameters but the camera parameters of the frame $f(0,-1,1)$ are not reliable, and difference data obtained from a distance between the frame $f(0,0,1)$ and an interpolation frame $f(0,0,1)$ obtained by interpolating the frame $f(0,0,1)$ using the frames $f(0,-2,1)$ and $f(0,1,1)$ is transmitted, the frame $f(0,0,1)$ is reproduced using the difference data, data of the frames $f(0,-2,1)$ and $f(0,1,1)$, the camera parameters of the frames $f(0,-2,1)$ and $f(0,1,1)$, and the camera parameters of the frame $f(0,0,1)$.

[0067] A situation in which the Camera_Parameter_Existing_Flag and the Camera_Parameter_Existing_Flag of each of the frames $f(0,0,0)$, $f(0,-1,0)$ and $f(0,0,1)$ are each '1', and those of the frame $f(0,-1,1)$ are respectively '1' and '0' (i.e., when the frames $f(0,0,0)$, $f(0,-1,0)$, and $f(0,0,1)$ have reliable camera parameters and the frame $f(0,-1,1)$ has unreliable camera parameters) will now be described with reference to FIG. 10.

[0068] Referring to FIG. 10, when interpolating an intermediate-view frame $f(0,0,1/2)$ between the frames $f(0,0,1)$ and $f(0,0,0)$, the multi-view video generating unit 840 checks the flags of the camera parameters of the frames $f(0,0,1)$ and $f(0,0,0)$, and interpolates the intermediate-view frame $f(0,0,1/2)$ using the frames $f(0,0,1)$ and $f(0,0,0)$ only when both the flags are '1'. Since both the flags are '1' in FIG. 10, the intermediate-view frame $f(0,0,1/2)$ can be generated using the frames $f(0,0,1)$ and $f(0,0,0)$.

[0069] An intermediate-view frame $f(0,-1,1/2)$ between the frames $f(0,-1,1)$ and $f(0,-1,0)$ is interpolated using only the frame $f(0,-1,0)$, since the camera parameter flags of the frame $f(0,-1,1)$ are '1' and '0', respectively (i.e., the camera parameters of the frame $f(0,-1,1)$ exist but are not reliable). If the camera parameter flags of the frame $f(0,-1,2)$ are both '1', the intermediate-view frame $f(0,-1,1/2)$ is obtained using the frames $f(0,-1,0)$ and $f(0,-1,2)$.

[0070] To obtain an intermediate-view frame $f(0,-1/2,1/2)$ among the frames $f(0,-1,1)$, $f(0,0,1)$, $f(0,0,0)$, and $f(0,-1,0)$, the multi-view video generating unit 840 checks the camera parameter flags of the frames $f(0,-1,1)$,

$f(0,0,1)$, $f(0,0,0)$, and $f(0,-1,0)$ and interpolates the intermediate-view frame $f(0,-1/2,1/2)$ using the frames which have both camera parameter flags set to '1'. Referring to FIG. 10, since the values of the camera parameter flags of the frame $f(0,-1,1)$ are respectively '1' and '0', that is, the camera parameters exist but are not reliable, the intermediate-view frame $f(0,-1/2,1/2)$ is interpolated using the frames $f(0,0,1)$, $f(0,0,0)$, and $f(0,-1,0)$.

[0071] Multi-view video generated and intermediate-view frames selectively generated by the multi-view video generating unit 840 are transmitted to and displayed on a display unit (not shown).

[0072] FIG. 11 is a flowchart illustrating a method of decoding multi-view video using the apparatus of FIG. 8 according to an exemplary embodiment of the present invention. Referring to FIG. 11, camera parameter information of each frame is extracted from input bitstreams in predetermined units of video (operation 1120).

[0073] Next, video is generated based on the camera parameter information extracted in operation 1120 (operation 1140).

[0074] In the present exemplary embodiment, reference frames to be used in interpolating the generated frames are determined according to the extracted camera parameter information. Next, the generated frames are interpolated by the multi-view video generating unit 840 using the reference frames.

[0075] According to an exemplary embodiment of the present invention, when the camera parameter information indicates only whether frames have the camera parameters, only frames that are adjacent to the frame to be interpolated and have camera parameters are used as reference frames when interpolating the frame.

[0076] Alternatively, when the camera parameter information indicates whether each frame has camera parameters and whether the camera parameters are reliable, only frames that are adjacent to the frame to be interpolated and have reliable camera parameters are used as reference frames when interpolating the video.

[0077] The methods of encoding and decoding multi-view video may be embodied as computer programs. Computer programmers skilled in the art can easily derive code and code segments of the computer program. The computer program may be stored in a computer readable medium. When the computer program is read and executed using a computer, a method of encoding and decoding multi-view video is performed. The computer readable medium may be a magnetic recording medium, an optical recording medium, or a carrier wave.

[0078] As described above, according to aspects of the present invention, video is adaptively encoded according to whether the video has the camera parameters and whether the camera parameters are reliable, thereby increasing the efficiency of video compression. Also, intermediate-view frames are adaptively generated according to camera parameter information included in an input bitstream, thereby improving the quality of video to be displayed.

Industrial Applicability

[0079] The present invention can be applied to encoding and decoding video, and more particularly, to encoding multi-view video using camera parameters and generating multi-view video using camera parameters.

Claims

1. A method of generating multi-view video using camera parameter information, comprising:

receiving input bitstreams comprising camera parameter information of each of a plurality of videos, wherein the camera parameter information comprises a flag which indicates a presence of camera parameters in each of the plurality of videos,

extracting camera parameter information of each of the plurality of videos from input bitstreams in predetermined video units; and generating the multi-view video based on the camera parameter information which is extracted, wherein the camera parameters comprises intrinsic camera characteristics comprising a focal length and a principal point, wherein the flag being equal to 1 indicates the presence of camera parameters and the flag being equal to 0 indicates the absence of camera parameters.

2. The method of claim 1, wherein the generating of the multi-view video comprises determining a reference video for generating the multi-view video based on the camera parameter information which is extracted; and generating the multi-view video using the reference video which is determined.
3. The method of claim 1, wherein the camera parameter information comprises a flag which indicates whether the camera parameters are reliable.
4. The method of claim 1, wherein the camera parameters comprise at least one of a width and a height of a pixel, a skew angle, numbers of horizontal and vertical pixels of a camera sensor, a radial distortion coefficient, and a tangential distortion coefficient.
5. The method of claim 1, wherein the input bitstreams comprise the camera parameter information which indicates whether the camera parameters are reliable.
6. The method of claim 1, wherein the predetermined video units are units of slices, the camera parameter information, which indicates whether the camera pa-

rameters exist and whether the camera parameters are reliable, is inserted as two-bit information into a slice header of each input bitstream.

meraparameterinformationen, die angeben, ob die Kameraparameter existieren und ob die Kameraparameter zuverlässig sind, als Zwei-Bit-Informationen in einen Slice-Header jedes Eingangsbitstroms eingefügt werden.

Patentansprüche

1. Verfahren zum Erzeugen eines Mehransichts-Videos unter Verwendung von Kameraparameterinformationen, umfassend:

Empfangen von Eingangsbitströmen, die Kameraparameterinformationen für jedes mehrerer Videos umfassen, wobei die Kameraparameterinformationen ein Flag umfassen, das eine Anwesenheit von Kameraparametern in jedem der mehreren Videos angibt, Extrahieren von Kameraparameterinformationen jedes der mehreren Videos aus Eingangsbitströmen in vorbestimmten Videoeinheiten; und Erzeugen des Mehransichts-Videos auf der Basis der Kameraparameterinformationen, die extrahiert werden; wobei die Kameraparameter, innere Kamerakenngrößen umfassen die eine Brennweite und einen Hauptpunkt umfassen, wobei, wenn das Flag gleich 1 ist, es die Anwesenheit von Kameraparametern angibt und, wenn das Flag gleich 0 ist, es die Abwesenheit von Kameraparametern angibt.

2. Verfahren nach Anspruch 1, wobei das Erzeugen des Mehransichts-Videos Bestimmen eines Referenzvideos zum Erzeugen des Mehransichts-Videos auf der Basis der extrahierten Kameraparameterinformationen umfasst; und Erzeugen des Mehransichts-Videos unter Verwendung des bestimmten Referenzvideos.
3. Verfahren nach Anspruch 1, wobei die Kameraparameterinformationen ein Flag umfassen, das angibt, ob die Kameraparameter zuverlässig sind.
4. Verfahren nach Anspruch 1, wobei die Kameraparameter mindestens einen der Folgenden umfassen: eine Breite und eine Höhe eines Pixels, einen Schräglagewinkel, Anzahlen horizontaler und vertikaler Pixel eines Kamerasensors, einen Radialverzerrungskoeffizienten und einen Tangentialverzerrungskoeffizienten.
5. Verfahren nach Anspruch 1, wobei die Eingangsbitströme die Kameraparameterinformationen umfassen, die angeben, ob die Kameraparameter zuverlässig sind.
6. Verfahren nach Anspruch 1, wobei die vorbestimmten Videoeinheiten Einheiten von Slices sind, die Ka-

Revendications

1. Procédé consistant à générer une vidéo à vues multiples en utilisant des informations de paramètres de caméra, consistant à :
recevoir des flux binaires d'entrée comprenant des informations de paramètres de caméra de chacune d'une pluralité de vidéos, dans lequel les informations de paramètres de caméra comprennent un indicateur qui indique la présence de paramètres de caméra dans chacune de la pluralité de vidéos, extraire des informations de paramètres de caméra de chacune de la pluralité de vidéos à partir des flux binaires d'entrée dans des unités vidéo prédéterminées; et générer la vidéo à vues multiples sur la base des informations de paramètres de caméra qui sont extraites ; dans lequel les paramètres de caméra comprennent des caractéristiques de caméra intrinsèques comprenant une longueur focale et un point principal, dans lequel l'indicateur est égal à 1, il indique la présence de paramètres de caméra et lorsque l'indicateur est égal à 0, il indique l'absence de paramètres de caméra.
2. Procédé selon la revendication 1, dans lequel la génération de la vidéo à vues multiples consiste à déterminer une vidéo de référence pour générer la vidéo à vues multiples sur la base des informations de paramètres de caméra qui sont extraites ; et générer la vidéo à vues multiples en utilisant la vidéo de référence qui est déterminée.
3. Procédé selon la revendication 1, dans lequel les informations de paramètres de caméra comprennent un indicateur qui indique si les paramètres de caméra sont fiables.
4. Procédé selon la revendication 1, dans lequel les paramètres de caméra comprennent au moins l'un d'une largeur et d'une hauteur d'un pixel, un angle d'inclinaison, de nombres de pixels horizontaux et verticaux d'un capteur de caméra, un coefficient de distorsion radiale, et un coefficient de distorsion tangentielle.
5. Procédé selon la revendication 1, dans lequel les flux binaires d'entrée comprennent des informations de paramètres de caméra qui indiquent si les para-

mètres de caméra sont fiables.

6. Procédé selon la revendication 1, dans lequel les unités vidéo prédéterminées sont des unités de tranches, et les informations de paramètres de caméra qui indiquent si les paramètres de caméra existent et si les paramètres de caméra sont fiables, sont insérées sous forme d'informations à deux bits dans un en-tête de tranche de chaque flux binaire d'entrée.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

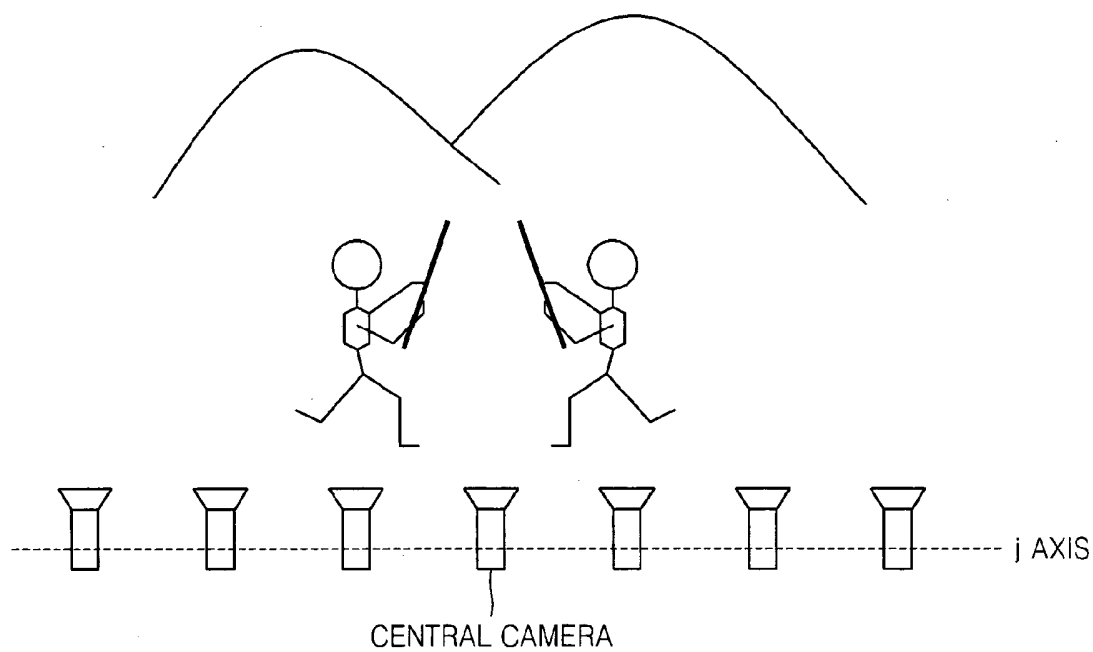


FIG. 2

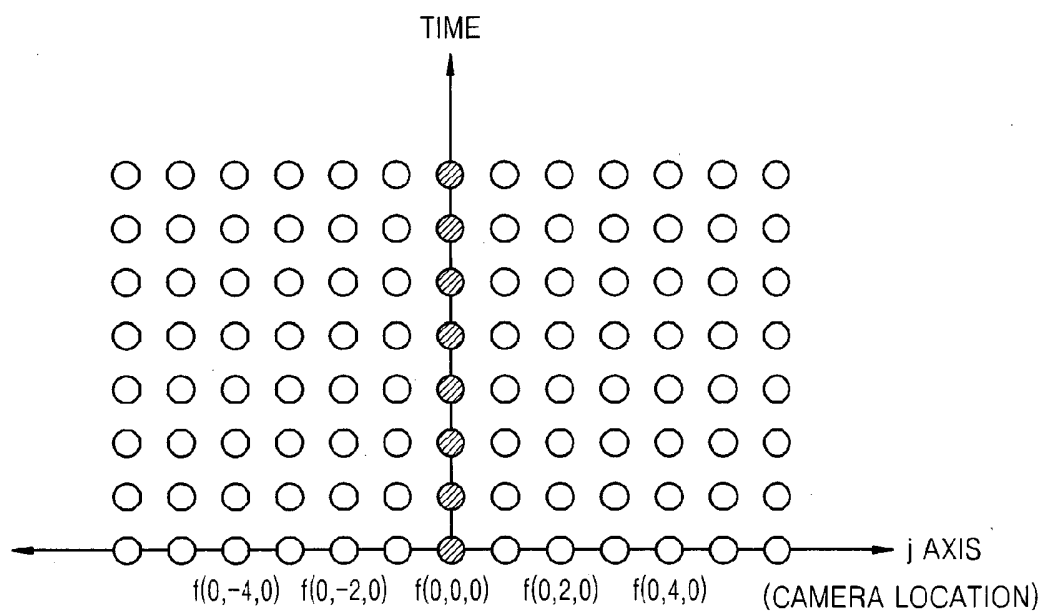


FIG. 3

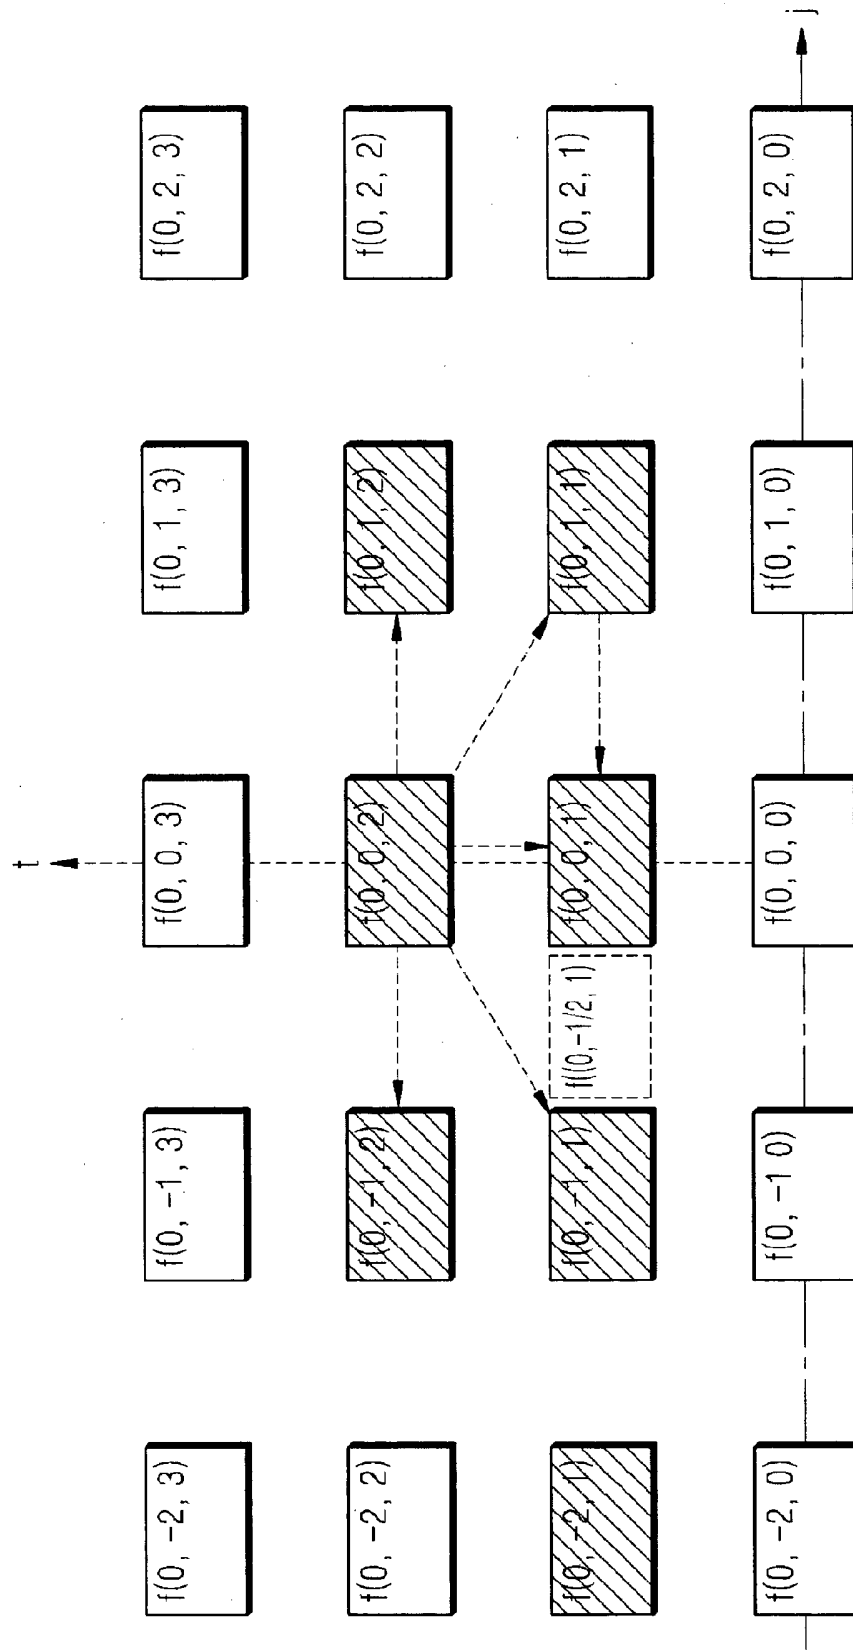


FIG. 4

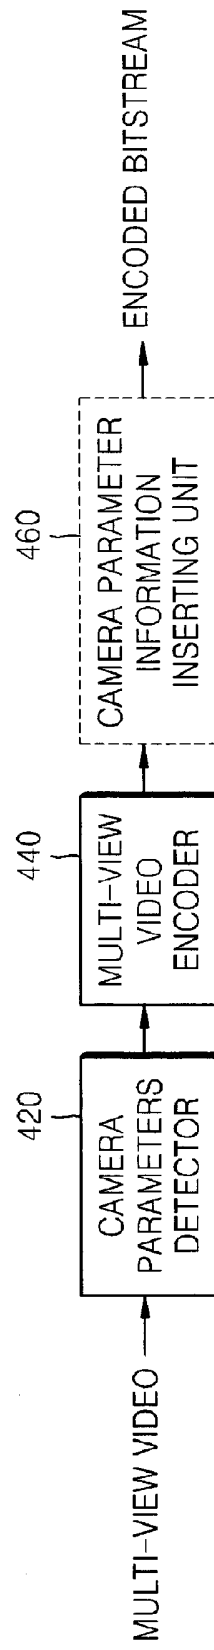


FIG. 5

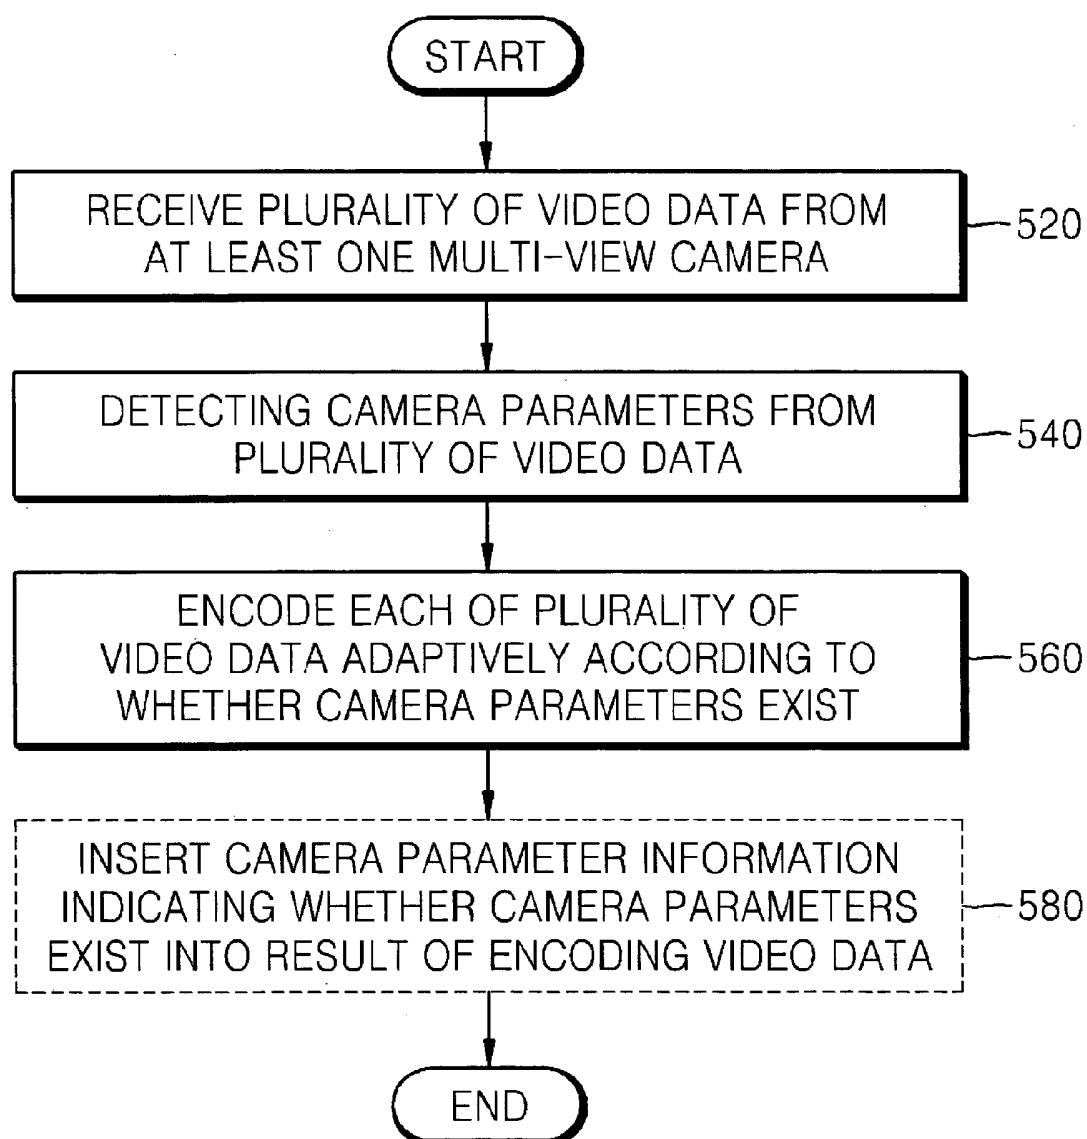


FIG. 6

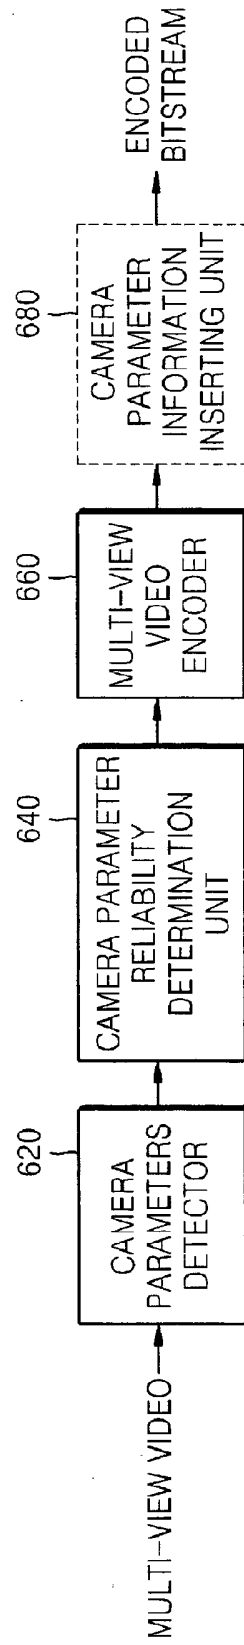


FIG. 7

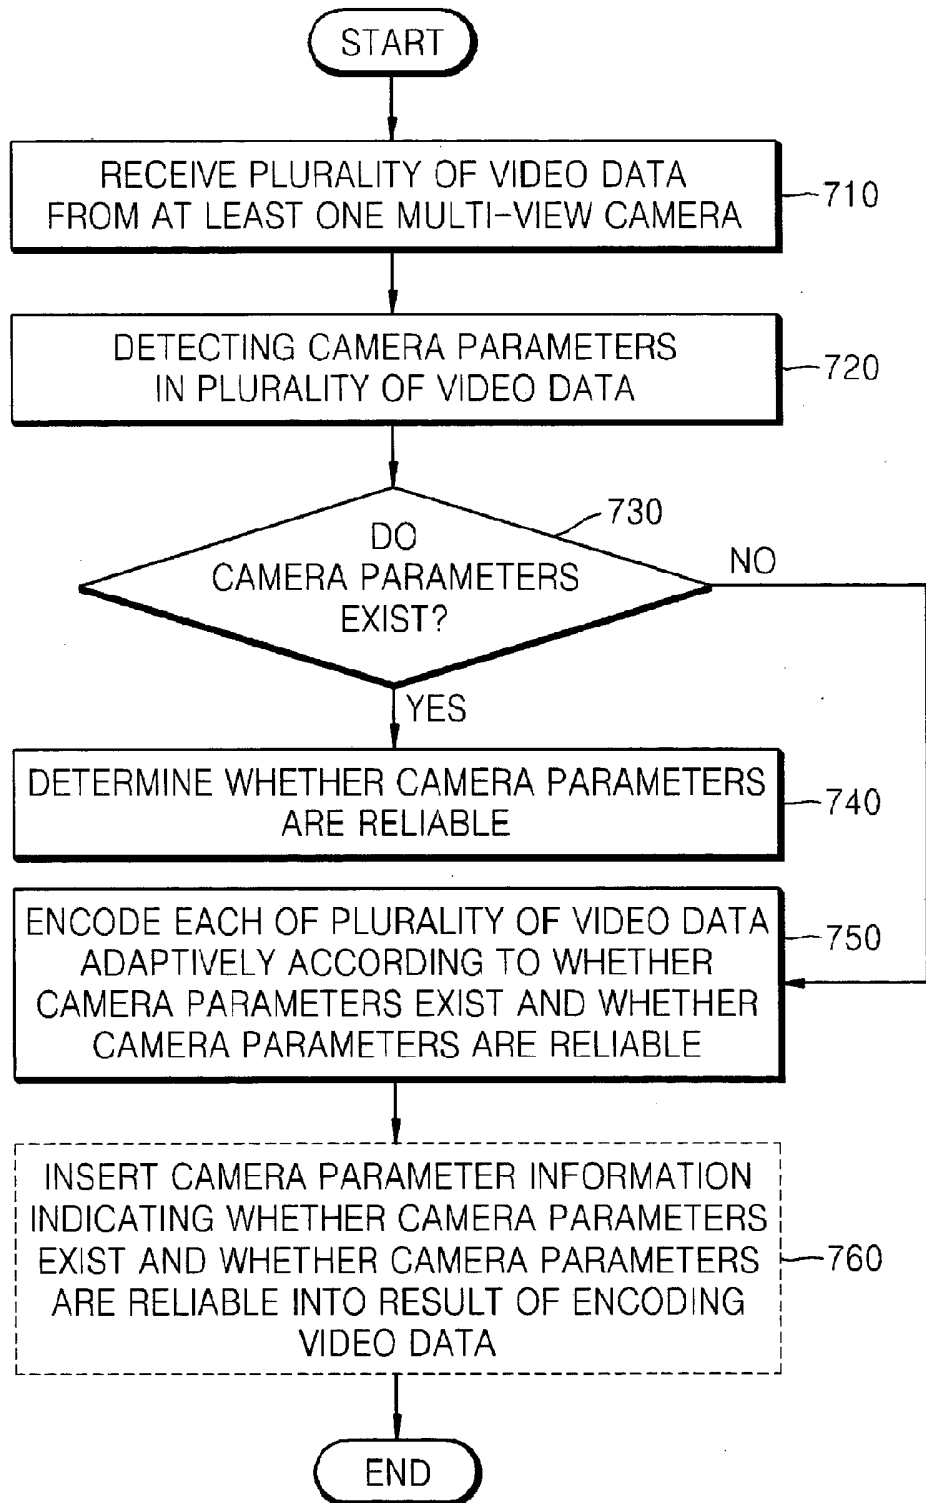


FIG. 8

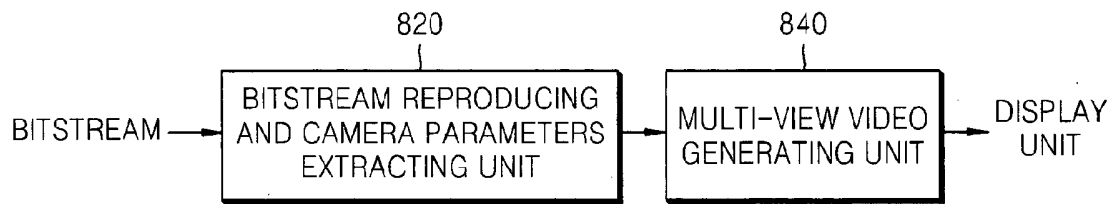


FIG. 9

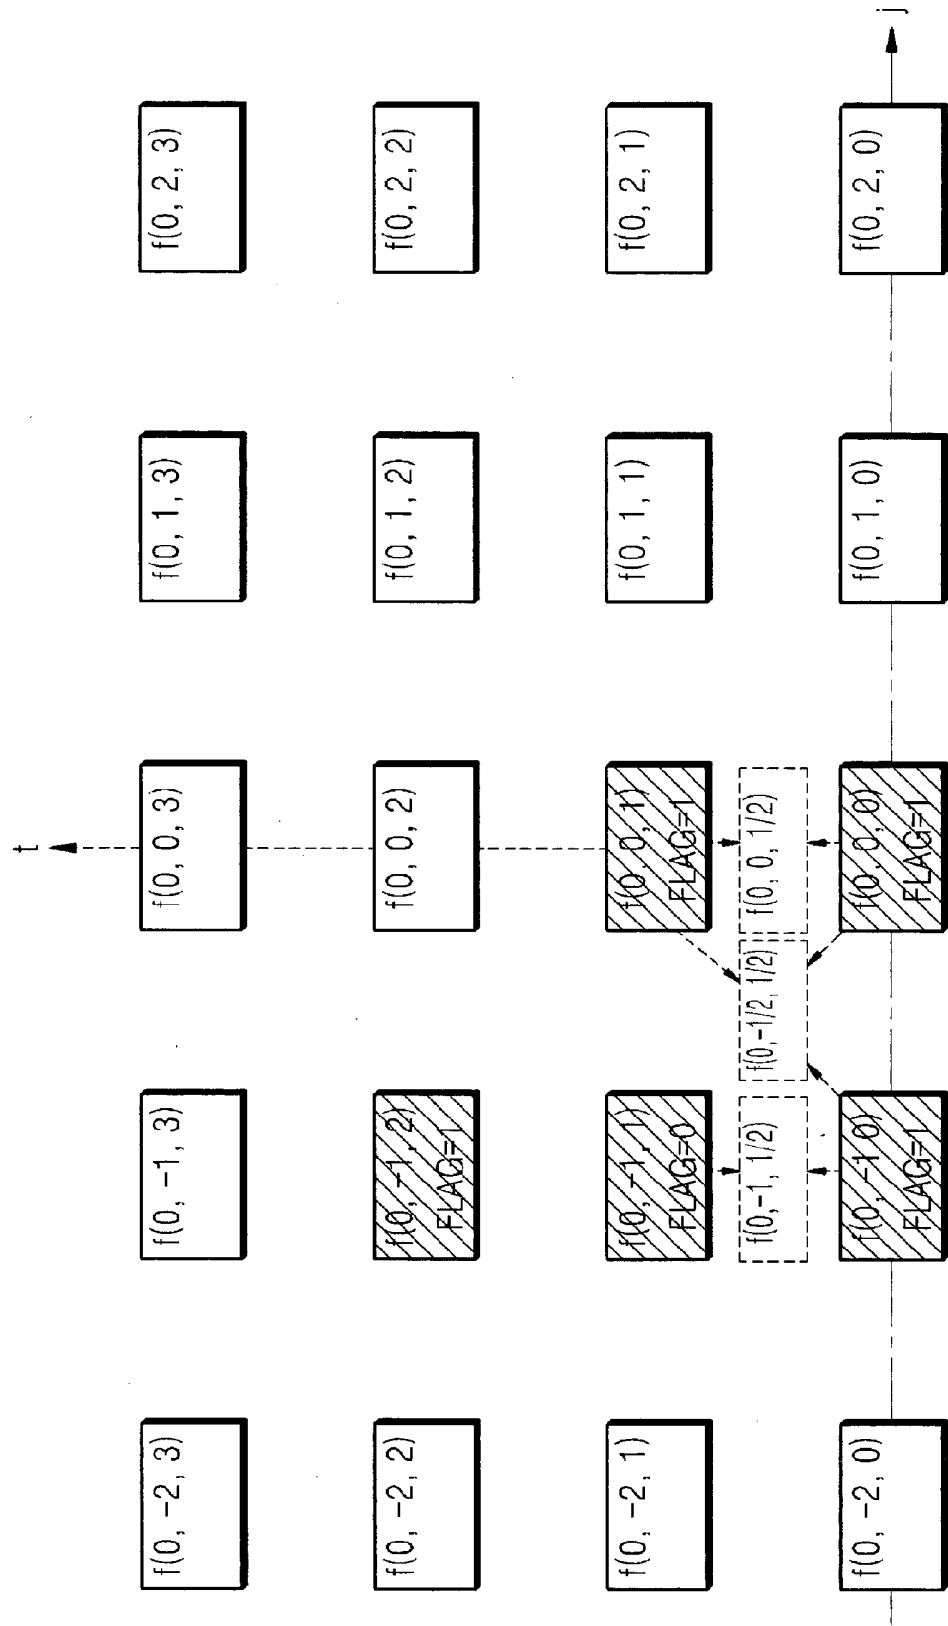


FIG. 10


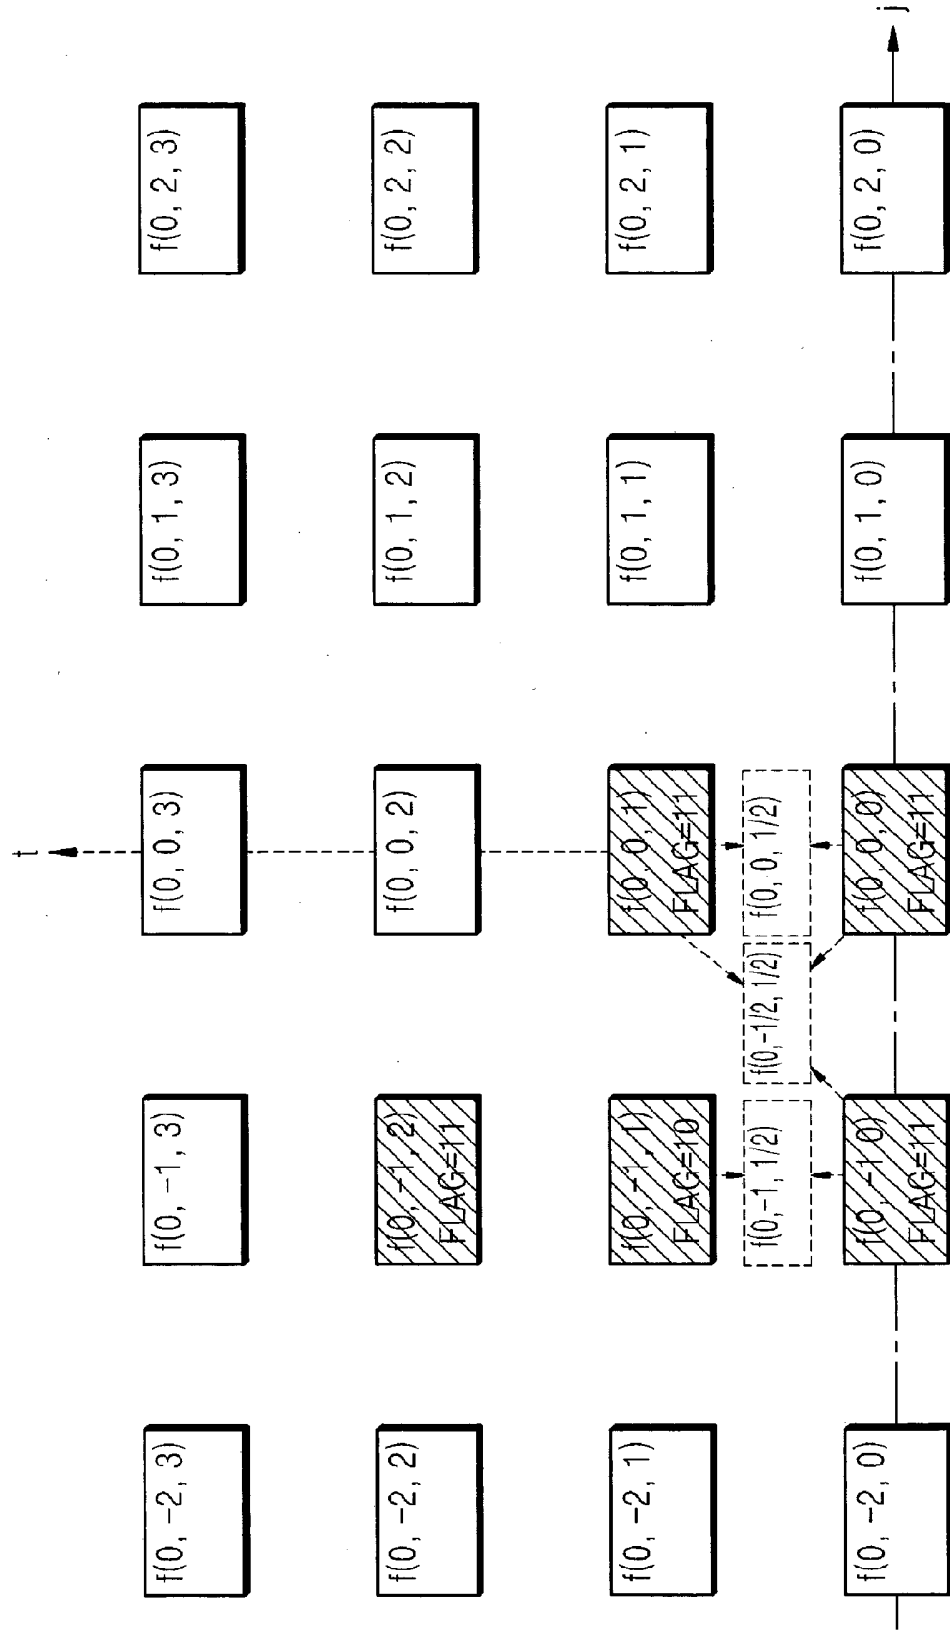


FIG. 11

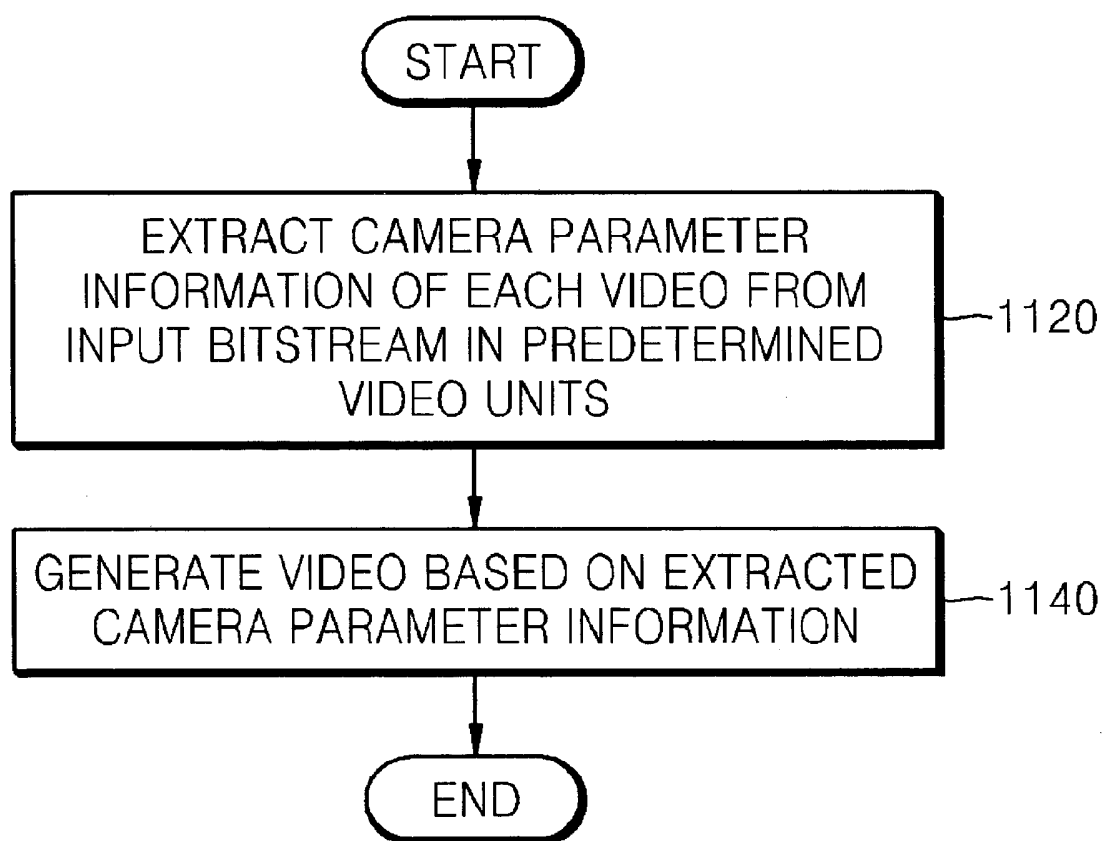

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20040027452 A1 [0003]

Berendezés és eljárás összetett nézetű (Multi-View) videó kódolására kamera paraméterek használatával, berendezés és eljárás összetett nézetű videó előállítására kamera paraméterek használatával, és az eljárások megvalósítására szolgáló programot tároló rögzítési közeg

Szabadalmi igénypontok

1. Eljárás összetett nézetű (Multi-View) videó előállítására, kamera paraméter információ használatával, az eljárás tartalmazza:

videói mindegyikére vonatkozó kamera paraméter információt tartalmazó bemeneti bitfolyamok vételét, ahol a kamera paraméter információ egy jelzőt tartalmaz, amely jelzi minden egyes videóban kamera paraméterek jelenlétét,

minden egyes videó kamera paraméter információ kivonását a bemeneti bitfolyamokból előre meghatározott videó egységekben; és

az összetett nézetű videó létrehozását a kivont kamera paraméter információ alapján, ahol a kamera paraméterek egy fókusz távolságot és egy kezdőpontot tartalmazó saját kamera jellemzőket tartalmaznak,

ahol egy 1 értékű jelző kamera paraméterek jelenlétét jelzi, és egy 0 értékű jelző kamera paraméterek hiányát jelzi.

2. Az 1. igénypont szerinti eljárás, ahol az összetett nézetű videó létrehozása magában foglalja egy referencia videó meghatározását az összetett nézetű videó előállításához a kivont kamera paraméter információ alapján; és az összetett nézetű videó létrehozását a meghatározott referencia videó felhasználásával.

3. Az 1. igénypont szerinti eljárás, ahol a kamera paraméter információ egy jelzőt tartalmaz, amely azt jelzi, hogy a kamera paraméterek megbízhatók-e.

4. Az 1. igénypont szerinti eljárás, ahol a kamera paraméterek egy képpont szélessége és magassága, egy ferdeségi szög, egy kamera szenzor vízszintes és függőleges képpontjainak száma, egy radiális torzítási együttható és egy tangenciális torzítási együttható közül legalább egyet tartalmaz.

5. Az 1. igénypont szerinti eljárás, ahol a bemeneti bitfolyamok tartalmazzák a kamera paraméter információt, amely jelzi, hogy a kamera paraméterek megbízhatók-e.

6. Az 1. igénypont szerinti eljárás, ahol az előre meghatározott videó egységek képkockákból álló egységek, és a kamera paraméter információ, amely azt jelzi, hogy a kamera paraméterek léteznek-e és hogy a kamera paraméterek megbízhatók-e, kéthítes információként van minden egyes bementi bitfolyam képkocka élőfejébe beillesztve.