



US 20030059960A1

(19) **United States**
(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0059960 A1**
Akram et al. (43) **Pub. Date: Mar. 27, 2003**

(54) **METHODS OF SEMICONDUCTOR PROCESSING**

(52) **U.S. Cl.** **438/5; 438/14; 438/18; 438/381**

(76) **Inventors: Salman Akram, Boise, ID (US); David R. Hembree, Boise, ID (US)**

(57) **ABSTRACT**

Correspondence Address:

WELLS ST. JOHN ROBERTS GREGORY & MATKIN P.S.
601 W. FIRST AVENUE
SUITE 1300
SPOKANE, WA 99201-3828 (US)

(21) **Appl. No.: 10/282,724**

(22) **Filed: Oct. 28, 2002**



Related U.S. Application Data


(60) Continuation of application No. 09/835,052, filed on Apr. 13, 2001, now Pat. No. 6,472,240, which is a division of application No. 09/389,924, filed on Sep. 3, 1999, now abandoned, which is a division of application No. 09/032,184, filed on Feb. 27, 1998.


Publication Classification



(51) **Int. Cl.⁷** **H01L 21/20; H01L 21/66; G01R 31/26; H01L 21/00**



The present invention includes electronic device workpieces, methods of semiconductor processing and methods of sensing temperature of an electronic device workpiece. In one aspect, the invention provides an electronic device workpiece including: a substrate having a surface; a temperature sensing device borne by the substrate; and an electrical interconnect formed upon the surface of the substrate, the electrical interconnect being electrically coupled with the temperature sensing device. In another aspect, a method of sensing temperature of an electronic device workpiece includes: providing an electronic device workpiece; supporting a temperature sensing device using the electronic device workpiece; providing an electrical interconnect upon a surface of the electronic device workpiece; electrically coupling the electrical interconnect with the temperature sensing device; and sensing temperature of the electronic device workpiece using the temperature sensing device.

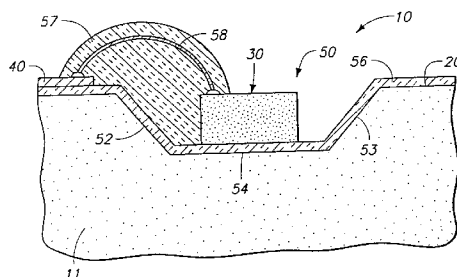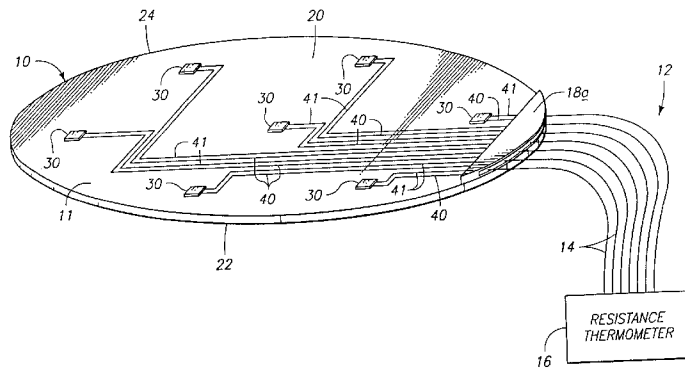



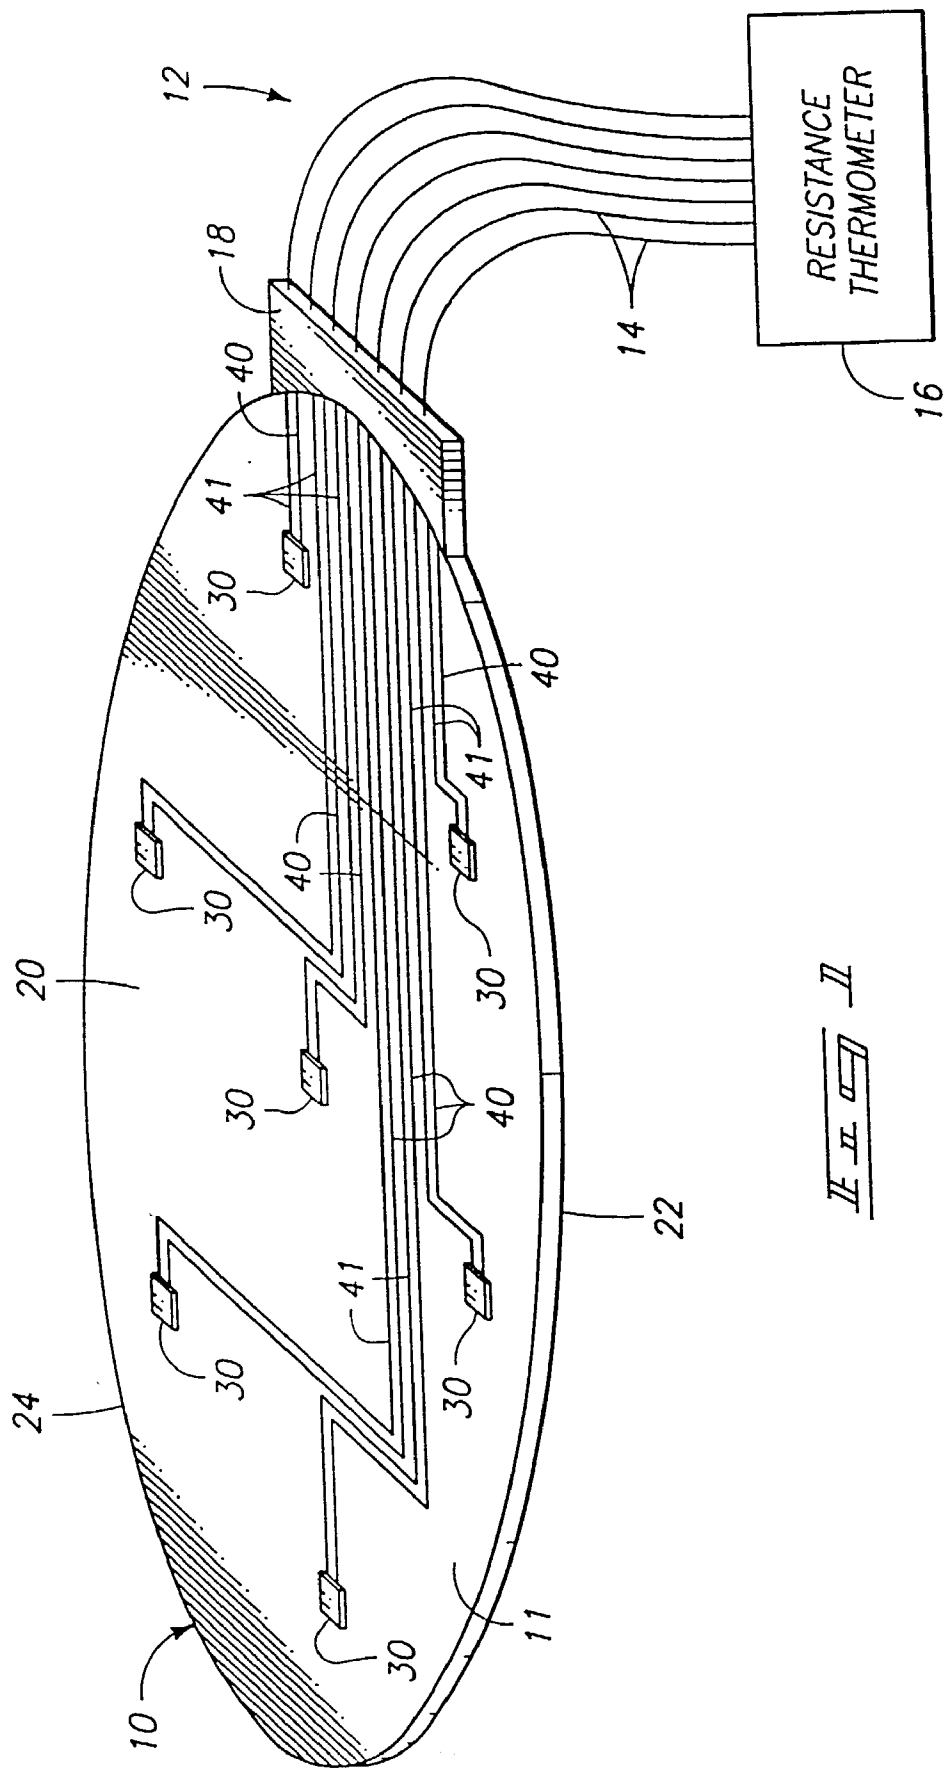


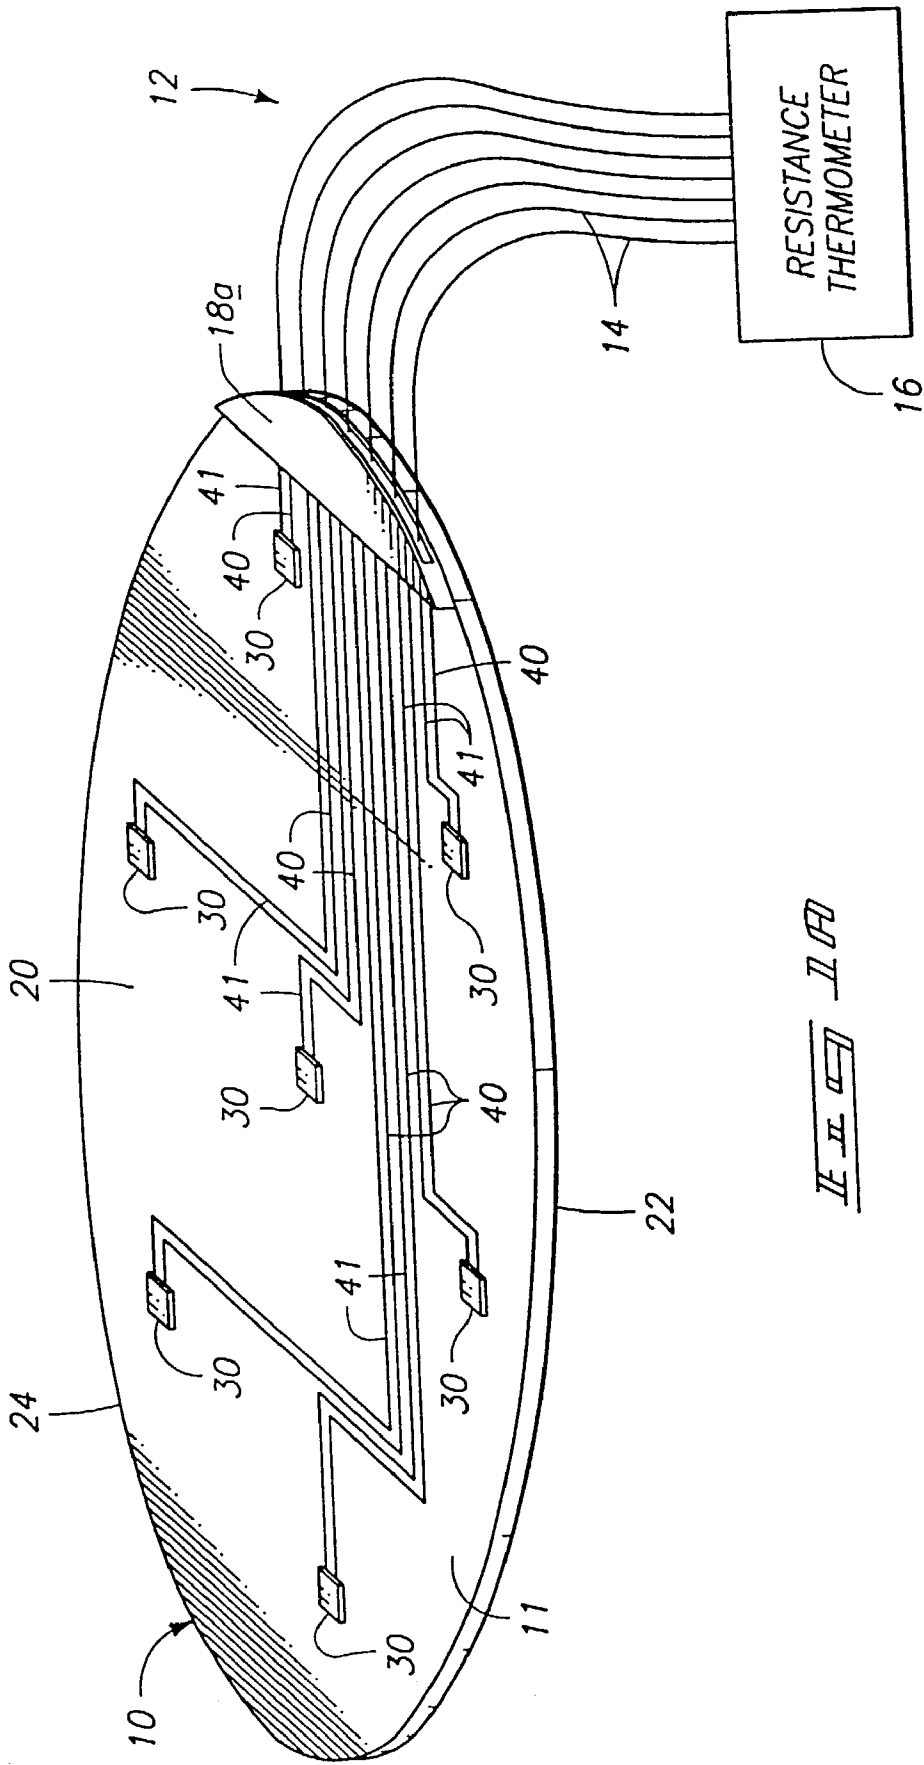

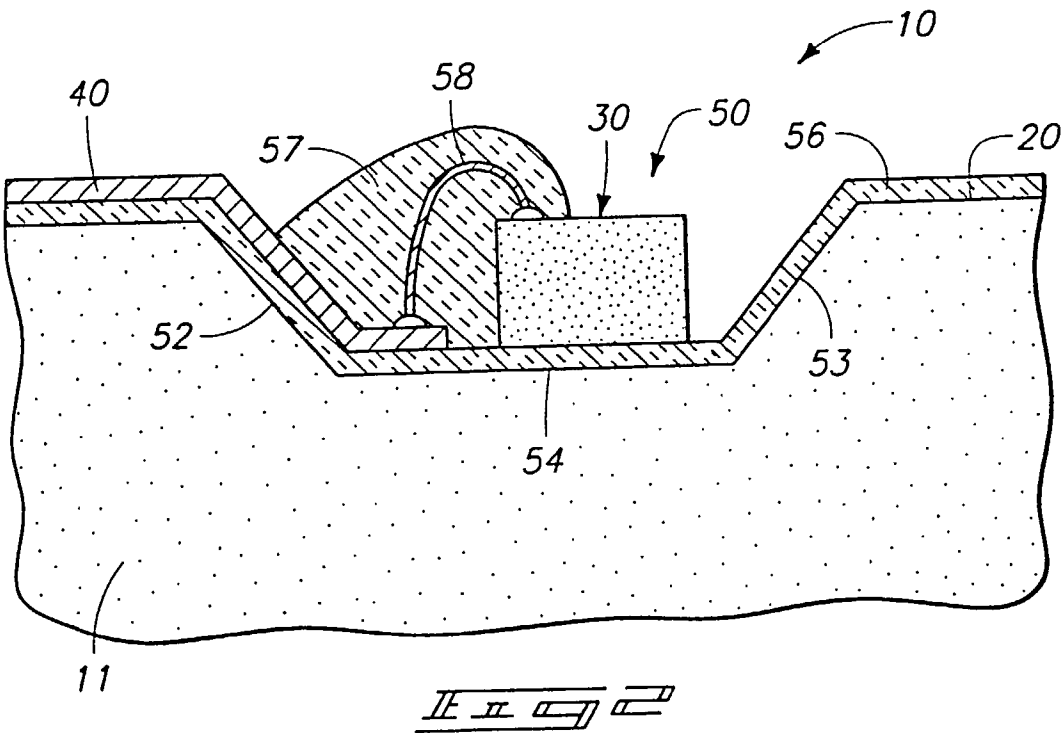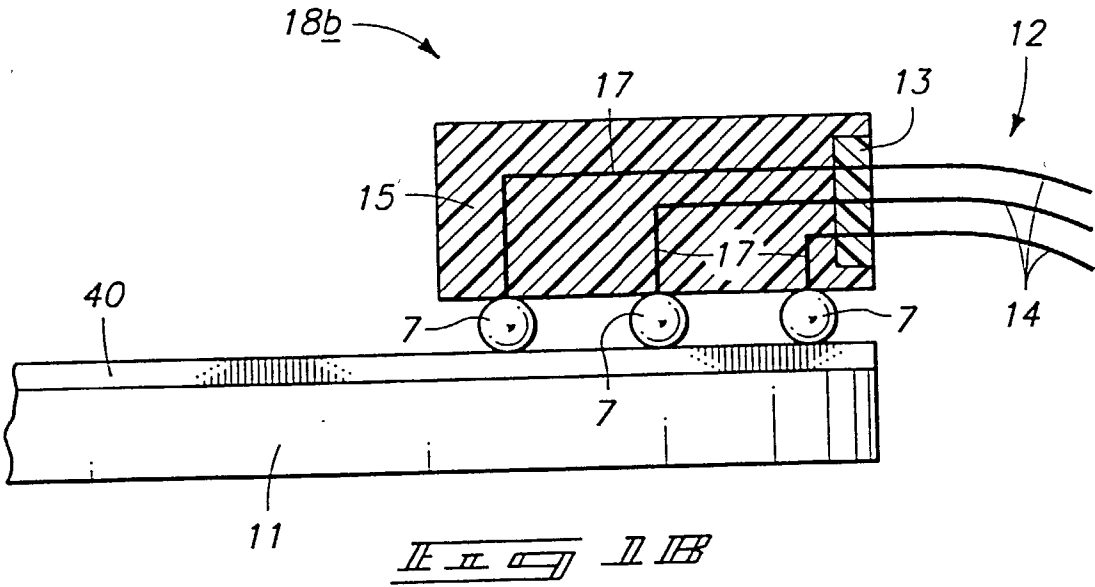

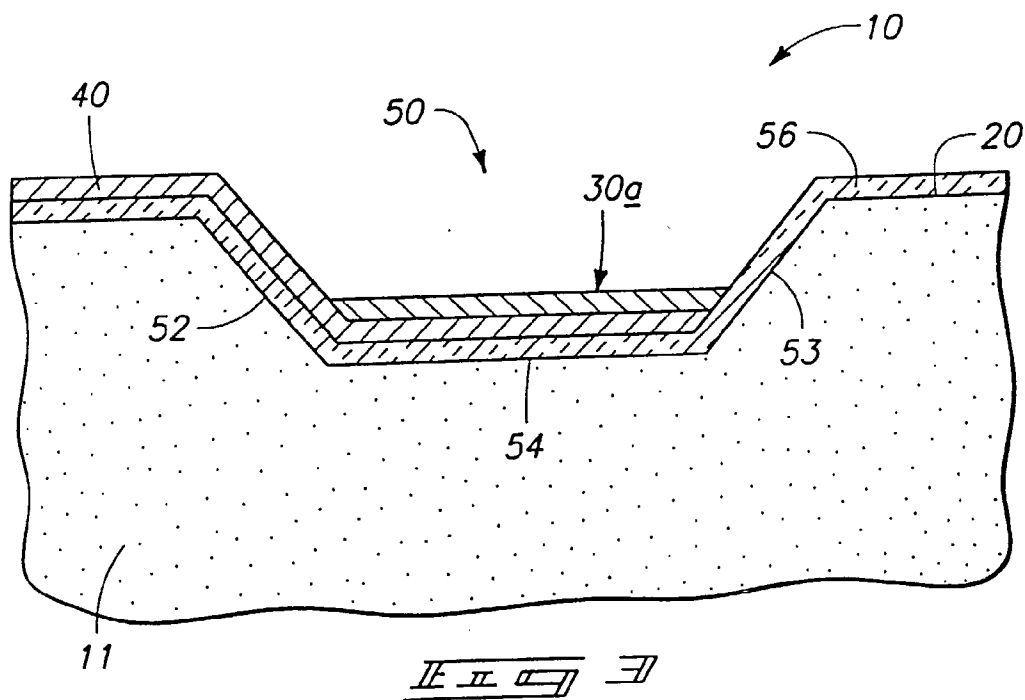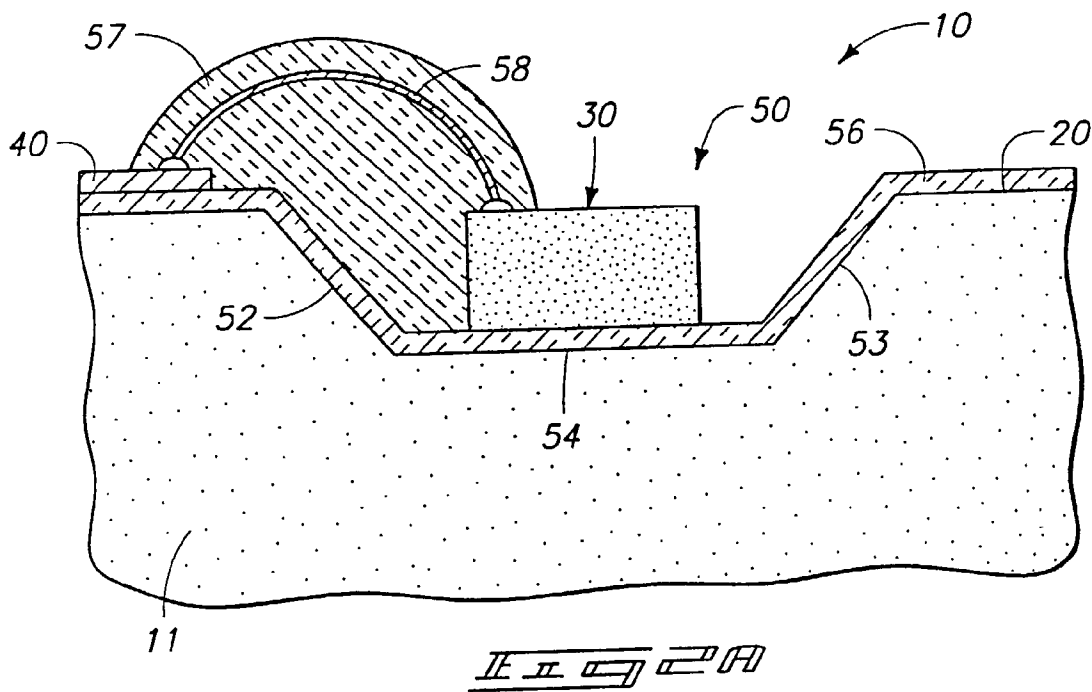

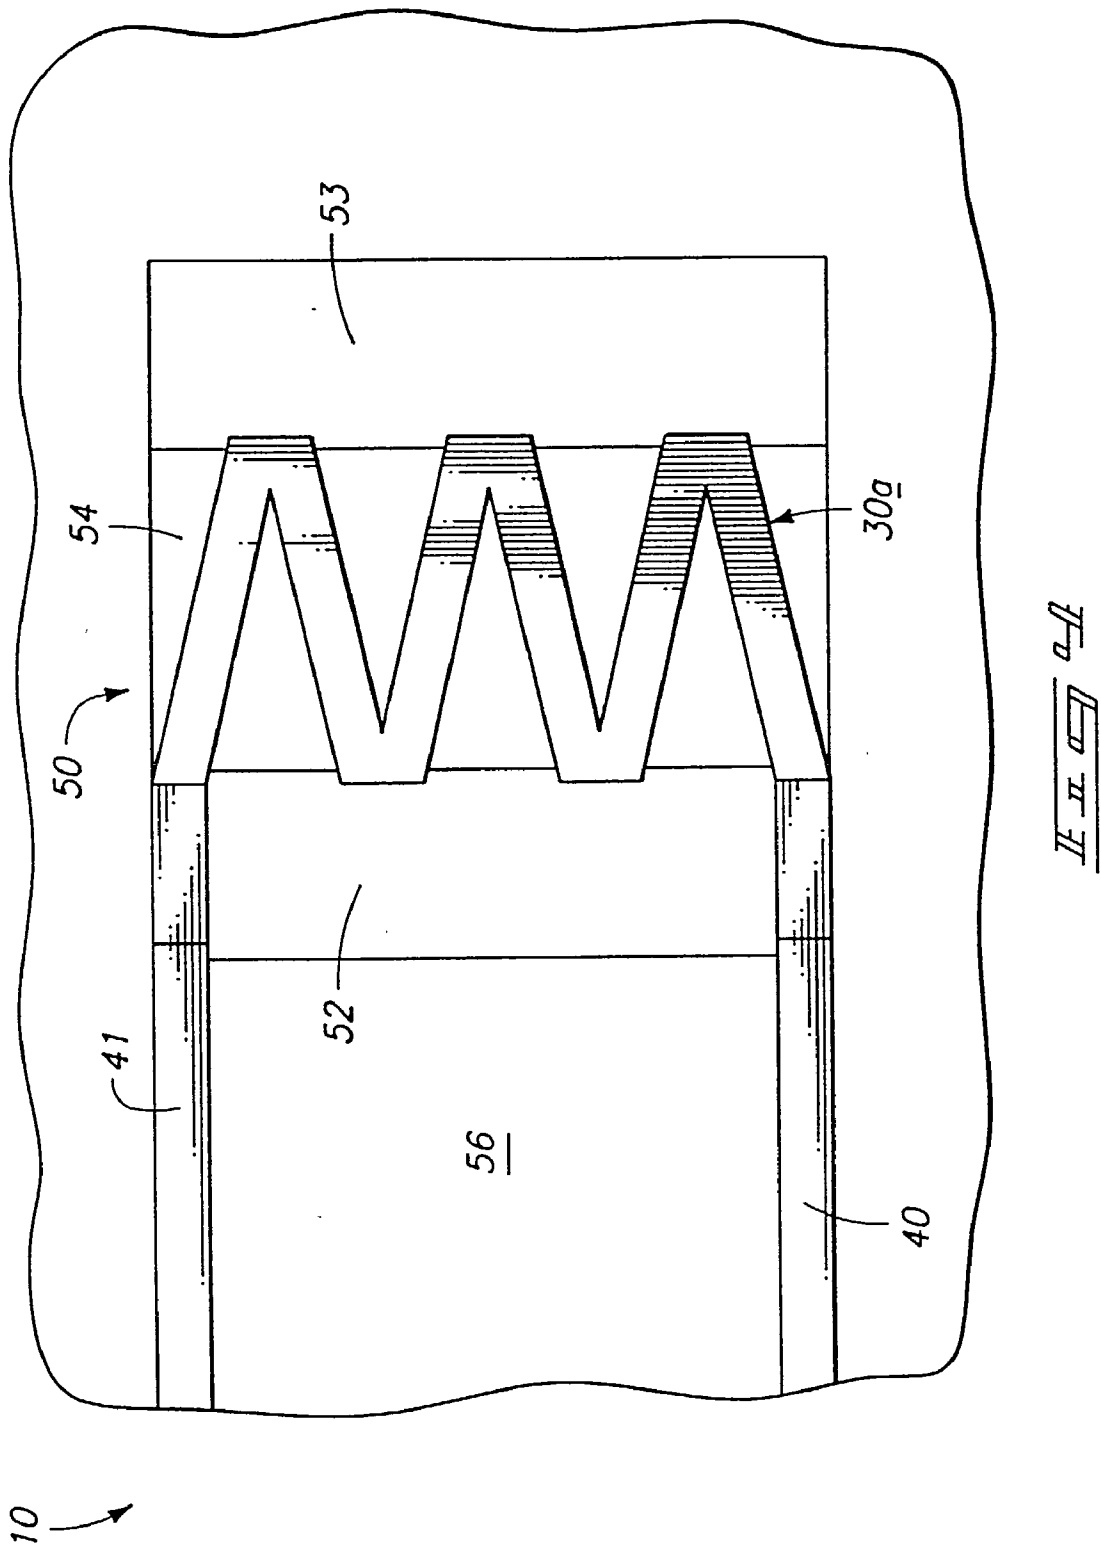

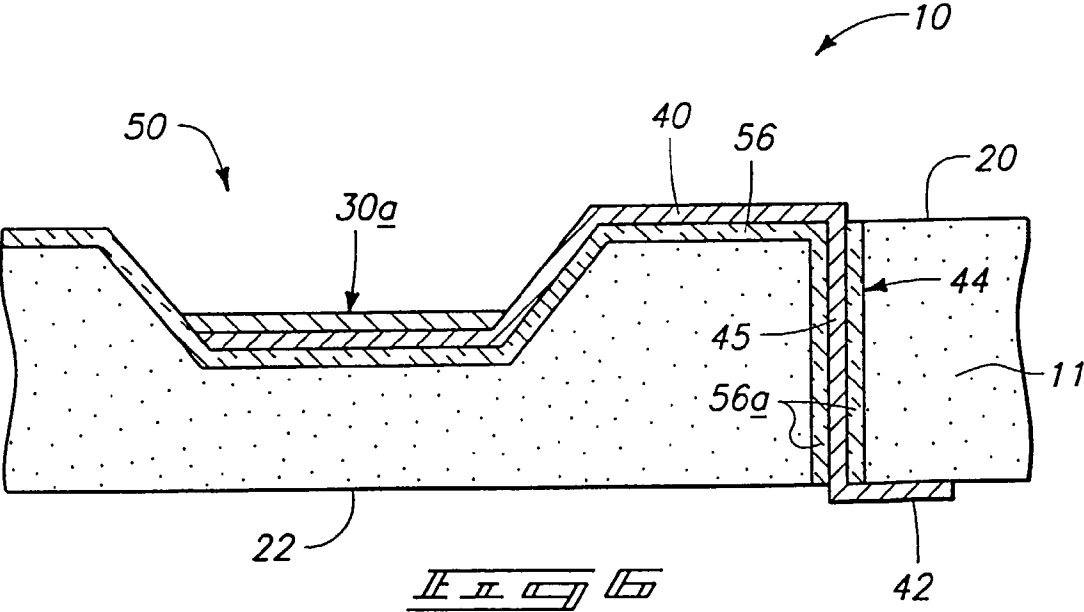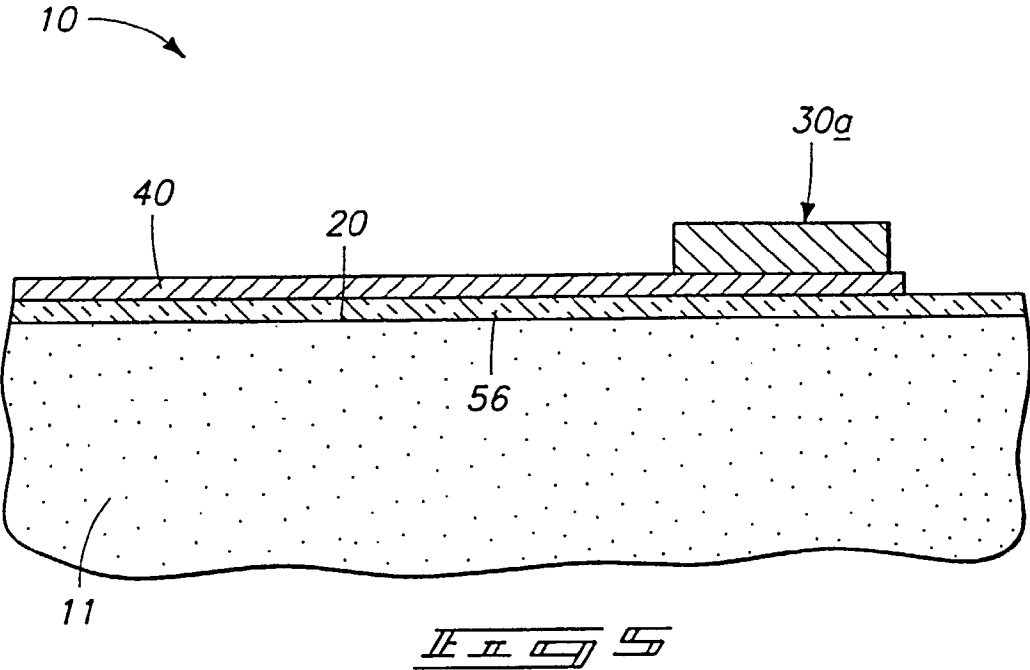

METHODS OF SEMICONDUCTOR PROCESSING

TECHNICAL FIELD

[0001] The present invention relates to electronic device workpieces, methods of semiconductor processing and methods of sensing temperature of an electronic device workpiece.

BACKGROUND OF THE INVENTION

[0002] It is preferred in the semiconductor and related arts to utilize large wafers for fabrication of integrated circuits and other devices. Large wafers are preferred inasmuch as an increased number of chips can be fabricated from larger workpieces. As the size of the wafers continues to increase as processing techniques are improved, additional processing obstacles are presented.

[0003] For example, it is typically preferred to provide a substantially constant temperature across the surface of the wafers being processed because changes in temperature can influence device fabrication. Wafers of increased diameters and surface areas experience increased temperature fluctuations at various locations on the workpiece. In particular, a partial vacuum is typically used to pull small diameter wafers into direct thermal contact with a hot plate. Such processing methods facilitate substrate temperature control because the substrate temperature is closely associated to the temperature of the hot plate. Fabrication of small sub-micron devices upon larger diameter semiconductor wafers or workpieces requires minimal backside contamination. As such, contact of the workpiece with a hot plate is not typically not possible. Such workpieces are processed in conventional operations upon spacers or pins that position the workpiece approximately 0.1 millimeters above the hot plate heating surface. Such spacing intermediate a chuck or hot plate and the workpiece results in substrate temperatures which can be influenced by the environment above the substrate. Inconsistencies in temperature across the surface of the workpiece often result.

[0004] Absolute temperature and temperature uniformity of a workpiece are parameters which are closely monitored during wafer and workpiece fabrication to provide critical dimension (CD) control. Chemically amplified resists are utilized in deep ultraviolet (DUV) lithography in 1s small micron geometries (eg., 0.25 microns and below). Chemically amplified resists are particularly temperature dependent further increasing the importance of temperature control and monitoring. Some thermal resist processing steps require process windows ranging from 1-2 degrees centigrade down to a few tenths of a degree centigrade. Metrology that is four to ten times more precise than conventional process equipment may be required to provide thermal performance measurements to 0.1 degrees centigrade.

[0005] One approach has disclosed the use of temperature sensors across a surface of the wafer to provide temperature mapping of the workpiece during processing. Platinum foil leads and copper leads are utilized to electrically connect the temperature sensors. With the use of numerous temperatures sensors across an entire workpiece surface, numerous wires are required for coupling and monitoring. Such numerous wired connections can break and/or adversely impact processing of the workpiece or the temperature measurements taken of the surface of the workpiece. Some temperature

sensors require four leads per sensor further impacting the processing and temperature monitoring of the workpieces.

[0006] Therefore, there exists a need to provide improved temperature monitoring of workpieces which overcomes the problems experienced in the prior art.

SUMMARY OF THE INVENTION

[0007] The present invention includes electronic device workpieces, methods of semiconductor processing and methods of sensing temperature of an electronic device workpiece. Exemplary electronic device workpieces include semiconductor wafers.

[0008] One electronic device workpiece includes a substrate having an upper surface and a temperature sensing device borne by the substrate. The temperature sensing device can comprise a preexisting device. Alternatively, the temperature sensing device can be formed upon a surface of the electronic device workpiece. The temperature sensing device comprises a resistance temperature device (RTD) in one embodiment. A plurality of temperature sensing devices are provided in temperature sensing relation with the electronic device workpiece in an exemplary embodiment.

[0009] An electrical interconnect is preferably provided upon the surface of the substrate. The electrical interconnect comprises a conductive trace in a preferred embodiment. The electrical interconnect is electrically coupled with the temperature sensing device. The electrical interconnect can be wire bonded to or physically coupled with the temperature sensing device. The electrical interconnect can be configured to couple the temperature sensing device with an edge of the electronic device workpiece. An interface can be provided to couple the electrical interconnects with external circuitry. Exemplary electrical circuitry includes a data gathering device, such as a digital computer.

[0010] An isolator is formed intermediate the temperature sensing device and electrical interconnect, and the substrate of the electronic device workpiece in one embodiment. The isolator provides electrical isolation. An exemplary isolator comprises silicon dioxide.

[0011] Temperature sensing devices are provided within a cavity formed within the substrate of the electronic device workpieces according to another embodiment. The cavity is preferably formed by an anisotropic etch forming sidewalls at an approximate angle of fifty-four degrees with respect to the surface of the substrate. Alternatively, temperature sensing devices are formed or positioned upon a surface of the electronic device workpiece.

[0012] The electronic device workpiece comprises a calibration workpiece in one embodiment. In another embodiment, the electronic device workpiece comprises a workpiece which undergoes processing from which subsequent devices are formed, such as a silicon wafer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Preferred embodiments of the invention are described below with reference to the following accompanying drawings.

[0014] **FIG. 1** is an isometric view of an electronic device workpiece having a plurality of temperature sensing devices.

[0015] FIG. 1A is an isometric view of an alternative electronic device workpiece.

[0016] FIG. 1B is a cross-sectional view of one configuration of an interface of the electronic device workpiece.

[0017] FIG. 2 is a cross-sectional view of a first embodiment of a temperature sensing device upon the electronic device workpiece.

[0018] FIG. 2A is a cross-sectional view of an alternative configuration of an electrical connection coupled with the temperature sensing device shown in FIG. 2.

[0019] FIG. 3 is a cross-sectional view of a second embodiment of a temperature sensing device upon the electronic device workpiece.

[0020] FIG. 4 is an elevated plan view of the temperature sensing device shown in FIG. 3.

[0021] FIG. 5 is a cross-sectional view of a temperature sensing device provided upon an upper surface of the electronic device workpiece.

[0022] FIG. 6 is a cross-sectional view illustrating an electrical connection coupled with a temperature sensing device upon the electronic device workpiece.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0023] This disclosure of the invention is submitted in furtherance of the constitutional purposes of the U.S. Patent Laws "to promote the progress of science and useful arts" (Article 1, Section 8).

[0024] Referring to FIG. 1, an electronic workpiece 10 is illustrated. Exemplary electronic device workpieces include a semiconductor wafer or a crystal mask substrate. In one embodiment, electronic device workpiece 10 includes a substrate 11 comprising a semiconductive substrate. Substrate 11 can comprise silicon, silicon carbide and gallium nitride. Alternatively, electronic device workpiece 10 can comprise other substrates. In particular, electronic device workpiece 10 can comprise other components configured for application within an electronic or electrical device or configured for processing to form such components.

[0025] Electronic device workpiece 10 is coupled with external circuitry 12. The illustrated external circuitry 12 includes plural connections 14 and a resistance thermometer 16. An interface 18 is provided in a preferred embodiment to provide convenient coupling of circuitry formed upon electronic device workpiece 10 and electrical connections 14 of circuitry 12.

[0026] External circuitry 12 can be implemented in other configurations. For example, resistance thermometer 16 comprises a data gathering device in alternative embodiments. Connections 14 are configured to couple electronic device workpiece 10 with a digital computer configured to monitor process conditions including the temperature of electronic device workpiece 10. External circuitry 12 includes communication devices in other embodiments of the invention to transmit process conditions.

[0027] Electronic device workpiece 10 includes an upper surface 20 and lower surface 22 opposite upper surface 20.

Electronic device workpiece 10 additionally includes an edge 24 which is circular in the described embodiment.

[0028] According to the present invention, at least one temperature sensing device 30 is provided upon at least one surface of electronic device workpiece 10. A plurality of temperature sensing devices 30 are provided upon electronic device workpiece 10 in a preferred embodiment. In the illustrated embodiment, a plurality of temperature sensing devices 30 are provided upon or supported by upper surface 20 of electronic device workpiece 10. Temperature sensing devices 30 are preferably borne by substrate 11 of electronic device workpiece 10 and may be formed upon lower surface 22 as well as upper surface 20.

[0029] In one embodiment, temperature sensing devices 30 comprise resistance temperature devices (RTD). Resistance temperature devices provide contact temperature sensing in preferred modes of operation. In particular, resistance temperature devices can comprise a wire wound device that provides a linear resistance change for a corresponding temperature change. Typically, the coefficient of temperature of resistance temperature devices is positive wherein the resistance through the resistance temperature device increases as temperature increases.

[0030] Exemplary resistance temperature devices comprise sensitive materials which provide a plurality of resistances corresponding to a temperature profile. Resistance temperature devices can comprise platinum, polysilicon or other sensitive materials.

[0031] In another embodiment, temperature sensing devices 30 comprise diodes which provide a change in threshold voltage responsive to temperature changes. Such voltage changes are sufficient to enable monitoring of associated temperatures and extraction of temperature information. Other temperature sensing devices 30 comprise thermocouples which comprise two overlapping dissimilar metals to create a voltage producing junction which varies dependent upon temperature exposure. Further temperature sensing devices 30 include a thermistor which comprises a mixture of metal oxides and encapsulated in an isolator such as epoxy or glass.

[0032] As described in detail below, temperature sensing devices 30 can be fabricated or formed upon the electronic device workpiece 10 or comprise preexisting devices which are positioned and adhered upon or attached to the electronic device workpiece 10. Fabricated temperature sensing devices 30 are available from Watlow Electrical Manufacturing Company of St. Louis, Mo.

[0033] Electrical interconnects 40, 41 are provided to electrically couple with individual temperature sensing devices 30. In a preferred embodiment, electrical interconnects 40, 41 are formed upon upper surface 20 of substrate 11. In embodiments where plural temperature sensing devices 30 are provided, individual electrical interconnects 40, 41 are individually coupled with respective temperature sensing devices 30.

[0034] Electrical interconnects 40, 41 are formed upon upper surface 20 of substrate 11 in one embodiment. Such formed electrical interconnects 40 preferably comprise conductive traces. The conductive traces can comprise aluminum or other conductive materials. The conductive traces are formed by sputtering in one fabrication method. Elec-

trical interconnects 40, 41 can comprise other conductors in other embodiments. Electrical interconnects 40, 41 electrically couple individual temperature sensing devices 30 with edge 22 of electronic device workpiece 10.

[0035] An isolator (not shown in FIG. 1) is provided intermediate upper surface 20 and temperature sensing devices 30 and electrical interconnects 40, 41. The isolator comprises silicon dioxide or other suitable insulative material.

[0036] Interface connection 18 is provided in electrical connection with electrical interconnects 40, 41. The depicted interface connection 18 is located proximate to edge 22 of electronic device workpiece 10. Interface connection 18 is configured to provide electrical coupling of electrical interconnects 40, 41 and the respective temperature sensing devices 30 with circuitry 12 external of electronic device workpiece 10. Exemplary interface connection configurations include tab tape, adapter, flip chip connections, wire bond connections, and conductive adhesives. Interface connection 18 can include other configurations in accordance with the present invention.

[0037] Referring to FIG. 1A, an alternative interface connection 18a is illustrated. Connection 18a provides electrical coupling of temperature sensing devices 30 with electrical circuitry 12. The depicted interface connection 18a is defined by edge 24 of workpiece 10.

[0038] Referring to FIG. 1B, yet another interface connection 18b is illustrated. The depicted interface connection 18b comprises respective mating plug and receptacle components 13, 15. Plug component 13 is coupled with wires 14 of external circuitry 12 (although three wires 14 are shown in FIG. 1B, additional wires of circuitry 12 can be coupled with plug 13). Plug 13 is configured for removable coupling with component 15.

[0039] Receptacle component 15 is configured to receive plug 13 and for attachment to electrical interconnections 40, 41 (only one interconnection 40 is shown in FIG. 1B). When mated, components 13, 15 couple external circuitry 12 with respective interconnections 40, 41.

[0040] A plurality of interconnects 7 are used in the depicted embodiment to couple internal electrical connections 17 of components 13, 15 with interconnections 40, 41. Exemplary interconnects 7 include solder, solder balls, conductive epoxy, etc.

[0041] Referring to FIG. 2, electronic device workpiece 10 includes a cavity 50 formed within substrate 11. Cavity 50 includes plural sloping sidewalls 52, 53 and a bottom wall 54. Surface 20 of substrate 11 includes sidewalls 52, 53, and bottom wall 54. An exemplary cavity 50 has a depth of approximately 200 microns and bottom wall 54 has a width of approximately 300 microns.

[0042] Cavity 50 is preferably formed by an anisotropic etch. An exemplary anisotropic etch includes potassium hydroxide (KOH). Utilization of an anisotropic etch provides sloping sidewalls 52, 53 within cavity 50. Provision of sloping sidewalls 52, 53 facilitates fabrication of conductors 40, 41 over surface 20 and isolator 56, and sidewalls 52, 53 of cavity 50. Sidewalls 52, 53 are preferably sloped at an angle within the approximate range of 50 to 60 degrees with respect to upper surface 20 of substrate 11. The most

preferred embodiment provides sidewalls 52, 53 having an angle of 54 degrees with respect to upper surface 20.

[0043] Cavity 50 is formed by an isotropic etch in an alternative embodiment. Wire bonded connections are preferably utilized in such an embodiment to provide electrical coupling of interconnects 40, 41 upon surface 20 with the temperature sensing device 30 provided within cavity 50.

[0044] One temperature sensing device 30 is shown borne by substrate 11 of electronic device workpiece 10. An isolation layer 56 is shown over electronic device workpiece 10. Isolator 56 is formed over upper surface 20 of substrate 11 including sidewalls 52, 53 and bottom wall 54 of cavity 50.

[0045] A preexisting temperature sensing device 30 is positioned and adhered within cavity 50 in the depicted embodiment of FIG. 2. Temperature sensing device 30 is adhered using standard thermal conductive epoxies or adhesives in one embodiment. A temperature sensing device is formed within cavity 50 in other embodiments described below. Bottom wall 54 supports temperature sensing device 30 in the depicted embodiment. Temperature sensing device 30 is supported by upper surface 20 of substrate 11 in other embodiments.

[0046] Electric interconnects or conductive traces 40, 41 are formed over upper surface 20 and sidewall 52 in the depicted embodiment (only conductive trace 40 is shown in FIG. 2). The illustrated electrical interconnect 40 is provided over a portion of bottom wall 54. An additional electrical connection 58 is utilized to electrically couple temperature sensing device 30 with conductive trace or electrical interconnect 40. In one embodiment, electrical connection 58 comprises a wire connection, such as that formed by wire bonding. Other forms of connections such as tab tape and flip chip connections can also be employed. Connection 58 is preferably encapsulated to minimize damage to connection 58. A dispensed epoxy 57 is utilized in one embodiment to encapsulate connection 58. As shown, it is preferred to leave a portion of the area adjacent temperature sensing device 30 free of epoxy for accurate temperature sensing.

[0047] In other embodiments, contacting of conductive trace 40 with temperature sensing device 30 is sufficient to electrically couple trace 40 and temperature sensing device 30.

[0048] Referring to FIG. 2A, the illustrated electrical interconnection 40 is formed outside of cavity 50. Connection 58 is used to couple temperature sensing device 30 with the depicted interconnection 40 at a location upon interconnection 40 outside of cavity 50.

[0049] Temperature sensing device 30 is preferably provided upon electronic device workpiece 10 in a temperature sensing relation with respect to electronic device workpiece 10. Temperature sensing device 30 is configured to sense the temperature of an area of electronic device workpiece 10 immediately adjacent the attached device 30. In one embodiment, the resistance of temperature sensing device 30 changes corresponding to changes in temperature. Such changes in resistance change the voltage drop across temperature sensing device 30 thereby changing signals (for example the currents of the signals) passing through temperature sensing device 30. The generated signals corre-

spond to the temperature of the area of the electronic device workpiece **10** being sensed. Electrical interconnects **40**, **41** conduct the generated signals to interface connection **18** and external circuitry **12** in the preferred embodiment. Exemplary external circuitry **12** contains devices that convert the received signals to localized temperatures at specific points.

[0050] Referring to FIGS. 3 and 4, like reference numerals as used herein refer to like components with any significant differences therebetween represented by an alphabetical suffix such as "a". A temperature sensing device **30a** is shown formed within cavity **50** of substrate **11**. Electronic device workpiece **10** includes a conductive trace **40** extending upon isolator **56** over a portion of upper surface **20**, down sidewall **52** and across bottom wall **54** of cavity **50**. Another conductive trace **41** is coupled with temperature sensing device **30a** as shown in FIG. 4.

[0051] Temperature sensing device **30a** is shown formed within cavity **50** upon conductor **40**. The illustrated temperature sensing device **30a** is a resistance temperature device. The resistance temperature device comprises a conductive material such as polysilicon or metals such as platinum. Other materials can also be utilized. Similarly, a combination of metals and polysilicon can also be utilized. In a preferred embodiment, temperature sensing device **30a** comprises polysilicon deposited by chemical vapor deposition (CVD). The deposited polysilicon can thereafter be doped by ion implantation or diffusion to provide a desired resistivity. Alternatively, doped polysilicon using PECVD techniques can also be deposited. The polysilicon resistance temperature device can thereafter be patterned such as by etching. Electrical interconnect **40** and temperature sensing devices **30** can be formed with thin film processing techniques or thick film techniques using a stencil.

[0052] Referring to FIG. 4, the illustrated RTD temperature sensing device **30a** comprises polysilicon patterned in an exemplary serpentine configuration. Temperature sensing device **30a** can be configured in other shapes and formats in other embodiments. Temperature sensing device **30a** is formed upon bottom wall **54** of cavity **50**. Opposing ends of temperature sensing device **30a** are individually coupled with plural electrical interconnects **40**, **41**. An electrical signal entering via one of electrical interconnects **40**, **41** passes through temperature sensing device **30a** and exits through the opposite electrical interconnect. A change of temperature at bottom wall **54** results in a change in resistance of temperature sensing device **30a**. Accordingly, the voltage drop across temperature sensing device **30a** changes with respect to fluctuations in temperature of the area of electronic device workpiece **10** adjacent device **30a**. Electronic interconnects **40**, **41** are configured to conduct electrical signals which indicate a temperature of electronic device workpiece **10**.

[0053] Providing temperature sensing devices within cavities of the electronic device workpiece enables temperature mapping of the workpiece in three dimensions. Temperature sensing devices can be provided both on the surfaces of an electronic device workpiece and within cavities formed within the workpiece. Temperature sensing devices upon one or both surfaces of the electronic device workpiece enable temperature mapping in x-y directions upon the respective surfaces of the workpiece. Providing temperature

sensing devices within cavities of the workpiece enable temperature sensing within the z direction intermediate the surfaces of the workpiece.

[0054] Referring to FIG. 5, temperature sensing device **30a** is formed over surface **20** of substrate **11** of electronic device workpiece **10** and isolator layer **56**. In the depicted embodiment, at least a portion of temperature sensing device **30a** is formed or positioned upon electrical interconnect **40**. In the depicted embodiment, temperature sensing device **30a** is formed by chemical vapor deposition (CVD). In other embodiments, temperature sensing device **30a** is formed by alternative processing methods. Isolator layer **56** is provided intermediate electrical interconnect **40** and upper surface **20** of substrate **11**.

[0055] Referring to FIG. 6, another construction for providing electrical connection with temperature sensing device **30a** is shown. Upper surface **20** and lower surface **22** of substrate **11** are shown in FIG. 6. Electrical interconnect **40** is formed upon upper surface **20** as previously described.

[0056] The illustrated electronic device workpiece **10** also includes a via **44** formed within substrate **11**. Via **44** enables electrical connection of upper surface **20** with lower surface **22**. In particular, another electrical interconnection **42** is formed upon lower surface **22** of substrate **11**.

[0057] Via **44** is also plugged with a conductive material forming electrical interconnection **45** providing coupling of interconnections **40**, **42**. An insulating layer **56a** is preferably formed within via **44** to provide insulation of interconnection **45**.

[0058] Electrical interconnection **42** comprises a pad in the illustrated configuration. Alternatively, electrical connection **42** can be formed to extend to an edge of electronic device workpiece **10**. Electrical interconnection **42** can be coupled with external circuitry (not shown in FIG. 6) enabling monitoring of temperatures of electronic device workpiece **10**.

[0059] In some embodiments, the described electronic device workpiece is configured and utilized as a calibration wafer. Such calibration wafers are typically placed within a workpiece processing chamber and the chamber can be brought up to subject processing conditions at typical elevated temperatures. Through the use of an electronic device workpiece configured as a calibration wafer, the temperature at various positions upon electronic device workpieces to be processed can be determined. Thereafter, data provided by temperature sensing devices located upon the electronic device workpiece can be utilized to provide temperature control and modify some aspect of the processing chamber.

[0060] The processing chamber is preferably modified to provide a uniform temperature distribution across the entire surface of the electronic device workpiece being processed. In other processes, the processing chamber is modified to provide varied temperatures across a surface of the workpiece.

[0061] The modifications can be made with the calibration workpiece in place within the processing chamber. The effect of such modifications can be verified by the temperature sensing devices and associated temperature monitoring equipment coupled with the devices. Thereafter, the calibra-

tion workpiece is removed and the equipment having been desirably calibrated can be utilized to process other electronic device workpieces in mass.

[0062] In another embodiment, temperature sensing devices are provided upon an electronic device workpiece which will actually be processed and subsequently utilized to fabricate integrated circuitry or other components. The temperature sensing devices can be fabricated upon the electronic device workpiece during the fabrication of the electronic device workpiece. In another embodiment, pre-existing or prefabricated temperature sensing devices are positioned and adhered upon the electronic device workpiece.

[0063] In compliance with the statute, the invention has been described in language more or less specific as to structural and methodical features. It is to be understood, however, that the invention is not limited to the specific features shown and described, since the means herein disclosed comprise preferred forms of putting the invention into effect. The invention is, therefore, claimed in any of its forms or modifications within the proper scope of the appended claims appropriately interpreted in accordance with the doctrine of equivalents.

1. An electronic device workpiece comprising:
 - a substrate having a surface;
 - a temperature sensing device borne by the substrate; and
 - an electrical interconnect provided upon the surface of the substrate, the electrical interconnect being electrically coupled with the temperature sensing device.
2. The electronic device workpiece according to claim 1 further comprising a wire connection adapted to electrically connect the electrical interconnect and the temperature sensing device.
3. The electronic device workpiece according to claim 1 wherein the electrical interconnect contacts the temperature sensing device.
4. The electronic device workpiece according to claim 1 wherein the workpiece has an edge and the electrical interconnect extends from the temperature sensing device to the edge of the electronic device workpiece.
5. The electronic device workpiece according to claim 1 further comprising a cavity including plural sloped sidewalls and a bottom wall within the substrate, the temperature sensing device being provided within the cavity.
6. The electronic device workpiece according to claim 5 wherein the sidewalls are sloped at an angle within the approximate range of fifty to sixty degrees with respect to the surface of the substrate.
7. The electronic device workpiece according to claim 1 further comprising an isolator intermediate the surface of the electronic device workpiece and individual ones of the electrical interconnect and the temperature sensing device.
8. The electronic device workpiece according to claim 1 further comprising an interface connection in electrical connection with the electrical interconnect, the interface connection being configured to provide electrical coupling of the electrical interconnect and the temperature sensing device with circuitry external of the electronic device workpiece.

9. The electronic device workpiece according to claim 1 wherein the electrical interconnect comprises a conductive trace.

10. The electronic device workpiece according to claim 1 wherein the temperature sensing device comprises a resistance temperature device.

11. The electronic device workpiece according to claim 1 wherein the substrate includes a via and a conductor within the via configured to electrically couple with the electrical interconnect.

12. The electronic device workpiece according to claim 1 further comprising plural additional temperature sensing devices borne by the substrate.

13. The electronic device workpiece according to claim 1 wherein the electronic device workpiece comprises a calibration workpiece.

14. The electronic device workpiece according to claim 1 wherein the substrate comprises a semiconductive substrate.

15. The electronic device workpiece according to claim 1 wherein the substrate comprises silicon.

16. The electronic device workpiece according to claim 1 wherein the substrate comprises silicon carbide.

17. The electronic device workpiece according to claim 1 wherein the substrate comprises gallium nitride.

18. An electronic device workpiece comprising:

a substrate having a surface;

a cavity formed in the substrate, the cavity having sidewalls sloped at an angle within an approximate range of fifty to sixty degrees with respect to the surface of the substrate;

a temperature sensing device within the cavity of the substrate; and

an electrical interconnect coupled with the temperature sensing device.

19. The electronic device workpiece according to claim 18 wherein the electrical interconnect is formed upon the surface of the substrate.

20. The electronic device workpiece according to claim 18 further comprising a wire connection electrically connecting the electrical interconnect and the temperature sensing device.

21. The electronic device workpiece according to claim 18 wherein the electrical interconnect contacts the temperature sensing device.

22. The electronic device workpiece according to claim 18 wherein the workpiece has an edge and the electrical interconnect extends from the temperature sensing device to the edge of the electronic device workpiece.

23. The electronic device workpiece according to claim 18 wherein the sidewalls are sloped at approximately fifty-four degrees.

24. The electronic device workpiece according to claim 18 wherein the electronic device workpiece comprises a semiconductor wafer.

25. The electronic device workpiece according to claim 18 wherein the electronic device workpiece comprises a calibration workpiece.

26. The electronic device workpiece according to claim 18 wherein the electrical interconnect comprises a conductive trace.

27. The electronic device workpiece according to claim 18 wherein the temperature sensing device comprises a resistance temperature device.

28. A semiconductor workpiece comprising:

a semiconductive substrate having a surface;

a temperature sensing device borne by the substrate; and

an electrical interconnect provided upon the surface of the substrate, the electrical interconnect being electrically coupled with the temperature sensing device.

29. The semiconductor workpiece according to claim 28 further comprising a cavity including plural sloped sidewalls and a bottom wall within the substrate, the temperature sensing device being provided within the cavity.

30. The semiconductor workpiece according to claim 28 wherein the electrical interconnect comprises a conductive trace.

31. A semiconductor workpiece comprising:

a substrate having a surface and an edge;

a cavity formed in the substrate, the cavity having sidewalls sloped at an approximate fifty-four degree angle with respect to the surface of the substrate;

a resistance temperature device within the cavity of the substrate;

a plurality of conductive traces coupled with the resistance temperature device, the conductive traces being formed upon the surface of the substrate to contact the resistance temperature device, the conductive traces being configured to electrically couple the resistance temperature device with the edge of the substrate;

an isolator intermediate the surface of the electronic device workpiece and the conductive traces and the resistance temperature device; and

an interface connection in electrical connection with the conductive traces, the interface connection being configured to provide electrical coupling of the resistance temperature device with circuitry external of the semiconductor workpiece.

32. A method of sensing temperature of an electronic device workpiece comprising:

providing an electronic device workpiece;

supporting a temperature sensing device using the electronic device workpiece;

providing an electrical interconnect upon a surface of the electronic device workpiece;

electrically coupling the electrical interconnect with the temperature sensing device; and

sensing temperature of the electronic device workpiece using the temperature sensing device.

33. The method according to claim 32 further comprising wire bonding the electrical interconnect and the temperature sensing device.

34. The method according to claim 32 further comprising:

forming a cavity in the electronic device workpiece; and

providing the temperature sensing device within the cavity.

35. The method according to claim 34 wherein the forming the cavity comprises anisotropically etching the electronic device workpiece.

36. The method according to claim 34 wherein the forming the cavity comprises isotropically etching the electronic device workpiece.

37. The method according to claim 32 further comprising forming the temperature sensing device.

38. The method according to claim 37 wherein the forming the temperature sensing device comprises forming a resistance temperature device.

39. The method according to claim 32 further comprising electrically coupling the electrical interconnect with external circuitry.

40. The method according to claim 32 further comprising electrically coupling the temperature sensing device with an edge of the electronic device workpiece using the electrical interconnect.

41. The method according to claim 32 wherein the providing the electrical interconnect comprises forming a conductive trace.

42. The method according to claim 32 further comprising contacting the electrical interconnect with the temperature sensing device.

43. The method according to claim 32 wherein the method comprises a method of sensing temperature of semiconductor wafers.

44. A method of semiconductor processing, comprising:

providing a semiconductor substrate;

anisotropically etching a cavity in the semiconductor substrate; and

providing a temperature sensing device within the cavity of the semiconductor substrate.

45. The method according to claim 44 further comprising:

providing an electrical interconnect upon a surface of the semiconductor substrate; and

electrically coupling the electrical interconnect with the temperature sensing device.

46. The method according to claim 45 wherein the providing the electrical interconnect comprises forming a conductive trace.

47. The method according to claim 45 wherein the electrically coupling comprises wire bonding the electrical interconnect and the temperature sensing device.

48. The method according to claim 45 wherein the electrically coupling includes contacting the electrical interconnect and the temperature sensing device.

49. The method according to claim 45 further comprising electrically coupling the electrical interconnect with circuitry external to the semiconductor substrate.

50. The method according to claim 45 further comprising electrically coupling the temperature sensing device with an edge of the semiconductor substrate using the electrical interconnect.

51. The method according to claim 44 wherein the providing comprises forming the temperature sensing device within the cavity.

52. The method according to claim 44 wherein the providing comprises positioning the temperature sensing device within the cavity.

53. A method of sensing temperature of an electronic device workpiece comprising:

providing an electronic device workpiece;

forming a temperature sensing device upon the electronic device workpiece, the forming including providing the temperature sensing device in a temperature sensing relation with the electronic device workpiece; and

sensing the temperature of the electronic device workpiece using the temperature sensing device.

54. The method according to claim 53 further comprising:

providing an electrical interconnect upon the electronic device workpiece; and

electrically coupling the electrical interconnect with the temperature sensing device.

55. The method according to claim 54 wherein the providing the electrical interconnect comprises forming a conductive trace.

56. The method according to claim 54 wherein the electrically coupling comprises wire bonding the electrical interconnect and the temperature sensing device.

57. The method according to claim 54 wherein the electrically coupling includes contacting the electrical interconnect and the temperature sensing device.

58. The method according to claim 53 further comprising:

forming a cavity in the electronic device workpiece; and providing the temperature sensing device within the cavity.

59. The method according to claim 58 wherein the forming the cavity comprises anisotropically etching the electronic device workpiece.

60. The method according to claim 53 wherein the forming comprises forming a resistance temperature device.

61. The method according to claim 53 further comprising forming plural temperature sensing devices upon the electronic device workpiece.

62. A method of sensing temperature of an electronic device workpiece comprising:

providing an electronic device workpiece;

supporting a temperature sensing device using the electronic device workpiece;

providing the temperature sensing device in a temperature sensing relation with the electronic device workpiece;

providing an electrical interconnect upon a surface of the electronic device workpiece; and

electrically coupling the electrical interconnect with the temperature sensing device.

63. The method according to claim 62 wherein the coupling comprises wire bonding the electrical interconnect and the temperature sensing device.

64. The method according to claim 62 wherein the coupling comprises contacting the electrical interconnect with the temperature sensing device.

65. The method according to claim 62 further comprising:

forming a cavity in the electronic device workpiece; and providing the temperature sensing device within the cavity.

66. The method according to claim 65 wherein the forming the cavity comprises anisotropically etching the electronic device workpiece.

67. The method according to claim 62 further comprising forming a temperature sensing device upon the electronic device workpiece.

68. The method according to claim 62 further comprising electrically coupling the electrical interconnect with circuitry external to the electronic device workpiece.

69. The method according to claim 62 further comprising electrically coupling the temperature sensing device with an edge of the electronic device workpiece using the electrical interconnect.

70. The method according to claim 62 wherein the providing the electrical interconnect comprises forming a conductive trace.

* * * * *