



- (51) **International Patent Classification:**
C11D 7/50 (2006.01) *C11D 7/26* (2006.01)
- (21) **International Application Number:**
PCT/US2016/059257
- (22) **International Filing Date:**
28 October 2016 (28.10.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
15/053,477 25 February 2016 (25.02.2016) US
- (71) **Applicant (for all designated States except US): THE UNITED STATES OF AMERICA AS REPRESENTED BY THE SECRETARY OF THE NAVY [US/US];** B435, Suite A, Naval Air Warfare Center Aircraft Division, 47076 Liljencrantz Road, Patuxent River, MD 20670-1550 (US).
- (72) **Inventor: ARAFAT, El Sayad;** 22876 White Swan Way, Leonardtown, MD 20650 (US).
- (74) **Agent: GLUT, Mark, O.;** B435, Suite A, Naval Air Warfare Center Aircraft, Division, 47076 Liljencrantz Road, Patuxent River, MD 20670-1550 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: NON-AQUEOUS SILOXANE SOLVENT COMPOSITIONS

Figure 1. Cleaning Efficiency Test Results for the Selected Commercial Products in Accordance with MIL-PRF-32295A Type III (MIL-G-21164 Soil)

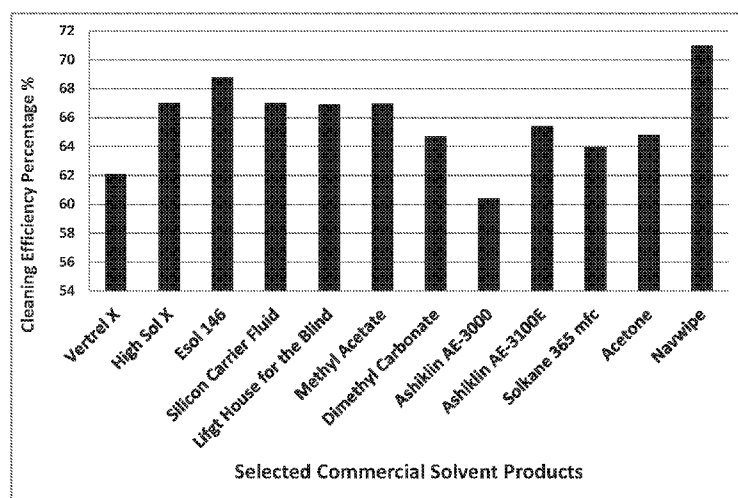

(57) **Abstract:** This invention relates to non aqueous non-volatile alkylated siloxane compositions having low VOC and vapor pressure of about 31 millimeters of mercury at 20°C. consisting essentially of a mixture of a linear or open-chain methyl alkylated siloxane having two silicon atoms and a siloxane having three silicon atoms alkylated with methyl groups.



-
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*
- Published:**
- *with international search report (Art. 21(3))*

NON-AQUEOUS SILOXANE SOLVENT COMPOSITIONS

ORIGIN OF INVENTION

The invention described herein was made by employees of the United States Government and may be manufactured and used by or for the Government for governmental purposes without the payment of any royalties thereon or therefor.

FIELD OF THE INVENTION

This invention relates to a unique combination of two alkylated linear siloxanes as a wipe solvent characterized as low-volatile organic or non-volatile organic compositions with vapor pressures of 31 millimeters of mercury at 20°C.

BACKGROUND OF THE INVENTION

Solvent cleaners are known for their excellent cleaning ability, quick drying, metal compatibility, and low surface tension to facilitate penetration. Some solvents are known for the air pollution they cause (as volatile organic compounds or VOC), toxicity, flammability, and incompatibility with plastics. The use of volatile organic compounds (VOC) solvents has been discouraged due to their deleterious effect on the environment. Regulations have been promulgated to accelerate the phase-out of environmentally destructive solvents.

The Environmental Protection Agency ("EPA") promulgates rules and regulations regarding environmental concerns such as VOCs. EPA has defined VOC's to include volatile compounds of carbon which promote atmospheric photo-chemical reactivity. Thus, there is a need to reduce the use of conventional VOC solvents and it is apparent that there is a need for solvents which have little or no VOC content.

The old specification solvent, commonly called Stoddard solvent or mineral spirits, contain petroleum fractions that are complex mixtures of aliphatic hydrocarbons, but may contain some aromatics and olefinics. P-D-680 contains hazardous air pollutants (HAP's) and VOC's and causes health and environmental concerns. The revision to MIL-PRF-680 eliminated the HAP's but MIL-PRF-680 still covers a petroleum-based solvent containing the same amount of VOC's as P-D-680. Since P-D-680 was first written, these solvents have been specified for general cleaning to remove oil and grease from aircraft and engine components and from ground support equipment.

The purpose of this invention is to develop a non-aqueous, low-volatile organic compound (VOC) containing and hazardous air pollutant- (HAP) free cleaner to meet the new environmental regulation in California (Rule 1171). VOCs are released during cleaning operations, contributing to the formation of ground-level ozone (photochemical smog), which can damage lung tissue, cause respiratory illness, and damage vegetation. Solvent emissions are regulated regionally and locally, with the air pollution control districts in California implementing the most stringent requirements. The South Coast Air Quality Management District (SCAQMD) has recently imposed restrictions limiting the VOC content in solvents to no greater than 25 grams per liter for immersion cleaning processes unless the solvent is used in an airtight cleaning system. In addition, under Title III of the 1990 Clean Air Act (CAA) amendment, the U.S. Environmental Protection Agency (EPA) established emissions standards for categories and sub-categories of sources that emit or have the potential to emit listed HAPs.

Wipe solvents are essential for removing contaminants from parts and surfaces before it undergoes manufacturing operations that require clean surfaces, such as painting, sealing, bonding, welding, plating, and other applications. High VOC-containing, high vapor pressure solvents are currently utilized for cleaning aircraft exteriors and parts applications. Currently, most of the products used by the Fleet Readiness Centers (FRCs) for wipe-cleaning applications contain HAPs high VOC contents of greater than 700 g/l. VOCs are released during cleaning operations, contributing to the formation of ground-level ozone (photochemical smog) and causing environmental and health problems. Furthermore, paint thinners, which contain HAP mixtures, are also used for general-purpose hand wipe-cleaning operations as specified in maintenance and corrosion control manuals. Continuing with the use of paint thinners as pre-paint cleaning solvents increases the risk of non-compliance and subsequent fines. Currently, the Navy's NAVAIR 01-1A-509 Cleaning and Corrosion Control manual lists three specifications for wipe-solvent cleaning applications:

1. MIL-T-81772 (Thinner, Aircraft Coating) covers the requirements for three types of thinner to be used in reducing aircraft coatings.
2. AMS 3166 (Solvent Cleaning Prior to Application of Sealing Compounds) is used to clean aircraft primary and secondary structural surfaces prior to application of adhesion promoters and/or sealing materials.
3. ASTM D329 (Acetone) is used for general-purpose hand-wipe cleaning operations. Acetone is an exempt solvent and it is very flammable and it is not compatible with plastics.

The AMS 3166 specification is a Commercial Item Description (CID) and contains only one approved product (Dysol's DS-108). The VOC contents of the DS-108 product is more than 800 g/l and its vapor pressure is as low as 1.1 mmHg. According to NESHAP requirements, the vapor pressure for the wipe solvent cleaners should be around 45 mmHg. None of the MIL-T-81772 qualified products comply with the current environmental regulations (EPA and the SCAQMD). The Material Safety Data Sheet (MSDS) for Acetone (ASTM D329) has shown that Acetone is toxic to central nervous system (CNS). Also, it may be toxic to kidneys, the reproductive system, liver and skin. Repeated or prolonged exposure to Acetone can produce target organ damage. Due to the lack of environmentally-friendly qualified products, the FRCs are using hazardous cleaners such as Desoclean 45 for general-purpose hand-wipe cleaning applications on the F/A-18 aircraft. Because of various EPA Clean Air Act amendments and Resource and Conservation Recovery Act (RCRA) emission restrictions for HAPS/VOC's, along with California's more stringent SCAQMD VOC restrictions, solvents utilized at some aviation facilities cannot be applied for general-purpose wipe-cleaning operations.

Compositions of the linear or open-chain siloxanes of this invention (Wipe Solvent Formulations) are as follows:

EXAMPLE 1**Parts By Weight**

Hexamethyldisiloxane	55 to 75
----------------------	----------

Octamethyltrisiloxane	25 to 45
-----------------------	----------

EXAMPLE 2

Hexamethyldisiloxane	60 to 70
----------------------	----------

Octamethyltrisiloxane	30 to 40
-----------------------	----------

Example 3

Hexamethyldisiloxane	62 to 65
----------------------	----------

Octamethyltrisiloxane	35 to 38
-----------------------	----------

Example 4

Hexamethyldisiloxane	63 (63%)
----------------------	----------

Octamethyltrisiloxane	37 (37%)
-----------------------	----------

Properties of the NAVWIPE (Wipe Solvent Formulation)

Several commercial exempt solvents were selected for testing and evaluation for wipe cleaning applications in accordance with the requirements of MIL-PRF-32295A Type III (Table 1). Drying times after cleaning with solvents play an important role in industrial cleaning applications. The drying process depends on several factors such as the vapor pressure of the cleaning solvent, temperature, humidity, and the velocity of the airflow. The Aerospace National Emission Standards for Hazardous Air pollutants (NESHAP) (40 CFR 63 Subpart GG) limits the vapor pressure values for wipe cleaning applications to equal or less than 45 mmHg at 20°C. The vapor pressure of this invention (Navwipe) was determined to be about 31 mmHg at 20°C as shown in Table 1. Few of the selected commercial products have met NESHAP's vapor pressure requirements for wipe-cleaning applications.

Table 1. Comparison of Navwipe with Selected Commercial Solvent Products for Wipe-Cleaning Applications

Manufacturer	Product	VOC	Vapor Pressure mmHg at 20°C
DuPont	Vertrel XF	Exempt	226
Garrett Services, Inc.	High Sol-X	Exempt	NA
PPG aerospace PRC-DeSoto	Esol-146	Exempt	NA
Micro Care	Silicon Carrier Fluid	Exempt	226
Sigma-Aldrich	Acetone	Exempt	184
Lyondell	Ter-Butyl Acetate	Exempt	42
NAVAIR Invention	(Navwipe)	Exempt	31
AGC Chemicals America	Ashiklin AE 3000	Exempt	233
AGC Chemicals America	Ashiklin AE 3100E	Exempt	210
Kowa American Corp.	Dimethyl Carbonate	Exempt	55

Effect on Plastics (Crazing Test)

The effect of the siloxane composition and selected commercial products on plastics was studied in accordance with ASTM F 484. The plastic materials used for this test are listed below:

- a. MIL-PRF-5425 cast acrylic (annealed in accordance with ASTM F 484)
- b. MIL-PRF-25690 stretch acrylic
- c. SAE AMS-P-83310 polycarbonate

The specimens were secured in the loading fixture. The product was applied onto the top surface of the plastic by spraying back and forth three times in ten seconds from a distance of six inches. The test coupons were allowed to air dry for one hour and then were examined for crazing and strength loss. Crazing is evident when a flashlight is

used to illuminate the specimen from a direction tangent to the specimen bend.

Strength loss is evident if, when removed from the fixture, it fails easily when bent by hand. The results of the crazing test for the selected commercial products and the new invention on the cast acrylic plastic are shown in Table 2. All tested products failed the crazing test with the exception of the siloxane composition of this invention, (Navwipe) which met the requirement. In addition, the siloxane composition (Navwipe) passed the test requirements of stretch acrylic and polycarbonate materials.

Table 2. Compatibility of Selected Commercial Products on Plastics (Crazing Test: ASTM F 484)

Product	Cast Acrylic MIL-PRF-5425
High Sol-X	Fail
Esol 146	Fail
Dimethyl Carbonate	Fail
Acetone	Fail
Ashiklin 3100E	Fail
Ashiklin 3000	Fail
Ter-Butyl Acetate	Fail
Navwipe	PASS

The cleaning efficiency test for Navwipe cleaner was conducted in accordance with test method 4.5.9 in MIL-PRF-32295A Type III as described below.

Preparation of test specimens: Stainless steel coupons of 1 by 2 by 0.05 inches (25 by 50 by 1.3 mm) were polished with 240-grit aluminum oxide abrasive paper or cloth and solvent wiped with isopropyl alcohol. Coupons were weighed (weight = W1), coated on one side with 20 - 25 mg of soil, then reweighed (weight = W2). Soils used for testing were the following:

- a. MIL-G-21164 (Grease, Molybdenum Disulfide, for Low and High Temperatures)
- b. MIL-PRF-83282 (Hydraulic Fluid, Fire Resistant, Synthetic Hydrocarbon Base)
- c. MIL-PRF-10924 (Grease, Automotive and Artillery)

Test procedure. Fresh solvent was used for each soil tested. Each test coupon was cyclically immersed and withdrawn from a 150-ml beaker containing 100 ml of the cleaner at a rate of 20 cycles per minute for 5 minutes. Each coupon dried for 10 minutes at 140 ± 4 °F (60 ± 2 °C), cooled to room temperature, and reweighed (weight = W3). Cleaning efficiency for the cleaner was calculated as follows for each coupon:

$$\% \text{ Cleaning Efficiency} = (W2 - W3) / (W2 - W1) \times 100$$

The cleaning efficiency of the siloxane composition (Navwipe) was conducted in accordance with the requirements of MIL-PRF-32295A Type III and the results are shown in Table 3. In addition, the results of cleaning efficiency of the selected products on one soil (MIL-G-21164) are shown in Table 4. As shown in Figure 1, the results indicate that the siloxane compositions of this invention (Navwipe) is the only product that meets the requirements of MIL-PRF-32295A Type III.

Table 3. Cleaning Efficiency Test Results for a. Siloxane Composition (Navwipe)

Soil/ Product	MIL-PRF-32295A Type III Requirements	New Invention (Navwipe)
MIL-G-21164	70%	71%
MIL-PRF-10924	85%	96%
MIL-PRF-83282	95%	97%

Table 4. Cleaning Efficiency Test Results for the Selected Commercial Products in Accordance with MIL-PRF-32295A Type III (MIL-G-21164 Soil)

Product	Cleaning Efficiency Percentage (%) (MIL-G-21164 Soil)
Vertrel -XF	62.1
High Sol-X	67.0
Esol 146	68.8
Silicon Carrier Fluid	67.0
LHB	66.95
Methyl Acetate	66.97
Dimethyl Carbonate	64.70
Ashiklin AE-3100E	65.40
Ashiklin AE-3000	60.40
Solkane 365 mfc	63.95
Acetone	64.80
Siloxanes (Navwipe)	71.00

The specific siloxanes of this invention consist essentially of linear or open-chain alternating silicon and oxygen atoms wherein the prefix denotes the number of silicon atoms alkylated with methyl groups. It was found that the di and trisiloxane mixtures alkylated with alkyl methyl groups (Navwipe) were the only products that met the requirements of MIL-PRF-32295A Type III as shown by the data in Table 3 and Figure 1.

The benefits of the siloxane compositions of this invention are providing the fleet with effective, safe, environmentally-friendly wipe-solvent cleaner. Providing qualified cleaners to all levels of maintenance will avoid risk of use of improper materials, which may compromise performance, safety and health. In addition, the outcomes of this invention are improving the fleet readiness, and pollution prevention onboard ships and complying with the current environmental regulations. To meet the new environmental regulations, it is essential to identify and validate effective, safe, and environmentally friendly products for cleaning applications. The Navwipe will be used to clean weapon systems across Department of Defense (DOD) maintenance facilities as alternatives to the current high VOC products. The advantages of the Navwipe cleaner include:

- Exempt Solvent,
- Odorless properties,
- Free of HAPs,
- Compatible with metals and non-metals,
- Non-toxic,
- Dry fast,
- Contains no ozone-depleting substances (ODSs),
- Cleaning efficiency is equivalent to the high VOC control,
- Complies with EPA and the new environmental regulations,
- A new alternative for high VOC commercial products, and
- Provides a safer and environmentally friendly cleaner to the fleet.

The siloxane composition (Navwipe) will be used for cleaning aircraft structure (metal and composite) surfaces prior to painting, sealing, bonding, application of adhesion promoters. In addition, the Navwipe will be used as a replacement for hazardous


chemicals currently used by the fleet such as methyl ethyl ketone (MEK) and methyl isobutyl ketone (MIBK), and MIL-T-81772 for wipe-cleaning applications.

While various embodiments of the invention have been disclosed, the specific composition and methods described herein are not intended to limit the scope of the invention.

The invention claimed:

1. Siloxane compositions having low VOC and a vapor pressure of about 31 millimeters of mercury at 20°C consist essentially of from about 55 to 75 parts by weight of an alkylated open-chain siloxane having two silicon atoms and from about 25 to 45 parts by weight of an alkylated open-chain siloxane having three silicon atoms.
2. A siloxane composition of claim 1 wherein the alkylated open-chain siloxane having two silicon atoms is hexamethyldisiloxane and the alkylated open-chain siloxane having three silicon atoms is octamethyltrisiloxane.
3. A siloxane composition of claim 2 wherein the hexamethyldisiloxane is present in the siloxane composition in an amount ranging from about 60 to 70 parts by weight and the octamethyltrisiloxane is present in the composition in an amount ranging from about 30 to 40 parts by weight.
4. A siloxane composition for cleaning metal having a low VOC and a vapor pressure of about 31 millimeters of mercury at 20°C consist essentially of from about 62 to 65 parts by weight of hexamethyldisiloxane and from about 35 to 38 parts by weight of octamethyltrisiloxane.
5. The siloxane composition of claim 4 wherein the hexamethyldisiloxane is present in the composition in an amount of about 63 parts by weight and the octamethyltrisiloxane is present in the composition in an amount of about 37 parts by weight.

Figure 1. Cleaning Efficiency Test Results for the Selected Commercial Products in Accordance with MIL-PRF-32295A Type III (MIL-G-21164 Soil)

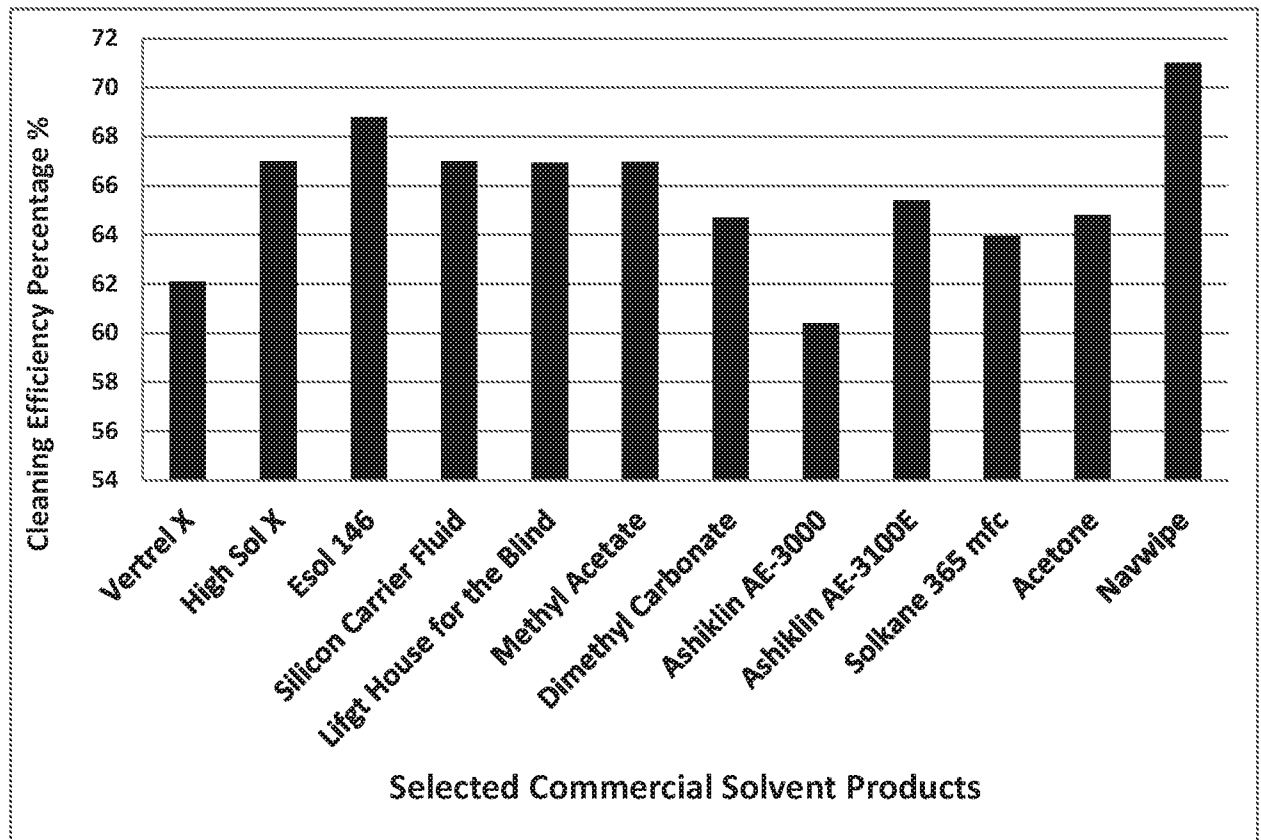

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US16/59257

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C11D 7/50, C11D 7/26 (2016.01)

CPC - C11D 7/261, 7/266

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): C11D 7/50, C11D 7/26 (2016.01)

CPC: C11D 7/261, 7/266

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatSeer (US, EP, WO, JP, DE, GB, CN, FR, KR, ES, AU, IN, CA, INPADOC Data); EBSCO; PubMed; Google Scholar; siloxane, composition, VOC, alkylated, silicon, octamethyltrisiloxane, hexamethyldisiloxane, clean, metal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2011/0140048 A1 (ARAFAT, ES) 16 June 2011; abstract; paragraphs [0011]-[0012], [0025], [0033]-[0037]	1-5
Y	US 2003/0019048 A1 (PERRY, RJ et al.) 30 January 2003; paragraphs [0015], [0032]	1-5

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

01 December 2016 (01.12.2016)

Date of mailing of the international search report

03 JAN 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774