


D. KATT.  
CULTIVATOR SHOVEL.  
APPLICATION FILED SEPT. 30, 1908.

962,434.

Patented June 28, 1910.

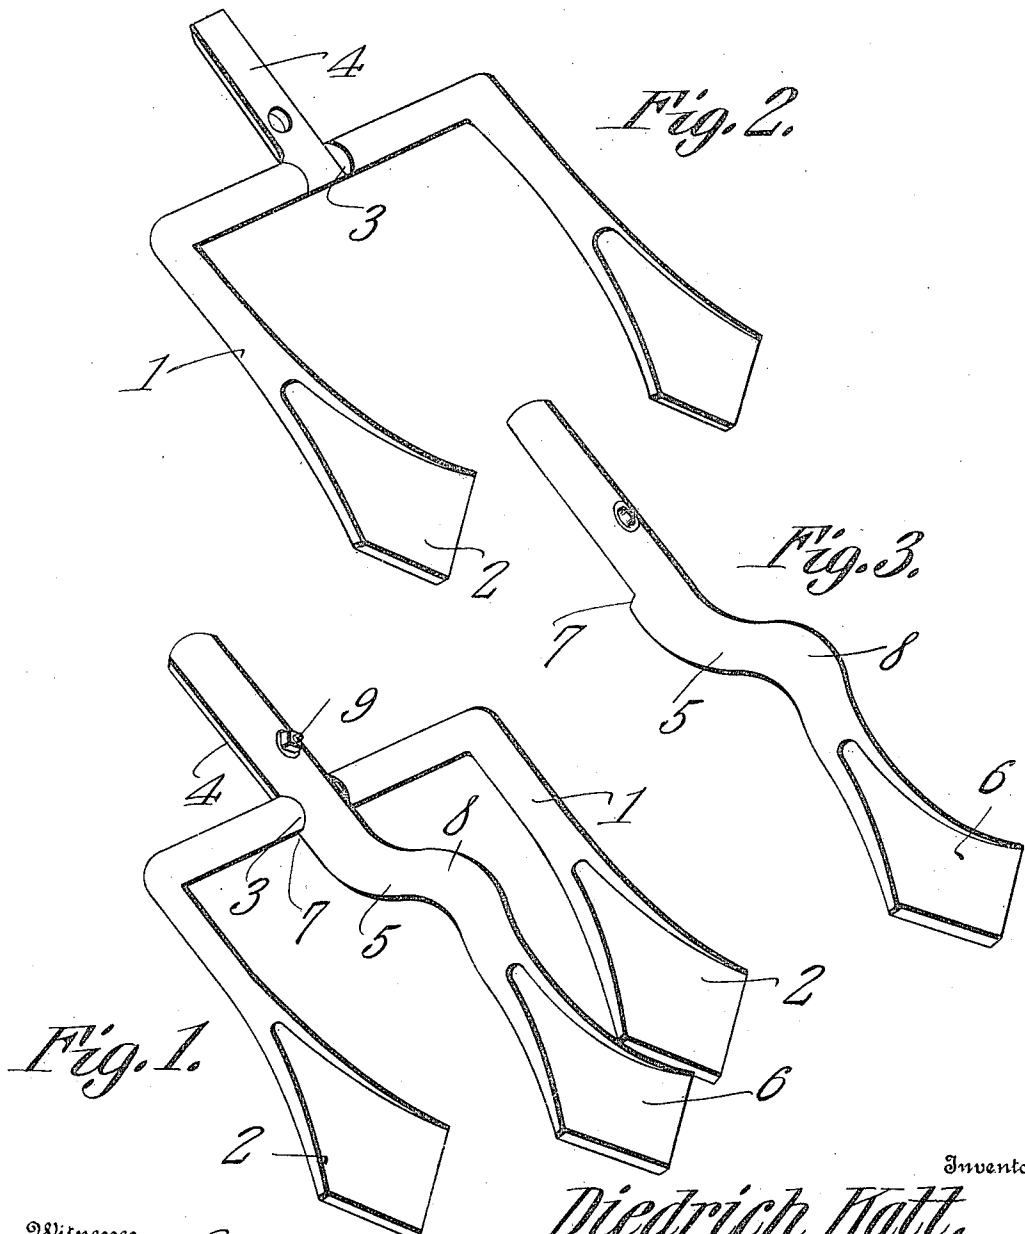

Witnesses  
*E. H. ...*  
*J. T. Lawson*

Inventor  
*Diedrich Katt.*  
By *C. Snow & Co.*  
Attorneys

# UNITED STATES PATENT OFFICE.

DIEDRICH KATT, OF OAKLAWN, ILLINOIS.

CULTIVATOR-SHOVEL.

962,434.

Specification of Letters Patent. Patented June 28, 1910.

Application filed September 30, 1909. Serial No. 520,370.

*To all whom it may concern:*

Be it known that I, DIEDRICH KATT, a citizen of the United States, residing at Oaklawn, in the county of Cook and State of Illinois, have invented a new and useful Cultivator-Shovel, of which the following is a specification.

This invention has relation to cultivator shovels and it consists in the novel construction and arrangement of its parts to be hereinafter shown and described.

Primarily the shovel consists of a U-shaped member having its end portions projecting approximately parallel and flat at their forward extremities, with a rearwardly disposed half round shank portion at a point intermediate the length of its bent portion. Also a second member having a half round shank tongue at one extremity and in the vicinity of the extremity a shoulder.

In the accompanying drawings: Figure 1 is a perspective view of the shovel. Fig. 2 is a perspective view of one of the members of the shovel. Fig. 3 is a perspective view of the other member of the shovel.

As before stated the shovel is composed of two members, and the member 1 is approximately U-shaped having end portions extending approximately parallel and flattened at their extremities into the blades 2. The member 1 at its intermediate portion and at a point intermediate of the ends thereof is provided with a transversely disposed recess 3 which registers with a half-round shank portion 4. The portion 4 is rearwardly disposed or disposed in the opposite direction from the end portion member 1. The member 5 is long in comparison with its breadth and at one end is formed into a blade 6. Toward its other end the member 5 is provided with a shoulder 7 adapted to abut against the intermediate portion of the member 1. At a point between the shoulder 7 and the blade 6 the member 5 is provided with a bowed section 8. That portion of the member 5 beyond the shoulder 7 is half round and forms a shank 40 adapted to fit against the shank portion 5. The said parts 4 and 40 of the members 1 and 2 when fitted together form a shank which is approximately cylindrical in cross section, and are held together by a

transversely disposed bolt 9 which may also be used for the purpose of securing the shank in or to the socket of a cultivator beam. By so assembling the parts it will be observed that the blade 6 of the member 5 does not lie in the same plane as that occupied by the blade 2 of the member 1. This is due to the fact that the member 5 is provided with the bowed section 8 which places the blade 6 to one side of the plane in which the blades 2 lie. At the same time it will be seen that by removing the bolt 9 the member 5 may be disconnected from the member 1 and thus the blades 6 and 2 may be worked readily for sharpening or other purposes. Furthermore it will be seen that when the parts are assembled as above described the member 5 is restrained against longitudinal rearward movement with relation to the member 1 for the reason that the shoulder 7 engages the ends of the intermediate portion of the member 1 and also the said member 5 is restrained against lateral movement with relation to the member 1 for the reason that the shank portion of the member 5 lies in the recess 3 formed in the middle of the intermediate portion of the member 1.

Having described my invention, what I claim as new and desire to secure by Letters-Patent is:

A cultivator shovel comprising a U-shaped member having blades at the extremities of its arms and a recess at the midlength of its central portion, and a half-round shank integral with said portion and extending to the rear of such recess; a second member having a blade at its front end and a half-round shank at its rear end to complement that of the first-mentioned member, there being a shoulder between the shank and body portion of this member adapted to engage the central portion of the other member; and fastening means through both shanks when the members are assembled.

In testimony that I claim the foregoing as my own, I have hereto affixed my signature in the presence of two witnesses.

DIEDRICH KATT.

Witnesses:

LOUIS HOSMAN,  
GOTTLIEB SCHROEDER, Jr.