



- (51) International Patent Classification:
A61N 5/10 (2006.01) *G21K 1/04* (2006.01)
- (21) International Application Number:
PCT/US2015/041070
- (22) International Filing Date:
20 July 2015 (20.07.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/026,077 18 July 2014 (18.07.2014) US
- (71) Applicant: UNIVERSITY OF IOWA RESEARCH
FOUNDATION [US/US]; 112 N. Capitol Street, 6
Gilmore Hall, Iowa City, IA 52242 (US).
- (72) Inventors: FLYNN, Ryan; 1089 Foster Road, Iowa City,
IA 52245 (US). XIA, Junyi; 70 Quail Valley Ct., Iowa
City, IA 52246 (US). WALDRON, Timothy, J.; 1004
Penkridge Drive, Iowa City, IA 52245 (US). KIM,
Yusung; 12 Arbury Drive, Iowa City, IA 52246 (US). AL-

LEN, Bryan, G.; 853 Walker Circle, Iowa City, IA 52245
(US). WEARS, Brennen, M.; 2691 Underwood Ave.,
Marshalltown, IA 50158 (US). DING, Hongtao; 2195 Port
Talbot Place, Coralville, IA 52241 (US).

- (74) Agent: WARENZAK, Matthew, P.; Smith, Gambrell &
Russell, Suite 3100, Promenade, 1230 Peachtree Street, At-
lanta, GA 30309 (US).

- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,

[Continued on next page]

- (54) Title: SYSTEM AND METHOD FOR AN INTENSITY MODULATED RADIATION THERAPY DEVICE

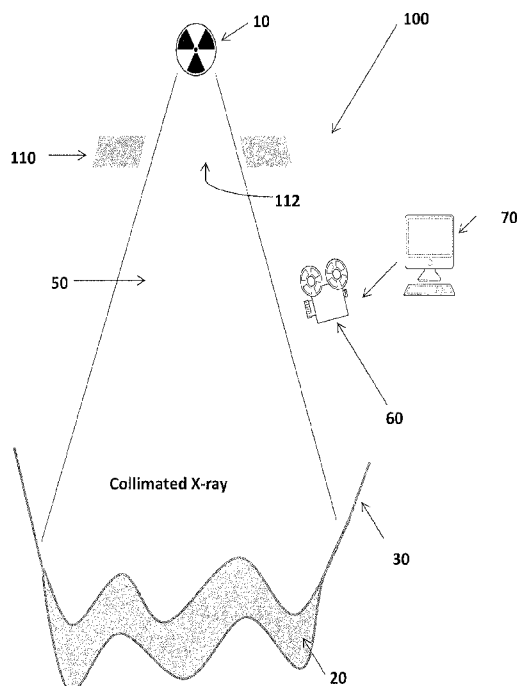


FIG. 1

(57) Abstract: Systems and methods for low energy radiation x-ray radiation therapy system for use at a target within a cavity of a subject. In an aspect, the system uses an aperture shaping device used to shape the radiation beam from the low energy radiation source. In an aspect, the aperture shaping device includes a plurality of leaf assemblies which include leaves configured to form the aperture and engage the radiation beam.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

**SYSTEM AND METHOD FOR AN INTENSITY MODULATED RADIATION
THERAPY DEVICE**

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority from United States Provisional Patent Application No. 62/026,077, filed July 18, 2014, the content of which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

Technical Field

[0002] The invention applies to the fields of radiation therapy.

Related Art

[0003] Intraoperative radiation therapy (IORT) has advantages over conventional external beam radiation therapy (EBRT). Such advantages are the following (1) the biological effectiveness of a single, high dose of radiation is greater than the same dose administered in a fractionated (multi-session) regimen. IORT is performed in a single fraction, so IORT has been known as higher biological effectiveness when compared to small fractions of EBRT. When using IORT, the radiation is directed exactly on the area that a physician/surgeon intends to deliver radiation. Last but not least advantage is the irradiation of the dose-limiting OAR which is closely adjacent to tumor can be spared from radiation during surgery through the manual mobilization of healthy tissues from the treatment volume.

[0004] For this purpose, conventional IORT uses appropriate lead beam absorbers or through the proper use of an electron beam with energies that limit the depth of radiation penetration on deep structures. The current use of low energy x-ray for IORT application is limited to mainly post-lumpectomy breast cancer radiation therapy in which the INTRABEAM®

device (Carl Zeiss Meditec, Oberkochen, Germany) and accelerated partial breast irradiation using single- or multi-lumen high dose rate (HDR) applicators have been used. The single- or multi-lumen devices included Axxent® electronic brachytherapy system (iCAD, Inc., San Jose, CA), Contura® (Bard Biopsy Systems, Tempe, AZ) and MammoSite® ML (Hologic, Inc., Bedford, MA). A hybrid type, combining interstitial and single-entry intracavitary such as SAVI® (Cianna Medical, Inc., Aliso Viejo, CA) and ClearPath® (North American Scientific, Inc., Chatsworth, CA) has been also introduced. The INTRABEAM® device has been also used for post-operative irradiation of brain tumors and cerebral metastases. INTRABEAM® is used as an immediate treatment subsequent to a stereotactic biopsy. Extended study reports of INTRABEAM® in the treatment of brain and cerebral tumors for both children and adults are available. The INTRABEAM provides a point source of 50kV energy x-rays at the center of a spherical applicator. However, the use of the INTRABEAM device is limited to be used in conventional IORT applications such as pancreatic cancer, retroperitoneal sarcoma, and selected genitourinary malignancies, since it is designed specifically for intracavitary application.

[0005] The current standard technique of modern IORT is to use electron energy of 3-12 MeV. This electron based IORT technique utilizes an applicator, which is a set of acrylic cylinders with different sizes, to shape radiation beams. The electron based IORT is performed in the shielded operation rooms in which a miniaturized and mobile-linear accelerator (Mobetron, Intraop Medical, Inc., Sunnyvale, CA, USA) have been installed. However, the Mobetron system is large ($4.91 \text{ m}^3 = 1.98\text{m} \times 1.03 \text{ m} \times 2.41 \text{ m}$) and heavy (2937 lbs) so it is difficult for clinicians to transfer the system among different operation rooms. Also, due to its high energy (6, 9, 12 MeV), the Mobetron system cannot be used in a regular operation room without additional shielding.

[0006] In addition, traditional IORT systems are either very large, such as the Mobetron system, or require several feet of shielding, such as an operating room that is inside a vault housing a linear accelerator. Further, in traditional IORT, there is a problem in defining specific radiation doses as a function of position in the region to be treated. Further, IORT systems traditionally require number therapy sessions. Therefore, there is a need for a system and method that overcomes the limitations discussed above while meeting the aforementioned goals.

SUMMARY OF THE INVENTION

[0007] In an aspect, the invention is a system and method for compact intraoperative low-energy radiation therapy. In an aspect, the system and method require no additional room shielding in operating rooms in which it is intended for use. In an aspect, the invention has a very small footprint and does not require any shielding. In an aspect, the invention overcomes a major problem associated with intraoperative radiation therapy (IORT), which is that defining specific radiation doses as a function of position in the region to be treated is a non-trivial process.

[0008] In an aspect, the system is configured to allow a user to define arbitrary radiation doses both on the surface and at depth inside the cavity of the subject to be treated. In an aspect, the system includes a compact collimation system. In an aspect, the system is configured to utilize a compact collimation system of low-energy x-ray. Such a system enables clinicians to overcome these limitations of current low-energy x-ray solution (INTRABEAM®) for IORT. The system has the ability to deliver highly conformal radiation dose distributions in the surgical suite following tumor resection that improves tumor control rates. This can improve outcomes and enable a reduction in the number of external beam radiation therapy sessions that

the patient must undergo following surgery, reducing cost and improving convenience for patients. Further, the size of the compact collimation system can be configured to be a fraction of the size of traditional systems, including the Mobetron system.

[0009] These and other objects and advantages of the invention will become apparent from the following detailed description of the preferred embodiment of the invention. Both the foregoing general description and the following detailed description are exemplary and explanatory only and are intended to provide further explanation of the invention as claimed.

[0010] The accompanying drawings are included to provide a further understanding of the invention and are incorporated in and constitute part of this specification, illustrate several embodiments of the invention, and together with the description serve to explain the principles of the invention.

BRIEF DESCRIPTION OF THE FIGURES

[0011] FIG. 1 illustrates an intraoperative x-ray therapy system according to an aspect of the present invention.

[0012] FIG. 2a is a schematic representation of a single leaf assembly of an x-ray collimation system according to aspects of the present invention.

[0013] FIG. 2b is a schematic representation of an of an x-ray collimation system according to aspects of the present invention.

[0014] FIG. 3a is a schematic representation of a single leaf assembly of an x-ray collimation system according to aspects of the present invention.

[0015] FIG. 3b is a schematic representation of an x-ray collimation system according to aspects of the present invention.

[0016] FIG. 4 illustrates a 3D surface reconstruction created by a real-time 3D surface imaging system according to an aspect of the present invention.

[0017] FIG. 5 is a block diagram of a computer according to an aspect of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] In the following detailed description of the preferred embodiments, reference is made to the accompanying drawings, which form a part hereof, and within which are shown by way of illustration specific embodiments by which the invention may be practiced. It is to be understood that other embodiments may be utilized and structural changes may be made without departing from the scope of the invention.

[0019] As used in the specification and the appended claims, the singular forms "a," "an" and "the" include plural referents unless the context clearly dictates otherwise. Ranges may be expressed herein as from "about" one particular value, and/or to "about" another particular value. When such a range is expressed, another embodiment includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by use of the antecedent "about," it will be understood that the particular value forms another embodiment. It will be further understood that the endpoints of each of the ranges are significant both in relation to the other endpoint, and independently of the other endpoint.

[0020] "Optional" or "optionally" means that the subsequently described event or circumstance may or may not occur, and that the description includes instances where said event or circumstance occurs and instances where it does not.

[0021] Throughout the description and claims of this specification, the word "comprise" and variations of the word, such as "comprising" and "comprises," means "including

but not limited to," and is not intended to exclude, for example, other additives, components, integers or steps. "Exemplary" means "an example of" and is not intended to convey an indication of a preferred or ideal embodiment. "Such as" is not used in a restrictive sense, but for explanatory purposes.

[0022] Disclosed are components that can be used to perform the disclosed methods and systems. These and other components are disclosed herein, and it is understood that when combinations, subsets, interactions, groups, etc. of these components are disclosed that while specific reference of each various individual and collective combinations and permutation of these may not be explicitly disclosed, each is specifically contemplated and described herein, for all methods and systems. This applies to all aspects of this application including, but not limited to, steps in disclosed methods. Thus, if there are a variety of additional steps that can be performed it is understood that each of these additional steps can be performed with any specific embodiment or combination of embodiments of the disclosed methods.

[0023] As will be appreciated by one skilled in the art, aspects of the current invention may take the form of an entirely hardware embodiment, an entirely software embodiment, or an embodiment combining software and hardware aspects. In an aspect, the current invention can include a combination of physical components configured to perform certain steps and functions (e.g., generating ion beams, moving trimmers configured to shape ion beams, etc.) that are controlled by a combination of hardware and software components. Furthermore, components of the methods and systems may take the form of a computer program product on a computer-readable storage medium having computer-readable program instructions (e.g., computer software) embodied in the storage medium. Any suitable computer-readable

storage medium may be utilized including hard disks, CD-ROMs, optical storage devices, or magnetic storage devices.

[0024] Further, components and methods utilized by the present invention as described below can be performed in a program environment, which may incorporate a general-purpose computer or a special purpose device, such as a hardware appliance, controller, or hand-held computer. In addition, the techniques of the components described herein can be implemented using a variety of technologies known in the art. For example, the methods may be implemented in software executing on a computer system, or implemented in hardware utilizing either a combination of microprocessors or other specially designed application specific integrated circuits, programmable logic devices, or various combinations thereof.

[0025] Some aspects of the methods and systems are described below with reference to block diagrams and flowchart illustrations of methods, systems, apparatuses and computer program products. It will be understood that each block of the block diagrams and flowchart illustrations, and combinations of blocks in the block diagrams and flowchart illustrations, respectively, can be implemented by computer program instructions. These computer program instructions may be loaded onto a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions which execute on the computer or other programmable data processing apparatus create a means for implementing the functions specified in the flowchart block or blocks.

[0026] These computer program instructions may also be stored in a computer readable memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including computer readable instructions for

implementing the function specified in the flowchart block or blocks. The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer-implemented process such that the instructions that execute on the computer or other programmable apparatus provide steps for implementing the functions specified in the flowchart block or blocks.

[0027] Accordingly, blocks of the block diagrams and flowchart illustrations support combinations of means for performing the specified functions, combinations of steps for performing the specified functions, and program instruction means for performing the specified functions. It will also be understood that each block of the block diagrams and flowchart illustrations, and combinations of blocks in the block diagrams and flowchart illustrations, can be implemented by special purpose hardware-based computer systems that perform the specified functions or steps, or combinations of special purpose hardware and computer instructions.

[0028] The invention is directed to an intraoperative radiation therapy (IORT) system. More specifically, the invention is directed to a system and method of low-energy X-ray radiation therapy (herein LexRT). The LexRT system 100, as illustrated in FIG. 1, can be used to overcome limitations of conventional IORT systems to deliver intensity-modulated radiation therapy.

[0029] In an aspect, the LexRT system 100 is configured to use a low-energy x-ray source 10 for the treatment of various forms of cancer treated with radiation therapy in a surgical setting. The types of cancer can include, but are not limited to, sarcomas, lung cancer, pancreatic cancer, and any target 20 found within a cavity 30 of the subject being treated. The LexRT system 100 can deliver intensity-modulated radiation therapy to the targets 20, in which the

intensity modulation is achieved using an aperture shaping device 110 to control the strength and shape of the field of radiation/radiation beam 50 generated by the radiation source 10. In an aspect, the aperture shaping device 110 can comprise an x-ray collimation system 110. In an exemplary aspect, the x-ray collimation system 110 can comprise a multi-leaf collimator (MLC) 110 specifically designed for shaping a radiation beam 50 generated by an x-ray source 10, discussed in more detail below. As illustrated in FIG. 1, the LexRT system 100 can further comprise a surface monitoring system 60, and a computer/computing means 70.

[0030] In an aspect, the x-ray source 10 is a low energy x-ray source 10. Such low energy x-ray sources can include, is not limited to, a kilovoltage-range x-ray source 10. In an exemplary aspect, the low energy x-ray source 20 can range between 50 KV to 69 KV. However, other low energy sources can be used with the LexRT system 100.

[0031] In an aspect, the LexRT system 100 can be configured to digitize the treated surface 20 and surrounding tissue in a computer model by capturing a surface image using a surface monitoring system 60. In an aspect, the surface monitoring system 100 can be a 3D surface monitoring system 60. In an aspect, the 3D surface monitoring system 60 can include a real-time 3D surface imaging system 60. In an aspect, the real-time 3D surface imaging system 60 includes 3D depth cameras, a processor, and signal processing software. Examples of surface monitoring devices include, but are not limited to, the Kinect system (Microsoft Corporation, Redmond, CA), the AlignRT system (Vision RT Ltd, London, UK), the CRad Catalyst system (C-RAD AB, Sweden), or any other device configured to capture an image digitally for use with a computer model. FIG. 4 illustrates a 3D abdominal cavity generated by the real-time 3D imaging system 60. In other aspects the imaging system can be configured to have accuracy to 2

mm through use of a higher resolution 3D camera system and improved reconstruction algorithms, which is sufficient for accurate radiation dose calculation.

[0032] After capturing a digital image of the surface of the target 20 and surrounding tissue, a radiation plan in which the tissues/target 20 to be treated and the doses desired are rapidly defined by computerized means 70, discussed below. The surface imaging system 60 can also be controlled and work with the computer 70. Following the generation of the radiation plan, the dose is delivered to the patient.

[0033] In an aspect, the combination of the surface imaging system 60 and computerized means 70 used in the generation of the radiation plan by the LexRT system 100 is used to rapidly acquire the tissue map at a variable temporal rate following the initial surface capture of the target 20 and during the radiation process. Each acquired tissue map will be registered to a reference map to quantify the tissue motion that occurred during the delivery. Motion thresholds can be defined on a point-by-point basis, if the tissue motion exceeds the motion threshold, the radiation beam 50 will be paused while the clinical team intervenes. Intervention can be by moving the tissue back to the original configuration, applying suction to remove fluid buildup, or by generating a new, adapted, radiation plan based on the new tissue configuration. Once the intervention is complete, the beam is turned back on and the treatment proceeds.

[0034] In an aspect, the aperture shaping device 110 can be configured for use with a low-energy x-ray source 10 and the surface imaging system 60 and computerized means 70 to treat a target 20 of the subject. In addition, the aperture shaping device 110 can be compact, discussed in more detail below. In an aspect, the LexRT system 100 can be configured to deliver the desired dose distribution/shaped-beam 50 to the target 20 within the surgical cavity 30 by

intensity modulation through the use of an aperture shaping device 110 that comprises a -energy collimation system 110 configured to interact within the radiation beam 50 by temporal and spatial modulation. The surface monitoring system 60 provides images for treatment planning and motion monitoring of surgical cavity 30. In an exemplary aspect, the x-ray collimation system 110 can be configured to weigh about 100 lbs., which is about 3% of the weight of the Mobetron system discussed above.

[0035] In an aspect, the LexRT system 100 can be configured to deliver intensity modulated radiation therapy by means of temporal modulation by physically moving the field of the energy beam 50, defined by an aperture 112 within the aperture shaping device 110, to a range of positions throughout the treatment region. At each position, the intensity of radiation delivered to the tissue/target 20 can be defined by controlling the amount of time the source 10 points at the position or by changing the distance between the source 10 and the tissue 20.

[0036] FIGS. 2a-b illustrate an aperture shaping device 110 in the form of a collimation system 110 according to an aspect of the present invention. More specifically, FIGS. 2a-b illustrate an x-ray collimation system 110 in the form of a multi-leaf collimator 110. In an aspect, the collimation system 110 comprises a series of leaf assemblies 120 mounted on a housing 150. The housing 150 can house the x-ray source 10. The leaf assemblies 120 include a leaf 122, a motion translation assembly 123, and a driving mechanism 124. The series of leaf assemblies 120 can be configured to operate independently from one another in order to position their individual leaves 122 to shape the x-ray beam 50 as it exits an aperture 112 of the housing 150. The leaves 122 can be comprised of various radiation blocking materials known in the art. In addition, the leaves 122 can take various shapes and forms, including, but not limited to, rectangular.

[0037] FIG. 2a illustrates a configuration of a single leaf assembly 120 of the x-ray collimation system 110 of FIG. 2b. Each leaf 122 is connected to a motion translation assembly 123 that is driven by a driving mechanism 124. The motion translation assembly 123 is configured to translate a linear motion from the driving mechanism 124 in one direction to another direction of linear motion to control the movement of the leaf 122. In an aspect, the motion translation assembly 123 translates the linear motion from the driving mechanism 124 approximately ninety (90) degrees.

[0038] In an aspect, the driving mechanism 124 comprises a stepper motor 126 configured to drive a lead screw 128, nut 130, and guide 132 combination. The motion translation assembly 123, components of which are discussed below, is then actuated by the stepper motor 126 to move the leaf 122. The computerized means 70 can be configured to control the activity of the driving mechanism 124. The stepper motor 126 can be coupled to a motor mount 127 attached to the housing 150 of the x-ray collimation system 110.

[0039] The motion translation assembly 123, as illustrated in FIG. 2a, includes a connecting wire 125 and guide mount 134, discussed in more detail below. The connecting wire 125 is connected to the leaf 122. The lead screw 128 attached to the stepper motor 126 is used to translate the motor's radial motion into a linear motion to control the movement of the connecting wire 125. The nut 130 connected to the connecting wire 125, wherein the nut 130 is driven along the lead screw 128, controls the movement of the connecting wire 125. A guide 132 can be used with the nut 130 to translate the linear motion to the connecting wire 125. A guide mount 134, connected to the housing 150, can be used to assist with the guide 130. The guide 130 can be anchored between the guide mount 134 and motor mount 127 for each leaf assembly

120. In addition, the guide mount 134 can include an aperture (not shown) through which the connecting wire 125 can travel linearly.

[0040] In an aspect, the connecting wire 125 is configured to be bendable. In such aspects, the bendable connecting wire 125 can translate the linear motion of the motor 126, more specifically the nut 130 driven by the lead screw 128, allowing for the motor 126 to be placed at different angles and distances from each leaf 122. This allows the motors 126 to be placed above the leaves 122, creating a more compact configuration of the leaf assemblies 120 within the housing 150 of the collimator 110. A wire mount 136, shown along the bottom of the housing 150, can assist with the bending of the connecting wire 125. In an aspect, the wire mount 136 can include a wire guide aperture (not shown) that assists with the guiding of the connecting wire 125.

[0041] The leaf 122 can be found on the end of the connecting wire 125 opposite the driving mechanism 124. The leaf 122 can be supported by a leaf mount 138. A compression spring 140 can be placed between the leaf mount 138 and the leaf 122. The compression spring 140 is configured to keep the connecting wire 125 in tension and act as a failsafe by closing the leaf 122 if a component in the x-ray collimation system 110 were to break or fail. Wire tension also helps to improve the position accuracy of the leaf 122. The leaves 122 of the leaf assemblies 120 can be arranged so as to function to shape the aperture 112 through which the radiation beam 50 travels. As shown in FIG. 2b, the leaves 122 are arranged in two parallel rows opposite each other to form the aperture 112. However, in other embodiments, the leaves 122 can have other desired arrangements, including, but not limited to, circular placement.

[0042] FIGS. 3a-b illustrate leaf assemblies 220 of an x-ray collimation system 210 according to another embodiment of the present invention. The collimation system 210 as

illustrated in FIGS. 3a-b can include a housing (not shown), and housing components, similar to the collimation system 110 illustrated in FIG. 2b. The leaf assemblies 220 of the current embodiment provide the same function as those described in relation to FIGS. 2a-b, including leaves 222, a motion translation assembly 223, and a driving mechanism 224. Namely, the individual leaf assemblies 220 include a leaf 222 that is driven/controlled by a driving mechanism 224. In an aspect, the driving mechanism 224 is a linear actuator 226 with a connecting rod 227. The linear actuator 226 can be controlled by the computing means 70 discussed above and below. The linear actuator 226 drives the motion translation assembly 223 to drive the leaf 222. The motion translation assembly 223 comprises a linkage 228 and a leaf connecting rod 230. The connecting rod 227 that is connected to the linkage 228. The linkage 228 is then connected to the leaf 222 through a leaf connecting rod 230. In an aspect, the connecting rod 227 is pivotably connected to both the linear actuator 225 and the linkage 228 and the linkage 228 is pivotably connected to the leaf connecting rod 230. In addition, the linkage 228 can be pivotably connected to the housing or other linkages 228 of other assemblies 220 at a midpoint. In an aspect, ball pivot joints are used to increase the degrees of freedom between the connecting rods 227, 230 and the linkage 228 to allow the actuators 226 to be positioned out of the line of motion of the leaves 222 while translating the vertical linear motion of the driving mechanism 224 into a horizontal linear direction of movement of the leaf 222. This allows the actuators 226 to be placed above the leaves 222 to reduce the size of the device 210. As shown in FIGS. 3a-b, the linkage 228 has an L-shape to assist in this translation.

[0043] Other collimation systems of other embodiments can be formed of other components and in different assemblies.

[0044] As discussed above, the LexRT system 100 can be configured to be controlled by computerized means 70. The computerized means 70 can include a fast dose application and signal processing software, discussed in more detail below. FIG. 5 is a block diagram illustrating an exemplary computer 70 for performing a portion of disclosed methods according to an embodiment of the present invention. This exemplary computer 70 is only an example of an operating environment and is not intended to suggest any limitation as to the scope of use or functionality of operating environment architecture. Neither should the computer 70 be interpreted as having any dependency or requirement relating to any one or combination of components illustrated in the exemplary operating environment.

[0045] Further, one skilled in the art will appreciate that the systems and methods disclosed herein can utilize a general-purpose computing device in the form of a computer 70. The methods discussed above can be performed by the computer 70. For example, the computer 70 can perform the duties and responsibilities of the controller discussed above.

[0046] The components of the computer 70 can comprise, but are not limited to, one or more processors or processing units 303, a system memory 312, and a system bus 313 that couples various system components including the processor 303 to the system memory 312. In the case of multiple processing units 303, the system can utilize parallel computing.

[0047] The system bus 313 represents one or more of several possible types of bus structures, including a memory bus or memory controller, a peripheral bus, an accelerated graphics port, and a processor or local bus using any of a variety of bus architectures. By way of example, such architectures can comprise an Industry Standard Architecture (ISA) bus, a Micro Channel Architecture (MCA) bus, an Enhanced ISA (EISA) bus, a Video Electronics Standards Association (VESA) local bus, an Accelerated Graphics Port (AGP) bus, and a Peripheral

Component Interconnects (PCI), a PCI-Express bus, a Personal Computer Memory Card Industry Association (PCMCIA), Universal Serial Bus (USB) and the like. The bus 313, and all buses specified in this description can also be implemented over a wired or wireless network connection and each of the subsystems, including the processor 303, a mass storage device 304, an operating system 305, IORT software 306, data 307, a network adapter 308, system memory 312, an Input/Output Interface 310, a display adapter 309, a display device 311, and a human machine interface 302, can be contained within one or more remote computing devices 314a,b,c at physically separate locations, connected through buses of this form, in effect implementing a fully distributed system.

[0048] The computer 70 typically comprises a variety of computer readable media. Exemplary readable media can be any available media that is accessible by the computer 70 and comprises, for example and not meant to be limiting, both volatile and non-volatile media, removable and non-removable media. The system memory 312 comprises computer readable media in the form of volatile memory, such as random access memory (RAM), and/or non-volatile memory, such as read only memory (ROM). The system memory 312 typically contains data such as data 307 and/or program modules, such as operating system 305 and IORT software 306, that are immediately accessible to and/or are presently operated on by the processing unit 303. In an aspect, the IORT software 306 can be configured to control the various systems of the LexRT system 100, including, but not limited to, the collimator system 110 and the 3D real-time imaging system 60, and be configured to be able to process signals from the real-time 3D surface imaging system 60, and calculating an accurate radiation dose.

[0049] In another aspect, the computer 70 can also comprise other removable/non-removable, volatile/non-volatile computer storage media. By way of example, FIG. 4 illustrates

a mass storage device 304, which can provide non-volatile storage of computer code, computer readable instructions, data structures, program modules, and other data for the computer 70. For example and not meant to be limiting, a mass storage device 304 can be a hard disk, a removable magnetic disk, a removable optical disk, magnetic cassettes or other magnetic storage devices, flash memory cards, CD-ROM, digital versatile disks (DVD) or other optical storage, random access memories (RAM), read only memories (ROM), electrically erasable programmable read-only memory (EEPROM), and the like.

[0050] Optionally, any number of program modules can be stored on the mass storage device 304, including by way of example, an operating system 305 and the IORT software 306. Each of the operating system 305 and IORT software 306 (or some combination thereof) can comprise elements of the programming and the IORT software 306. Data 307 can also be stored on the mass storage device 304. Data 307 can be stored in any of one or more databases known in the art. Examples of such databases include DB2®, Microsoft® Access, Microsoft® SQL Server, Oracle®, MySQL, PostgreSQL, and the like. The databases can be centralized or distributed across multiple systems.

[0051] In another aspect, the user can enter commands and information into the computer 70 via an input device (not shown). Examples of such input devices comprise, but are not limited to, a keyboard, pointing device (*e.g.*, a “mouse”), a microphone, a joystick, a scanner, tactile input devices such as gloves, cameras, and other body coverings, and the like. These and other input devices can be connected to the processing unit 303 via a human machine interface 302 that is coupled to the system bus 313, but can be connected by other interface and bus structures, such as a parallel port, game port, an IEEE 1394 Port (also known as a Firewire port), a serial port, or a universal serial bus (USB).

[0052] In yet another aspect, a display device 311 can also be connected to the system bus 313 via an interface, such as a display adapter 309. It is contemplated that the computer 301 can have more than one display adapter 309 and the computer 301 can have more than one display device 311. For example, a display device can be a monitor, an LCD (Liquid Crystal Display), or a projector. In addition to the display device 311, other output peripheral devices can comprise components such as speakers (not shown) and a printer (not shown) which can be connected to the computer 301 via Input/Output Interface 310. Any step and/or result of the methods can be output in any form to an output device. Such output can be any form of visual representation, including, but not limited to, textual, graphical, animation, audio, tactile, and the like.

[0053] The computer 70 can operate in a networked environment using logical connections to one or more remote computing devices 314a,b,c. By way of example, a remote computing device can be a personal computer, a laptop computer, portable computer, a server, a router, a network computer, a peer device or other common network node, and so on. Logical connections between the computer 70 and a remote computing device 33a,b,c can be made via a local area network (LAN) and a general wide area network (WAN). Such network connections can be through a network adapter 308. A network adapter 308 can be implemented in both wired and wireless environments. Such networking environments are conventional and commonplace in offices, enterprise-wide computer networks, intranets, and the Internet 315.

[0054] According to an aspect, the computer 70, via the IORT software 306, can control the operation of the LexRT system 100 according to an aspect.

[0055] For purposes of illustration, application programs and other executable program components such as the operating system 305 are illustrated herein as discrete blocks, although it

is recognized that such programs and components reside at various times in different storage components of the computing device 70, and are executed by the data processor(s) of the computer. An implementation of the IORT software 306 can be stored on or transmitted across some form of computer readable media. Any of the disclosed methods can be performed by computer readable instructions embodied on computer readable media. Computer readable media can be any available media that can be accessed by a computer. By way of example and not meant to be limiting, computer readable media can comprise “computer storage media” and “communications media.” “Computer storage media” comprise volatile and non-volatile, removable and non-removable media implemented in any methods or technology for storage of information such as computer readable instructions, data structures, program modules, or other data. Exemplary computer storage media comprises, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by a computer.

[0056] While the foregoing written description of the invention enables one of ordinary skill to make and use what is considered presently to be the best mode thereof, those of ordinary skill will understand and appreciate the existence of variations, combinations, and equivalents of the specific embodiment, method, and examples herein. The invention should therefore not be limited by the above described embodiment, method, and examples, but by all embodiments and methods within the scope and spirit of the invention. To the extent necessary to understand or complete the disclosure of the present invention, all publications, patents, and patent applications

mentioned herein are expressly incorporated by reference therein to the same extent as though each were individually so incorporated.

[0057] Having thus described exemplary embodiments of the present invention, those skilled in the art will appreciate that the within disclosures are exemplary only and that various other alternatives, adaptations, and modifications may be made within the scope of the present invention. Accordingly, the present invention is not limited to the specific embodiments as illustrated herein, but is only limited by the following claims.

CLAIMS

What is claimed is:

1. An aperture shaping device configured for use with a low energy radiation beam, the aperture shaping device comprising:
 - a. a plurality of leaf assemblies, each of the leaf assemblies comprising:
 - i. a leaf configured to interact with the low energy radiation beam;
 - ii. a driving mechanism configured to drive the leaf to interact with the low energy radiation beam; and
 - iii. a motion translation assembly configured to translate a linear motion from the driving mechanism to a different linear direction of travel for the leaf, wherein the leaves are oriented to form the aperture.
2. The aperture shaping device of claim 1, wherein the different linear direction of travel for the leaf is rotated approximately ninety degrees from the linear motion of the driving mechanism.
3. The aperture shaping device of claim 2, wherein the linear direction of the driving mechanism is vertical, allowing the driving mechanism to be oriented vertically above the leaf.
4. The aperture shaping device of claim 1, wherein each of the plurality of leaf assemblies is configured to operate independently of each other.


5. The aperture shaping device of claim 1, wherein the motion translation assembly comprises a connecting wire connected to the driving mechanism and the leaf, wherein the wire is configured to bend in order to translate the linear direction of the driving mechanism.
6. The aperture shaping device of claim 5, wherein the driving mechanism comprises:
 - a stepper motor;
 - a lead screw; and
 - a nut connected to the connecting wire, wherein the stepper motor rotationally drives the lead screw to drive the nut to drive the connecting wire in a linear direction.
7. The aperture shaping device of claim 5, wherein at least one of the plurality of leaf assemblies further comprises a compression spring engaged with the leaf.
8. The aperture shaping device of claim 1, wherein the driving mechanism and the motion translation assembly of at least one of the plurality of leaf assemblies are pivotably connected to one another.
9. The aperture shaping device of claim 8, wherein the driving mechanism comprises a linear actuator pivotably connected to a connecting rod, wherein the motion translation assembly comprises a linkage pivotably connected to the connecting rod and the leaf.

10. The aperture shaping device of claim 1, further comprising a housing configured to house a radiation source that generates the low energy radiation beam.
11. The aperture shaping device of claim 1, wherein the driving mechanism is oriented above the leaf for at least one of the plurality of leaf assemblies.
12. A low energy radiation x-ray radiation therapy system for use at a target within a cavity of a subject, the system comprising:
 - a. a low energy radiation source configured to generate a radiation beam;
 - b. a surface monitoring system configured to generate images of the target;
 - c. a computer configured to communicate with the surface monitoring system; and
 - d. an aperture shaping device configured to shape the radiation beam, the aperture shaping device comprising:
 - i. a housing;
 - ii. a plurality of leaf assemblies mounted on the housing, each of the leaf assemblies comprising:
 - A. a leaf configured to interact with the low energy radiation beam;
 - B. a driving mechanism configured to drive the leaf to interact with the low energy radiation beam; and
 - C. a motion translation assembly configured to translate a linear motion from the driving mechanism to a different linear direction of travel for the leaf, wherein the leaves are oriented to form the aperture.

13. The system of claim 12, wherein the plurality of leaf assemblies are configured to operate independently of one another.
14. The system of claim 13, wherein the computer is configured to control the plurality of leaf assemblies.
15. The system of claim 12, wherein the different linear direction of travel for the leaf is rotated approximately ninety degrees from the linear motion of the driving mechanism for at least one of the plurality of leaf assemblies.
16. The system of claim 12, wherein for each of the plurality of leaf assemblies the motion translation assembly comprises a connecting wire connected to the driving mechanism and the leaf, wherein the wire is configured to bend in order to translate the linear direction of the driving mechanism.
17. The system of claim 12, wherein for each of the plurality of leaf assemblies the driving mechanism and the motion translation assembly are pivotably connected to one another.
18. The system of claim 17, wherein the driving mechanism comprises a linear actuator pivotably connected to a connecting rod, wherein the motion translation assembly comprises a linkage pivotably connected to the connecting rod and the leaf.

19. The system of claim 12, wherein the driving mechanism is oriented above the leaf for at least one of the plurality of leaf assemblies.
20. An aperture shaping device configured for use with a low energy radiation beam, the aperture shaping device comprising:
- a. a housing configured to house a low energy radiation source configured to generate a low energy radiation beam to be delivered at a target;
 - b. a plurality of leaf assemblies, each of the leaf assemblies comprising:
 - i. a leaf configured to interact with the low energy radiation beam;
 - ii. a driving mechanism configured to drive the leaf to interact with the low energy radiation beam, the driving mechanism oriented above the leaf; and
 - iii. a motion translation assembly configured to translate a linear motion from the driving mechanism to a different linear direction of travel for the leaf, wherein the leaves are oriented to form the aperture.

1/5

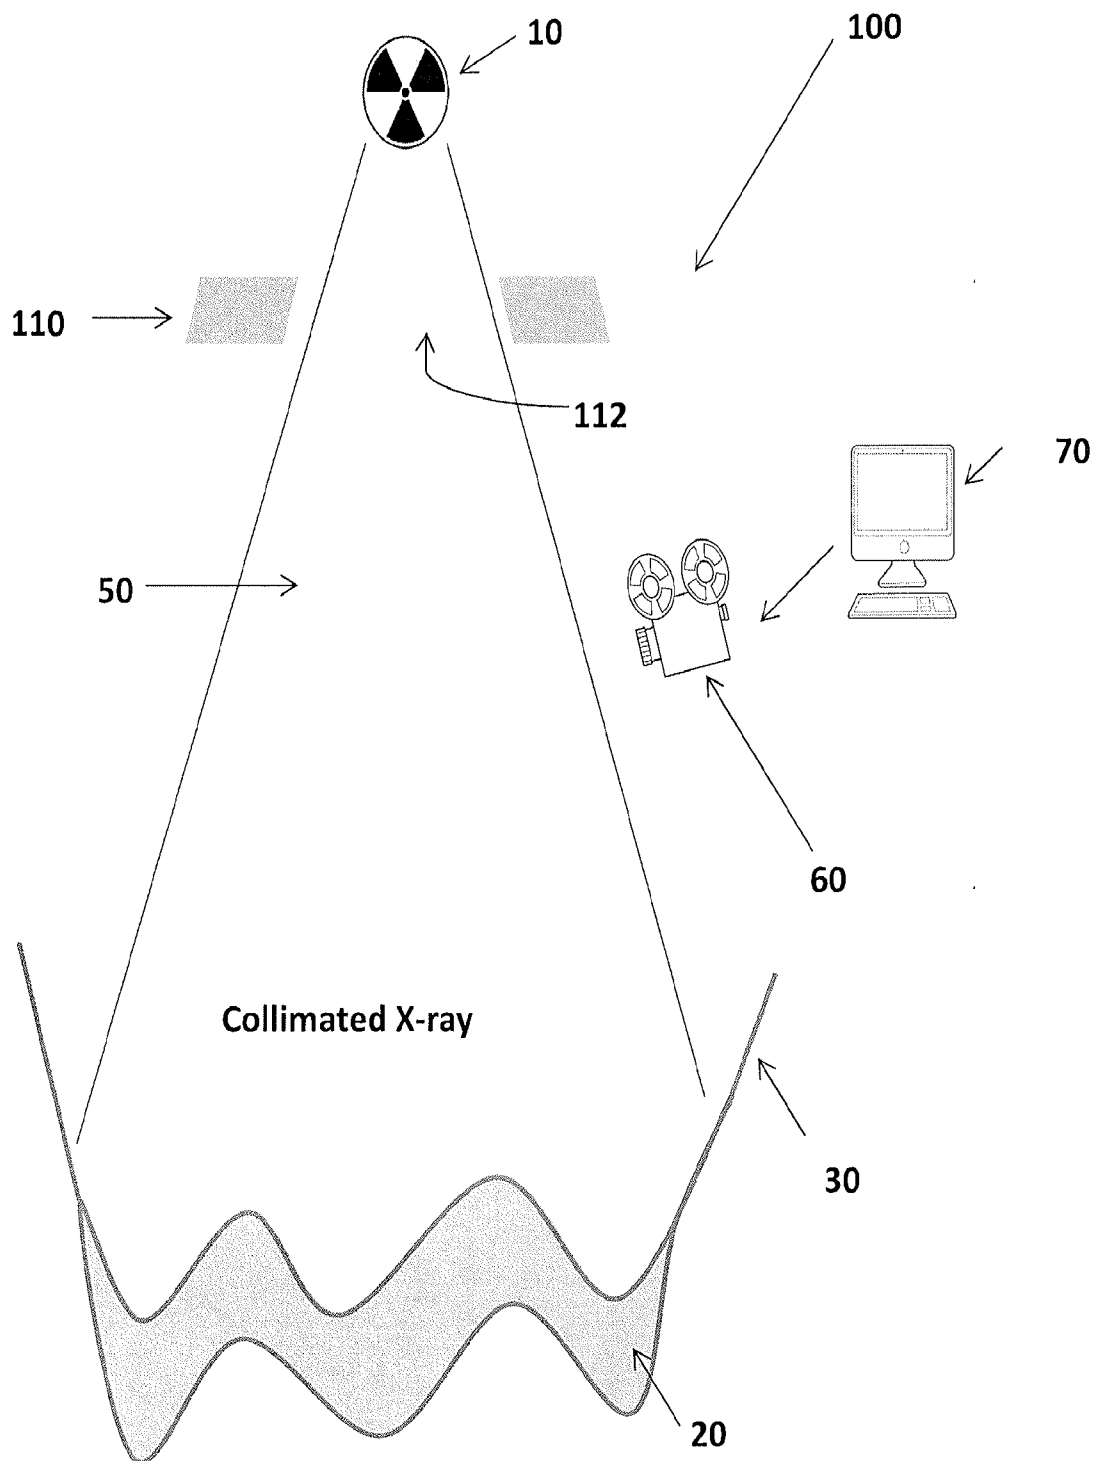**FIG. 1**

2/5

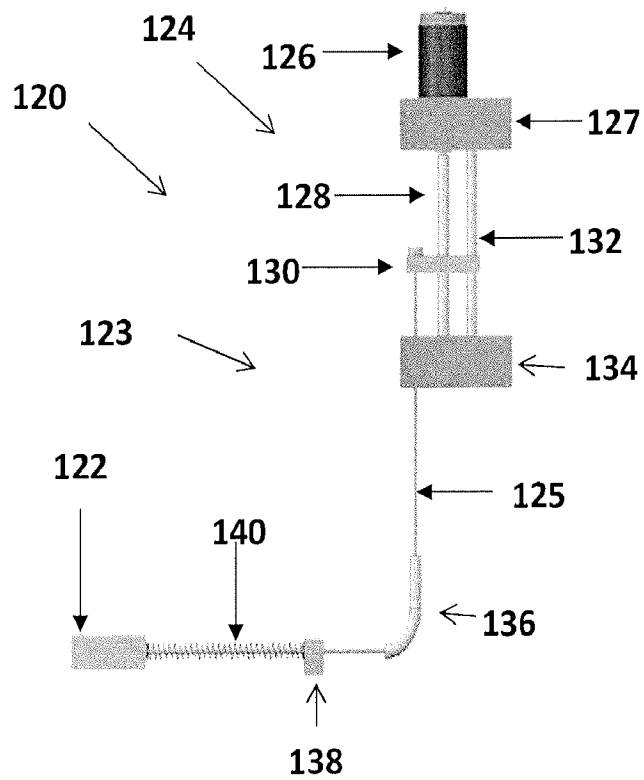


FIG. 2a

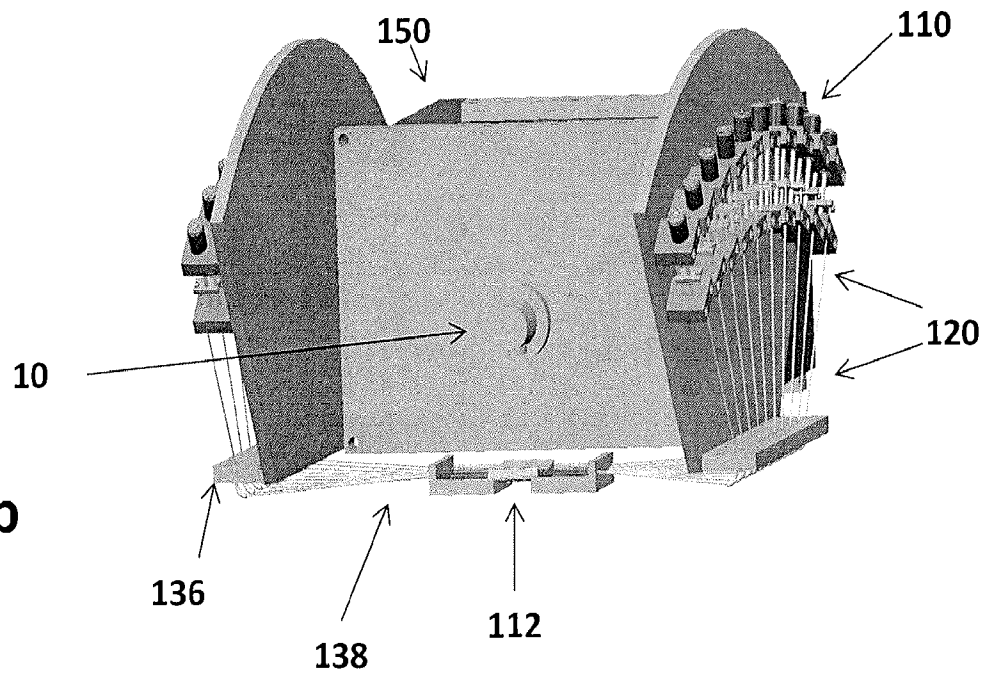


FIG. 2b

3/5

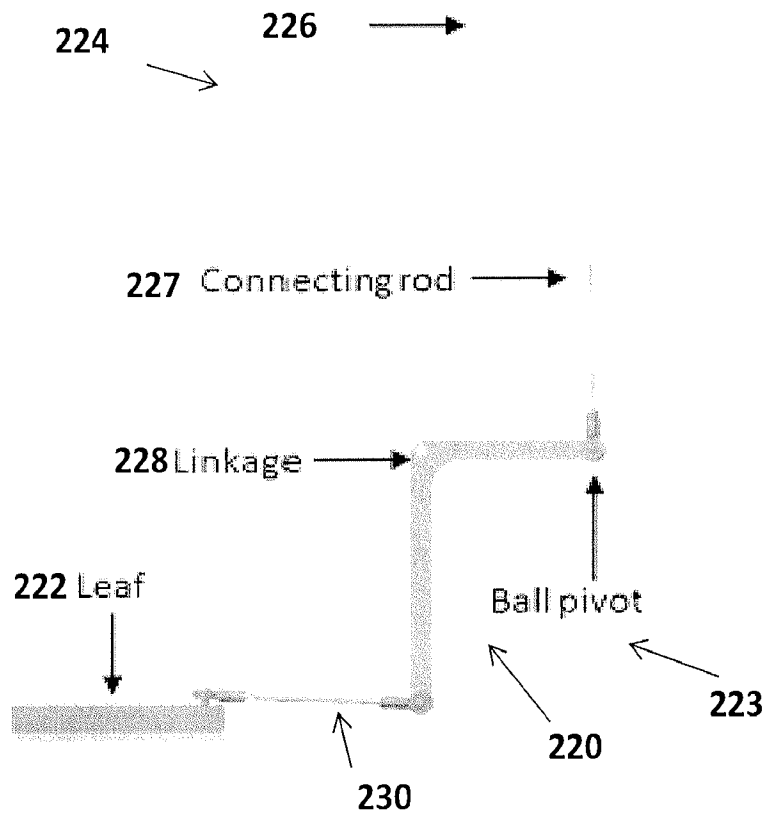
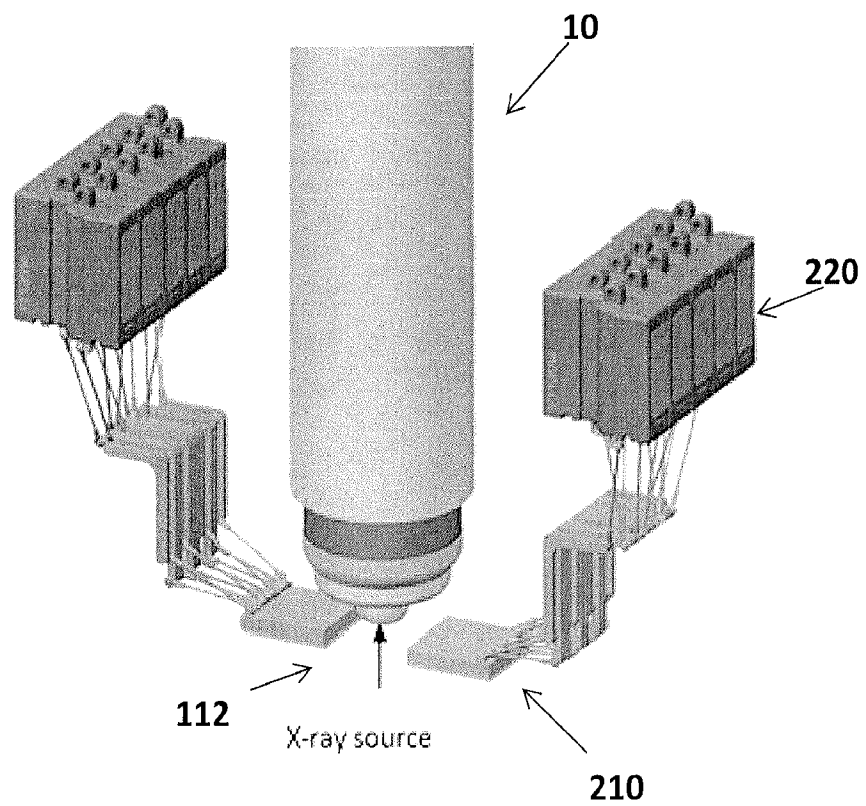


FIG. 3a

FIG. 3b



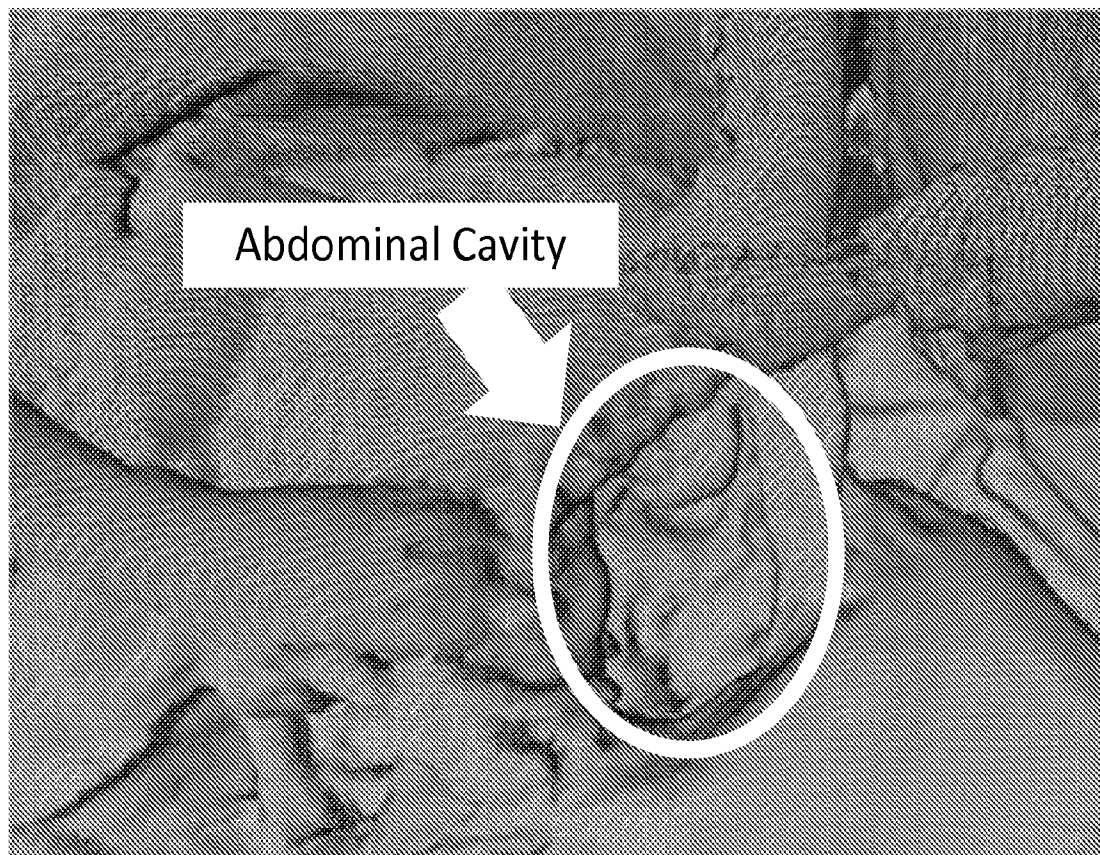
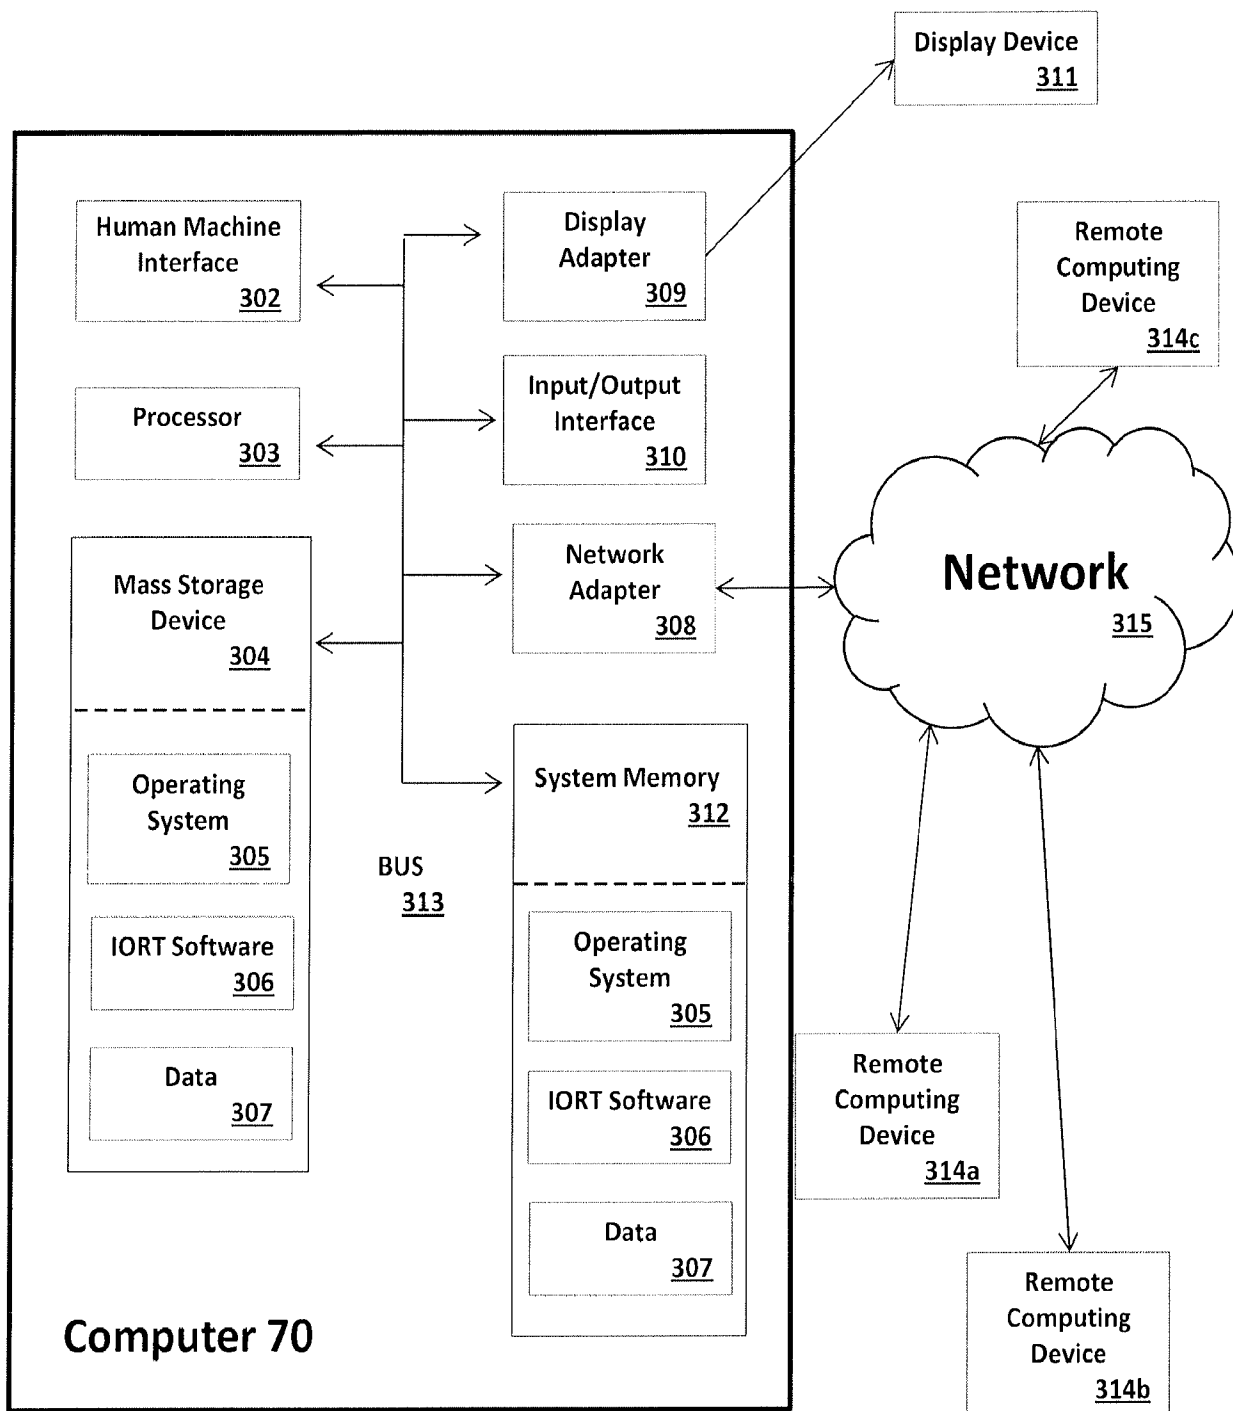


FIG. 4

5/5

**Fig. 5**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US15/41070

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61N 5/10; G21K 1/04, 5/04 (2015.01)

CPC - A61N 5/1045; G21K 1/046

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): A61N 5/00, 5/01, 5/10; G21K 1/02 1/04, 1/10, 3/00, 5/04 (2015.01)

CPC: A61N 5/00, 5/10, 5/1036, 5/1042, 5/1045, 5/1047, 2005/1095; G21K 1/02, 1/025, 1/04, 1/043, 1/046, 5/00, 5/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatSeer (US, EP, WO, JP, DE, GB, CN, FR, KR, ES, AU, IN, CA, INPADOC Data); ProQuest (Derwent, INSPEC, NTIS, PASCAL, Current Contents Search, Dissertation Abstracts Online, Inside Conferences); EBSCO Discovery Service; Google Scholar; KEYWORDS: leaf, leaves, collimator, shaping, radiation, radiotherapy, drive, motor, actuator, linear, wire, cable, pivot, linkage

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/0001295 A1 (JOHNSEN, S) January 01, 2009; abstract; figures 3-5B; paragraphs [0012, 0036-0038]	1-4 and 11
Y		5-10 and 12-20
Y	US 4,868,843 A (NUNAN, C) September 19, 1989; figures 6-8; column 5, lines 27-52; column 11, lines 10-15; column 17, lines 31-58	5-7 and 12-19
Y	US 2002/0126799 A1 (SALADIN, J et al.) September 12, 2002; abstract; figure 1; paragraph [0015]	7
Y	US 6,730,924 B1 (PASTYR, O et al.) May 04, 2004; figure 11; column 3, lines 45-52; column 11, lines 58-68; column 12, lines 1-24	8, 9, 17, and 18
Y	US 6,487,273 B1 (TAKENAKA, J et al.) November 26, 2002; abstract; figure 1; column 11, lines 61-63	10 and 12-20
A	US 2005/0063516 A1 (KATO, K et al.) March 24, 2005; entire document	1-20
A	US 6,266,393 B1 (EIN-GAL, M) July 24, 2001; entire document	1-20
A	US 6,240,161 B1 (SIOCHI, R) May 29, 2001; entire document	1-20

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 September 2015 (29.09.2015)

Date of mailing of the international search report

23 OCT 2015

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774