

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3524560 T3**

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **B 66 B 5/02 (2006.01)** **B 66 B 1/30 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2021-03-15**
- (80) Dato for Den Europæiske Patentmyndigheds
bekendtgørelse om meddelelse af patentet: **2021-01-13**
- (86) Europæisk ansøgning nr.: **18156442.8**
- (86) Europæisk indleveringsdag: **2018-02-13**
- (87) Den europæiske ansøgnings publiceringsdag: **2019-08-14**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV
MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **KONE Corporation, Kartanontie 1, 00330 Helsinki, Finland**
- (72) Opfinder: **POKKINEN, Olli, c/o KONE Corporation, Kartanontie 1, 00330 Helsinki, Finland**
Nakari, Arto, c/o KONE Corporation, Kartanontie 1, 00330 Helsinki, Finland
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Strandvejen 70, 2900 Hellerup, Danmark**
- (54) Benævnelse: **ELEVATOR MED BACKUP-STRØMFORSYNING**
- (56) Fremdragne publikationer:
EP-A1- 3 228 572
JP-A- 2003 020 171
JP-A- 2010 208 764
JP-B2- 5 743 345
US-A1- 2011 120 810

DESCRIPTION

[0001] The present invention relates to an elevator comprising an elevator motor and an elevator drive comprising a backup power supply and an emergency drive module to enable release of trapped passengers in case of a power fault. The power for the emergency drive module is obtained from the backup power supply. The elevator drive comprises a drive housing and the backup power supply is located in a separate backup module.

[0002] JP 5 743345 B2 discloses an elevator i according to the preamble of claim 1, in which a battery unit is provided in addition to the power receiving unit and the main circuit unit. Said battery unit is mounted in the elevator machine room side by side with the power receiving unit and the main circuit unit, wherein a casing is provided which is designed as a uniform casing shared by the mentioned units.

[0003] JP 2010 208764 A also discloses an elevator comprising a control apparatus provided in the hoistway. The control apparatus comprises respective devices, such as a resistor, a power-device, a control device and a power-related device including a capacitor that provides backup power in the event of a power outage of the external power source. The devices are arranged within a common casing.

[0004] It is object of the invention to provide an elevator with the option of a manual and/or automatic emergency operation at low costs.

[0005] The object is solved with an elevator according to claim 1. Preferred embodiments of the invention are subject matter of the dependent claims. Advantageous embodiments of the invention are also disclosed in the description and drawings.

[0006] According to the invention, the separate backup module is releasably supported in a mounting position at the drive housing of the elevator drive. The backup module comprises an insulated backup module housing and an electric interface which connects to a complementary interface located at the drive housing. The backup module housing is accommodated in a recess of an edge of the drive housing.

[0007] Preferably, the mechanical effort for the connection of the backup power supply to the elevator drive is minimized by a plug-connection.

[0008] Furthermore, by plugging the backup module in the recess of an edge of the drive housing all the relevant components regarding the elevator drive, including the backup power supply are integrated so that the costs for production and maintenance are reduced. The backup module can be detached from the drive housing very easily, preferably with a snap-lock connection, so that preferably no tools are necessary to change the backup module. Thus, replacement or maintenance of the backup module is easily possible. Preferably, the backup module housing or/and the drive housing are embodied as plastic housings which isolate all

the electric components from being accessible. By this means, the operation reliability is improved and the danger of electric shock is essentially reduced. In plastic housings preferably a metal jacket is located inside the plastic housing to improve the EMC (electromagnetic compatibility).

[0009] The drive housing could preferably also be an aluminum housing. This improves EMC compared to a plastic housing. An aluminum housing could be used preferably both for the backup module and the drive. Preferably the aluminum housing could be isolated to avoid danger of electric shocks. However, this is not necessary as the battery cells/supercapacitors can be set far enough from the backup module housing or they might have internal/own isolations. The above mentioned plastic or aluminum housings can be used both for the drive housing as well as for the backup module.

[0010] As the backup module housing is accommodated in a recess of an edge of the drive housing, the backup module housing and the drive housing may form an aligned outer surface which is insensitive against mechanical impact and dirt. In case the recess is located in an edge of the drive housing, the backup module has two outer surfaces which are extending in a 90°-angle (in case of a typical rectangular drive housing). Thus, the backup module can be easily handled when being mounted or detached from the drive housing. This geometry further allows an easy guide for the backup module during plugging and an easy snap-lock connection. Further, generally the concept of the backup module being integrated in the drive housing avoids any separate additional housings with a corresponding interface wiring between the elevator drive and the backup module.

[0011] Preferably, the outer surfaces of the backup module housing are aligned with the corresponding surfaces of the drive housing in the mounting position. By this means, the danger of damaging the backup module is reduced as there are no edges protruding from the surface of the drive housing. Further the whole arrangement is insensitive against dirt.

[0012] Preferably, the electrical interface of the backup module and the complementary interface of the elevator drive are located in areas of the drive housing and backup module housing which do not form outer surfaces after the backup module is mounted in the drive housing. Via this measure, the electric contactors between the elevator drive and the backup module are covered by the drive housing and the backup module housing when the backup module is mounted or plugged into the accommodation recess of the drive housing. This again reduces the danger of electric shock to maintenance persons and on the other hand improves the operational liability of the whole elevator.

[0013] In a preferred embodiment of the invention, the electrical interface and the complementary interface of the drive housing are each covered by movable isolations. These movable isolations guarantee that the electric contacts of the electric interface and complementary interface are covered even when the backup module is not plugged in its mounting position in the drive housing so that the danger of electric shock of maintenance technicians is essentially reduced.

[0014] Preferably, in this case, the movable isolations are movable by at least one protrusion in the vicinity of the electric interface or complementary interface of the respective other housing or by the electric contacts of the electric interface or complementary interface themselves. That means, the electric contacts and/or protrusion of one component (backup module, elevator drive) moves away the movable isolations of the other component, respectively. This means that any movable isolations are automatically removed when the backup module is plugged into the drive housing, so that the electric connection between the electric contacts of the electric interface and of the complementary interface is enabled.

[0015] Preferably, the elevator drive comprises a charging circuit for the backup power supply so that all relevant components regarding the emergency operation of the elevator are integrated with the elevator drive. This reduces production as also maintenance costs.

[0016] Preferably, the backup power supply comprises a battery, a supercapacitor or a combination of per se known power storing components.

[0017] In a preferred embodiment of the invention, the drive housing and the module housing comprise complementary guides which are configured to define a linear movement of the module housing with respect to the drive housing, which movement is limited by stop faces, which enable a reliable connection of the electric interface with the complementary interface. Thus, the guide surfaces guide the backup module into a correct electric connection with the drive when being plugged into the drive housing. This again improves the operation reliability of the whole arrangement and leads to a longer lifetime of the electric contacts of the electric interface and the complementary interface.

[0018] Preferably, the drive housing is installed in the elevator shaft in the vicinity of an elevator landing door or access opening. This enables the maintenance person to replace or maintain the power supply as well as the elevator drive without entering the shaft. The corresponding work may be done from the landing floor through the open landing door or from the car roof.

[0019] Mostly the backup power supply may be built by batteries, e.g. Lead-Batteries or Li-ion batteries. But they may be formed also from supercapacitors or other energy storages. Hereinafter when referring to "battery" any kind of backup power supply is included.

[0020] Preferably, the elevator drive comprises a frequency converter with a rectifier bridge, an inverter bridge and a DC link in between. This forms is a reliable standard configuration for an elevator drive. In this case, the battery is preferably connected to the DC link as this enables the energization of the elevator brakes as well as the operation of the elevator motor via the emergency drive module. This further has the advantage that the drive is able to provide battery energy to loads that are needed to provide power with minimum amount of current drawn from the backup power supply because the DC link is also assisting as a source of energy for the backup power supply and the loads, when elevator car is driven power

generating direction (light direction). This again reduces the battery energy required by the battery operation, which again reduces the battery capacity and accordingly the physical battery size. Thus by this technology an elevator drive with emergency drive ability is created that uses a physically small sized battery compared to elevator drive size. This goal of reduced battery size may further preferably achieved by using lithium Ion or other type of lithium based chemistry batteries which are providing high energy density.

[0021] When the inventive drive with an emergency drive module is used, the backup power supply is preferably configured to utilize the available regenerative energy fed from the elevator motor to the DC link and when all loads are connected with the DC link of the drive to be fed from the DC link the required energy is significantly reduced (roughly from range of 4kW peak power to 1kW peak power). This allows a small but per se more expensive lithium battery integrated to the drive housing becoming a cheaper solution than a higher energy external lead acid battery - which is per se cheaper - with an external enclosure and interface.

[0022] In an earlier solution the three-phase input of the drive was used to supply electricity to every component in the elevator system (excluding doors). When the backup module is connected to the DC link, the controller of the drive can control which components are going to be supplied with power. Hence, the power can be significantly reduced. In both cases, the elevator can use regenerative power. The difference is whether all the components are supplied with power or just the specific ones required for emergency operation.

[0023] As the backup module and/or the drive are located in a closed housing and the backup module may be changed without opening of any housing no special precautions are mandatory to avoid touching the high voltage DC link circuit in the drive, while the battery is being replaced.

[0024] However, it is highly recommended to open the main switch before battery replacement. The battery module is located preferably inside a plastic housing with electrically insulation on its outer surface. Thus, battery + and - connections that are during operation in connection with the DC link potential are protected by the surrounding backup module plastic housing from creating any conductive, which is touched by the service person performing the battery replacement. Anyway, a main switch contactor may be preferably located at the mechanical interface between backup module and drive housing to automatically interrupt main voltage when the backup module is detached from the elevator drive.

[0025] The backup module has preferably an electric interface permanently fixed to the backup module housing that is connecting the battery to the DC link potential. The drive housing has as a complementary interface fixed into the accommodation area of the drive housing for the backup module. The backup module is then connected preferably by a snap-lock connection to the drive housing.

[0026] Preferably the backup module includes the necessary battery management hardware and the electric contacts of the electric interface. By this means, all the essential battery related

hardware is located in the backup module. Preferably, in this case the drive only comprises a charging circuit to keep the battery at optimum load level.

[0027] The invention provides the following advantages related to non-integrated battery back-up device:

- Additional cost of a separate housing for the battery is avoided.
- Less mechanical parts.
- The need for additional fuses or switches to separate the battery from the drive for time of replacement or maintenance is avoided.
- No space has to be provided for the battery housing in close proximity to the elevator drive.
- Due to the concept of the inventive plug off / plug on battery the replacement activity is easier and faster which reduces the required maintenance time on site.
- Frees space in shaft for other elevator parts.

[0028] Also, if the battery is electrically connected to the DC link there are following additional advantages:

- Additional cost of wiring between external battery housings and elevator drive is avoided mostly because there is no wiring which has to be well protected to avoid electric shock of the person touching the wires.
- Due to this direct connection between battery and DC link electromagnetic interference problems like radiated emissions associated with long battery wires are avoided.
- Shorted cables can be used between any battery drive converter circuit that converts the battery voltage to the DC link voltage, which reduces the risk of oscillations that are bound to cause stability issues in converter operation.
- Lifetime benefit
- Lead acid batteries which require frequent replacement may be avoided.
- With lithium batteries the expected lifetime can increase up to ten years and reduce significantly the service cost and required amount of site visits due to problems in high ambient temperature elevators where replacement is even more frequent than the standard replacement period.
- Lead is a hazardous substance and replacing it with lithium batteries is an ecological solution.

[0029] Following terms are used as synonym: battery - backup power supply - super capacitor; backup module housing - module housing;

[0030] The invention is now described via an example in connection with the enclosed drawings.

Fig. 1

shows a perspective view of a part of an elevator in the upper end of an elevator shaft,

Fig. 2

an elevator drive including an elevator drive housing with an integrated detachable backup module,

Fig. 3

a perspective view of the backup module.

[0031] Fig. 1 shows an elevator 10 in the upper part of an elevator shaft 12 having landing doors 14. The figure shows the upper part of a car guide rail 16 for an elevator car and two counterweight guide rails 18a, 18b for a counterweight. At the upper end of the car guide rail 16 an elevator motor 20 is mounted comprising two elevator brakes 22a, 22b. The elevator brakes 22a, 22b are acting on brake faces of a traction sheave 24 which is connected to the rotor of the elevator motor 20. The elevator motor 20 is operated via an elevator drive 26 located above the landing door 14 so that it can be reached by a maintenance person from the landing door or standing on top of the elevator car.

[0032] The elevator drive 26 preferably comprises a per se known frequency converter with a DC link between a rectifier bridge and an inverter bridge. The elevator drive 26 is located in an electrically isolated cubic drive housing 28 made of plastics which is shown in more detail in Fig. 2. The elevator drive 26 comprises an emergency drive module to enable the release of trapped passengers in case of a power fault of the mains AC network. In the area of one edge 30 of the drive housing 28 an accommodation recess 32 is provided in which a backup module 34 is releasably mounted, preferably plugged, whereby the mounting position as shown in Fig. 2 is secured preferably with a snap-lock connection. The backup module 34 has a backup module housing 36 which is preferably made of plastics like the drive housing 28 and thus protects the enclosed electric components against access and dirt. The backup module has two outer surfaces 38a, 38b which are aligned with corresponding outer surfaces 40a, 40b of the drive housing 28. Via this measure, there are no edges or corners of the backup module housing 36 protruding from the corresponding outer surfaces 40a, 40b of the drive housing 28. Thus, the complete arrangement is less susceptible for dirt and mechanical damage.

[0033] The elevator drive combined with the emergency drive module and an optional backup power supply charging circuit requires a minimum amount of additional electronics. Therefore, the entire drive system 26 with all battery related hardware is fitting into the drive housing 28 and does not need additional room or additional wiring in the elevator shaft 12.

[0034] The backup module 34 comprises preferably a release button 42 with which the snap-lock connection of the backup module 34 to the drive housing 28 can be released. Thus, the backup module can easily be detached, e.g. for maintenance or replacement.

[0035] Fig. 3 shows a perspective view of the backup module 34 with its backup module

housing 36. The backup module 34 has at one end side an electric interface 44 which automatically connects with a complementary electric interface in the drive housing 28 so that an automatic electric connection of the backup module 34 with the elevator drive 26 takes place when the backup module 34 is plugged into its mounting position in the drive housing 28. The linear movement of the plugging may be guided by guide components which are not shown in the figure.

[0036] Furthermore, the electric interface as well as the complementary interface may preferably comprise a movable isolation which prevents an access to the electric contacts thereof when the backup module 34 is unplugged.

[0037] The elevator drive 26 may also comprise the brake controller for both elevator brakes 22a, 22b.

[0038] The invention is not restricted to the disclosed embodiment but may be varied within the scope of the attached patent claims.

List of reference number:

[0039]

10	elevator
12	elevator shaft
14	landing door
16	car guide rail
18a,b	counterweight guide rails
20	elevator motor
22a,b	elevator brakes
24	traction sheave
26	elevator drive
28	drive housing
30	edge with the accommodation recess for the backup module

- 32
 accommodation recess for the backup module
- 34
 backup module
- 36
 backup module housing
- 38a,b
 outer surfaces of the backup module housing
- 40a,b
 outer surfaces of the drive housing
- 42
 release button of the snap-lock connection
- 44
 electric interface of the backup module

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP5743345B [0002]
- JP2010208764A [0003]

Patentkrav

1. Elevator omfattende en elevatormotor (20) og et elevatordrev (26) omfattende en backup-strømforsyning og et nøddrevsmodul til at muliggøre frigivelse af fangede passagerer i tilfælde af en strømfejl baseret på energien fra backup-strømforsyningen, hvorved elevatordrevet (26) omfatter et drevhus (28) og backup-strømforsyningen er placeret i et separat backup-modul (34), som er frigørligt understøttet i en monteringsposition ved drevhuset (28) af elevatordrevet (26), hvilket backup-modul (34) omfatter et backup-modulhus (36) og en elektrisk grænseflade (44), som forbinder til en komplementær grænseflade af elevatordrevet (26) placeret ved drevhuset (28), **kendetegnet ved, at** backup-modulhuset (36) akkommoderes i en reces (32) af en kant (30) af drevhuset (28).
2. Elevator ifølge krav 1, hvor backup-modulhuset (36) og/eller drevhuset (28) er et isoleret hus, især et plasthus eller et isoleret aluminiumshus.
3. Elevator ifølge et af de foregående krav, hvor backup-modulet (34) er konfigureret til at blive tilsluttet til elevatordrevet (26) og/eller drevhuset (28).
4. Elevator ifølge et af de foregående krav, hvor ydre overflader (38a, 38b) af backup-modulhuset (36), når monteret til drevhuset (28), er på linje med tilsvarende ydre overflader (40a, 40b) af drevhuset (28).
5. Elevator ifølge et af de foregående krav, hvor backup-modulhuset (36) er fastgjort i sin monteringsposition ved drevhuset (28) via en snaplåsforbindelse.
6. Elevator ifølge et af de foregående krav, hvor den elektriske grænseflade (44) og den komplementære grænseflade er placeret ved områder af drevhuset (28) og backup-modulhuset (36), som ikke danner ydre overflader efter backup-modulet (34) er monteret i sin monteringsposition ved drevhuset (28).
7. Elevator ifølge et af de foregående krav, hvor den elektriske grænseflade (44) og den komplementære grænseflade i drevhuset (28) og backup-modulhuset (36)

hver er dækket af bevægelige isolationer.

8. Elevator ifølge krav 7, hvor isoleringerne er bevægelige ved den elektriske grænseflade (44) og/eller komplementære grænseflade af det henholdsvis andet
5 hus (28, 36).

9. Elevator ifølge et af de foregående krav, hvor elevatordrevet (26) omfatter et ladningskredsløb til backup-strømforsyningen.

10 **10.** Elevator ifølge et af de foregående krav, hvor backup-strømforsyningen omfatter et batteri og/eller en superkondensator.

11. Elevator ifølge et af de foregående krav, hvor drevhuset (28) og backup-modulhuset (36) omfatter komplementære føringer, som er konfigureret til at
15 definere en lineær bevægelse af backup-modulhuset i forhold til drevhuset (28), hvilken bevægelse er begrænset af stopflader, som muliggør en pålidelig forbindelse mellem den elektriske grænseflade og den komplementære grænseflade.

20 **12.** Elevator ifølge et af de foregående krav, hvor drevhuset (28) er installeret i elevatorskakten i nærheden af en elevatorskaktdør eller -inspektionsåbning.

13. Elevator ifølge et af de foregående krav, hvor elevatordrevet (26) omfatter en frekvensomformer med en ensretterbro, en vekselretterbro og en DC-forbindelse
25 imellem og hvor backup-strømforsyningen er forbundet med DC-forbindelsen af elevatordrevet (26).

14. Elevator ifølge et af de foregående krav, hvor en hovedafbryderkontaktør er placeret ved den mekaniske grænseflade mellem backup-modulhuset (36) og
30 drevhuset (28) for automatisk at afbryde netspændingen, når backup-modulet (34) er adskilt fra elevatordrevet (26).

DRAWINGS


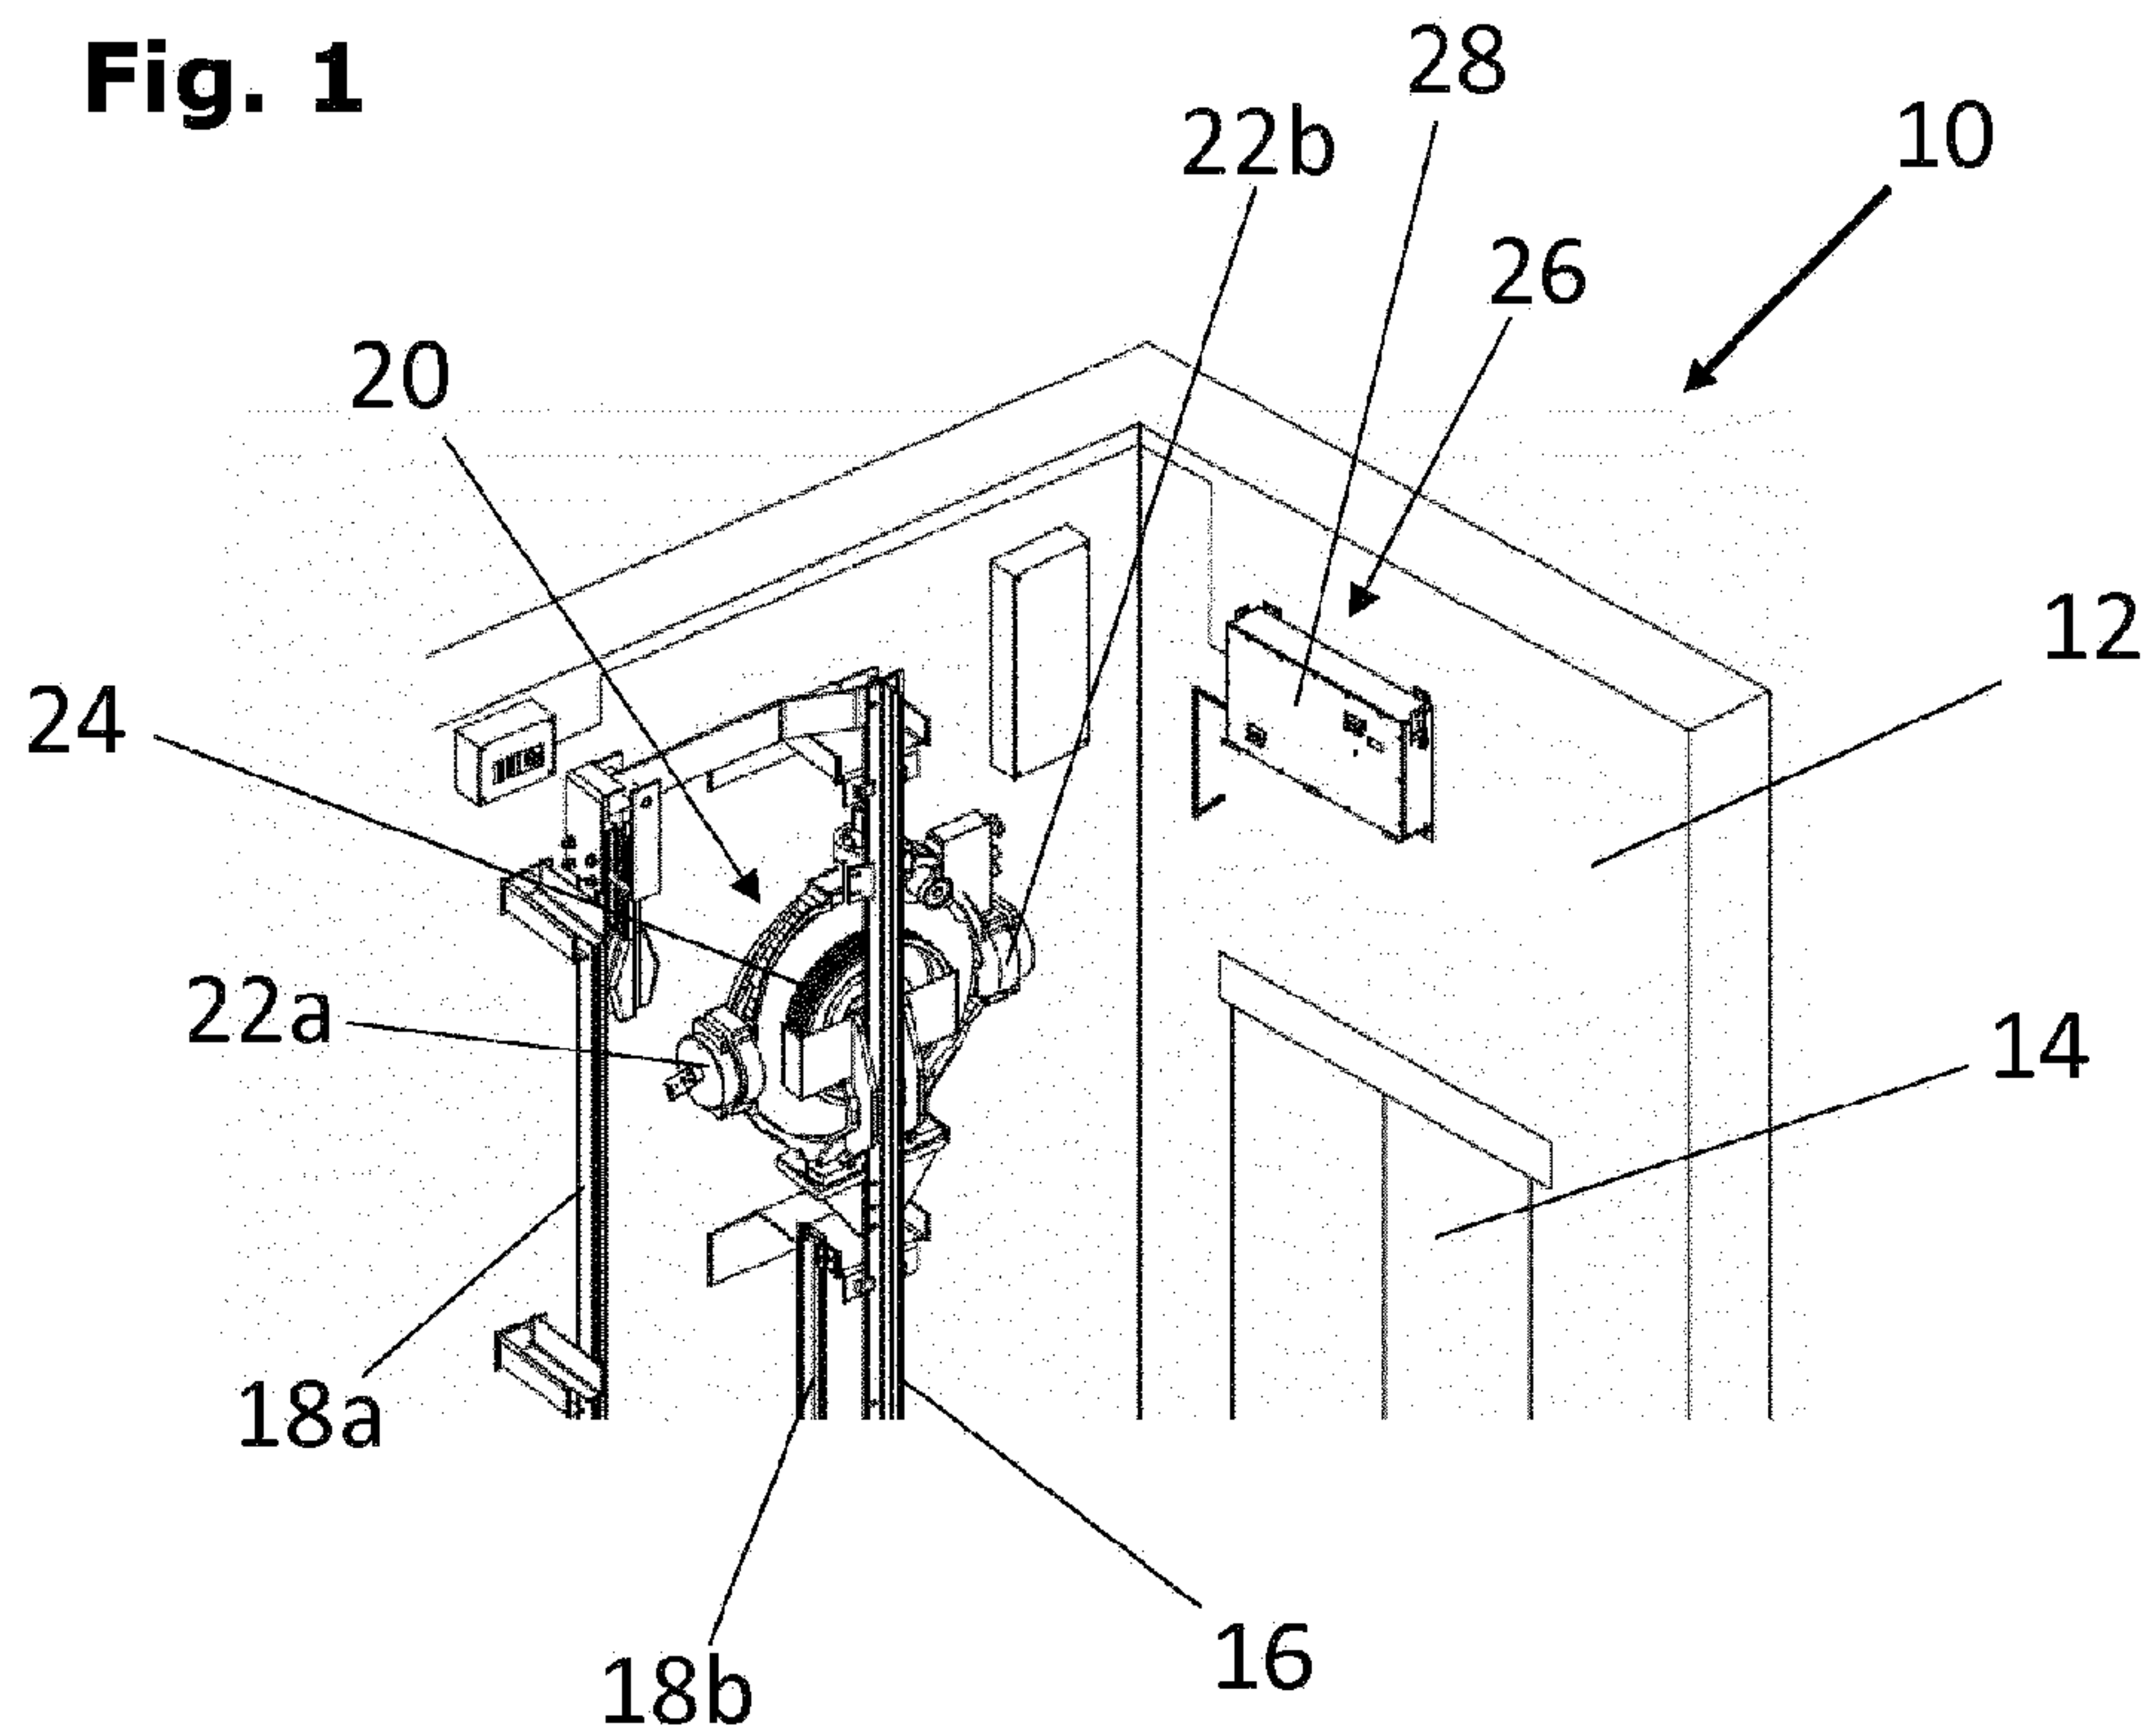
Fig. 1**Fig. 2**

Fig. 3

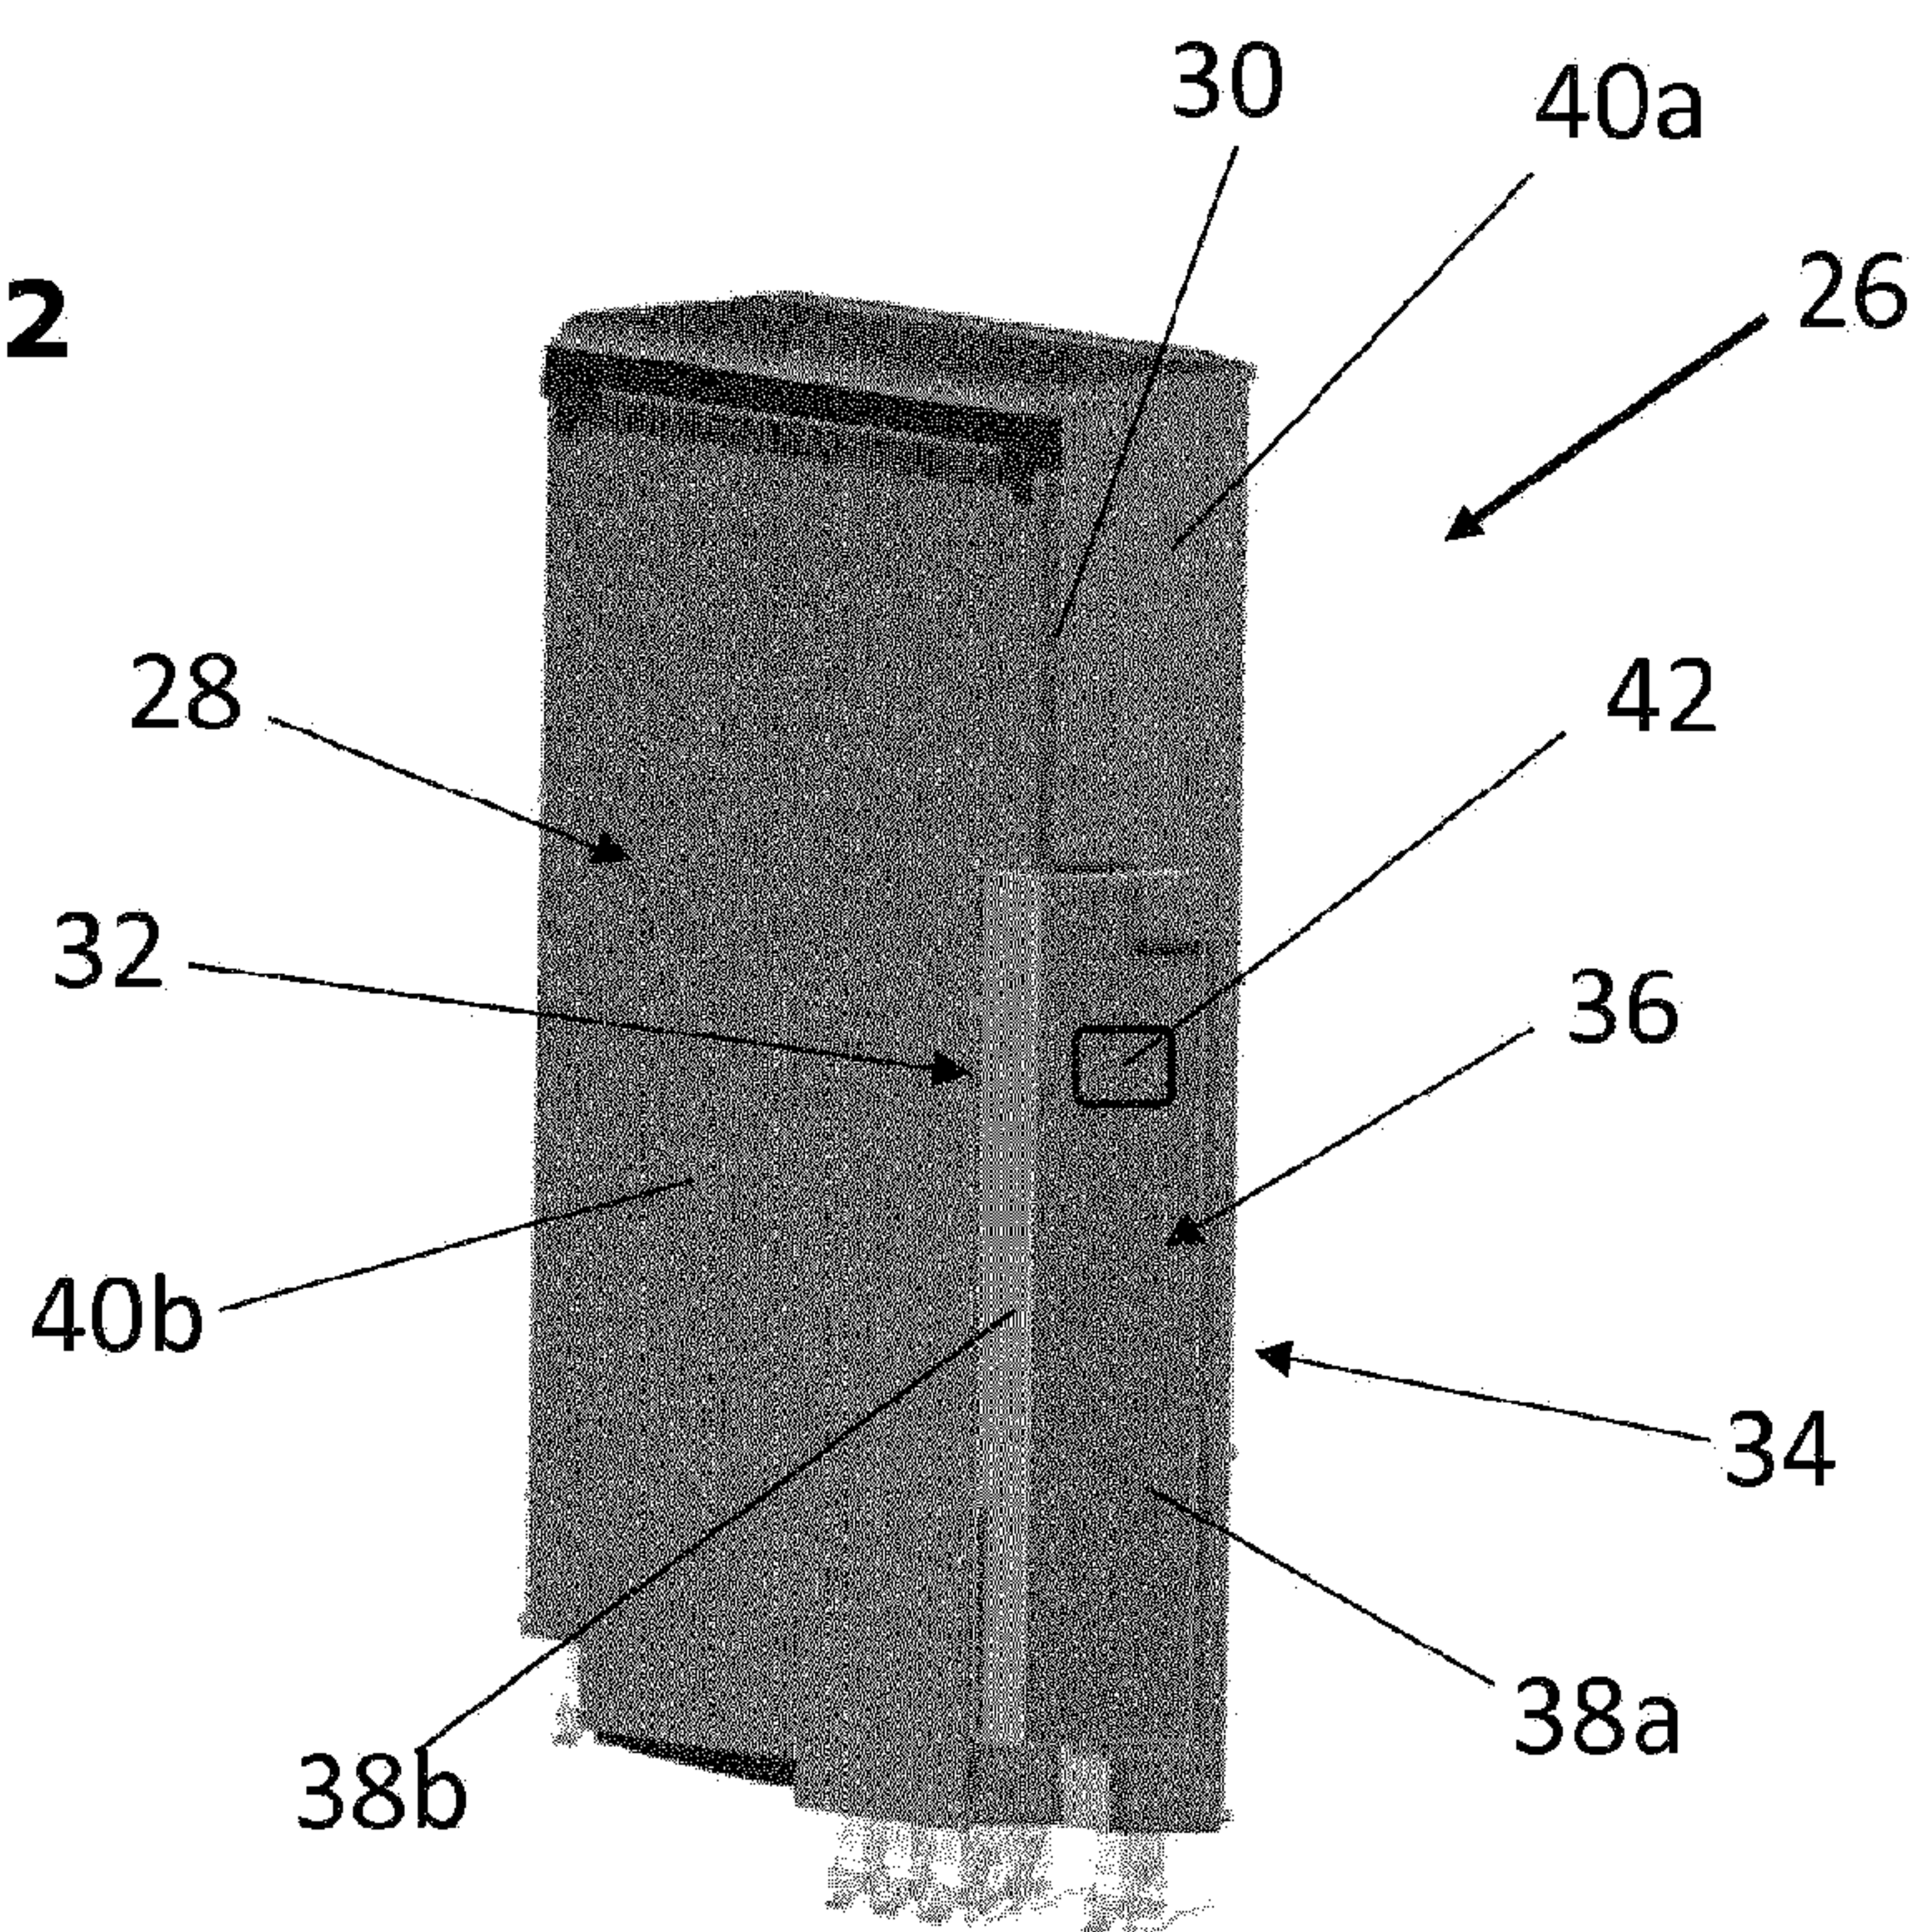