



- (51) **International Patent Classification:**
H01R 13/62 (2006.01) *H01R 11/30* (2006.01)
- (21) **International Application Number:**
PCT/US2015/023475
- (22) **International Filing Date:**
31 March 2015 (31.03.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; 11445 Compaq Center Drive W., Houston, Texas 77070 (US).
- (72) **Inventor:** CASTELL, Robin T.; 11445 Compaq Center Dr W, Houston, Texas 77070 (US).
- (74) **Agents:** WU, Bruce et al.; Hewlett-Packard Company, Intellectual Property Administration, 3404 E. Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** CONNECTOR WITH A WIRELESS COUPLER

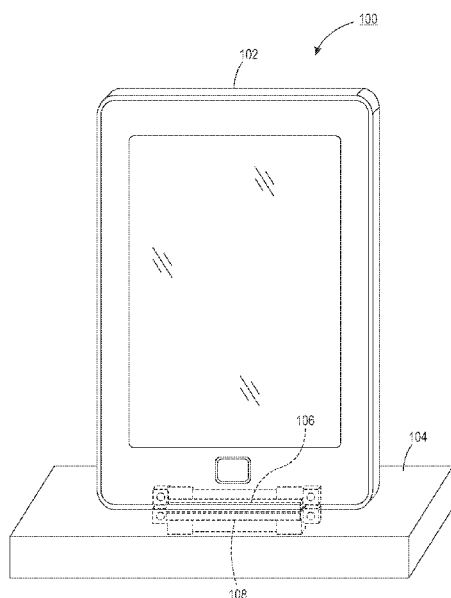


FIG. 1

(57) **Abstract:** In example implementations, an apparatus includes a housing. The housing includes an electronic connector coupled to a back side of the housing. In addition, the housing includes a pin coupled to a front side of the housing and in communication with the electronic connector. At least one alignment magnet and at least one wireless transceiver chip is coupled to the housing. At least one waveguide is coupled to the at least one wireless transceiver chip.

CONNECTOR WITH A WIRELESS COUPLER

BACKGROUND

[0001] A POGO pin connector is a device that is used for docking connection schemes used in electronic devices, e.g., tablets and convertible laptops with keyboard and docking station accessories. The connectors need careful alignment and can degrade over time due to prolonged environmental exposure and mechanical wear and tear. This degradation can produce connection intermittency and further compromise the bandwidth capabilities of the POGO style connector.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] FIG. 1 is a block diagram of an example electronic device and docking station using an apparatus of the present disclosure;

[0003] FIG. 2 is a first view of a first example of the apparatus;

[0004] FIG. 3 is a second view of the first example of the apparatus;

[0005] FIG. 4 is a second example of the apparatus;

[0006] FIG. 5 is third example of the apparatus; and

[0007] FIG. 6 is an example of the apparatus in the electronic device and the apparatus of the docking station.

DETAILED DESCRIPTION

[0008] The present disclosure broadly discloses a POGO pin connector with a wireless coupler. As discussed above, a POGO pin connector is a device that is used for docking connection schemes used in electronic devices, e.g., tablets and convertible laptops with keyboard and docking station accessories. The connectors need attention regarding alignment and can degrade over time due to prolonged environmental exposure and mechanical wear and tear. This degradation can produce connection intermittency and further compromise the bandwidth capabilities of the POGO style connector.

[0009] Examples of the present disclosure provide a POGO pin connector

with a wireless coupler. In one example, the wireless coupler may be a wireless transceiver chip that may be located on or in a housing of the POGO pin connector to provide half duplex or full duplex data transfer capabilities. The wireless transceiver chip may be used as a back-up for transferring data in case the POGO pin connector fails or to supplement the data transfer rates of the POGO pin connector as the POGO pin connector performance degrades over time. The wireless transceiver chip may also provide greater bandwidth capability than that provided by the POGO pins, thereby, enhancing the overall bandwidth of the connector.

[0010] FIG. 1 illustrates an example system 100 that includes an apparatus 106 in an electronic device 102 and an apparatus 108 in a docking station 104. In one example, the apparatus 106 and the apparatus 108 may be a spring loaded pin connector. One example of a spring loaded pin connector may be a POGO pin connector.

[0011] In one example, the apparatus 106 and the apparatus 108 may be complementary. For example, the apparatus 106 may have a male portion that mates with or aligns with a female portion of the apparatus 108, or vice versa.

[0012] In one example, the electronic device 102 may be any type of electronic device that may use a docking station for data transfer, communications and/or recharging. For example, the electronic device 102 may be a tablet device, smart phone, a laptop and the like.

[0013] FIG. 2 illustrates an example block diagram of the apparatus 106. It should be noted that the apparatus 108 may be identical or complementary to the apparatus 106. In one example, the apparatus 106 includes a housing 202. The housing 202 may be made from a plastic or a plastic framed by a metal shroud. The housing 202 includes a front side 218, a back side 220 and a left end 222 (broadly a first end) and a right end 224 (broadly a second end). In one example, the left end 222 and the right end 224 are located on opposite ends of the housing 202.

[0014] In one example, an electronic connector 212 is coupled to the back side 220 of the housing 202. The electronic connector 212 may be coupled to a printed circuit board of the electronic device 102 and may communicate with a

processor and a memory of the electronic device 102.

[0015] In one example, the housing 202 includes a first alignment magnet 204 and a second alignment magnet 206. Although two alignment magnets 204 and 206 are illustrated in FIG. 2, it should be noted that the housing 202 may include any number of alignment magnets (e.g., more or fewer than two). In one example, the second alignment magnet 206 may be located on an end opposite the first alignment magnet 204. For example, the first alignment magnet 204 may be located on the left end 222 of the housing 202 and the second alignment magnet 206 may be located on the right end 224 of the housing 202 that is opposite the left end 222.

[0016] In one example, the first alignment magnet 204 and the second alignment magnet 206 provide additional power charging for the electronic device 102. For example, if at least one pin 216₁ to 216_n (herein also referred to collectively as pins 216 or as a single pin 216) degrade over time causing a reduction in the recharging performance of the pins 216, the first alignment magnet 204 and the second alignment magnet 206 can be used as a supplemental or back-up power channel for sending power to the electronic device 102 for recharging a battery of the electronic device 102. In other words, inductive power transfer implementations can be used to transfer power, e.g., using inductive coupling and the like.

[0017] In one example, the apparatus 106 comprises a connector portion 214 that is coupled to the front side 218 of the housing 202 as illustrated in FIG. 3. In one example, the connector portion 214 includes at least one pin 216. In one example, the connector portion 214 may include a plurality of pins 216₁ to 216_n. In one example, each pin 216 is a spring loaded pin. One example of a spring loaded pin that may be used is a POGO pin. The spring loaded pin includes an inner housing 250, an outer housing 252 and a spring 254 within the inner housing 250 and the outer housing 252.

[0018] The inner housing 250 is movably coupled to the spring 254 and the outer housing 252. For example, as pressure is applied to the inner housing 250, the inner housing 250 moves down vertically to compress the spring 254. When the pressure is removed, the spring 254 releases and moves the inner

housing 250 vertically upwards.

[0019] In one example, the pins 216 are in communication with the electronic connector 212. In other words, the pins 216 may be electrically connected to the electronic connector 212 directly, or indirectly. As a result, data are transferred via at least one pin 216 to the electronic connector 212 to the electronic device 102. In addition, the electronic device 102 may be recharged via power that is transmitted through at least one pin 216 and the electronic connector 212.

[0020] In POGO pin connectors, data are transferred via at least one pin 216 and the electronic device 102 is recharged via at least one pin 216, as noted above. However, the pins 216 may degrade negatively over time affecting the performance (e.g., charging times and data throughput) of the pins 216. To help address the degradation in performance of the pins 216, or to provide greater bandwidth performance than that is possible with the traditional POGO pin, the apparatuses 106 and 108 also include a wireless transceiver chip 208. In one example, the apparatuses 106 and 108 may include a second wireless transceiver chip 210.

[0021] In one example, the wireless transceiver chips 208 and 210 may be an extremely high frequency electromagnetic (EHF EM) coupler. The wireless transceiver chips 208 and 210 may be capable of half duplex communication (e.g., capable of sending and receiving data, but only one at a time) or full duplex communication (e.g., capable of sending and receiving data at the same time or in parallel).

[0022] In one example, the wireless transceiver chips 208 and 210 may be located on the housing 202 to maximize a distance between the wireless transceiver chip 208 and the wireless transceiver chip 210. Maximizing the distance between the wireless transceiver chips 208 and 210 may maximize the efficiency and wireless performance. For example, providing the maximum distance between the wireless transceiver chips 208 and 210 improves isolation of the wireless transceiver chips 208 and 210, which reduces interference and improves data transfer rates.

[0023] In one example, the wireless transceiver chips 208 and 210 provide

data communications between the docking station 104 and the electronic device 102. For example, as the pins 216 degrade over time, the wireless transceiver chips 208 and 210 may be used to maintain a desired data transfer rate that would otherwise be unattainable with the degraded pins 216. In one example, the wireless transceiver chips 208 and 210 may be provided as a backup to the pins 216 should the pins 216 completely fail. In one example, an option may be provided to a user of the electronic device 102 to allow the user to select an option of transferring data using only the pins 216, only the wireless transceiver chips 208 and 210, or a combination of both.

[0024] FIG. 4 illustrates an example block diagram of another example of the apparatus 106. In one example, the apparatus 106 includes waveguides 260 and 262. In one example a first waveguide 260 is associated with the first wireless transceiver chip 208, and a second waveguide 262 is associated with the second wireless transceiver chip 210. In one example, the waveguides 260 and 262 may be defined as a transmission line for data signals (e.g., electromagnetic signals, radio frequency (RF) signals, and the like) sent by the respective wireless transceiver chips 208 and 210. The waveguides 260 and 262 may have a rectangular or circular cross section that is solid plastic and may have conductive walls (e.g., a metal wall). The data signals propagate within the confines of the walls of the waveguides 260 and 262 and are confined by total internal reflection from the walls of the waveguides 260 and 262.

[0025] In one example, the wireless transceiver chips 208 and 210 are coupled to a printed circuit board 264 within the electronic device 102. The waveguides 260 and 262 are subsequently coupled to the respective wireless transceiver chips 208 and 210 located on the printed circuit board 264. In one example, the waveguides 260 and 262 may be coupled to a plastic portion of the housing 202 (e.g., along a back side 220 of the housing 202).

[0026] FIG. 5 illustrates a block diagram of yet another example of the apparatus 106. In one example, rather than coupling the waveguides 260 and 262 to the plastic portion of the housing 202 as illustrated in FIG. 4, the waveguides 260 and 262 are coupled to the first alignment magnet 204 and the second alignment magnet 206, respectively. For example, the first alignment

magnet 204 and the second alignment magnet 206 may include a hollow opening within the alignment magnets 204 and 206. The waveguides 260 and 262 may be coupled to the alignment magnets 204 and 206 via the openings inside of the alignment magnets 204 and 206.

[0027] As a result, the waveguides 260 and 262 are located at an inner edge of the front side 218 of the housing 202. Thus, when the apparatus 106 is coupled to an apparatus 108 also including waveguides, the waveguides 260 and 262 may be adjacent, or next to, the corresponding waveguides of the apparatus 108, as illustrated in FIG. 5 and discussed below. The location of the waveguides 260 and 262 improves the data transfer rates or the data throughput rates of the apparatus 106.

[0028] As noted above, the apparatus 108 may be located in the docking station 104 and may be similar to, or be, the complement of the apparatus 106. FIG. 6 illustrates the apparatus 108 aligned with the apparatus 106 right before being connected. In one example, the apparatus 108 includes at least one opening 516₁ to 516_n (also herein referred to collectively as openings 516 or individually as an opening 516) that correspond to each one of the pins 216. Each opening 516 includes a conductive wall or pad. Otherwise, the apparatus 108 may be similar to the apparatus 106.

[0029] For example, the apparatus 108 includes corresponding alignment magnets 504 and 506, corresponding wireless transceiver chips 508 and 510 on a printed circuit board 564 and corresponding waveguides 560 and 562. The alignment magnets 504 and 506, the wireless transceiver chips 508 and 510 and the waveguides 560 and 562 may be located on a housing 502 of the apparatus 108 similar to the locations described above for the apparatus 106.

[0030] As illustrated in FIG. 6, the alignment magnets 504 and 506 are located on the housing 502 such that the alignment magnets 504 and 506 are aligned with the corresponding alignment magnets 204 and 206. The alignment magnets 204, 206, 504 and 506 help to ensure that the pins 216 properly mate with the corresponding openings 516. Also, the alignment magnets 204, 206, 504, 506 provide a retention force that help to secure and maintain the connection between the apparatus 106 and 108. In addition, the alignment

magnets 204, 206, 504, 506 may be used to transfer power to the electronic device 102 for recharging.

[0031] In addition, the waveguides 560 and 562 are aligned with the corresponding waveguides 260 and 262. The waveguides 560, 562, 260 and 262 can assist in the transmission of data between the wireless transceiver chips 508 and 510 in the apparatus 108 and the wireless transceiver chips 208 and 210 in the apparatus 106.

[0032] It will be appreciated that variants of the above-disclosed and other features and functions, or alternatives thereof, may be combined into many other different systems or applications. Various presently unforeseen or unanticipated alternatives, modifications, variations, or improvements therein may be subsequently made by those skilled in the art which are also intended to be encompassed by the following claims.

CLAIMS

1. An apparatus, comprising:
 - a housing;
 - an electronic connector coupled to a back side of the housing, wherein the electronic connector is to communicate with a circuit board of an electronic device;
 - a pin coupled to a front side of the housing and in communication with the electronic connector;
 - a first alignment magnet on a first end of the housing;
 - a second alignment magnet on a second end of the housing located opposite the first end;
 - a first wireless transceiver chip coupled to the first alignment magnet; and
 - a second wireless transceiver chip coupled to the second alignment magnet.
2. The apparatus of claim 1, wherein the pin comprises a spring loaded pin.
3. The apparatus of claim 1, wherein the first end and the second end are located at a maximum possible distance of separation within the housing.
4. The apparatus of claim 1, wherein each of the first wireless transceiver chip and the second wireless transceiver chip comprises an extremely high frequency electromagnetic (EHF EM) coupler.
5. The apparatus of claim 1, wherein the first wireless transceiver chip is coupled to a first waveguide, and the second wireless transceiver chip is coupled to a second waveguide.
6. The apparatus of claim 5, wherein the first waveguide is embedded into the first alignment magnet and the second waveguide is embedded into the second alignment magnet.

7. The apparatus of claim 6, wherein the electronic device is capable of being charged via the first alignment magnet and the second alignment magnet, and is capable of providing data transfer via the first wireless transceiver chip and the second wireless transceiver chip.

8. A apparatus, comprising:
a housing;
an electronic connector coupled to a back side of the housing, wherein the electronic connector is to communicate with a circuit board of an electronic device;
a pin coupled to a front side of the housing and in communication with the electronic connector;
at least one alignment magnet coupled to the housing;
at least one wireless transceiver chip coupled to the housing; and
at least one waveguide coupled to the at least one wireless transceiver chip.

9. The apparatus of claim 8, wherein the pin comprises a spring loaded pin.

10. The apparatus of claim 9, wherein the at least one wireless transceiver chip comprises an extremely high frequency electromagnetic (EHF EM) coupler.

11. The apparatus of claim 8, wherein the at least one waveguide is coupled to a plastic portion of the housing.

12. The apparatus of claim 8, wherein the at least one wireless transceiver chip is embedded in the at least one alignment magnet.

13. The apparatus of claim 12, wherein the at least one waveguide is coupled to the at least one alignment magnet.

14. The apparatus of claim 13, wherein the electronic device is capable of being charged via the at least one alignment magnet and is capable of providing data transfer via the at least one wireless transceiver.

15. An apparatus, comprising:
a housing;
an opening formed on a front side of the housing for receiving a corresponding pin of an electronic device;
at least one alignment magnet coupled to the housing for aligning with a corresponding alignment magnet of the electronic device;
at least one wireless transceiver chip coupled to the housing; and
at least one waveguide coupled to the at least one wireless transceiver chip and the housing, wherein the at least one waveguide is for aligning with a corresponding waveguide of the electronic device for transmitting data between the at least one wireless transceiver chip and a corresponding at least one wireless transceiver chip in the electronic device.

1/5

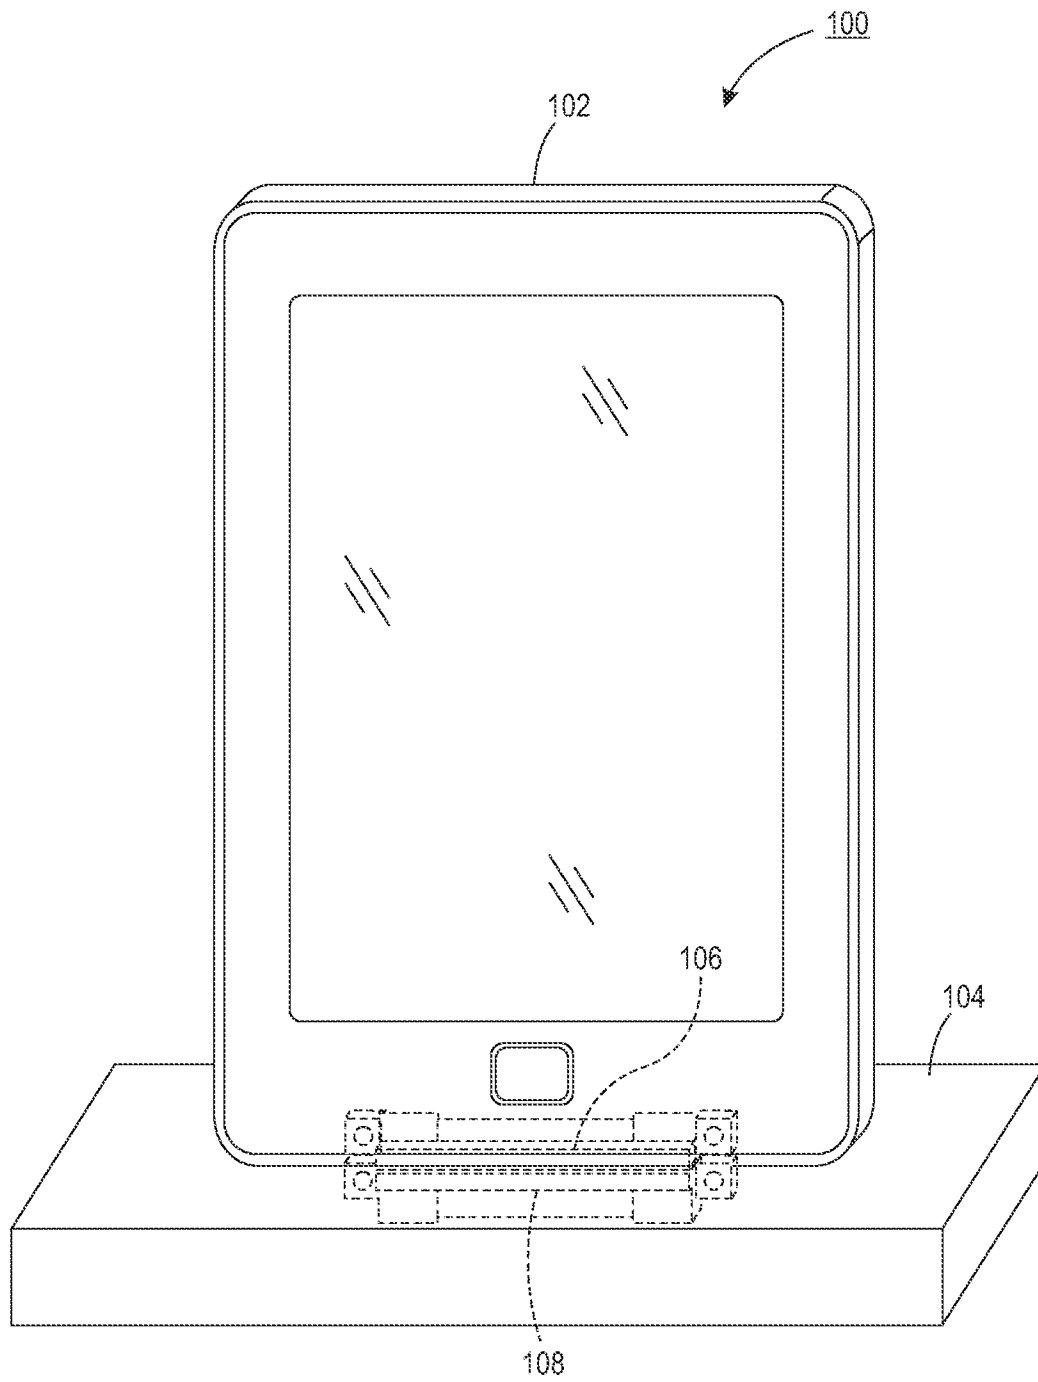


FIG. 1

2/5

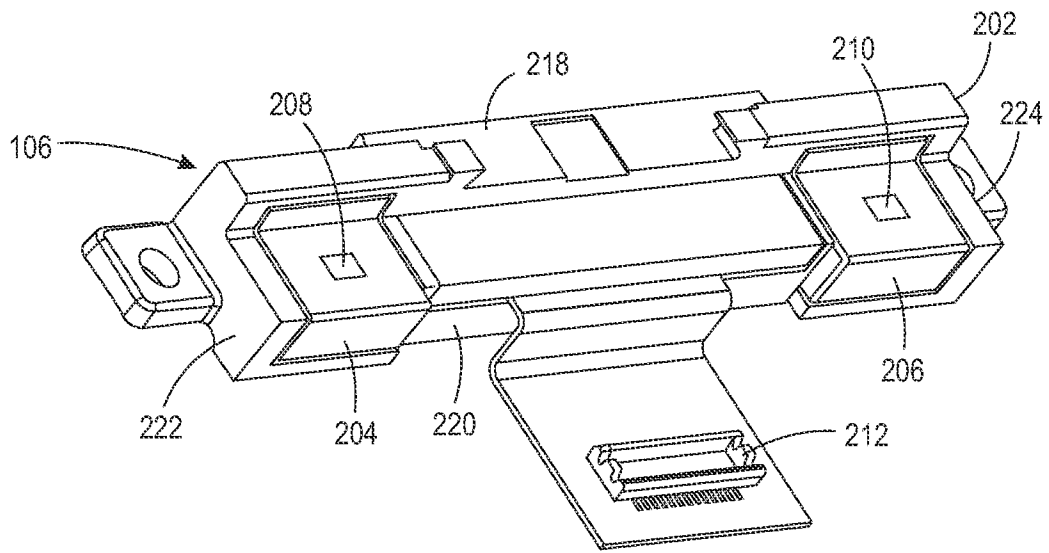


FIG. 2

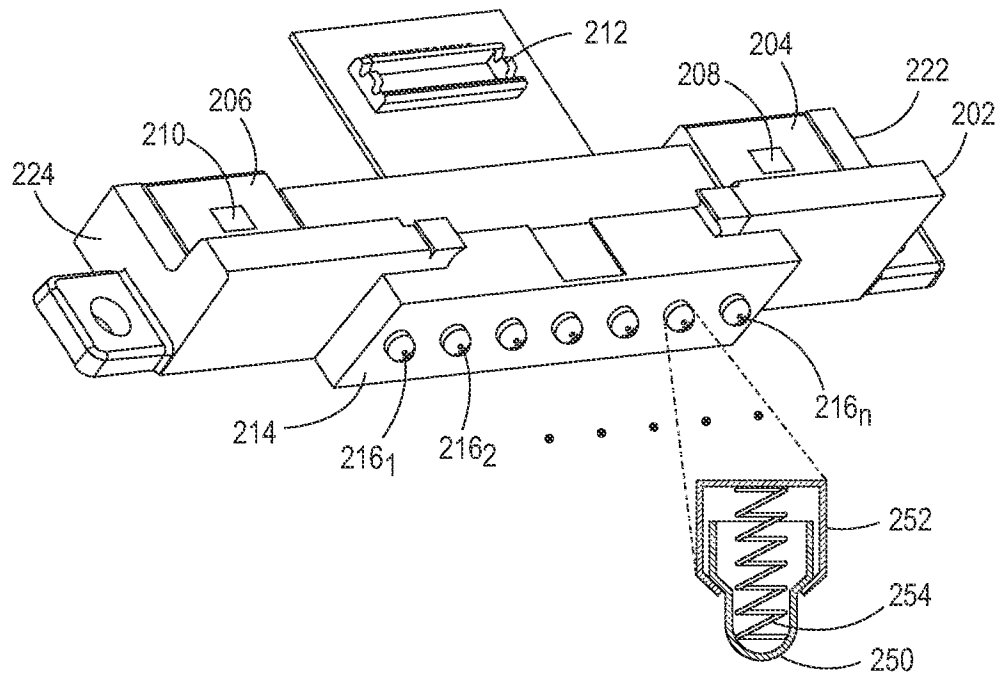


FIG. 3

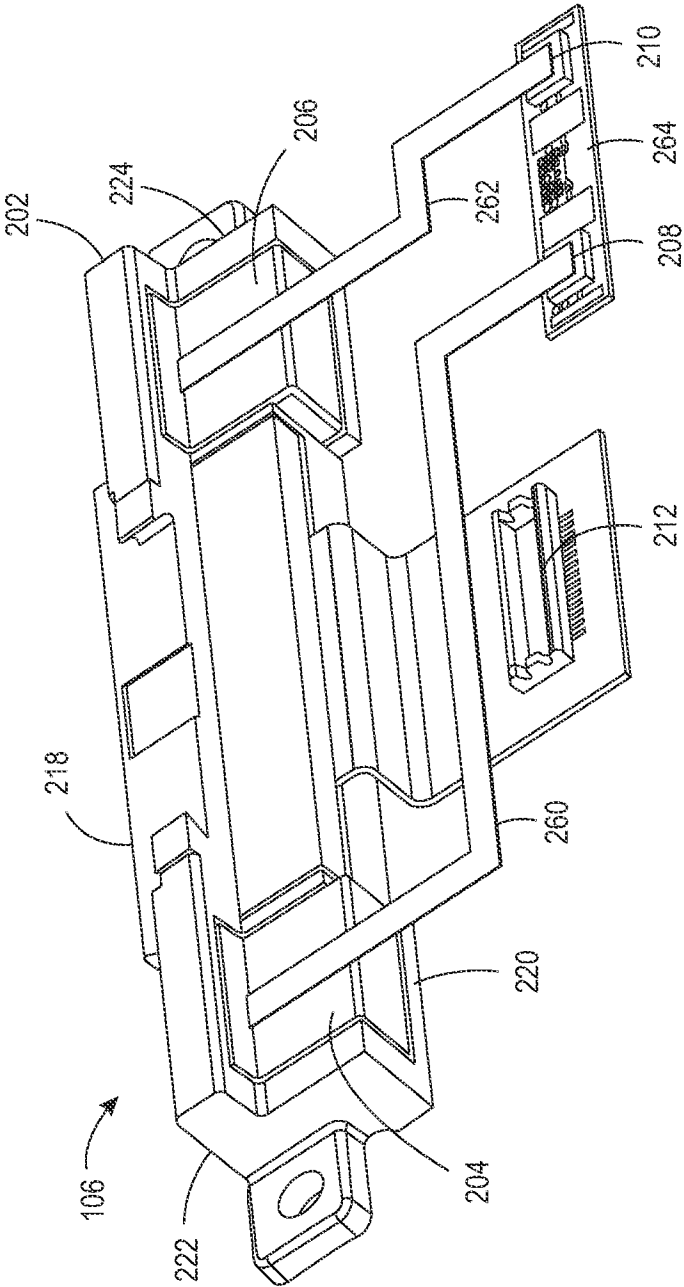


FIG. 4

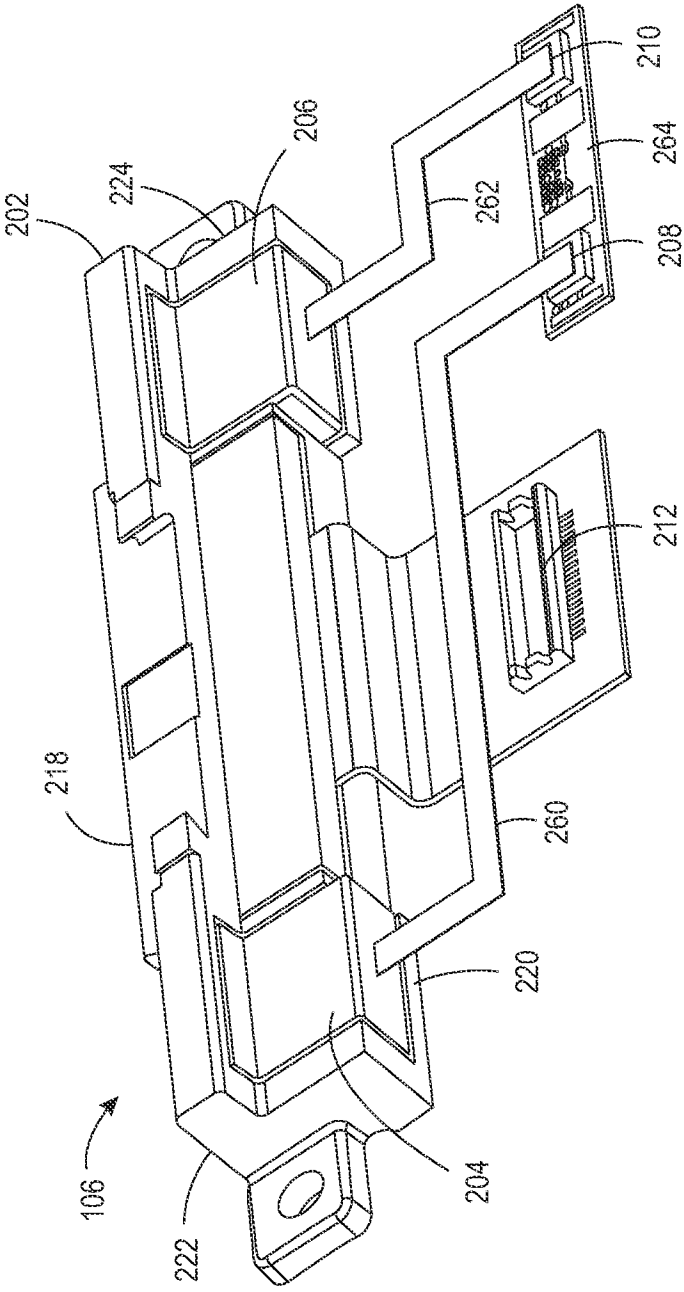


FIG. 5

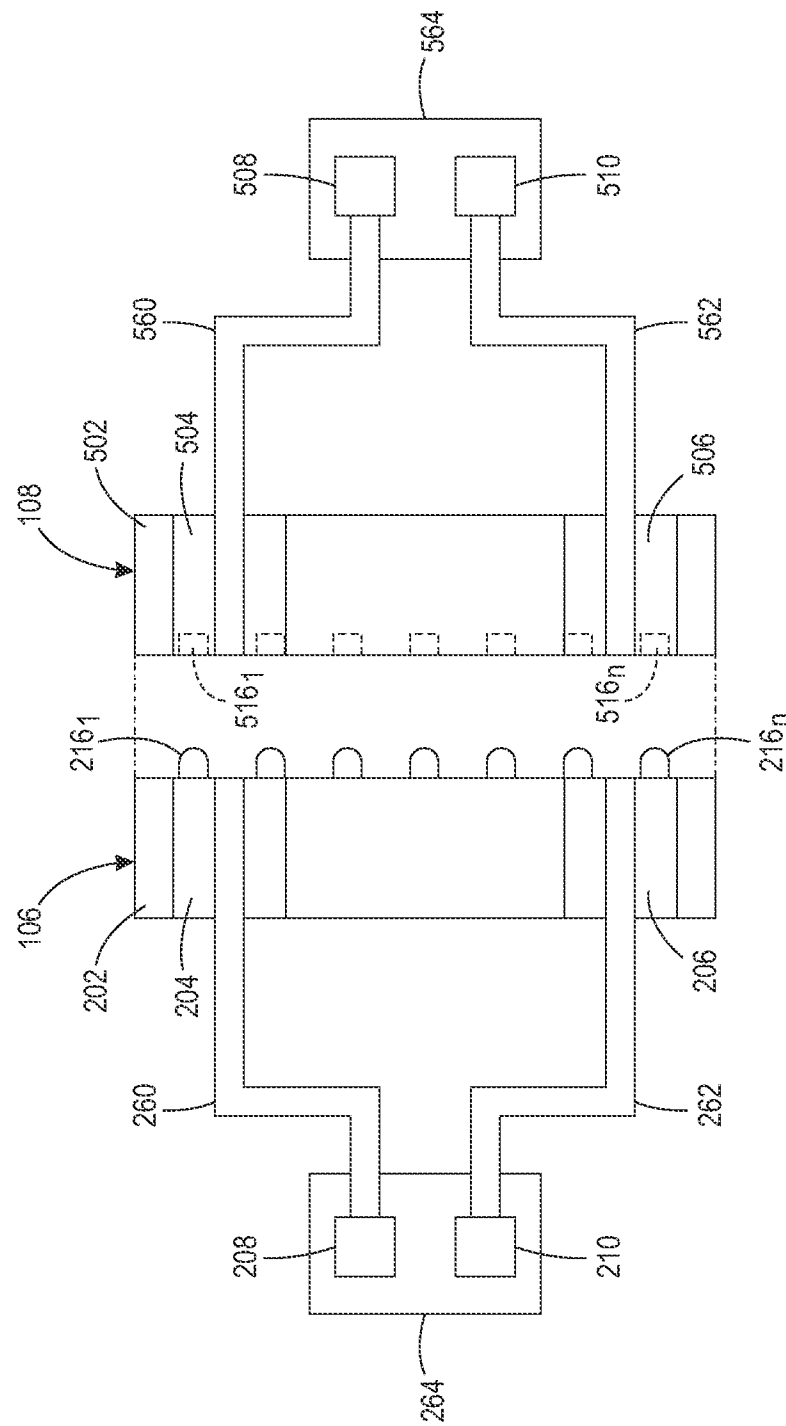


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/023475**A. CLASSIFICATION OF SUBJECT MATTER****H01R 13/62(2006.01)i, H01R 11/30(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01R 13/62; H01R 24/58; H01R 13/60; H01R 11/30; H04B 1/38

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: POGO pin, portable device, dock, wireless, transceiver

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2014-0113461 A1 (SAMSUNG ELECTRONICS CO., LTD.) 24 April 2014 See paragraphs [0016]-[0027]; claims 1-2; and figures 1-7.	1-15
A	KR 10-2006-0085100 A (DAE HAN SPECIAL METAL IND CO., LTD.) 26 July 2006 See paragraphs [0025]-[0085]; claims 1-8; and figures 1-6.	1-15
A	KR 20-0334307 Y1 (POS&TECH CO., LTD.) 22 November 2003 See abstract; claims 1-5; and figures 1-5d.	1-15
A	US 2002-0182898 A1 (HIDEO TAKAHASHI et al.) 05 December 2002 See paragraphs [0086]-[0088]; and figure 1.	1-15
A	KR 10-1285253 B1 (DAE HAN SPECIAL METAL IND CO., LTD.) 16 July 2013 See paragraphs [0018]-[0056]; claims 1-2; and figures 1-6.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 December 2015 (29.12.2015)

Date of mailing of the international search report

30 December 2015 (30.12.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 35208,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Sung Gon

Telephone No. +82-42-481-8746



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/023475

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0113461 A1	24/04/2014	CN 103779726 A EP 2722936 A1 KR 10-2014-0050891 A	07/05/2014 23/04/2014 30/04/2014
KR 10-2006-0085100 A	26/07/2006	KR 10-0736399 B1 KR 20-0382247 Y1	09/07/2007 18/04/2005
KR 20-0334307 Y1	22/11/2003	None	
US 2002-0182898 A1	05/12/2002	DE 10224526 A1 JP 2002-359130 A JP 2002-359131 A JP 2002-359132 A US 6736646 B2	13/03/2003 13/12/2002 13/12/2002 13/12/2002 18/05/2004
KR 10-1285253 B1	16/07/2013	WO 2013-129796 A1	06/09/2013