



US 20070295985A1

(19) **United States**

(12) **Patent Application Publication**
Weeks, JR. et al.

(10) **Pub. No.: US 2007/0295985 A1**

(43) **Pub. Date: Dec. 27, 2007**

(54) **GALLIUM NITRIDE MATERIAL DEVICES AND METHODS OF FORMING THE SAME**

Related U.S. Application Data

(63) Continuation of application No. 10/650,122, filed on Aug. 25, 2003, now Pat. No. 7,233,028, which is a continuation-in-part of application No. 09/792,414, filed on Feb. 23, 2001, now Pat. No. 6,611,002.

(75) Inventors: **T. Warren Weeks JR.**, Raleigh, NC (US); **Kevin J. Linthicum**, Cary, NC (US)

Publication Classification

(51) **Int. Cl.**
H01L 33/00 (2006.01)
(52) **U.S. Cl.** **257/103; 257/E33; 257/E33**

Correspondence Address:
WOLF GREENFIELD & SACKS, P.C.
600 ATLANTIC AVENUE
BOSTON, MA 02210-2206 (US)


(57) **ABSTRACT**

The invention provides gallium nitride material devices, structures and methods of forming the same. The devices include a gallium nitride material formed over a substrate, such as silicon. Exemplary devices include light emitting devices (e.g., LED's, lasers), light detecting devices (such as detectors and sensors), power rectifier diodes and FETs (e.g., HFETs), amongst others.

(73) Assignee: **Nitronex Corporation**, Durham, NC (US)

(21) Appl. No.: **11/762,985**

(22) Filed: **Jun. 14, 2007**

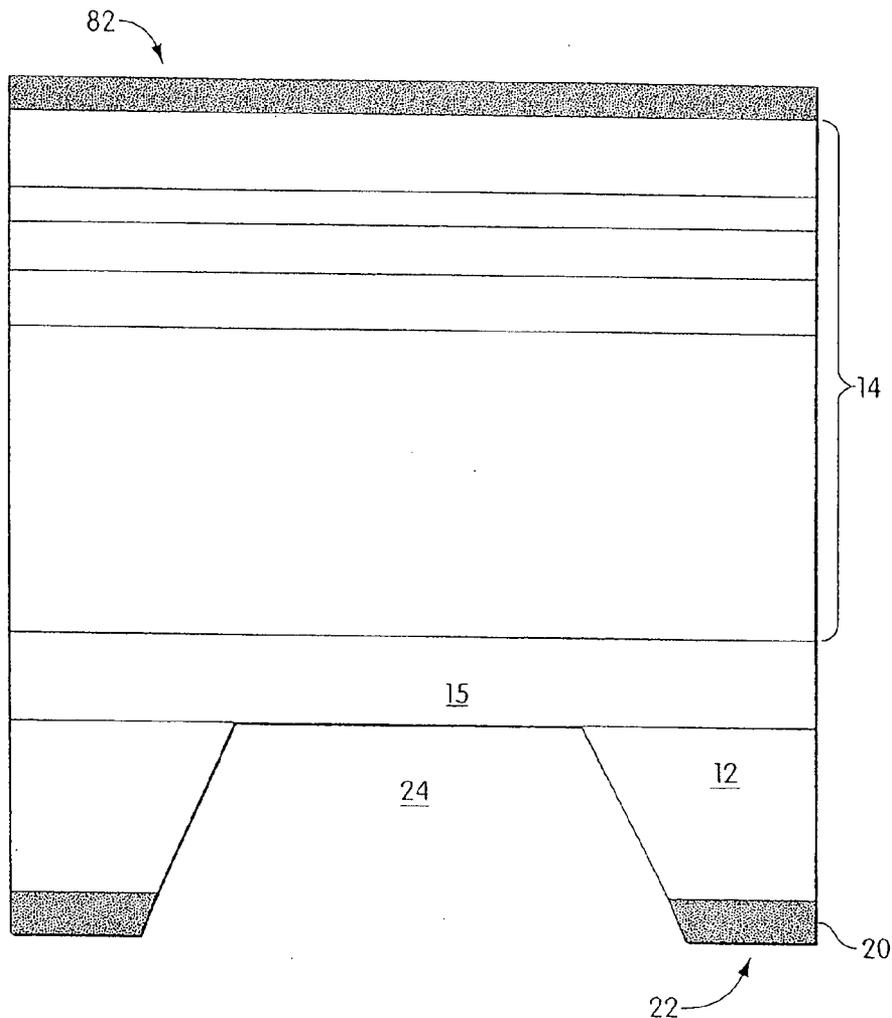

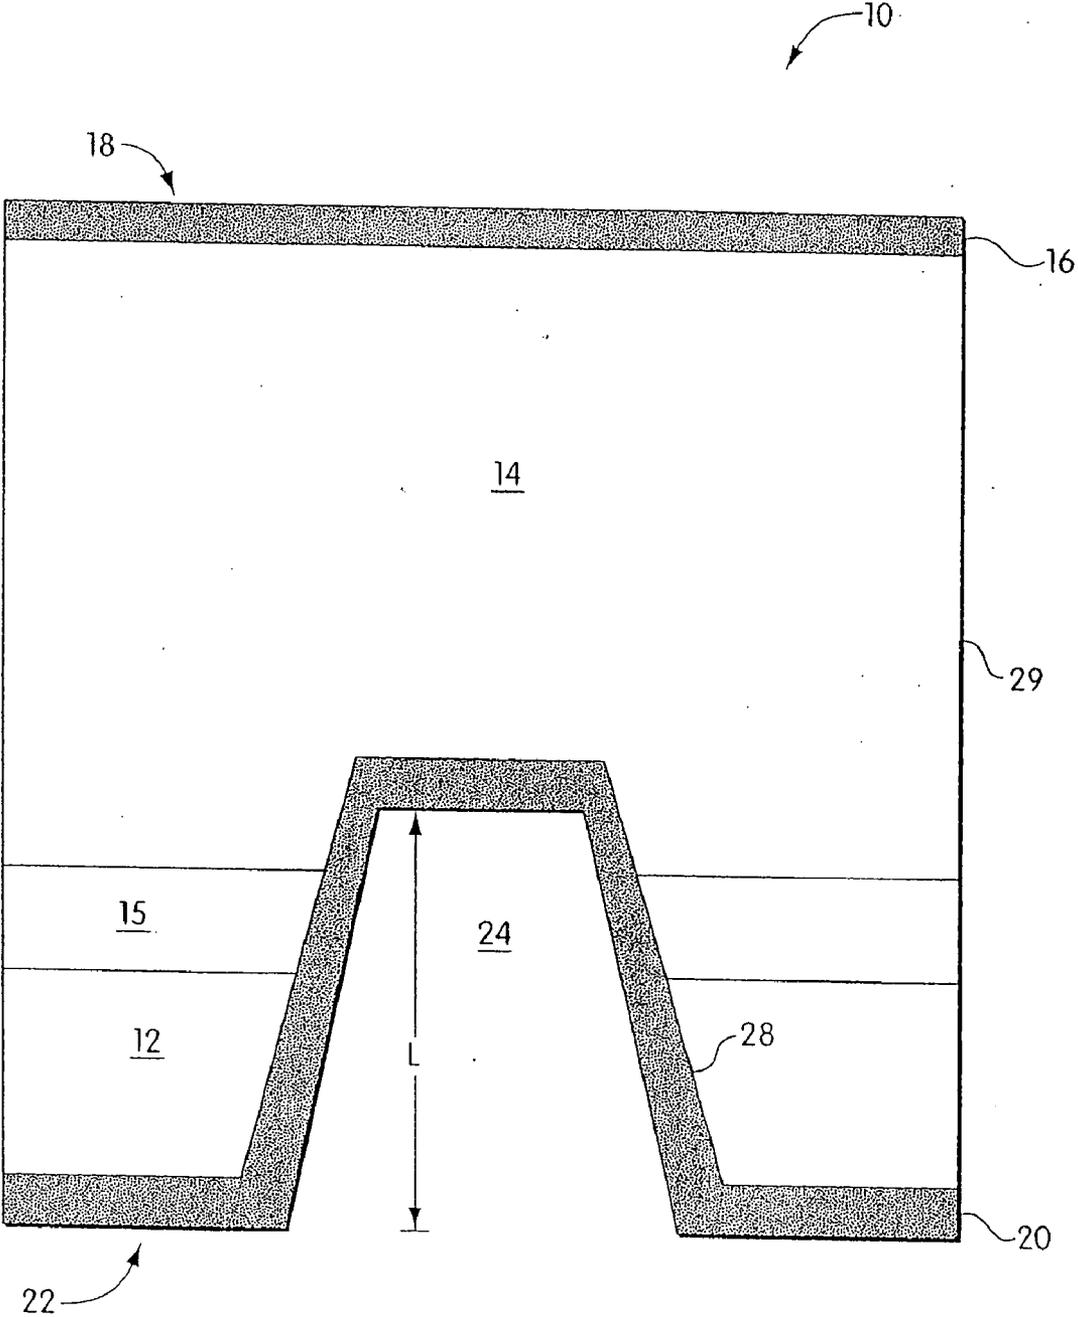


Fig. 1

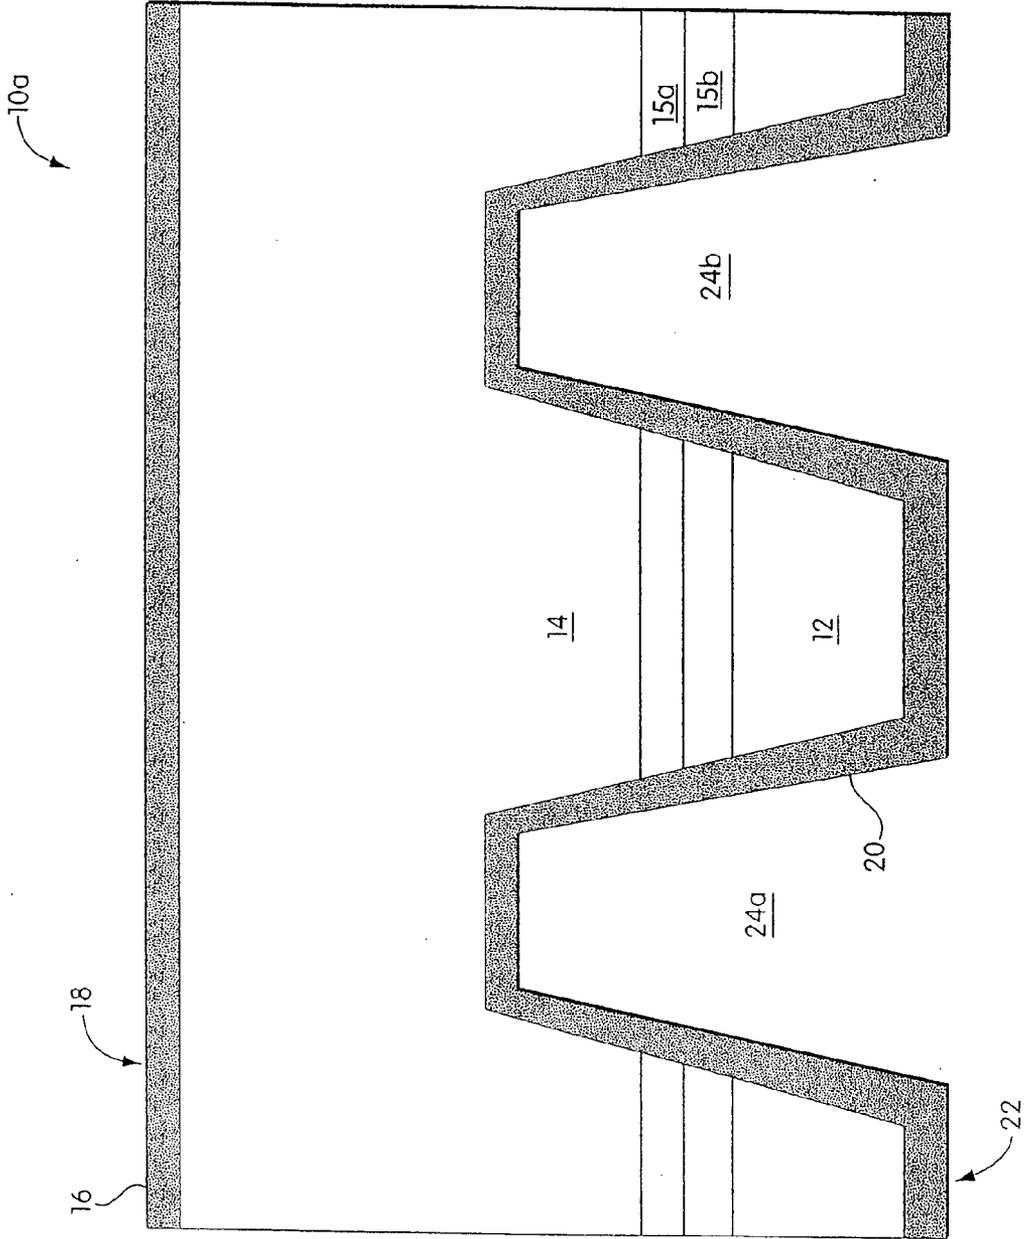


Fig. 2

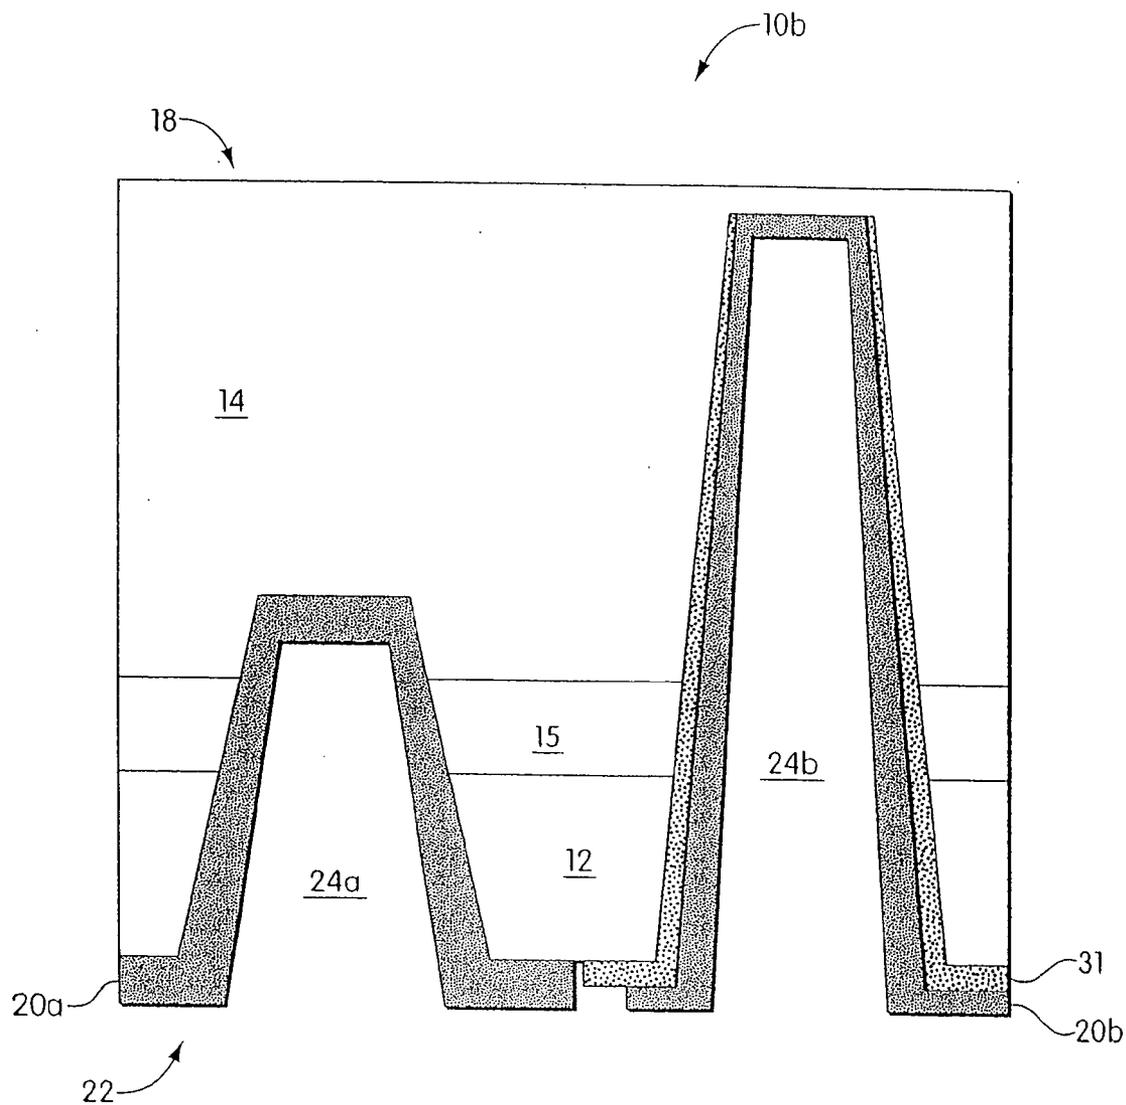


Fig. 3

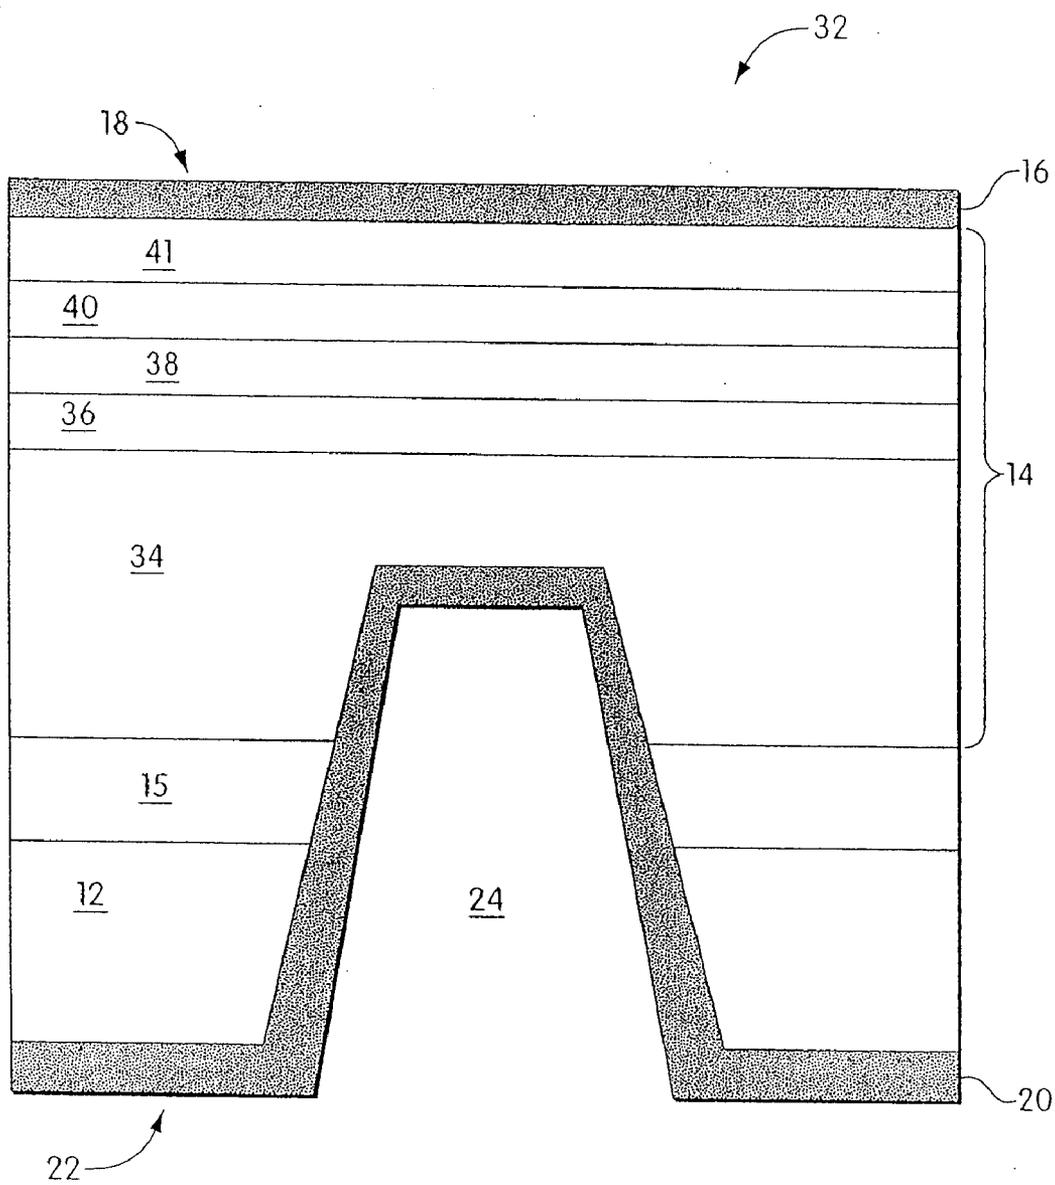


Fig. 4

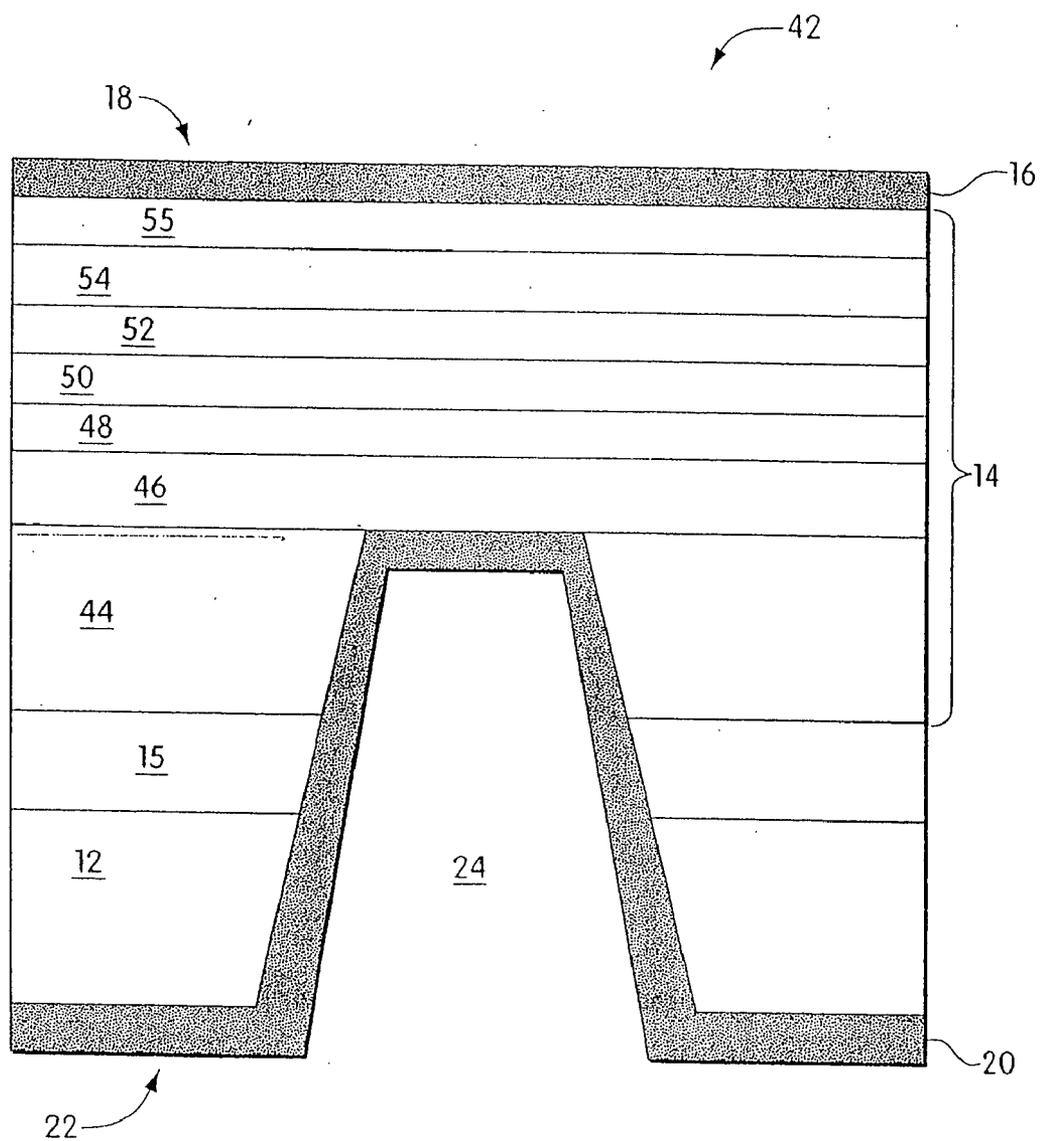


Fig. 5

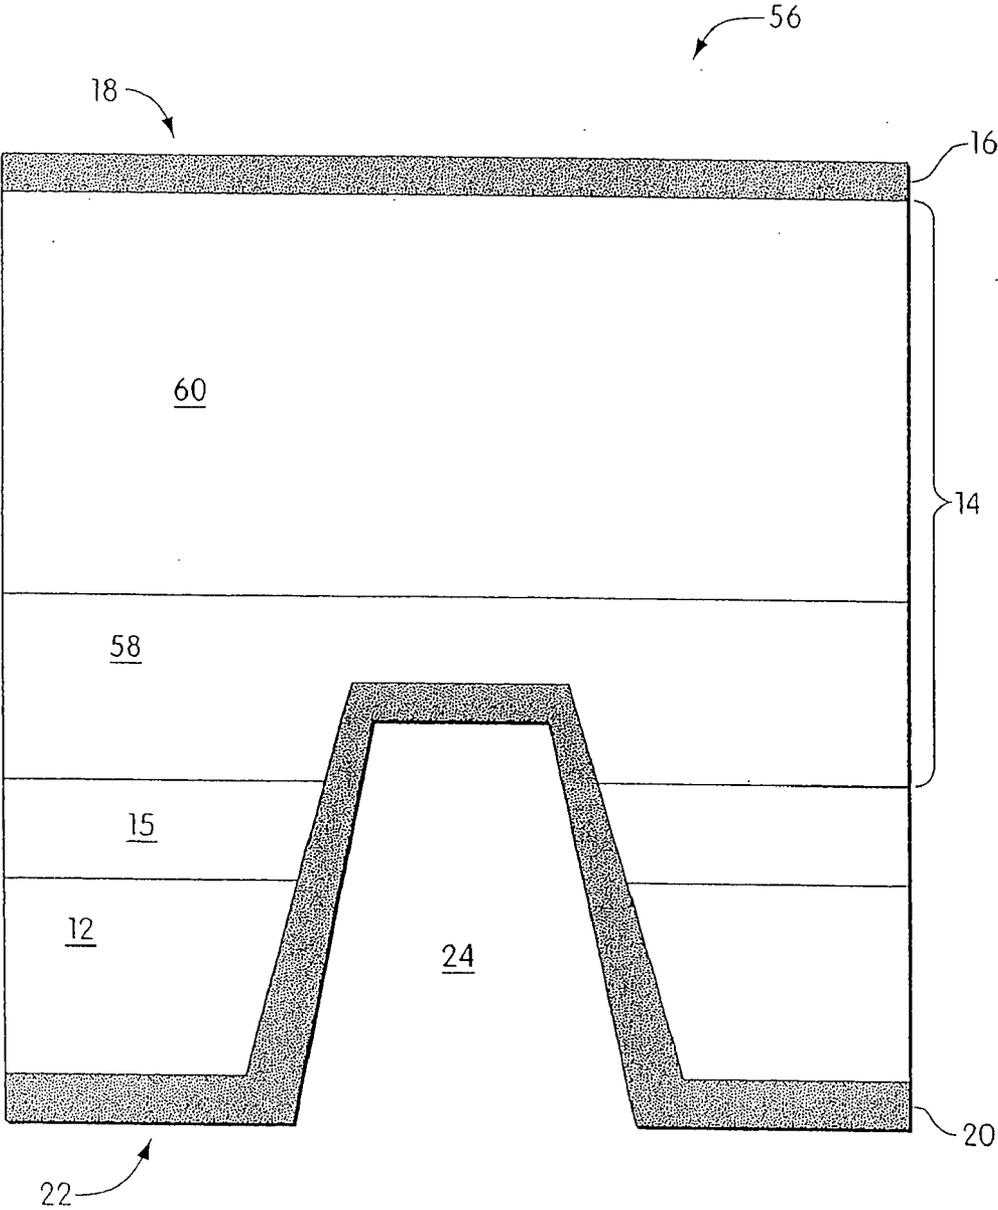


Fig. 6

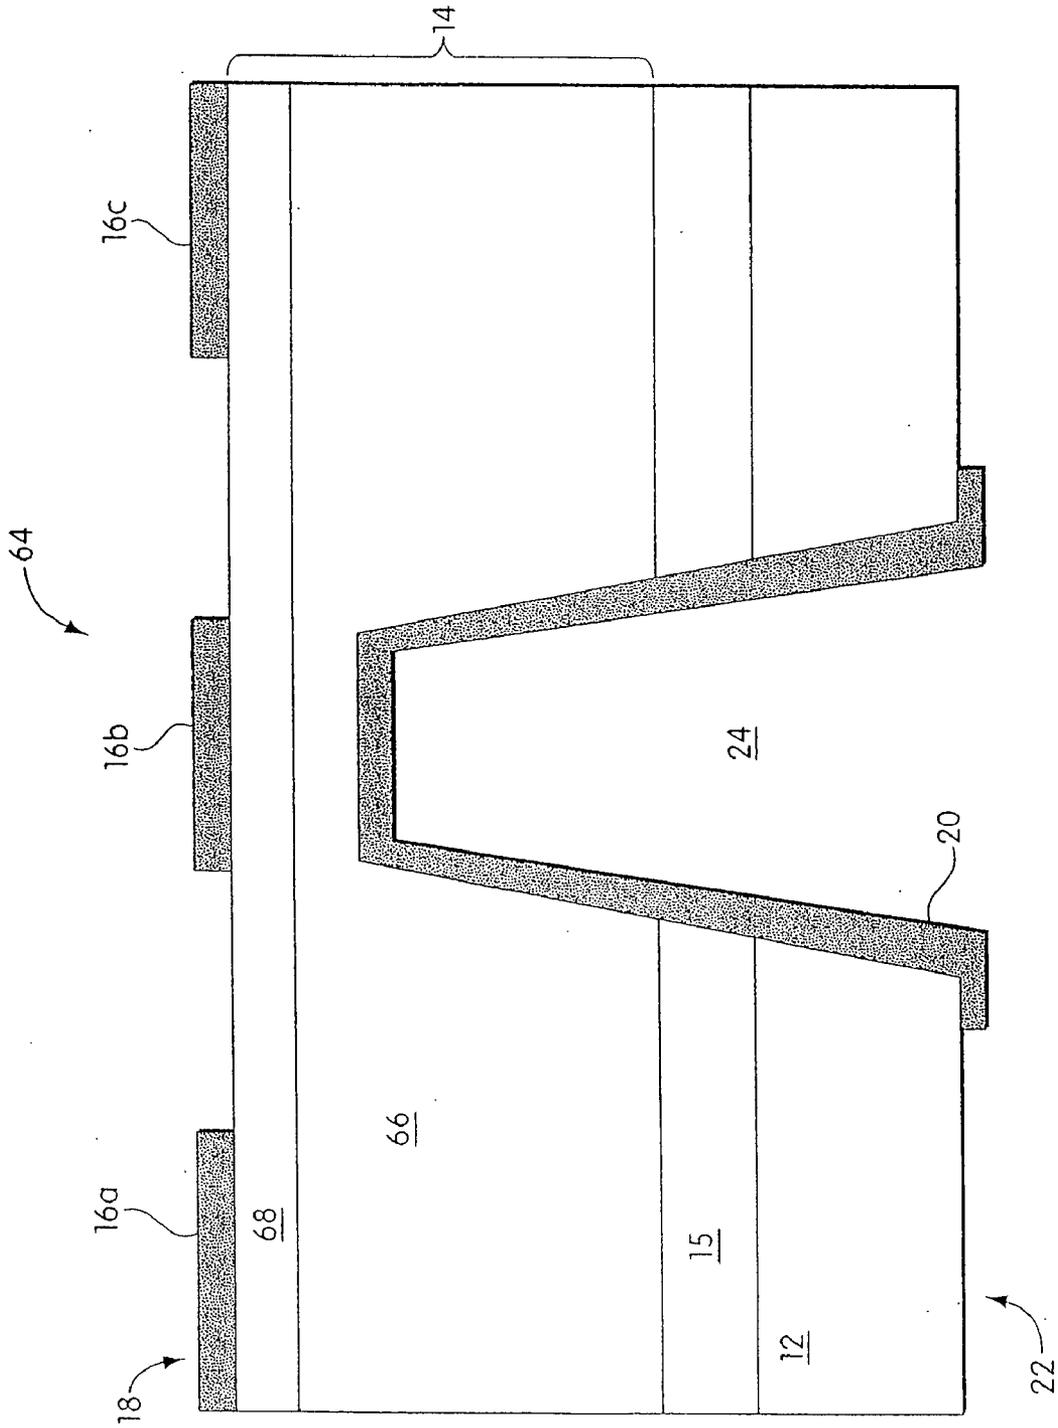


Fig. 7

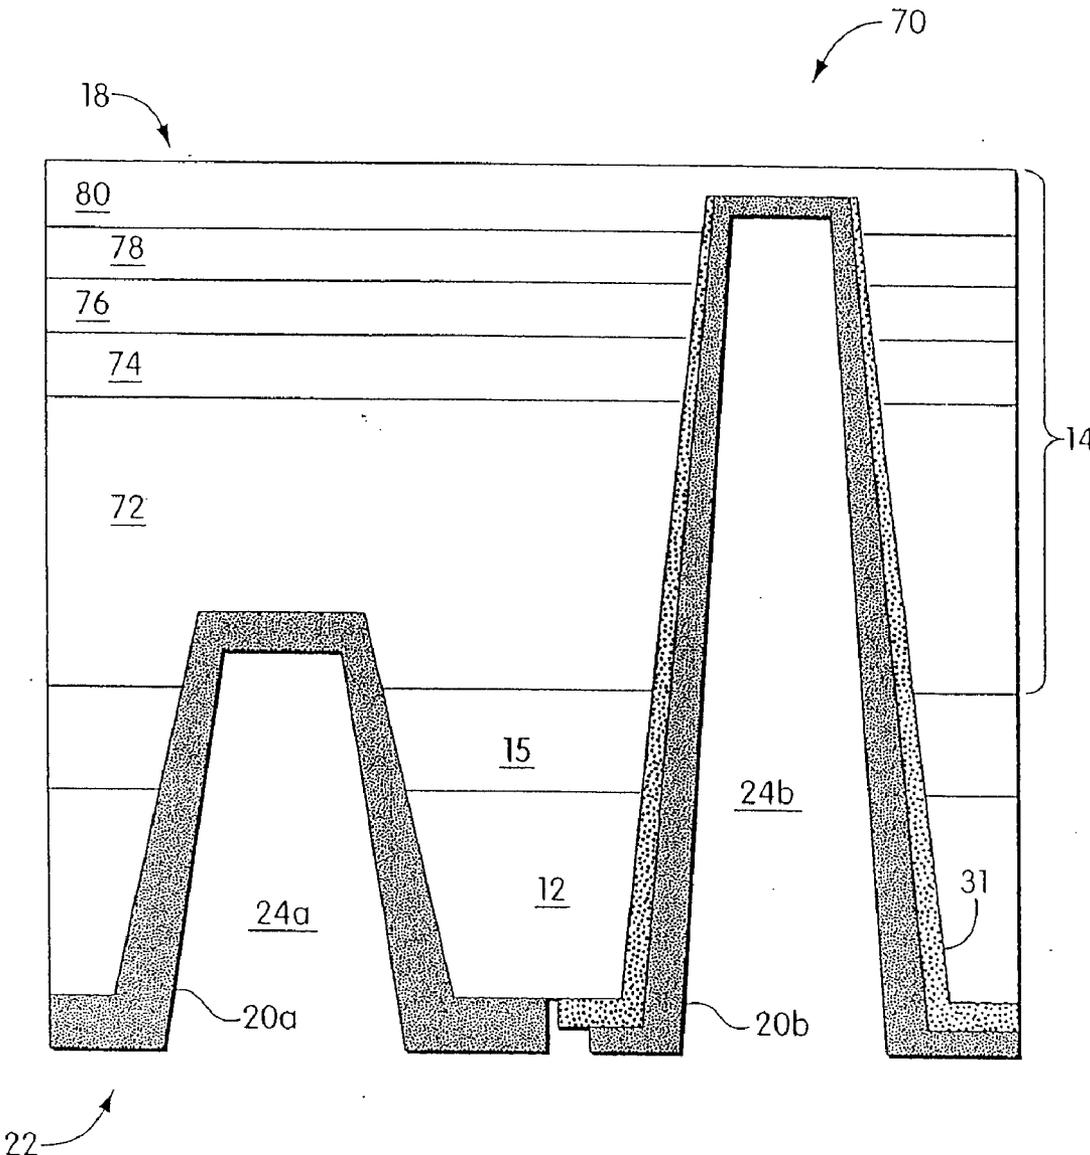


Fig. 8

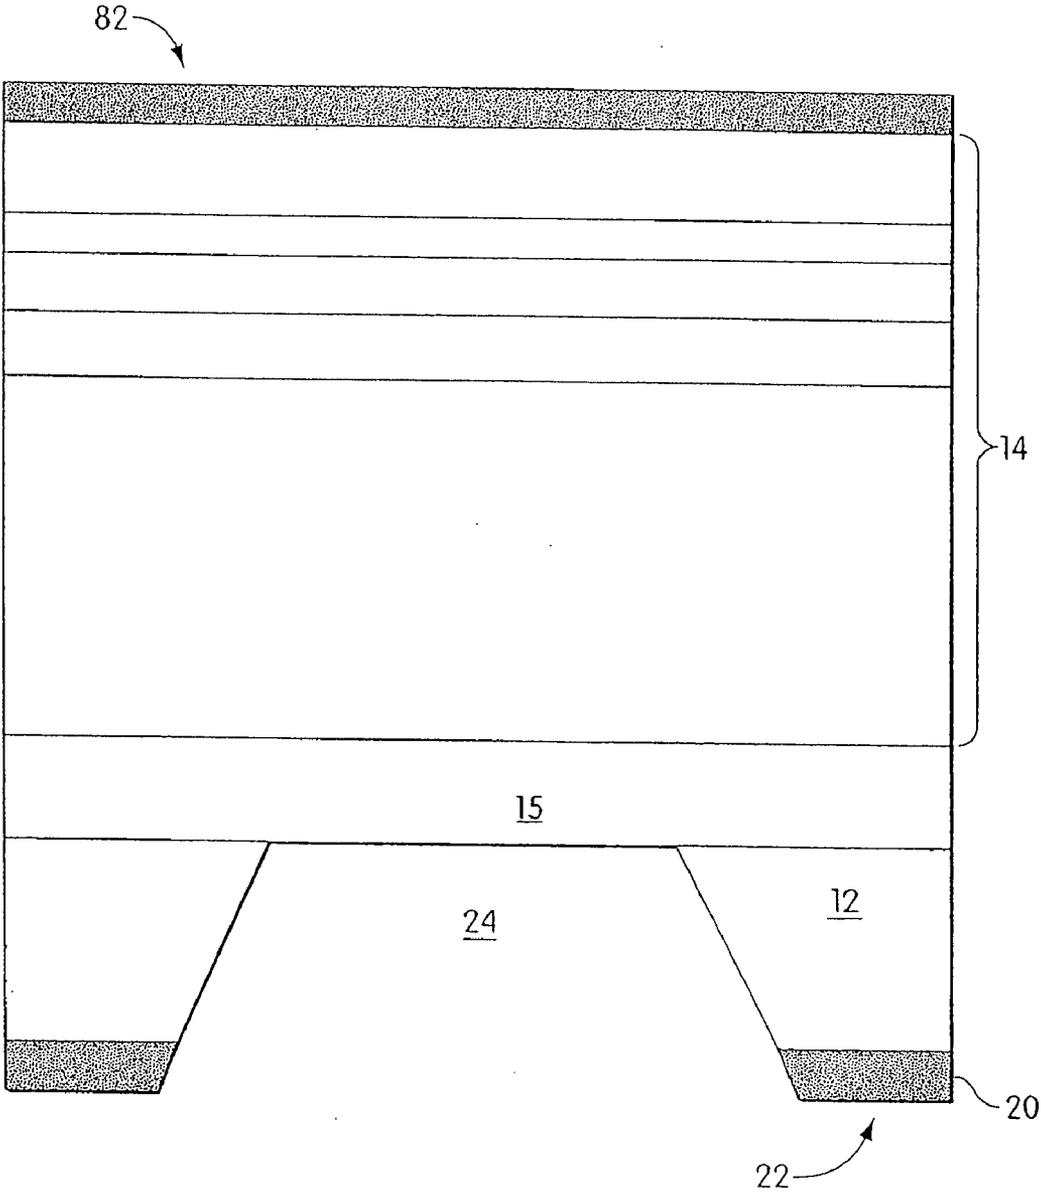


Fig. 9

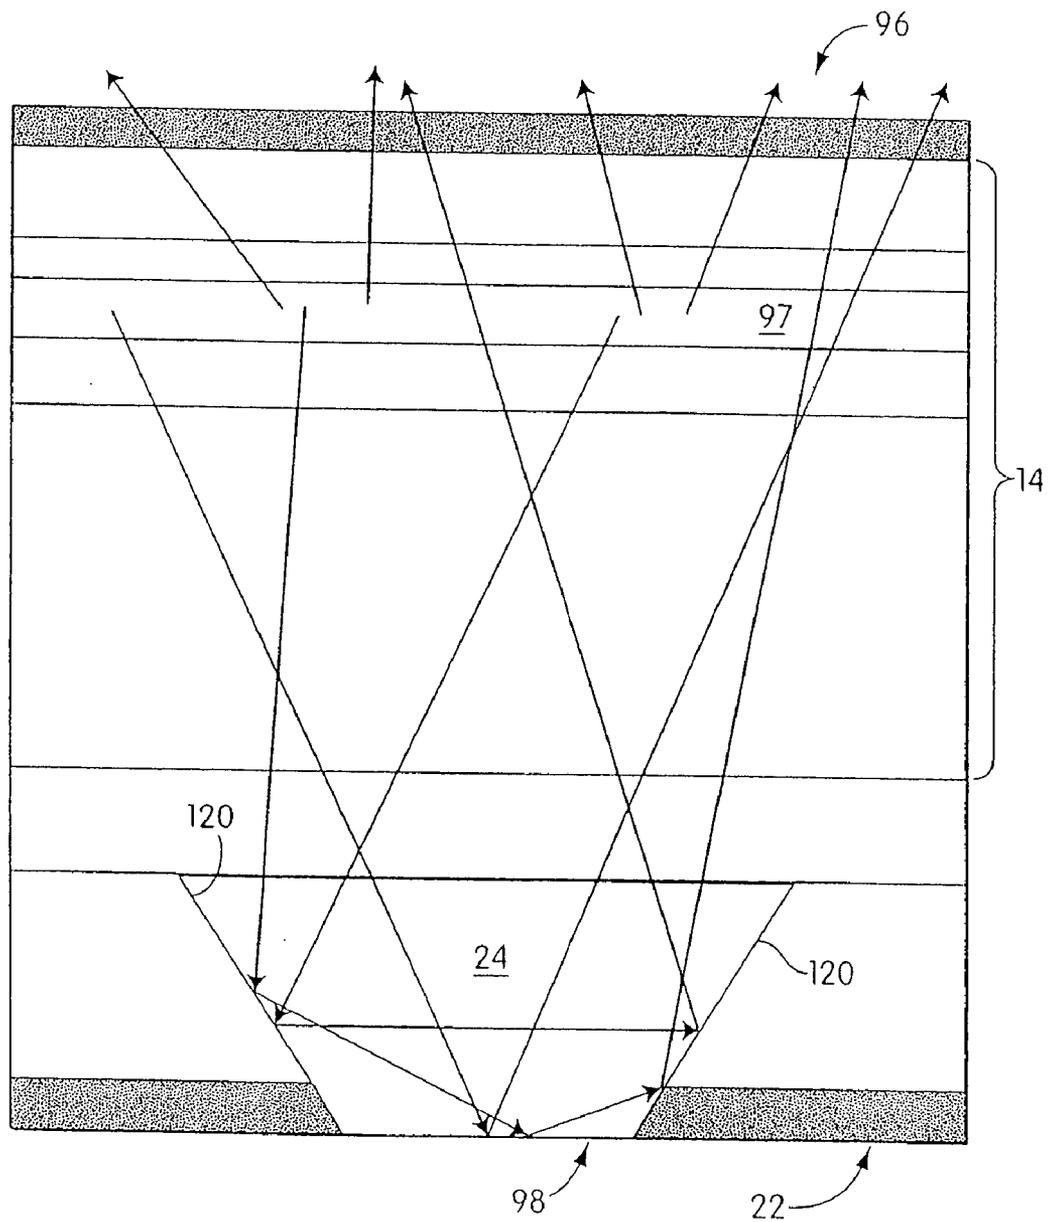


Fig. 10

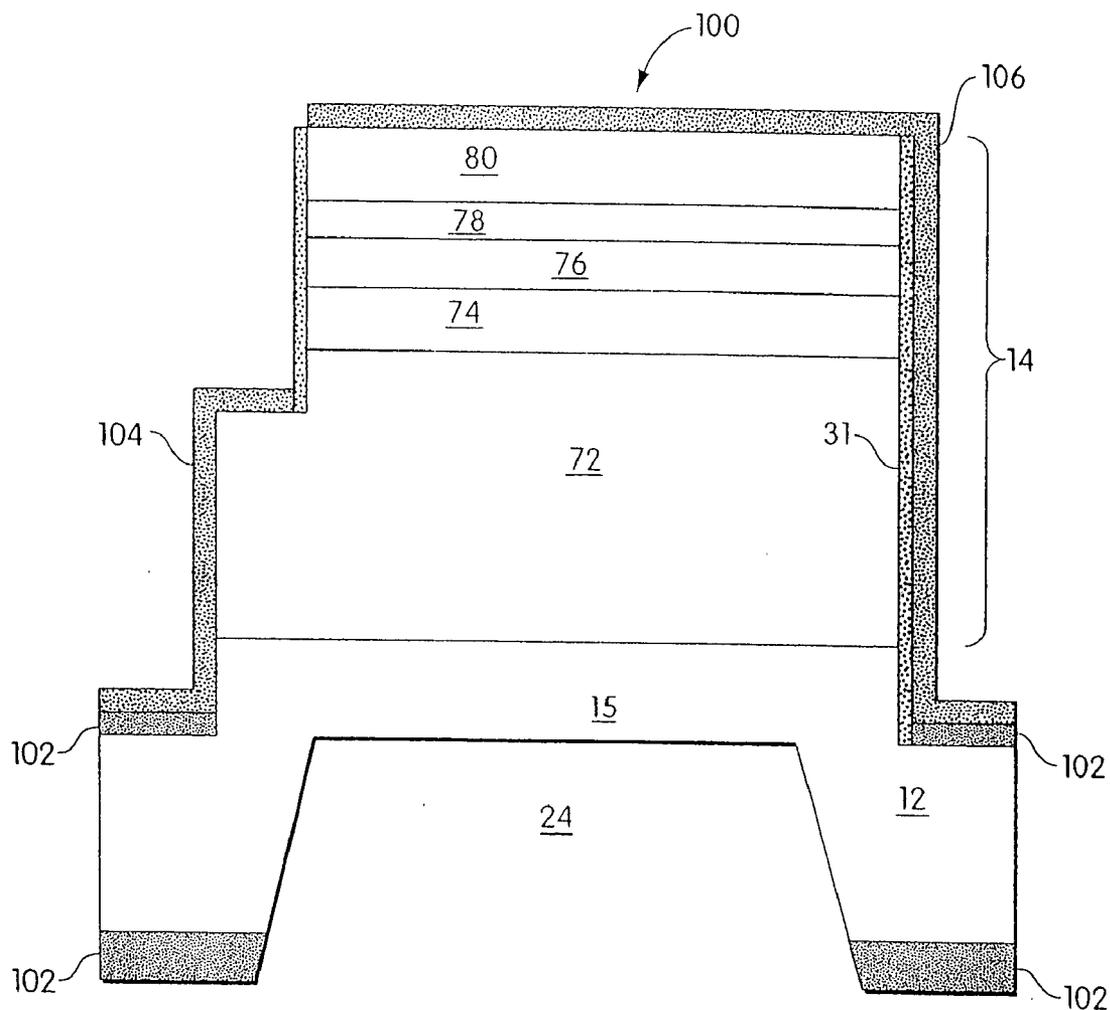


Fig. 11

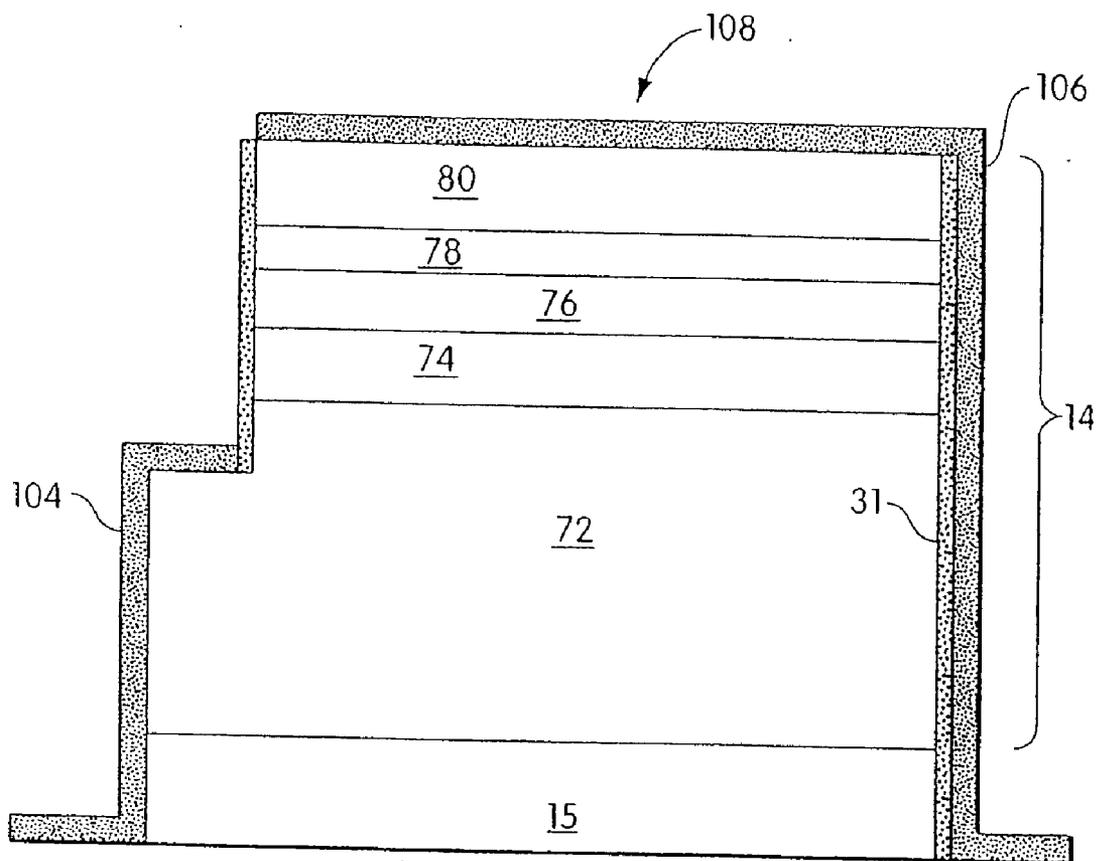


Fig. 12

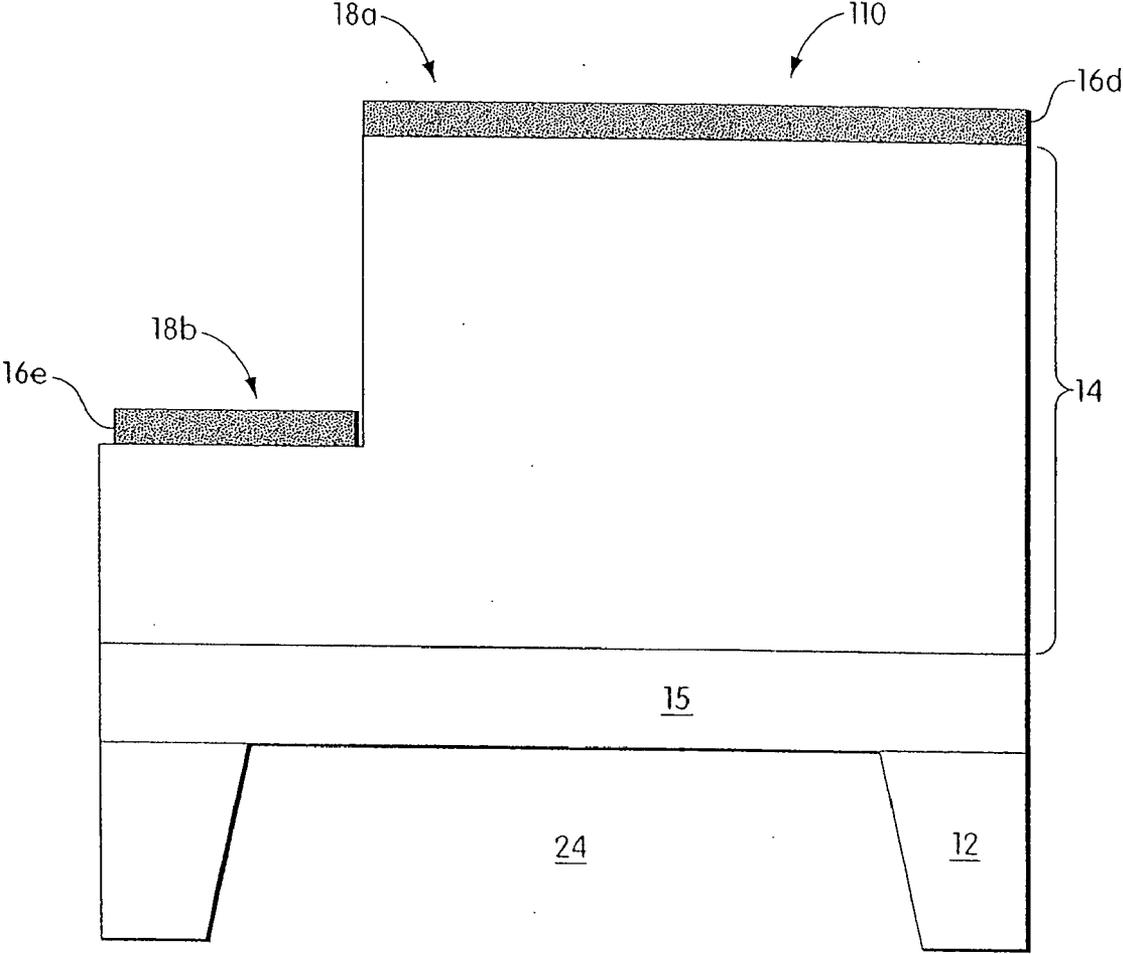


Fig. 13

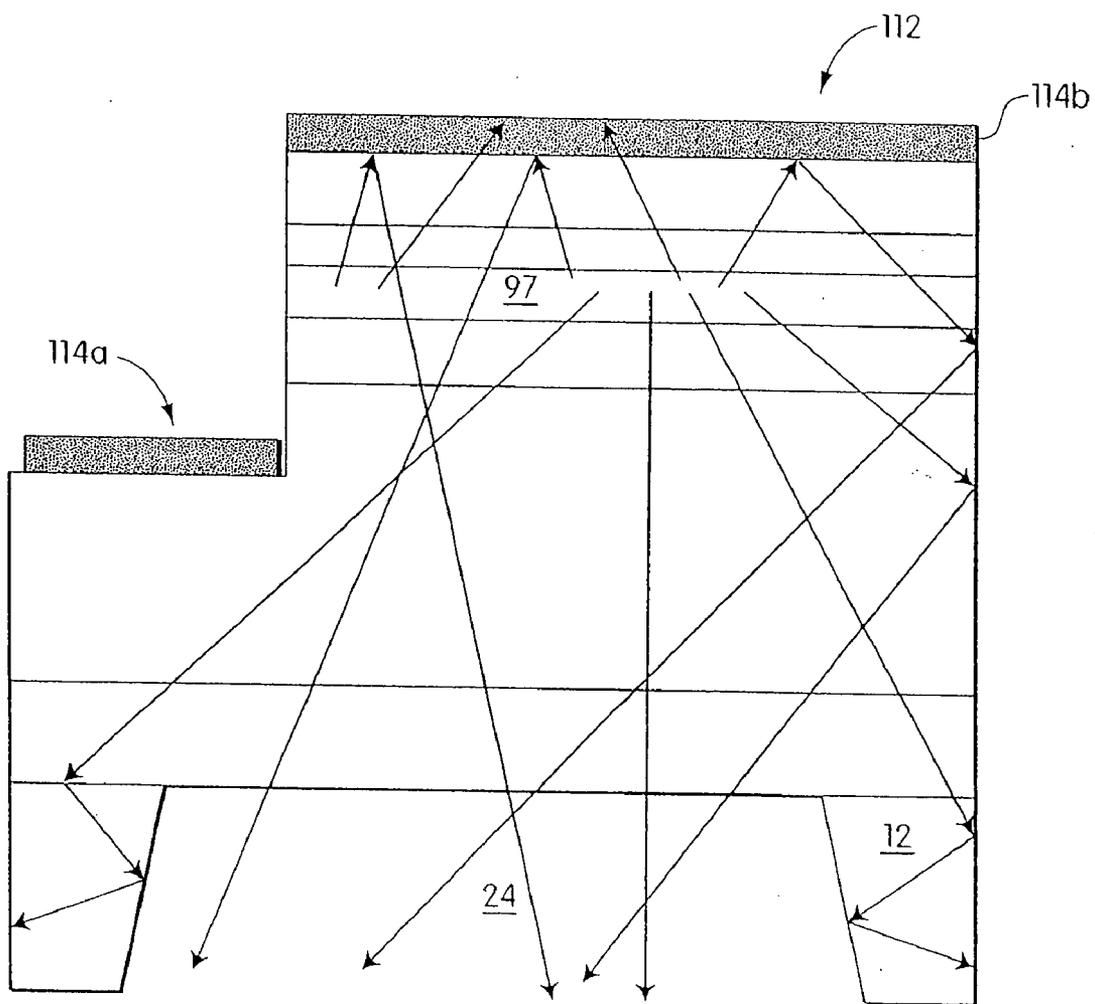


Fig. 14

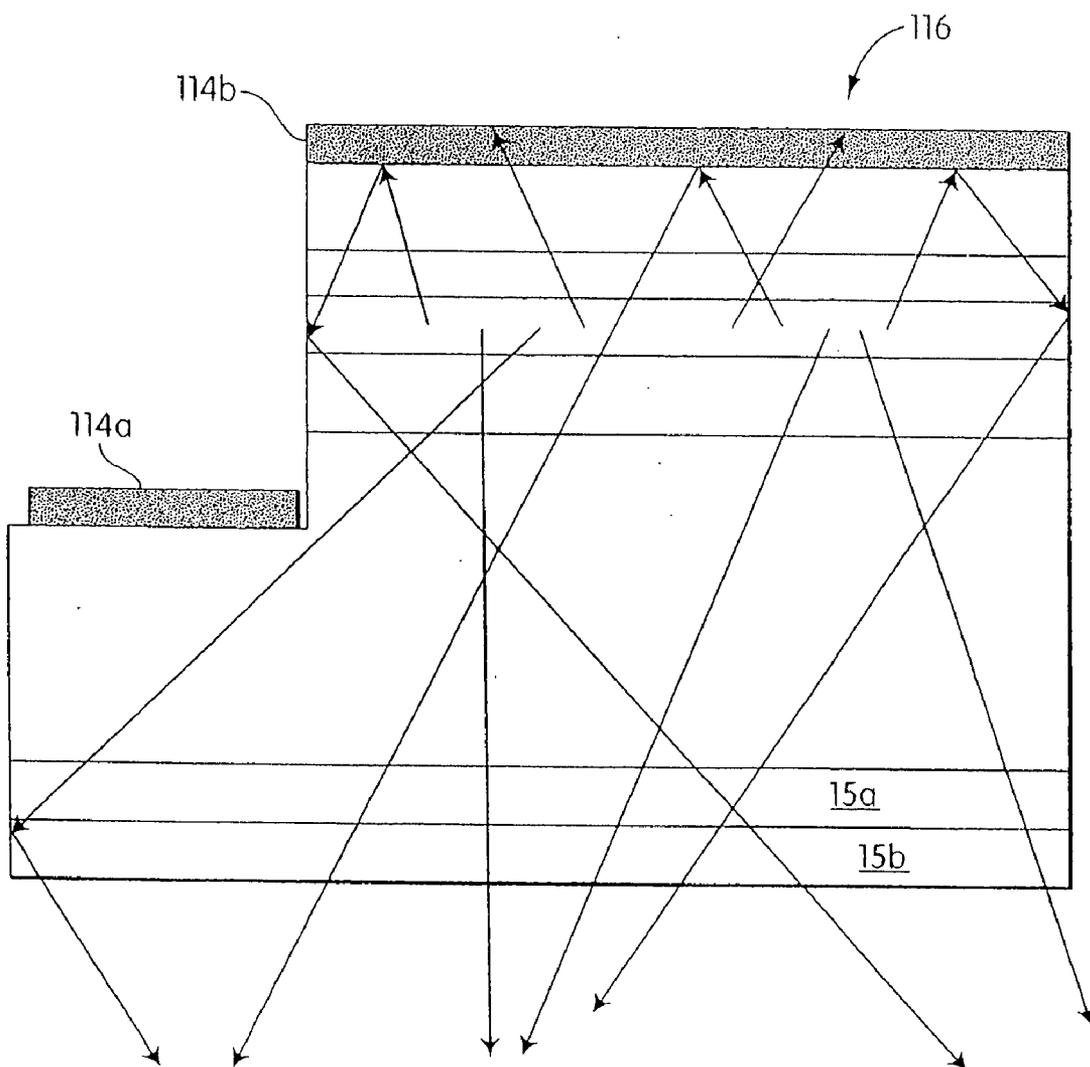


Fig. 15

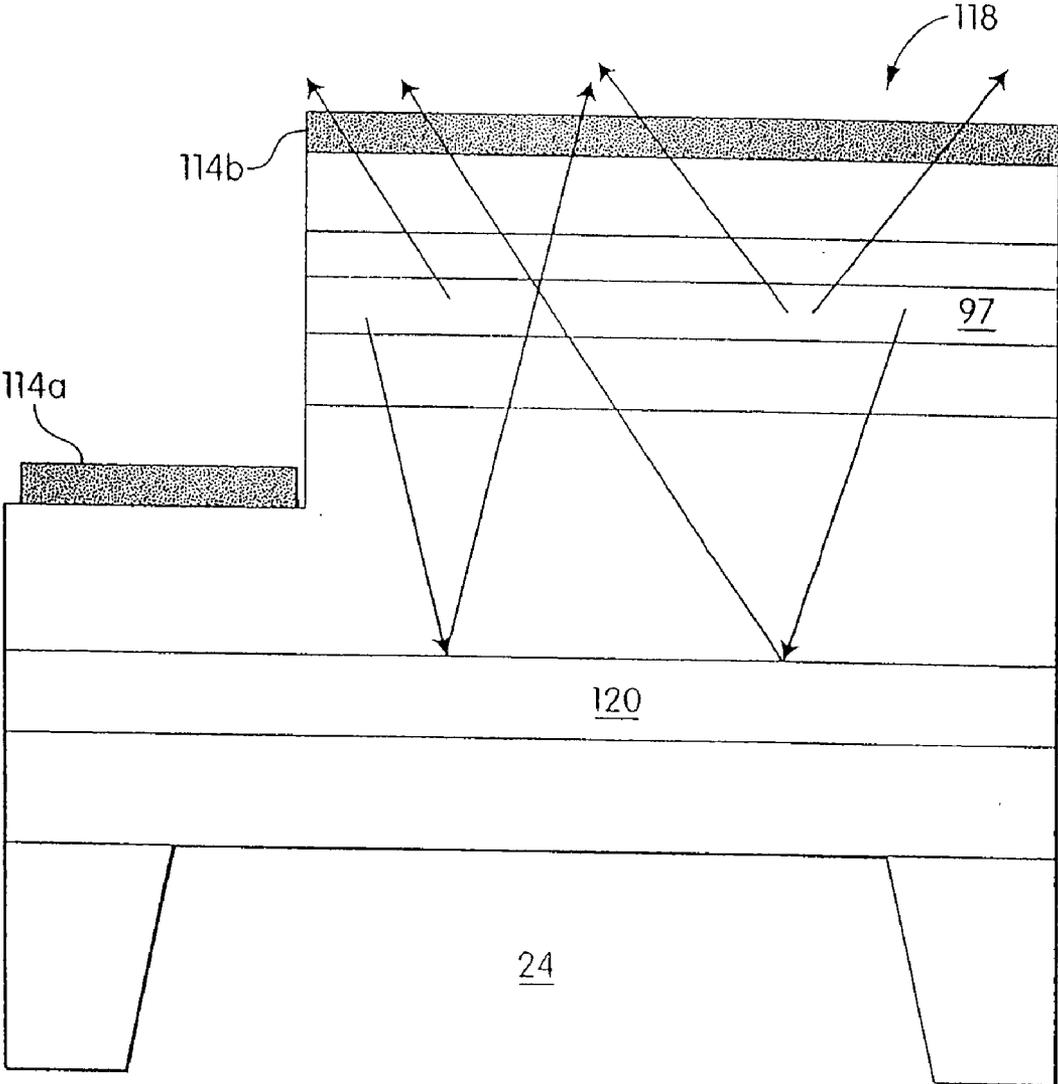


Fig. 16

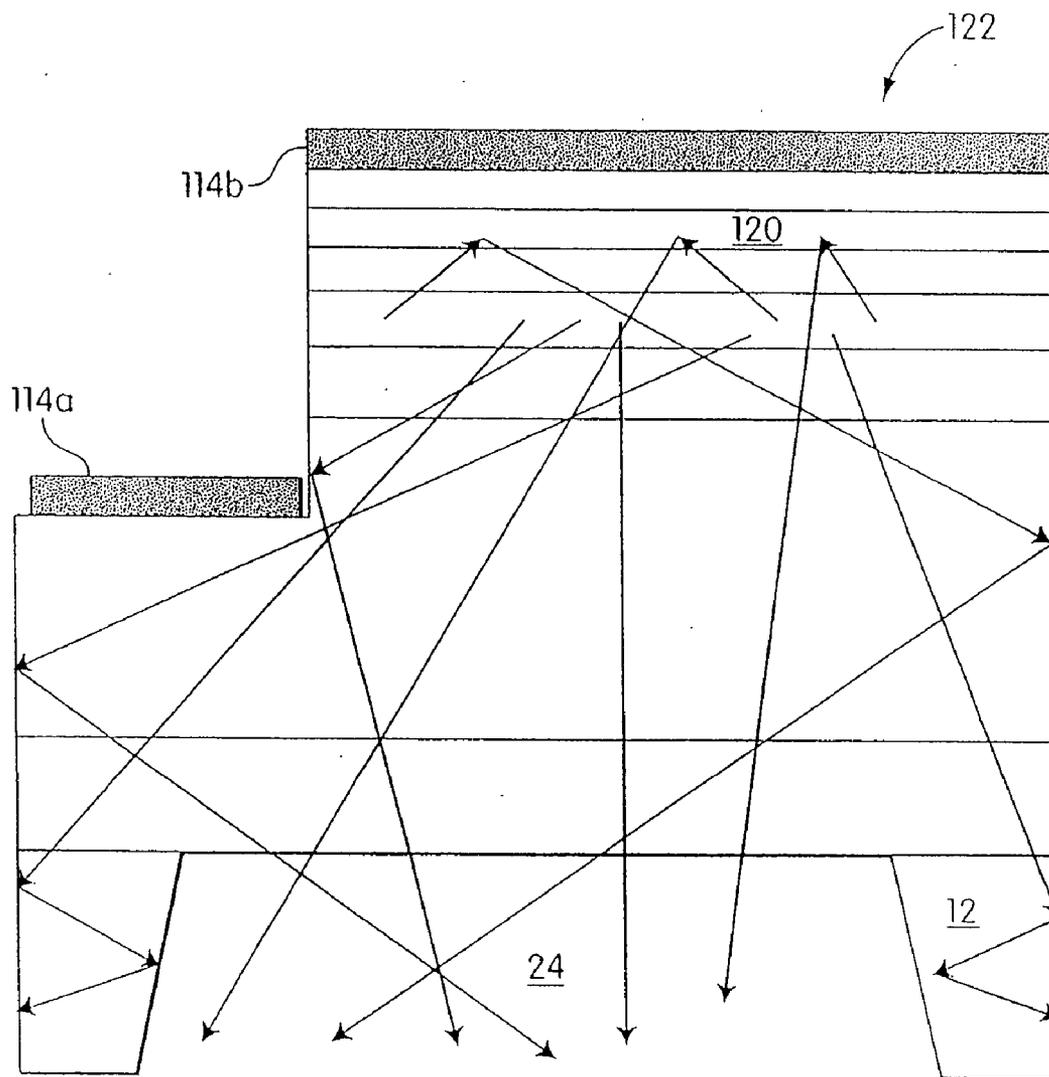


Fig. 17

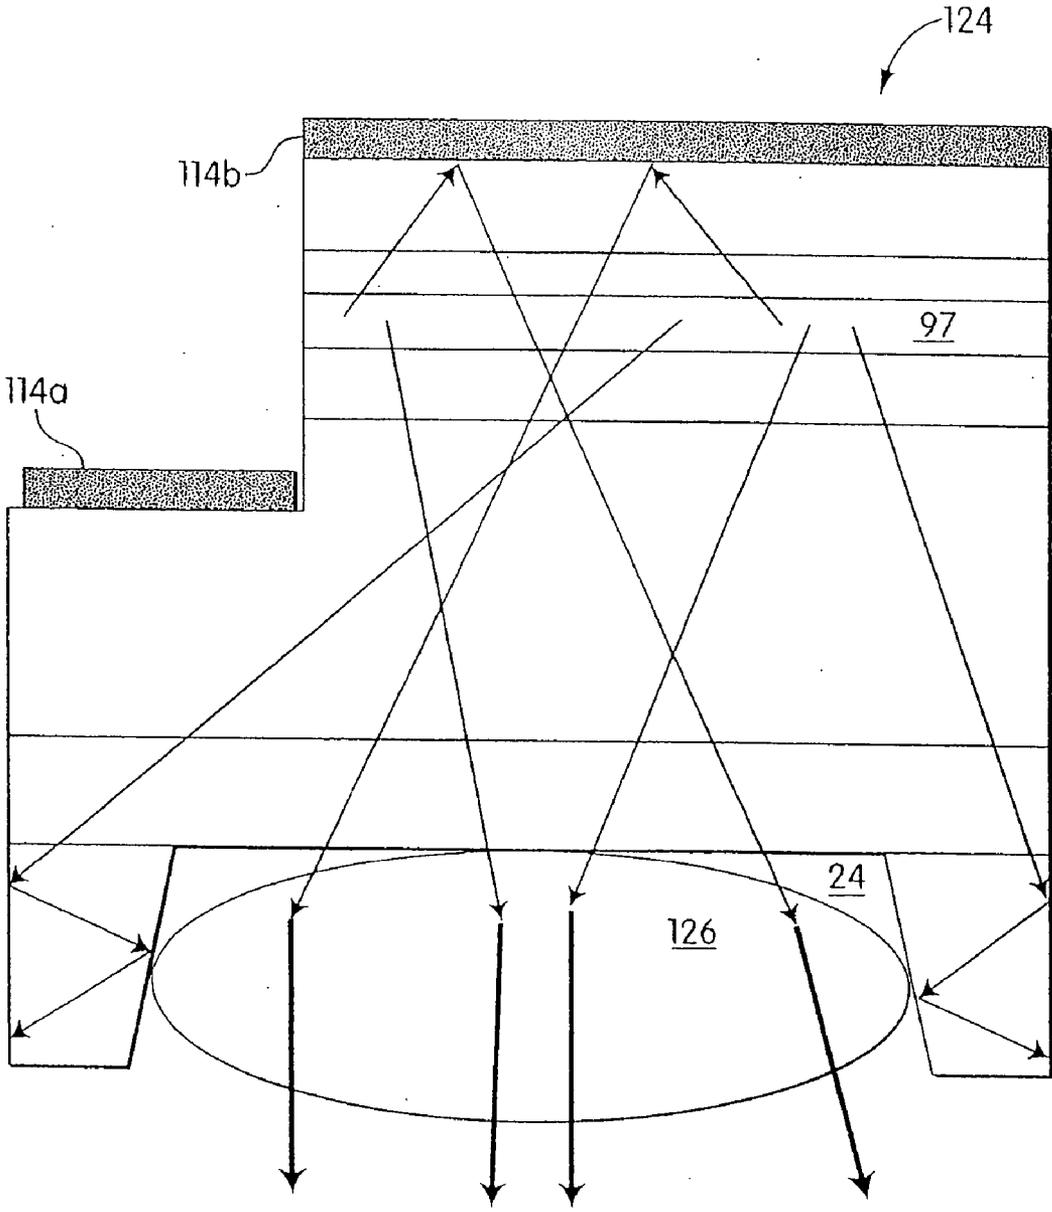


Fig. 18

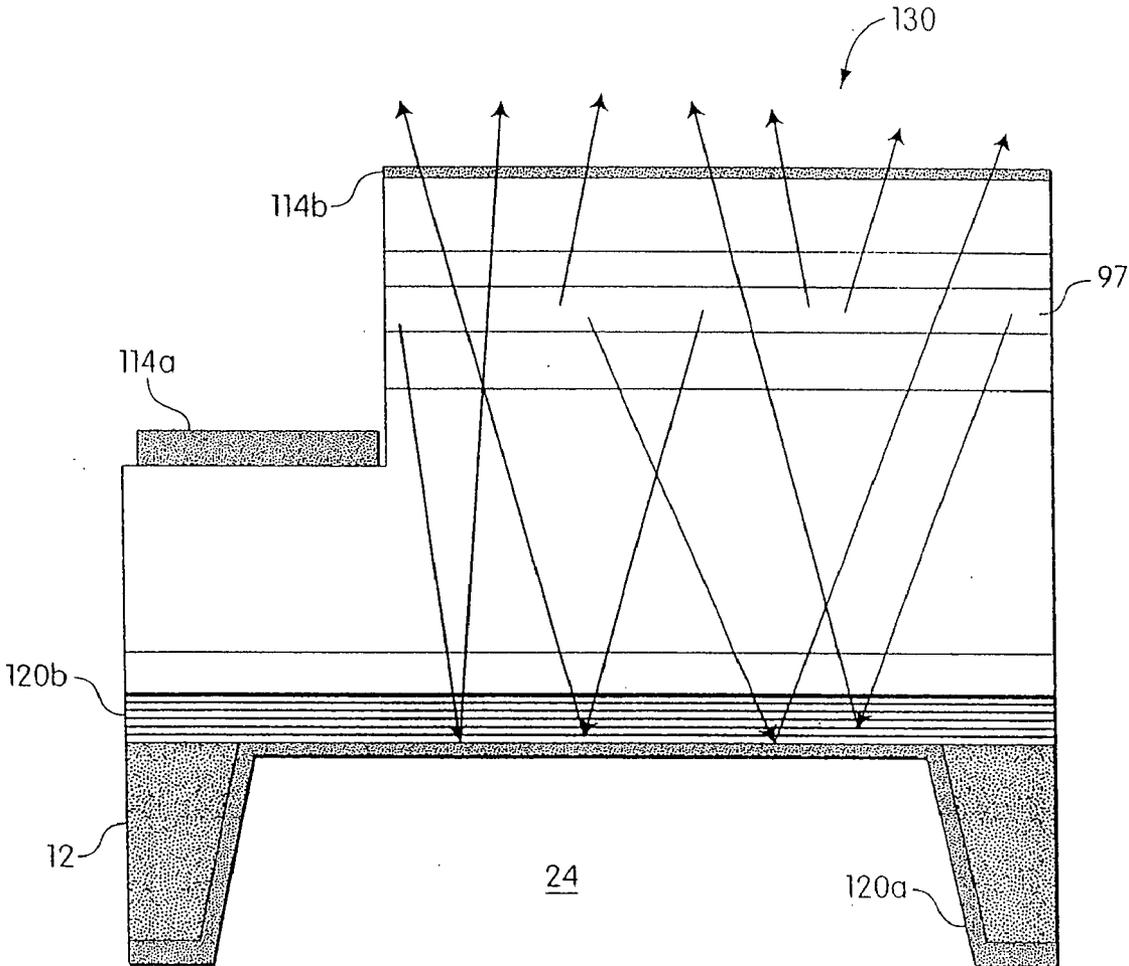


Fig. 19

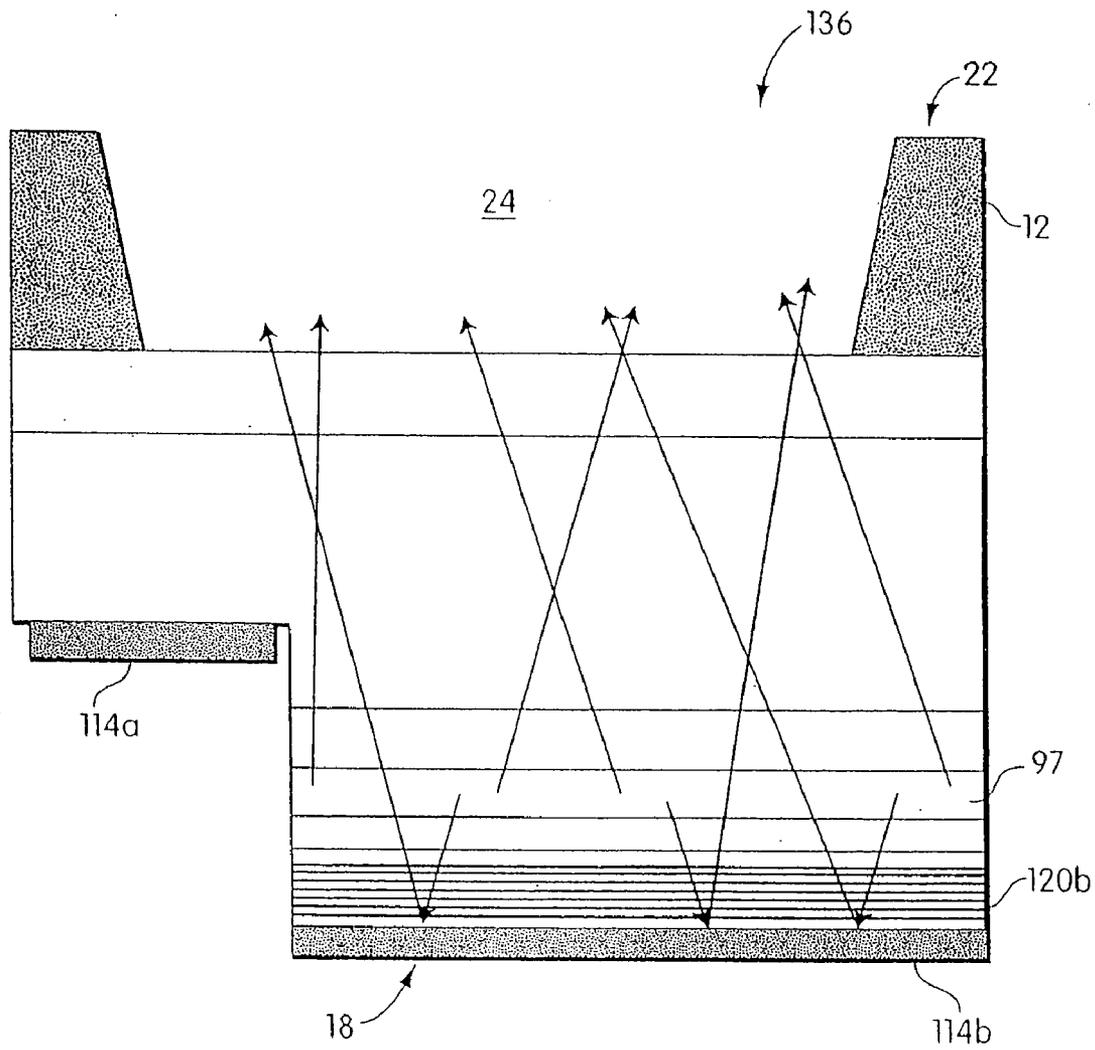


Fig. 20

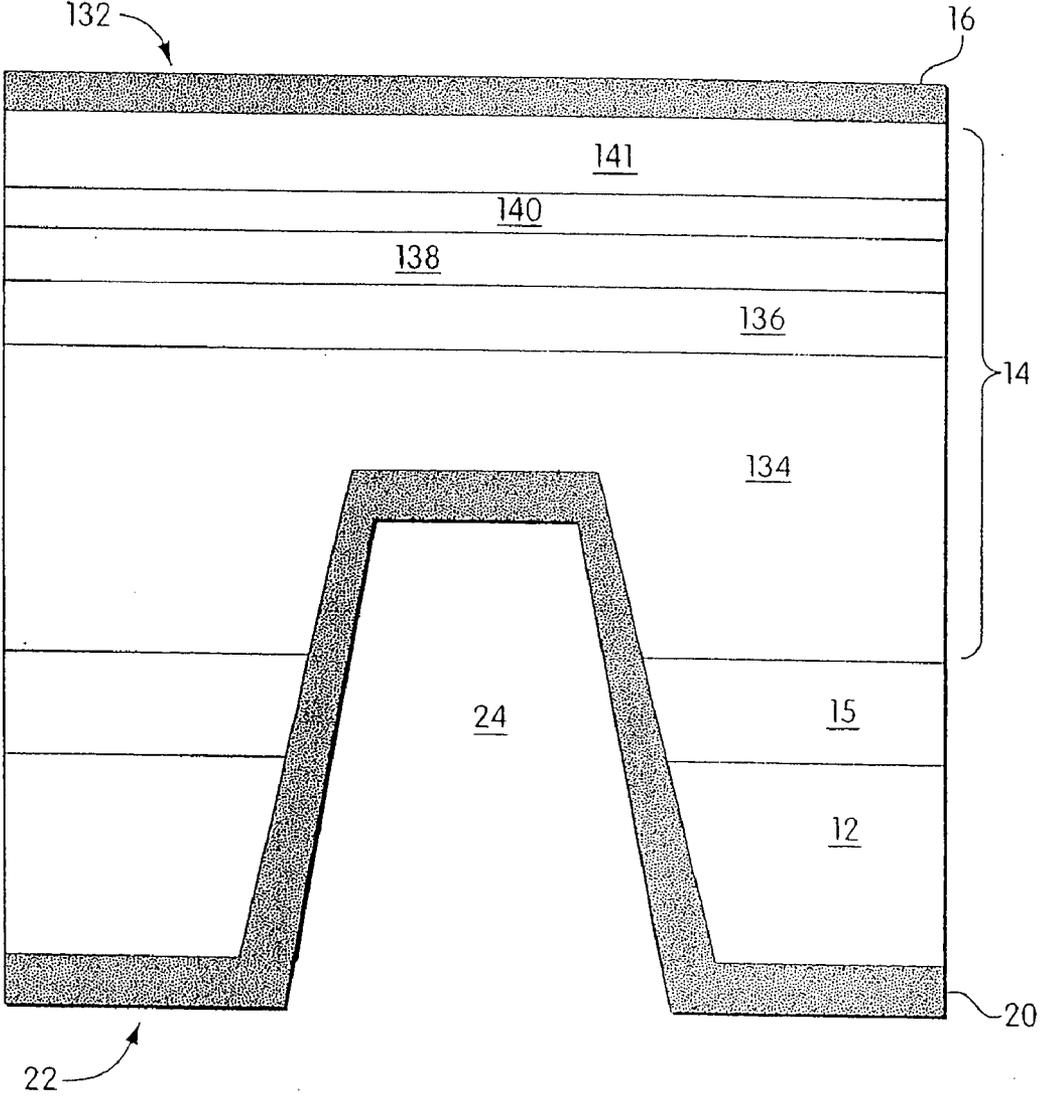


Fig. 21

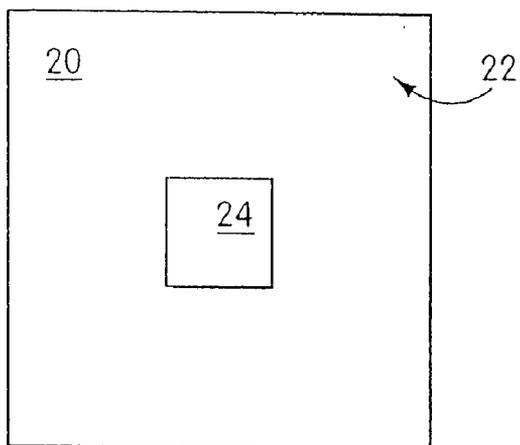


Fig. 22

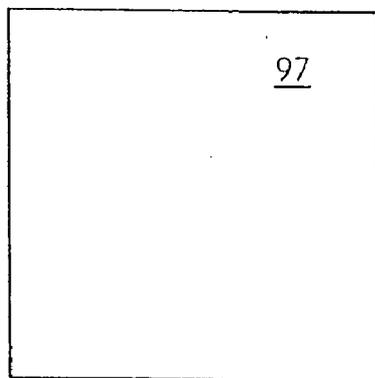


Fig. 23A

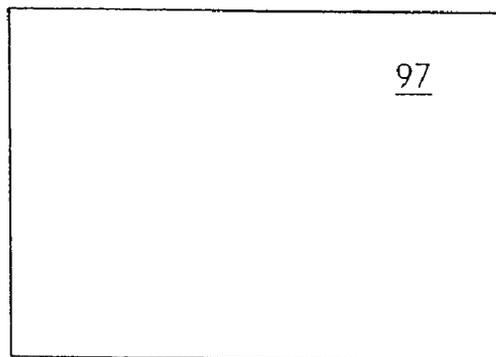


Fig. 23B

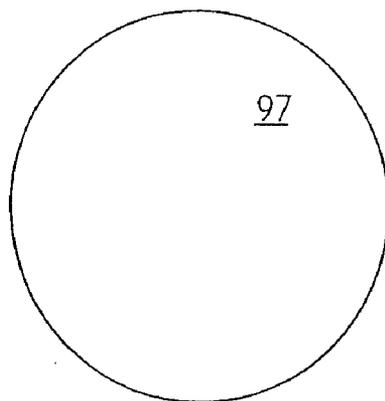


Fig. 23C

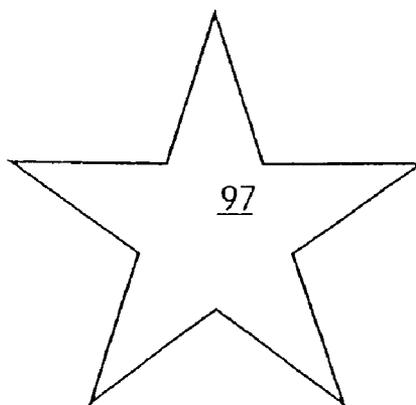


Fig. 23D

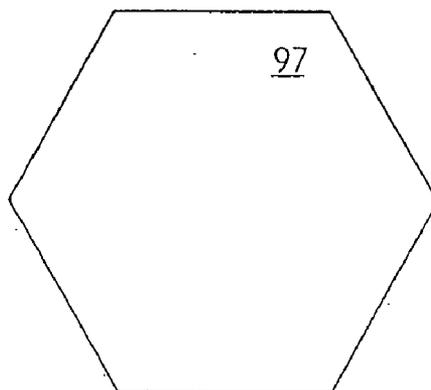


Fig. 23E

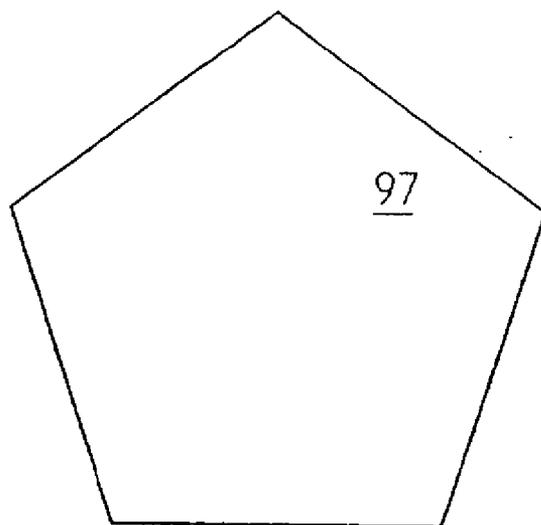


Fig. 23F

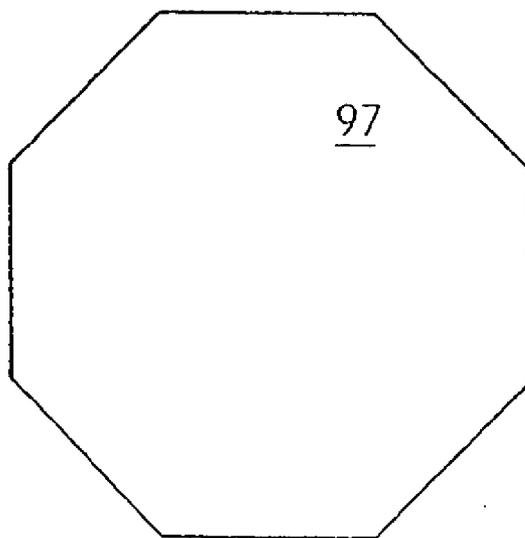


Fig. 23G




Fig. 23H




Fig. 23I




Fig. 23J




Fig. 23K

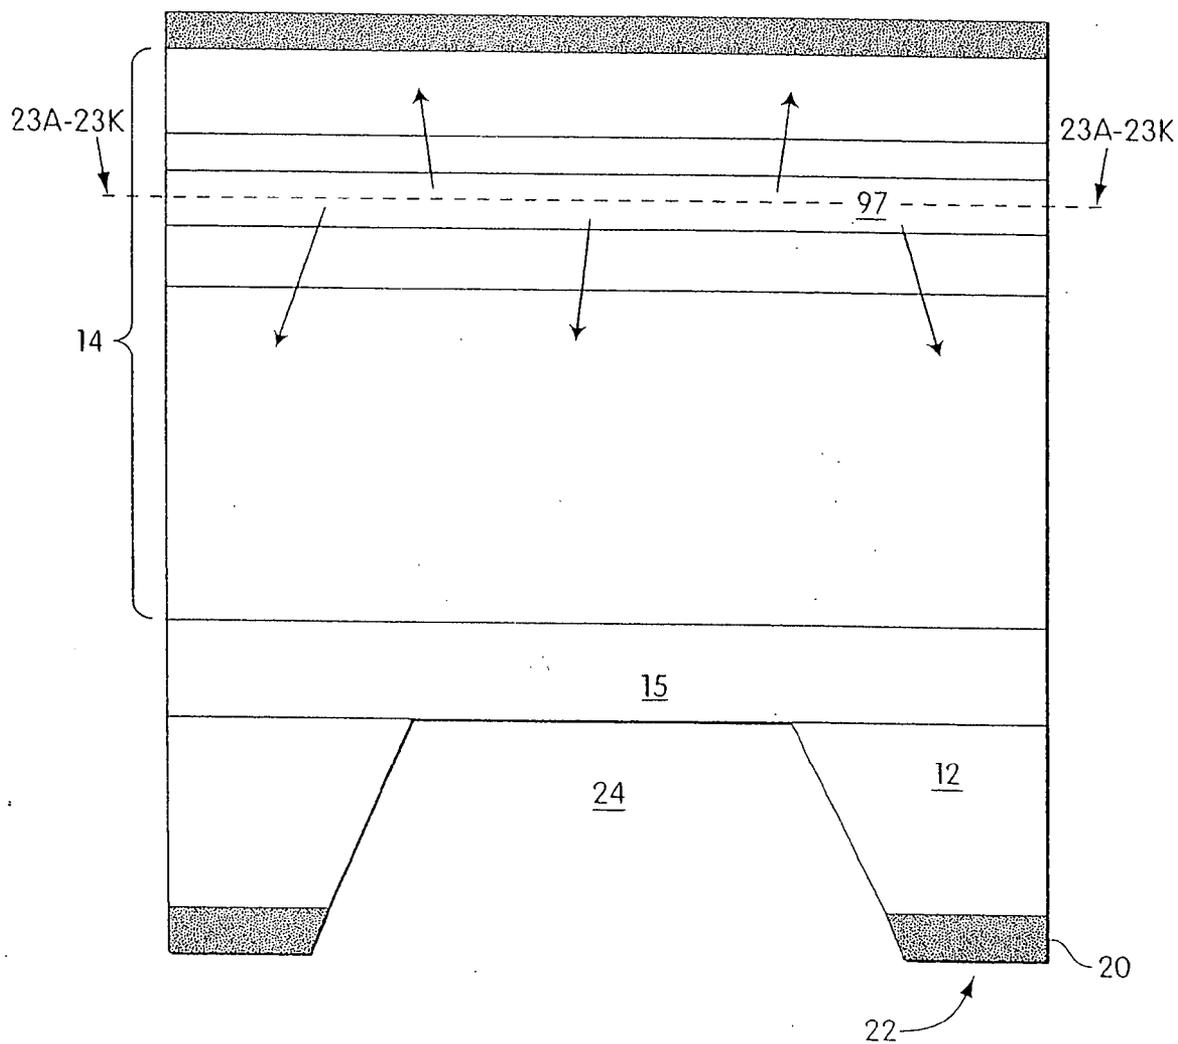


Fig. 24

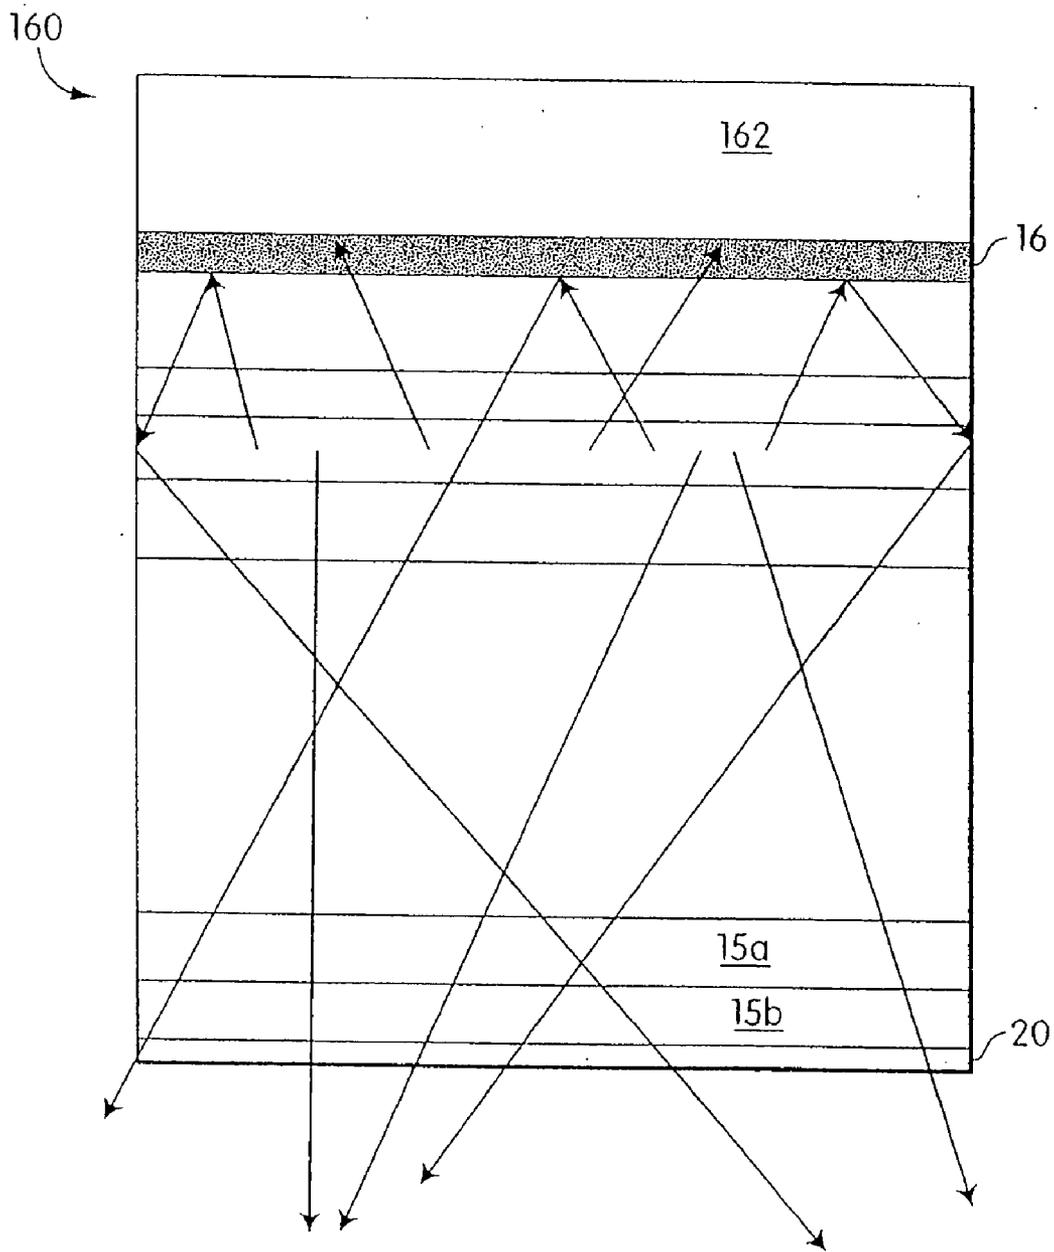


Fig. 25

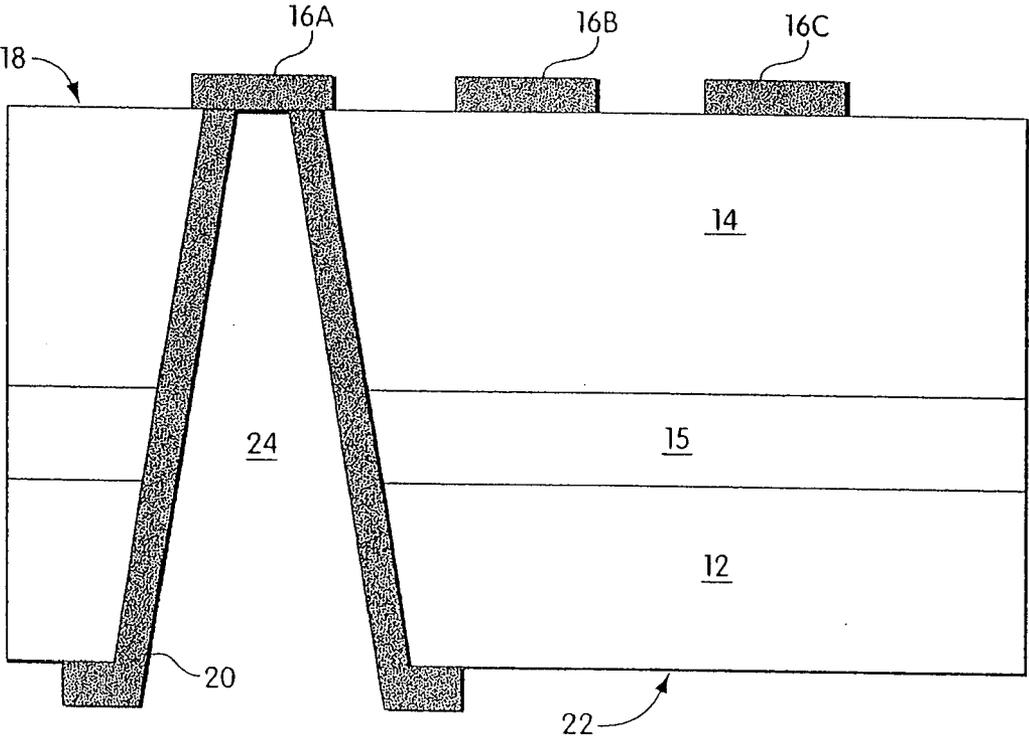


Fig. 26

GALLIUM NITRIDE MATERIAL DEVICES AND METHODS OF FORMING THE SAME

RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 10/650,122, filed Aug. 25, 2003, and entitled "Gallium Nitride Material Devices and Methods of Forming the Same", which is a continuation-in-part of U.S. patent application Ser. No. 09/792,414 (now U.S. Pat. No. 6,611,002), filed Feb. 23, 2001, and entitled "Gallium Nitride Material Devices and Methods Including Backside Vias". All of the above-mentioned disclosures are incorporated herein by reference.

FIELD OF INVENTION

[0002] The invention relates generally to semiconductor materials and, more particularly, to gallium nitride materials and methods of producing gallium nitride materials.

BACKGROUND OF INVENTION

[0003] Gallium nitride materials include gallium nitride (GaN) and its alloys such as aluminum gallium nitride (AlGaN), indium gallium nitride (InGaN), and aluminum indium gallium nitride (AlInGaN). These materials are semiconductor compounds that have a relatively wide, direct bandgap which permits highly energetic electronic transitions to occur. Such electronic transitions can result in gallium nitride materials having a number of attractive properties including the ability to efficiently emit visible (e.g., blue, green) or UV light, the ability to transmit signals at high frequency, and others. Accordingly, gallium nitride materials are being widely investigated in many semiconductor device applications such as transistors, field emitters, and optoelectronic devices.

[0004] Gallium nitride materials have been formed on a number of different substrates including silicon carbide (SiC), sapphire, and silicon. Silicon substrates are readily available and relatively inexpensive, and silicon processing technology has been well developed. However, forming gallium nitride materials on silicon substrates to produce semiconductor devices presents challenges which arise from differences in the lattice constant, thermal expansion, and band gap between silicon and gallium nitride.

SUMMARY OF INVENTION

[0005] The invention includes providing gallium nitride material structures, devices and methods of forming the structures and devices.

[0006] In one aspect, a semiconductor device is provided. The device comprises a substrate, and a gallium nitride material region formed over the substrate. The semiconductor device has at least one via extending from a first side of the semiconductor device, wherein the via is free of an electrical contact formed therein.

[0007] In another aspect, a method of forming a semiconductor device is provided. The method comprises forming a gallium nitride material region over a substrate, and forming a via extending from a first side of the semiconductor device. The via is free of an electrical contact formed therein.

[0008] In another aspect, a semiconductor device is provided. The semiconductor device comprises a silicon sub-

strate and a gallium nitride material region formed over the silicon substrate. The device further comprises a first electrical contact formed over a portion of the gallium nitride material region, and a second electrical contact formed over a portion of the gallium nitride material region. The semiconductor device has at least one via extending from a backside of the semiconductor device.

[0009] In another aspect, a method of forming a semiconductor device is provided. The method comprises forming a gallium nitride material region over a silicon substrate, forming a first electrical contact over the gallium nitride material region, and forming a second electrical contact over the gallium nitride material region. The method further comprises forming a via extending from a backside of the semiconductor device.

[0010] In another aspect, an opto-electronic device is provided. The opto-electronic device comprises a silicon substrate, a compositionally-graded transition layer formed over the silicon substrate, and a gallium nitride material region formed over the compositionally-graded transition layer. The gallium nitride material region includes an active region.

[0011] In another aspect, a method of forming an opto-electronic device is provided. The method comprises forming a compositionally-graded transition layer formed over a silicon substrate, and forming a gallium nitride material region over the compositionally-graded transition layer. The gallium nitride material region includes an active region.

[0012] In another aspect, a method of forming a semiconductor structure is provided. The method comprises forming a first transition layer over a silicon substrate, forming a gallium nitride material region over the first transition layer, and removing the silicon substrate to expose a backside of the transition layer.

[0013] In another aspect, an opto-electronic device is provided. The opto-electronic device comprises a transition layer comprising a gallium nitride alloy, aluminum nitride, or an aluminum nitride alloy. The transition layer has an exposed back surface. The device further comprises a gallium nitride material region formed over a front surface of the transition layer. The gallium nitride material region includes an active region.

[0014] In another aspect, an opto-electronic device is provided. The opto-electronic device comprises a transition layer comprising a gallium nitride alloy, aluminum nitride, or an aluminum nitride alloy. The device further comprises an electrical contact formed directly on a back surface of the transition layer, and a gallium nitride material region formed over a front surface of the transition layer. The gallium nitride material region includes an active region.

[0015] In another aspect, an opto-electronic device is provided. The opto-electronic device comprises a silicon substrate, a gallium nitride material region formed over the substrate. The gallium nitride material region includes an active region, wherein the active region has a non-rectangular plane-view cross-section.

[0016] In another aspect, an opto-electronic device is provided. The opto-electronic device comprises a substrate, a gallium nitride material region formed over the substrate. The gallium nitride material region includes an active

region, wherein the active region has a non-rectangular plane-view cross-section. A non-active region of the opto-electronic device has a non-rectangular plane-view cross-section.

[0017] In another aspect, a method is provided. The method comprises forming an active region having a non-rectangular plane-view cross-section. The active region is a portion of a gallium nitride material region formed on a silicon substrate.

[0018] In another aspect, a method is provided. The method comprises forming an active region having a non-rectangular plane-view cross-section. The active region is a portion of a gallium nitride material region formed on a substrate. The method further comprises forming a non-active region having a non-rectangular plane-view cross-section.

[0019] Other aspects, embodiments and features of the invention will become apparent from the following detailed description of the invention when considered in conjunction with the accompanying drawings. The accompanying figures are schematic and are not intended to be drawn to scale. In the figures, each identical, or substantially similar component that is illustrated in various figures is represented by a single numeral or notation. For purposes of clarity, not every component is labeled in every figure. Nor is every component of each embodiment of the invention shown where illustration is not necessary to allow those of ordinary skill in the art to understand the invention. All patent applications and patents incorporated herein by reference are incorporated by reference in their entirety. In case of conflict, the present specification, including definitions, will control.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] FIG. 1 illustrates a semiconductor device including a backside via according to one embodiment of the present invention.

[0021] FIG. 2 illustrates a semiconductor device including multiple backside vias according to another embodiment of the present invention.

[0022] FIG. 3 illustrates a semiconductor device including multiple backside vias and no topside vias according to another embodiment of the present invention.

[0023] FIG. 4 illustrates an LED according to another embodiment of the present invention.

[0024] FIG. 5 illustrates a laser diode according to another embodiment of the present invention.

[0025] FIG. 6 illustrates a power rectifier diode according to another embodiment of the present invention.

[0026] FIG. 7 illustrates a double-gate HFET according to another embodiment of the present invention.

[0027] FIG. 8 illustrates an LED including multiple backside vias and no topside vias according to another embodiment of the present invention.

[0028] FIG. 9 illustrates a semiconductor device including a backside via free of an electrical contact according to another embodiment of the present invention.

[0029] FIG. 10 illustrates a semiconductor device including a backside via having a backside via that is shaped to enhance internal reflection of light according to another embodiment of the present invention.

[0030] FIG. 11 illustrates a semiconductor device including a positive and negative contact formed on a backside of the device according to another embodiment of the present invention.

[0031] FIG. 12 illustrates a semiconductor device after the substrate has been removed during processing according to another embodiment of the present invention.

[0032] FIG. 13 illustrates a light emitting device that includes two topside contacts according to another embodiment of the present invention.

[0033] FIG. 14 illustrates a light emitting device including two topside contacts according to another embodiment of the present invention.

[0034] FIG. 15 illustrates a light emitting device after the substrate has been removed during processing according to another embodiment of the present invention.

[0035] FIG. 16 illustrates a light emitting device including a reflector region according to another embodiment of the present invention.

[0036] FIG. 17 illustrates a light emitting device including a reflector region according to another embodiment of the present invention.

[0037] FIG. 18 illustrates a light emitting device including a medium containing phosphor according to another embodiment of the present invention.

[0038] FIG. 19 illustrates a light emitting device including a reflector region formed within a via according to another embodiment of the present invention.

[0039] FIG. 20 illustrates a light emitting device that has been flipped during use according to another embodiment of the present invention.

[0040] FIG. 21 illustrates an LED designed to emit UV light according to another embodiment of the present invention.

[0041] FIG. 22 illustrates a view of a backside the device of FIG. 1.

[0042] FIGS. 23A-23K illustrate a series of plane-view cross-sections of respective active regions of opto-electronic devices according to additional embodiments of the invention.

[0043] FIG. 24 illustrates an opto-electronic device including an active region according to another embodiment of the invention.

[0044] FIG. 25 illustrates a light emitting device that is mounted to a carrier according to another embodiment of the present invention.

[0045] FIG. 26 illustrates a semiconductor device according to an embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0046] The invention provides gallium nitride material structures, devices and methods of forming the structures and devices.

[0047] Referring to FIG. 1, a semiconductor device 10 according to one embodiment of the invention is shown. Semiconductor device 10 includes a substrate 12 and a gallium nitride material device region 14 formed over the substrate. As described further below, device structures are typically formed, at least in part, within gallium nitride material region 14. Device 10 further includes a transition layer 15 formed on substrate 12, for example, to facilitate the subsequent deposition of gallium nitride material device region 14. In some cases, the transition layer (or, at least a portion of the transition layer) may be non-conducting. A topside electrical contact 16 (on a topside 18 of the device) and a backside electrical contact 20 (on a backside 22 of the device) are provided for connection to an external power supply that powers the device. Backside contact 20 is deposited within a via 24 that extends from backside 22 of the device. Via 24 extends through transition layer 15 and into a conducting region (e.g., device region 14) within device 10. As a result of the deposition of backside contact 20 within via 24, current can flow between the backside contact and topside contact 16 through device region 14 without being blocked by transition layer 15, when the transition layer is non-conducting. Thus, vertical conduction through device 10 between backside contact 20 and topside contact 16 may be achieved despite the presence of a non-conducting transition layer 15.

[0048] FIG. 22 illustrates a view of backside 22 of device 10.

[0049] As used herein, “non-conducting” refers to a layer that prevents current flow or limits current flow to negligible amounts in one or more directions. “Non-conducting” layers, for example, may be formed of non-conductor materials, or may be formed of semiconductor materials which have a band sufficiently offset from the layer adjacent the “non-conducting” layer. A “non-conducting” layer may be conductive in and of itself, but may still be non-conducting (e.g., in a vertical direction) as a result of a band offset or discontinuity with an adjacent layer. As used herein, “vertical conduction” refers to electrical current flow in a vertical direction within a device. “Vertical conduction” may be between backside contact and topside contact or may be between different layers within the device that are separated vertically.

[0050] It should be understood that when a layer is referred to as being “on” or “over” another layer or substrate, it can be directly on the layer or substrate, or an intervening layer also may be present. A layer that is “directly on” another layer or substrate means that no intervening layer is present. It should also be understood that when a layer is referred to as being “on” or “over” another layer or substrate, it may cover the entire layer or substrate, or a portion of the layer or substrate.

[0051] As shown in the figures, the term “topside” refers to the upper surface of a structure or device and the term “backside” refers to the bottom surface of a structure or device. It should be understood that the substrate also has a “topside” and a “backside.” When processing a typical structure, layer(s) are grown from the topside of the substrate and the resulting upper growth surface defines the topside of the structure or device. In some cases, during use, a device may be flipped so that its backside faces upward and its topside faces downward (e.g., See FIG. 20). In these

“flip chip” embodiments, the topside of the device may be mounted to another surface (e.g., to provide a source of power to electrodes on the topside).

[0052] In certain preferred embodiments, substrate 12 is a silicon substrate. As used herein, silicon substrate 14 refers to any substrate that includes a silicon layer. Examples of suitable silicon substrates include substrates that are composed entirely of silicon (e.g., bulk silicon wafers), silicon-on-insulator (SOI) substrates, silicon-on-sapphire substrate (SOS), and SIMOX substrates, amongst others. Suitable silicon substrates also include substrates that have a silicon wafer bonded to another material such as diamond, AlN, or other polycrystalline materials. Silicon substrates having different crystallographic orientations may be used. In some cases, silicon (111) substrates are preferred. In other cases, silicon (100) substrates are preferred.

[0053] It should be understood that in other embodiments, substrates other than silicon substrates may be used such as sapphire and silicon carbide substrates.

[0054] Substrate 12 may have any suitable dimensions and its particular dimensions are dictated by the application. Suitable diameters include, but are not limited to, 2 inches (50 mm), 4 inches (100 mm), 6 inches (150 mm), and 8 inches (200 mm). In some embodiments, silicon substrate 12 is relatively thick, for example, greater than 250 microns. Thicker substrates are generally able to resist bending which can occur, in some cases, in thinner substrates. In some embodiments, silicon substrate 12 is preferably thin, for example less than 250 microns, or less than 100 microns, to facilitate the formation of via 24 therethrough.

[0055] Transition layer 15 may be formed on substrate 12 prior to the deposition of gallium nitride material device region 14, for example, to accomplish one or more of the following: reducing crack formation in gallium nitride material device region 14 by lowering thermal stresses arising from differences between the thermal expansion rates of gallium nitride materials and the substrate; reducing defect formation in gallium nitride material device region 14 by lowering lattice stresses arising from differences between the lattice constants of gallium nitride materials and the substrate; and, increasing conduction between substrate 12 and gallium nitride material device region 14 by reducing differences between the band gaps of substrate 12 and gallium nitride materials. The presence of transition layer 15 may be particularly preferred when utilizing silicon substrates because of the large differences in thermal expansion rates and lattice constant between gallium nitride materials and silicon. It should be understood that transition layer 15 also may be formed between substrate 12 and gallium nitride material device region for a variety of other reasons. As noted above, transition layer 15 may be non-conducting, although, in some cases, transition layer 15 may be conducting.

[0056] The composition of transition layer 15 depends, at least in part, upon the type of substrate and the composition of gallium nitride material device region 14. In some embodiments which utilize a silicon substrate, transition layer 15 may preferably comprise a compositionally-graded transition layer having a composition that is varied across at least a portion of the layer. Suitable compositionally-graded transition layers, for example, have been described in co-pending, commonly-owned, U.S. patent application Ser. No.

09/736,972, entitled "Gallium Nitride Materials and Methods," filed on Dec. 14, 2000, which is incorporated herein by reference. Compositionally-graded transition layers are particularly effective in reducing crack formation in gallium nitride material device region **14** by lowering thermal stresses that result from differences in thermal expansion rates between the gallium nitride material and substrate **12** (e.g., silicon). In some embodiments, when compositionally-graded, transition layer **15** is formed of an alloy of gallium nitride such as $\text{Al}_x\text{In}_y\text{Ga}_{(1-x-y)}\text{N}$, $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$, or $\text{In}_y\text{Ga}_{(1-y)}\text{N}$. In these embodiments, the concentration of at least one of the elements (e.g., Ga, Al, In) of the alloy is typically varied across at least a portion of the cross-sectional thickness of the layer.

[0057] In other embodiments, transition layer **15** has a constant (i.e., non-varying) composition across its thickness. Such layers may be referred to as buffer layers and/or intermediate layers. Suitable intermediate layers, for example, have been described in U.S. patent application Ser. No. 09/736,972, referenced above. In some embodiments, transition layer **15** has a constant composition of a gallium nitride alloy (such as $\text{Al}_x\text{In}_y\text{Ga}_{(1-x-y)}\text{N}$, $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$, or $\text{In}_y\text{Ga}_{(1-y)}\text{N}$), aluminum nitride, or an aluminum nitride alloy.

[0058] In the illustrative embodiment of FIG. 1, a single transition layer **15** is shown between substrate **12** and gallium nitride material device region **14**. Other embodiments may include more than one transition layer. For example, as shown in FIG. 2, device **10a** may include a compositionally-graded transition layer **15a** formed on (in some cases, directly on) a transition layer **15b** having a constant composition (e.g., an intermediate layer of a gallium nitride alloy, aluminum nitride, or an aluminum nitride alloy). It should also be understood that constant composition transition layer **15b** may be formed on (in some cases, directly on) compositionally-graded transition layer **15a**. In some cases, the device may include two constant composition transition layers—for example, a first formed on the compositionally-graded transition layer and a second formed on the substrate under the compositionally-graded transition layer.

[0059] It also should be understood that in some embodiments, one or more other types of layers (including conducting layers) may be present between substrate **12** and gallium nitride material device region **14** which may accomplish one or more of the above-described features of the transition layer. In some cases, the transition layer is the sole layer between the substrate and the gallium nitride material device region. In embodiments, that include one or more conducting layer, the structure may not include any non-conducting layers.

[0060] In the embodiment of FIG. 1, via **24** extends through transition layer **15** of substrate **12** so that vertical conduction can occur in device **10** even when the transition layer is non-conducting. Thus, in these embodiments, at a minimum, via **24** has a length (L) sufficient to create a conducting vertical path between topside contact **16** and backside contact **20**. Via **24**, for example, may extend to a position within gallium nitride material device region **14** to form such a conducting path. In some cases, it may be preferable to have via **24** extend to an etch-stop layer (e.g., See **46**, FIG. **5**) within gallium nitride material device region

14, to facilitate processing as described further below. In certain embodiments, via **24** may extend to a position below gallium nitride material device layer—for example, within an upper portion of a doped, conductive transition layer and, thus, a vertical conducting path is formed. In some cases, via **24** may extend to a source region or a drain region formed within device **10**.

[0061] The exact dimensions and shape of via **24** depend upon the application. A typical cross-sectional area of via is about 100 microns by about 100 microns at backside **22**. The cross-sectional area of the via may be square (as shown in FIG. **22**), circular or another shape. It may be preferable for via **24** to be tapered inward, as shown, thus giving the via a cone shape (i.e., a truncated pyramid shape). The inward taper (i.e., a cross-sectional area that decreases in a direction away from the backside) can facilitate deposition of backside contact **20** on side walls **28** of via **24** and may also, in some cases, be beneficial for enhancing light extraction. In other cases, as described further below and shown in FIG. **10**, it may be preferable for the via to be tapered outward (i.e., a cross-sectional area that increases in a direction away from the backside). An outwardly tapered via may enhance internal light reflection which can improve light extraction in certain embodiments. In some cases, it may be preferable to have via **24** positioned away from sides **29** of the device. That is, the via does not intersect with a side of the device.

[0062] In FIG. 1, device **10** includes a single via **24**. Other embodiments, however, as described further below and shown in FIGS. **2-3**, may include more than one via.

[0063] As used herein, the phrase "electrical contact" or "contact" refers to any conducting structure on a semiconductor device that is designed to be contacted by a power source. "Contacts" may also be referred to as electrodes, terminals, contact pads, contact areas, contact regions and the like. It should be understood that certain types of conducting structures that are on, or part of, a semiconductor device are not electrical contacts, as used herein. For example, conducting regions or layers (e.g., reflector layer **120** in some cases) that are not contacted by a power source during use are not electrical contacts as defined herein.

[0064] Backside contact **20** and topside contact **16** are formed of conducting materials including certain metals. Any suitable conducting material known in the art may be used. The composition of contacts **16**, **20** may depend upon the type of contact. For example, contacts **16**, **20** may contact n-type material or p-type material. Suitable metals for n-type contacts include titanium, nickel, aluminum, gold, copper, and alloys thereof. Suitable metals for p-type contacts include nickel, gold, and titanium, and alloys thereof.

[0065] Contacts **16**, **20** have a thickness sufficient to ensure that the contact is electrically conductive across its entire physical area. Suitable thicknesses for contacts **16**, **20**, for example, are between about 0.05 microns and about 10 microns. In some cases, the thickness of backside contact **20** may vary over its area because of uneven deposition on side walls **28** of via **24**. The surface areas of backside contact **20** and topside contact **16** are generally sufficient so that the contacts can be contacted by terminals of an appropriate power source through wire bonding, air bridging and the like. In certain preferred embodiments, backside contact **20** substantially extends only over backside and does not, for

example, extend over sides **30** of device **10**. Thus, in these preferred embodiments, sides **30** are substantially free of backside contact **20**.

[0066] In some embodiments, as described further below, semiconductor structure may include one or more backside contact and no topside contact (e.g., FIG. 3), or one or more topside contact (e.g., two for light emitting devices or three for FETs) and no backside contact (e.g., FIGS. 13-16).

[0067] In some embodiments, contacts **16, 20** also may function as an effective heat sink. In these embodiments, contacts **16, 20** remove thermal energy generated during the operation of the device. This may enable device **10** to operate under conditions which generate amounts of heat that would otherwise damage the device. In particular, laser diodes that operate at high current densities may utilize contacts **16, 20** as a heat sink. Contacts **16, 20** may be specifically designed to enhance thermal energy removal. For example, contacts **16, 20** may be composed of materials such as copper and gold, which are particularly effective at removing heat. Also, contacts **16, 20** may be designed so that a large surface area is in contact with device region **14** for example, by including multiple vias and/or vias that extend significantly into device region **14**.

[0068] In some embodiments, such as when device **10** is an opto-electronic device, contacts **16, 20** can function as a reflector region (e.g., **120a**, FIG. 19), as described further below. By reflecting light generated by the device, contacts **16, 20** can direct the light in a desired direction, for example, out of topside **18**, backside **22**, and/or sides **30** of device **10** depending on the design of the device. Thus, the output efficiency of the device may be enhanced. In particular, laser diodes and light emitting diodes can benefit from utilizing the reflective properties of contacts **16, 20**. To enhance the ability of backside contact **20** to reflect light, for example, via **24** is formed such that the backside contact extends proximate an active region (e.g., **38**, FIG. 4; **50**, FIG. 5).

[0069] As used herein, the term "active region," when used in connection with a light emitting device, refers to a light generating region, and when used in connection with a light detecting device refers to a light collecting region.

[0070] In certain embodiments, and as described further below in connection with FIGS. 9-11, 13-14, and 16-18, it may be preferable for via **24** to be free of a contact. That is, a contact is not formed within the via. In some cases, the via may be free of a contact but may have one or more other region(s) or layer(s) formed therein (e.g., a reflective layer), as described further below. In some cases, the via may be free of any material formed therein. When free of material, the via may function as a window that exposes internal layers of the device (e.g., transition layer **15** or gallium nitride material device region **14**) to the outside. This exposure may enhance the extraction of light from the device which can be particularly useful in light-emitting devices such as LEDs or lasers. In embodiments in which via **24** is free of an electrical contact, it should be understood that contacts are formed on other parts of the device including other (non-via) areas of backside **22** or areas of topside **18**.

[0071] In some cases, to maximize exposure of the internal device layers, substrate **12** may be entirely removed, for example, by etching (wet or dry) or grinding. Such a device

is shown in FIGS. 12, 15 and 25, and described further below. When the substrate is entirely removed, it may be desirable to mount, or bond, the structure to a carrier which may be a wafer (e.g., silicon or GaAs) that provides rigidity and/or support during further processing, handling, or use. The rigidity and/or support provided by the carrier result from its relatively large thickness compared to the thickness of the remaining structure. In some cases, carriers may also function as a reflector region.

[0072] Gallium nitride material device region **14** comprises at least one gallium nitride material layer. In some cases, gallium nitride material device region **14** includes only one gallium nitride material layer. In other cases, as described further below and shown in FIGS. 4-8, gallium nitride material device region **14** includes more than one gallium nitride material layer. The different layers can form different regions of the semiconductor structure. Gallium nitride material region **14** also may include one or more layers that do not have a gallium nitride material composition such as other III-V compounds or alloys, oxide layers, and metallic layers.

[0073] As used herein, the phrase "gallium nitride material" refers to gallium nitride (GaN) and any of its alloys, such as aluminum gallium nitride ($\text{Al}_x\text{Ga}_{(1-x)}\text{N}$), indium gallium nitride ($\text{In}_y\text{Ga}_{(1-y)}\text{N}$), aluminum indium gallium nitride ($\text{Al}_x\text{In}_y\text{Ga}_{(1-x-y)}\text{N}$), gallium arsenide phosphoride nitride ($\text{GaAs}_a\text{P}_b\text{N}_{(1-a-b)}$), aluminum indium gallium arsenide phosphoride nitride ($\text{Al}_x\text{In}_y\text{Ga}_{(1-x-y)}\text{As}_a\text{P}_b\text{N}_{(1-a-b)}$), amongst others. Typically, when present, arsenic and/or phosphorous are at low concentrations (i.e., less than 5 weight percent). In certain preferred embodiments, the gallium nitride material has a high concentration of gallium and includes little or no amounts of aluminum and/or indium. In high gallium concentration embodiments, the sum of (x+y) may be less than 0.4, less than 0.2, less than 0.1, or even less. In some cases, it is preferable for the gallium nitride material layer to have a composition of GaN (i.e., x+y=0). Gallium nitride materials may be doped n-type or p-type, or may be intrinsic. Suitable gallium nitride materials have been described in U.S. patent application Ser. No. 09/736,972, incorporated herein.

[0074] Gallium nitride material region **14** is of high enough quality so as to permit the formation of devices therein. Preferably, gallium nitride material region **14** has a low crack level and a low defect level. As described above, transition layer **15** may reduce crack and/or defect formation. In some embodiments, gallium nitride material region **14** has about 10^9 defects/cm². Gallium nitride materials having low crack levels have been described in U.S. patent application Ser. No. 09/736,972, referenced above. In some cases, gallium nitride material region **14** has a crack level of less than $0.005 \mu\text{m}/\mu\text{m}^2$. In some cases, gallium nitride material has a very low crack level of less than $0.001 \mu\text{m}/\mu\text{m}^2$. In certain cases, it may be preferable for gallium nitride material region **14** to be substantially crack-free as defined by a crack level of less than $0.0001 \mu\text{m}/\mu\text{m}^2$.

[0075] In certain cases, gallium nitride material region **14** includes a layer or layers which have a monocrystalline structure. In some preferred cases, gallium nitride material region **14** includes one or more layers having a Wurtzite (hexagonal) structure.

[0076] The thickness of gallium nitride material device region **14** and the number of different layers are dictated, at

least in part, by the requirements of the specific application. At a minimum, the thickness of gallium nitride material device region **14** is sufficient to permit formation of the desired device. Gallium nitride material device region **14** generally has a thickness of greater than 0.1 micron, though not always. In other cases, gallium nitride material region **14** has a thickness of greater than 0.5 micron, greater than 0.75 micron, greater than 1.0 microns, greater than 2.0 microns, or even greater than 5.0 microns.

[0077] When device **10** is a light-emitting device, it may also include a reflector region **120** (See FIG. **16**). Reflector region **120** increases the reflectivity of an interface and typically directs or steers the light in a desired location or direction within a light-emitting device. The composition and structural characteristics (e.g., thickness) of the reflector region may be selected to reflect the desired wavelength (or range or wavelengths) of light.

[0078] Reflector region **120** may be a single layer or a series of layers. In some cases, reflector region **120** comprises a metal. In other cases, reflector region **120** may comprise a dielectric or semiconductor material. In these cases, typically, multiple dielectric or semiconductor material layers are stacked to form the reflector region. One example of a multi-layer reflector region is a Distributed Bragg Reflector (DBR). A DBR has at least two layers of different compositions (e.g., gallium nitride alloys or oxide-based compounds).

[0079] The location of the reflector region in the device is selected so as to reflect light in the desired direction. Typically, the position of the reflector region is selected relative to the light emitting region(s) of the device. For example, if it is desired to reflect light in the direction of the backside of the device, reflector region **120** is preferably located above an active region (e.g., **97**, FIG. **17**) in which light is generated. If it is desired to reflect light in the direction of the topside of the device, reflector region **120** is preferably located below the active region (e.g., **97**, FIG. **16**). In some cases, such as when the device is a laser, reflector region **120** may be located both above and below an active region. Depending on the device design, reflector region **120** may be a portion of the gallium nitride material region **14**, or may be located above or below the gallium nitride material region. As noted above, in some cases, reflector region **120** may be an electrical contact, though other types of electrical contacts are not reflector regions. In embodiments in which the reflector region also functions as an electrical contact, the reflector region, for example, may be formed of aluminum, silver or rhodium.

[0080] Device **10** may be formed using known processing techniques. Transition layer **15** and gallium nitride material device region **14** may be deposited on substrate **12**, for example, using metalorganic chemical vapor deposition (MOCVD), molecular beam epitaxy (MBE), and hydride vapor phase epitaxy (HVPE), amongst other techniques. In some cases, an MOCVD process may be preferred. A suitable MOCVD process to form a compositionally-graded transition layer **15** and gallium nitride material device region **14** over a silicon substrate **12** has been described in U.S. patent application Ser. No. 09/736,972, referenced above. When gallium nitride material device region **14** has different layers, in some cases it is preferable to use a single deposition step (e.g., an MOCVD step) to form the entire device

region **14**. When using the single deposition step, the processing parameters are suitably changed at the appropriate time to form the different layers. In certain preferred cases, a single growth step may be used to form transition layer **15** and gallium nitride material device region **14**.

[0081] When present, reflector region **120** may also be formed using known processing techniques. For example, when the reflector region comprises a metal, the metal may be sputtered or evaporated. When the reflector region comprises a series of semiconductor material layers, the layers may be deposited using metalorganic chemical vapor deposition (MOCVD), molecular beam epitaxy (MBE), and hydride vapor phase epitaxy (HVPE), amongst other techniques. When the reflector region comprises a series of dielectric material layers, the layers may be deposited by chemical vapor deposition (CVD) or sputtering.

[0082] In some cases, it may be preferable to grow device region **14** using a lateral epitaxial overgrowth (LEO) technique that involves growing an underlying gallium nitride layer through mask openings and then laterally over the mask to form the gallium nitride material device region, for example, as described in U.S. Pat. No. 6,051,849, which is incorporated herein by reference. In some cases, it may be preferable to grow device region **14** using a pendeoepitaxial technique that involves growing sidewalls of gallium nitride material posts into trenches until growth from adjacent sidewalls coalesces to form a gallium nitride material region, for example, as described in U.S. Pat. No. 6,177,688, which is incorporated herein by reference. In these lateral growth techniques, gallium nitride material regions with very low defect densities are achievable. For example, at least a portion of gallium nitride material region **14** may have a defect density of less than about 10^5 defects/cm².

[0083] Conventional etching techniques may be used to form via **24**. Suitable techniques include wet chemical etching and plasma etching (i.e., RIE, ICP etching, amongst others). Different etching techniques may be utilized when etching through different layers of device **10**. For example, a fluorine-based RIE process may be used to etch through substrate **12** and a chlorine-based RIE process may be used to etch through gallium nitride device region **14** and/or transition layer **15**. A pre-determined etching time may be used to form via **24** with the desired dimensions. In other cases, an etch stop layer (e.g., See **46**, FIG. **5**), which has a composition that is not readily etched by the technique being used, may be provided within device **10** to stop etching so that precise control over the etching time is not required to form via **24** with desired dimensions.

[0084] Backside contact **20** and topside contact **16** may be deposited using known techniques suitable for depositing conducting materials such as metals. Such techniques include sputtering, electron beam deposition, and evaporation, amongst others. In some cases, a series of layers having different metallic compositions are deposited successively to form contacts **16**, **20**. In some of these cases, an annealing technique is used to yield equilibration of the contact composition. Because backside contact **20** is deposited within via **24**, the deposition technique should be performed in a manner that provides sufficient coverage within via **24**.

[0085] As known in the semiconductor art, multiple device structures may be formed on the same wafer of substrate material. A dicing operation, which utilizes a saw,

may be used to separate individual devices from one another. In embodiments using silicon substrates, devices may be separated in an etching process (e.g., wet or dry) which etches through the substrate and layers. This etching process may use different etch chemistries when etching through different layers of the structure and substrate. For example, a fluorine-based gas may be used to etch through the silicon substrate and a chlorine-based gas may be used to etch through gallium nitride device region **14** and/or transition layer **15**. Separation using an etching process can enable formation of devices having non-rectangular die shapes (See FIGS. **23C-23K**) which may be advantageous in certain light emitting applications, as described further below.

[**0086**] FIG. **2** illustrates device **10a** which includes multiple vias **24a**, **24b** according to another embodiment of the present invention. A single backside contact **20** is formed in and across both vias **24a**, **24b**. Using multiple vias **24a**, **24b** as shown in FIG. **2** may enhance heat removal, improve light reflection, and increase vertical conduction. As noted above, device **10a** also includes a compositionally-graded transition layer **15a** formed on a constant composition transition layer **15b**. It should be understood that device **10a** is not limited to this transition layer arrangement and that other transition layer(s) described herein are possible including a single transition layer.

[**0087**] FIG. **3** illustrates device **10b** including multiple vias **24a**, **24b** according to another embodiment of the present invention. A first backside contact **20a** is formed in via **24a** and a second backside contact **20b** is formed in via **24b**. A dielectric layer **31** may be used, for example, to electrically isolate portions of backside contact **20b** to prevent shorting of device **10**. Suitable compositions for dielectric layer **31** include silicon oxide and silicon nitride. The embodiment of FIG. **3** does not have a topside contact (**16** in FIG. **1**). The embodiment of FIG. **3** may be utilized in cases when it is not desirable to have a topside contact such as for surface mounted devices.

[**0088**] It should be understood that the invention also includes devices having backside vias and backside contacts with other configurations than those illustrated herein. For example, backside contact **20** may extend to an active region within gallium nitride material device region **14**, such as a source region or a drain region. Also, backside contact **20** may extend substantially through the thickness of the device so that the backside contact also forms a contact on topside **18** of the device.

[**0089**] It should also be understood that certain embodiments of the invention do not include a backside contact **20** as shown in FIG. **13**. Device **110** includes a first topside contact **16d** and a second topside contact **16e**. As shown, first topside contact **16d** is formed on a first topside portion **18a** of gallium nitride material region **14** and second topside contact **16e** is formed on a second topside portion **18b** of the gallium nitride material region, wherein the first topside portion and the second topside portion are on different planes. In other cases, first and second topside contacts are formed on the same plane. It may be advantageous to include multiple topside contacts and no backside contacts, for example, when the topside of the device is mounted to a surface (e.g., in flip-chip embodiments). Also, it may be advantageous to include multiple topside contacts and no backside contacts in certain light emitting devices (e.g.,

LEDs, lasers) when it is desired to emit light out of the backside of the device. The absence of a backside contact, and/or any other material, in backside via **24** of device **110** can enhance light emission, amongst other advantages.

[**0090**] It should be understood that devices of the invention may include more than two (e.g., three contacts) topside contacts in certain device configurations (e.g., FETs)

[**0091**] FIG. **18** illustrates a light-emitting device **124** that includes a medium **126** comprising phosphor. The medium, for example, may include phosphor dispersed in epoxy. The phosphor may convert light generated within the device to light of a different wavelength. For example, phosphor may be used to convert blue or UV-light generated within the device to white light. It should be understood that light emitting device **124** may have any suitable layer arrangement including layer arrangements of the LED embodiments described herein

[**0092**] Any suitable semiconductor device known in the art including electronic and opto-electronic devices may utilize features of the invention. In many cases, the device may be formed entirely within gallium nitride material region **14** (i.e., the only active device regions are within gallium nitride material region **14**). In other cases, the device is formed only in part within gallium nitride material region **14** and is also formed in other regions such as substrate **12**.

[**0093**] Exemplary devices include light emitting devices (such as laser diodes (LDs) and light emitting diodes (LEDs)), light detecting devices (such as detectors and sensors), power rectifier diodes, FETs (e.g., HFETs), Gunn-effect diodes, varactor diodes, amongst others. Light-emitting devices of the invention may be designed to emit the desired wavelength of light including visible light (e.g., blue) and UV-light. As described above, the device may also include one or more types of phosphor that converts the light generated within the device to white light. Although certain figures may illustrate certain types of devices, it should be understood that the features of these figures may also be used in other types of devices of the present invention. For example, though FIGS. **13-20** illustrate light emitting devices, it should be understood that features of these figures may also be used in light detecting devices. In such light detecting devices, active region **97** is a light collector region, in contrast to the light generating region shown in some of these figures.

[**0094**] FIGS. **4-8** illustrate examples of gallium nitride material devices according to the invention. It should be understood, however, that devices having other structures are also within the scope of the invention.

[**0095**] FIG. **4** illustrates an exemplary LED **32** according to one embodiment of the present invention. LED **32** includes gallium nitride material device region **14** formed on transition layer **15**. Transition layer **15** may be compositionally-graded and is formed on silicon substrate **12**. In the illustrative embodiment, the following layers comprise gallium nitride material device region **14** in succession: a silicon-doped GaN layer **34**, a silicon-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **36** (e.g., containing 0-20% by weight Al), a GaN/InGaN single or multiple quantum well **38**, a magnesium-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **40** (e.g., containing 10-20% by weight Al), and a magnesium-doped GaN layer **41**. Via **24** extends from backside **22** to a position within GaN layer **34**.

Topside contact **16** is formed of a metal on a p-type region and backside contact **20** is formed of a metal on an n-type region. LED **32** may be provided as a variety of different structures including: a double heterostructure (e.g., Al>0% in layer **36**), a single heterostructure (e.g., Al=0% in layer **36**), a symmetric structure, or an asymmetric structure. The LED illustrated in this embodiment is designed to emit visible light (e.g., blue light). It should be understood that LEDs having a variety of different structures may also be provided according to the invention including LEDs that emit UV light (See FIG. **21**).

[0096] FIG. **5** illustrates an exemplary laser diode **42** according to one embodiment of the present invention. Laser diode **42** includes gallium nitride material device region **14** formed on transition layer **15**. Transition layer **15** may be compositionally-graded and is formed on silicon substrate **12**. In the illustrative embodiment, the following layers comprise gallium nitride material device region **14** in succession: a silicon-doped GaN layer **44**, a silicon-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **46** (e.g., containing 5-30% by weight Al), a silicon-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **48** (e.g., containing 0-20% by weight Al), a GaN/InGaN single or multiple quantum well **50**, a magnesium-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **52** (e.g., containing 5-20% by weight Al), a magnesium-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **54** (e.g., containing 5-30% by weight Al), and a magnesium-doped GaN layer **55**. Via **24** extends from backside **22** to $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **46** which functions as an etch-stop layer. Topside contact **16** is formed of a p-type metal and backside contact **20** is formed of an n-type metal. It should be understood that laser diodes having a variety of different structures may also be provided.

[0097] FIG. **6** illustrates a power rectifier diode **56** according to one embodiment of the present invention. Diode **56** includes gallium nitride material device region **14** formed on transition layer **15**. Transition layer **15** may be compositionally-graded and is formed on silicon substrate **12**. In the illustrative embodiment, the following layers comprise gallium nitride material device region **14** in succession: a silicon-doped GaN layer **58** and an intrinsic GaN layer **60**. Via **24** extends from backside **22** to a position within GaN layer **58**. Topside contact **16** is formed of a rectifying metal and backside contact **20** is formed of an n-type metal. It should be understood that diodes having a variety of different structures may also be provided.

[0098] FIG. **7** illustrates a double-gated HFET **64** according to one embodiment of the present invention. HFET **64** includes gallium nitride material device region **14** formed on transition layer **15**. Transition layer **15** may be compositionally-graded and is formed on silicon substrate **12**. In the illustrative embodiment, the following layers comprise gallium nitride material device region **14** in succession: an intrinsic GaN layer **66** and an intrinsic AlGaIn region **68**. Via **24** extends from backside **22** to a position within GaN layer **66**. HFET **64** includes a source topside contact **16a**, a gate topside contact **16b**, and a drain topside contact **16c**. A backside gate contact **20** is formed within via **24**. It should be understood that HFETs having a variety of different structures may also be provided including HFETs having a plurality of gates.

[0099] FIG. **8** illustrates an LED **70** including multiple backside vias **24a**, **24b** according to another embodiment of the present invention. LED **70** includes gallium nitride

material device region **14** formed on transition layer **15**. Transition layer **15** may be compositionally-graded and is formed on silicon substrate **12**. In the illustrative embodiment, the following layers comprise gallium nitride material device region **14** in succession: a silicon-doped GaN layer **72**, a silicon-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **74** (e.g., containing 0-20% by weight Al), a GaN/InGaN single or multiple quantum well **76**, a magnesium-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer **78** (e.g., containing 10-20% by weight Al), and a magnesium-doped GaN layer **80**. Via **24a** extends from backside **22** to a position within GaN layer **72** and via **24b** extends from backside **22** to a position within GaN layer **80**. An n-type backside contact **20a** is formed within via **24a** and a p-type backside contact **20b** is formed within via **24b**. A dielectric layer **31** isolates portions of p-type backside contact **20b** to prevent shorting. It should be understood that LEDs having a variety of different structures may also be provided.

[0100] FIG. **9** illustrates a device **82** including backside via **24** that is free of an electrical contact according to another embodiment of the present invention. Device **82** includes gallium nitride material device region **14** formed on a transition layer **15**. Device may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein. Transition layer **15** can be compositionally-graded, as described above. Via **24** extends from backside **22** to transition layer **15**, thus, exposing the transition layer to the environment. An n-type contact **20** is formed on backside **22**.

[0101] FIG. **10** illustrates a device **96** including a backside via **24** having a cross-sectional area that increases in a direction away from backside **22**. Device **96** may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein. In the illustrative embodiment, device **96** is a light emitting device that includes an active region **97** in which light is generated, though other devices of the invention may also include a backside via having this shape. This via shape may enhance internal light reflections (as indicated by the arrows) and external light extraction from the top side of the device. In some cases, and as shown, device **96** may be mounted on a reflective surface **98** to further enhance light reflection and/or a reflector region **120** may be formed on walls of the via. Reflective surface **98**, for example, may be the surface of a packaging material or a carrier.

[0102] FIG. **11** illustrates a device **100** according to another embodiment of the invention. Device **100** includes a number of contacts **102** formed on the front and back of substrate **12**. As shown, device **100** includes the same layer arrangement as the LED of FIG. **8**, though other suitable layer arrangements are also possible. LED **100** also includes an n-type contact **104** and a p-type contact **106**. A dielectric layer **31** isolates portions of the n-type and p-type contacts to prevent shorting.

[0103] FIG. **12** illustrates a device **108** according to another embodiment of the present invention. Device **108** has the same layer arrangement as the device of FIG. **11** except that, during processing, the entire substrate has been removed using an etching step. Other layer arrangements may be used. The entire backside of transition layer **15**, which may be compositionally-graded or have a constant composition, is exposed to the environment. This embodiment may be particularly useful in order to maximize light

extraction from the device. It should be understood that other devices of the present invention, including non-light emitting devices, may also be processed by removing the entire substrate. It should also be understood that devices which include an exposed transition layer (e.g., a compositionally-graded transition layer) may also be used in devices that include two topside contacts, for example, as shown in FIG. 13. A topside or a backside of device 108 may be mounted on, or bonded to, a carrier (not shown). The carrier, which may be a wafer (e.g., silicon or GaAs), can provide support and rigidity for the device that may be desirable in the absence of the original substrate.

[0104] FIG. 14 illustrates a light emitting device 112 according to another embodiment of the invention. Device 112 includes an active region 97 and may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein. Device 112 has two topside contacts 114a, 114b and no backside contacts. Arrows indicate the direction of light. The topside contacts also function as reflector regions which reflect, at least a portion of the light generated in layer 97. In this embodiment, light is emitted out of the backside of the device.

[0105] FIG. 15 illustrates a light emitting device 116 according to another embodiment of the invention. During processing of device, the substrate has been removed, for example, by an etching step. A topside or a backside of device 116 may be mounted on, or bonded to, a carrier (not shown, See FIG. 24) which provides support and rigidity for the device. In this illustrative embodiment, the entire backside of a transition layer 15b having a constant composition (e.g., an intermediate layer of a gallium nitride alloy, aluminum nitride, or an aluminum nitride alloy) is exposed. A compositionally-graded transition layer 15a is formed on constant composition transition layer 15b. It should also be understood that, in some embodiments, constant composition transition layer 15b is absent (or otherwise positioned) and compositionally-graded transition layer 15a is exposed. In some cases, a passivating layer may be formed on transition layer 15b; or, transition layer 15b may be mounted on the surface of a packaging material. The illustrative embodiment may be particularly useful in order to maximize light extraction from the device. Device 116 also has two topside contacts 114a, 114b and no backside contacts. The absence of backside contacts also enhances light emission. It should be understood that light emitting device 116 may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein.

[0106] FIG. 16 illustrates a light emitting device 118 according to another embodiment of the invention that includes reflector region 120 located below the active region 97. Reflector region 120 reflects a substantial portion of the light (indicated by arrows) emitted from the active region in the direction of the topside of the device. Therefore, this structure enhances light emission out of the topside of the device. It should be understood that light emitting device 116 may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein.

[0107] FIG. 17 illustrates a light emitting device 122 according to another embodiment of the invention that

includes reflector region 120 located above the active region 97. Reflector region 120 reflects a substantial portion of the light (indicated by arrows) emitted from the light emitting region in the direction of the backside of the device. Therefore, this structure enhances light emission out of the backside of the device. It should be understood that light emitting device 122 may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein.

[0108] FIG. 19 illustrates a light emitting device 130 according to another embodiment of the invention that includes a first reflector region 120a formed within via 24. Device 130 has two topside contacts 114a, 114b. Reflector region 120a may be, for example, a reflective metal layer. It should be understood that reflector region 120a is not an electrical contact even when it comprises a conductive metal because it is not designed to be contacted by a power source. In the illustrative embodiment, device 130 may include a second reflector region 120b formed over the via which may be a Distributed Bragg Reflector (DBR) that includes a number of semiconductor or dielectric layers. Device 130 includes two reflector regions to increase the ability of the device to reflect generated light in the desired direction. It should be understood, however, that other devices may include only one reflector region which may be formed within the via or may be formed over the via. It should be understood that light emitting device 130 may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein.

[0109] FIG. 20 illustrates a light emitting device 136 that has been flipped during use so that backside 22 faces upward and topside 18 faces downward. Topside contact 114b also functions as a reflector region that can upwardly reflect light generated in region 97. The device also includes a second reflector region 120b which may be a Distributed Bragg Reflector (DBR) that includes a number of semiconductor or dielectric layers. Device 136 includes two reflector regions to increase the ability of the device to reflect generated light in the desired direction. It should be understood, however, that other devices may include only one reflector region which may be an electrical contact (e.g., topside contact 114b) or a layer(s) within the structure of the device. It should be understood that light emitting device 136 may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein.

[0110] FIG. 21 illustrates an LED 132 designed to emit ultra-violet light, for example, having a wavelength between about 200 nm and about 410 nm. LED 132 includes gallium nitride material device region 14 formed on transition layer 15. Transition layer 15 may be compositionally-graded and is formed on silicon substrate 12. In the illustrative embodiment, the following layers comprise gallium nitride material device region 14 in succession: a silicon-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer 134 (e.g., containing 0-100% Al), a silicon-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer 136 (e.g., containing 20-80% by weight Al), an active region 138, a magnesium-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer 140 (e.g., containing 20-80% by weight Al), and a magnesium-doped $\text{Al}_x\text{Ga}_{(1-x)}\text{N}$ layer 141 (e.g., containing 0-80% by weight Al). Active region 138 may be a single or multiple quantum well (e.g., $\text{Al}_x\text{Ga}_{(1-x)}\text{N}/\text{GaN}$, $\text{Al}_x\text{Ga}_{(1-x)}\text{N}/\text{Al}_y\text{Ga}_{(1-y)}\text{N}$, $\text{Al}_x\text{Ga}_{(1-x)}\text{N}/\text{Al}_y\text{In}_{(1-y)}\text{N}$, or $\text{Al}_x\text{In}_y\text{Ga}_{(1-x-y)}\text{N}/$

$\text{Al}_a\text{In}_b\text{Ga}_{(1-a-b)}\text{N}$). In some cases, layers **134**, **136**, **140**, **141** may be superlattices and may include delta-doped regions to enhance conductivity. Topside contact **16** is formed of a metal on a p-type region and backside contact **20** is formed of a metal on an n-type region. It should be understood that LEDs having a variety of different structures may also be provided according to the invention including other types of LEDs that emit UV light and LEDs that emit visible light.

[0111] FIGS. **23A-23K** show a series of plane-view cross-sections of the active regions **97** of a series of optoelectronic devices according to additional embodiments of the present invention. A plane-view cross-section is the cross-section of the active region taken in the plane of the active region (See FIG. **24**). Though FIGS. **23A-23K** are taken with respect to the active region **97** shown in FIG. **24**, it should be understood that active regions having the illustrated plane-view cross-sections also may be formed in any other suitable device structure including the other device structures described herein.

[0112] As seen in the figures, the devices of the invention may include active regions having a variety of plane-view cross-sections that may be designed for specific applications. In some cases, the plane-view cross-sections are rectangular or square (FIGS. **23A** and **23B**). Advantageously, certain embodiments of the invention, also enables formation of non-rectangular plane-view cross-sections including circular (FIG. **23C**), star-shaped (FIG. **23D**), hexagon (FIG. **23E**), pentagon (FIG. **23F**), octagon (FIG. **23G**), triangular (FIG. **23H**), trapezoid (FIG. **23I**), diamond (FIG. **23J**) and H-shaped (FIG. **23K**), amongst others.

[0113] Active regions having non-rectangular plane-view cross-sections may improve light extraction over conventional square or rectangular cross-sections by reducing internal reflective losses. Advantageously, the shape of the cross-sections may be tailored for the specific device to optimize light extraction efficiency. In some embodiments, it may be preferred to enhance light extraction for the active region to have a non-rectangular, non-circular plane view cross-section. A variety of other active region cross-sections may also be utilized in accordance with the present invention.

[0114] Active regions having non-rectangular plane-view cross-sections may be formed using an etching process. In some cases, the etching process used to form the active regions may be the same etching process used to separate individual devices processed on the same wafer from one another, as described above. This etching process may be used to form the active region and separate devices, for example, when the substrate is silicon because silicon may be readily etched, in contrast to other types of substrates (e.g., sapphire and silicon carbide) which typically require the use of a dicing operation to separate devices. In cases when the etching process used to form the active region is the same as the etching process used to separate individual devices processed on the same wafer, the active region may have the same plane-view cross-section as other non-active regions on the device (including other layers and the substrate), as well as the overall die shape. It should be understood that though the same etching process is used to form the active region and to separate individual devices processed on the same wafer, different etching chemistries

may be used at various stages during this process, for example, to etch through different layers.

[0115] It should be understood that active regions having non-rectangular plane-view cross-sections may be formed in an etching process that does not separate individual devices processed on the same wafer from one another. In these cases, the individual devices may be separated using conventional dicing steps, for example, to form devices having a rectangular die shape. In these cases, the active region may have a non-rectangular plane-view cross-section, while non-active regions may have a different plane-view cross-section (including a rectangular plane-view cross-section).

[0116] FIG. **25** shows a light emitting device **160** according to another embodiment of the present invention. During processing of device **160**, the substrate has been removed, for example, by an etching step. In this illustrative embodiment, device **160** includes a topside contact **16** and a backside contact **20**. Topside contact **16** also functions as a reflector region. Backside contact **20** is formed on a transition layer **15b** having a constant composition. A compositionally-graded transition layer **15a** is formed on constant composition transition layer **15b**. Transition layers **15a**, **15b** are sufficiently conductive to enable conduction between topside contact **16** and backside contact **20**. In some cases, transition layers **15a**, **15b** may be doped to achieve sufficient conductivity. It should also be understood that, in some embodiments, other transition layer arrangements are possible including those described above. In the illustrative embodiment, a topside of the device is mounted to a carrier **162**. Carrier **162**, for example, may be a wafer (e.g., silicon or GaAs). Carrier **162** provides support and rigidity for the device. It should be understood that in other embodiments carrier **162** may be mounted on a bottom side of the device. In other cases, a contact may be formed on the carrier.

[0117] It should be understood that light emitting device **160** may have any suitable layer arrangement including the layer arrangements (or a portion thereof) of the LED embodiments described herein.

[0118] Those skilled in the art would readily appreciate that all parameters listed herein are meant to be exemplary and that the actual parameters would depend upon the specific application for which the semiconductor materials and methods of the invention are used. It is, therefore, to be understood that the foregoing embodiments are presented by way of example only and that, within the scope of the appended claims and equivalents thereto the invention may be practiced otherwise than as specifically described.

What is claimed is:

1. A semiconductor device comprising:

a substrate; and

a gallium nitride material region formed over the substrate,

wherein the semiconductor device has at least one via extending from a first side of the semiconductor device, wherein the via is free of an electrical contact formed therein.

* * * * *