



(22) Date de dépôt/Filing Date: 1999/06/17

(41) Mise à la disp. pub./Open to Public Insp.: 1999/12/22

(45) Date de délivrance/Issue Date: 2004/11/02

(30) Priorités/Priorities: 1998/06/22 (10-174775) JP;
1998/06/22 (10-174774) JP; 1998/06/22 (10-174773) JP;
1998/06/22 (10-174772) JP; 1998/06/22 (10-174771) JP;
1998/09/10 (10-256964) JP

(51) Cl.Int.⁶/Int.Cl.⁶ B41J 2/14, B41J 2/05

(72) Inventeurs/Inventors:

YOSHIHIRA, AYA, JP;
KASHINO, TOSHIO, JP;
KUDO, KIYOMITSU, JP;
SHIMAZU, SATOSHI, JP

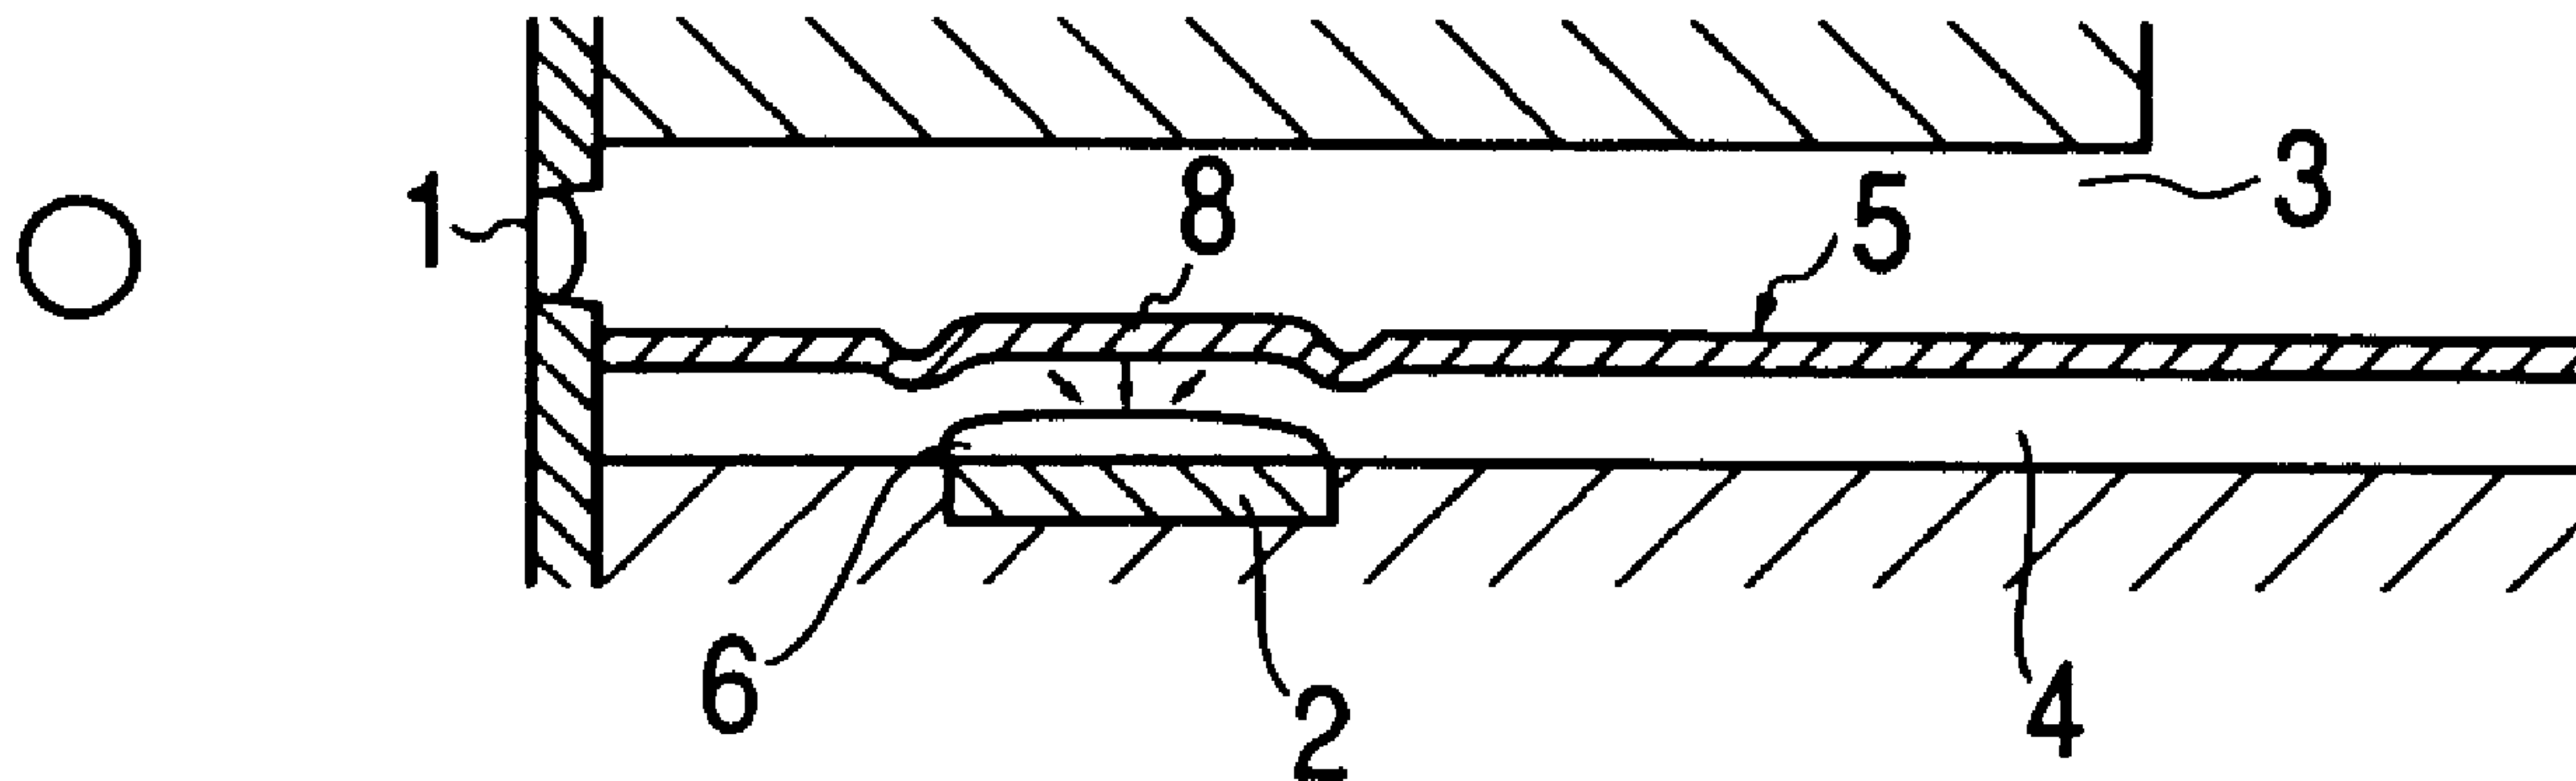
(73) Propriétaire/Owner:

CANON KABUSHIKI KAISHA, JP

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : TETE ET APPAREIL DE REJET DE LIQUIDES

(54) Title: LIQUID DISCHARGING HEAD AND LIQUID DISCHARGING APPARATUS



(57) Abrégé/Abstract:

For stabilizing the liquid discharge from the head such as in the ink jet recording the invention provides a liquid discharging head comprising a discharge liquid path communicating with a discharge opening for discharging a discharge liquid and adapted to flow the discharge liquid, a bubble generating liquid path including a bubble generating area for bubble generation and adapted to flow a bubble generating liquid and a movable separating membrane adapted for mutually and substantially separating the discharge liquid path and the bubble generating liquid path and having a recess, in a position corresponding to the bubble generating area, deviated so as to narrow the bubble generating liquid path, wherein the recess has substantially non-displacing corner portions and is adapted to displace, excluding the corner portions, by a bubble generated in the bubble generating area.

ABSTRACT OF THE DISCLOSURE

For stabilizing the liquid discharge from the head such as in the ink jet recording the invention provides a liquid discharging head comprising a discharge liquid
5 path communicating with a discharge opening for discharging a discharge liquid and adapted to flow the discharge liquid, a bubble generating liquid path including a bubble generating area for bubble generation and adapted to flow a bubble generating
10 liquid and a movable separating membrane adapted for mutually and substantially separating the discharge liquid path and the bubble generating liquid path and having a recess, in a position corresponding to the bubble generating area, deviated so as to narrow the
15 bubble generating liquid path, wherein the recess has substantially non-displacing corner portions and is adapted to displace, excluding the corner portions, by a bubble generated in the bubble generating area.

LIQUID DISCHARGING HEAD AND
LIQUID DISCHARGING APPARATUS

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to a liquid
discharging head and a liquid discharging apparatus for
discharging liquid by bubble generation for example by
thermal energy, and more particularly to a liquid
10 discharging head and a liquid discharging apparatus
utilizing a movable separation membrane which is moved
by the bubble.

The present invention is applicable to a printer
for recording on various recording media such as paper,
15 yarn, fiber, fabrics, leather, metal, plastics, glass,
timber, ceramics etc., a copying machine, a facsimile
apparatus having a communication system, a work
processor having a printer unit, and an industrial
recording apparatus combined in composite manner with
20 various processing apparatus. In the present
invention, the "recording" means not only forming a
meaningful image such as a character or graphics on the
recording medium but also forming a meaningless image
such as a pattern.

25 Related Background Art

There is already known an ink jet recording
method, so-called bubble jet recording method, for

providing liquid such as ink with an energy such as heat to generate a state change involving a steep volume change (generation of a bubble), causing the liquid to be discharged through a discharge opening by the force based on such state change and depositing the liquid onto the recording medium to form an image. The recording head utilizing such bubble jet recording method is generally provided, as disclosed in the Japanese Patent Publication Nos. 61-59911 and 61-59914 (corresponding to the U.S. Patent No. 4,723,129), with a discharge opening for discharging liquid, a liquid path communicating with the discharge opening, and a heat generating member (electrothermal converting member) positioned corresponding to the liquid path and serving as energy generating means for generating energy for discharging the liquid.

Such recording method is advantageous in various manners such as being capable of printing an image of high quality at a high speed and a low noise level, printing an image of a high resolution with a compact apparatus since the discharge openings can be arranged with a high density, and obtaining a color image in a simple manner. For this reason, the bubble jet recording method is recently utilized in various office equipment such as printer, copying machine, facsimile etc. and even in certain industrial applications such as fabric printing apparatus.

- 3 -

On the other hand, in the conventional bubble jet recording method, as the heat generating member repeats heating in direct or indirect contact with liquid, there may be formed, on the surface of the heat
5 generating member, a deposit resulting from scorching of the liquid. Also, in case the liquid to be discharged is easily deteriorated by heat or cannot show sufficient bubble generation, satisfactory liquid discharge may not be achieved by the bubble formation
10 by the aforementioned heat generating member.

On the other hand, the Japanese Patent Application Laid-Open No. 55-81172 proposed a method of separating a bubble generating liquid and a discharge liquid by a flexible membrane and generating a bubble in the bubble
15 generating liquid by thermal energy thereby discharging the discharge liquid. In the configuration of the proposed method, the flexible membrane and the bubble generating liquid are so positioned that the flexible membrane is provided in a part of the nozzle, but the
20 Japanese Patent Application Laid-Open No. 59-26270 discloses a configuration employing a large membrane separating the entire head into an upper part and a lower part. Such large membrane, being supported between two plate members constituting the liquid path,
25 is so provided that the liquids in the two liquid paths are not mutually mixed. Also there are known configurations giving certain feature to the bubble

generating liquid itself in consideration of the bubble
generating characteristics, such as the one disclosed
in the Japanese Patent Application Laid-Open No. 5-
229122, employing liquid of a lower boiling point than
5 that of the discharge liquid or the one disclosed in
the Japanese Patent Application Laid-Open No. 4-329148,
employing electrically conductive liquid as the bubble
generating liquid.

10 SUMMARY OF THE INVENTION

The present inventors have found a novel issue,
not known in the prior art, with respect to the
displacement range of the movable separating membrane.
The separating membrane in the liquid discharging head
15 of the present invention is supported between a first
liquid path wall and a second liquid path wall, and the
movable area for each liquid path is limited by the
liquid path walls. It is thus confirmed that the first
and second liquid path walls define the displacement of
20 the membrane and have significant influence on the
characteristics of the head. Therefore the present
inventors have concluded that it is important to define
the displacement of the membrane by the membrane itself
instead of the liquid path wall to achieve smooth
25 membrane displacement thereby maintaining the highly
reliable liquid discharging characteristics.

Therefore, the present inventors have made

intensive investigation in order to provide a liquid discharging head excellent in durability and stability of liquid discharging regardless of the kind of the supplied liquid, while exploiting the effect of the separating function of the separating membrane. As a result, the present inventors have tried a membrane substantially free from elongation and having a recessed portion, and found that the amount of displacement of the recessed portion corresponds to the discharge amount of the liquid. Thus, it has been found that the stable discharge can be achieved regardless of the kind of the supplied liquid by defining the displacement amount of the recessed portion, as the discharge amount corresponds to the displacement amount of the recessed portion of the separating membrane. It has also been found that the durability of the separating membrane can be improved by defining the displacement amount of the recessed portion of the separating membrane in such a manner that such recessed portion does not elongate or contract at the maximum displacement. It has furthermore been found that the refiling of the discharge liquid can be improved by utilizing the self returning force of the membrane when the recessed portion is not given energy for the displacement.

From a different standpoint, in case various liquids are used as the discharge liquid, the amount of

liquid discharged from the discharge opening for example by thermal energy fluctuates depending on the kind of the liquid. Such fluctuation tends to increase with the increase in the viscosity of the liquid.

5 However, a method of stabilizing the discharge amount in a given liquid discharging head, by varying the discharge energy according to the kind of the supplied liquid, is complex and is difficult to practice. Consequently it is important to provide a recording

10 head capable, with a simple structure, of realizing stable liquid discharge regardless of the kind of the supplied liquid.

An object of the present invention, attained by such intensive investigation, is to provide a novel

15 liquid discharging head and a novel liquid discharging apparatus, capable of improving the efficiency of liquid droplet discharge, excellent in the stability and durability of discharge and stabilizing and increasing the discharged droplet volume or discharge

20 speed.

Another object of the present invention is to improve the discharge efficiency, discharge stability and durability in the liquid discharging head provided with a first liquid path for the discharge liquid

25 communicating with a discharge opening, a second liquid path containing the bubble generating liquid in a supplyable or movable manner and including a bubble

generating area, and a movable separating membrane for separating the first and second liquid paths, having a displacement area of the movable separating membrane at the upstream side with respect to the discharge opening.

Still another object of the present invention is to provide a liquid discharging head in which the discharge liquid and the bubble generating liquid are separated by a movable membrane, wherein the displacement of the movable separating membrane is stabilized at the pressure transmission to the discharge liquid by a displacement of the movable membrane by the pressure of bubble generation, thereby achieving excellent discharge efficiency, discharge stability and refilling efficiency.

Still another object of the present invention is to provide a liquid discharging head of the above-mentioned configuration, excellent in durability.

Still another object of the present invention is to provide a liquid discharging head of the above-mentioned configuration, capable of reducing the amount of deposit formed on the heat generating member and efficiently discharging the liquid without thermal influence thereto.

Still another object of the present invention is to provide a liquid discharging head having a wider freedom in selecting the discharge liquid, regardless

- 8 -

of the viscosity, constituent material or composition thereof.

Still another object of the present invention is to provide a liquid discharging head in which the
5 recessed portion of the movable separating membrane is made more easily deformable, thereby enabling to achieve a high density of the liquid path walls.

Still another object of the present invention is to provide a liquid discharging head comprising:

10 a discharge liquid path communicating with a discharge opening for discharging a discharge liquid and adapted to flow the discharge liquid;

a bubble generating liquid path including a bubble generating area for bubble generation and adapted to
15 flow a bubble generating liquid; and

a movable separating membrane adapted for mutually and substantially separating the discharge liquid path and the bubble generating liquid path and having a recess, in a position corresponding to the bubble
20 generating area, deviated so as to narrow the bubble generating liquid path;

wherein the recess has substantially non-displacing corner portions and is adapted to displace, excluding the corner portions, by a bubble
25 generated in the bubble generating area.

Still another object of the present invention is to provide a liquid discharging head comprising:

a discharge liquid path communicating with a discharge opening for discharging a discharge liquid and adapted to flow the discharge liquid;

5 a bubble generating liquid path including a bubble generating area for bubble generation and adapted to flow a bubble generating liquid; and

a movable separating membrane adapted for mutually and substantially separating the discharge liquid path and the bubble generating liquid path and having a recess, in a position corresponding to the bubble
10 generating area, deviated so as to narrow the bubble generating liquid path;

wherein the volume V1 of the recess in a still state and the volume V2 of the recess at the maximum
15 displacement satisfy a relation:

$$V2 < V1.$$

Still another object of the present invention is to provide a liquid discharging apparatus comprising:

a liquid discharging head including a discharge
20 liquid path communicating with a discharge opening for discharging a discharge liquid and adapted to flow the discharge liquid; a bubble generating liquid path including a bubble generating area for bubble generation and adapted to flow a bubble generating
25 liquid; and a movable separating membrane adapted for mutually and substantially separating the discharge liquid path and the bubble generating liquid path and

having a recess, in a position corresponding to the bubble generating area, deviated so as to narrow the bubble generating liquid path; wherein the recess has substantially non-displacing corner portions and is adapted to displace, excluding the corner portions, by a bubble generating in the bubble generating area; and transport means for transporting a recording medium for forming a record by receiving the discharge liquid discharge from the liquid discharging head.

Still another object of the present invention is to provide a liquid discharging apparatus comprising:
a liquid discharging head including a discharge liquid path communicating with a discharge opening for discharging a discharge liquid and adapted to flow the discharge liquid; a bubble generating liquid path including a bubble generating area for bubble generation and adapted to flow a bubble generating liquid; and a movable separating membrane adapted for mutually and substantially separating the discharge liquid path and the bubble generating liquid path and having a recess, in a position corresponding to the bubble generating area, deviated so as to narrow the bubble generating liquid path; wherein the volume V1 of the recess in a still state and the volume V2 of the recess at the maximum displacement satisfy a relation $V2 < V1$; and

transport means for transporting a recording

- 11 -

medium for forming a record by receiving the discharge liquid discharge from the liquid discharging head.

According to the present invention, the movable
5 separating membrane, for separating the first liquid path in which the discharge liquid is supplied and the second liquid path in which the non-discharged bubble generating liquid is supplied, is provided with a recessed portion so as to oppose to the bubble
10 generating area and the fulcrum of the recessed portion is positioned at a non-displacing corner to constantly stabilize the initial state of the recessed portion and the shape thereof at the maximum displacement, thereby achieving stable liquid discharge.

15 Also by maintaining a relationship $V2 < V1$ between the volume $V1$ of the recessed portion in a still state and the volume $V2$ thereof at the maximum displacement, the pressure by bubble generation acts only on the displacement of the recessed portion substantially
20 without causing elongation or contraction of the movable separating membrane even at the maximum displacement, thereby realizing stable discharge and improved durability. Besides, with the contraction of the bubble, the recessed portion of the movable
25 separating membrane promptly returns to the initial state by the self returning force provided by the non-displacing corner portion, thereby improving the

refilling of the discharge liquid.

Furthermore, the recessed portion is provided with an inflection portion between a corner part and a bottom part, having a thickness smaller than that of the bottom part of the recessed portion, whereby the
5 the bottom part of the recessed portion, whereby the recessed portion is rendered more easily deformable and the pressure by bubble generation is more easily transmitted to the first liquid path at the side of the discharge opening thereof. Thus the liquid in the
10 first liquid path can be efficiently discharged from the discharge opening by the bubble generation.

Furthermore, by providing the movable separating membrane with a part of a smaller thickness between the corner part and the bottom part of the recessed
15 portion, the movable separating membrane can be made more easily deformable and the liquid in the first liquid path can be efficiently discharged from the discharge opening by the bubble generation.

Furthermore, with such more easily deformable recessed
20 portion, there can be provided a liquid discharging head sufficiently allowing to increase the density of the liquid paths.

Furthermore, by selecting the height h_2 from the bottom part of the recessed portion to the inflection
25 part thereof equal to or larger than the height h_1 from the heat generating member to the bottom part of the recessed portion, the pressure by bubble generation is

transmitted to the movable separating membrane before it escapes to the upstream and downstream sides of the second liquid path. Consequently the pressure by bubble generation can be efficiently transmitted to the movable separating membrane, thus improving the discharge efficiency.

Furthermore, the pressure by bubble generation can be sufficiently and efficiently to the entire bottom part of the recessed portion by maintaining a relationship $W1 \geq WH \geq W2$ among the distance $W1$ between the corner parts of the recessed portion, the width $W2$ of the bottom part thereof and the width WH of the heat generating member. It is furthermore made possible to efficiently transmit the pressure by bubble generation to the entire bottom part of the recessed portion by maintaining a relationship $W1 \geq W3 \geq WH$ wherein $W3$ is the distance between the inflection parts, present between the corner part and the bottom part of the recessed portion.

Furthermore, the pressure by bubble generation can be satisfactorily and efficiently transmitted to the entire bottom part of the recessed portion by maintaining a relationship $S1 \geq SH \geq S2$ wherein $S1$ is the area defined by connecting the corners of the recessed portion and projected in a direction toward the heat generating member, $S2$ is the area of the bottom part of the recessed portion and SH is the area

of the heat generating member. It is furthermore possible to more efficiently transmit the pressure by bubble generation to the entire bottom part of the recessed portion by maintaining a relationship

5 $S1 \geq S3 \geq SH$ wherein $S3$ is the area formed by connecting the inflection parts, present between the corner part and the bottom part, of the recessed portion.

Furthermore, it is possible to supply the bubble

10 generating liquid from a guide path at the generation or extinction of the bubble by adopting a configuration in which the liquid in the second liquid path flows in the guide path provided in the substrate. It is furthermore possible to obtain uniform pressure balance

15 in the second liquid path by adjusting the cross section of the guide path, thereby enabling parallel displacement of the movable separating membrane more securely and more stably. Furthermore, a configuration having guide path which divide the entire liquid paths

20 into plural blocks enables uniform liquid flow in the second liquid paths. Also a configuration having a bubble reservoir in a part of the second liquid path allows to eliminate bubbles from the liquid supplied through the guide path and to utilize the liquid with

25 reduced bubble content, thereby more easily attaining desired bubble discharging characteristics.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A, 1B, 1C, 1D, 1E and 1F are cross-sectional views along the liquid path showing are embodiment of the liquid discharging head of the present invention;

Figs. 2A, 2B, 2C, 2D, 2E and 2F are magnified cross-sectional views in the vicinity of the recessed portion of the movable separating membrane shown in Figs. 1A to 1F;

Fig. 3 is a partially broken perspective view of the liquid discharging head shown in Figs. 1A to 1F and 2A to 2F;

Figs. 4A and 4B are magnified cross-sectional views along the liquid path showing the recessed portion of the movable separating membrane of the liquid discharging head of the present invention, respectively in an initial state and in a state at the maximum displacement;

Figs. 5A and 5B are similar views showing a reference example not provided with the corner part at the fulcrum of the recessed portion of the movable separating membrane, respectively in an initial state and in a state at the maximum displacement of the recessed portion;

Fig. 6 is a cross-sectional view, parallel to the heat generating member, showing the liquid path of the liquid discharging head of the present invention;

Figs. 7A and 7B are magnified cross-sectional views along the liquid path showing the volume of the recessed portion of the movable separating membrane of the liquid discharging head of the present invention, respectively in an initial state and in a state at the maximum displacement;

Figs. 8A and 8B are cross-sectional views showing a configuration of the liquid discharging head of the present invention, respectively with a protective film to be explained later and without such protective film;

Fig. 9 is a wave form chart showing a voltage to be applied to the electrical resistance layer shown in Figs. 8A and 8B;

Figs. 10A and 10B are views showing a process for preparing the movable separating membrane of the liquid discharging head of the present invention;

Figs. 11A and 11B are views showing another process for preparing the movable separating membrane of the liquid discharging head of the present invention;

Figs. 12A, 12B, 12C, 12D, 12E and 12F are cross-sectional views along the liquid path showing another embodiment of the liquid discharging head of the present invention;

Figs. 13A, 13B, 13C, 13D, 13E and 13F are magnified cross-sectional views in the vicinity of the

- 17 -

recessed portion of the movable separating membrane shown in Figs. 12A to 12F;

Fig. 14 is a partially broken perspective view of the liquid discharging head shown in Figs. 12A to 12F
5 and 13A to 13F;

Figs. 15A and 15B are magnified cross-sectional views along the liquid path showing the recessed portion of the movable separating membrane in another embodiment of the liquid discharging head of the
10 present invention, respectively in an initial state and in a state at the maximum displacement;

Fig. 16 is a cross-sectional view, parallel to the heat generating member, showing the liquid path in another embodiment of the liquid discharging head of
15 the present invention;

Figs. 17A and 17B are views showing a process for preparing the movable separating membrane in another embodiment of the liquid discharging head of the present invention;

20 Figs. 18A, 18B, 18C, 18D and 18E are cross-sectional views along the liquid path showing another embodiment of the movable separating membrane of the liquid discharging head of the present invention;

25 Figs. 19A and 19B are cross-sectional views perpendicular to the liquid path showing another embodiment of the movable separating membrane of the

liquid discharging head of the present invention;

Figs. 20A, 20B, 20C, 20D, 20E and 20F are magnified cross-sectional views in the vicinity of the recessed portion of the movable separating membrane in another embodiment of the liquid discharging head of the present invention;

Figs. 21A, 21B, 21C, 21D, 21E and 21F are magnified cross-sectional views in the vicinity of the recessed portion of the movable separating membrane in still another embodiment of the liquid discharging head of the present invention;

Figs. 22A, 22B, 22C, 22D, 22E and 22F are magnified cross-sectional views, along a line 22A to 22F - 22A to 22F in Fig. 1A, of the vicinity of the movable separating membrane in another embodiment of the present invention;

Figs. 23A, 23B, 23C, 23D, 23E and 23F are magnified cross-sectional views of the vicinity of the movable separating membrane shown in another embodiment of the present invention shown in Figs. 12A to 12F;

Figs. 24A, 24B, 24C, 24D, 24E and 24F are magnified cross-sectional views of the vicinity of the movable separating membrane, seen from the side of the discharge opening, in another embodiment of the present invention shown in Figs. 12A to 12F;

Figs. 25A, 25B, 25C and 25D are views showing positional relationship between the heat generating

member and the movable separating membrane in another embodiment of the present invention;

5 Figs. 26A, 26B, 26C and 26D are views showing positional relationship between the heat generating member and the movable separating membrane in still another embodiment of the present invention;

10 Figs. 27A, 27B, 27C, 27D, 27E and 27F are cross-sectional views along the liquid path, showing another embodiment of the liquid discharging head of the present invention;

Figs. 28A, 28B, 28C and 28D are plan views and a cross-sectional view showing an example of the second liquid path in another embodiment of the liquid discharging head of the present invention;

15 Fig. 29 is a cross-sectional view showing the principal parts of another embodiment of the liquid discharging head of the present invention;

20 Fig. 30 is a cross-sectional view showing the entire structure of the liquid discharging head shown in Fig. 29;

Fig. 31 is a cross-sectional view showing another embodiment of the liquid discharging head of the present invention;

25 Fig. 32A is a plan view of an element board in another embodiment of the liquid discharging head of the present invention; Fig. 32B is a partial magnified view of the board shown in Fig. 32A; and Fig. 32C is a

- 20 -

magnified partial plan view of still another embodiment;

Fig. 33 is a schematic perspective view showing the principal parts of an ink jet recording apparatus, constituting the liquid discharging apparatus in which the liquid discharging head of the present invention is mounted; and

Fig. 34 is a schematic perspective view showing the principal parts of the liquid discharging apparatus constituting another embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Now the present invention will be clarified in detail by preferred embodiments thereof with reference to the attached drawings.

Figs. 1A to 1F are cross-sectional views along the liquid path showing an embodiment of the liquid discharging head of the present invention, while Figs. 2A to 2F are magnified cross-sectional views in the vicinity of the recessed portion of the movable separating membrane shown in Figs. 1A to 1F, and Fig. 3 is a partially broken perspective view of the liquid discharging head shown in Figs. 1A to 1F and 2A to 2F.

In the present embodiment, as shown in Figs. 1A to 1F, a first liquid path 3 communicating with a discharge opening 1 is filled with first liquid

- 21 -

supplied from a first common liquid chamber 143, while
a second liquid path 4 containing a bubble generating
area 7 is filled with bubble generating liquid which
generates a bubble upon receiving thermal energy by a
5 heat generating member 2. Between the first liquid
path 3 and the second liquid path 4 there is provided a
movable separating membrane 5 for mutually separating
the first and second liquid paths. The movable
separating membrane 5 is provided, in a portion thereof
10 opposed to the bubble generating area 7, with a
recessed portion 8 having corner parts 8a at the
fulcrums thereof, thus forming an expansion in the
first liquid path 3. The movable separating membrane 5
is fixed to an orifice plate 9 to prevent mixing of two
15 liquids. In the second liquid path 4, the bubble
generating area 7 is constituted by the vicinity of the
projected area of the heat generating member 2.

As shown in Fig. 3, the heat generating member 2
is provided in an array of plural units on an element
20 board 10, on which plural second liquid paths 4 are
provided respectively corresponding to the heat
generating members 2. A support member 11 supporting
the movable separating membrane 5 serves also as a wall
for defining and forming the second liquid paths 4.
25 The movable separating membrane 5 is provided with
plural recessed portions 8, respectively corresponding
to the bubble generating areas 7 positioned in the

- 22 -

vicinity of the bubble generating areas 7 which are in the vicinity of the projected areas of the heat generating members 2. The first liquid path 3 is provided in plural units, so as to respectively contain
5 the recessed portions 8. In Fig. 3, however, the positions of walls 28 for defining the first liquid paths are represented by broken lines.

The present invention is based on the movement of the movable separating membrane 5, and the movable
10 separating membrane 5 itself is provided with the recessed portion 8 which is displaced toward the first liquid path 3 by the growth of a bubble generated on the surface of the heat generating member 2.

In an initial state shown in Figs. 1A and 2A, the
15 liquid in the first liquid path 3 is retracted to the vicinity of the discharge opening 1 by the capillary force. In the present embodiment, the discharge opening 1 is provided at the downstream position, in the liquid flow direction in the first liquid path 3,
20 with respect to the projected area of the heat generating member 2 onto the first liquid path 3.

When thermal energy is given to the heat generating member 2 (consisting of a heat-generating resistance member of $40 \times 105 \mu\text{m}$ in the present
25 embodiment) in this state, the heat generating member 2 is rapidly heated whereby the surface thereof in contact with the second liquid in the bubble generating

- 23 -

area heats the liquid and generates a bubble therein (Figs. 1B and 2B). A bubble 6 thus formed is based on a film boiling phenomenon as described in the U.S. Patent No. 4,723,129 and is generated with an extremely
5 high pressure over the entire area of the heat generating member. The generated pressure is transmitted as a pressure wave in the second liquid in the second liquid path 4 and acts on the movable separating membrane 5, whereby the recessed portion 8
10 thereof is deformed to initiate the discharge of the first liquid in the first liquid path 3. However the corner parts 8a formed at the fulcrums of the recessed portion 8 are not involved in such deformation.

The bubble generated on the entire surface of the
15 heat generating member 2 rapidly grows to assume a film shape (Figs. 1C and 2C). The expansion of the bubble 6 with an extremely high pressure in the initial stage of generation causes a further deformation of the recessed portion 8 of the movable separating membrane 5, whereby
20 the first liquid in the first liquid path 3 is further discharged from the discharge opening 1.

With the further growth of the bubble 6 thereafter, the deformation proceeds to such a level that the central part of the recessed portion 8,
25 excluding the corner parts 8a of the membrane 5, enters the first liquid path 3 (Figs. 1D and 2D).

When the bubble 6 starts to contract thereafter,

- 24 -

the recessed portion 8 of the movable separating membrane 5 starts to return to the position before deformation (Figs. 1E and 2E).

Subsequently, the recessed portion 8 of the
5 movable separating membrane 5 promptly returns to the initial state shown in Figs. 1F and 2F by the self returning force exerted by the non-deformed corner parts 8a, whereby the liquid refilling in the first liquid path 3 is accelerated. Also, with the
10 extinction of the bubble, the recessed portion 8 of the movable separating membrane 5 displaces into the second liquid path 4, thereby reducing the volume thereof and also reducing the refilling amount of the bubble generating liquid, whereby the refilling is completed
15 promptly. Also, as the corner parts 8a of the recessed portion 8 have a function of suppressing the rebounding movement immediately after the displacement by bubble generation, the recessed portion 8 immediately returns to the initial state after displacement, thereby
20 enabling high-speed drive.

Figs. 4A and 4B are magnified cross-sectional views along the liquid path showing the recessed portion 8 of the movable separating membrane 5 of the liquid discharging head of the present invention,
25 respectively in the initial state and in a state at the maximum displacement, while Figs. 5A and 5B are similar views showing a reference example not provided with the

- 25 -

corner parts at the fulcrums of the recessed portion 8 of the movable separating membrane 5, respectively in the initial state and in the state at maximum displacement of the recessed portion, and Fig. 6 is a cross-sectional view, parallel to the heat generating member, showing the liquid path of the liquid discharging head of the present invention.

In case the fulcrums 26 of the recessed portion do not have the corner parts as shown in Figs. 5A and 5B and the bottom part 27 of the recessed portion assumes an inverted shape at the maximum displacement as shown in Fig. 5B, the recessed portion deforms with the fulcrums 26 as the inflection points.

On the other hand, in case the fulcrums of the recessed portion have the corner parts 8a, such corner parts 8a have an effect, in the initial state shown in Fig. 4A, of defining the initial shape always in a constant shape. Also at the maximum displacement shown in Fig. 4B, the shape is always constant because the deformation is not concentrated locally but is spread over a wide area in the vicinity of the corner parts. Thus the corner parts 8a define the shape at the initial state and at the maximum displacement, thereby achieving very stable liquid discharge and improving durability. The displacement governing area of the corner parts 8a will also be understood from Fig. 6.

Figs. 7A and 7B are magnified cross-sectional

- 26 -

views along the liquid path showing the volume of the recessed portion 8 of the movable separating membrane 5 in the liquid discharging head of the present invention, respectively in an initial state and in a state at the maximum displacement.

In this embodiment, the driving conditions are so selected as to satisfy a condition $V2 < V1$, wherein $V1$ is the volume of the recessed portion in the initial state shown in Fig. 7A and $V2$ is that at the maximum displacement shown in Fig. 7B.

Under the condition $V2 < V1$, the movable separating member in the recessed portion 8 does not show elongation or contraction even at the maximum displacement. Consequently $V1$ and $V2$ remain always constant, thereby stabilizing the liquid discharge. The volume $V1$ of the recessed portion means a volume defined between the face of the movable separating membrane 5 at the side of the first liquid path and the bottom part 8b of the recessed portion 8 in the initial state, and the volume $V2$ means a volume surrounded by faces in contact with the inflection parts 8c of the recessed portion 8 and the bottom part 8b thereof at the maximum displacement. Also the "inflection part" used in the present specification and the appended drawings means, in the recessed portion of the movable separating membrane, a part showing the largest deformation at the maximum displacement.

The configuration of the present embodiment allows to employ different liquids for the discharge liquid and the bubble generating liquid and to discharge the discharge liquid only. Consequently, it is possible to
5 satisfactorily discharge highly viscous liquid such as polyethylene glycol in which a sufficient discharging force cannot be obtained in the conventional configuration because of insufficient bubble generation under the application of heat, by supplying such liquid
10 in the first liquid path 103 and supplying the second liquid path 104 with liquid capable of satisfactory bubble generation (for example a mixture of ethanol: water = 4 : 6 with a viscosity of 1 - 2 cp).

Also as the bubble generating liquid, there can be
15 selected liquid which does not generate a deposit such as kogation on the surface of the heat generating member under the influence of heat, in order to stabilize the bubble generation and ensuring satisfactory liquid discharge.

20 Furthermore, the configuration of the liquid discharging head of the present invention can discharge various liquid such as highly viscous liquid with an even higher discharge efficiency and an even higher discharging power, because of the effects explained in
25 the foregoing embodiment.

Furthermore, liquid susceptible to heat can be discharged without thermal damage with a high discharge

efficiency and a high discharging power as explained above, by supplying such liquid as the discharge liquid in the first liquid path 103 and supplying the second liquid path 104 with liquid stabler to heat capable of
5 satisfactory bubble generation as the bubble generating liquid.

In the following there will be explained the configuration of an element board 110 provided with the heat generating members 102 for giving heat to the
10 liquid.

Figs. 8A and 8B are longitudinal cross-sectional views showing a configuration of the liquid discharging head of the present invention, respectively with a protective film to be explained later and without such
15 protective film.

As shown in Figs. 8A and 8B, on an element board 110, there are provided a second liquid path 104, a movable separating membrane 105 constituting a partition wall, a movable member 131, a first liquid
20 path 103, and a grooved member 132 provided with a groove constituting the first liquid path 103.

The element board 110 is composed by forming, on a substrate 110f such as of silicon, a silicon oxide film or a silicon nitride film 110e for the purpose of
25 electrical insulation and heat accumulation, on which patterned are an electrical resistance layer 110d for example of hafnium boride (HfB_2), tantalum nitride (TaN)

or tantalum-aluminum (TaAl) constituting the heat generating member of a thickness of 0.01 to 0.2 μm , and a wiring electrode 110c for example of aluminum of a thickness of 0.1 to 1.0 μm . A voltage is applied to the electrical resistance layer 110d from the two wiring electrodes 110c to generate heat by the current in the electrical resistance layer 110d. On the electrical resistance layer 110d between the wiring electrodes 110c, there are formed a protective layer 110b for example of silicon oxide or silicon nitride of a thickness of 0.1 to 0.2 μm and an anticavitation layer 110a for example of tantalum of a thickness of 0.1 to 0.6 μm to protect the electrical resistance layer 110d from various liquids such as the ink.

As the pressure or impact wave generated at the generation or extinction of the bubble is very strong and significantly deteriorates the service life of the hard and fragile oxide film, the anticavitation layer 110a is composed of a metal such as tantalum (Ta).

There may also be adopted a configuration dispensing with the above-mentioned protective layer by the combination of the liquid, configuration of the liquid paths and the resistance material, as exemplified in Fig. 8B. An example of the material for the resistance layer not requiring such protective layer is iridium-tantalum-aluminum alloy. The present invention is particularly advantageous for the

- 30 -

configuration without the protective layer, since the liquid for bubble generation can be selected for this purpose, separately from the discharge liquid.

Therefore, the heat generating member 102 in the above-described embodiment may be constructed with the electrical resistance layer (heat generating part) 110d only between the wiring electrodes 110c or with a protective layer for protecting the electrical resistance layer 110d.

In the present embodiment, the heat generating member 102 is provided with a heat generating part constituted by a resistance layer capable of heat generation in response to an electrical signal, but the present invention is not limited to such configuration and there may be employed any heat generating part capable of generating, in the bubble generating liquid, a bubble sufficient for discharging the discharge liquid. For example there may be employed a photothermal converting member for generating heat by receiving light such as from a laser, or a heat generating part for generating heat by receiving a high frequency radio wave.

The aforementioned element board 110 may be provided, in addition to the electrothermal converting members composed of the electrical resistance layer 110d constituting the heat generating parts and the wiring electrodes 110c for supplying the electrical

resistance layer 110d with electrical signals,
integrally with functional elements such as
transistors, diodes, latches, shift registers etc. for
selectively driving such electrothermal converting
5 elements by a semiconductor process.

For discharging the liquid by driving the heat
generating part of the electrothermal converting member
provided on the aforementioned element board 110, a
rectangular pulse is applied to the electrical
10 resistance layer 110d through the wiring electrodes
110d thereby causing rapid heat generation in the
electrical resistance layer 110d.

Fig. 9 is a wave form chart showing the voltage to
be applied to the electrical resistance layer 110d
15 shown in Figs. 8A and 8B. In the liquid discharging
head of the above-described embodiment, the heat
generating member is driven by applying an electrical
signal of a voltage of 24 V, a pulse duration of
7 μ sec and a current of 150 mA with a frequency of
20 6 kHz to discharge liquid ink from the discharge
opening by the aforementioned functions. However the
conditions of the driving signal in the present
invention are not limited to those mentioned above
but there may be employed any drive signal capable of
25 appropriate bubble generation in the bubble generating
liquid.

In the present invention, as explained in the

foregoing, the liquid can be discharged with a discharging power and a discharge efficiency higher than in the conventional liquid discharging head. The bubble generating liquid can be of liquid of the
5 aforementioned properties, such as methanol, ethanol, n-propanol, isopropanol, n-hexane, n-heptane, n-octane, toluene, xylene, methylene dichloride, trichlene, fleon TF, fleon BF, ethylether, dioxane, cyclohexane, methyl acetate, ethyl acetate, acetone, methylethylketone,
10 water and mixtures thereof.

The discharge liquid may be composed of various liquid regardless of the bubble generating property or the thermal properties. There may also be employed liquid of low bubble generating property that cannot be
15 easily discharged in the conventional configuration, liquid subject to deterioration by heat or highly viscous liquid. However the discharge liquid is desirably not hindering the liquid discharging operation, bubble generating operation or the function
20 of the movable separating membrane by the discharge liquid itself or by a reaction with the bubble generating liquid.

The discharge liquid for recording may also be composed of highly viscous ink. Other examples of the
25 discharge liquid include pharmaceuticals or perfumes which are susceptible to heat.

The recording operation was conducted by the

- 33 -

combinations of the bubble generating liquid and the discharge liquid in the following compositions. As a result, records of high quality could be obtained by satisfactorily discharging not only the liquid of a viscosity in excess of 10 cp that could not be satisfactorily discharged in the conventional liquid discharging head but also the liquid of a viscosity as high as 150 cp.

10	Bubble generating liquid 1	ethanol	40 wt.%
		water	60 wt.%
	Bubble generating liquid 2	water	100 wt.%
	Bubble generating liquid 3	isopropyl alcohol	10 wt.%
		water	90 wt.%
15	Discharge liquid 1		
	carbon black (pigment ink; ca. 15cp)		5 wt.%
	styrene-acrylic acid-ethyl acrylate copolymer (oxidation degree 140; weight-averaged molecular weight 8000)		1 wt.%
20	monoethanolamine		0.25 wt.%
	glycerin		6.9 wt.%
	thiodiglycol		5 wt.%
	ethanol		3 wt.%
25	water		16.75 wt.%
	Discharge liquid 2		
	polyethyleneglycol 200		100 wt.%

Discharge liquid 3

polyethyleneglycol 600 100 wt.%

With the aforementioned liquid that has conventionally considered difficult to discharge, the low discharge speed in such liquid increases the fluctuation in the direction of discharge, thus deteriorating the landing accuracy of the dot on the recording sheet. Also the discharge amount fluctuates because of the unstable discharge, and, because of these facts, a high-quality image was difficult to obtain. In the configuration of the above-described embodiment, the bubble generation can be achieved sufficiently and stably by the use of the bubble generating liquid. There can therefore be attained improvement in the landing accuracy of the liquid droplet and stabilization in the ink discharge amount, thus resulting in a significant improvement in the quality of the recorded image.

In the following there will be explained the method for producing the liquid discharging head of the present invention.

The head is basically prepared by forming a wall of the second liquid path on the element board, then mounting thereon the movable separating membrane thereon and mounting thereon a grooved member provided with a groove constituting the first liquid path. Otherwise it is prepared, after forming the wall of the

- 35 -

second liquid path, by adhering thereon the grooved member on which the movable separating membrane is mounted in advance.

There will also be explained in detail the method
5 of preparing the second liquid path.

At first, on an element substrate (silicon wafer), there was formed an electrothermal converting element including the heat generating member consisting for example of hafnium boride or tantalum nitride with an
10 apparatus similar to that employed in the semiconductor manufacture, and the surface of the element substrate was then rinsed in order to improve the adhesion with photosensitive resin in a next step. Further improvement in adhesion can be achieved by surface
15 modification of the element substrate for example with ultraviolet light-ozone, followed by spin coating for example of a silane coupling agent (A189 manufactured by Japan Unicar Co.) diluted to 1 wt.% with ethyl alcohol.

20 Then the substrate surface with thus improved adhesion was rinsed and laminated with an ultraviolet-sensitive resin film (Dry Film Ordil SY-318 manufactured by Tokyo Ohka Co.).

Then a photomask was placed on the dry film, and
25 the portions to be left as the second liquid path walls were irradiated with the ultraviolet light through the photomask. The exposure was executed with an apparatus

- 36 -

MPA-600 manufactured by Canon Inc., with an exposure amount of ca. 600 mJ/cm².

Then the dry film was developed with a developer (BMRC-3 manufactured by Tokyo Ohka Co.) consisting of a
5 mixture of xylene and butyl cellosolve acetate to dissolve the unexposed portions, thereby leaving the portions hardened by exposure as the second liquid path walls. Further, the residue remaining on the substrate surface was eliminated by processing with an oxygen
10 plasma ashing apparatus (MAS-800 manufactured by Alcantec Co.) for about 90 seconds, and the exposed portions were completely hardened by ultraviolet irradiation of 100 mJ/cm² for 2 hours at 150 °C.

Through the above-described process, the second
15 liquid path walls could be formed uniformly, with sufficient precision, on the plural heater boards (element boards) prepared by dividing the above-mentioned silicon substrate. More specifically, the silicon substrate was cut into respective heater
20 boards 1 with a dicing machine (AWD-4000 manufactured by Tokyo Seimitsu Co.) equipped with a diamond blade of a thickness of 0.05 mm. The separated heater board was fixed on an aluminum base plate with an adhesive material (SE4400 manufactured by Toray Co.).

25 The printed circuit board adhered in advance to the aluminum base plate and the heater board were connected with aluminum wires of a diameter of 0.05 mm.

Then, on the heater board thus obtained, a jointed member of the grooved member and the movable separating membrane was positioned and adhered by the above-described process. More specifically, the
5 grooved member provided with the movable separating membrane and the heater board are mutually positioned and fixed with a pressing spring, then the ink/bubble generating liquid supply member is adhered to the aluminum base plate, and the gaps between the aluminum
10 wires and among the grooved member, heater board and ink/bubble generating liquid supply member were sealed with a silicone sealant (TSE399 manufactured by Toshiba Silicone Co.).

The above-described process allowed to prepare the
15 second liquid paths with sufficient precision, without positional aberration with respect to the heaters of the heater board. In particular, the positional precision between the first liquid path and the movable member can be improved by adhering the grooved member
20 and the movable separating membrane in advance. Such highly precise manufacturing technology stabilizes the discharge, thereby improving the print quality, and allows collective manufacture on the wafer, thereby enabling mass production with a low cost.

25 In the second embodiment, the second liquid paths are formed with the ultraviolet-setting dry film, but they can also be obtained by laminating a resin having

absorption band in the ultraviolet region, particularly in the vicinity of 248 nm, then hardening the resin and directly eliminating the resin corresponding to the second liquid paths with an excimer laser.

5 Also the first liquid paths etc. were prepared by adhering a grooved top plate, provided with an orifice plate having the discharge openings, grooves constituting the first liquid paths and a recess constituting a first common liquid chamber commonly
10 communicating with plural first liquid paths and serving the supply the first liquid to such liquid paths, to the jointed member of the aforementioned substrate and the movable separating membrane. The movable separating membrane is fixed by being
15 sandwiched between the grooved top plate and the second liquid path walls. The movable separating membrane need not necessarily be fixed to the substrate but may be fixed to the grooved top plate and then to the substrate.

20 The movable separating membrane 105 is preferably composed of a resinous material with satisfactory heat resistance, solvent resistance and molding property and capable of forming a thin film, represented by recent engineering plastics such as polyimide, polyethylene,
25 polypropylene, polyamide, polyethylene terephthalate, melamine resin, phenolic resin, polybutadiene, polyurethane, polyethyletherketone, polyethersulfone,

polyallylate, silicone rubber, polysulfone, fluorinated resin etc., compounds thereof, or a metal with satisfactory durability, heat resistance and solvent resistance such as silver, nickel, gold, iron, titanium, aluminum, platinum, tantalum, stainless steel, phosphor bronze or compounds thereof, or silicone or compounds thereof.

Figs. 10A and 10B illustrate the process for preparing the movable separating membrane, and Figs. 11A and 11B illustrate another process for preparation.

At first, as shown in Fig. 10A, a mold 22 corresponding to the recessed portion of the movable separating membrane was formed with a metal or a resinous material on a silicon mirror wafer 21. Then a releasing agent was coated on the mold 22, and liquid polyimide resin was spin coated thereon to form a film 23 as shown in Fig. 10B.

Then the film 23 was peeled off from the mirror wafer 11 and was positioned and fixed on the substrate on which the aforementioned second liquid path was formed, thereby obtaining the movable separating membrane.

However the movable separating membrane can also be prepared by other methods. For example, the movable separating membrane can be formed by preparing a commercially available thin film 24 and molds 25 for

forming the recessed portion as shown in Fig. 11A, and pressing the thin film 24 between the molds 25 as shown in Fig. 11B and causing plastic deformation by heat.

5 Figs. 12A to 12F are cross-sectional views, along the liquid path, showing another embodiment of the liquid discharging head of the present invention, while Figs. 13A to 13F are magnified cross-sectional views of the vicinity of the recessed portion of the movable separating membrane shown in Figs. 12A to 12F, and Fig. 10 14 is a partially broken perspective view of the liquid discharging head shown in Figs. 12A to 12F and 13A to 13F.

In the present embodiment, as shown in Figs. 12A to 12F, a first liquid path 3 communicating with a discharge opening 1 is filled with first liquid 15 supplied from a first common liquid chamber 143, while a second liquid path 4 containing a bubble generating area 7 is filled with bubble generating liquid which generates a bubble upon receiving thermal energy by a 20 heat generating member 2. Between the first liquid path 3 and the second liquid path 4 there is provided a movable separating membrane 5 for mutually separating the first and second liquid paths. The movable separating membrane 5 is provided, in a portion thereof 25 opposed to the bubble generating area 7, with a recessed portion 8 having corner parts 8a at the fulcrums thereof, thus forming an expansion in the

first liquid path 3. The movable separating membrane 5 is fixed to an orifice plate 9 to prevent mixing of two liquids. In the second liquid path 4, the bubble generating area 7 is constituted by the vicinity of the projected area of the heat generating member 2.

As shown in Figs. 13A to 13F, the recessed portion 8 of the movable separating membrane 5 is provided with inflection parts 8c between the corner parts 8a and the bottom part 8b, and the thickness (W8c) of the inflection parts 8c is made smaller than that (W8b) of the bottom part 8b. The "inflection part" used in the present specification and in the appended drawings means a part showing largest deformation in the recessed portion of the movable separating membrane at the maximum displacement thereof.

As shown in Fig. 14, the heat generating member 2 is provided in an array of plural units on an element board 10, on which plural second liquid paths 4 are provided respectively corresponding to the heat generating members 2. A support member 11 supporting the movable separating membrane 5 serves also as a wall for defining and forming the second liquid paths 4. The movable separating membrane 5 is provided with plural recessed portions 8, respectively corresponding to the bubble generating areas 7 positioned in the vicinity of the bubble generating areas 7 which are in the vicinity of the projected areas of the heat

generating members 2. The first liquid path 3 is provided in plural units, so as to respectively contain the recessed portions 8. In Fig. 14, however, the positions of walls 28 for defining the first liquid paths are represented by broken lines.

The present invention is based on the movement of the movable separating membrane 5, and the movable separating membrane 5 itself is provided with the recessed portion 8 which is displaced toward the first liquid path 3 by the growth of a bubble generated on the surface of the heat generating member 2.

In an initial state shown in Figs. 12A and 13A, the liquid in the first liquid path 3 is retracted to the vicinity of the discharge opening 1 by the capillary force. In the present embodiment, the discharge opening 1 is provided at the downstream position, in the liquid flow direction in the first liquid path 3, with respect to the projected area of the heat generating member 2 onto the first liquid path 3.

When thermal energy is given to the heat generating member 2 (consisting of a heat-generating resistance member of $40 \times 10^5 \mu\text{m}$ in the present embodiment) in this state, the heat generating member 2 is rapidly heated whereby the surface thereof in contact with the second liquid in the bubble generating area heats the liquid and generates a bubble therein

- 43 -

(Figs. 12B and 13B). A bubble 6 thus formed is based on a film boiling phenomenon as described in the U.S. Patent No. 4,723,129 and is generated with an extremely high pressure over the entire area of the heat
5 generating member. The generated pressure is transmitted as a pressure wave in the second liquid in the second liquid path 4 and acts on the movable separating membrane 5, whereby the recessed portion 8 thereof is deformed, starting from the thinner
10 inflection parts 8c, to initiate the discharge of the first liquid in the first liquid path 3. However the corner parts 8a formed at the fulcrums of the recessed portion 8 are not involved in such deformation.

The bubble generated on the entire surface of the
15 heat generating member 2 rapidly grows to assume a film shape (Figs. 12C and 13C). The expansion of the bubble 6 with an extremely high pressure in the initial stage of generation causes a further deformation of the recessed portion 8 of the movable separating membrane
20 5, whereby the first liquid in the first liquid path 3 is further discharged from the discharge opening 1.

When the further growth of the bubble 6 thereafter, the deformation proceeds to such a level that the entire recessed portion 8, excluding the
25 vicinity of the corner parts 8a of the membrane 5, enters the first liquid path 3 (Figs. 12D and 13D). Since the above-described displacement of the recessed

portion 8 from the initial state to the maximum displacement is facilitated by the inflection parts 8c thinner than other parts of the recessed portion 8, the pressure caused by bubble generation can be efficiently guided to the discharge opening, thereby improving the discharge efficiency.

When the bubble 6 starts to contract thereafter, the recessed portion 8 of the movable separating membrane 5 starts to return to the position before deformation (Figs. 12E and 13E).

Subsequently, the recessed portion 8 of the movable separating membrane 5 promptly returns to the initial state shown in Figs. 12F and 13F by the self returning force exerted by the non-deformed corner parts 8a, whereby the liquid refilling in the first liquid path 3 is accelerated. Also, with the extinction of the bubble, the recessed portion 8 of the movable separating membrane 5 displaces into the second liquid path 4, thereby reducing the volume thereof and also reducing the refilling amount of the bubble generating liquid, whereby the refilling is completed promptly. Also, as the corner parts 8a of the recessed portion 8 have a function of suppressing the rebounding movement immediately after the displacement by bubble generation, the recessed portion 8 immediately returns to the initial state after displacement, thereby enabling high-speed drive.

Figs. 15A and 15B are magnified cross-sectional views along the liquid path showing the recessed portion 8 of the movable separating membrane 5 in the liquid discharging head of the other embodiment of the present invention, respectively in the initial state and in a state at the maximum displacement, while Fig. 16 is a cross-sectional view, parallel to the heat generating member, of the liquid discharging head of the other embodiment of the present invention.

In case the fulcrums 2 of the recessed portion do not have the corner parts as shown in Figs. 5A and 5B and the bottom part 27 of the recessed portion assumes an inverted shape at the maximum displacement as shown in Fig. 5B, the recessed portion deforms with the fulcrums 26 as the inflection points.

On the other hand, in case the fulcrums of the recessed portion have the corner parts 8a, such corner parts 8a have an effect, in the initial state shown in Fig. 15A, of defining the initial shape always in a constant shape. Also at the maximum displacement shown in Fig. 15B, the shape is always constant because the deformation is not concentrated locally but is spread over a wide area in the vicinity of the corner parts. Thus the corner parts 8a define the shape at the initial state and at the maximum displacement, thereby achieving very stable liquid discharge and improving durability. The displacement governing area of the

corner parts 8a will also be understood from Fig.
16.

Besides, the presence of the thinner inflection
part 8c between the corner part 8a and the bottom part
5 8b of the recessed portion facilitates the deformation
of the recessed portion, thereby allowing to
efficiently guide the pressure by bubble generation to
the discharge opening and improving the discharge
efficiency. In the liquid discharging head employing
10 the separating membrane, as such membrane is sandwiched
between the liquid path walls for forming the first and
second liquid paths respectively above and below the
separating membrane, it becomes less deformable with a
higher density of the nozzles since the movable
15 separating membrane present between the liquid path
walls becomes narrower. However the more easily
deformable recessed portion allows to provide a liquid
discharging head capable of sufficiently adapting to
the nozzles arranged at a high density.

20 Furthermore, the configuration of the present
embodiment allows to employ different liquids for the
discharge liquid and the bubble generating liquid and
to discharge the discharge liquid only. Consequently,
it is possible to satisfactorily discharge highly
25 viscous liquid such as polyethylene glycol in which a
sufficient discharging force cannot be obtained in the
conventional configuration because of insufficient

bubble generation under the application of heat, by supplying such liquid in the first liquid path 103 and supplying the second liquid path 104 with liquid capable of satisfactory bubble generation (for example
5 a mixture of ethanol: water = 4 : 6 with a viscosity of 1 to 2 cp).

Also as the bubble generating liquid, there can be selected liquid which does not generate a deposit such as kogation on the surface of the heat generating
10 member under the influence of heat, in order to stabilize the bubble generating and ensuring satisfactory liquid discharge. Furthermore, the configuration of the liquid discharging head of the present invention can discharge various liquid such as
15 highly viscous liquid with an even higher discharge efficiency and an even higher discharging power, because of the effects explained in the foregoing embodiment.

Furthermore, liquid susceptible to heat can be
20 discharged without thermal damage with a high discharge efficiency and a high discharging power as explained above, by supplying such liquid as the discharge liquid in the first liquid path 103 and supplying the second liquid path 104 with liquid stabler to heat capable of
25 satisfactory bubble generation as the bubble generating liquid.

Figs. 17A and 17B illustrate another example of

- 48 -

the process for producing the movable separating membrane. At first, as shown in Fig. 17A, there were prepared a commercially available thin film 24 for forming the movable separating membrane and a male mold 25 and a female mold 26 for forming the recessed portion, and, the film 24 was pressed to the female mold 26 as shown in Fig. 17B and was subjected to plastic deformation by heat to obtain the movable separating membrane with the recessed portion.

10 Figs. 18A to 18E are cross-sectional views, transversal to the liquid path, showing still other embodiment of the movable separating membrane of the present invention. Fig. 18A shows a separating membrane with a semi-oval recessed portion, while Fig. 15 18B shows a separating membrane a V-shaped recessed portion, wherein a thinner inflection part 8c is provided between each corner part 8a and bottom part 8b. Figs. 18C to 18E show separating membranes with a trapezoidal recessed portion. In Fig. 18C a thinner part is formed by a curved notch. In Fig. 18D, the entire rising part is made thinner than other parts, and, in Fig. 18E, the entire rising part and a part of the bottom are made thinner than other parts. Also these configurations facilitate deformation of the 25 recessed portion of the movable separating membrane, thereby efficiently guiding the pressure by bubble generation to the discharge opening and improving the

discharge efficiency.

Figs. 19A and 19B are cross-sectional views, perpendicular to the liquid path, showing still other embodiments of the movable separating membrane of the present invention. In the illustrated cross section perpendicular to the liquid path, thinner inflection parts 8c are provided between the corner parts 8a and the bottom part 8b to obtain effects similar to those in the above-described embodiments.

Figs. 20A to 20F are magnified cross-sectional views of the vicinity of the recessed portion of the movable separating membrane in another embodiment of the present invention.

In this embodiment, as shown in Fig. 20A, the recessed portion of the movable separating membrane 5 is so formed as to satisfy a condition $h_2 \geq h_1$, wherein h_1 is the height from the heat generating member 2 to the bottom part 8b of the recessed portion in the still state and h_2 is the height from bottom part 8b of the recessed portion to the inflection part 8c thereof in the still state. For example if h_2 is 20 μm , h_1 is preferably within a range of 5 to 10 μm . The "inflection part" used in the present specification and the appended drawings means, in the recessed portion of the movable separating membrane, a part showing the largest deformation at the maximum displacement.

In an initial state shown in Fig. 20A, the liquid

- 50 -

in the first liquid path 3 is retracted to the vicinity of the discharge opening 1 by the capillary force.

In the present embodiment, the discharge opening 1 is provided at the downstream position, in the liquid flow direction in the first liquid path 3, with respect to the projected area of the heat generating member 2 onto the first liquid path 3.

When thermal energy is given to the heat generating member 2 (consisting of a heat-generating resistance member of $40 \times 105 \mu\text{m}$ in the present embodiment) in this state, the heat generating member 2 is rapidly heated whereby the surface thereof in contact with the second liquid in the bubble generating area heats the liquid and generates a bubble therein (Fig. 20B). A bubble 6 thus formed is based on a film boiling phenomenon as described in the U.S. Patent No. 4,723,129 and is generated with an extremely high pressure over the entire area of the heat generating member. The generated pressure is transmitted as a pressure wave in the second liquid in the second liquid path 4 and acts on the movable separating membrane 5. As the height h_2 from the bottom part 8b of the recessed portion 8 to the inflection part 8c thereof is selected equal to or larger than the height h_1 from the heat generating member 2 to the bottom part 8b of the recessed portion 8, the pressure by bubble generation is transmitted to the movable separating membrane 5

before it can escape to the upstream and downstream sides of the second liquid path 4, so that the pressure can be efficiently transmitted to the movable separating membrane 5. The transmission of the pressure by bubble generation to the movable separating membrane causes deformation of the recessed portion 8 thereof, thereby initiating the discharge of the first liquid in the first liquid path 3. However the corner parts 8a formed at the fulcrums of the recessed portion 8 are not involved in such deformation.

The bubble generated on the entire surface of the heat generating member 2 rapidly grows to assume a film shape (Fig. 20C). The expansion of the bubble 6 with an extremely high pressure in the initial stage of generation causes a further deformation of the recessed portion 8 of the movable separating membrane 5, whereby the first liquid in the first liquid path 3 is further discharged from the discharge opening 1.

With the further growth of the bubble 6 thereafter, the deformation proceeds to such a level that the entire recessed portion 8, excluding the vicinity of the corner parts 8a of the membrane 5, enters the first liquid path 3 (Fig. 20D).

When the bubble 6 starts to contract thereafter the recessed portion 8 of the movable separating membrane 5 starts to return to the position before deformation (Fig. 20E).

- 52 -

Subsequently, the recessed portion 8 of the movable separating membrane 5 promptly returns to the initial state shown in Fig. 20F by the self returning force exerted by the non-deformed corner parts 8a, whereby the liquid refilling in the first liquid path 3 is accelerated.

Also, with the extinction of the bubble, the recessed portion 8 of the movable separating membrane 5 displaces into the second liquid path 4, thereby reducing the volume thereof and also reducing the refilling amount of the bubble generating liquid, whereby the refilling is completed promptly. Also, as the corner parts 8a of the recessed portion 8 have a function of suppressing the rebounding movement immediately after the displacement by bubble generation, the recessed portion 8 immediately returns to the initial state after displacement, thereby enabling high-speed drive.

Figs. 21A to 21F are magnified cross-sectional views of the vicinity of the recessed portion of the movable separating membrane in still another embodiment of the present invention.

In this embodiment, as shown in Fig. 21A, the recessed portion 8 of the movable separating membrane 5 has an inflection part 8c between the corner part 8a and the bottom part 8b, with a thickness smaller in the inflection part 8c than in the bottom part 8b. Also as

shown in Fig. 20A, the recessed portion of the movable separating membrane 5 is so formed as to satisfy a condition $h_2 \geq h_1$, wherein h_1 is the height from the heat generating member 2 to the bottom part 8b of the recessed portion in the still state and h_2 is the height from bottom part 8b of the recessed portion to the inflection part 8c thereof in the still state. For example if h_2 is 20 μm , h_1 is preferably within a range of 5 to 10 μm . Other configurations are same as those in the foregoing embodiment.

In an initial state shown in Fig. 21A, the liquid in the first liquid path 3 is retracted to the vicinity of the discharge opening 1 by the capillary force. In the present embodiment, the discharge opening 1 is provided at the downstream position, in the liquid flow direction in the first liquid path 3, with respect to the projected area of the heat generating member 2 onto the first liquid path 3.

When thermal energy is given to the heat generating member 2 (consisting of a heat-generating resistance member of $40 \times 105 \mu\text{m}$ in the present embodiment) in this state, the heat generating member 2 is rapidly heated whereby the surface thereof in contact with the second liquid in the bubble generating area heats the liquid and generates a bubble therein (Fig. 21B). A bubble 6 thus formed is based on a film boiling phenomenon as described in the U.S. Patent No.

- 54 -

4,723,129 and is generated with an extremely high pressure over the entire area of the heat generating member. The generated pressure is transmitted as a pressure wave in the second liquid in the second liquid path 4 and acts on the movable separating membrane 5. As the height h_2 from the bottom part 8b of the recessed portion 8 to the inflection part 8c thereof is selected equal to or larger than the height h_1 from the heat generating member 2 to the bottom part 8b of the recessed portion 8, the pressure by bubble generation is transmitted to the movable separating membrane 5 before it can escape to the upstream and downstream sides of the second liquid path 4, so that the pressure can be efficiently transmitted to the movable separating membrane 5. The transmission of the pressure by bubble generation to the movable separating membrane causes deformation of the recessed portion 8 thereof, thereby initiating the discharge of the first liquid in the first liquid path 3. However the corner parts 8a formed at the fulcrums of the recessed portion 8 are not involved in such deformation.

The bubble 6 generated on the entire surface of the heat generating member 2 rapidly grows to assume a film shape (Fig. 21C). The expansion of the bubble 6 with an extremely high pressure in the initial stage of generation causes a further deformation of the recessed portion 8 of the movable separating membrane 5, whereby

the first liquid in the first liquid path 3 is further discharged from the discharge opening 1.

With the further growth of the bubble 6 thereafter, the deformation proceeds to such a level
5 that the entire recessed portion 8, excluding the vicinity of the corner parts 8a of the membrane 5, enters the first liquid path 3 (Fig. 21D).

When the bubble 6 starts to contract thereafter, the recessed portion 8 of the movable separating
10 membrane 5 starts to return to the position before deformation (Fig. 21E).

Subsequently, the recessed portion 8 of the movable separating membrane 5 promptly returns to the initial state shown in Fig. 21F by the self returning
15 force exerted by the non-deformed corner parts 8a, whereby the liquid refilling in the first liquid path 3 is accelerated. Also, with the extinction of the bubble, the recessed portion 8 of the movable separating membrane 5 displaces into the second liquid
20 path 4, thereby reducing the volume thereof and also reducing the refilling amount of the bubble generating liquid, whereby the refilling is completed promptly. Also, as the corner parts 8a of the recessed portion 8 have a function of suppressing the rebounding movement
25 immediately after the displacement by bubble generation, the recessed portion 8 immediately returns to the initial state after displacement, thereby

enabling high-speed drive.

Figs. 22A to 22F are magnified cross-sectional views, along a line 22A to 22F - 22A to 22F in Fig. 1A, of the recessed portion of the movable separating
5 membrane in another embodiment, and show states respectively corresponding to those shown in Figs. 1A to 1F.

As shown in Fig. 22A, the distance between the corner parts is represented by $W1$, that between the
10 inflection parts by $W3$, the width of the bottom part by $W2$ and that of the heat generating member by WH . If WH is larger than $W1$, the pressure by bubble generation cannot be efficiently transmitted to the movable separating membrane, so that an unnecessarily large
15 pressure is required for deforming the recessed portion. On the other hand, if WH is smaller than $W2$, the pressure by bubble generation cannot be sufficiently transmitted to the entire bottom part of the recessed portion. Consequently, the recessed
20 portion is desirable so designed as to satisfy a relation $W1 \geq WH \geq W2$ in order to improve the discharge efficiency.

The pressure by bubble generation can be more efficiently transmitted to the movable separating
25 membrane by satisfying a relation $W1 \geq W3 \geq WH$, more preferably $W1 \geq W3 \geq WH \geq W2$. The "inflection part" used in the present specification or in the appended drawings means a part, in the recessed portion of the

movable separating membrane, showing the largest deformation at the maximum displacement.

Figs. 23A to 23F are magnified cross-sectional views of the vicinity of the recessed portion of the movable separating membrane in still another embodiment of the liquid discharging head of the present invention. In this embodiment, as shown in Fig. 23A, the recessed portion 8 of the movable separating membrane 5 has an inflection part 8c between the corner part 8a and the bottom part 8b, with a thickness smaller in the inflection part 8c than in the bottom part 8b. Other configurations are same as those in the foregoing embodiment.

In an initial state shown in Fig. 23A, the liquid in the first liquid path 3 is retracted to the vicinity of the discharge opening 1 by the capillary force. In the present embodiment, the discharge opening 1 is provided at the downstream position, in the liquid flow direction in the first liquid path 3, with respect to the projected area of the heat generating member 2 onto the first liquid path 3.

When thermal energy is given to the heat generating member 2 (consisting of a heat-generating resistance member of $40 \times 105 \mu\text{m}$ in the present embodiment) in this state, the heat generating member 2 is rapidly heated whereby the surface thereof in contact with the second liquid in the bubble generating

- 58 -

area heats the liquid and generates a bubble therein (Fig. 23B). A bubble 6 thus formed is based on a film boiling phenomenon as described in the U.S. Patent No. 4,723,129 and is generated with an extremely high
5 pressure over the entire area of the heat generating member. The generated pressure is transmitted as a pressure wave in the second liquid in the second liquid path 4 and acts on the movable separating membrane 5, whereby the recessed portion 8 of the movable
10 separating membrane 5 deforms starting from the thinner inflection parts 8c to initiate the discharge of the first liquid in the first liquid path 3. However the corner parts 8a formed at the fulcrums of the recessed portion 8 are not involved in such deformation.

15 The bubble 6 generated on the entire surface of the heat generating member 2 rapidly grows to assume a film shape (Fig. 23C). The expansion of the bubble 6 with an extremely high pressure in the initial stage of generation causes a further deformation of the recessed
20 portion 8 of the movable separating membrane 5, whereby the first liquid in the first liquid path 3 is further discharged from the discharge opening 1.

With the further growth of the bubble 6 thereafter, the deformation proceeds to such a level
25 that the entire recessed portion 8, excluding the vicinity of the corner parts 8a of the membrane 5, enters the first liquid path 3 (Fig. 23D). Since the

displacement of the recessed portion 8 from the initial state to the maximum displacement explained above is facilitated by the thinner inflection parts 8c of the recessed portion 8, the pressure by bubble generation
5 can be efficiently transmitted toward the discharge opening, thereby improving the discharge efficiency.

When the bubble 6 starts to contract thereafter, the recessed portion 8 of the movable separating membrane 5 starts to return to the position before
10 deformation (Fig. 23E).

Subsequently, the recessed portion 8 of the movable separating membrane 5 promptly returns to the initial state shown in Fig. 23F by the self returning force exerted by the non-deformed corner parts 8a,
15 whereby the liquid refilling in the first liquid path 3 is accelerated. Also, with the extinction of the bubble, the recessed portion 8 of the movable separating membrane 5 displaces into the second liquid path 4, thereby reducing the volume thereof and also
20 reducing the refilling amount of the bubble generating liquid, whereby the refilling is completed promptly. Also, as the corner parts 8a of the recessed portion 8 have a function of suppressing the rebounding movement immediately after the displacement by bubble
25 generation, the recessed portion 8 immediately returns to the initial state after displacement, thereby enabling high-speed drive.

Figs. 24A to 24F are magnified cross-sectional views, seen from the side of the discharge opening in Figs. 12A to 12F, of the recessed portion of the movable separating membrane in another embodiment, and show states respectively corresponding to those shown in Figs. 12A to 12F. As shown in Fig. 24A, the distance between the corner parts is represented by $W1$, that between the inflection parts by $W3$, the width of the bottom part by $W2$ and that of the heat generating member by WH . If WH is larger than $W3$, the pressure by bubble generation cannot be efficiently transmitted to the movable separating membrane, so that an unnecessarily large pressure is required for deforming the recessed portion. On the other hand, if WH is smaller than $W2$, the pressure by bubble generation cannot be sufficiently transmitted to the entire bottom part of the recessed portion. Consequently, the recessed portion is desirable so designed as to satisfy a relation $W1 \geq WH \geq W2$ in order to improve the discharge efficiency, in addition to the aforementioned effect of forming thinner inflection parts. The pressure by bubble generation can be more efficiently transmitted to the movable separating membrane by satisfying a relation $W1 \geq W3 \geq WH$, more preferably $W1 \geq W3 \geq WH \geq W2$.

Figs. 25A to 25D show the positional relationship between the heat generating member and the movable

separating membrane in another embodiment, wherein
Fig. 25A is a magnified cross-sectional view of the
liquid discharging head along the liquid path thereof;
Fig. 25B is a plan view of the heat generating member;
5 Fig. 25C is a plan view of the movable separating
membrane; and Fig. 25D is a plan view showing the heat
generating member and the movable separating membrane
in superposed state. As shown in Fig. 25A, the area
defined by connecting the corner parts 8a, in the
10 projection of the recessed portion toward the heat
generating member, is taken as S1, the area of the
bottom part 8b of the recessed portion is taken as S2,
the area defined by connecting the inflection parts of
the recessed portion is taken as S3, and the area of
15 the heat generating member 2 is taken as SH. If SH is
larger than S1, the pressure by bubble generation
cannot be efficiently transmitted to the movable
separating membrane, so that an unnecessarily large
pressure is required for deforming the recessed
20 portion. On the other hand, if SH is smaller than S2,
the pressure by bubble generation cannot be
sufficiently transmitted to the entire bottom part of
the recessed portion. Consequently, the recessed
portion is desirable so designed as to satisfy a
25 relation $S1 \geq SH \geq S2$ in order to improve the discharge
efficiency. In the foregoing description, SH is the
area of the entire heat generating member, but is more

preferably an area showing effective film boiling (called effective bubble generating area) on the surface of the heat generating member 2.

The pressure by bubble generation can be more
5 efficiently transmitted to the movable separating membrane by satisfying a relation $S1 \geq S3 \geq SH$, more preferably $S1 \geq S3 \geq SH \geq S2$. The "inflection part" used in the present specification or in the appended drawings means a part, in the recessed portion of the
10 movable separating membrane, showing the largest deformation at the maximum displacement.

Figs. 26A to 26D show the positional relationship between the heat generating member and the movable separating membrane in another embodiment, wherein Fig.
15 26A is a magnified cross-sectional view of the liquid discharging head along the liquid path thereof; Fig. 26B is a plan view of the heat generating member; Fig. 26C is a plan view of the movable separating membrane; and Fig. 26D is a plan view showing the heat generating
20 member and the movable separating membrane in superposed state. As shown in Fig. 26A, the area defined by connecting the corner parts 8a, in the projection of the recessed portion toward the heat generating member, is taken as S1, the area of the
25 bottom part 8b of the recessed portion is taken as S2, the area defined by connecting the inflection parts of the recessed portion is taken as S3, and the area of

the heat generating member 2 is taken as SH. If SH is larger than S1, the pressure by bubble generation cannot be efficiently transmitted to the movable separating membrane, so that an unnecessarily large pressure is required for deforming the recessed portion. On the other hand, if SH is smaller than S2, the pressure by bubble generation cannot be sufficiently transmitted to the entire bottom part of the recessed portion. Consequently, the recessed portion is desirable so designed as to satisfy a relation $S1 \geq SH \geq S2$ in order to improve the discharge efficiency, in addition to the aforementioned effect of forming thinner inflection parts. The pressure by bubble generation can be more efficiently transmitted to the movable separating membrane by satisfying a relation $S1 \geq S3 \geq SH$, more preferably $S1 \geq S3 \geq SH \geq S2$. In the foregoing description, SH is the area of the entire heat generating member, but is more preferably an area showing effective film boiling (called effective bubble generating area) on the surface of the heat generating member 2.

Figs. 27A to 27F are cross-sectional views showing another embodiment of the liquid discharging head of the present invention. The present embodiment is same in the basic working principle as the embodiment shown in Figs. 1A to 3, but is different in that guide paths 9, 10 for enabling liquid flow are provided at the

- 64 -

upstream and downstream sides of the bubble generating area 7.

Fig. 27A shows a state of bringing the bubble generating liquid in the bubble generating area to an initial stable state by moving the bubble remaining in the liquid path and constituting a cause of instability and the extremely heated liquid by means of forced flow means to be explained later, prior to the bubble generating step by the heat generating member 2, in order to achieve stable bubble generation. The bubble generating liquid, supplied from the guide path 9, is discharged from the guide path 10 through the bubble generating area 7 so that the bubble generating area 7 can be brought to the initial stable state at any time. Therefore, stable discharge can be attained by such initializing operation after a prolonged pause or after heat accumulation or bubble generation by a high-duty drive.

Figs. 27B to 27F show steps of generation and extinction of the bubble 6 in the bubble generating area 7 by the heat generating member 2. In these states, when energy is given to the heat generating member 2 it heats the second liquid (bubble generating liquid) to generate a bubble therein (Fig. 27B). The pressure generated by bubble generation is transmitted as a pressure wave in the second liquid (bubble generating liquid) in the second liquid path 4 and acts

- 65 -

on the movable separating membrane 5, whereby the recessed portion 8 of the movable separating membrane 5 deforms to initiate the discharge of the first liquid (discharge liquid) in the first liquid path 3.

5 The bubble 6 rapidly grows to assume a film shape (Fig. 27C). The expansion of the bubble 6 with an extremely high pressure in the initial state of generation causes a further deformation of the recessed portion 8 of the movable separating membrane 5, whereby
10 the first liquid (discharge liquid) in the first liquid path 3 is further discharged from the discharge opening 1. With the further growth of the bubble 6 thereafter, the deformation process to such a level that the entire recessed portion 8, excluding the vicinity of the
15 corner parts 8a of the membrane 5, enters the first liquid path 3 (Fig. 27D).

 When the bubble 6 starts to contract thereafter, the recessed portion 8 of the movable separating membrane 5 starts to return to the position before
20 deformation (Fig. 27E). Subsequently, the recessed portion 8 of the movable separating membrane 5 promptly returns to the initial state shown in Fig. 27F by the self returning force exerted by the non-deformed corner parts 8a, whereby the liquid refilling in the first
25 liquid path 3 is accelerated. Also, with the extinction of the bubble, the recessed portion 8 of the movable separating membrane 5 displaces into the second

liquid path 4, thereby reducing the volume thereof and also reducing the refilling amount of the bubble generating liquid, whereby the refilling is completed promptly.

5 The present embodiment can stabilize the discharge amount since the movable separating membrane 5 having the recessed portion 8 is substantially free from elongation. It is particularly important, however, that the displacement volume of the movable separating
10 membrane 5 is small with respect to the maximum volume of the bubble 6, so that the discharge amount is stabilized with respect to the variation in the volume of the bubble. In the state shown in Fig. 27D, if the displacement volume of the movable separating membrane
15 5 is extremely different from the maximum volume of the bubble 6, the stress on the membrane 5 may become very high, detrimentally affecting the service life thereof. In the present embodiment, however, the guide paths 9,
20 10 are provided at the upstream and downstream sides of the bubble generating area 7 and are adapted to discharge the second liquid (bubble generating liquid) so as to absorb the excessive volume of the bubble 6, thereby realizing high stability and high durability. Also the durability problem of the membrane,
25 encountered in case the membrane displacement cannot follow the abrupt volumic change at the contraction of the bubble can be solved by the pressure adjusting and

relaxing function of these guide paths, whereby high stability and high durability can be realized. In particular, the present embodiment realizes highly stable discharge, because the guide paths are balanced at the upstream and downstream sides to enable well balanced displacement of the movable separating membrane 5.

Also in the present embodiment, liquid path resistances 11, 12 are provided at the junctions with the guide paths 9, 10 in order to prevent unnecessary dissipation of the pressure of the bubble generating area 7 into the guide paths 9, 10.

Figs. 28A to 28D show still another embodiment, in which the liquid path resistances, provided as in the foregoing embodiment, are made mutually different at the upstream and downstream sides. Fig. 28D is a cross-sectional view showing a state of bubble generation in the configuration shown in Fig. 28A.

In Fig. 28A, the liquid path resistances 13, 14 are so formed as to facilitate the liquid flow in the downstream direction but to hinder it in the upstream direction. Consequently, at the generation of the bubble 6 by the heat generating member 2, the bubble 6 grows at the upstream side in such a direction as to push up the movable separating membrane 5 but at the downstream side toward the downstream guide path 10, whereby the movable separating membrane 5 shows a

larger displacement at the upstream side (Fig. 28D).
As a result, there is generated a flow of the discharge
liquid (first liquid) from the upstream side to the
downstream side, thereby improving the refilling
5 efficiency for the discharge (first) liquid. The
configurations shown in Figs. 28B and 28C can also
improve the discharge characteristics by
differentiating the balance of the liquid path
resistances 15, 16, 17, 18.

10 Figs. 29 and 30 are longitudinal cross-sectional
views of other embodiments of the liquid discharging
head of the present invention. As shown in these
drawings, there are provided a second liquid path 20
including holes provided in the element substrate 19, a
15 movable separating membrane 5 constituting a partition
wall, and a grooved member 21 provided with a groove
constituting the first liquid path 3. The holes in the
substrate 19 can be formed for example by sand blasting
or etching. The holes in the substrate, formed at the
20 upstream and downstream sides of the bubble generating
area 7, are used as guide paths 22, 23 for enabling the
flow of the bubble generating liquid.

Figs. 29 and 30 are longitudinal cross-sectional
views showing an embodiment of the liquid discharging
25 head utilizing holes in the element substrate. In this
embodiment, the guide paths 22, 23 are connected to a
second liquid path 20, provided in a base plate 24 on

which the element substrate 19 is adhered. The bubble
generating liquid can be circulated or made to flow by
forced flow means, such as a pump (not shown),
connected to the second liquid path 20. On the other
5 hand, the first liquid is supplied by the first liquid
path 3, positioned opposite to the guide paths 22, 23
and separated by the movable separating membrane 5.
Consequently the entire configuration is simple and
highly reliable in preventing the mutual mixing of the
10 liquids. Also the pressure from the liquid paths 22,
23 can be accommodated since the cross section of the
liquid paths can be selected sufficiently large.

Fig. 31 is a schematic lateral cross-sectional
view showing another embodiment of the liquid
15 discharging head of the present invention. In this
embodiment, the second liquid path in the head is
constructed as a circulating structure including a pump
25 serving as forced flow means. In this embodiment, a
bubble reservoir 27 is provided at the upstream side of
20 the second liquid path 26 for eliminating a bubble etc.
eventually contained in the second liquid (bubble
generating liquid), thereby stabilizing the bubble
generation and the liquid discharge.

Fig. 32A is a schematic view showing another
25 embodiment of the liquid discharging head of the
present invention, and Fig. 32B is a magnified view
thereof. In this embodiment, second liquid paths 28

- 70 -

provided on an element substrate 31 are divided in the unit of 10 nozzles, whereby the second liquid (bubble generating liquid) can be made to flow with a uniform flow rate at the center and at the ends of the head.

5 In order that the liquid in the second liquid paths 28 has a uniform flow rate over the nozzles, the liquid path resistance R1 from a supply inlet (guide path 29) to the entrance of each nozzle and the liquid path resistance R2 at the entrance are so selected that

10 $R1 + R2$ is constant in each nozzle. Fig. 32C shows an embodiment in which an exit (guide path 30) is provided for every two heat generating members 2 and two second liquid paths 32. There is thus realized a head showing uniform liquid path resistance to each nozzle and

15 little fluctuation in the characteristics between the nozzles.

Fig. 33 is a schematic perspective view showing the principal parts of an ink jet recording apparatus, constituting the liquid discharging apparatus in which

20 the liquid discharging head is mounted.

Referring to Fig. 33, there is shown an ink jet head cartridge 601 in which the liquid discharging head of the aforementioned configuration and an ink tank are integrated or the ink tank is made detachable.

25 The head cartridge 601 is mounted on a carriage 607, engaging with a spiral groove 606 of a lead screw 605, which is rotated through transmission gears 603, 604 by

- 71 -

the forward or reverse rotation of a driving motor 602, and the cartridge is reciprocated, together with the carriage 607 in directions a and b, along a guide member 608 and by the rotation of the motor 602.

5 A printing sheet P, fed by an unrepresented feeding device on a platen roller 609, is pressed thereto by a pressure plate 610 along the moving direction of the carriage.

10 In the vicinity of an end of the lead screw 605, there are provided photocouplers 611, 612 constituting home position detection means, which detects the presence of a lever 607a of the carriage 607 for switching, for example, the driving direction of the motor 602.

15 There are also shown a support member 613 for supporting a cap member 614 for covering the front face, having the discharge openings, of the aforementioned liquid discharge head; ink suction means 615 for sucking ink, which remains in the cap member 20 614 by idle discharge from the head 601 and for executing suction recovery of the head 601 through an aperture in the cap member; a cleaning blade 617 and a moving member 618 for moving the blade 617 in a direction perpendicular to the moving direction of the 25 carrier 607, wherein the blade 617 and the moving member 618 are supported by a main body support member 619. The blade 617 is not limited to the

above-described configuration but may assume other known forms. There is also shown a lever 620 for starting the suction operation at the suction recovery. It is moved by the movement of a cam 621 engaging with
5 the carriage 607, whereby the driving force from the motor 602 is controlled by known transmission means such as a clutch.

A control unit for supplying signals to the heat generating members 202 in the head 601 and for
10 controlling various mechanisms is provided in the main body of the apparatus and is therefore not illustrated. The ink jet recording apparatus 600 of the above-described configuration executes recording on the printing sheet P, fed by the unrepresented feeding
15 device on the platen 609, by the reciprocating motion of the head 601 over the entire width of the sheet P.

Fig. 34 is a schematic perspective view showing the principal parts of another embodiment of the liquid discharging apparatus in which the liquid discharging
20 head is mounted. This embodiment will be explained by an ink discharging recording apparatus, utilizing ink as the discharge liquid. A carriage HC of the apparatus supports a head cartridge in which a liquid tank 90 containing ink and a liquid discharging head
25 unit 200 are detachably mounted, and executes reciprocating motion in the transversal direction of a recording medium 150 such as paper transported by

recording medium transporting means.

Unrepresented signal supply means supplies the liquid discharging means in the carriage with drive signals, in response to which the liquid discharging
5 head discharges the recording liquid to the recording medium.

The liquid discharging apparatus of this embodiment is further provided with a motor 111 for driving the recording medium transport means and the
10 carriage, gears 112, 113 for transmitting the power from the motor to the carriage, a carriage shaft 85 etc. There is also provided a circulating pump 114 for circulating the liquid by sending the liquid to the head and receiving the liquid therefrom, and is
15 connected, through tubes 115, to the aforementioned guide paths connected to the liquid path of the head. Such recording apparatus and the liquid discharging process executed therein provided satisfactory images by liquid discharge onto various recording media.

20

- 74 -

WHAT IS CLAIMED IS:

1. A liquid discharging head comprising:

5 a discharge liquid path communicating with a discharge opening for discharging a discharge liquid and adapted to flow said discharge liquid;

a bubble generating liquid path including a bubble generating area for bubble generation and adapted to flow a bubble generating liquid; and

10 a movable separating membrane adapted for mutually and substantially separating said discharge liquid path and said bubble generating liquid path and having a recess, in a position corresponding to said bubble generating area, deviated so as to narrow said bubble generating liquid path;

15 wherein said recess has substantially non-displacing corner portions located in the deviated region of said recess and is adapted to displace, excluding said corner portions, by a bubble generated in said bubble generating area.

20

2. A liquid discharging head according to claim 1, wherein the displacing portion of said recess is a central area of said recess, surrounded by said corner portions.

25 3. A liquid discharging head according to claim 1 or 2, wherein said bubble generating liquid path includes, corresponding to said bubble generating area, a heat generating member for generating heat for generating a bubble.

- 75 -

4. A liquid discharging head according to claim 3, wherein the bubble generated in said bubble generating area is caused by film boiling phenomenon.

5

5. A liquid discharging head according to claim 1 or 2, wherein said recess has inflection portions constituting fulcrums of displacement, and said movable separating membrane is made thinner at said inflection portions.

10

6. A liquid discharging head according to claim 1 or 2, wherein said recess has inflection portions constituting fulcrums of displacement, and the height h1 from said heat generating member to the bottom portion of said recess in
15 the still state thereof before bubble generation and the height h2 from the bottom portion of said recess to said inflection portions in the still state before bubble generation of said recess satisfy a relation:

$$h2 \geq h1.$$

20

7. A liquid discharging head according to claim 6, wherein h1 is within a range from 5 to 10 μ m.

8. A liquid discharging head according to claim 1 or 2,
25 wherein said recess has inflection portions constituting fulcrums of displacement, and the distance W1 between the corner portions of said recess seen from the side of said discharge opening, width W2 of the bottom portion of said recess and width WH of said heat generating member satisfy a
30 relation:

- 76 -

$$W1 \geq WH \geq W2.$$

9. A liquid discharging head according to claim 1 or 2,
wherein said recess has inflection portions constituting
5 fulcrums of displacement, and the distance W1 between the
corner portions of said recess seen from the side of said
discharge opening, distance W3 of the inflection portions of
said recess and width WH of said heat generating member
satisfy a relation:

10

$$W1 \geq W3 \geq WH.$$

10. A liquid discharging head according to claim 9, wherein
15 the width W2 of the bottom portion of said recess and width
WH of said heat generating member satisfy a relation:

$$WH \geq W2.$$

20 11. A liquid discharging head according to claim 1 or 2,
wherein said recess has inflection portions constituting
fulcrums of displacement, and, in the projected areas toward
said heat generating member, the area S1 formed by
connecting the corner portions of said recess, area S2 of
25 the bottom portion of said recess and area SH of said heat
generating member satisfy a relation:

$$S1 \geq SH \geq S2.$$

30 12. A liquid discharging head according to claim 1 or 2,

- 77 -

wherein said recess has inflection portions constituting fulcrums of displacement, and, in the projected areas toward said heat generating member, the area S1 formed by connecting the corner portions of said recess, area S3
5 formed by connecting the inflection portions of said recess area SH of said heat generating member satisfy a relation:

$$S1 \geq S3 \geq SH.$$

13. A liquid discharging head according to claim 12, wherein
10 the area S2 of the bottom portion of said recess and area SH of said heat generating member satisfy a relation:

$$SH \geq S2.$$

15 14. A liquid discharging head according to any one of claims 11 to 13, wherein SH is the area of an effective bubble generating area of said heat generating member.

15. A liquid discharging head according to claim 1 or 2,
20 wherein the bubble generating liquid flows in said bubble generating liquid path and in a guide path provided in a substrate and communicating with said bubble generating liquid path.

25 16. A liquid discharging head according to claim 15, wherein the flow of the bubble generating liquid in said bubble generating liquid path and in said guide path is executed by forced flow means.

30 17. A liquid discharging head according to claim 15, wherein the bubble generating liquid paths are divided by said guide

- 78 -

paths into plural blocks, whereby the bubble generating liquid flows uniformly on said heat generating members.

18. A liquid discharging head according to claim 15, wherein
5 said bubble generating liquid path includes a bubble reservoir in a part thereof.

19. A liquid discharging head according to claim 1 or 2,
wherein the discharge liquid and the bubble generating
10 liquid are mutually same.

20. A liquid discharging head according to claim 1 or 2,
wherein the discharge liquid and the bubble generating
liquid are mutually different.

15

21. A liquid discharging head according to claim 20, wherein
the bubble generating liquid is superior to the discharge
liquid in at least one of the low viscosity, bubble
generating ability and thermal stability.

20

22. A liquid discharging apparatus comprising:

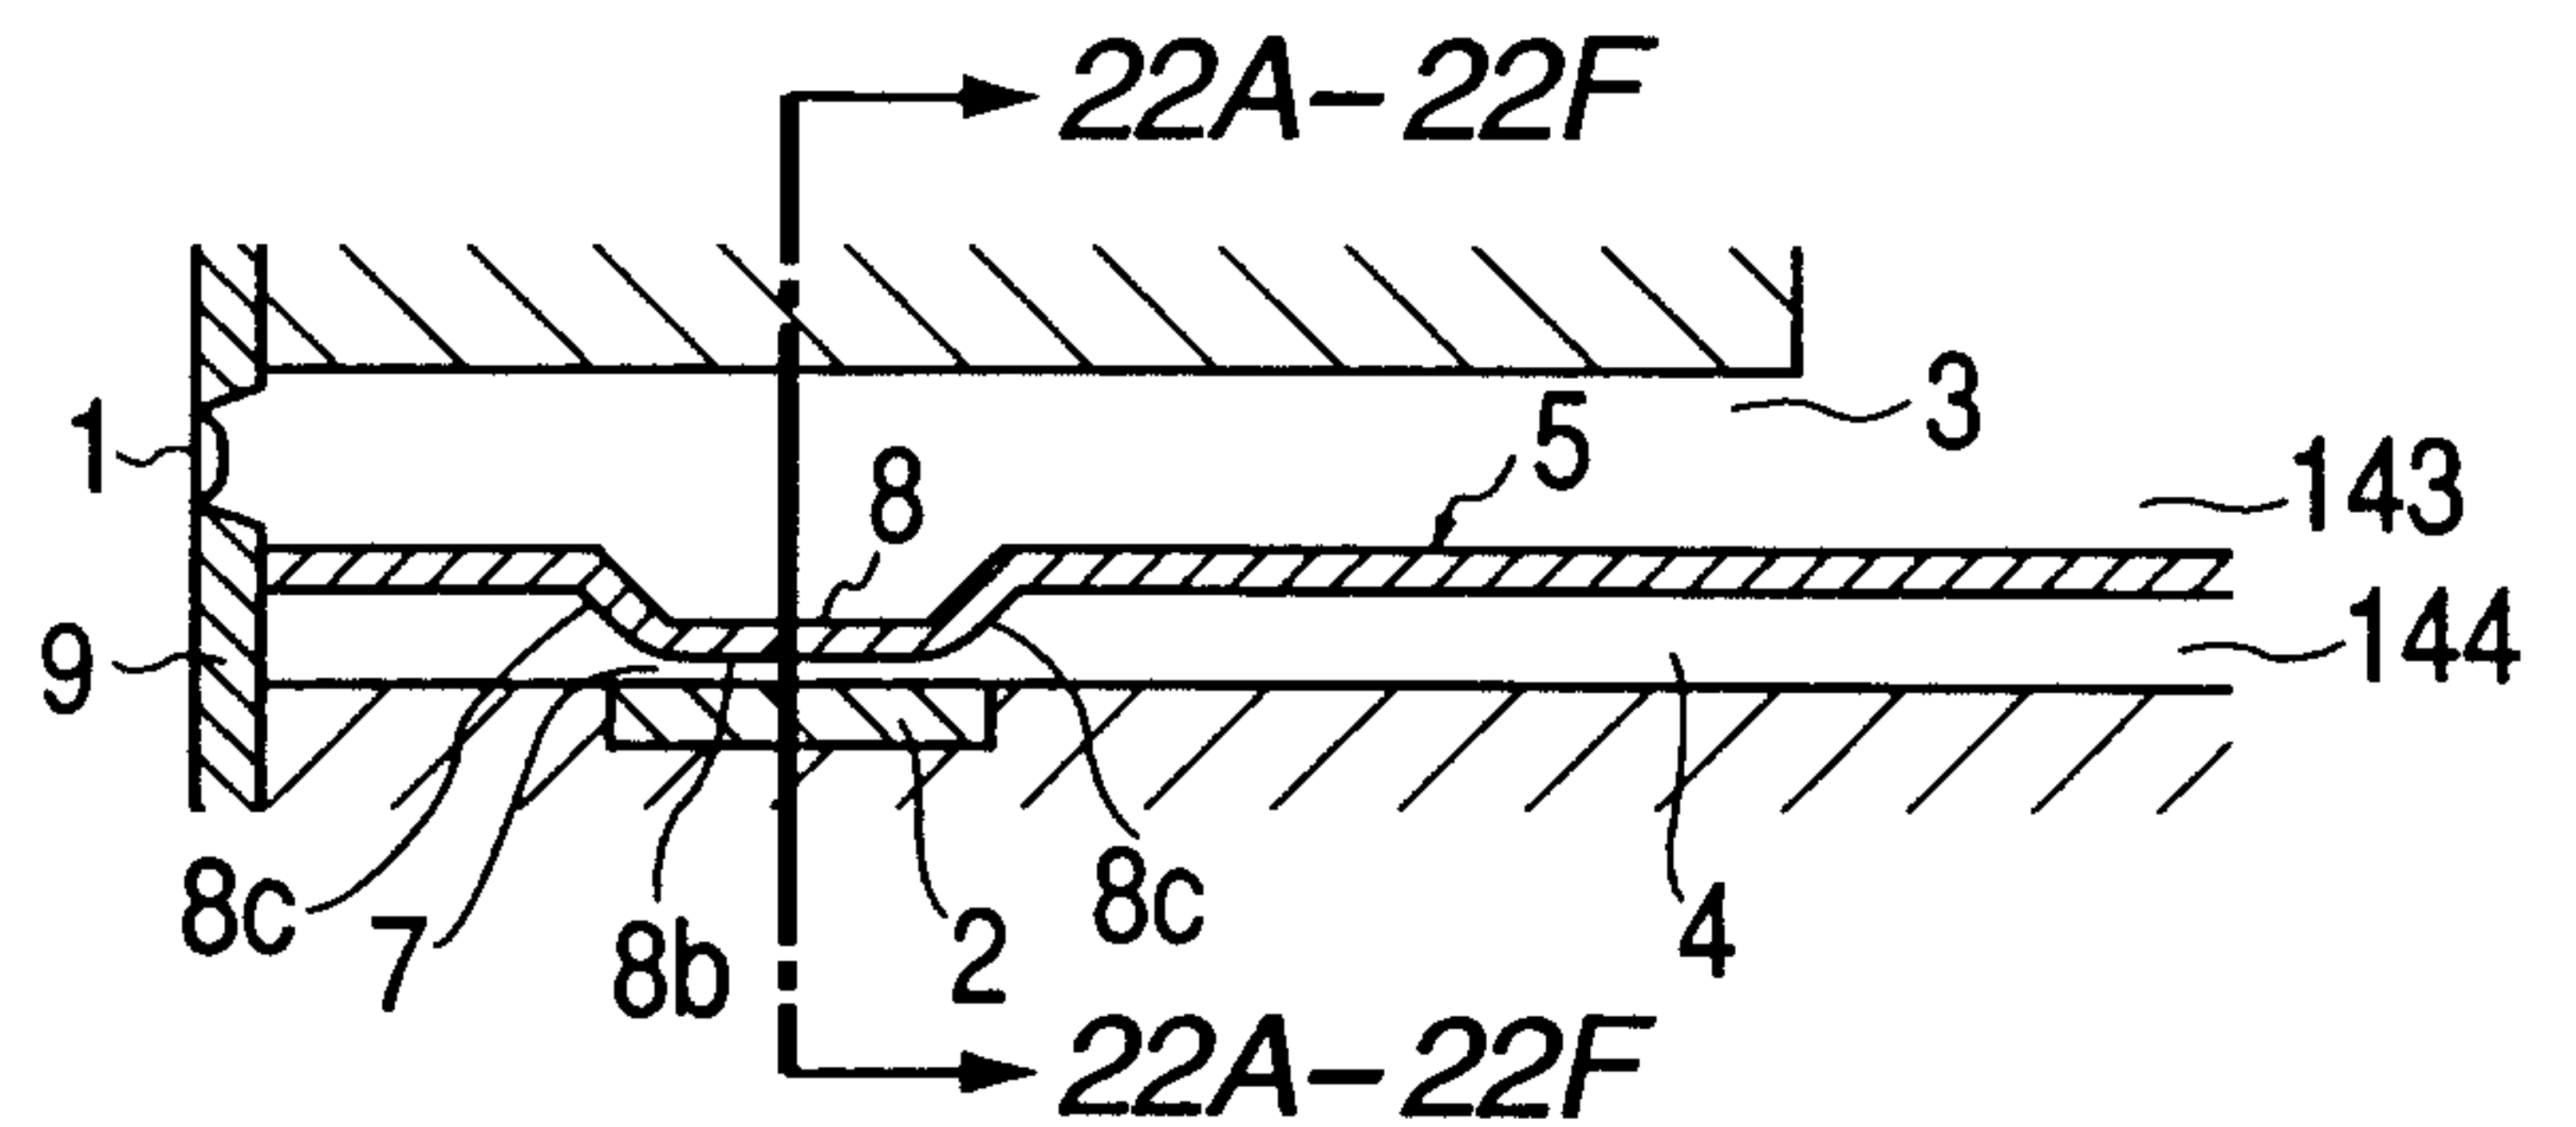
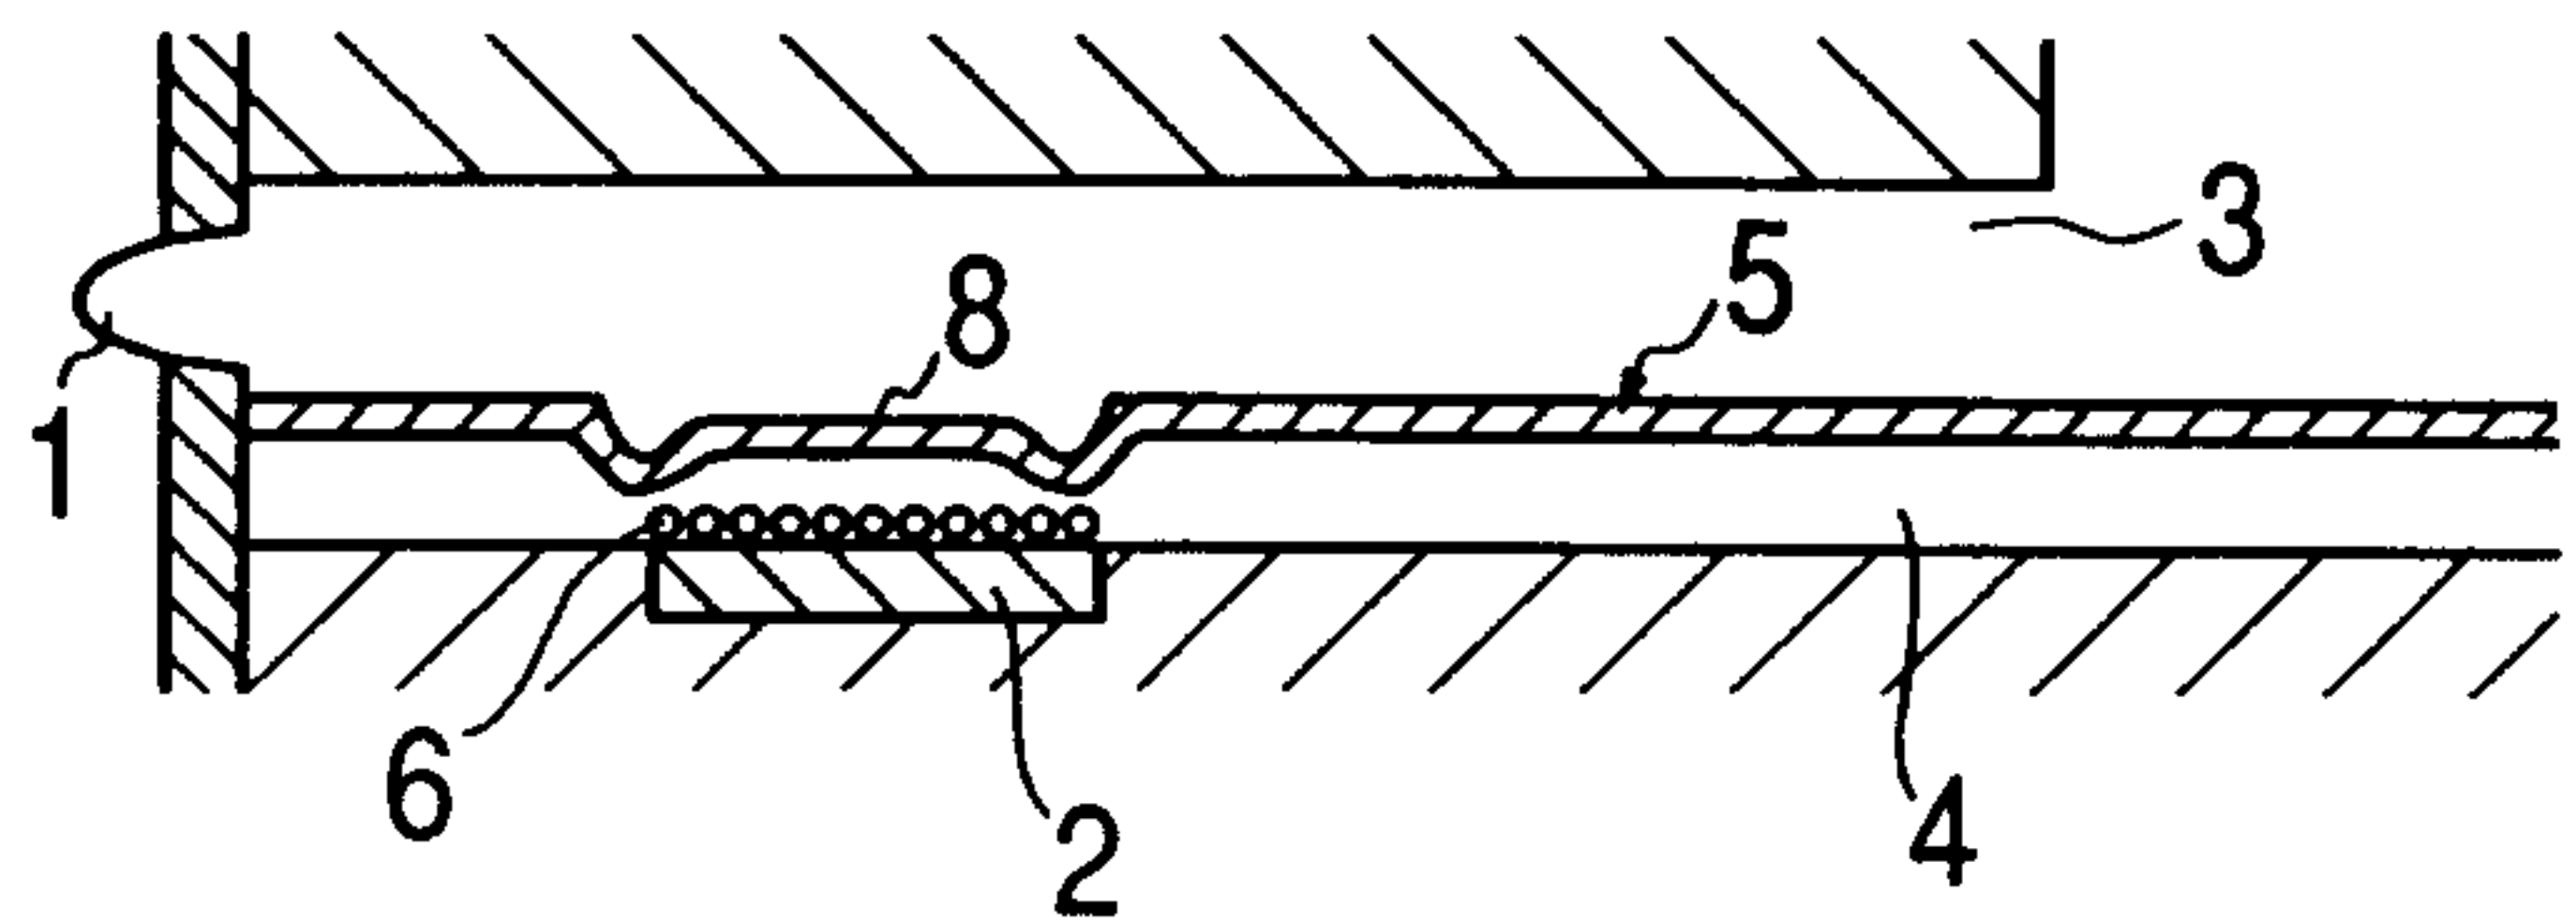
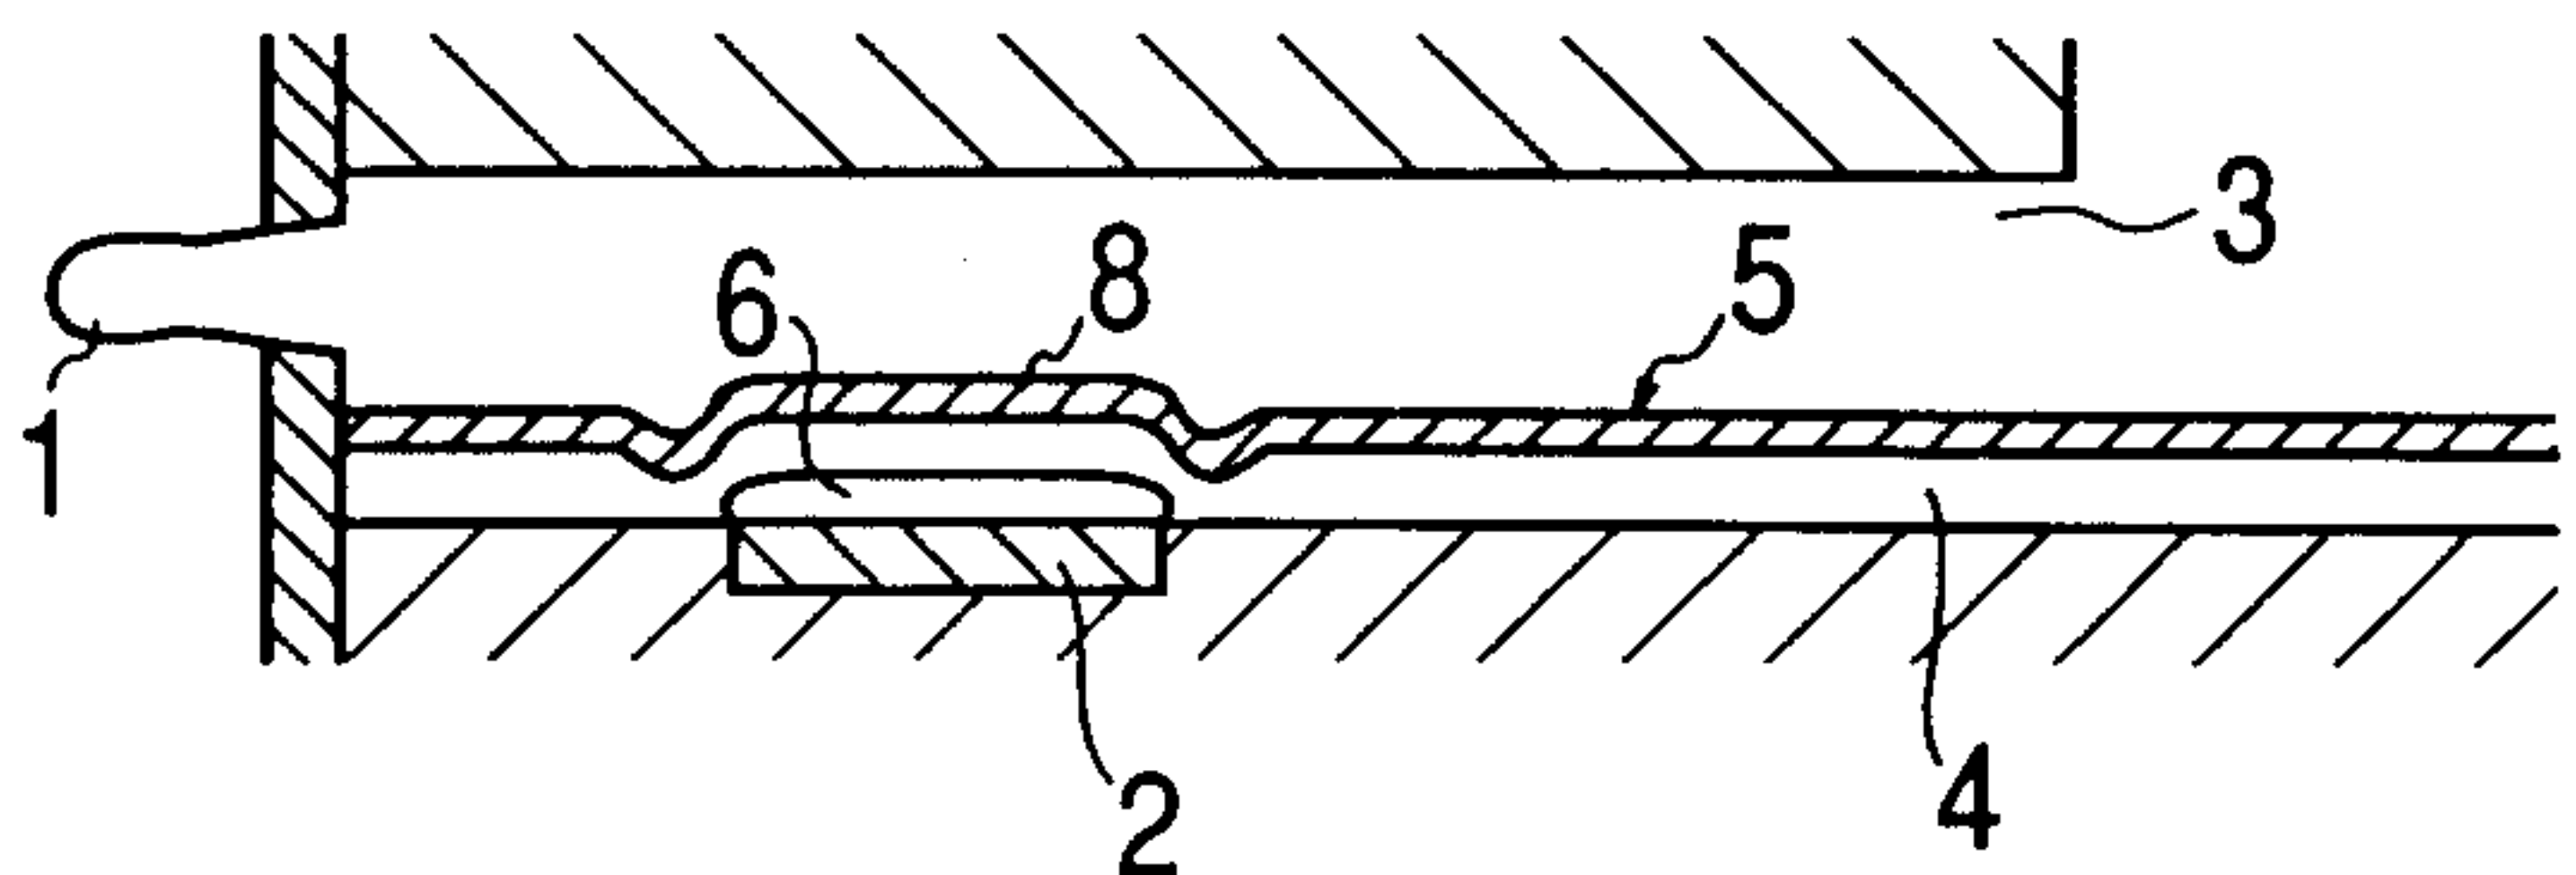
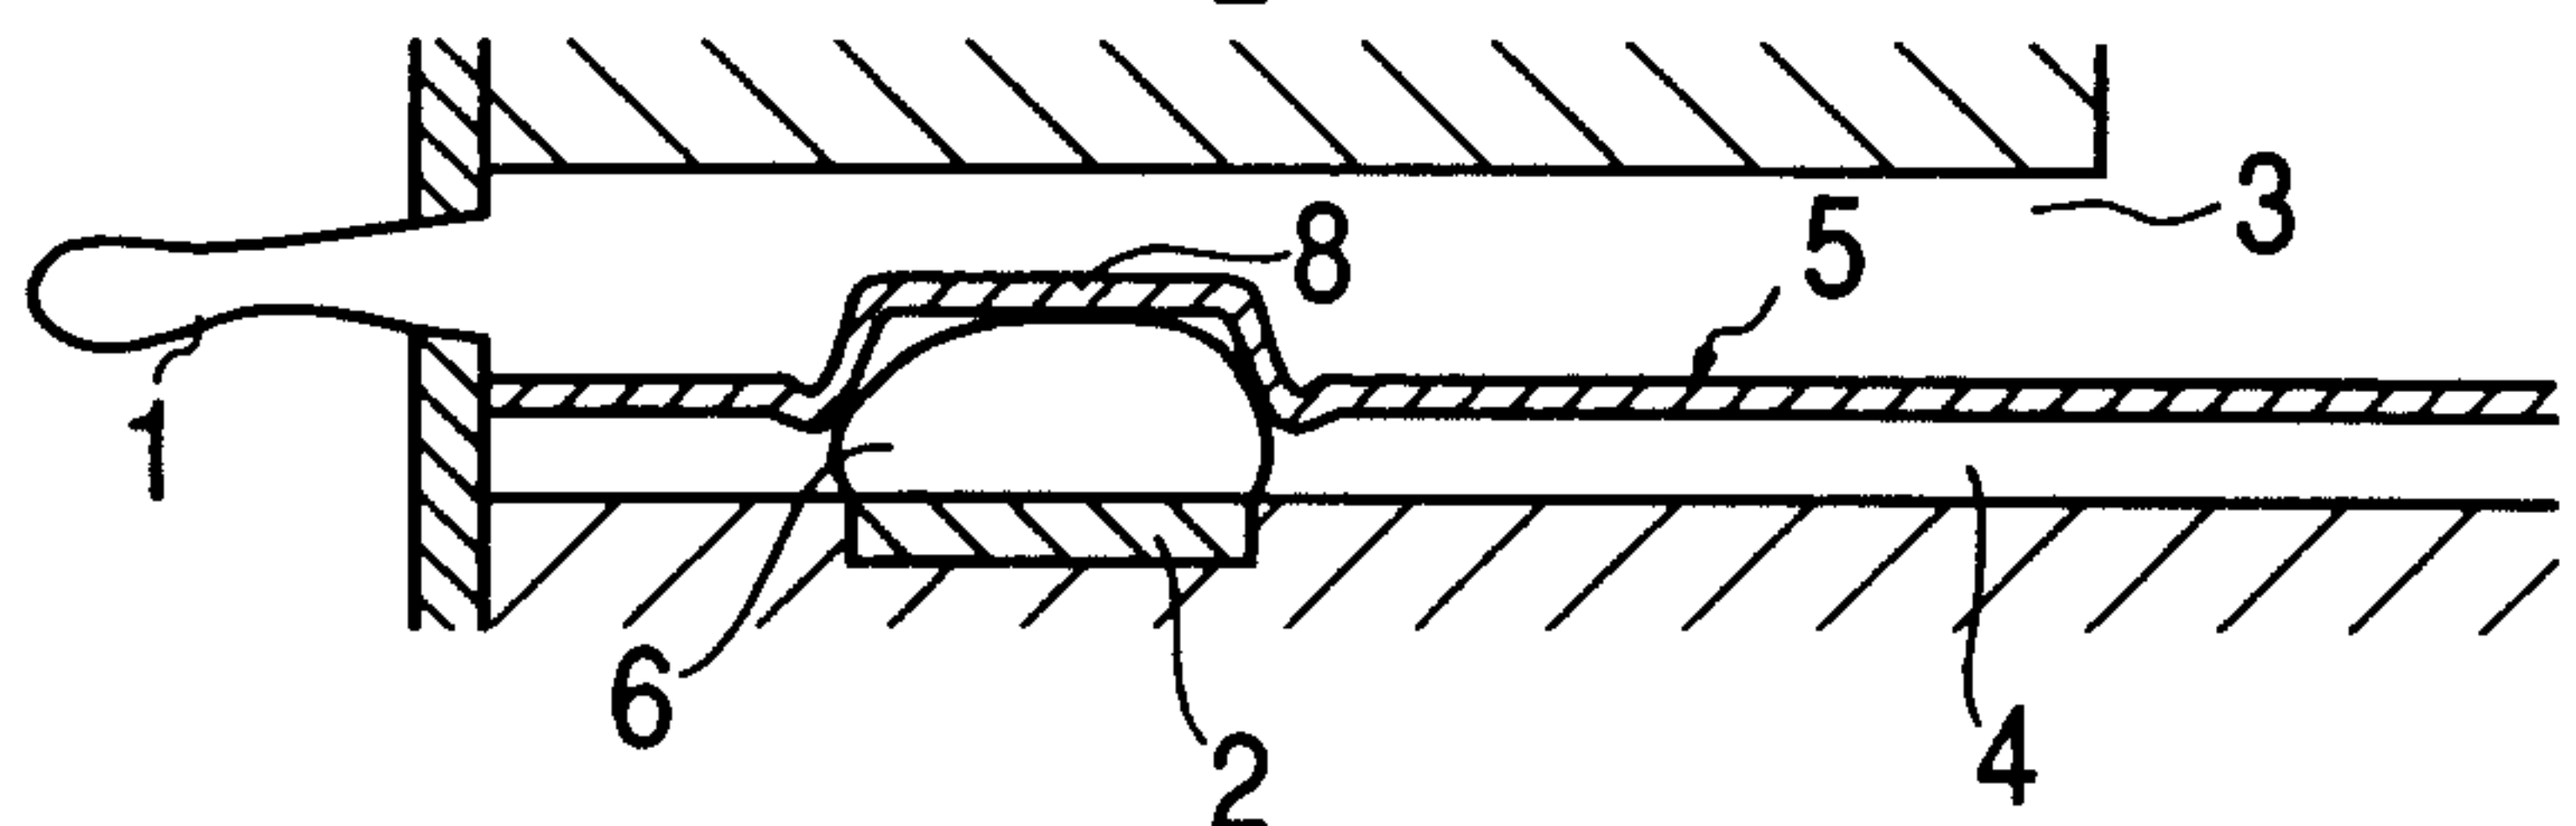
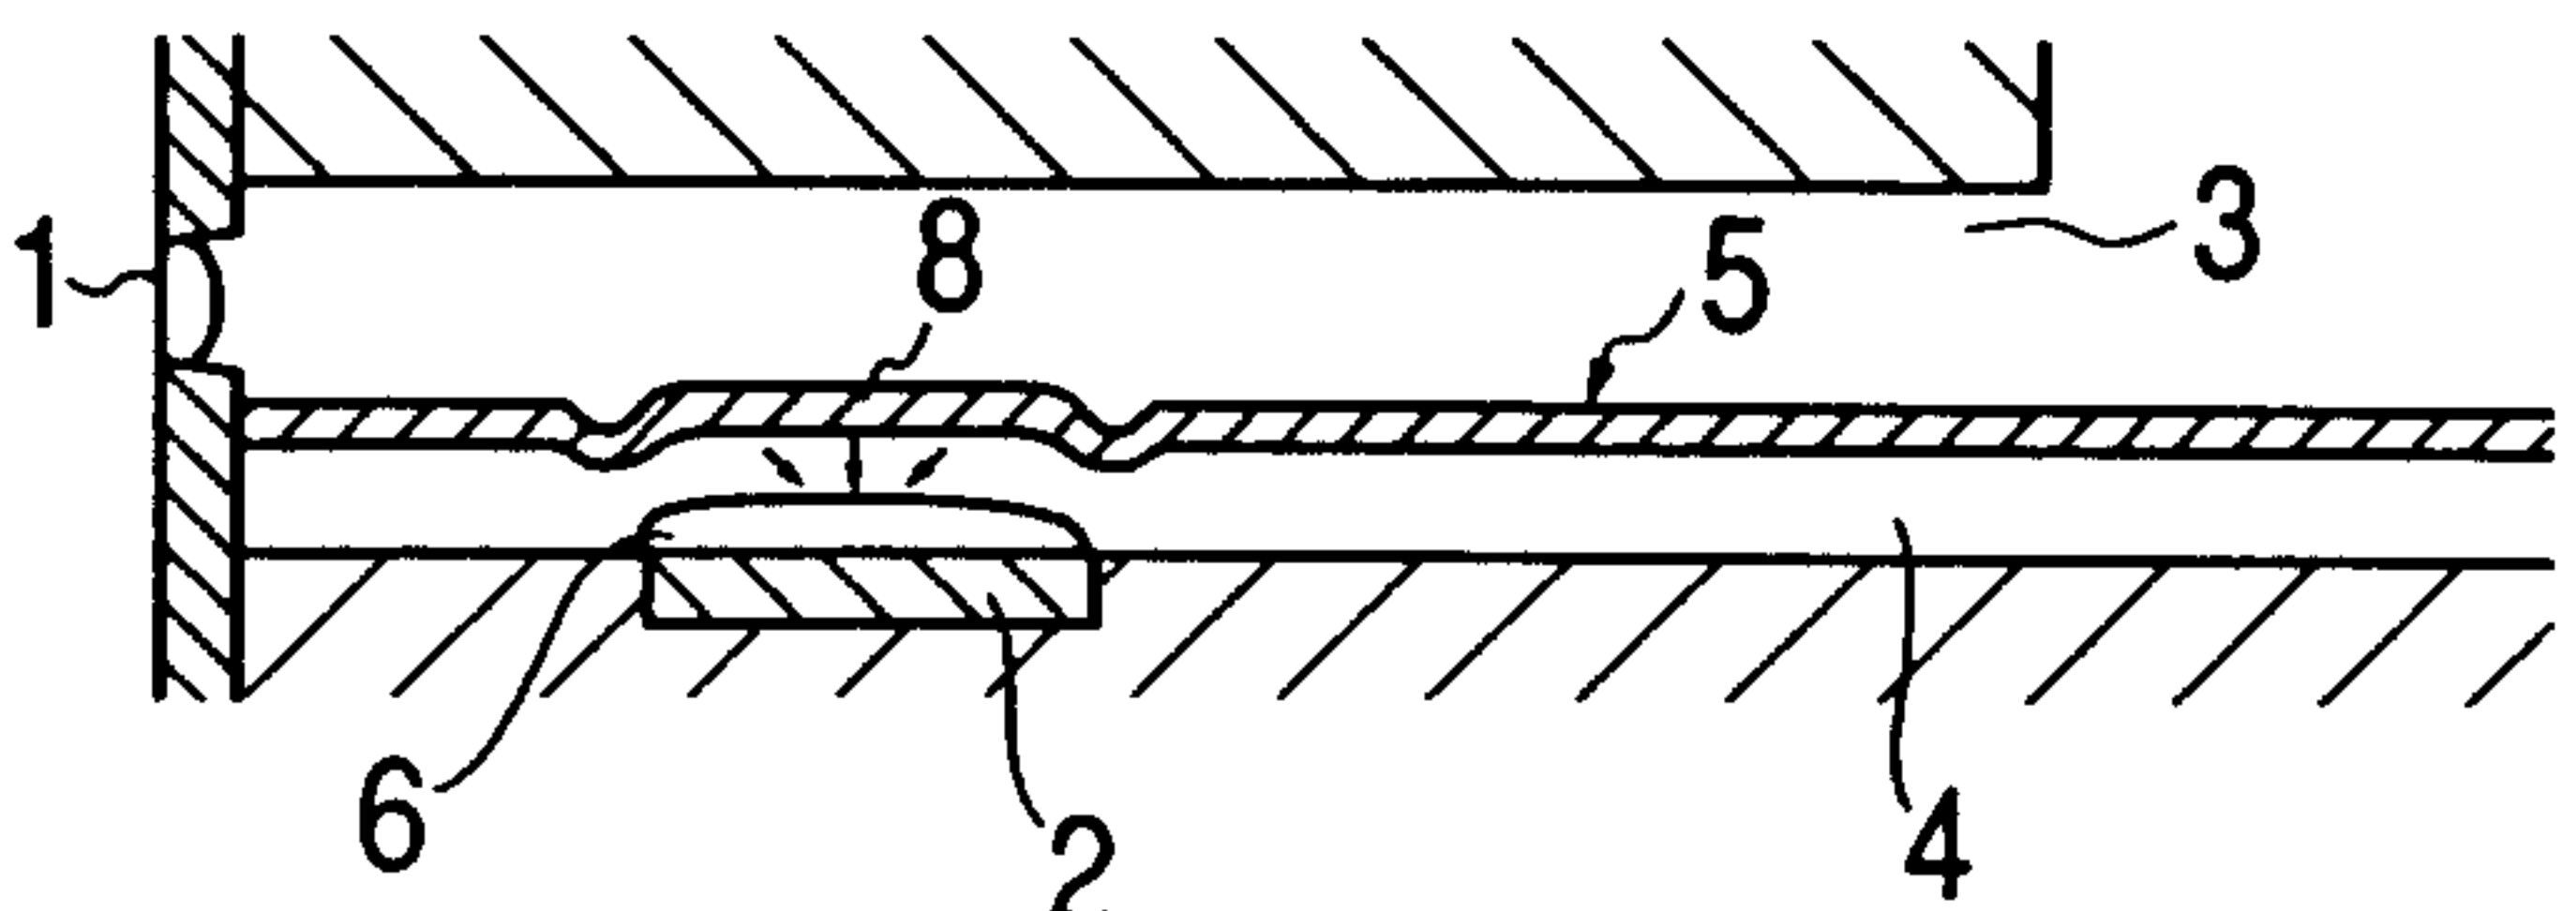
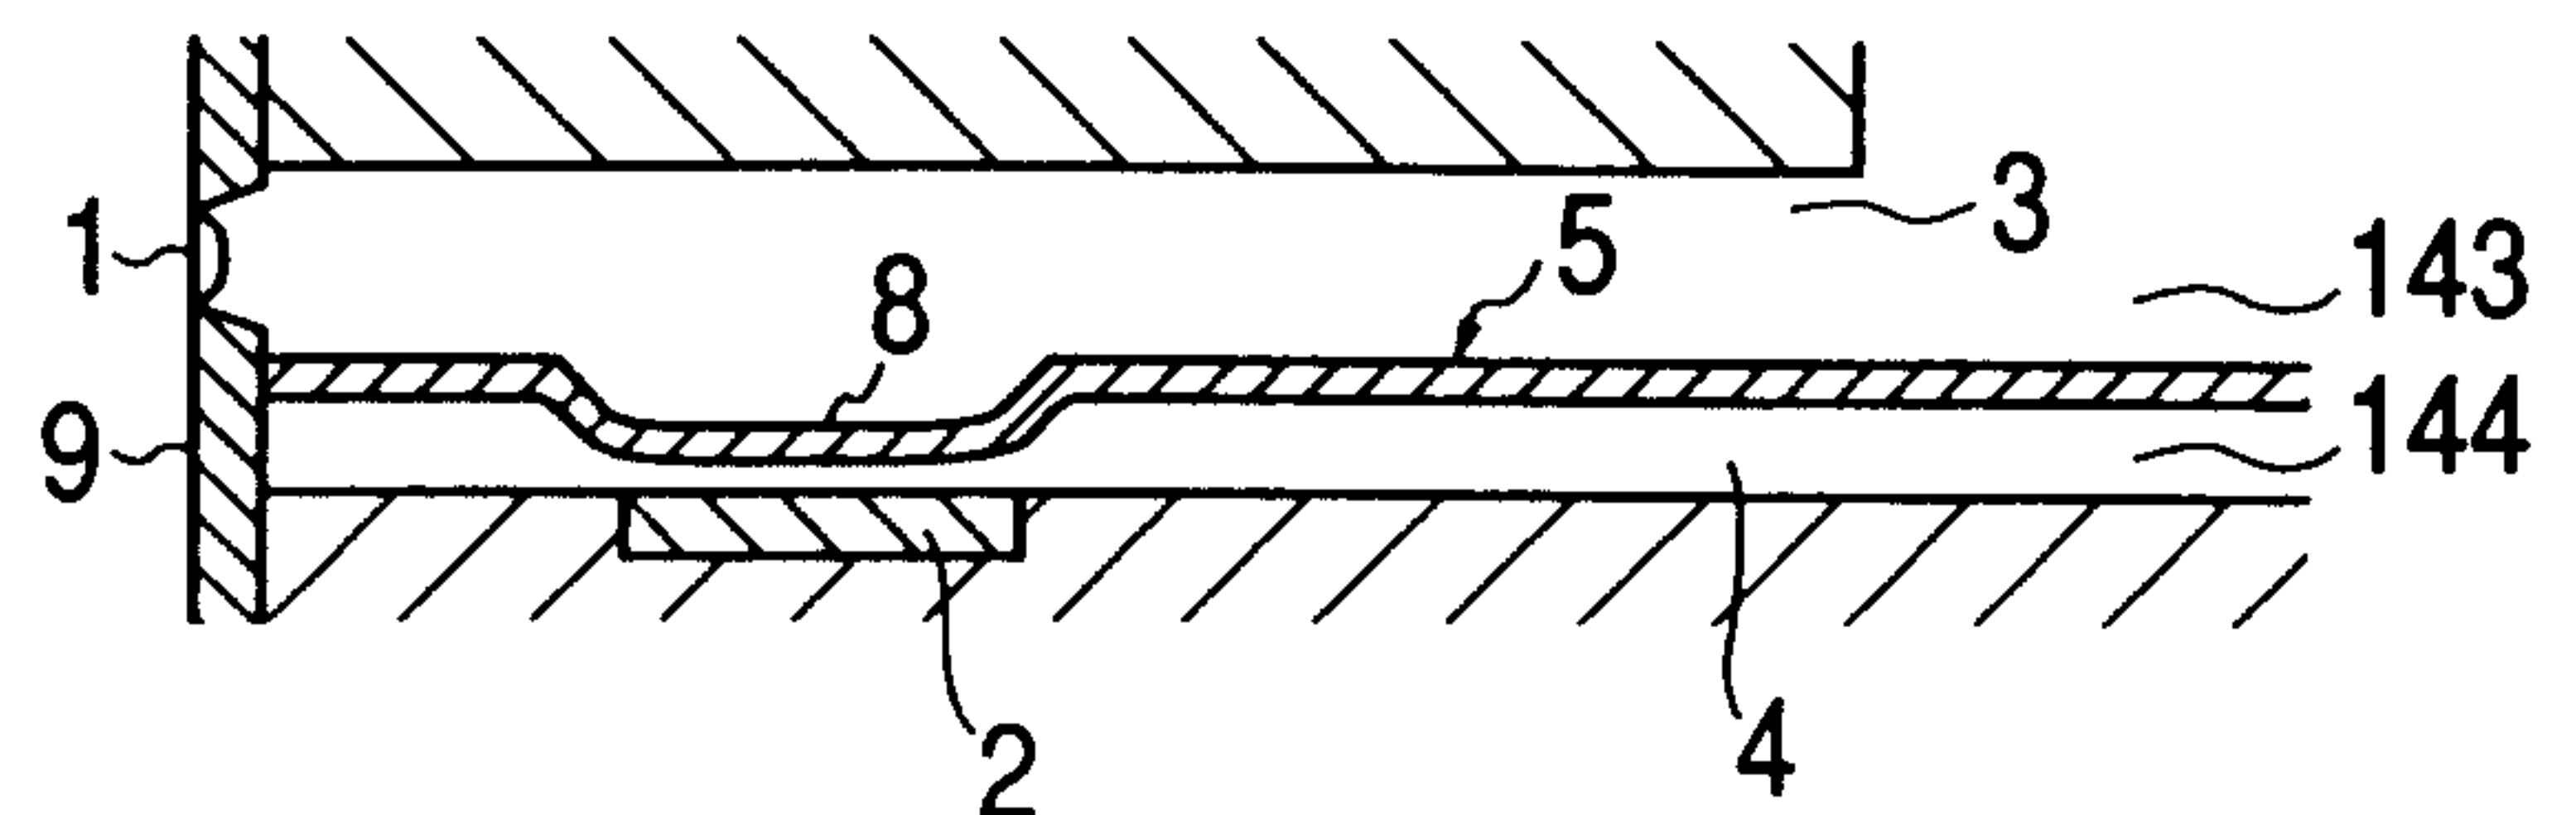
a liquid discharging head including a discharge liquid
path communicating with a discharge opening for discharging
a discharge liquid and adapted to flow said discharge
25 liquid; a bubble generating liquid path including a bubble
generating area for bubble generation and adapted to flow a
bubble generating liquid; and a movable separating membrane
adapted for mutually and substantially separating said
discharge liquid path and said bubble generating liquid path
30 and having a recess, in a position corresponding to said
bubble generating area, deviated so as to narrow said bubble

- 79 -

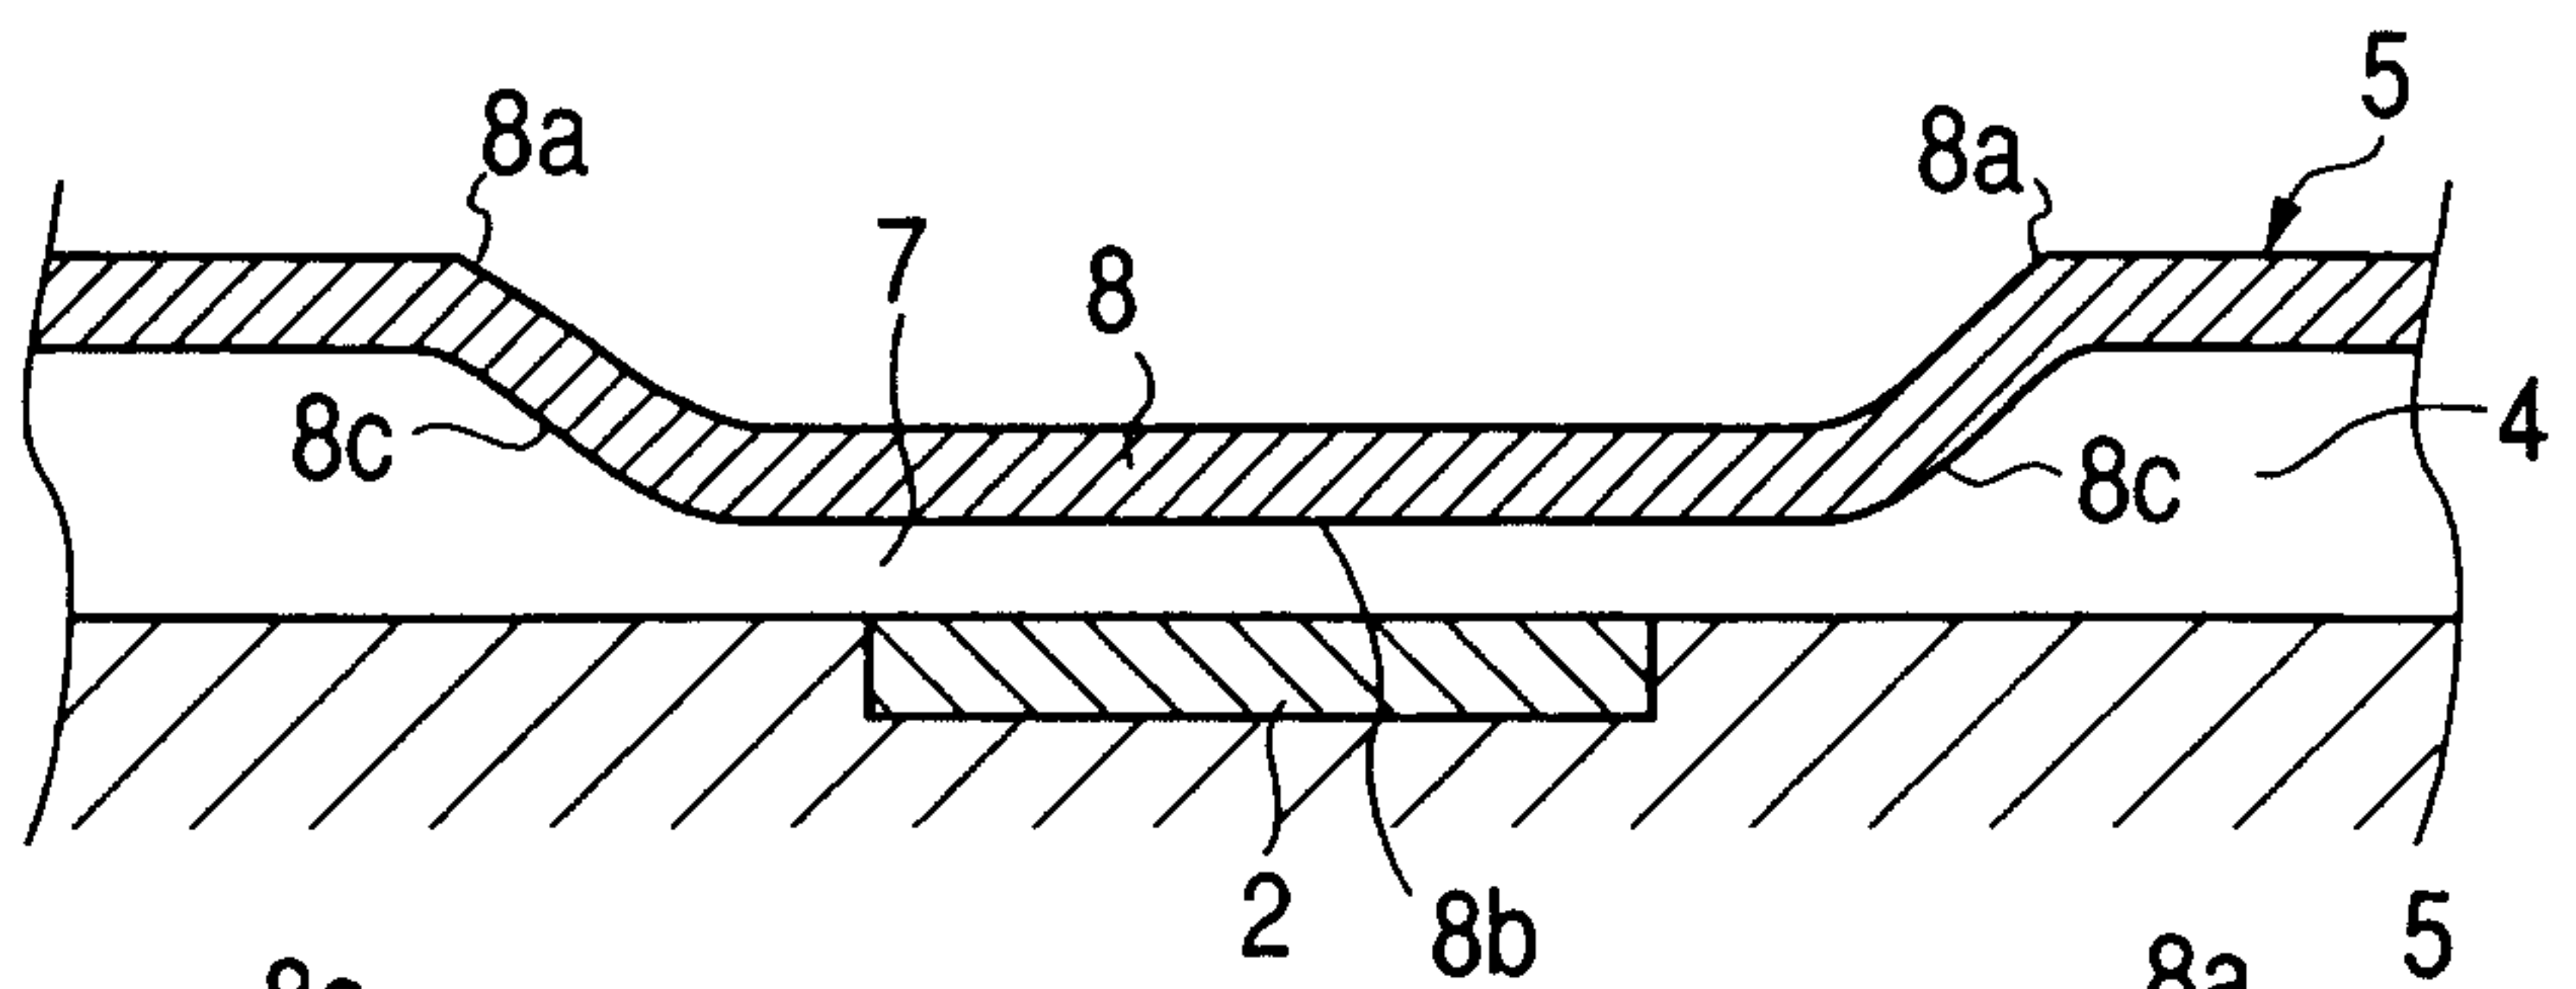
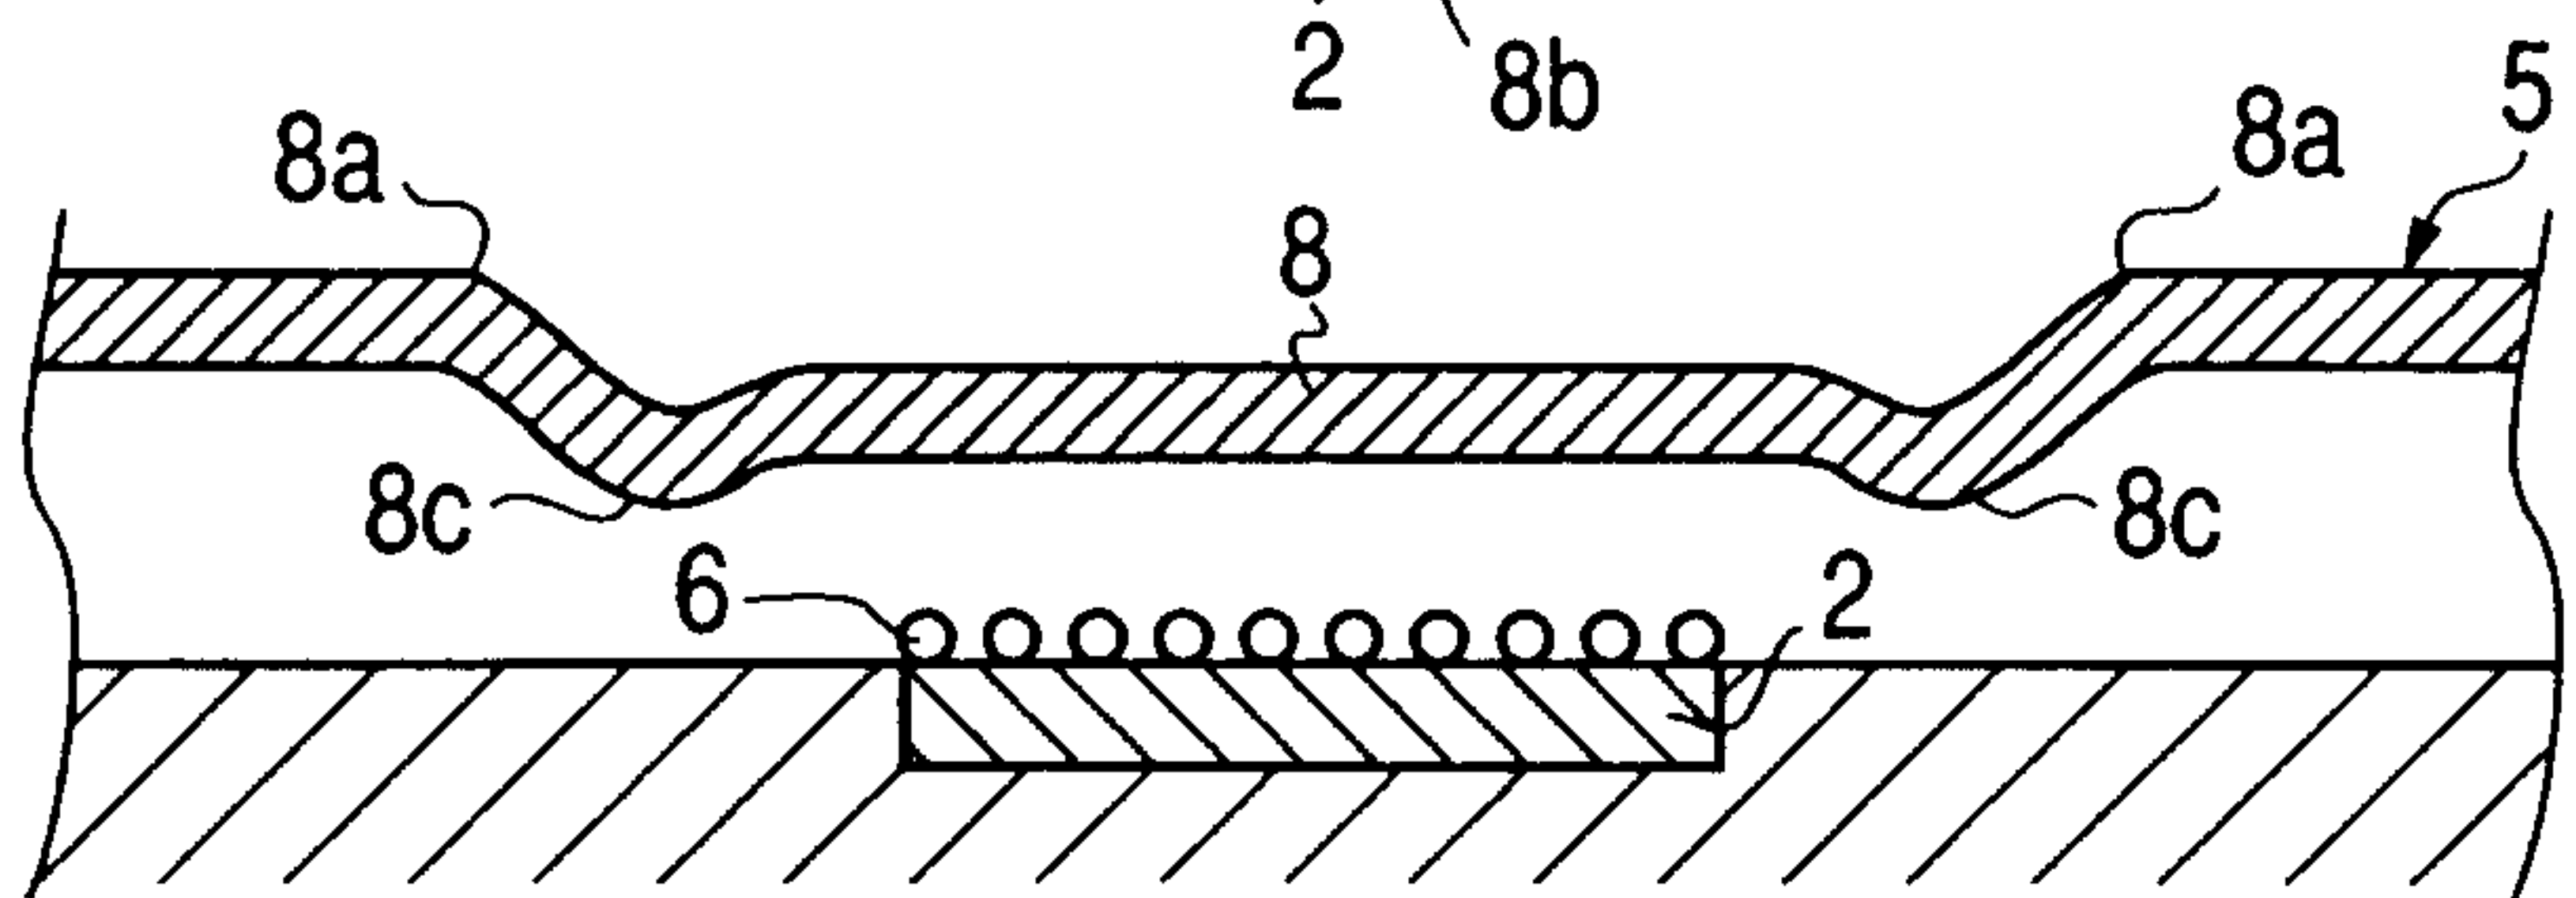
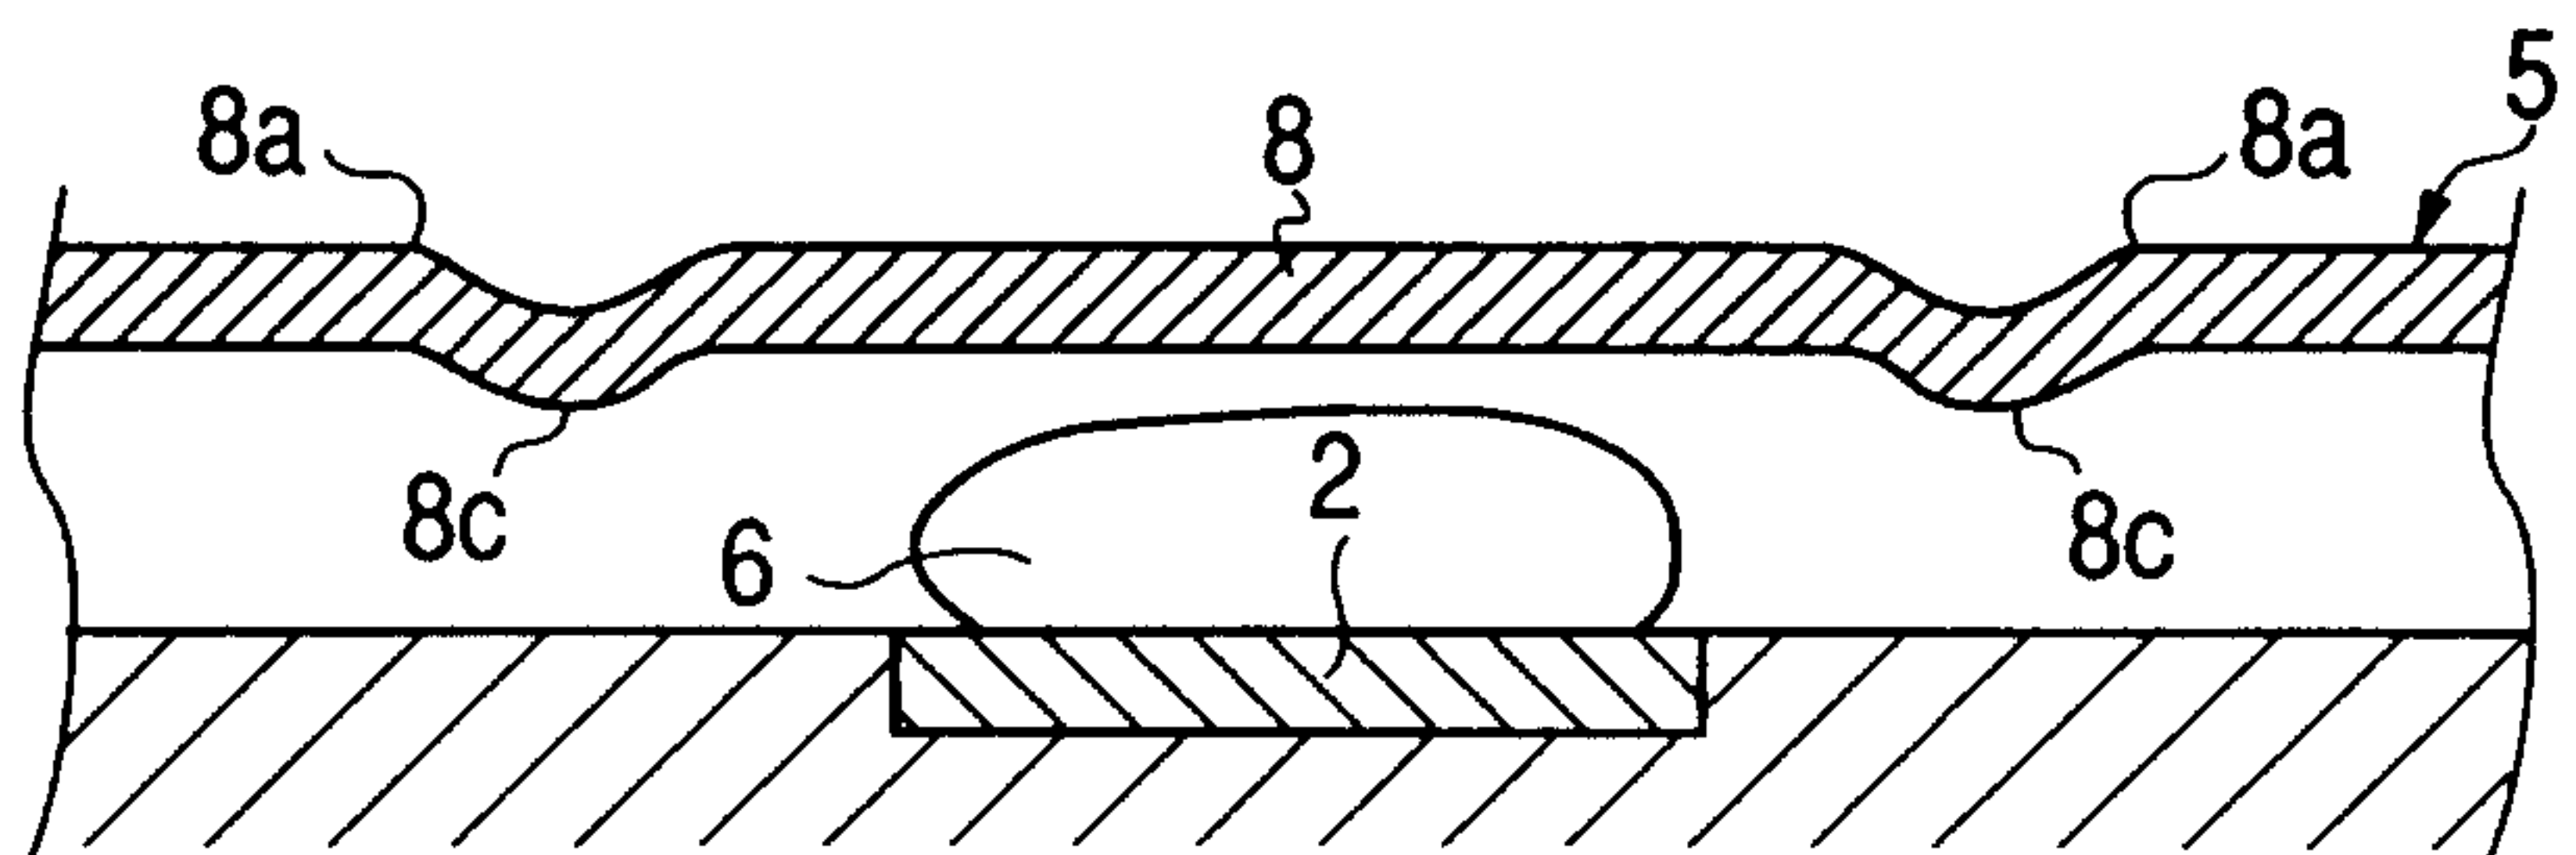
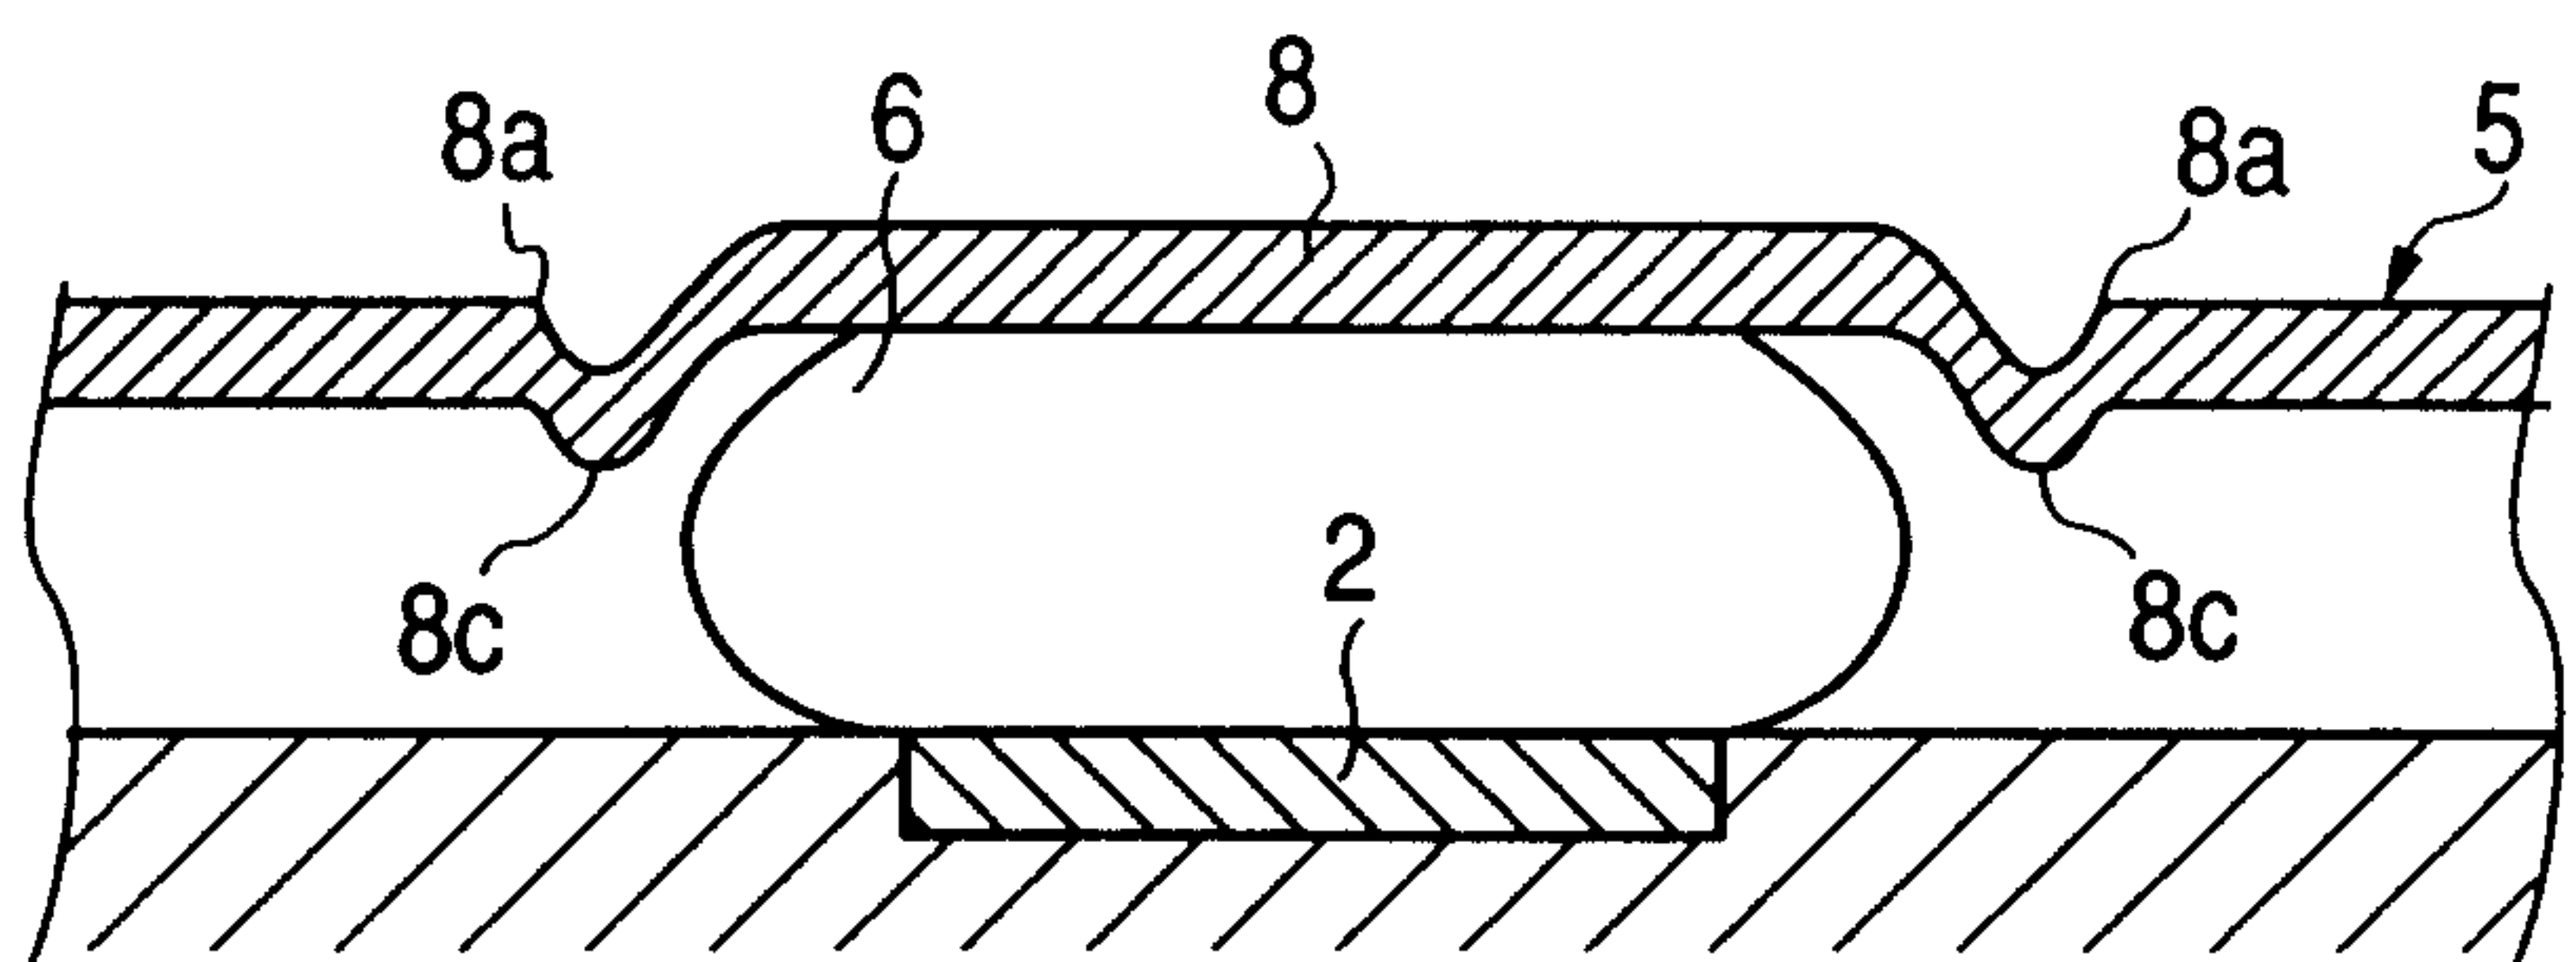
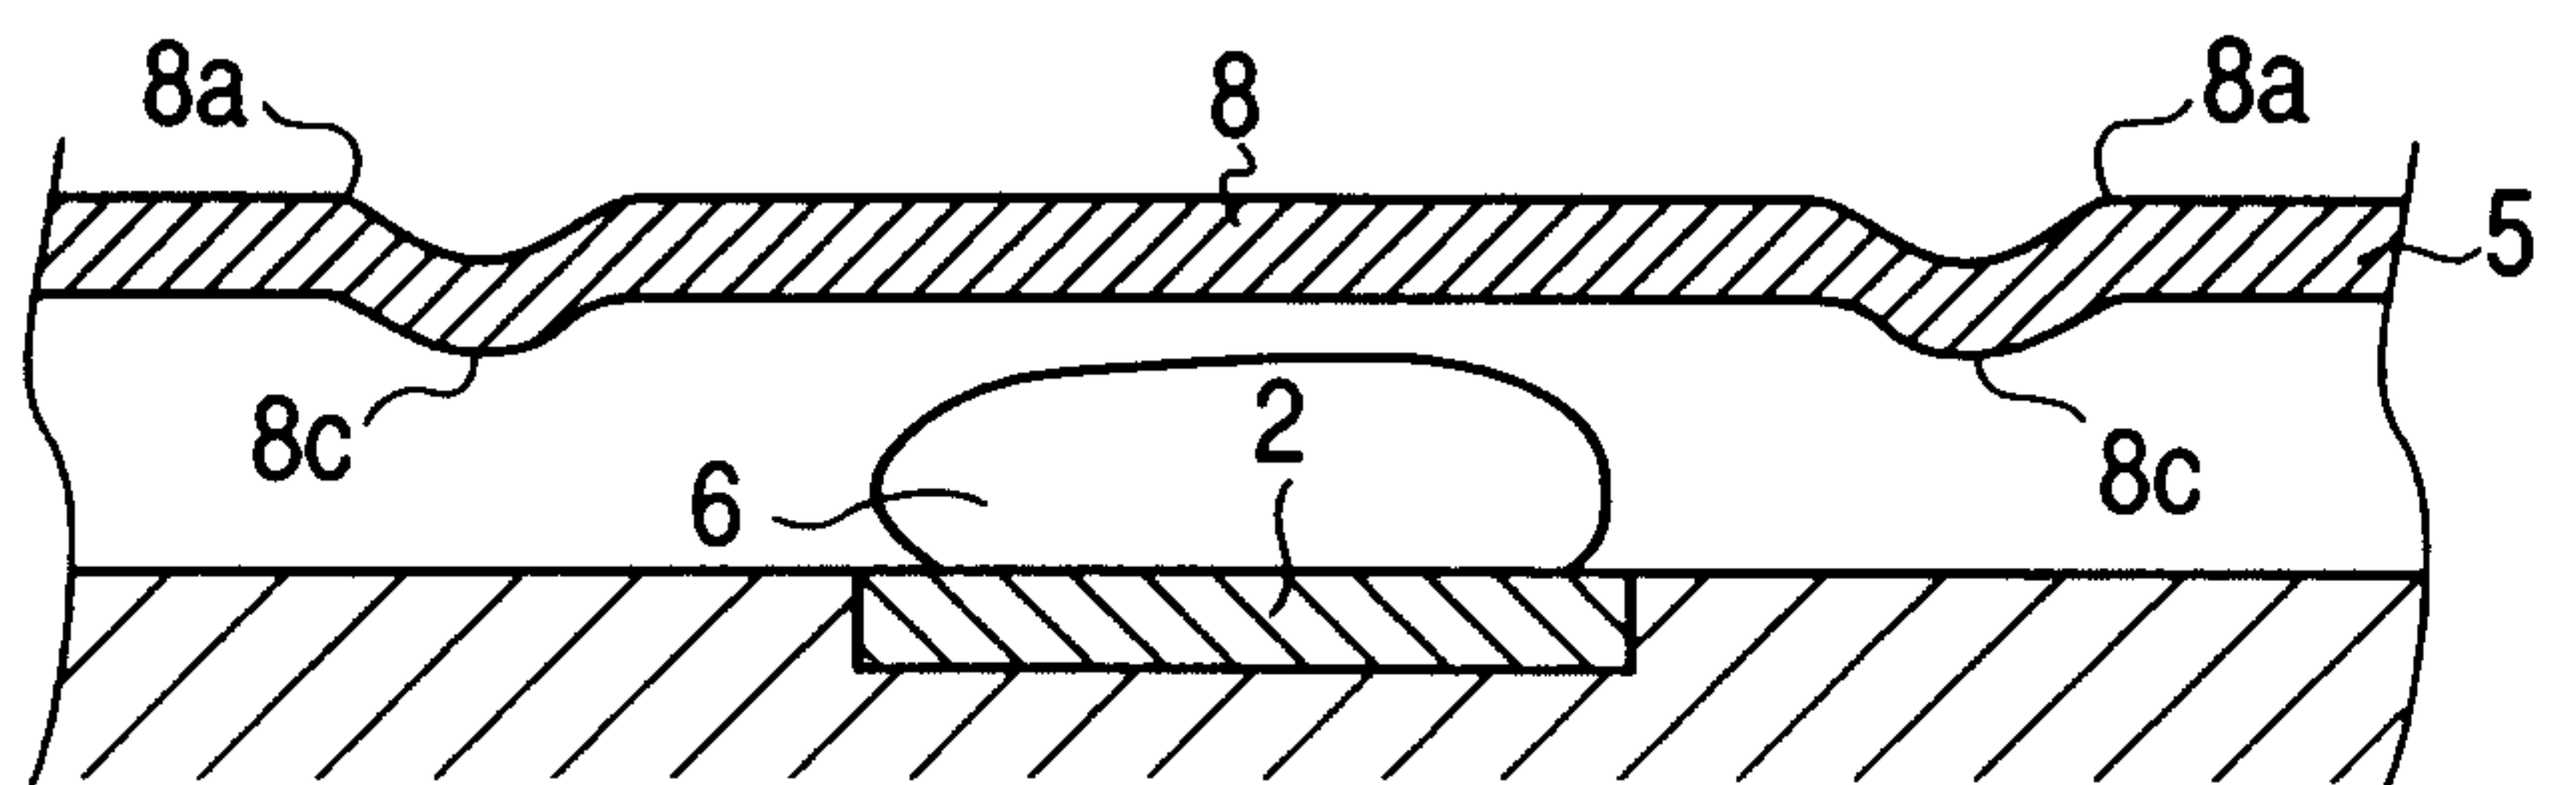
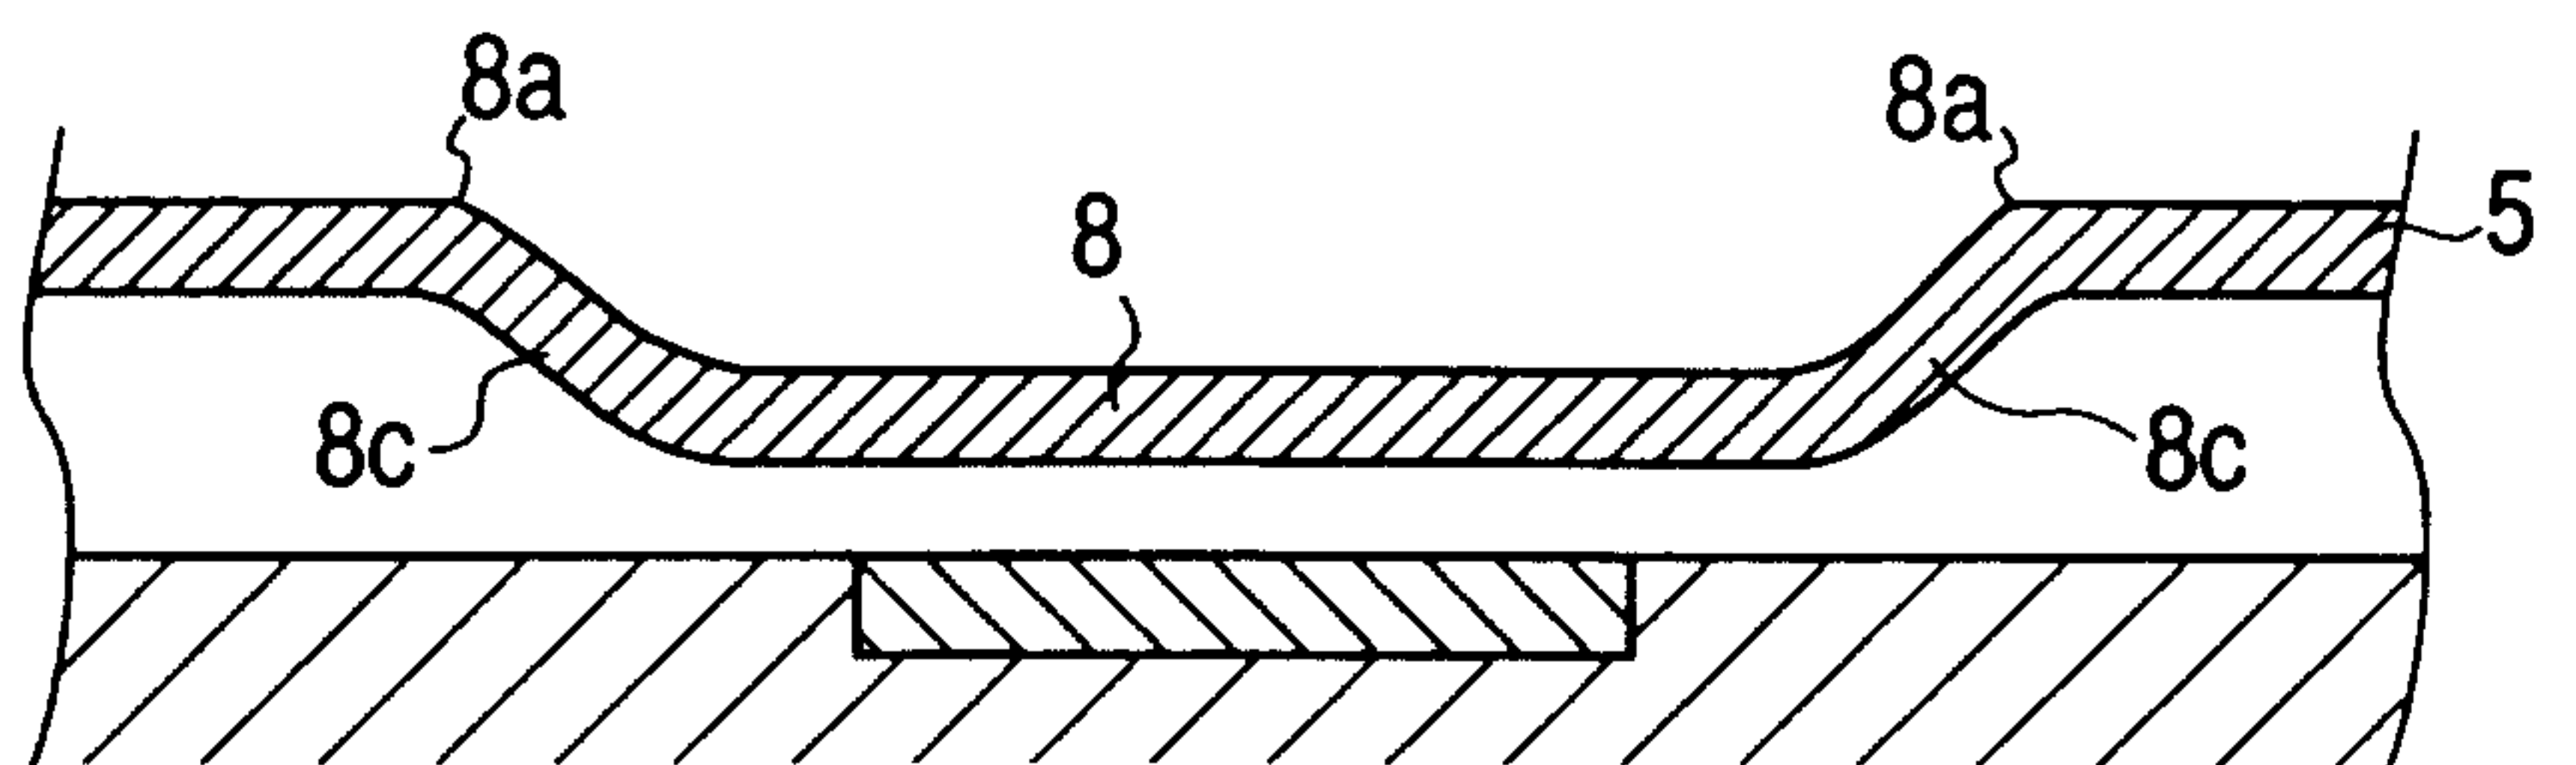
generating liquid path; wherein said recess has
substantially non-displacing corner portions located in the
deviated region of said recess and is adapted to displace,
excluding said corner portions, by a bubble generated in
5 said bubble generating area; and

transport means for transporting a recording medium for
forming a record by receiving the discharge liquid from said
liquid discharging head.

10

FIG. 1A**FIG. 1B****FIG. 1C****FIG. 1D****FIG. 1E** ○**FIG. 1F**

2 / 29

FIG. 2A**FIG. 2B****FIG. 2C****FIG. 2D****FIG. 2E****FIG. 2F**

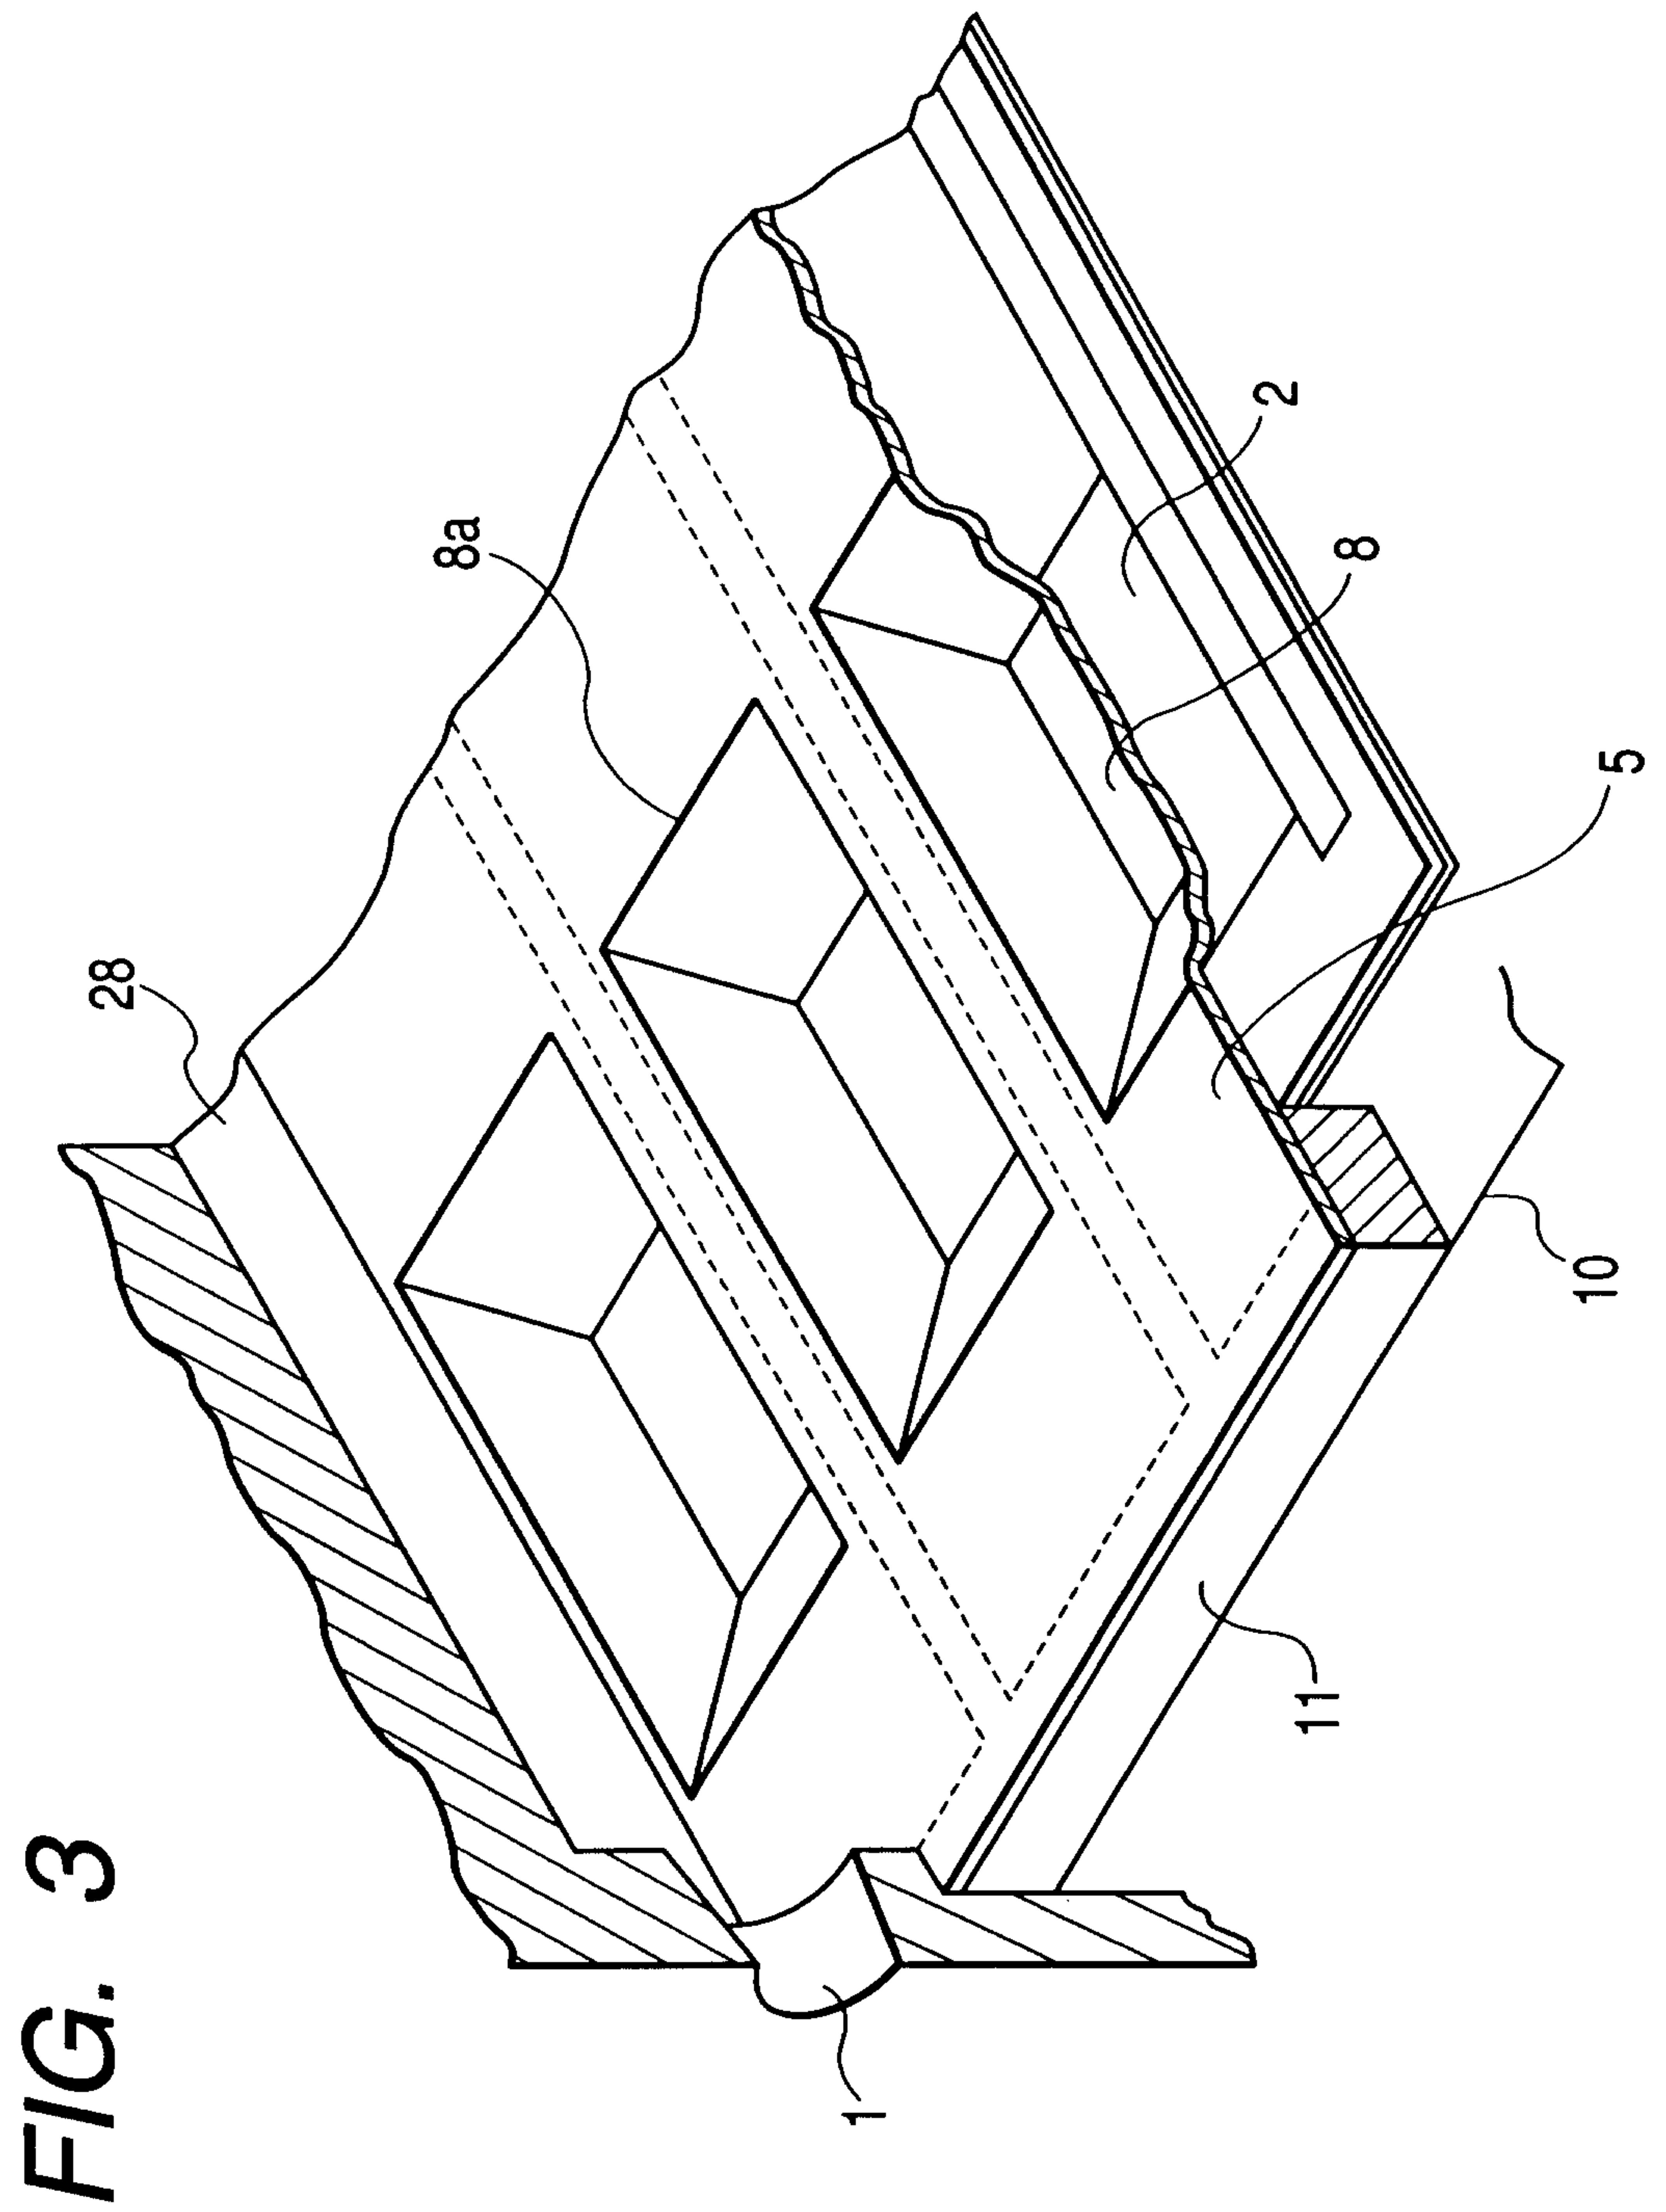


FIG. 4A

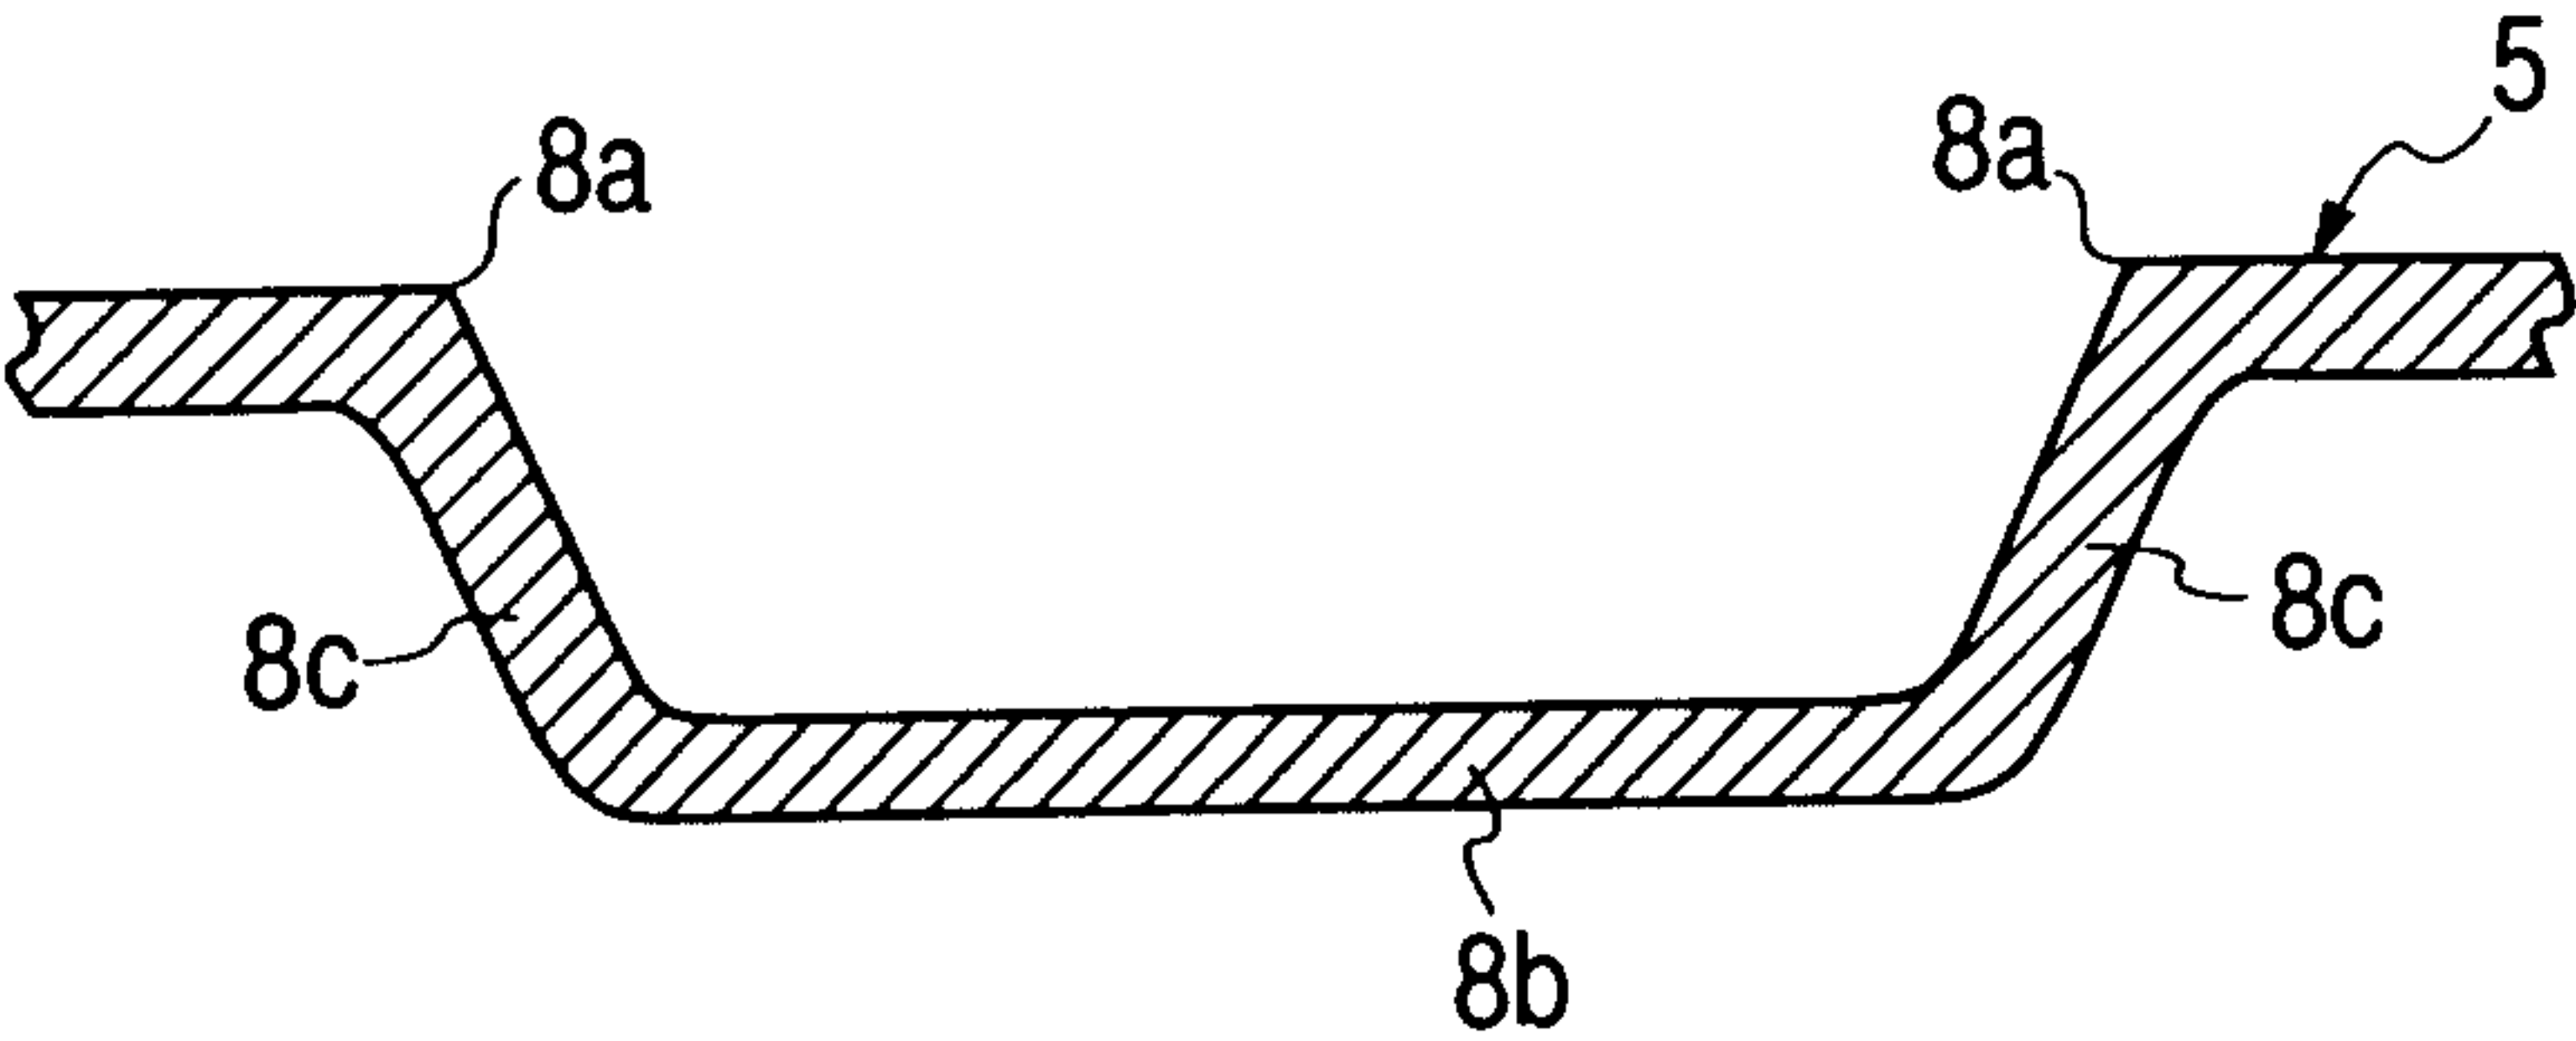


FIG. 4B

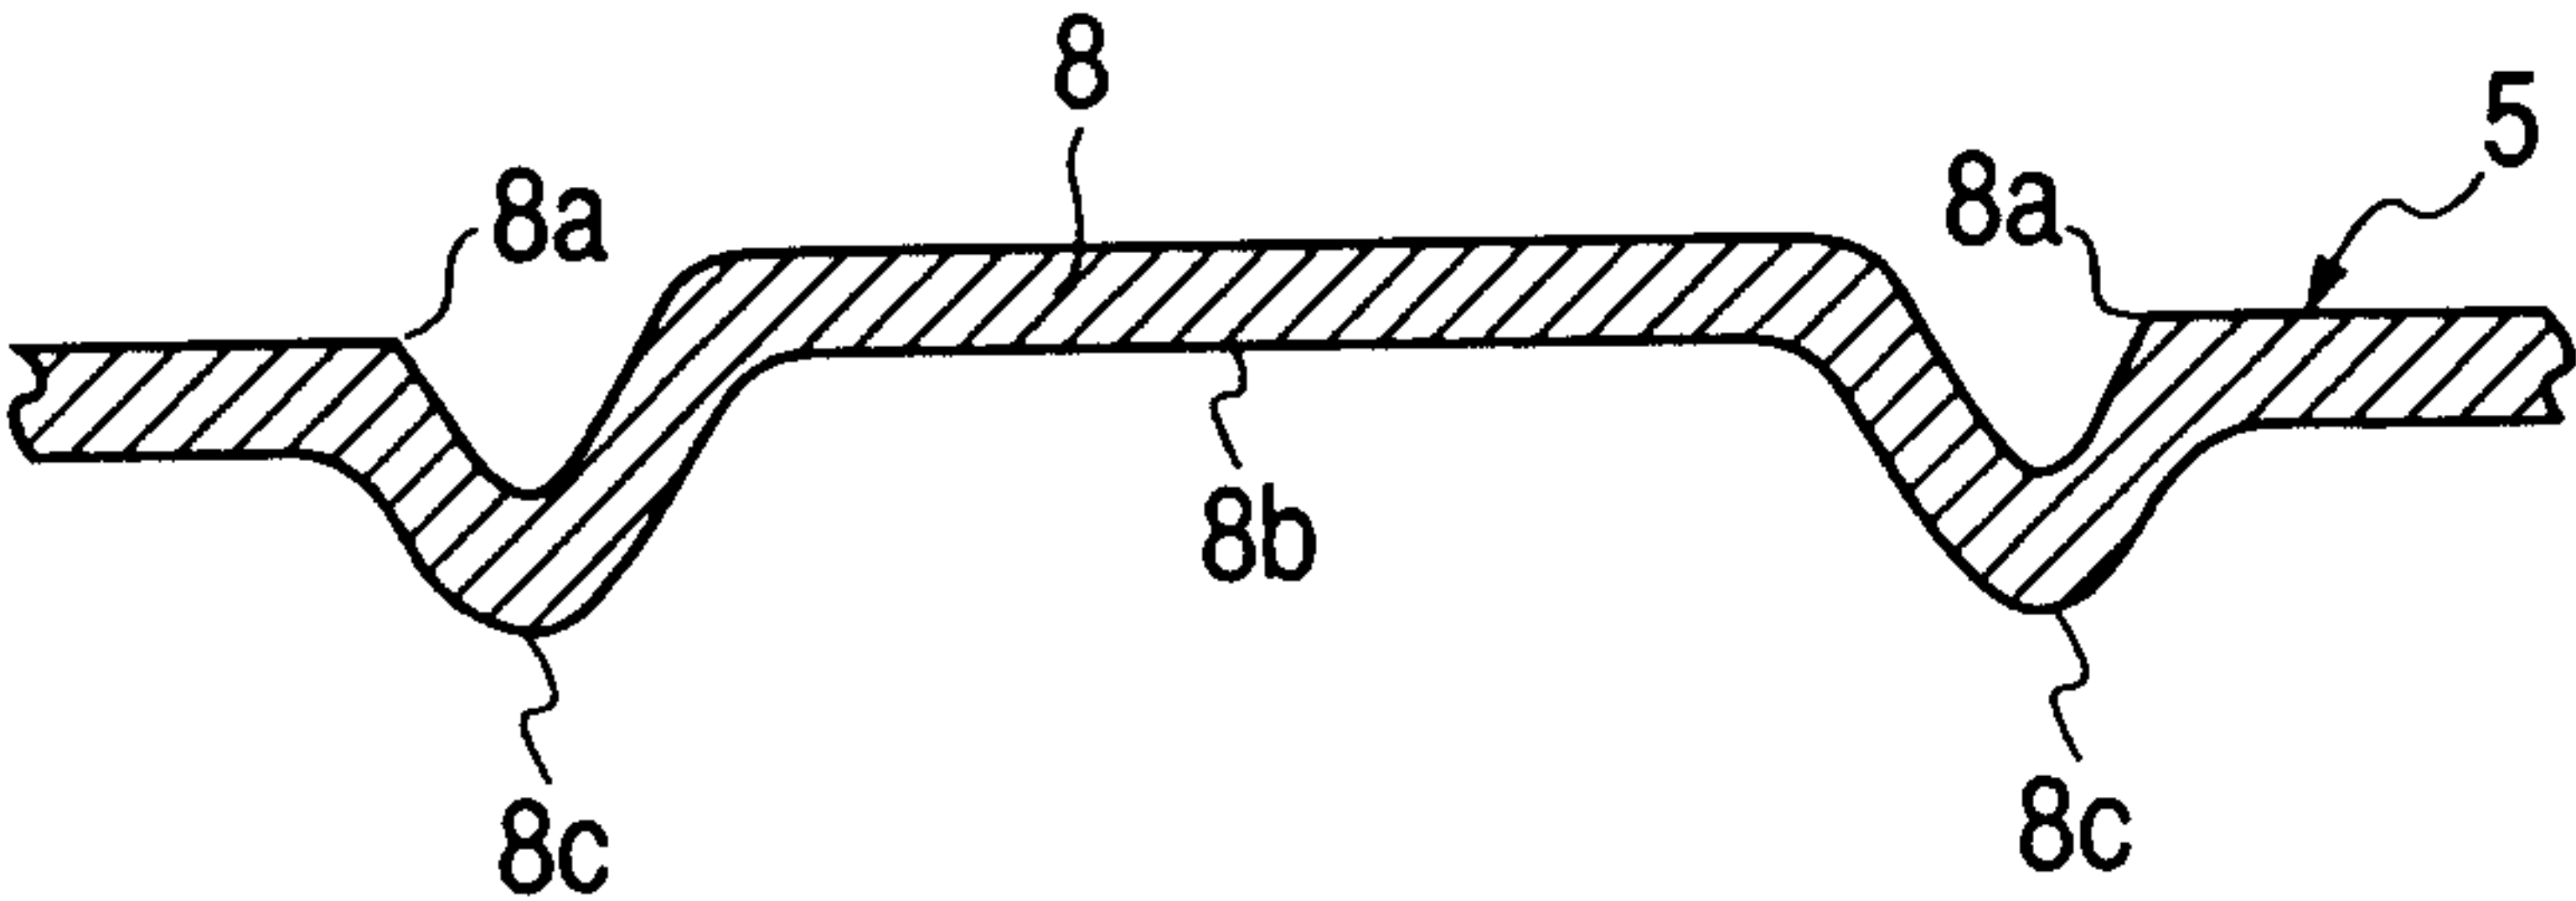


FIG. 5A

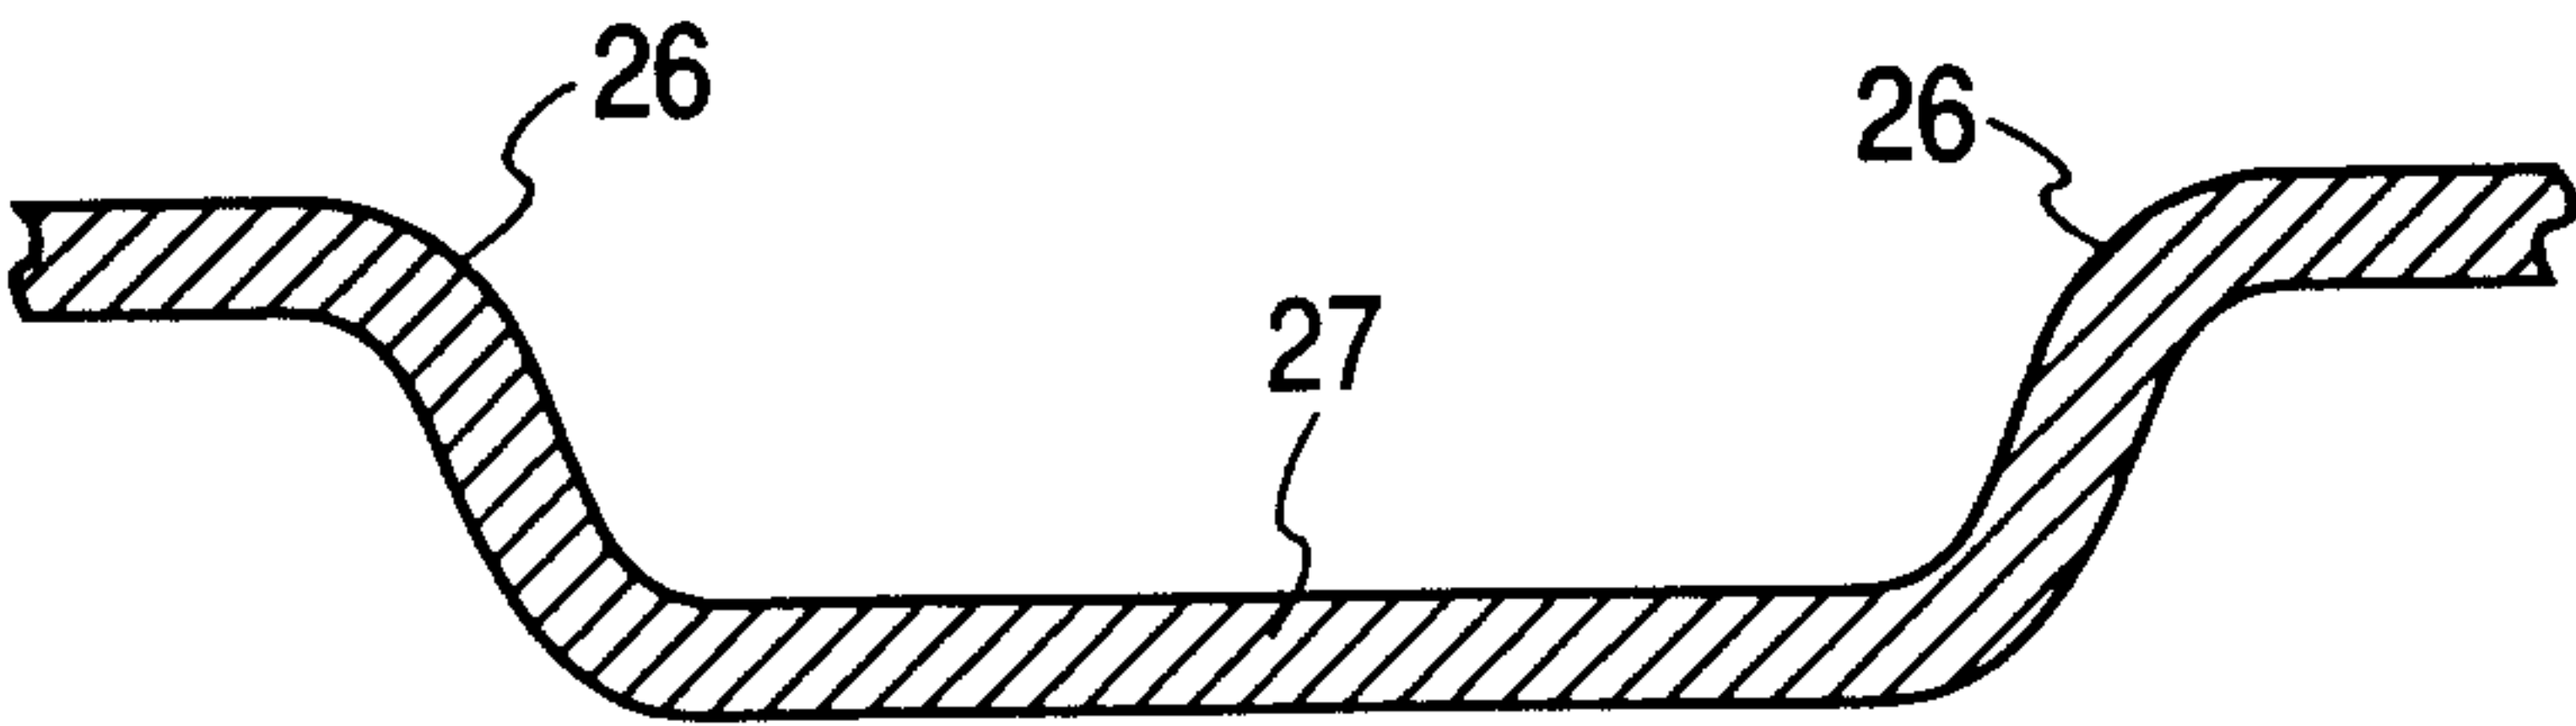


FIG. 5B

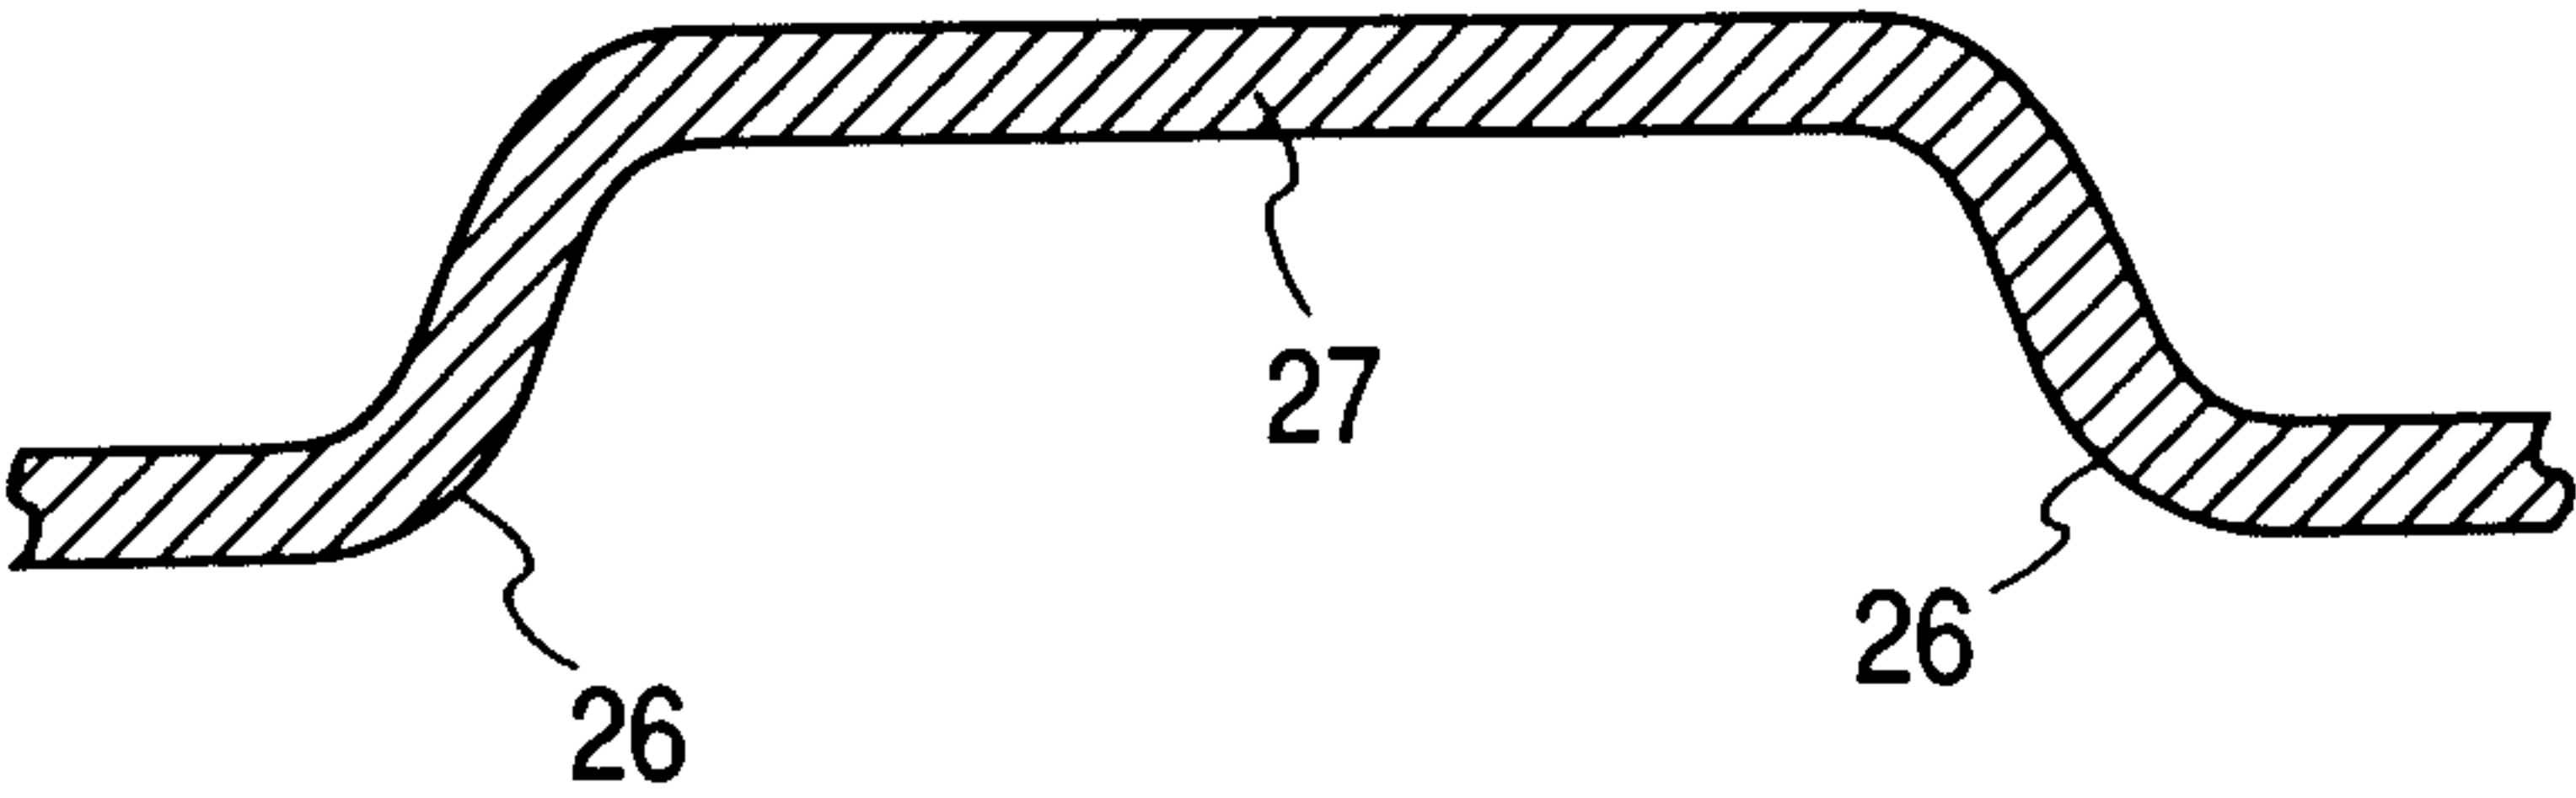


FIG. 6

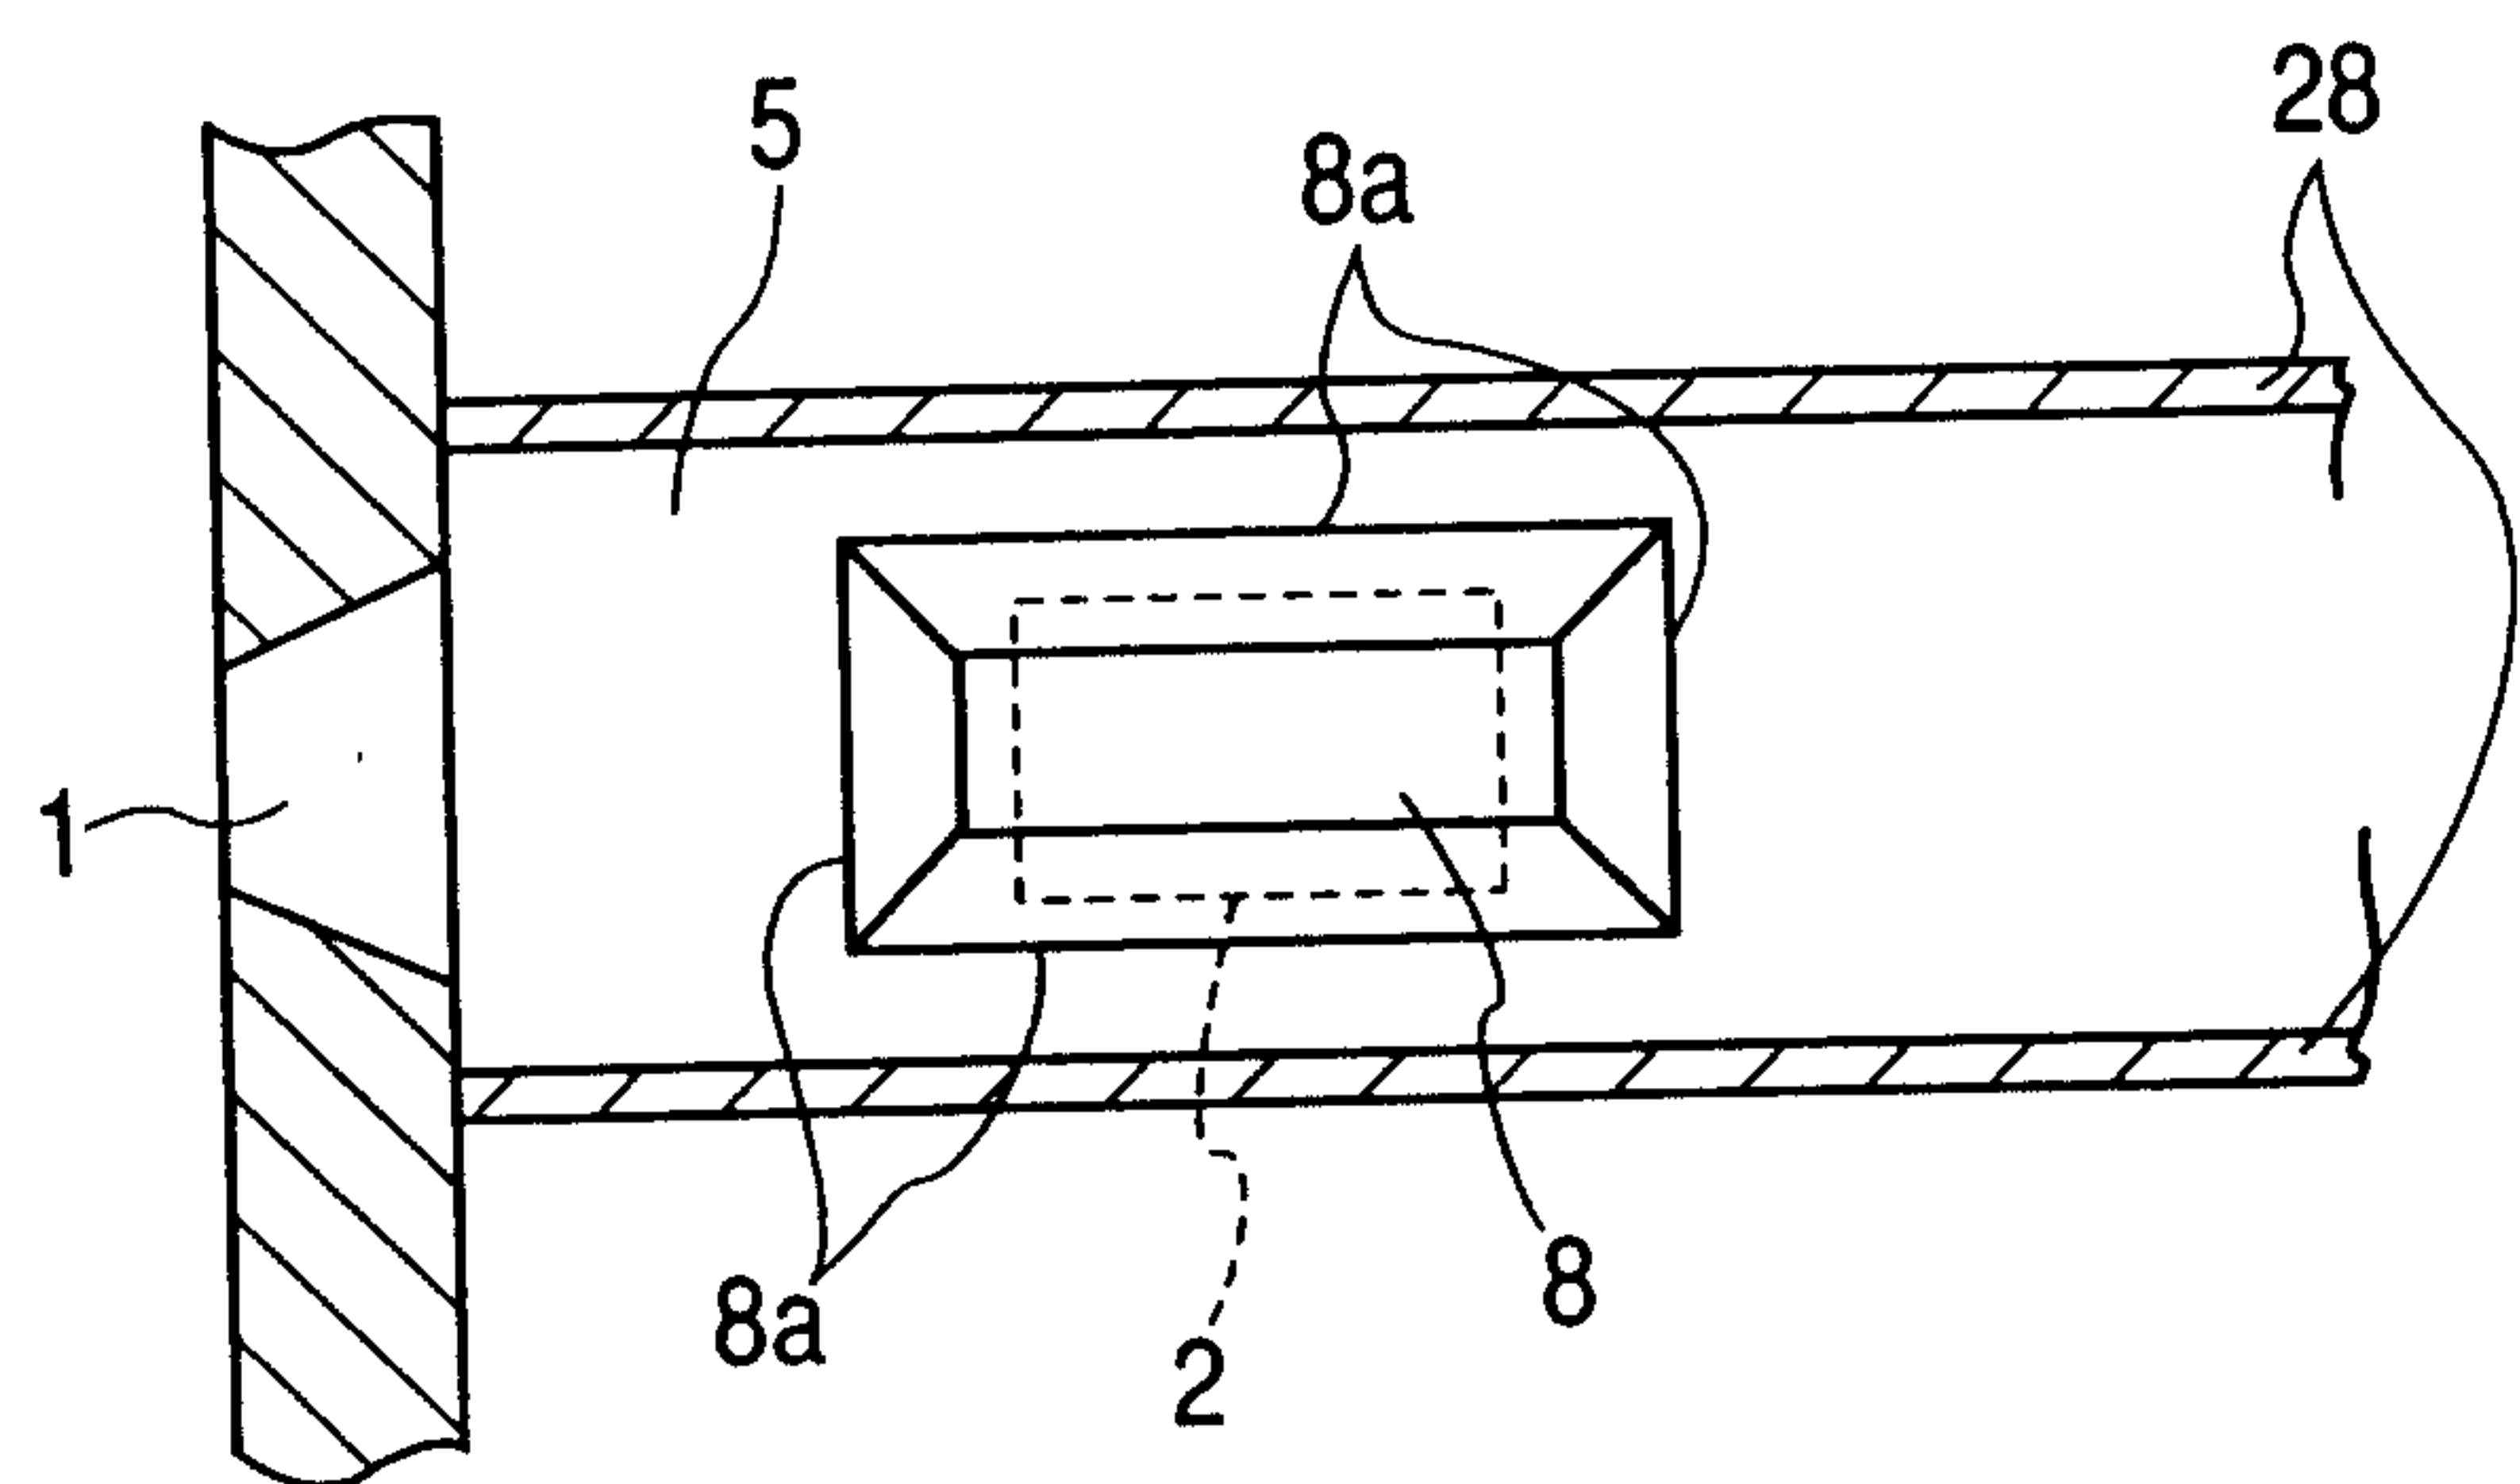


FIG. 7A

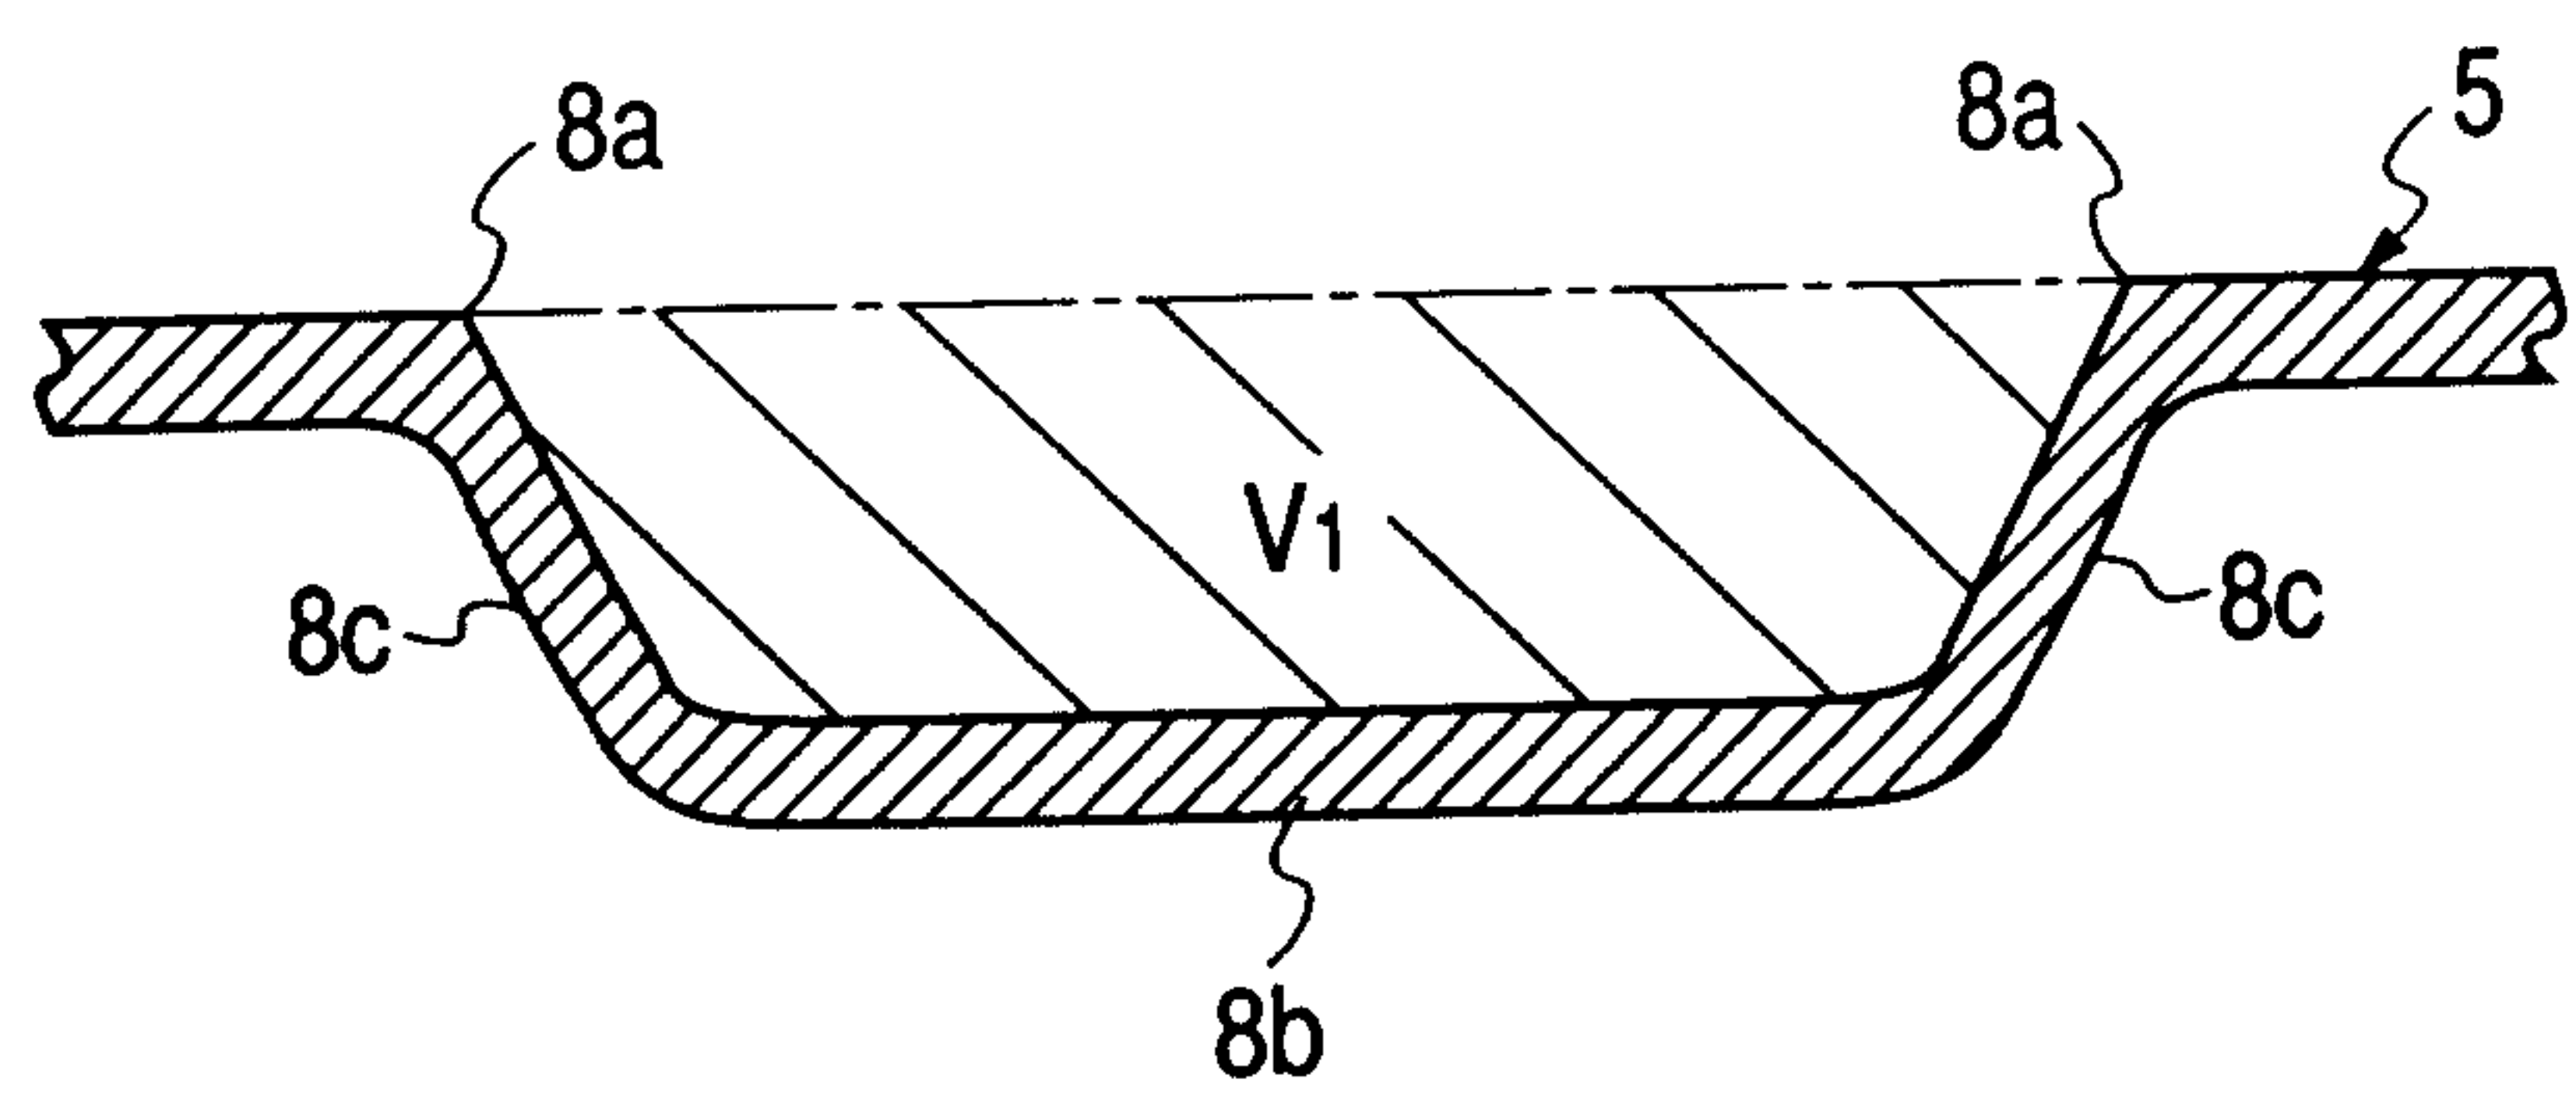


FIG. 7B

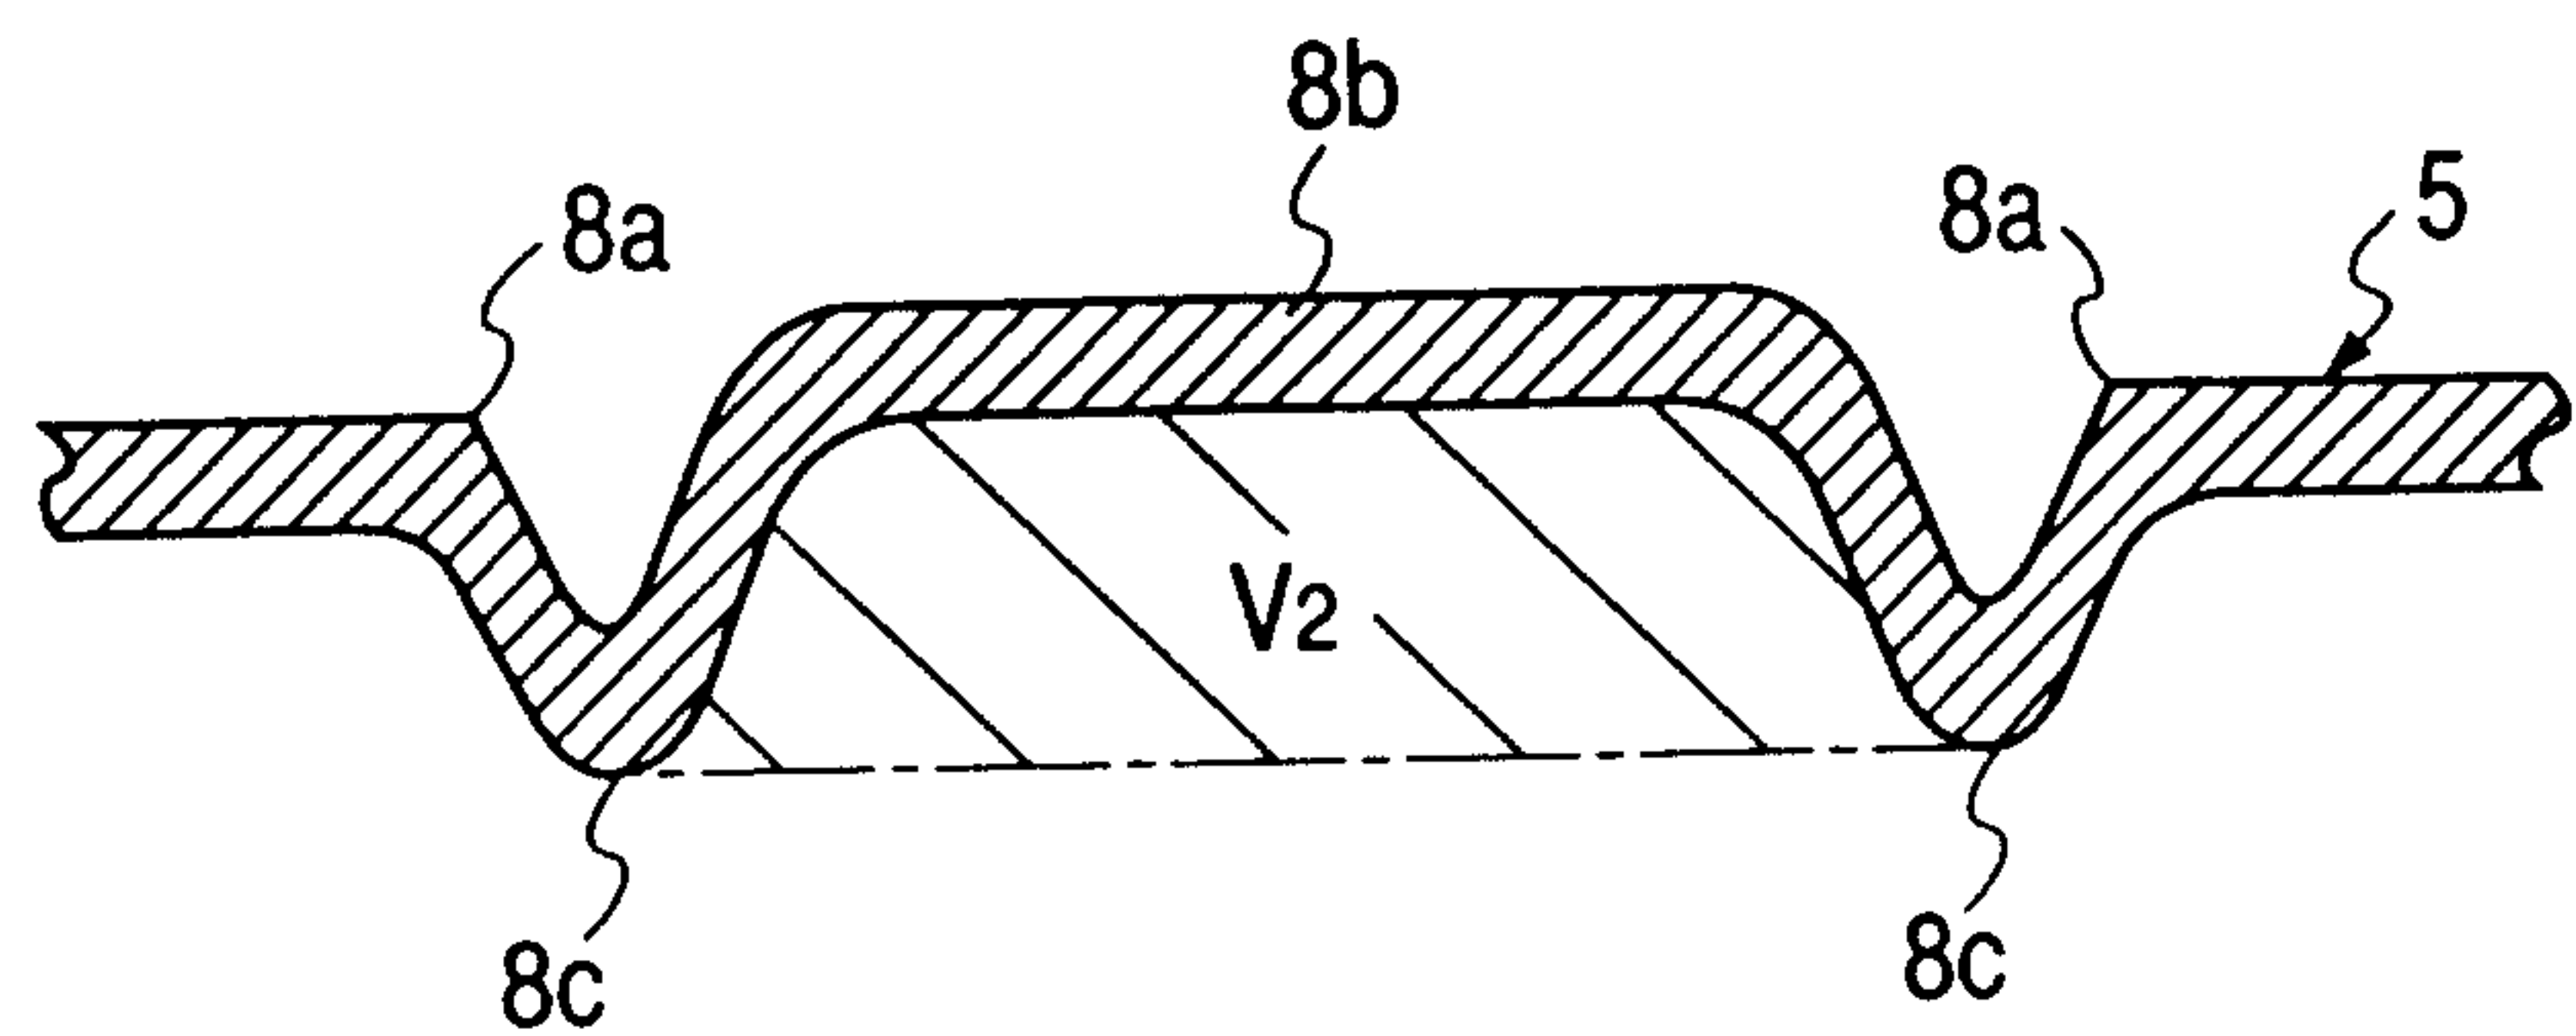


FIG. 8A

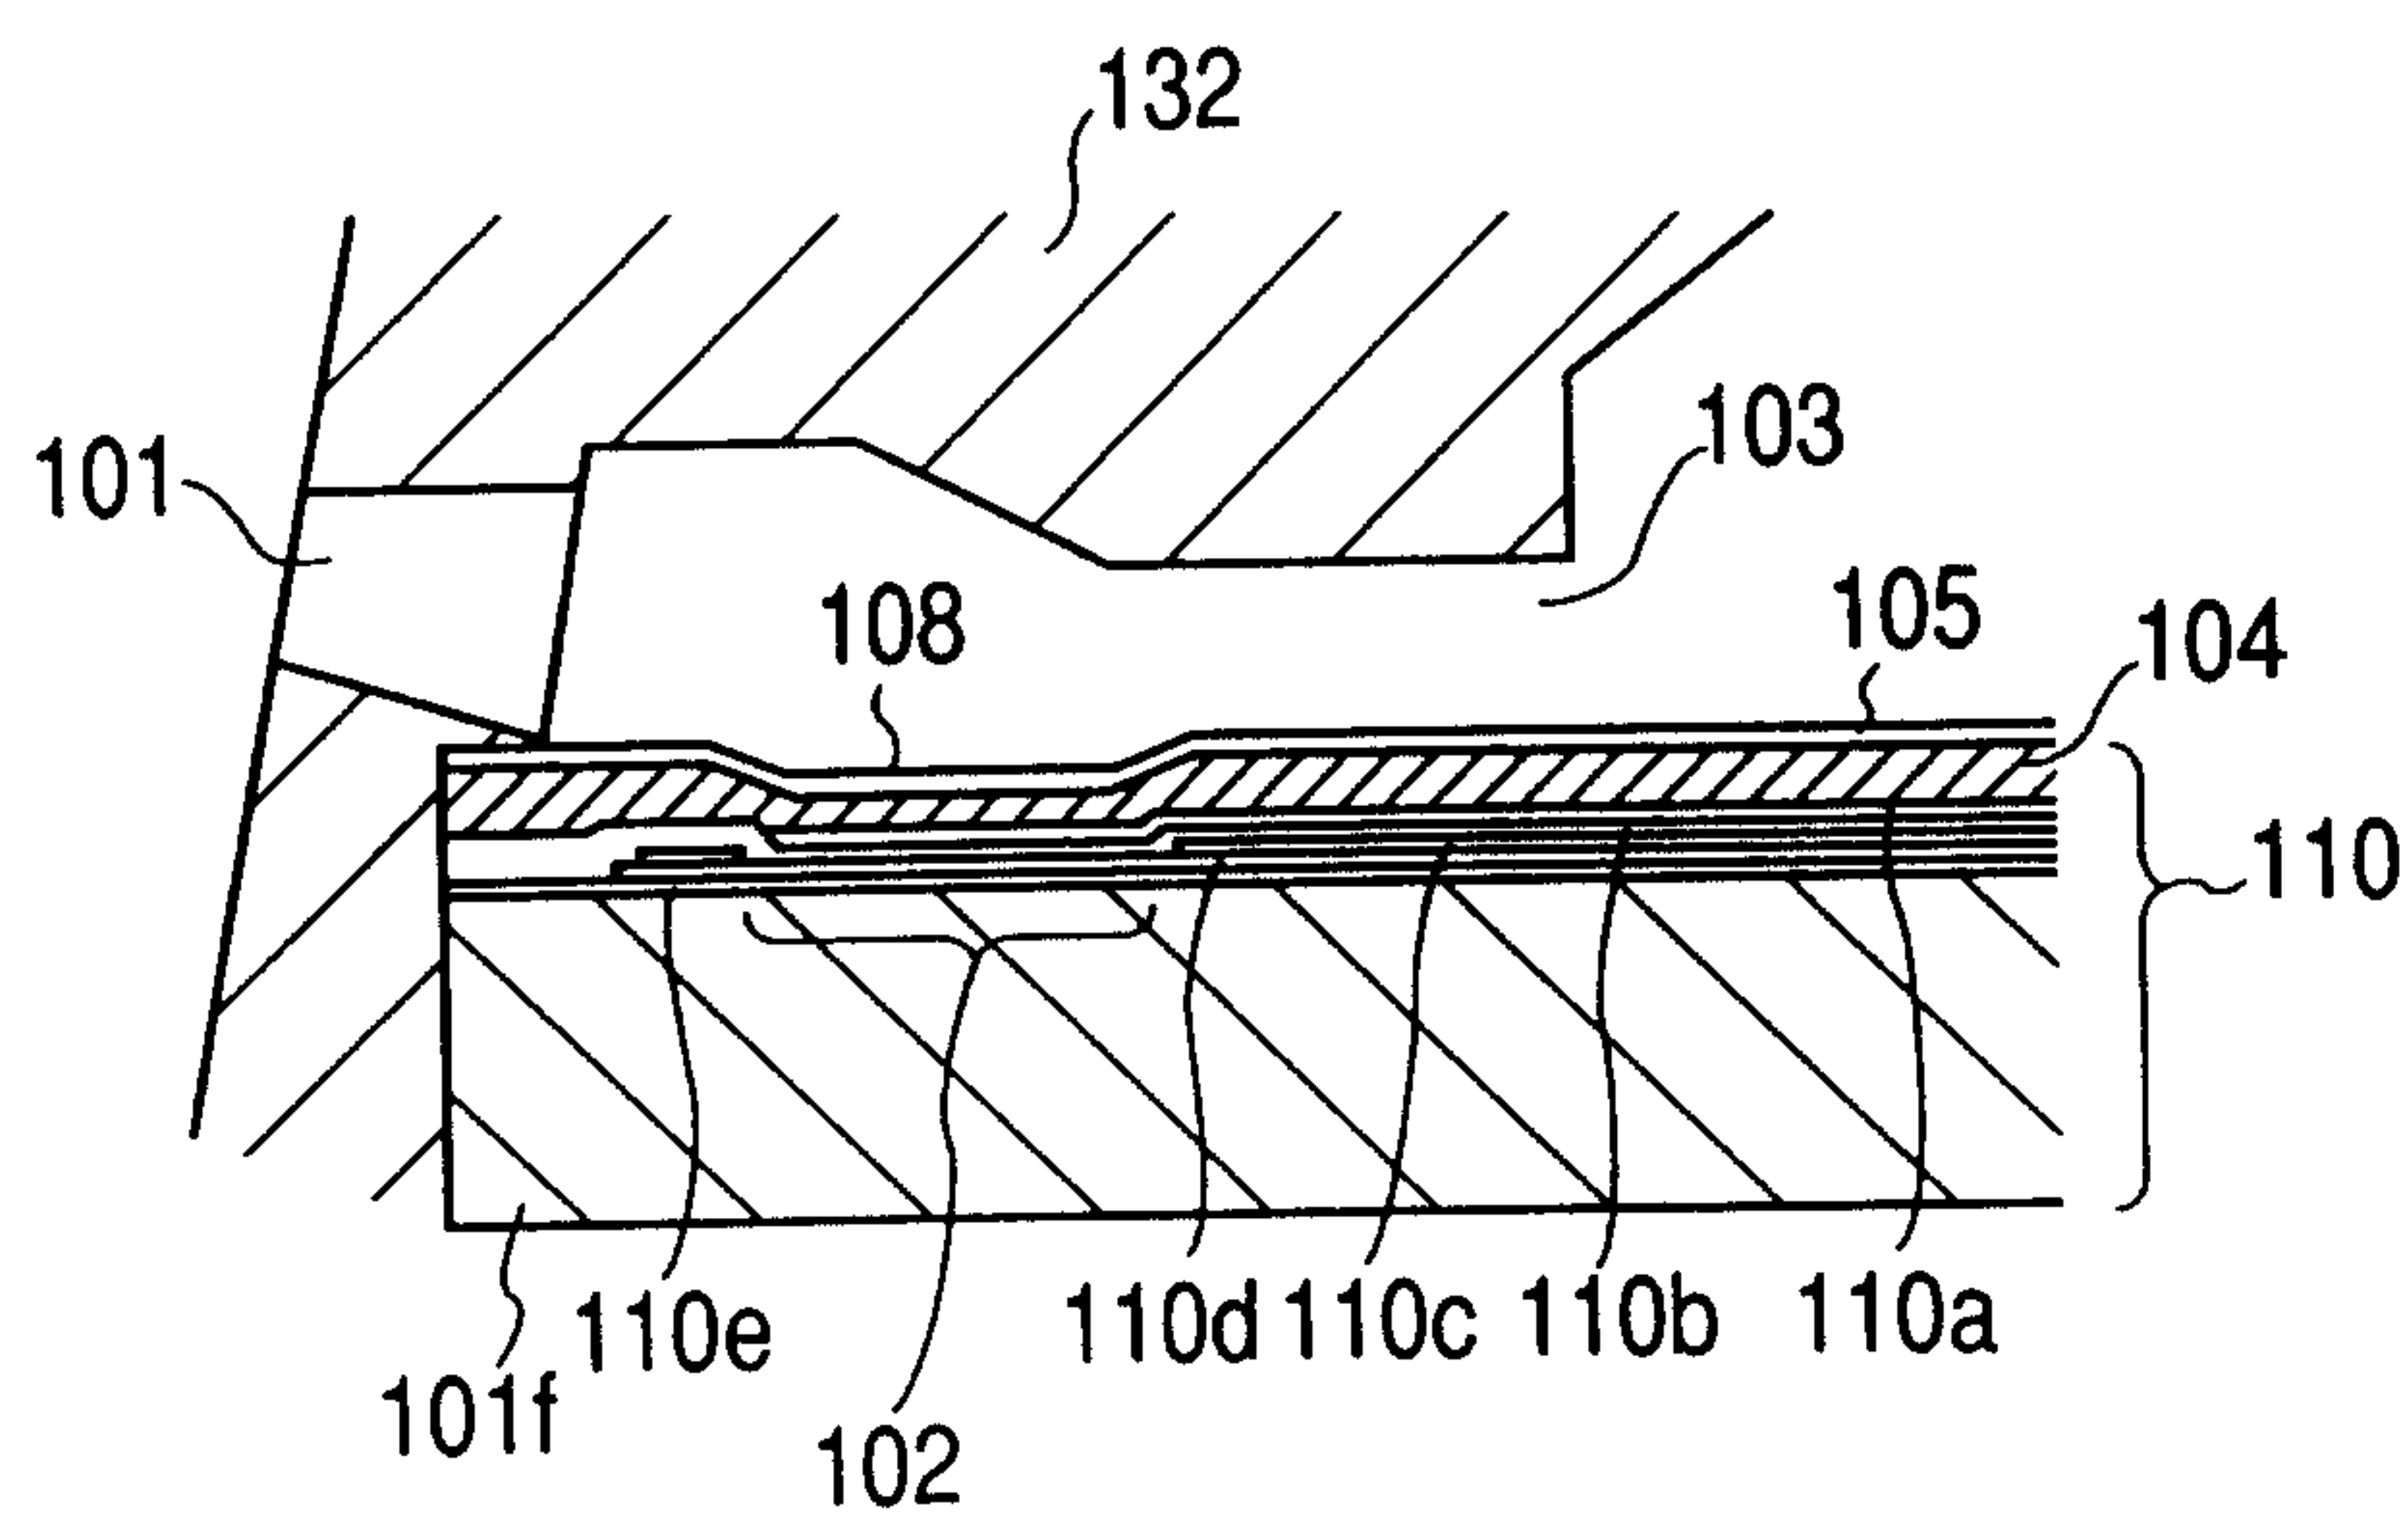
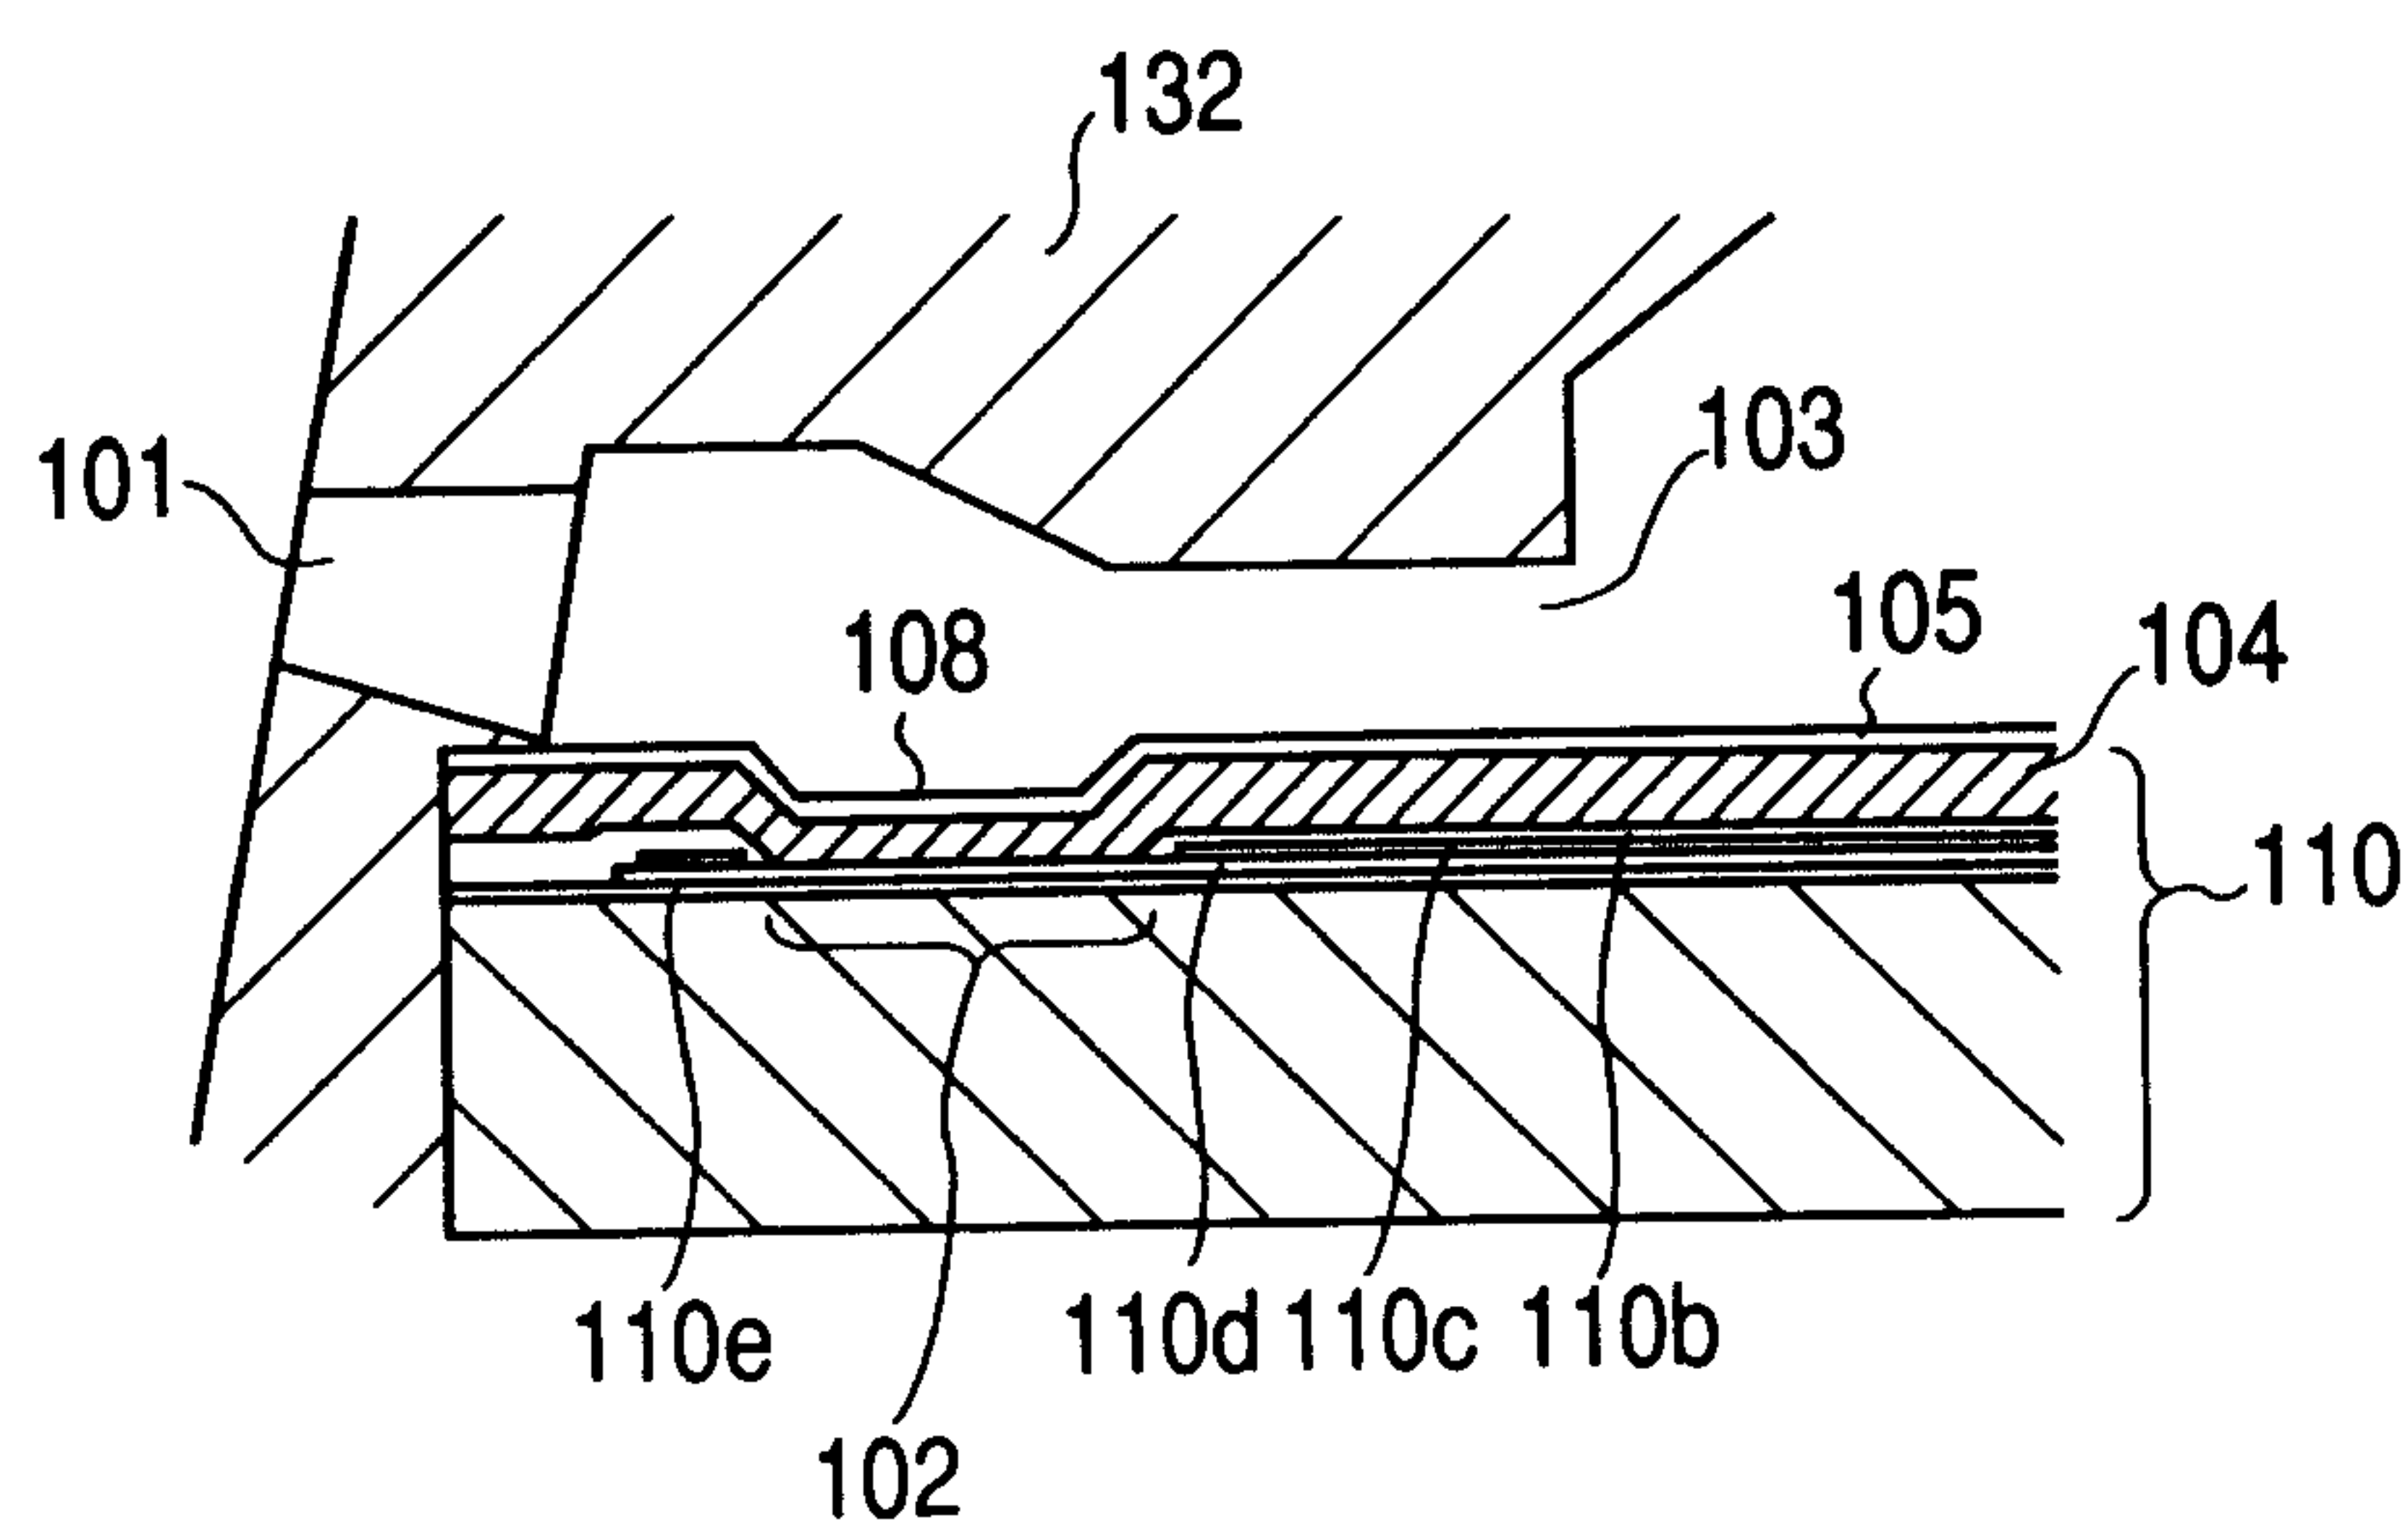


FIG. 8B



7 / 29

FIG. 9

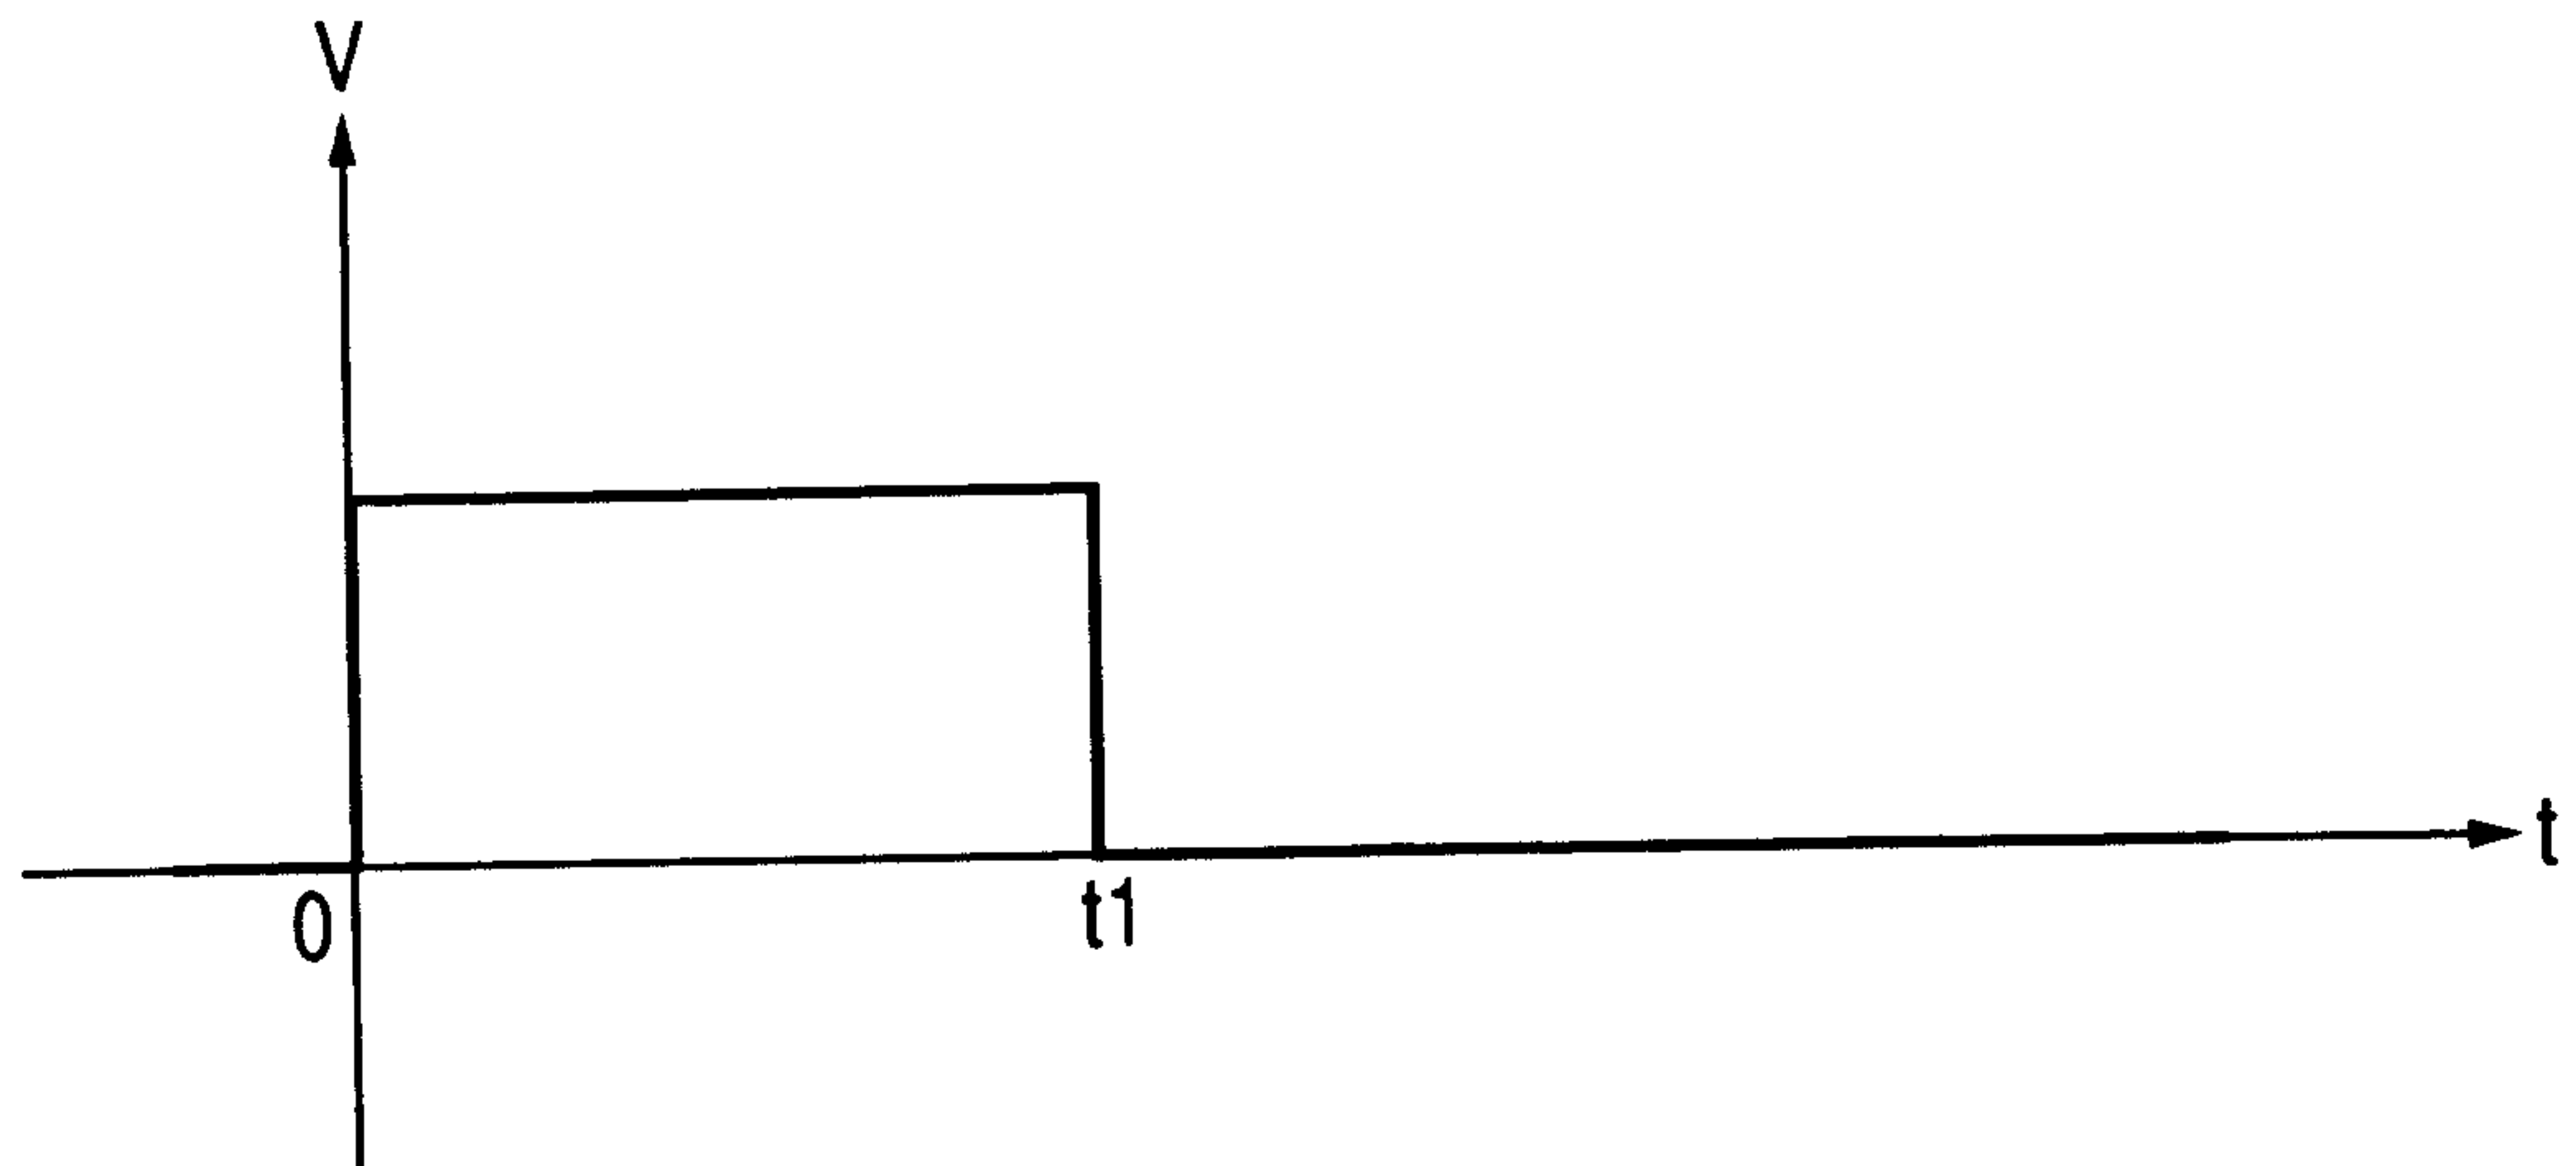


FIG. 10A

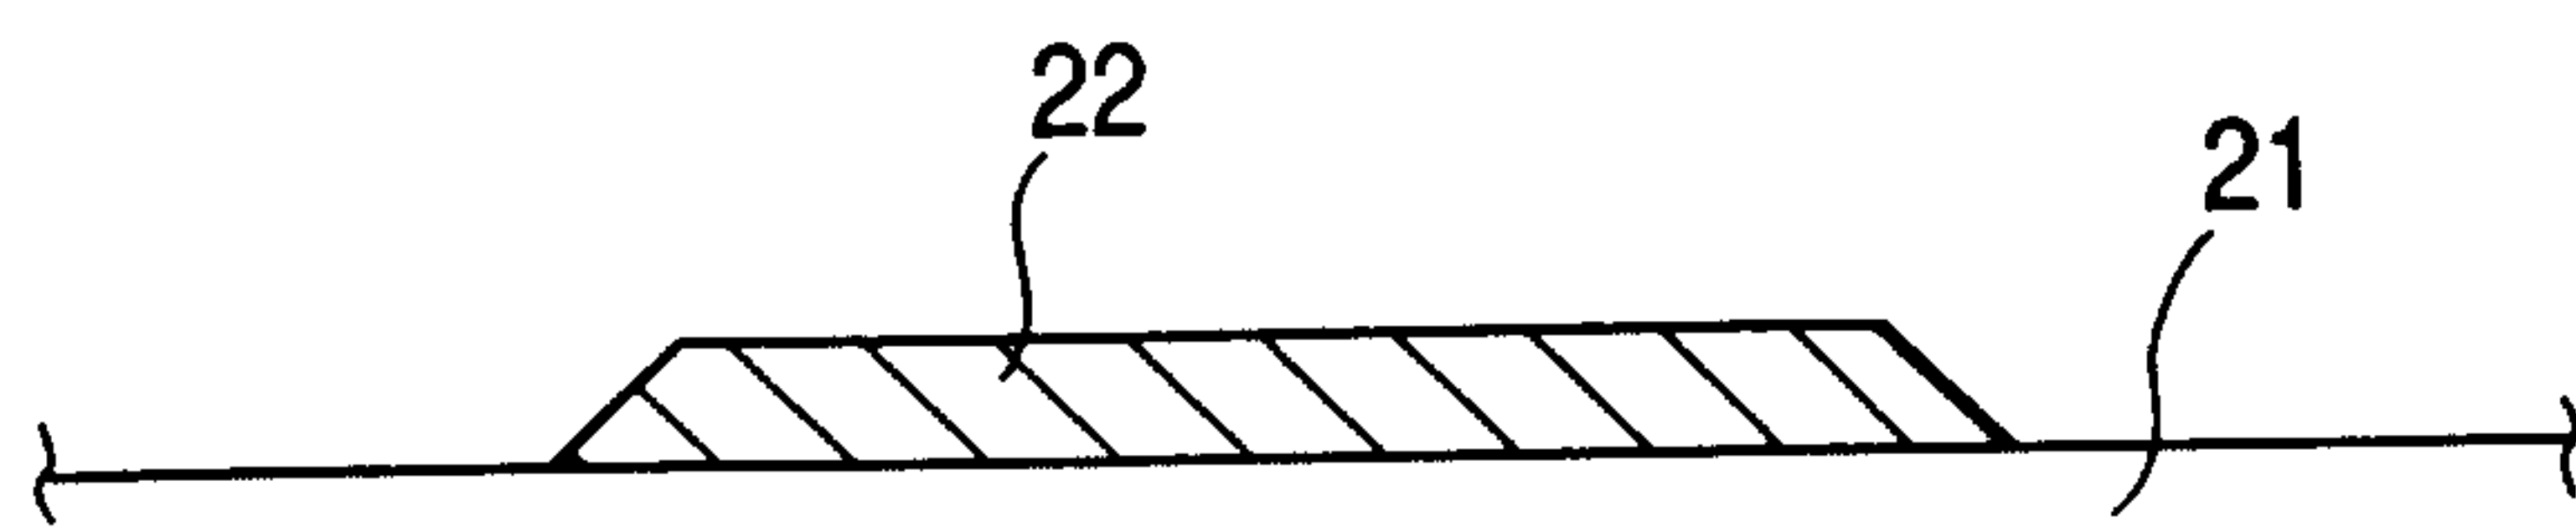
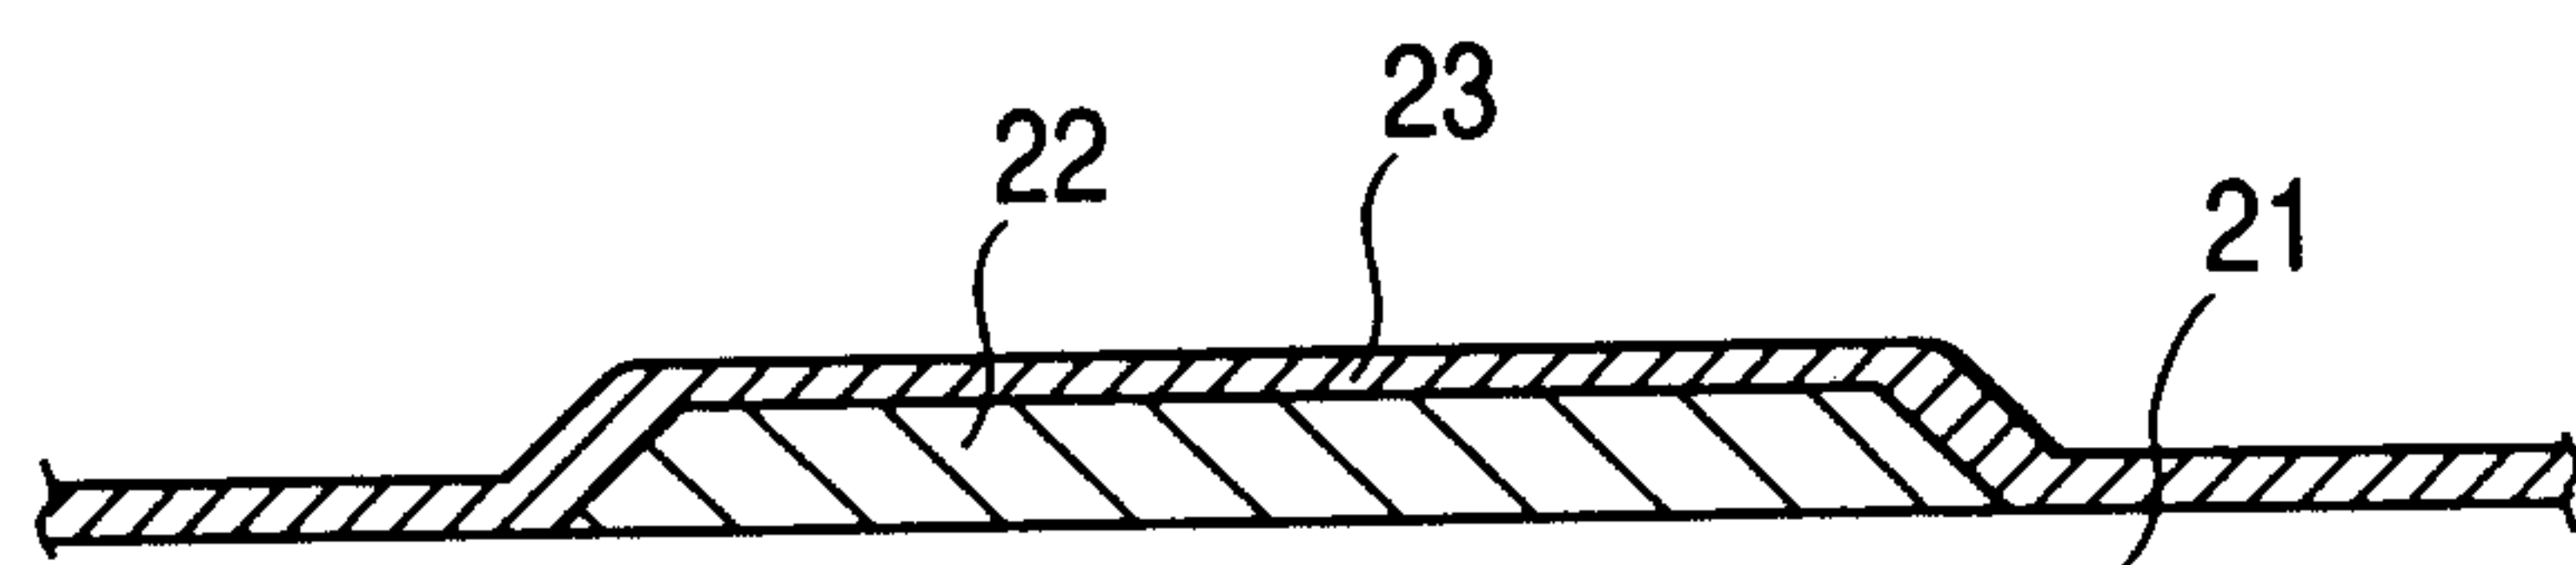


FIG. 10B



8 / 29

FIG. 11A

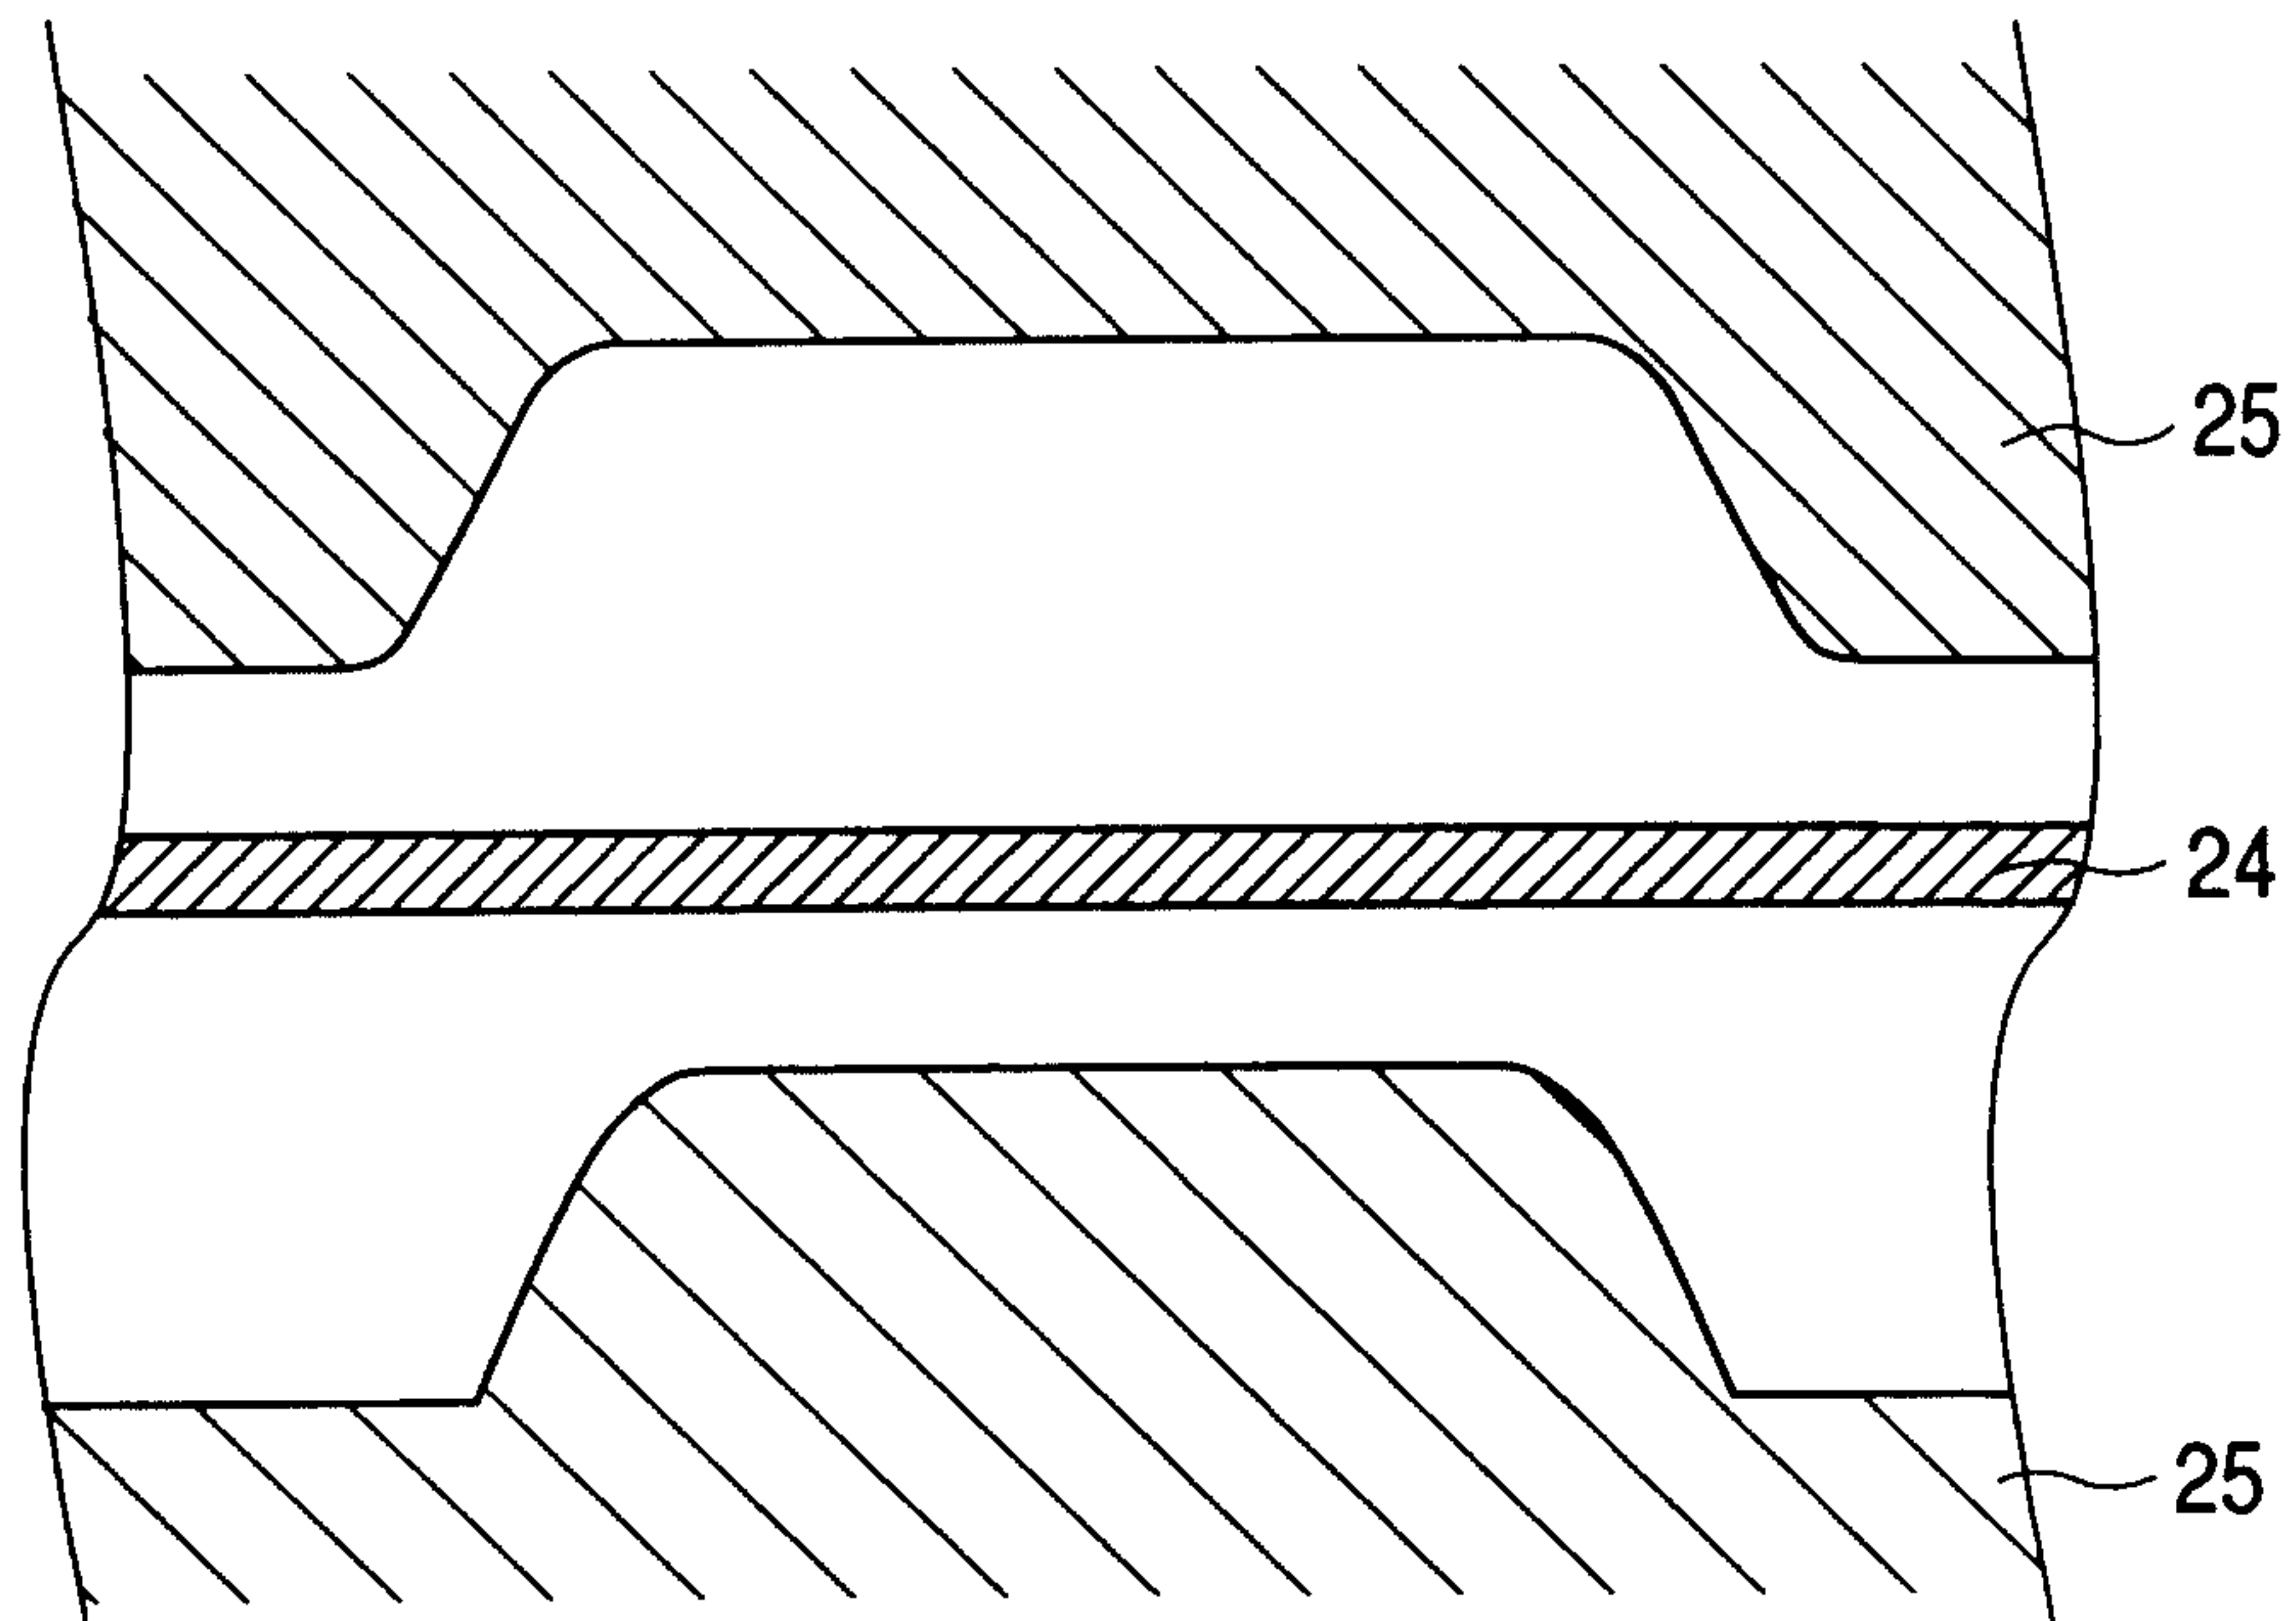


FIG. 11B

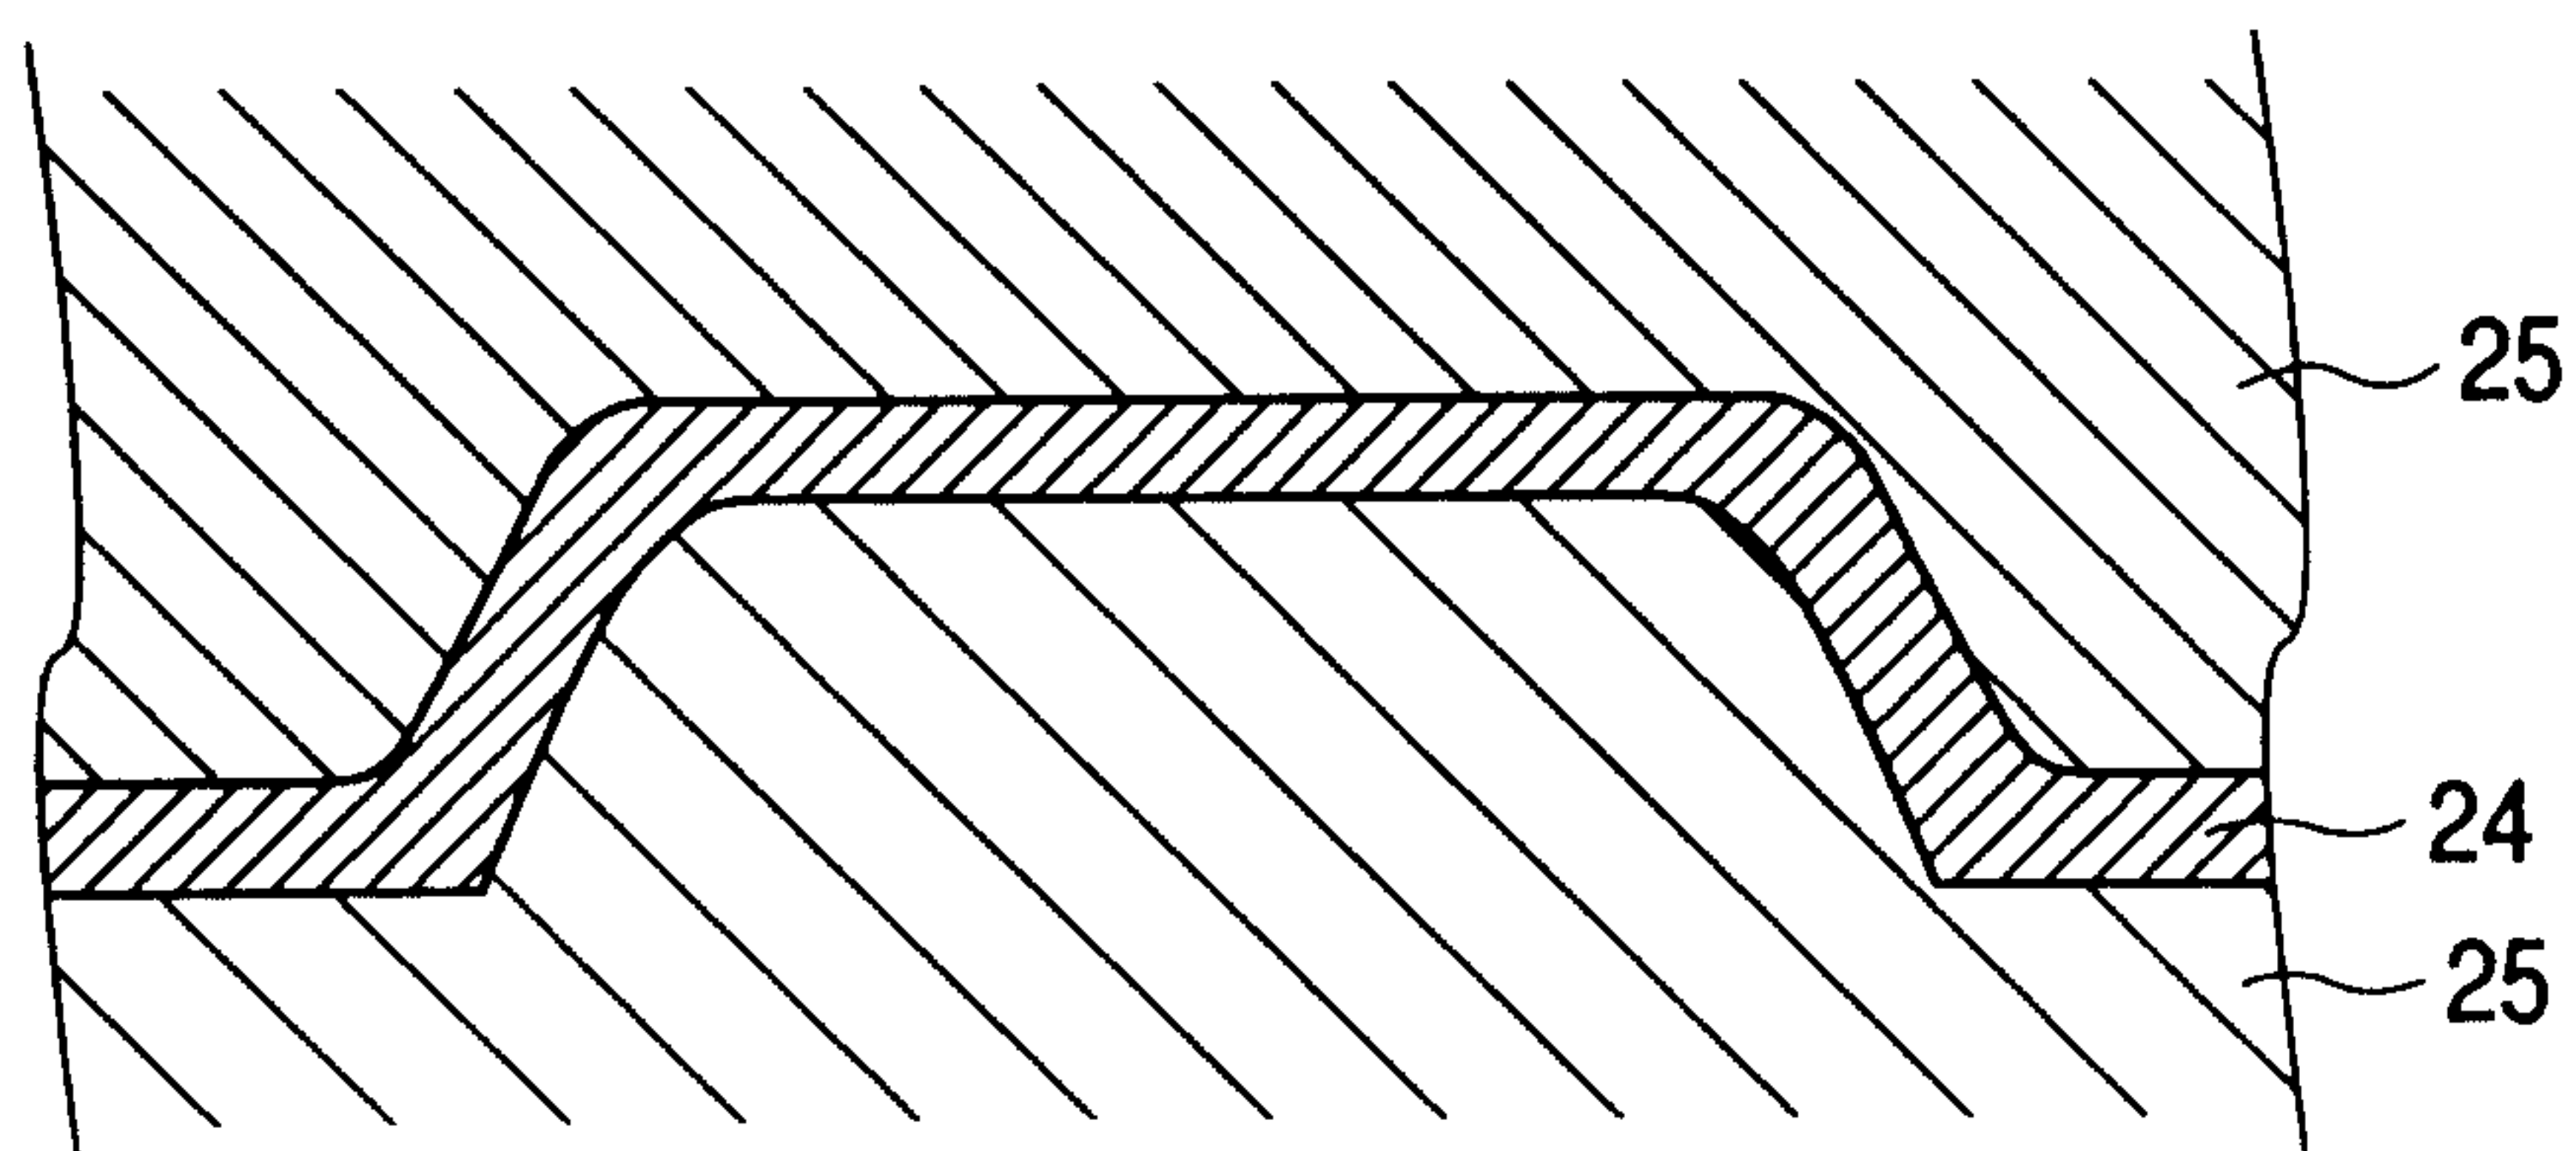
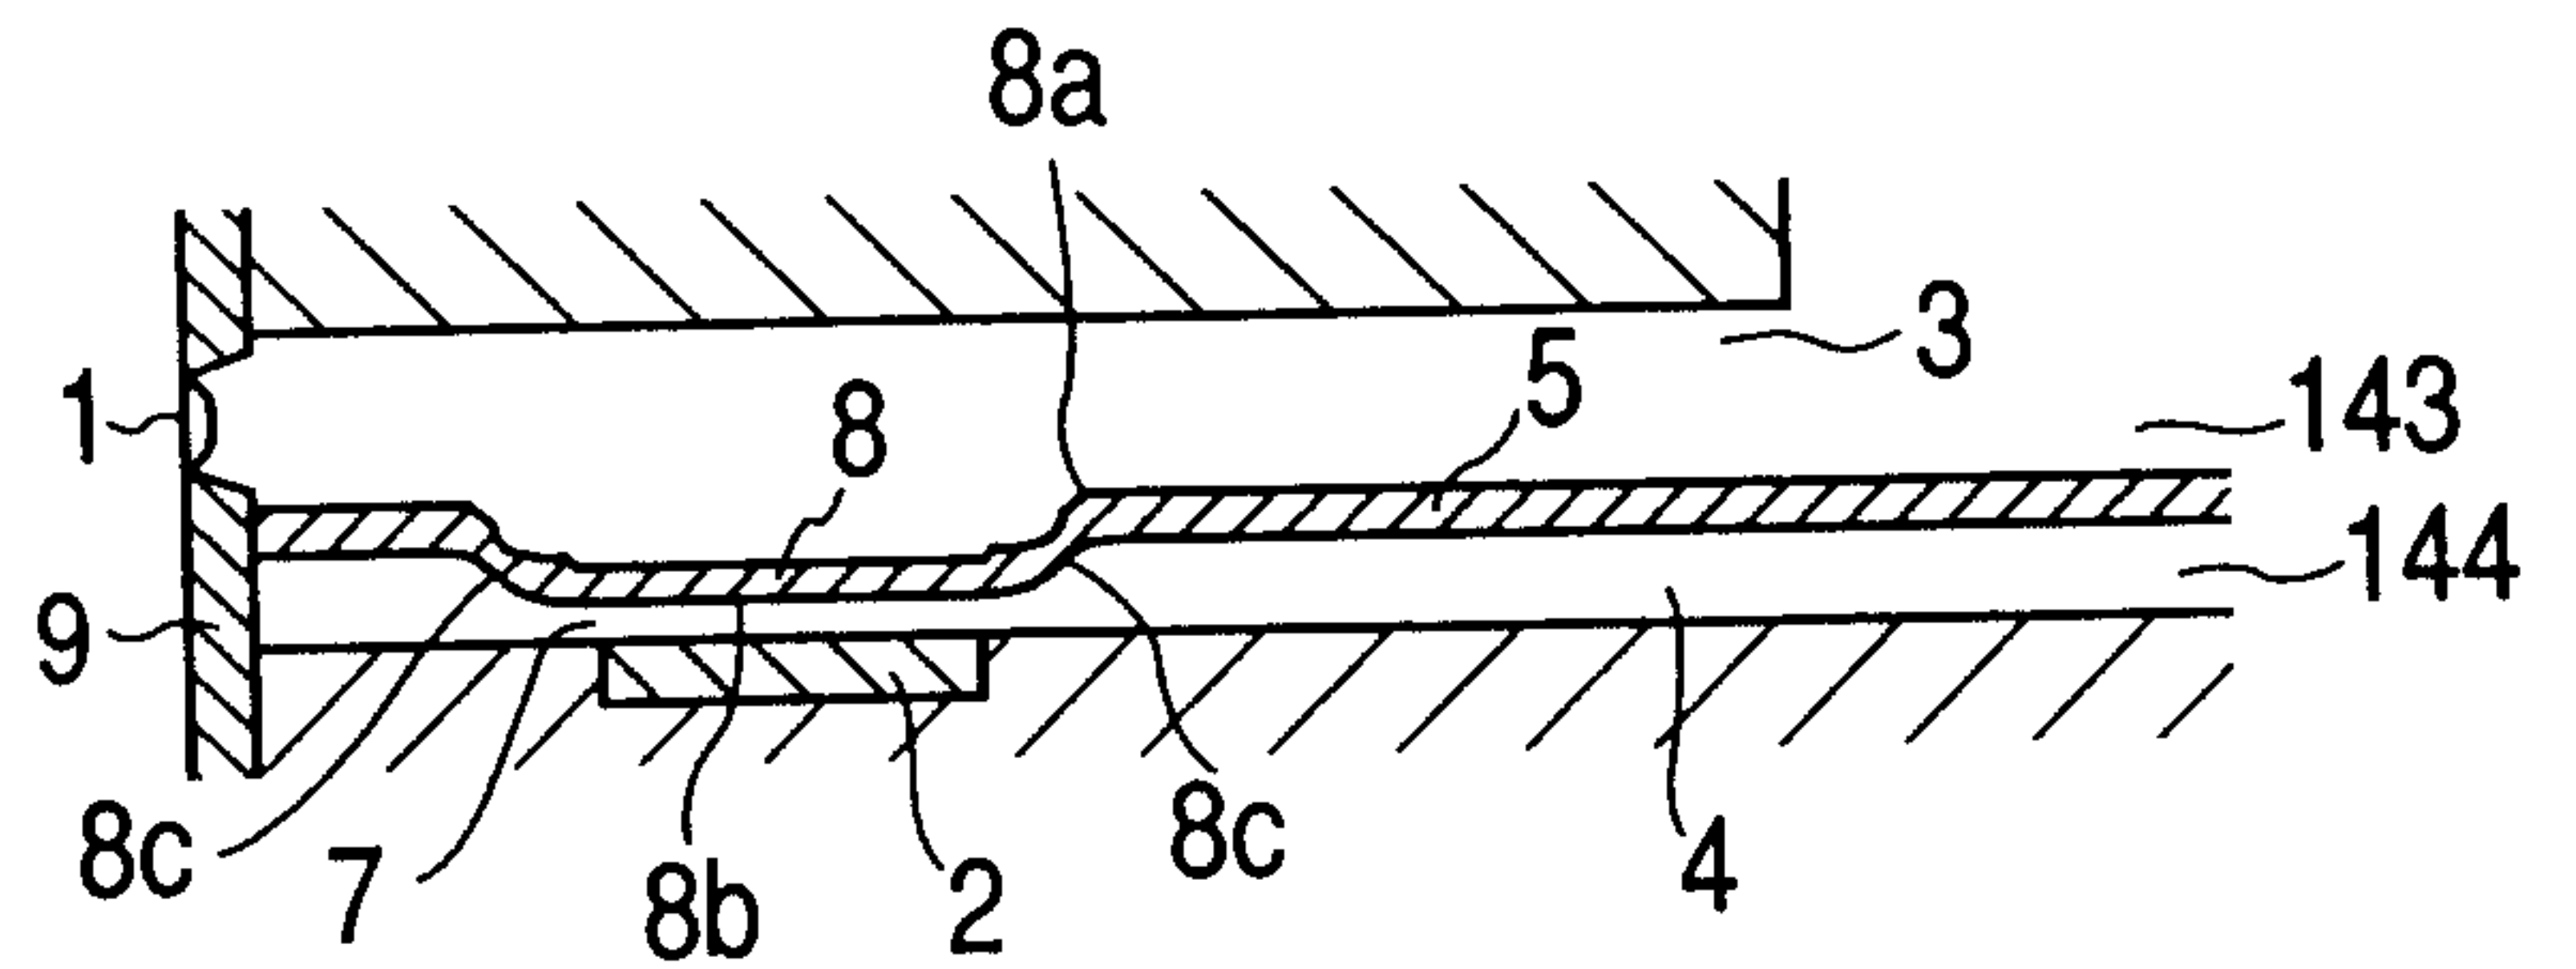
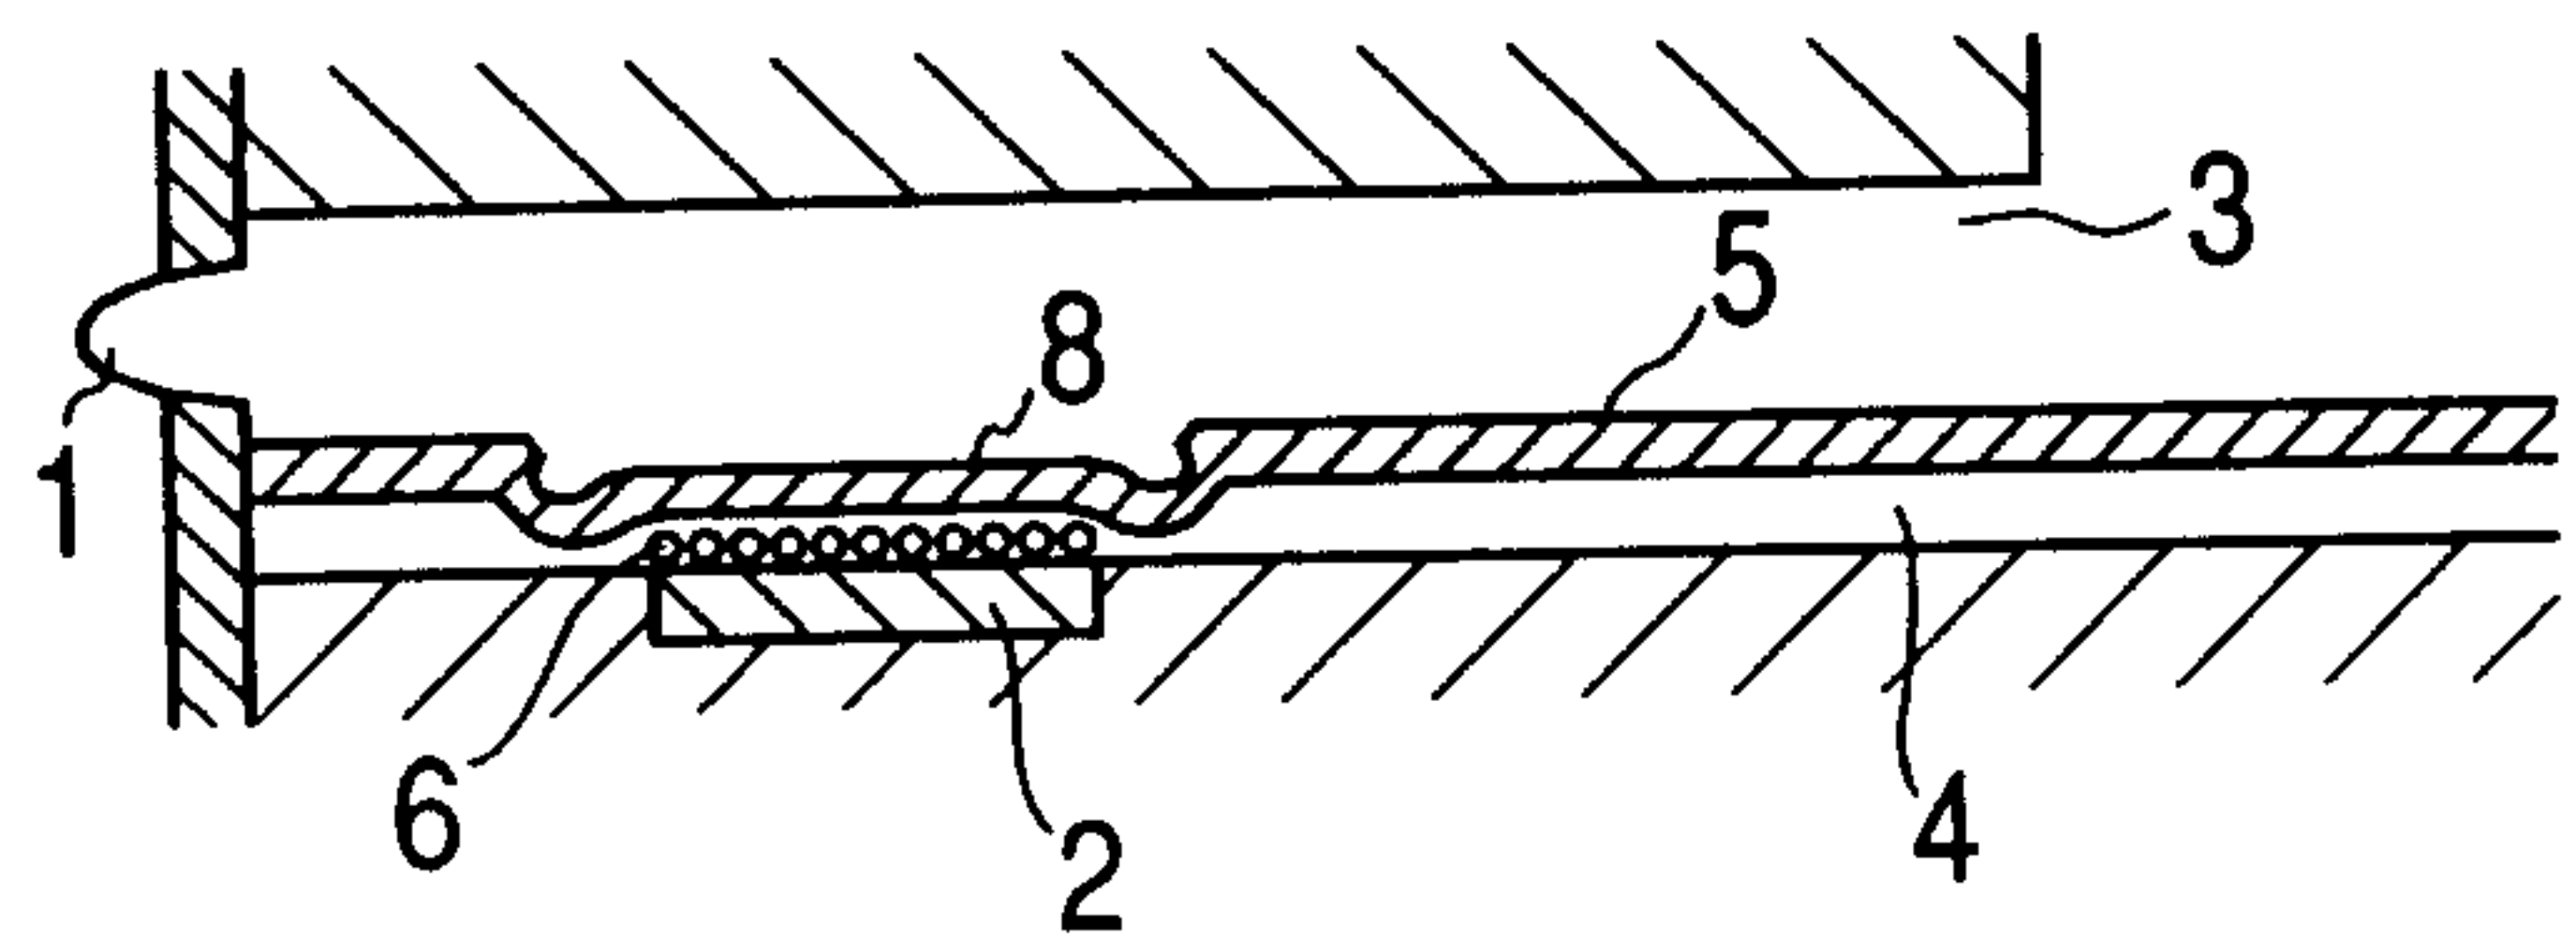
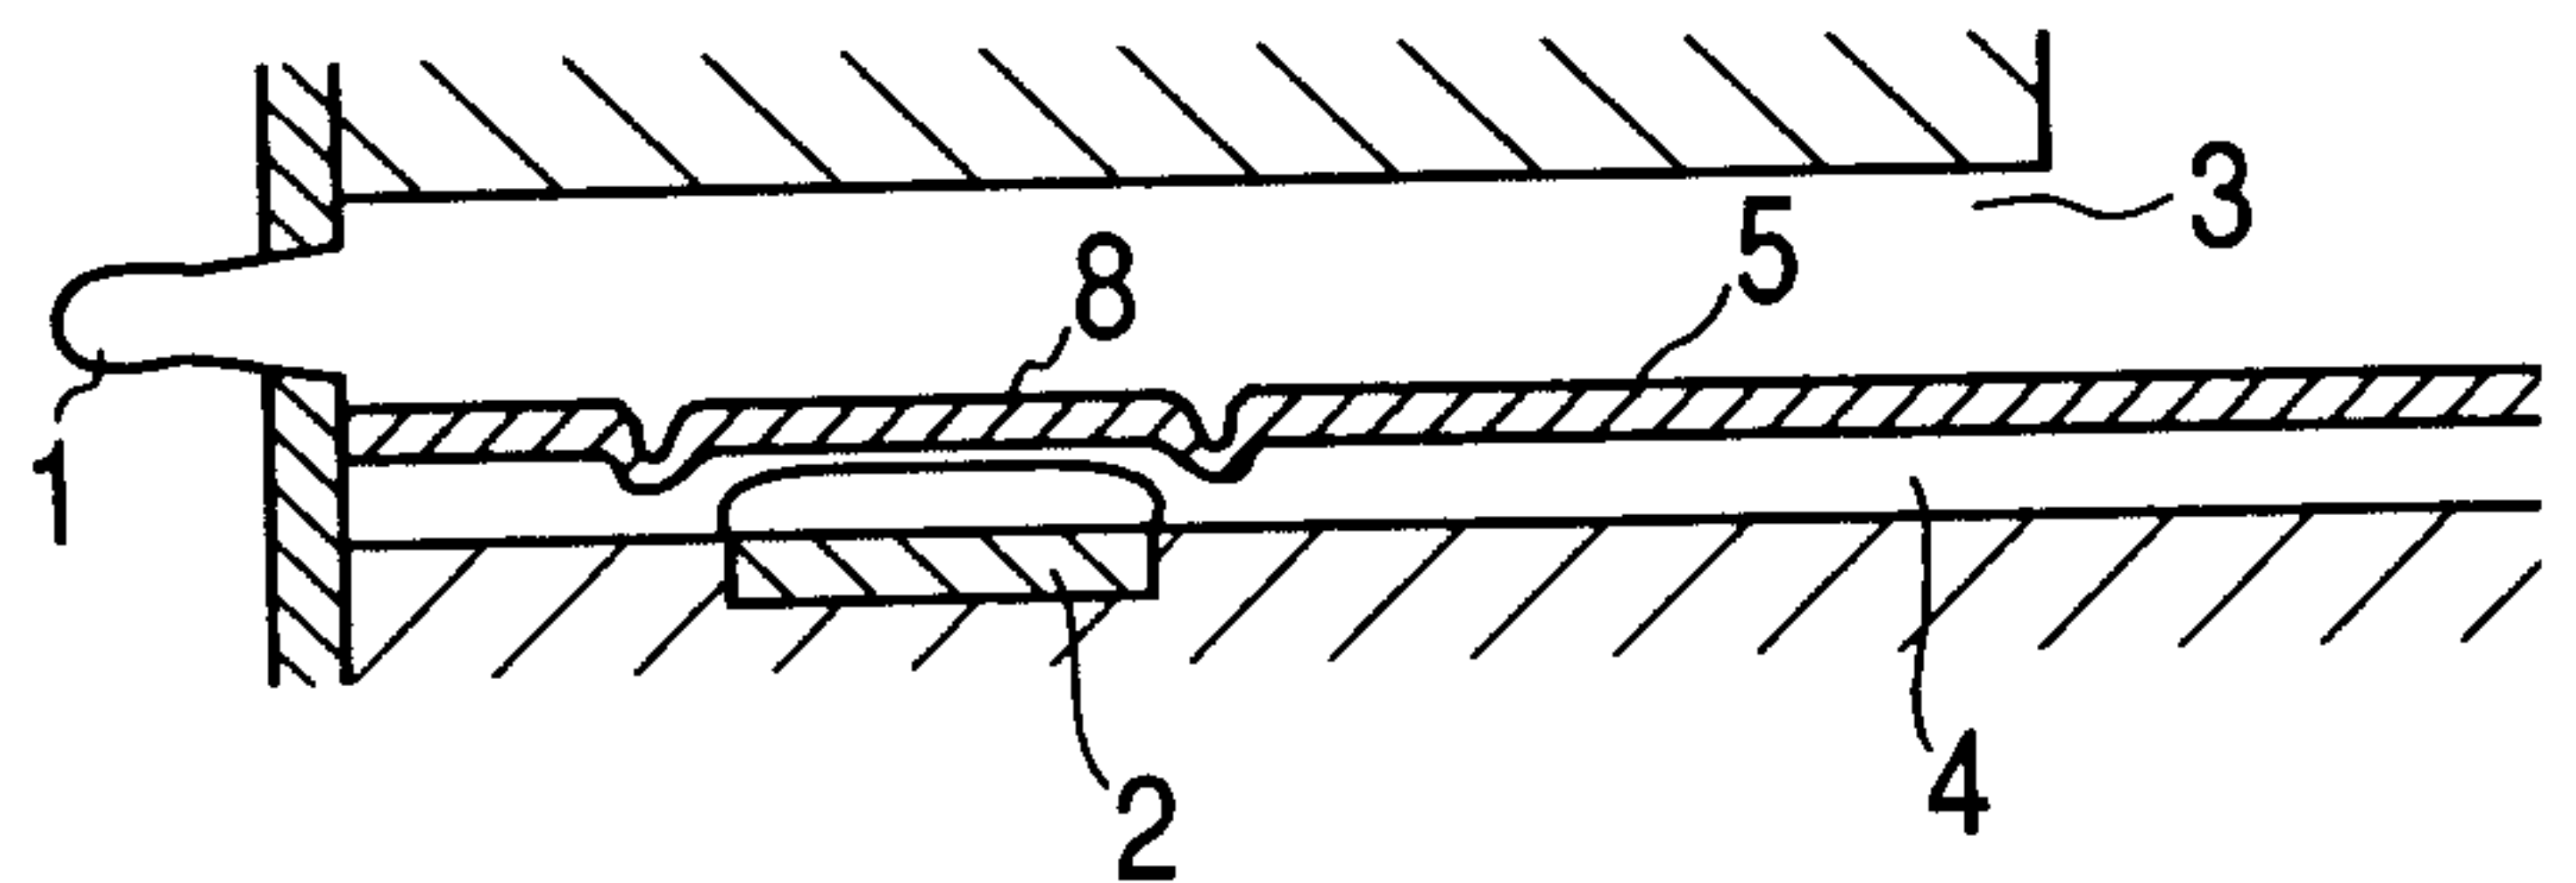
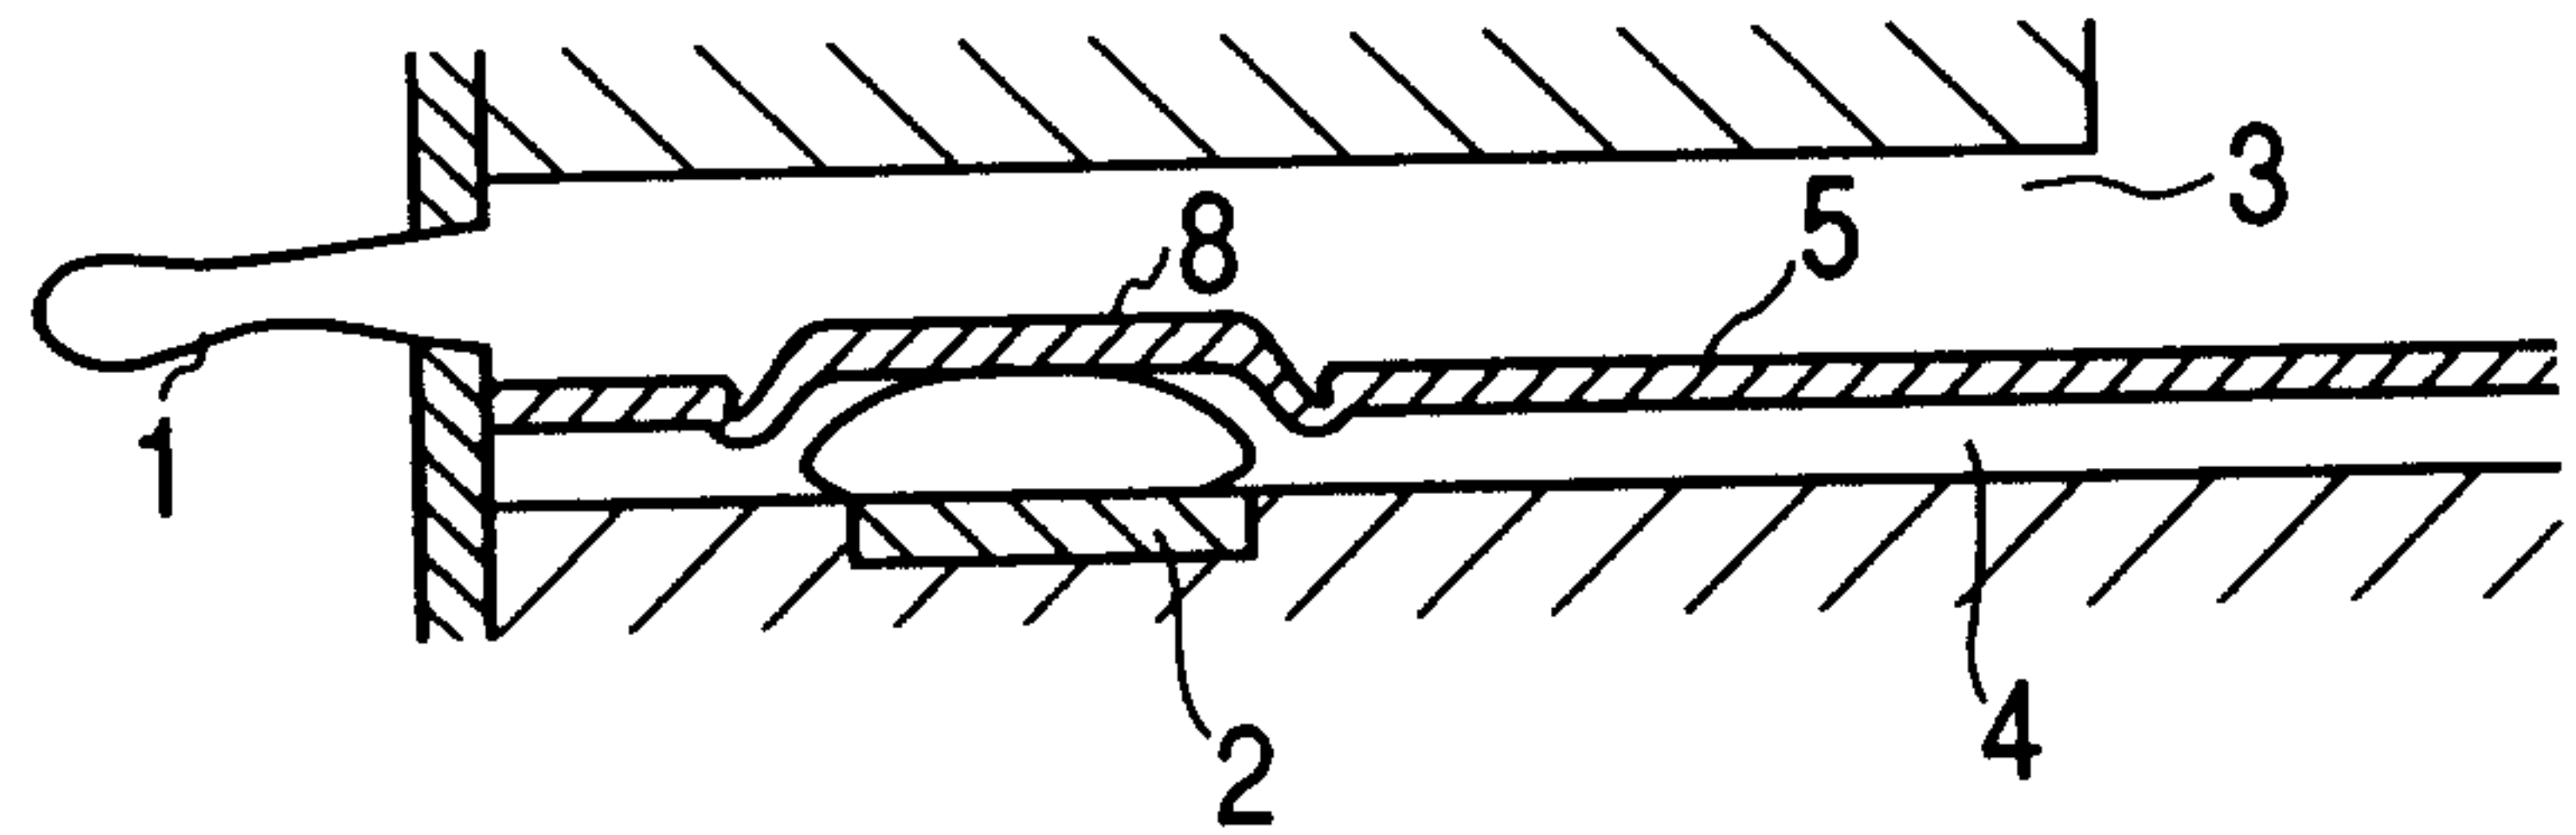
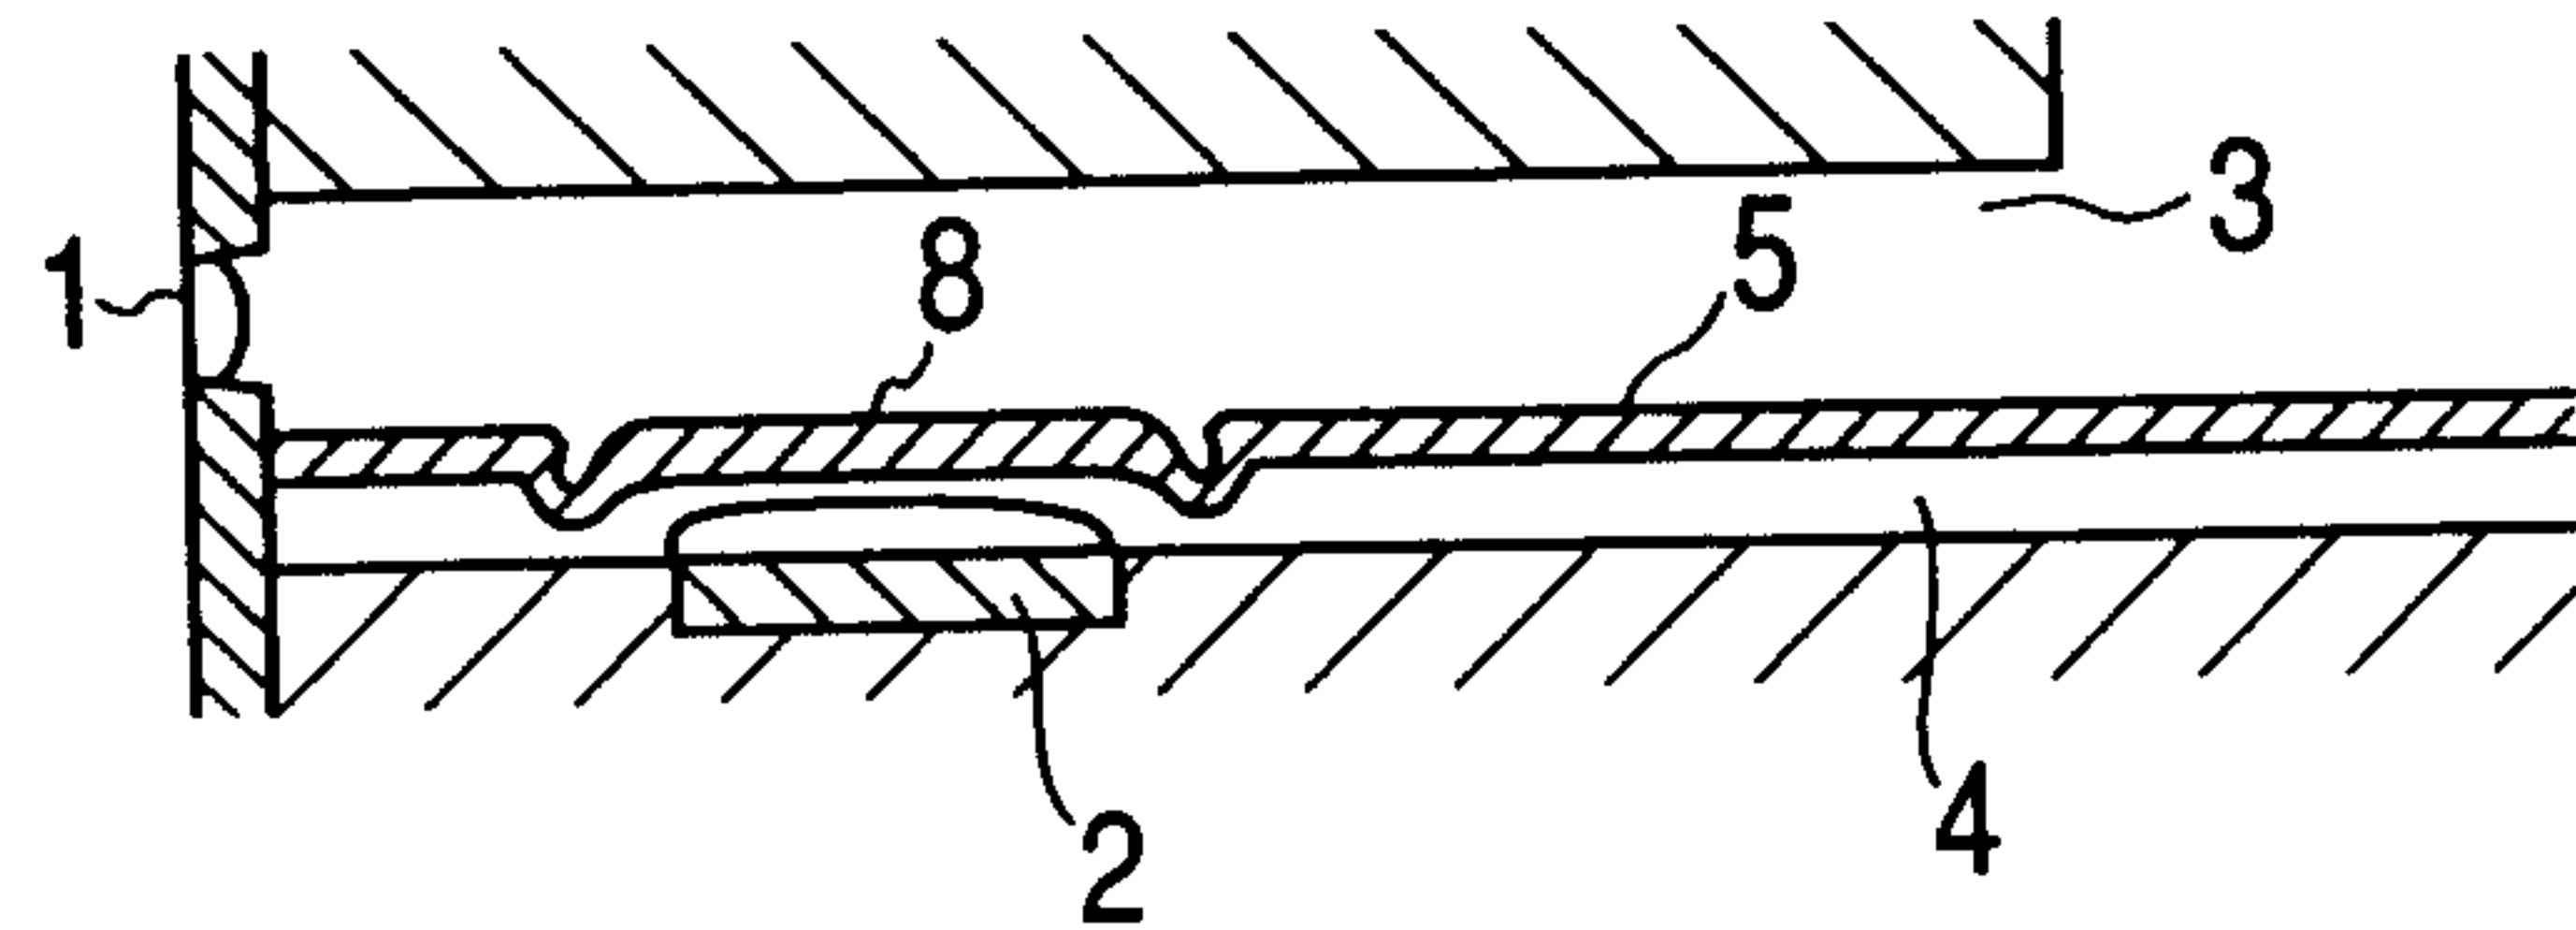
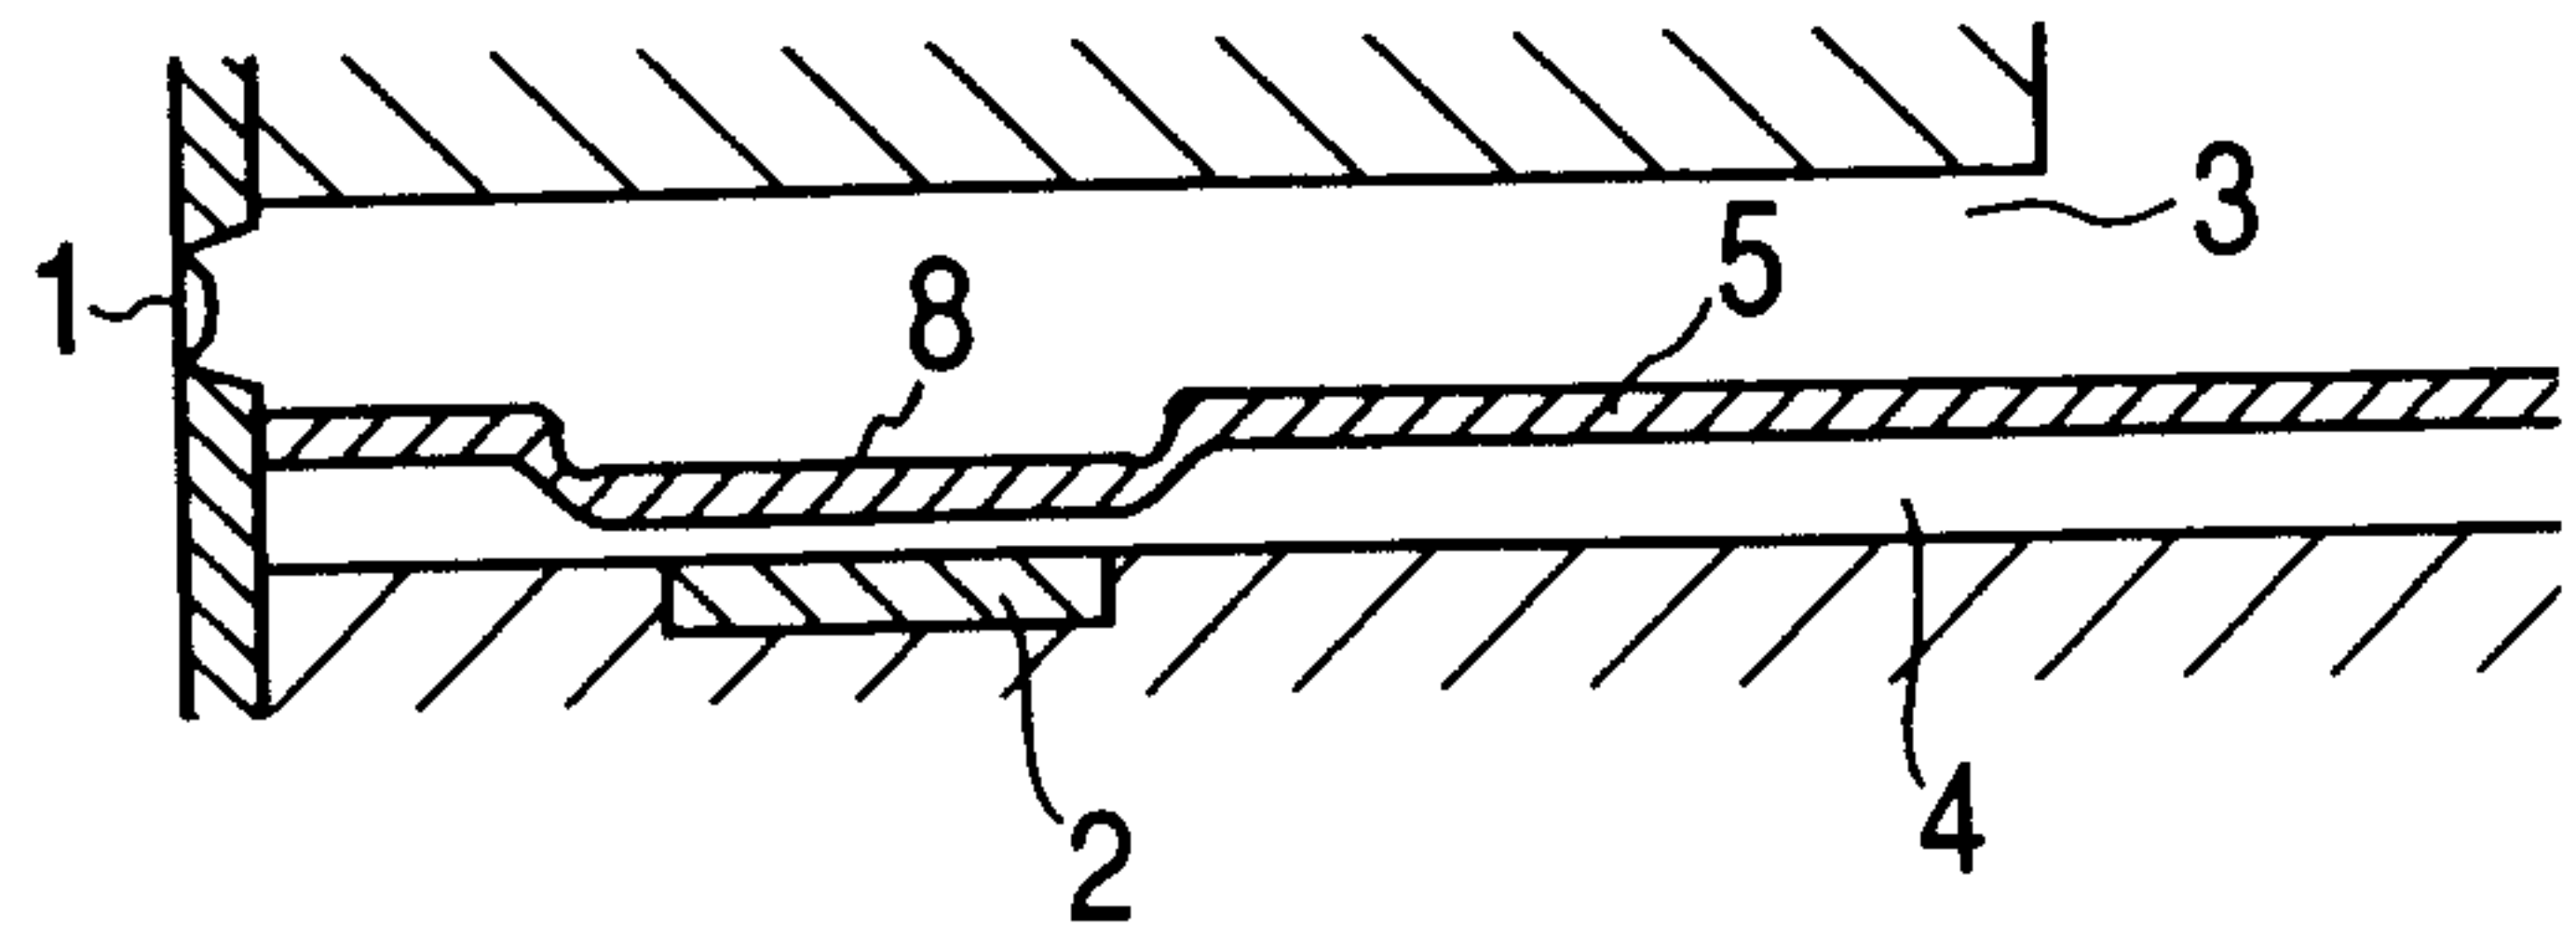


FIG. 12A**FIG. 12B****FIG. 12C****FIG. 12D****FIG. 12E****FIG. 12F**

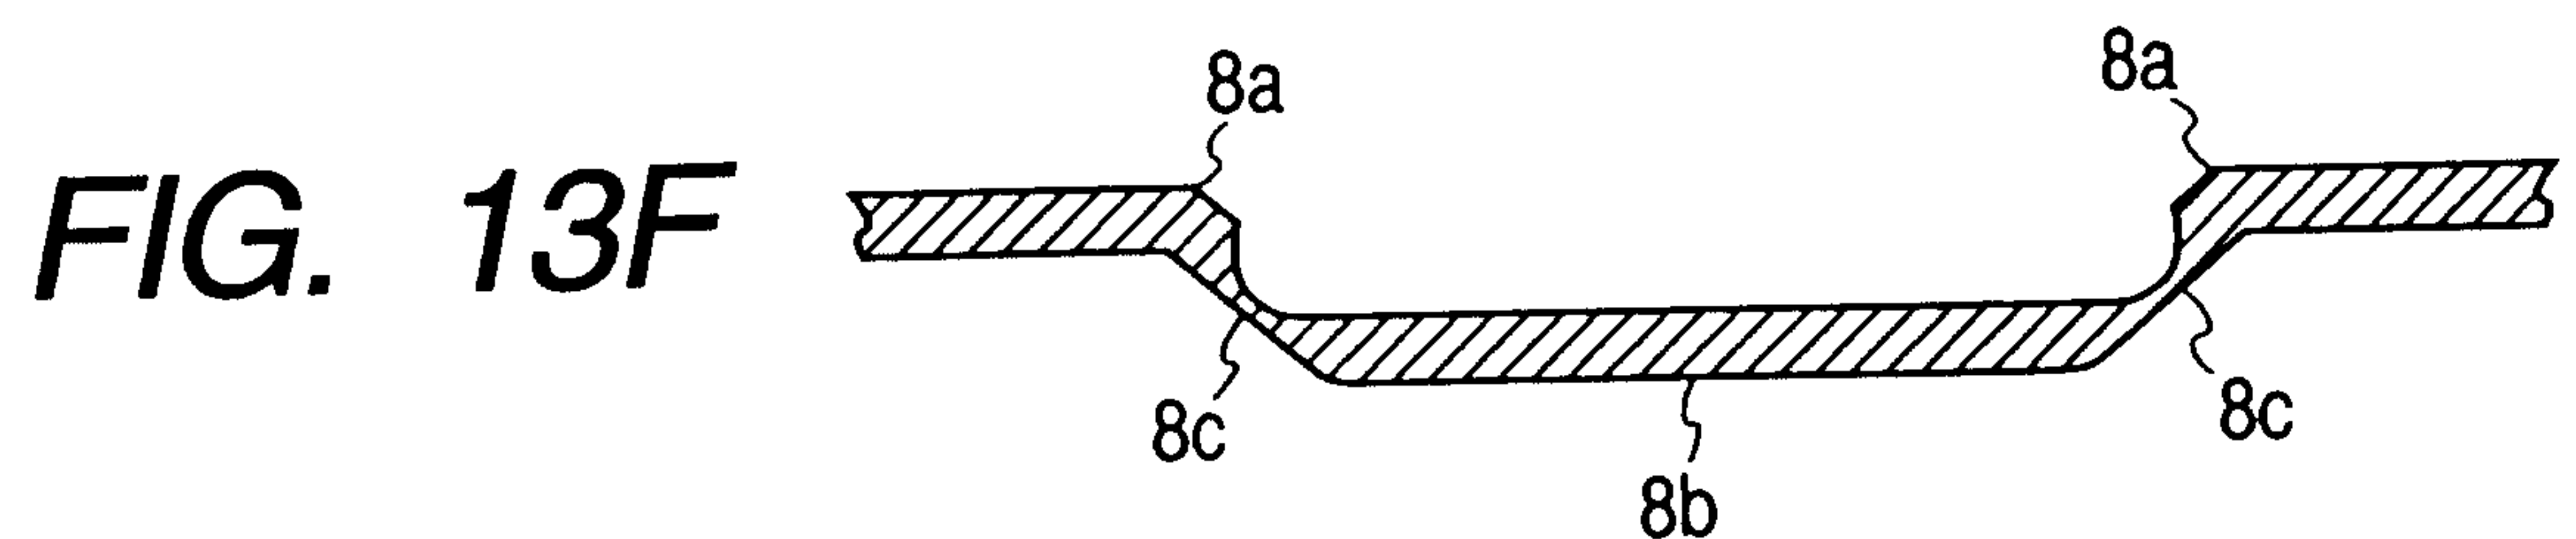
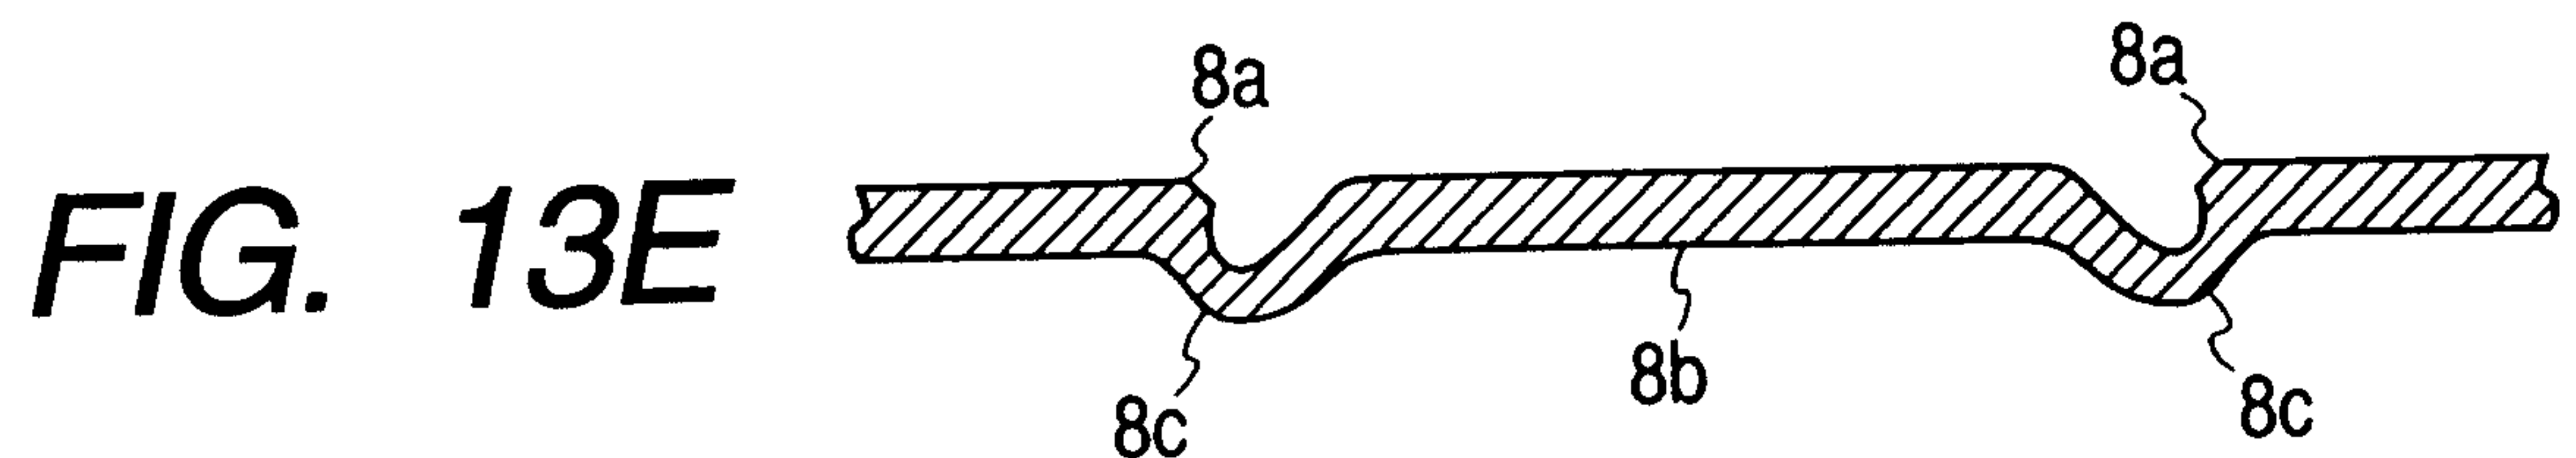
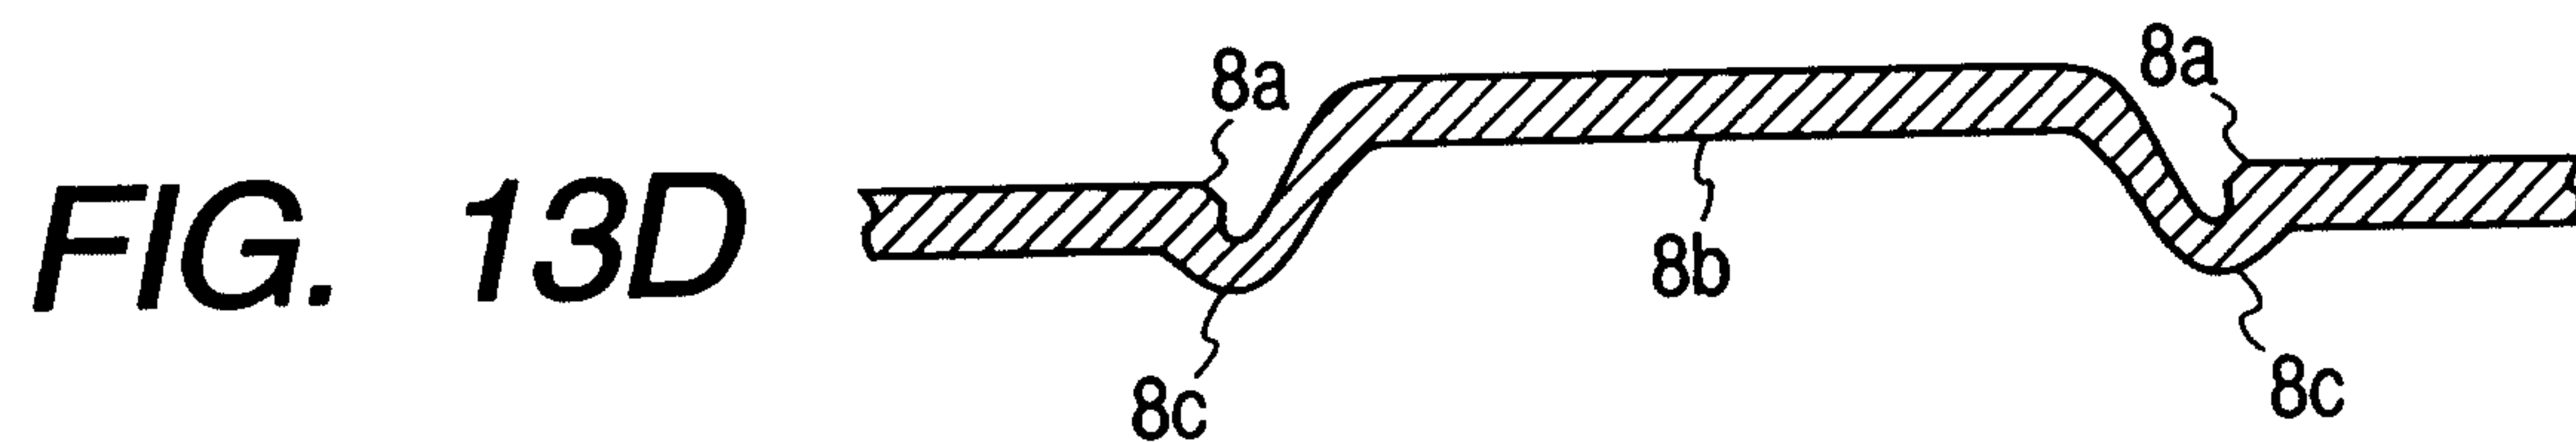
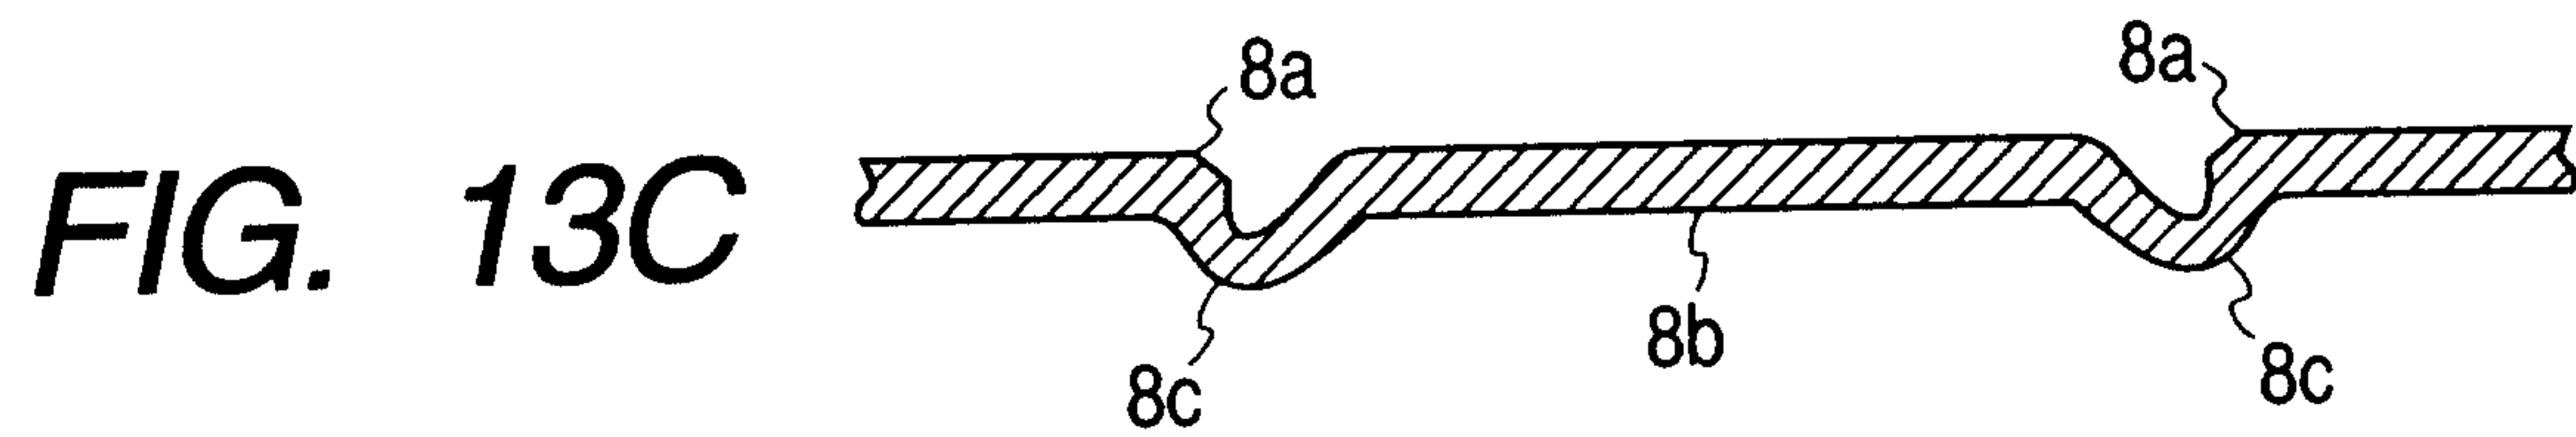
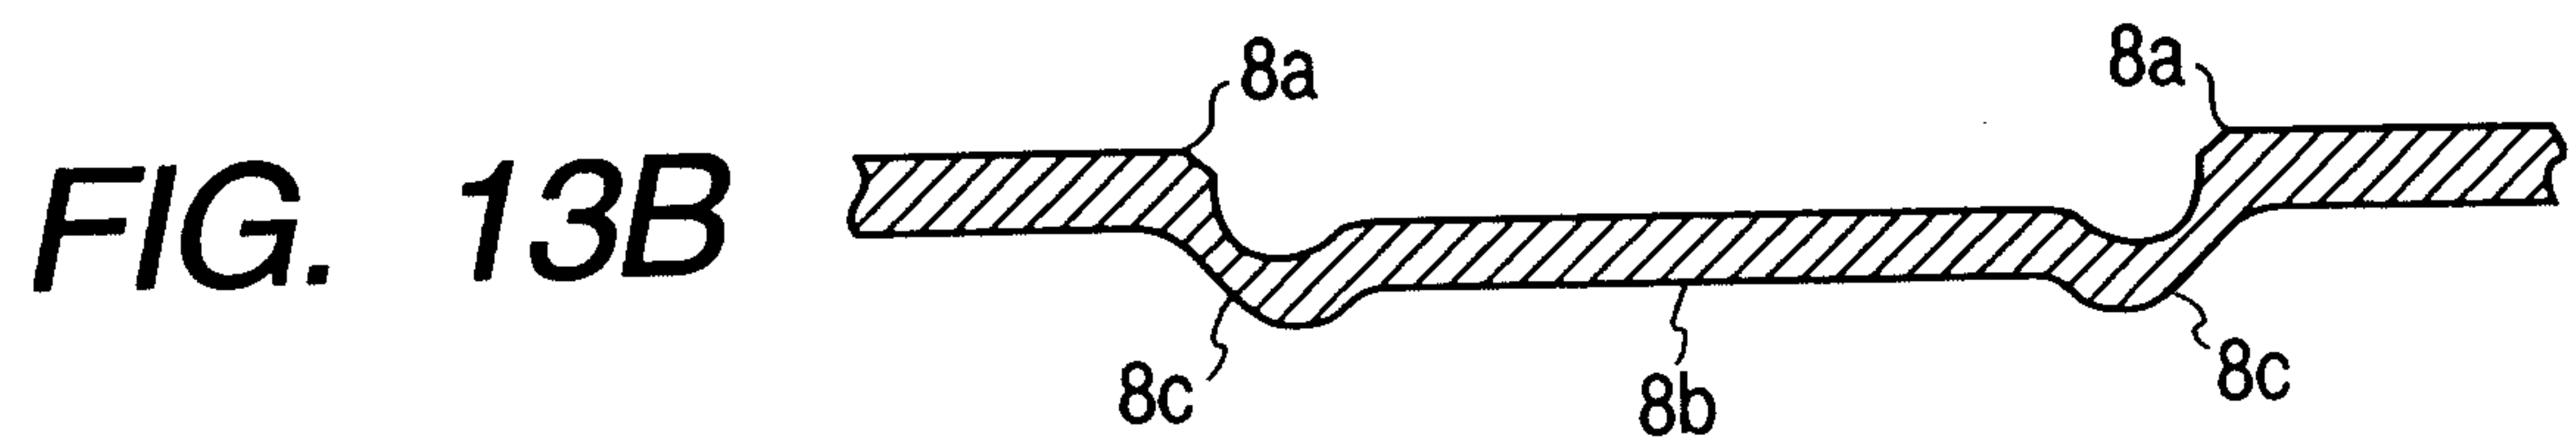
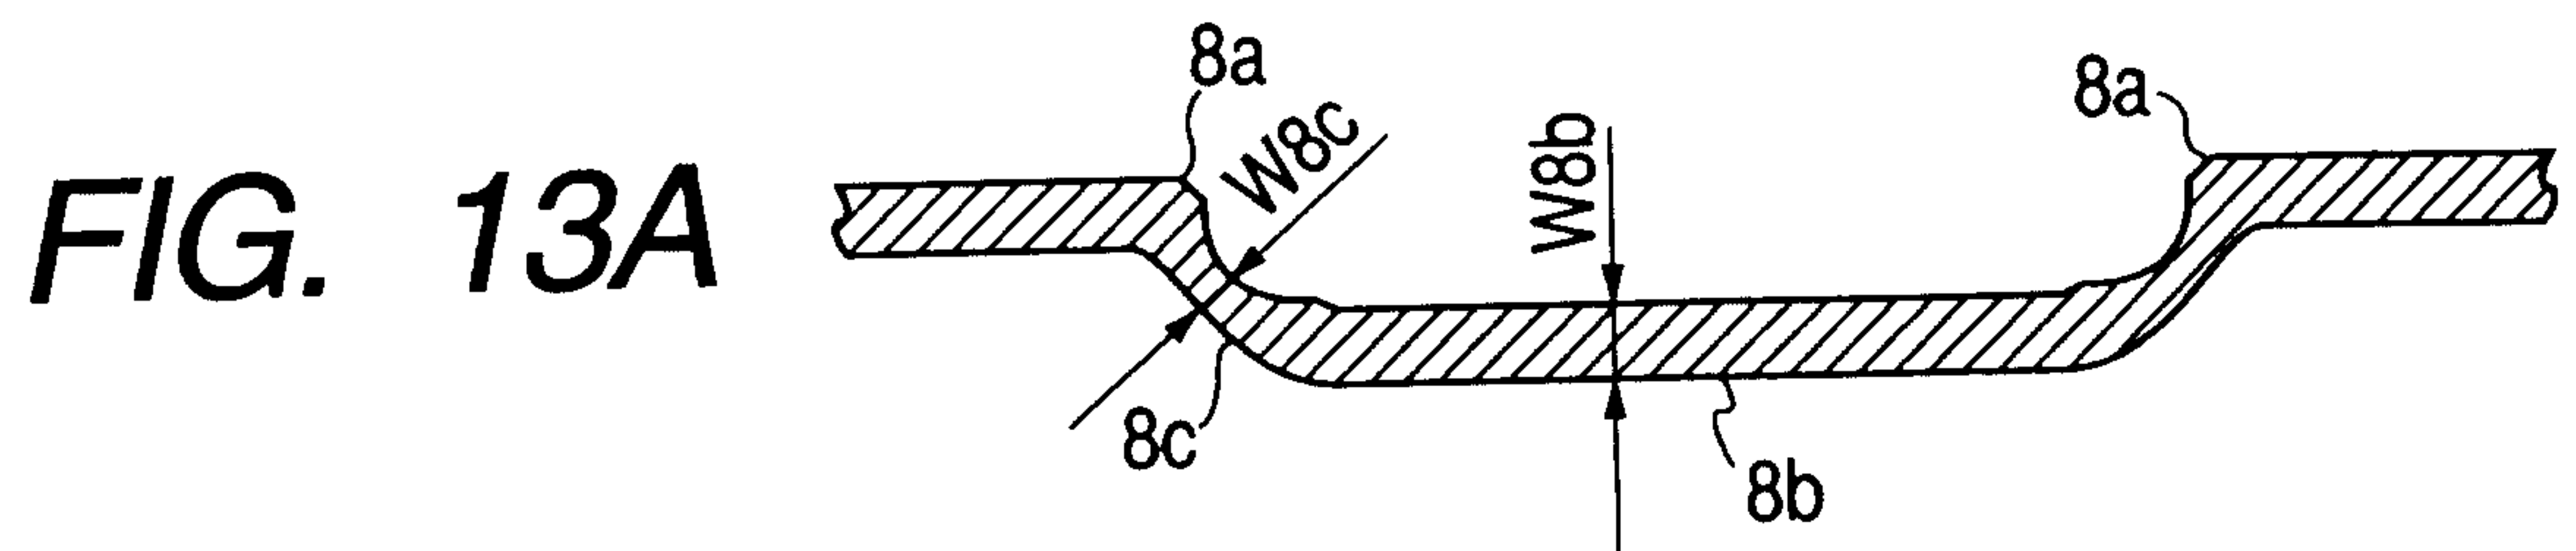


FIG. 14

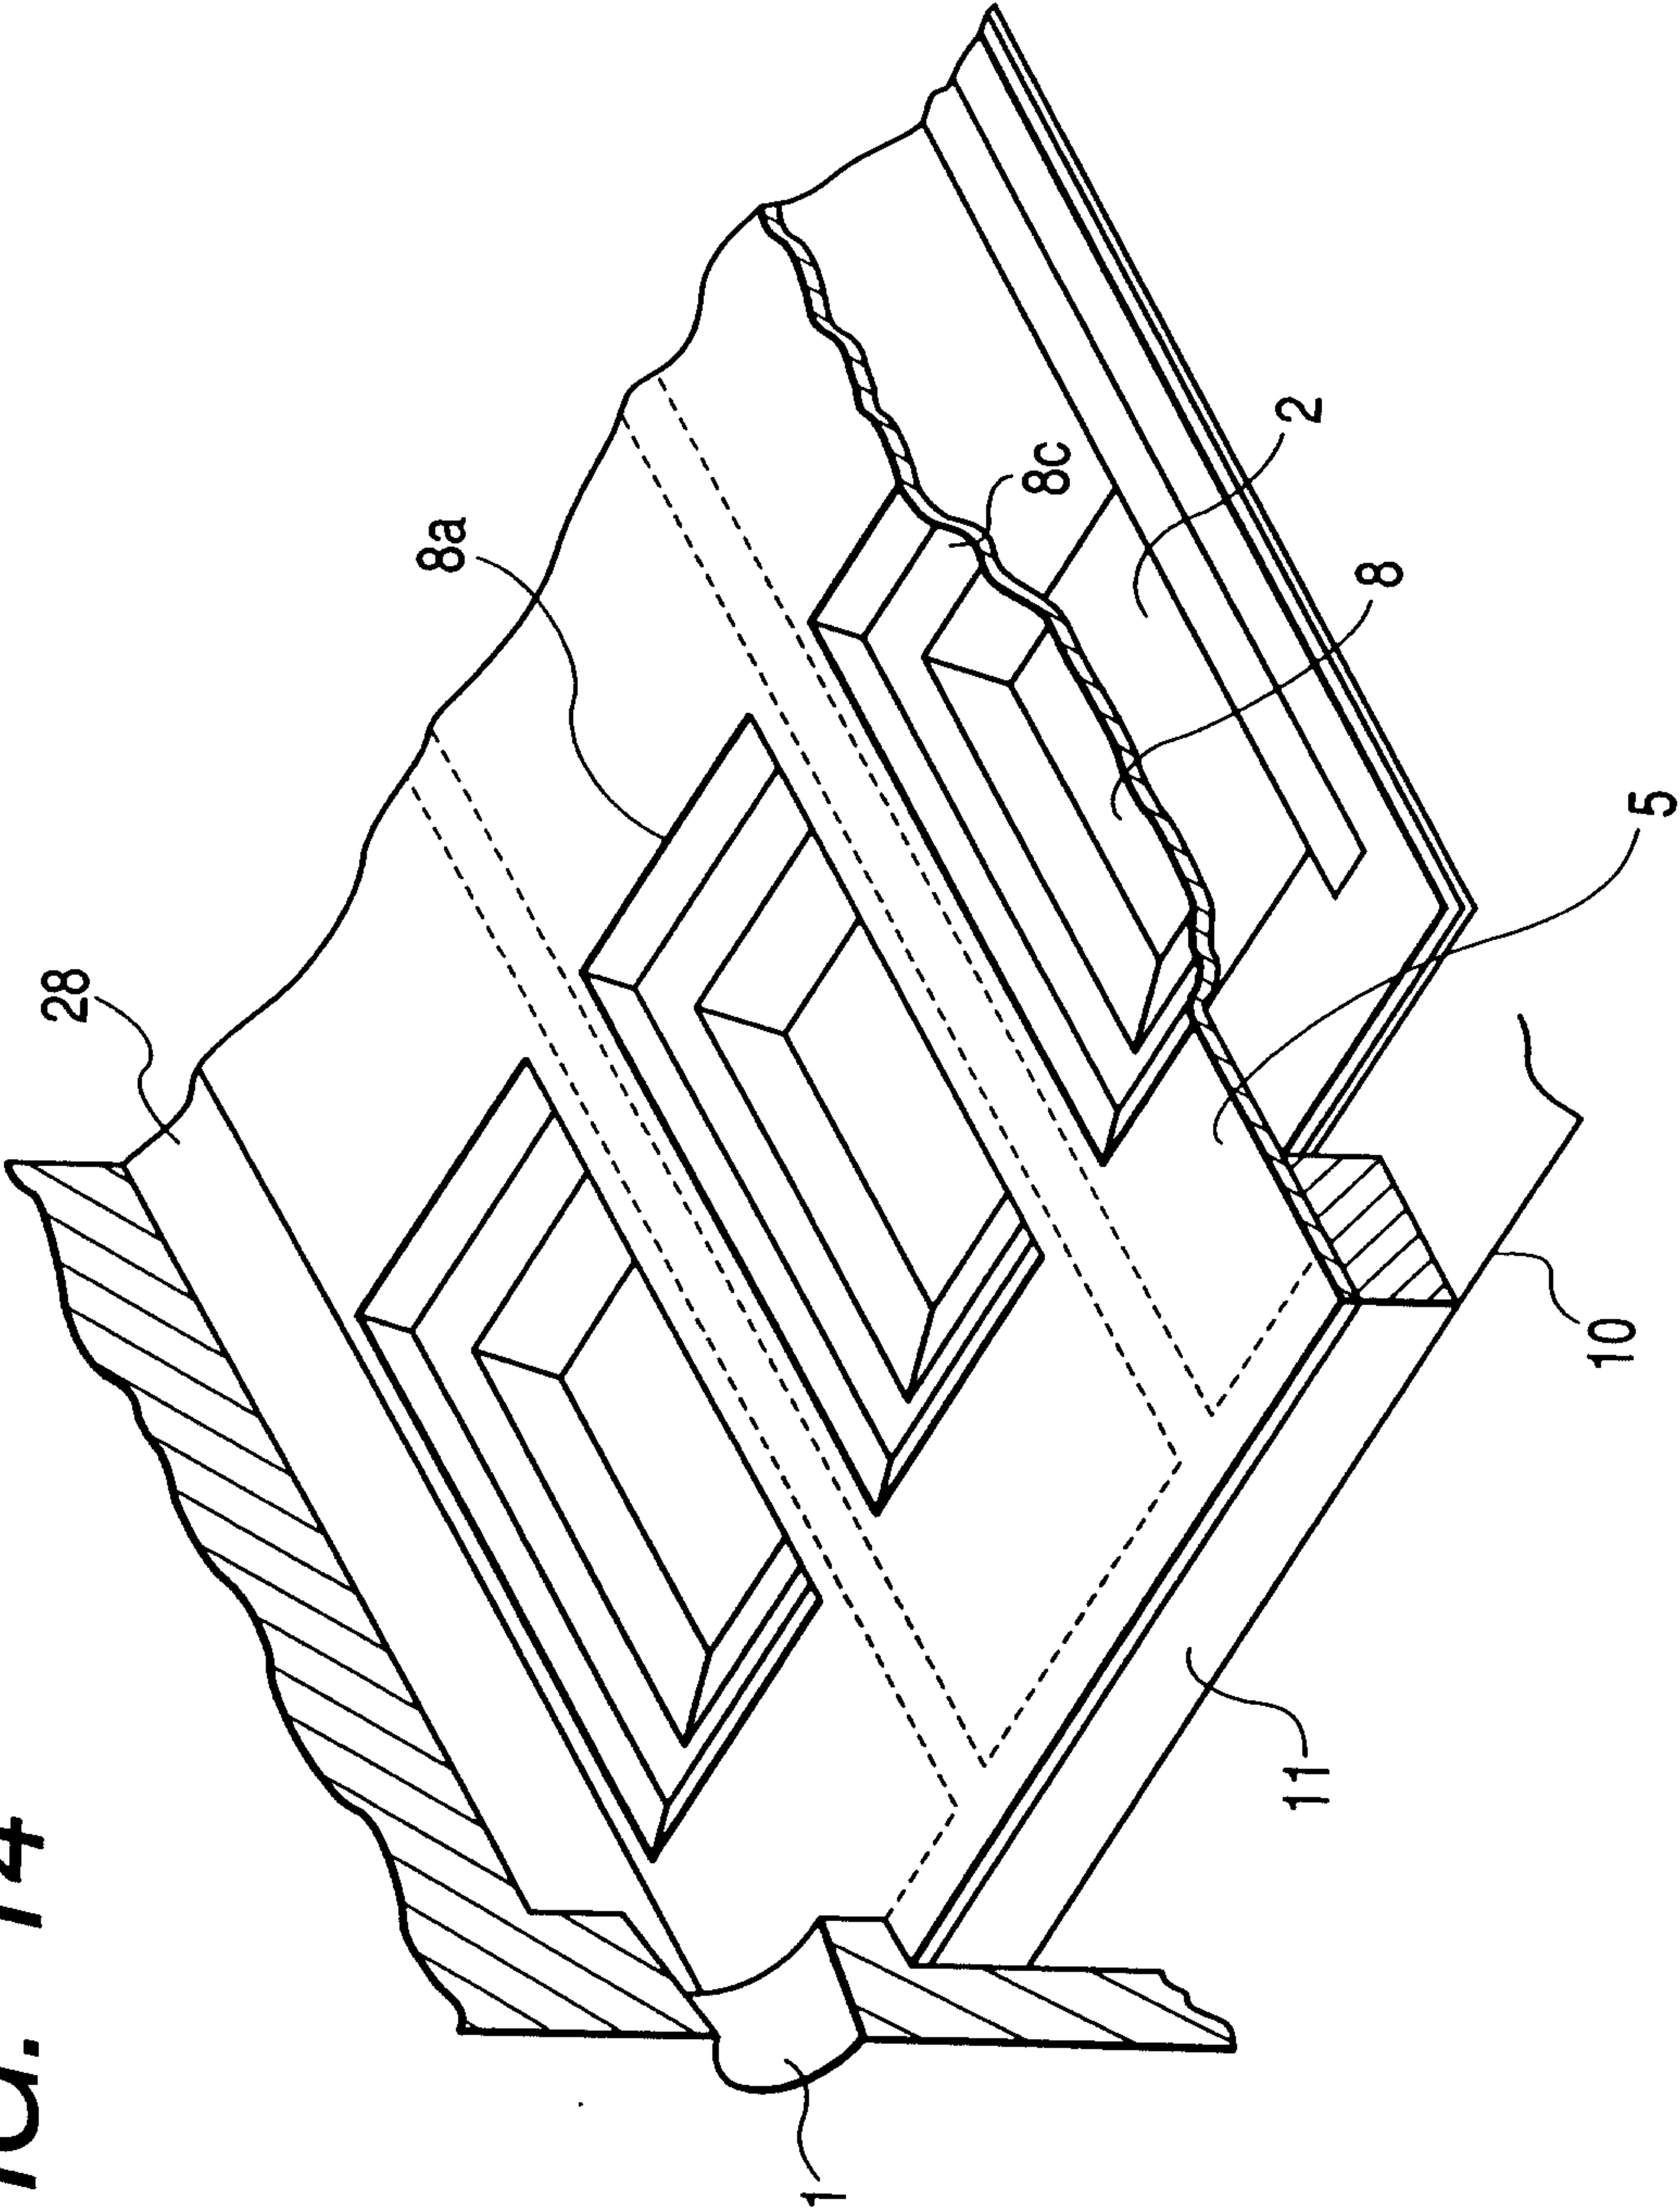


FIG. 15A

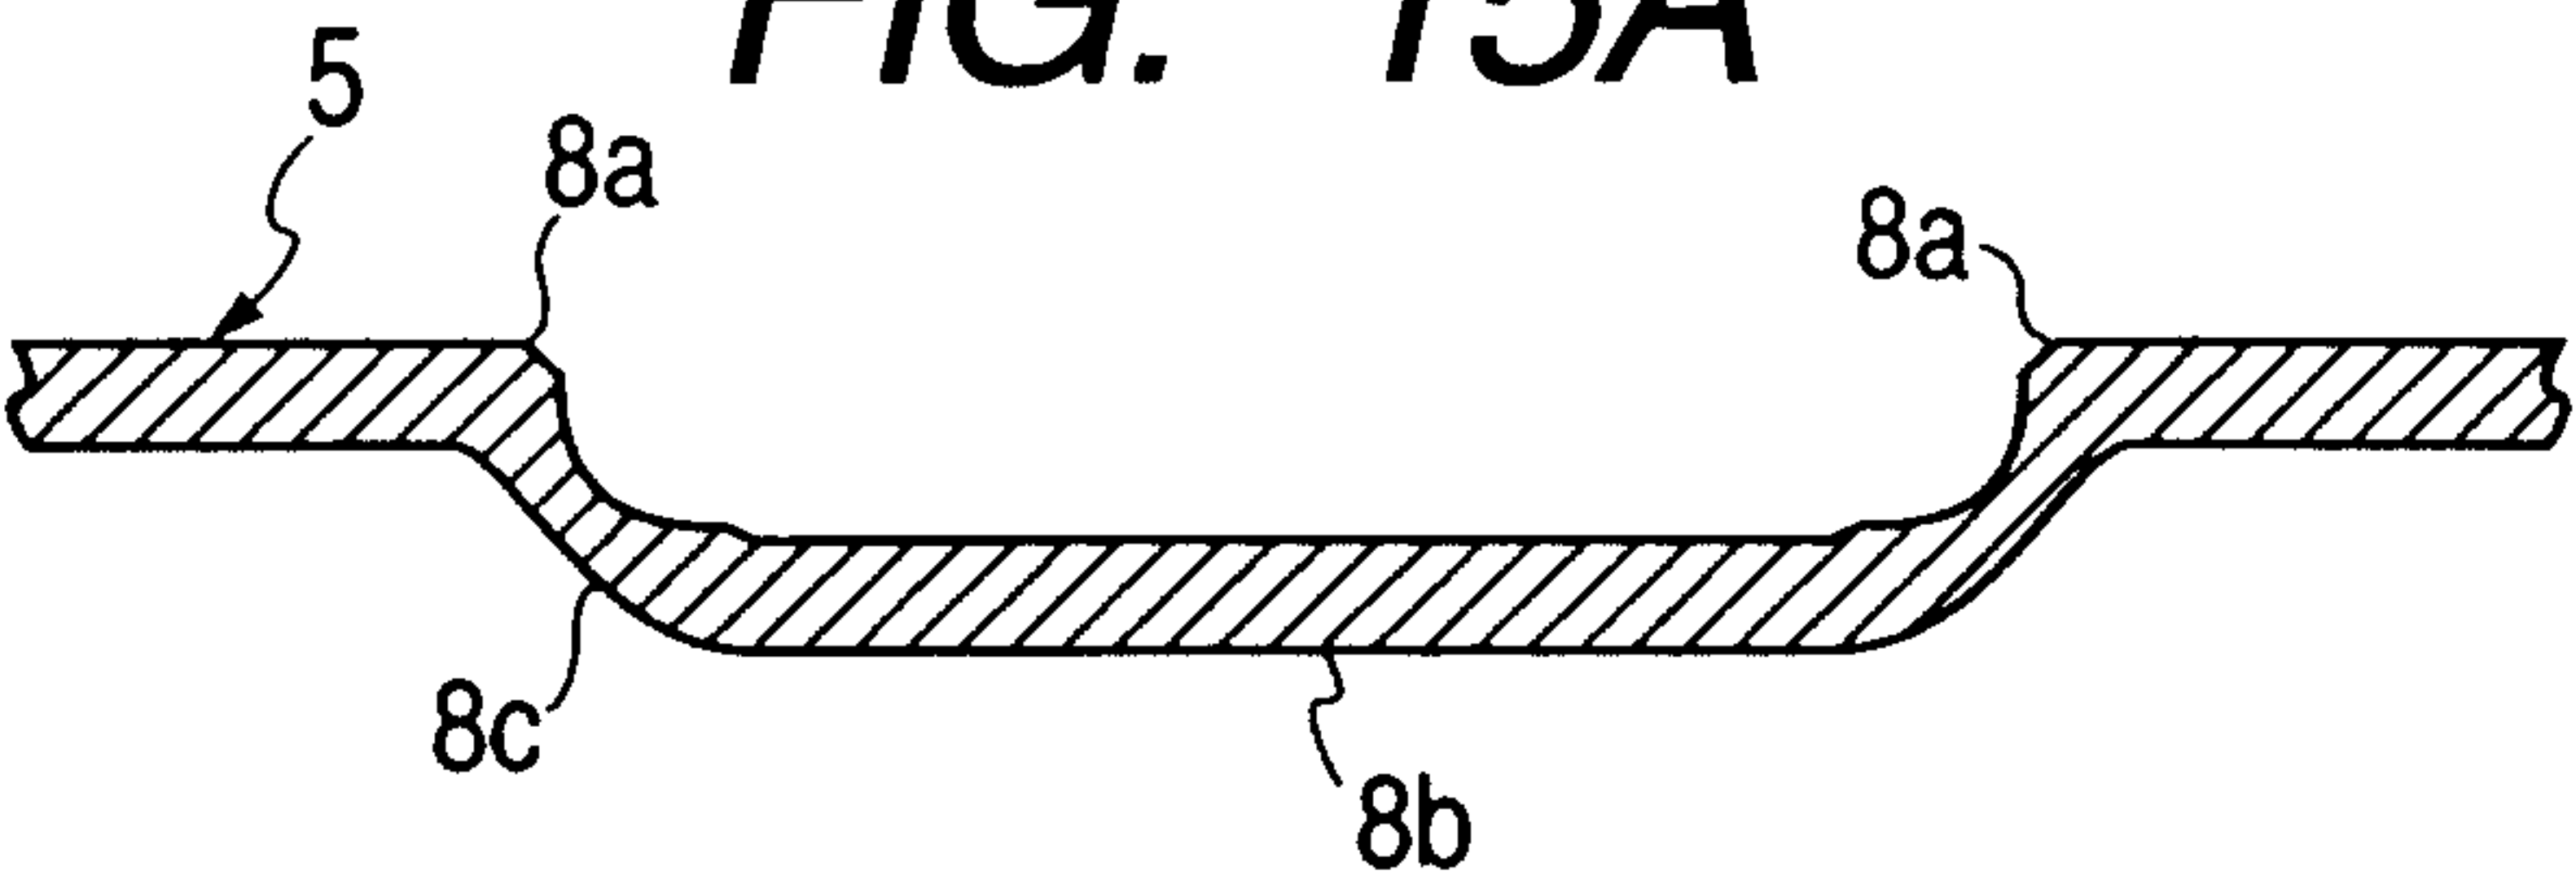


FIG. 15B

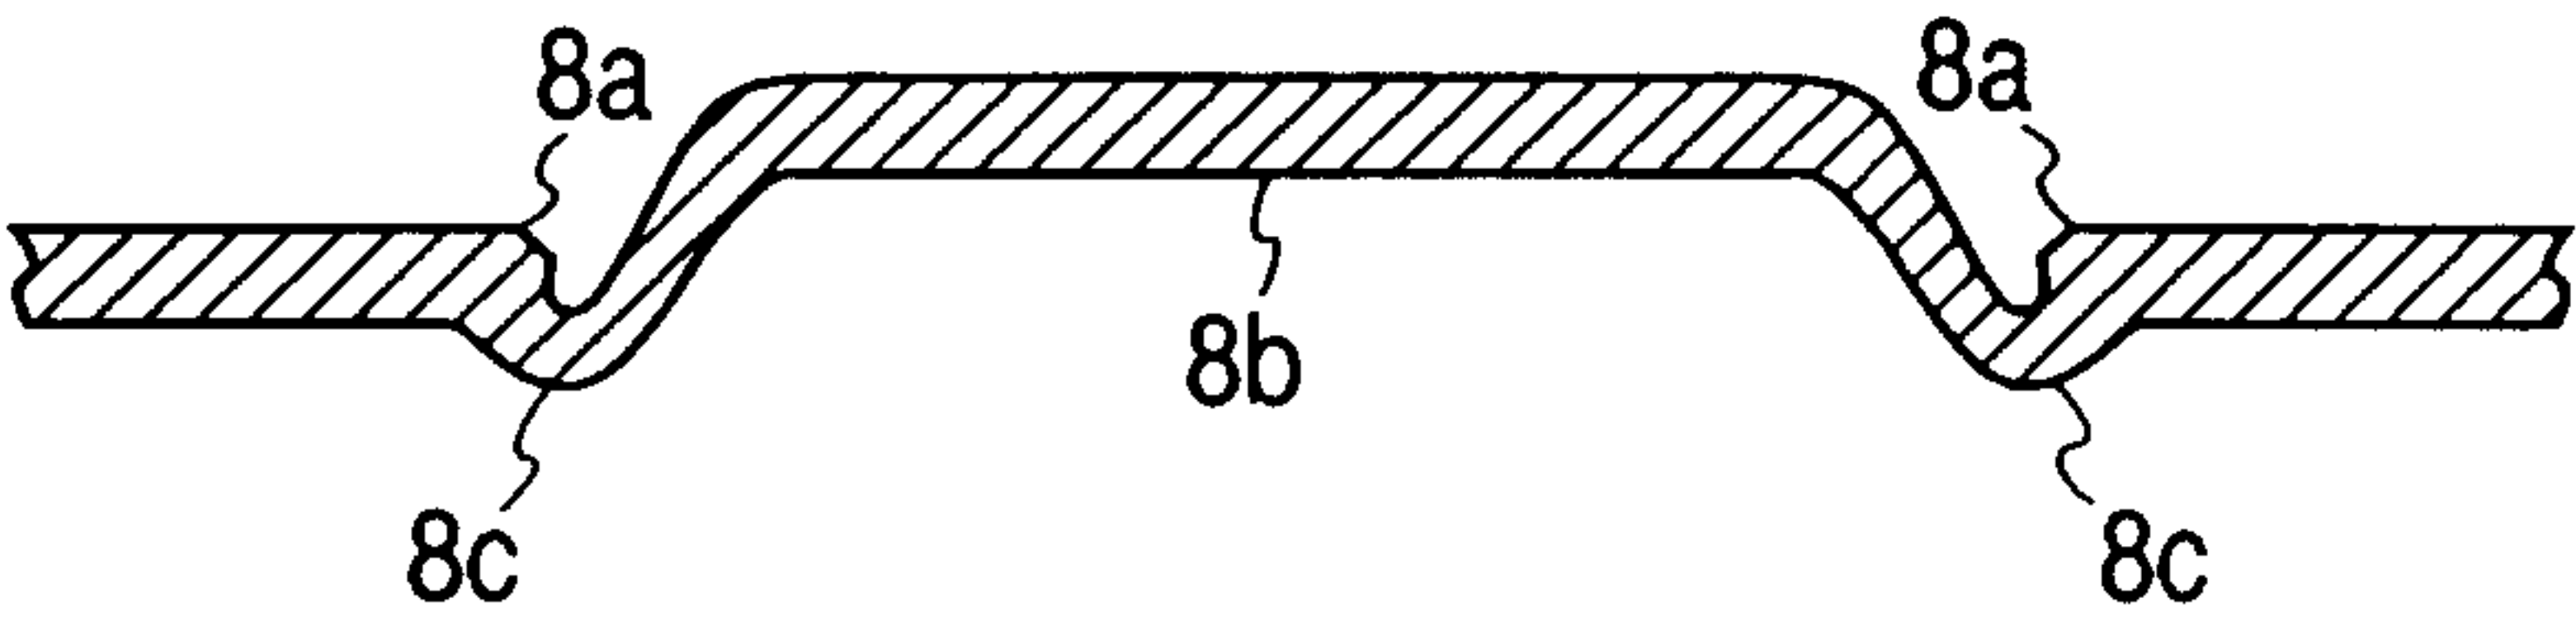
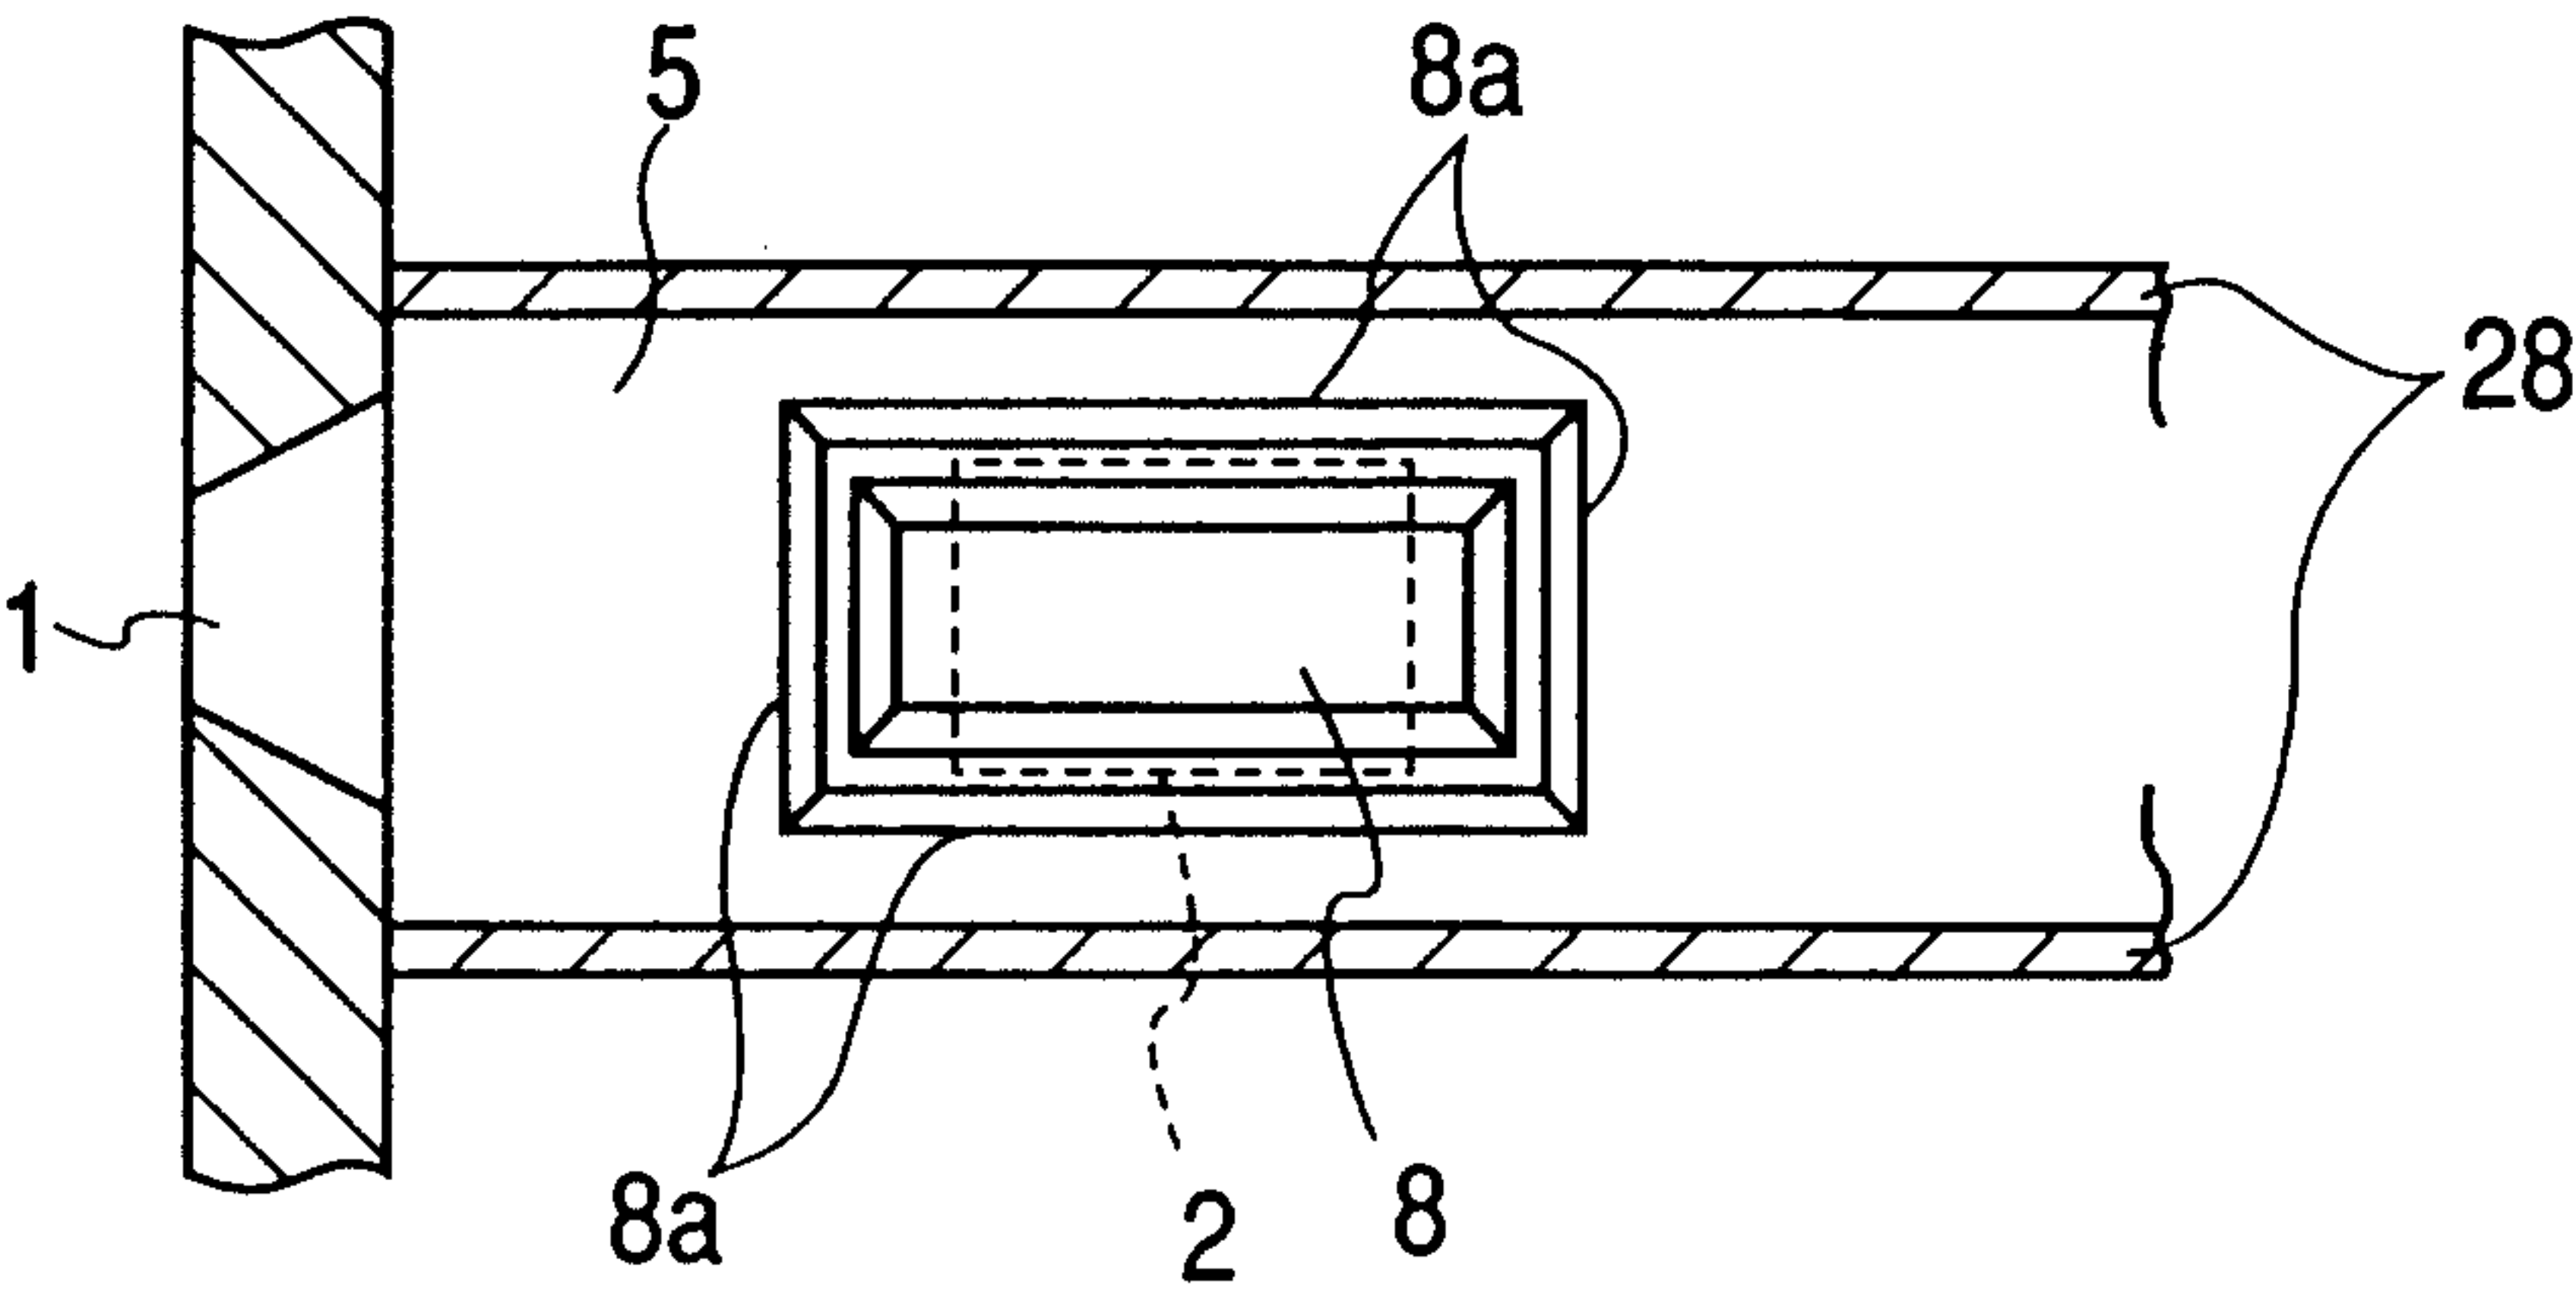


FIG. 16



13 / 29

FIG. 17A

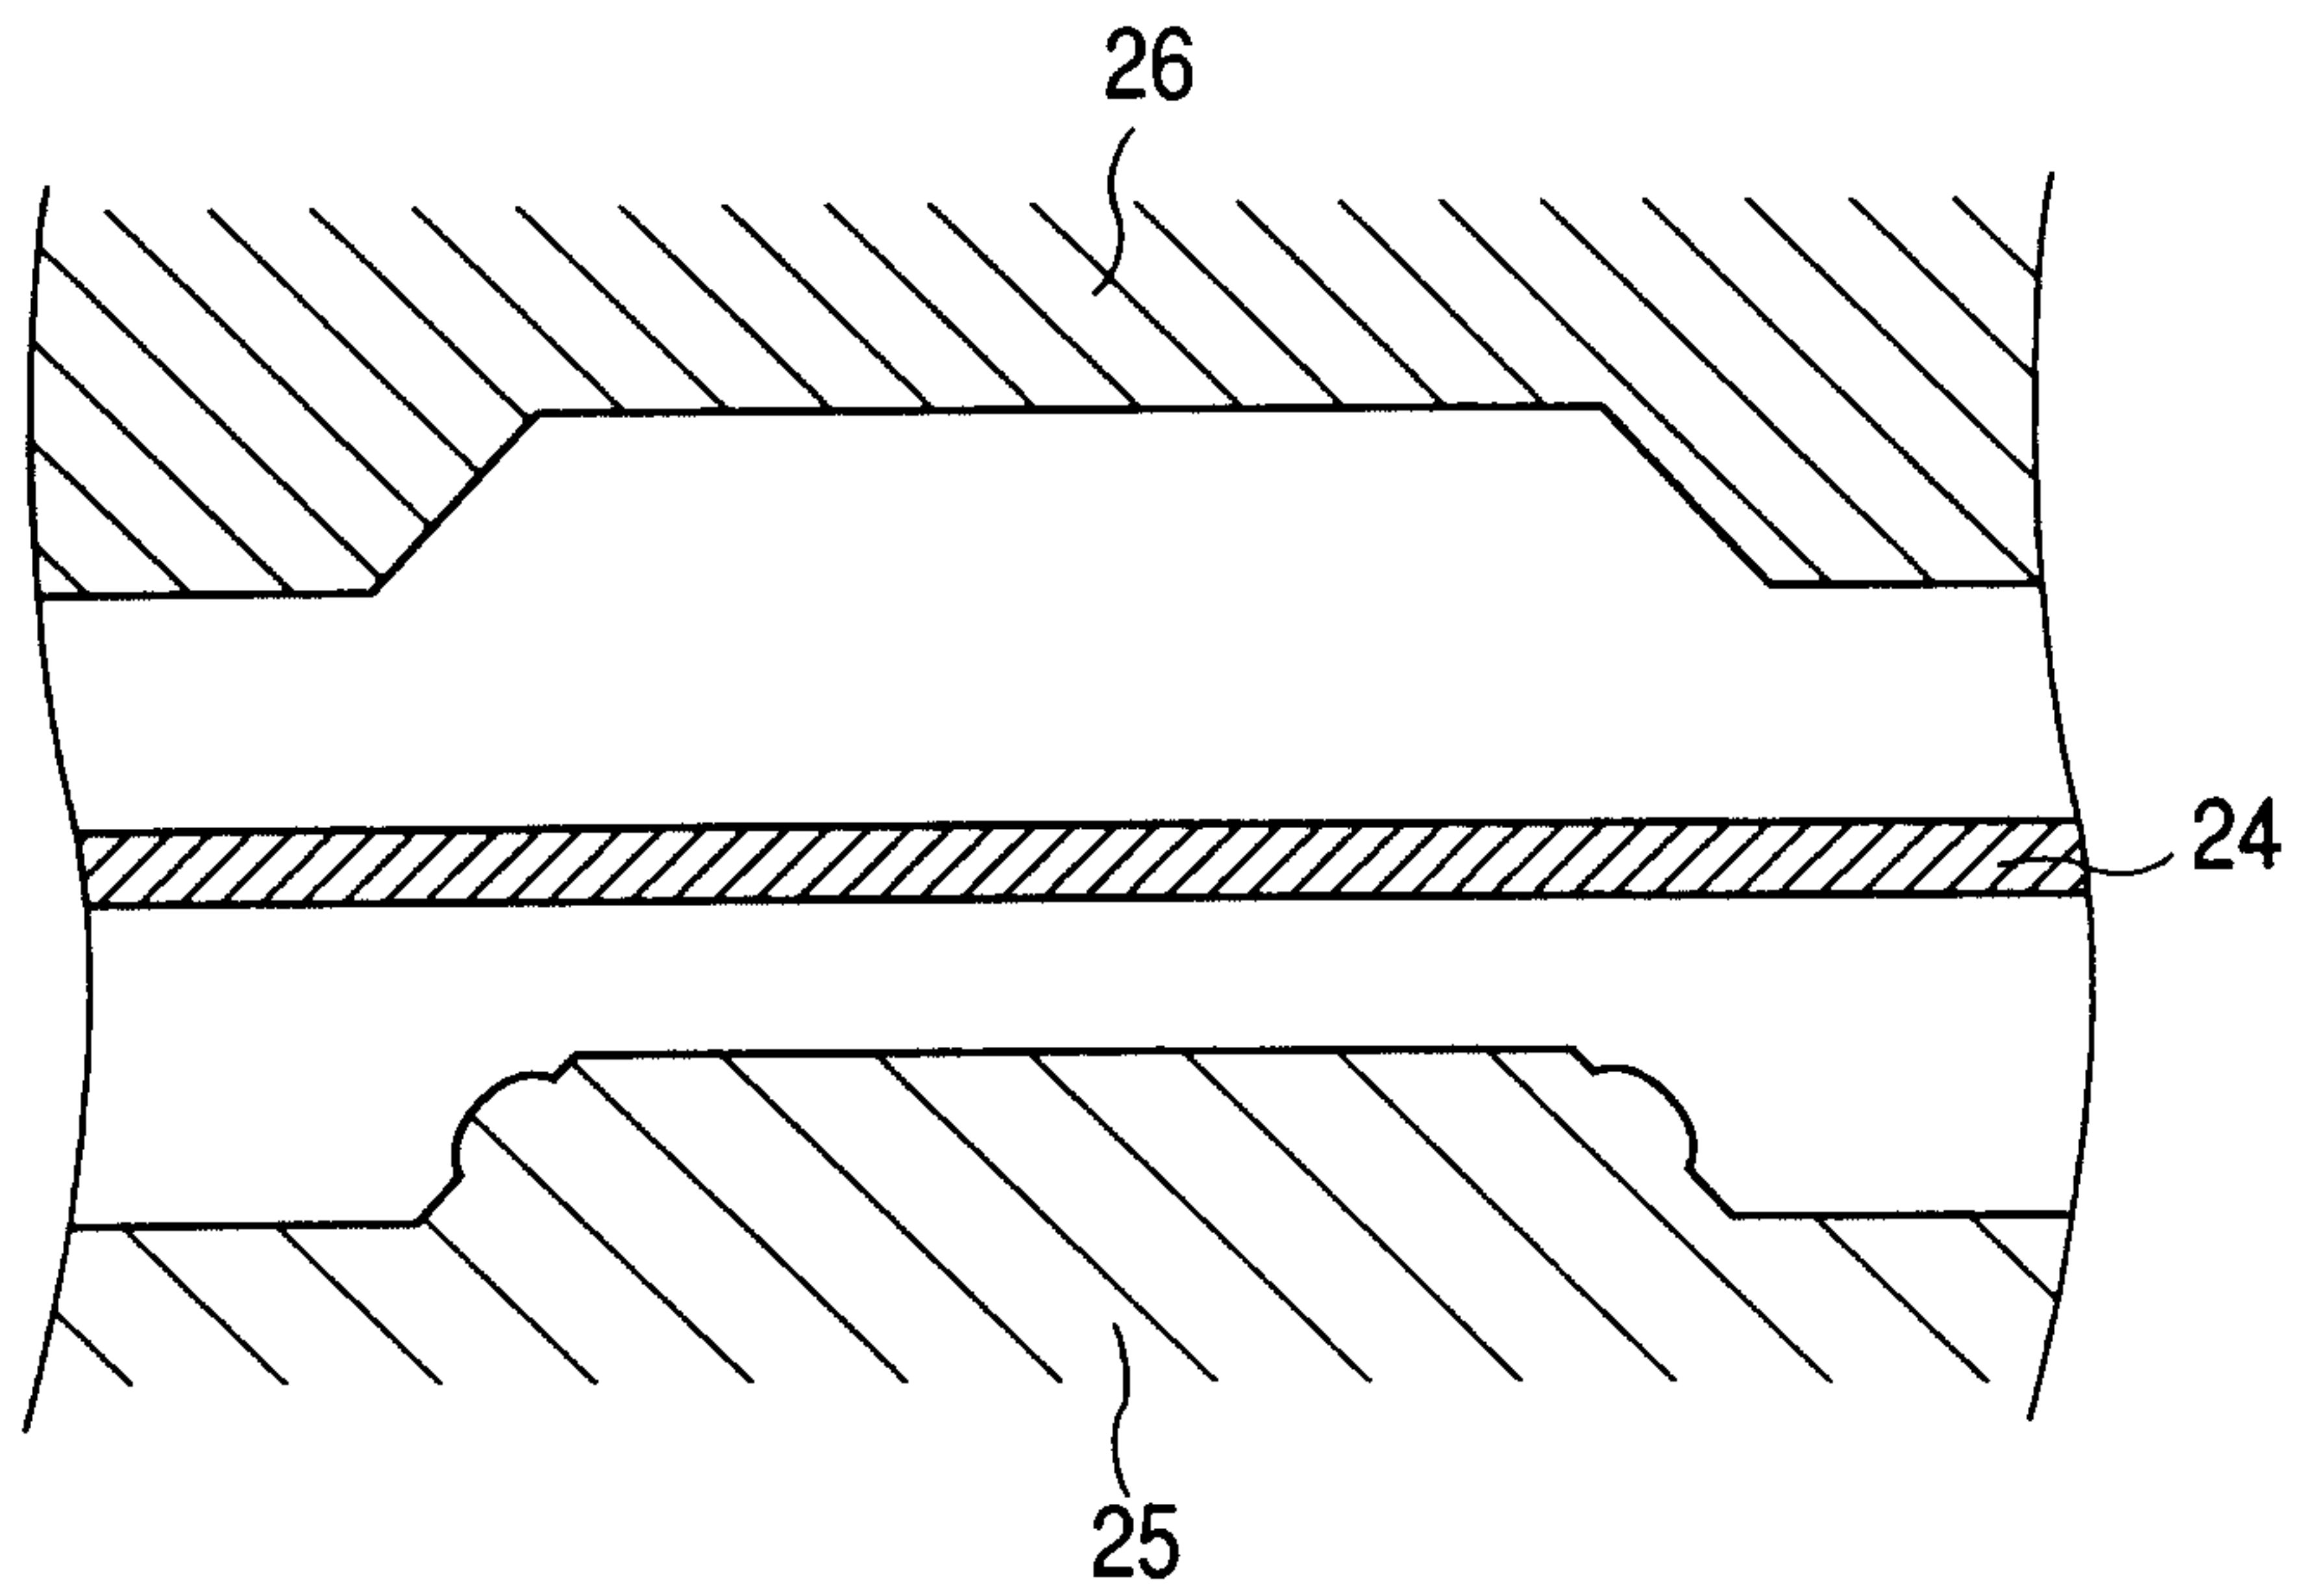


FIG. 17B

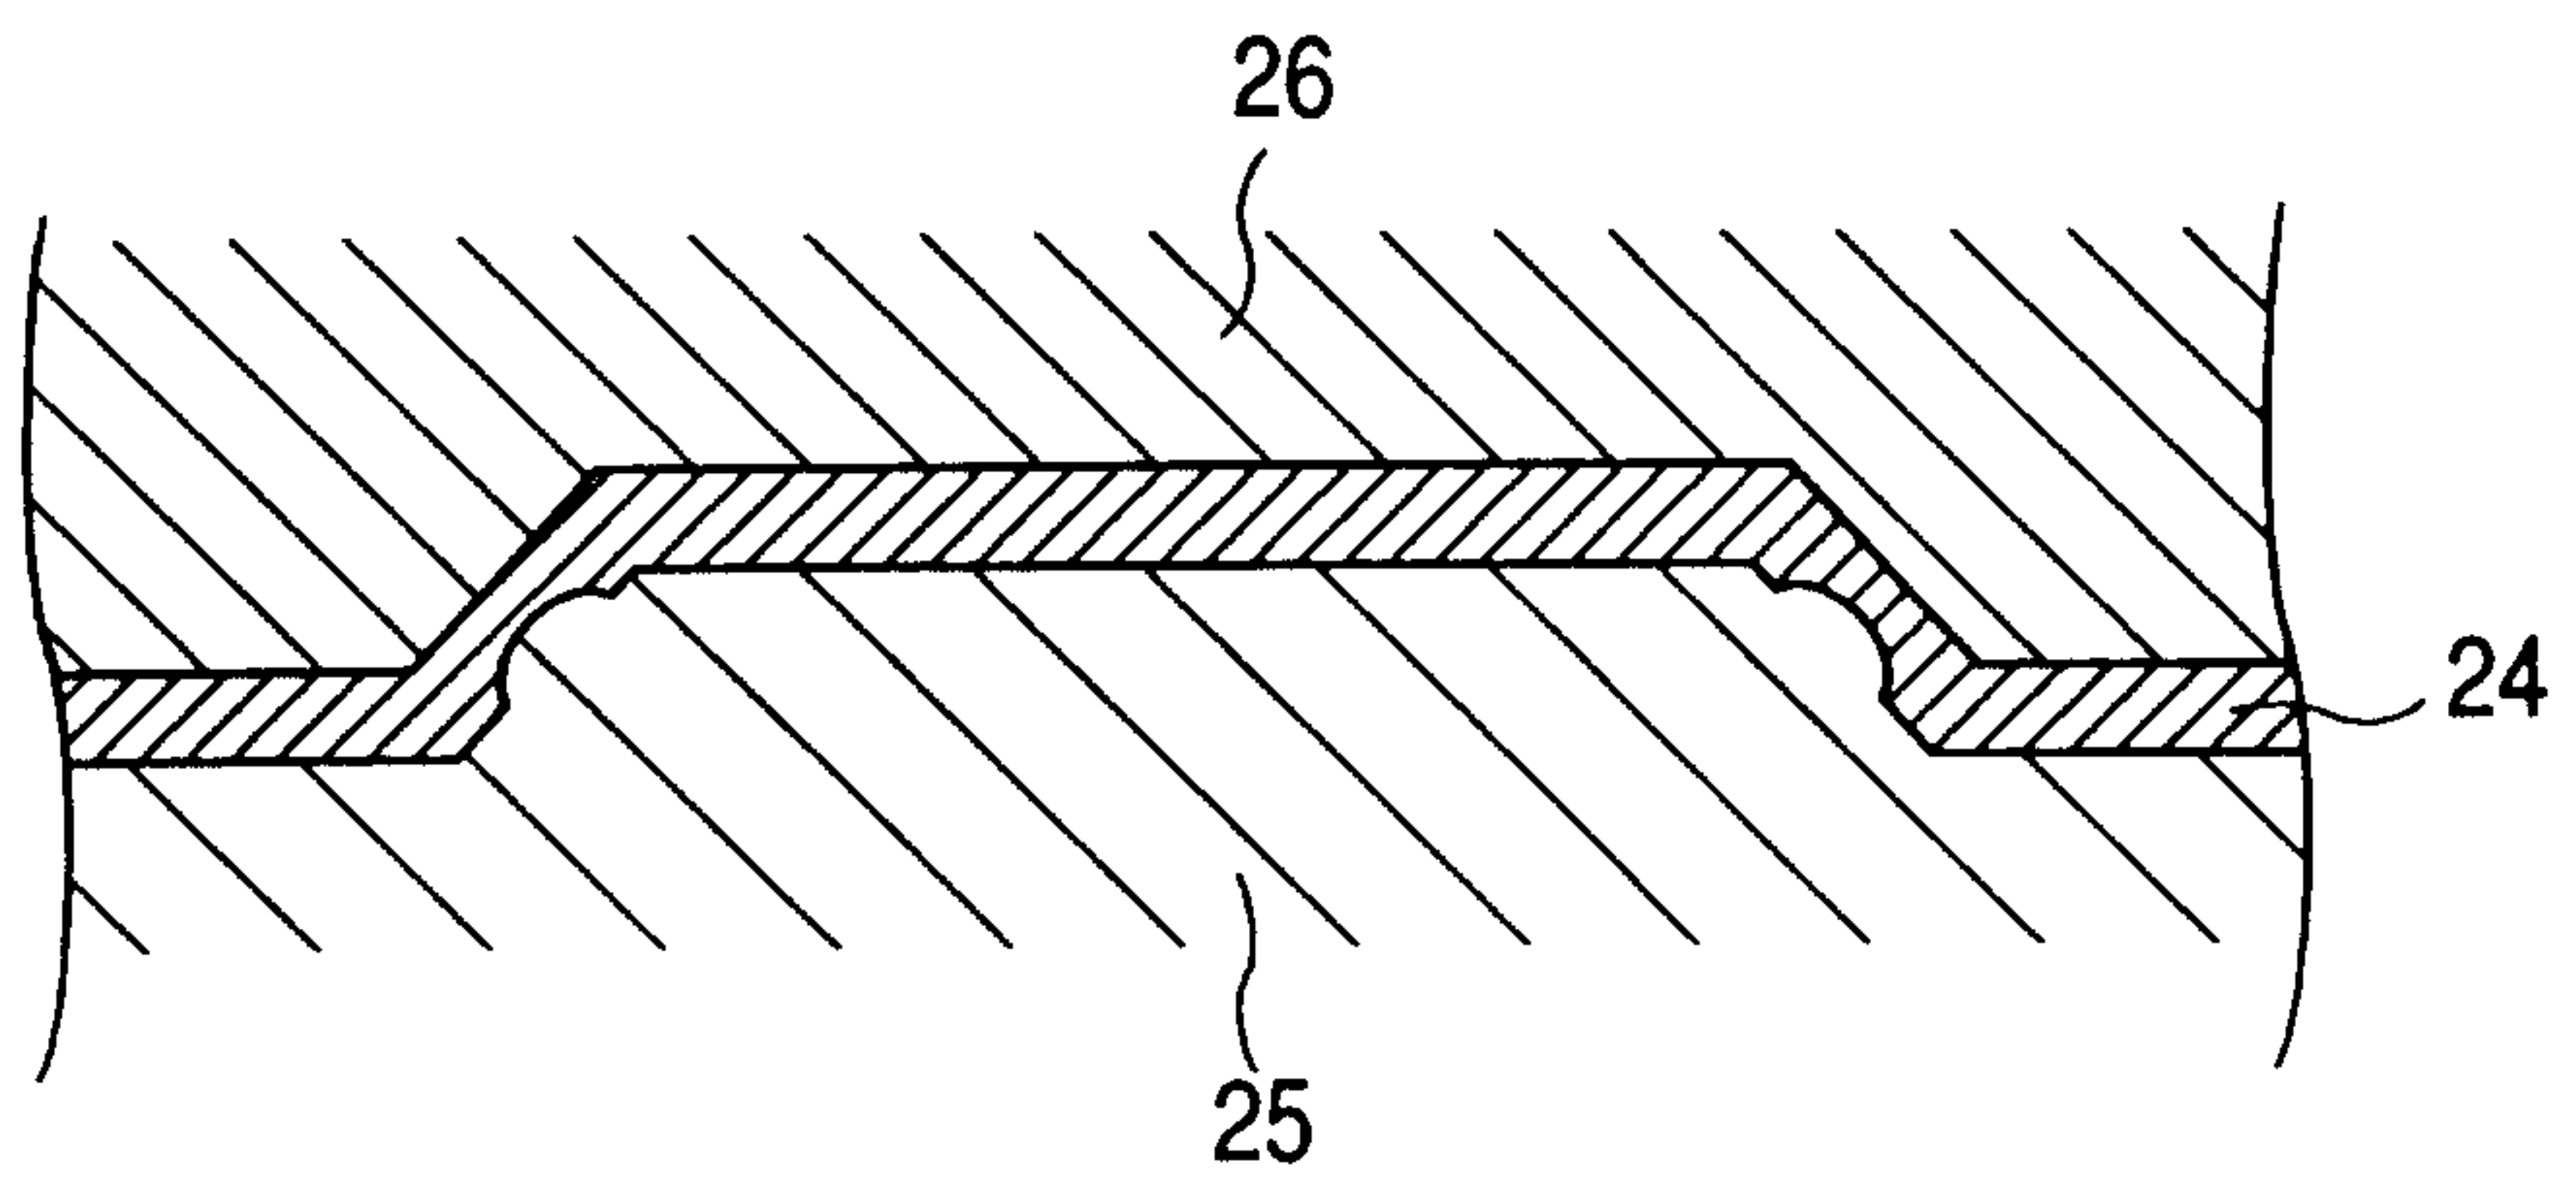


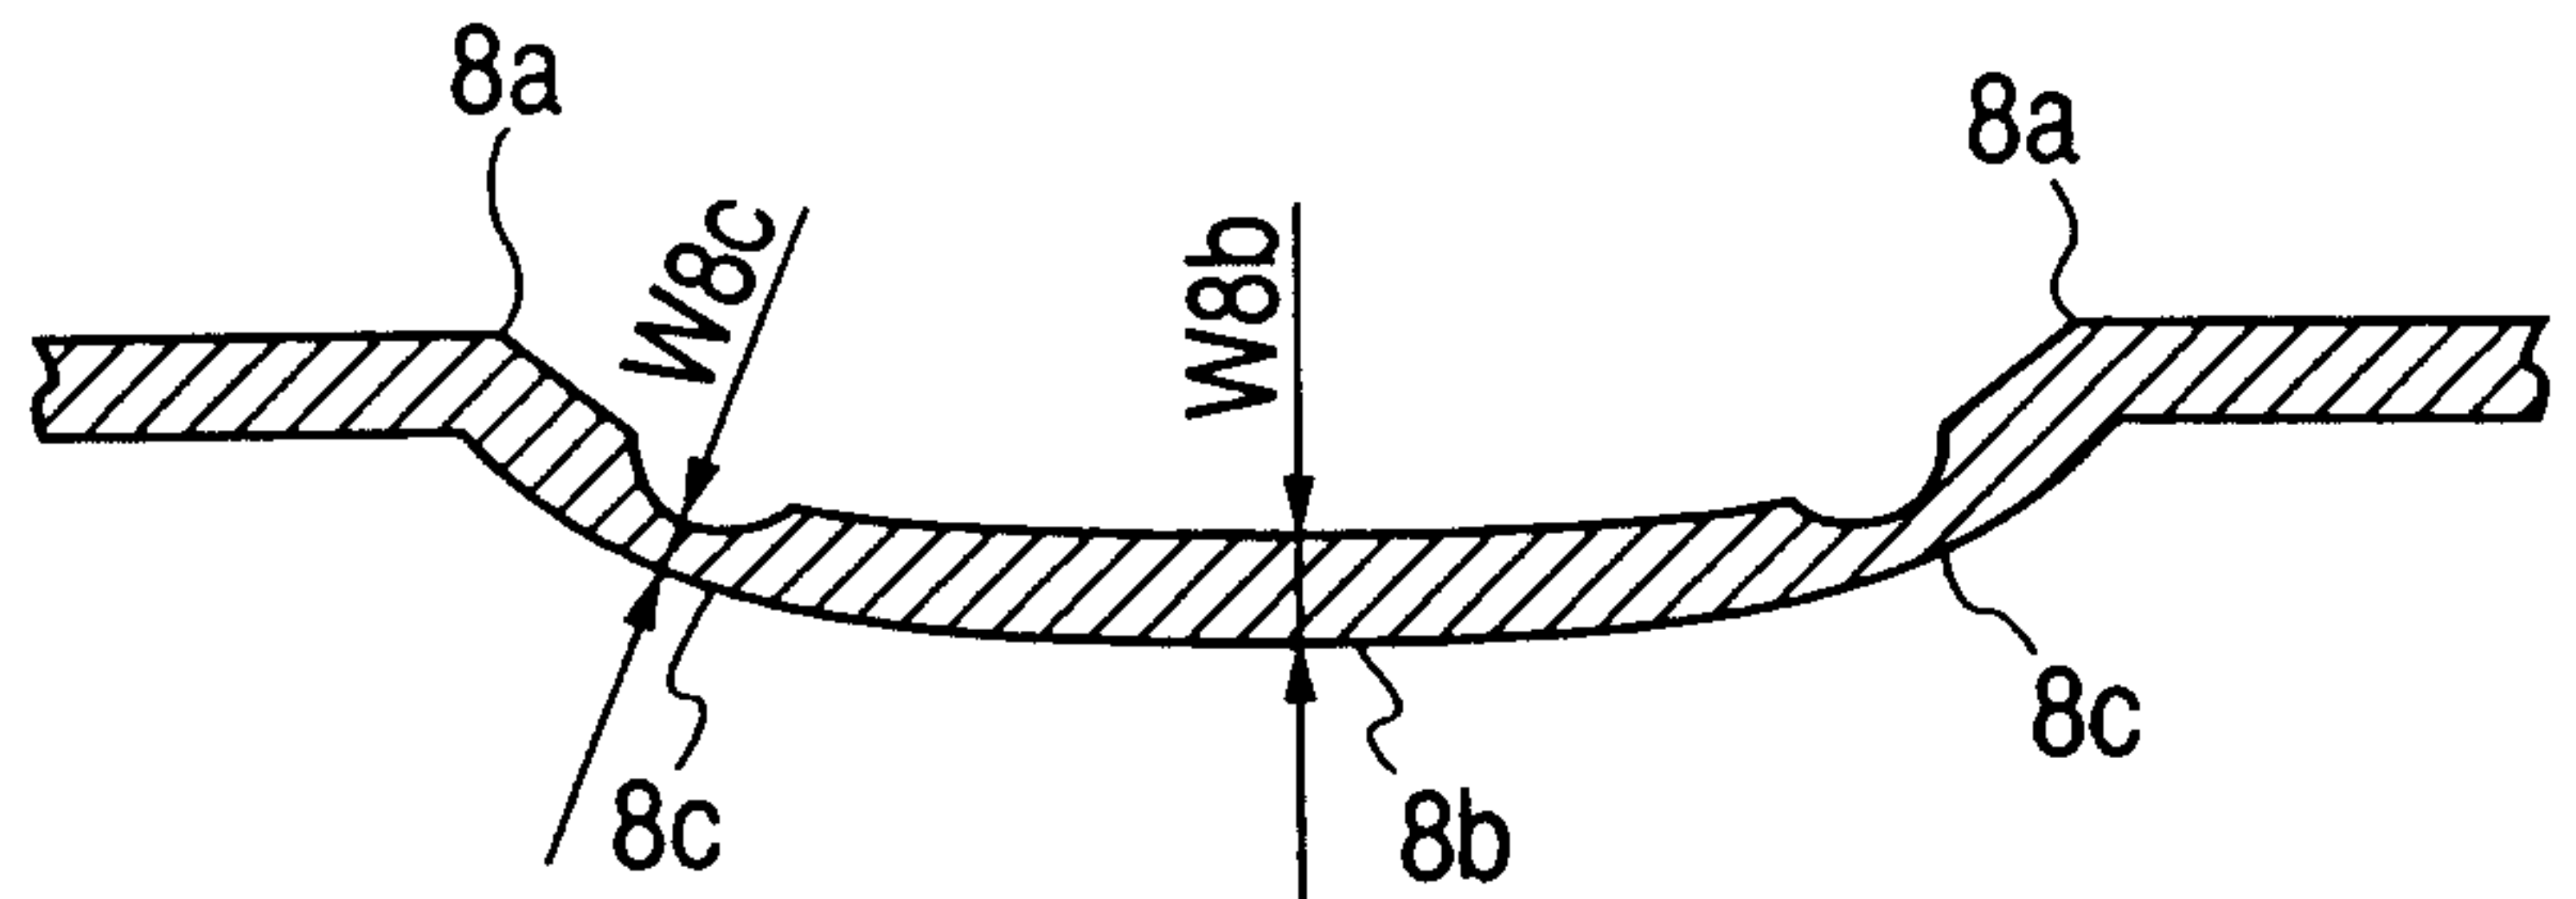
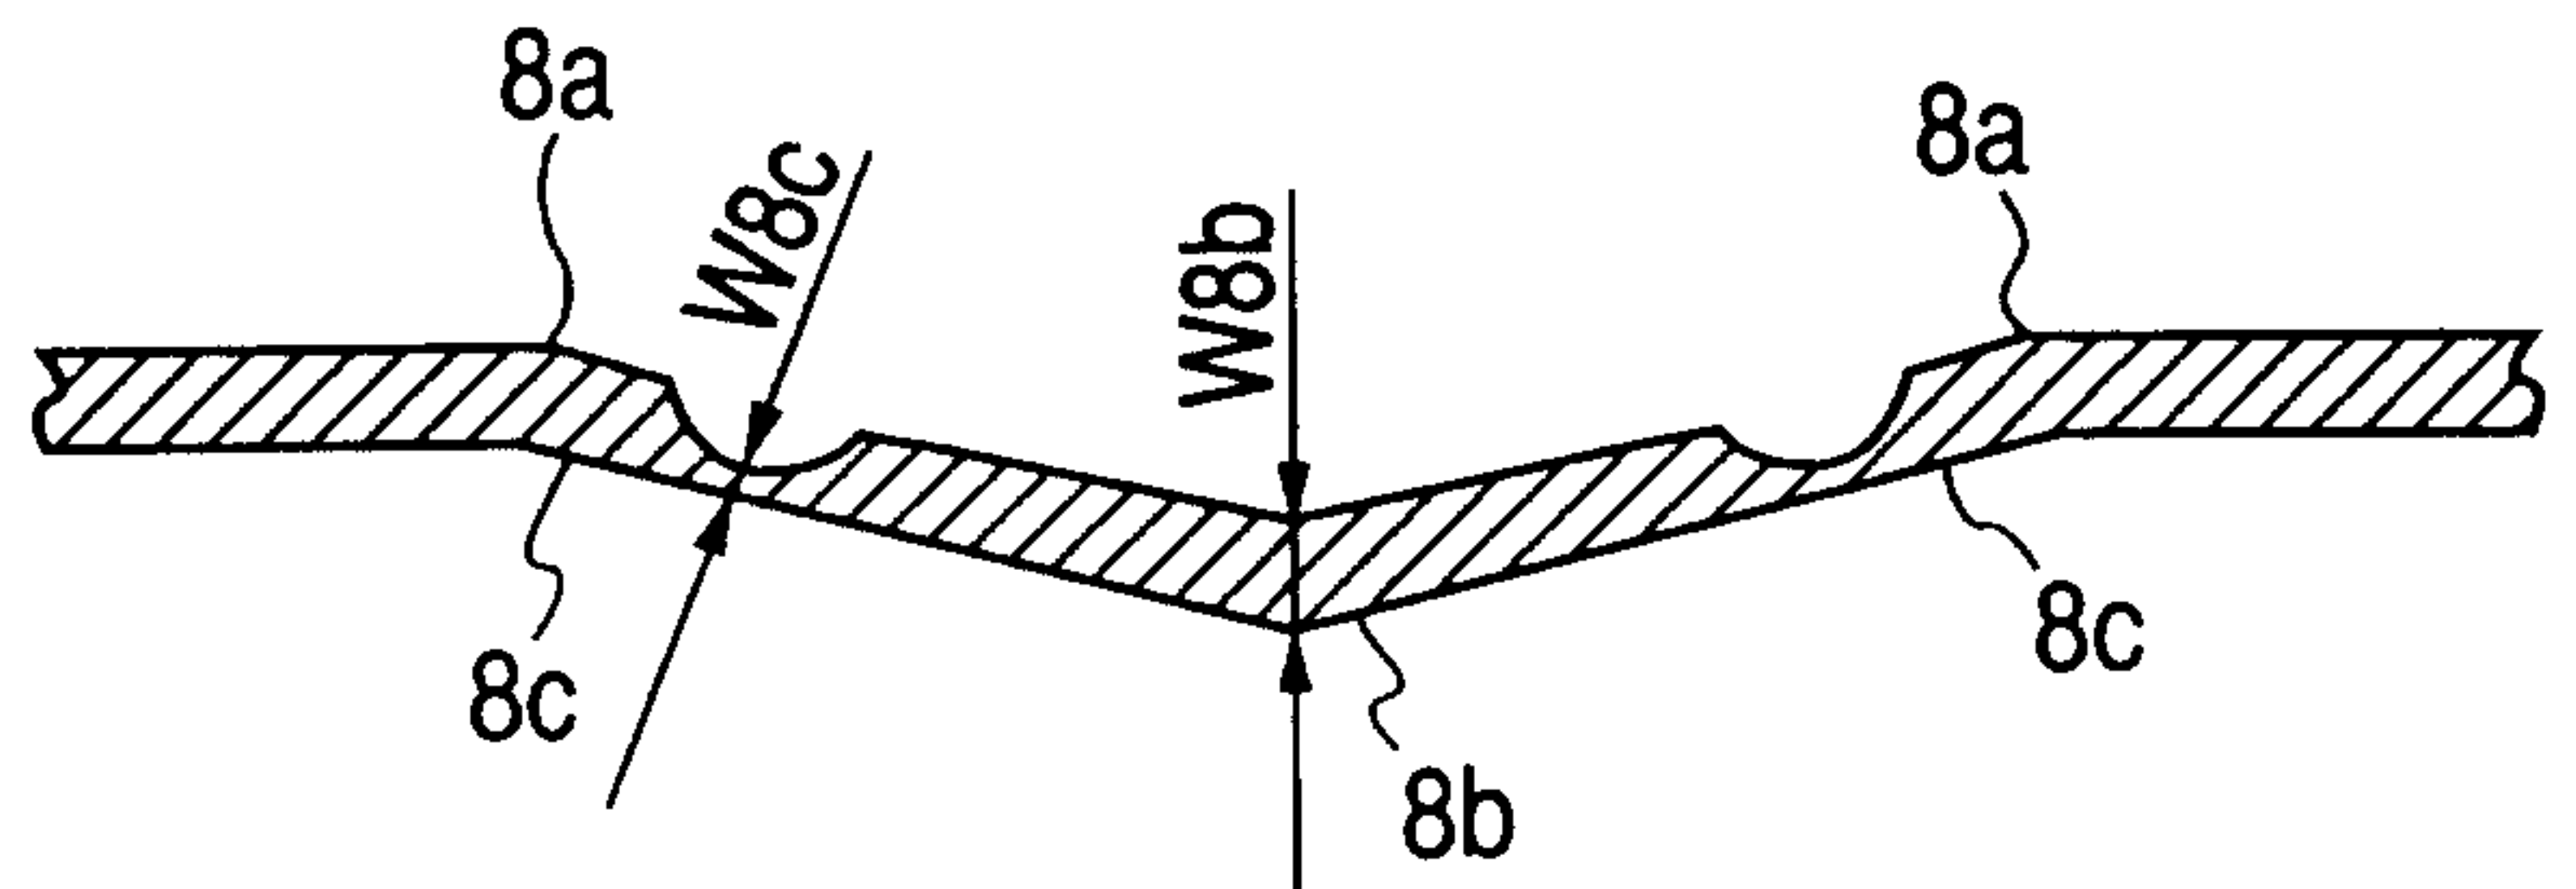
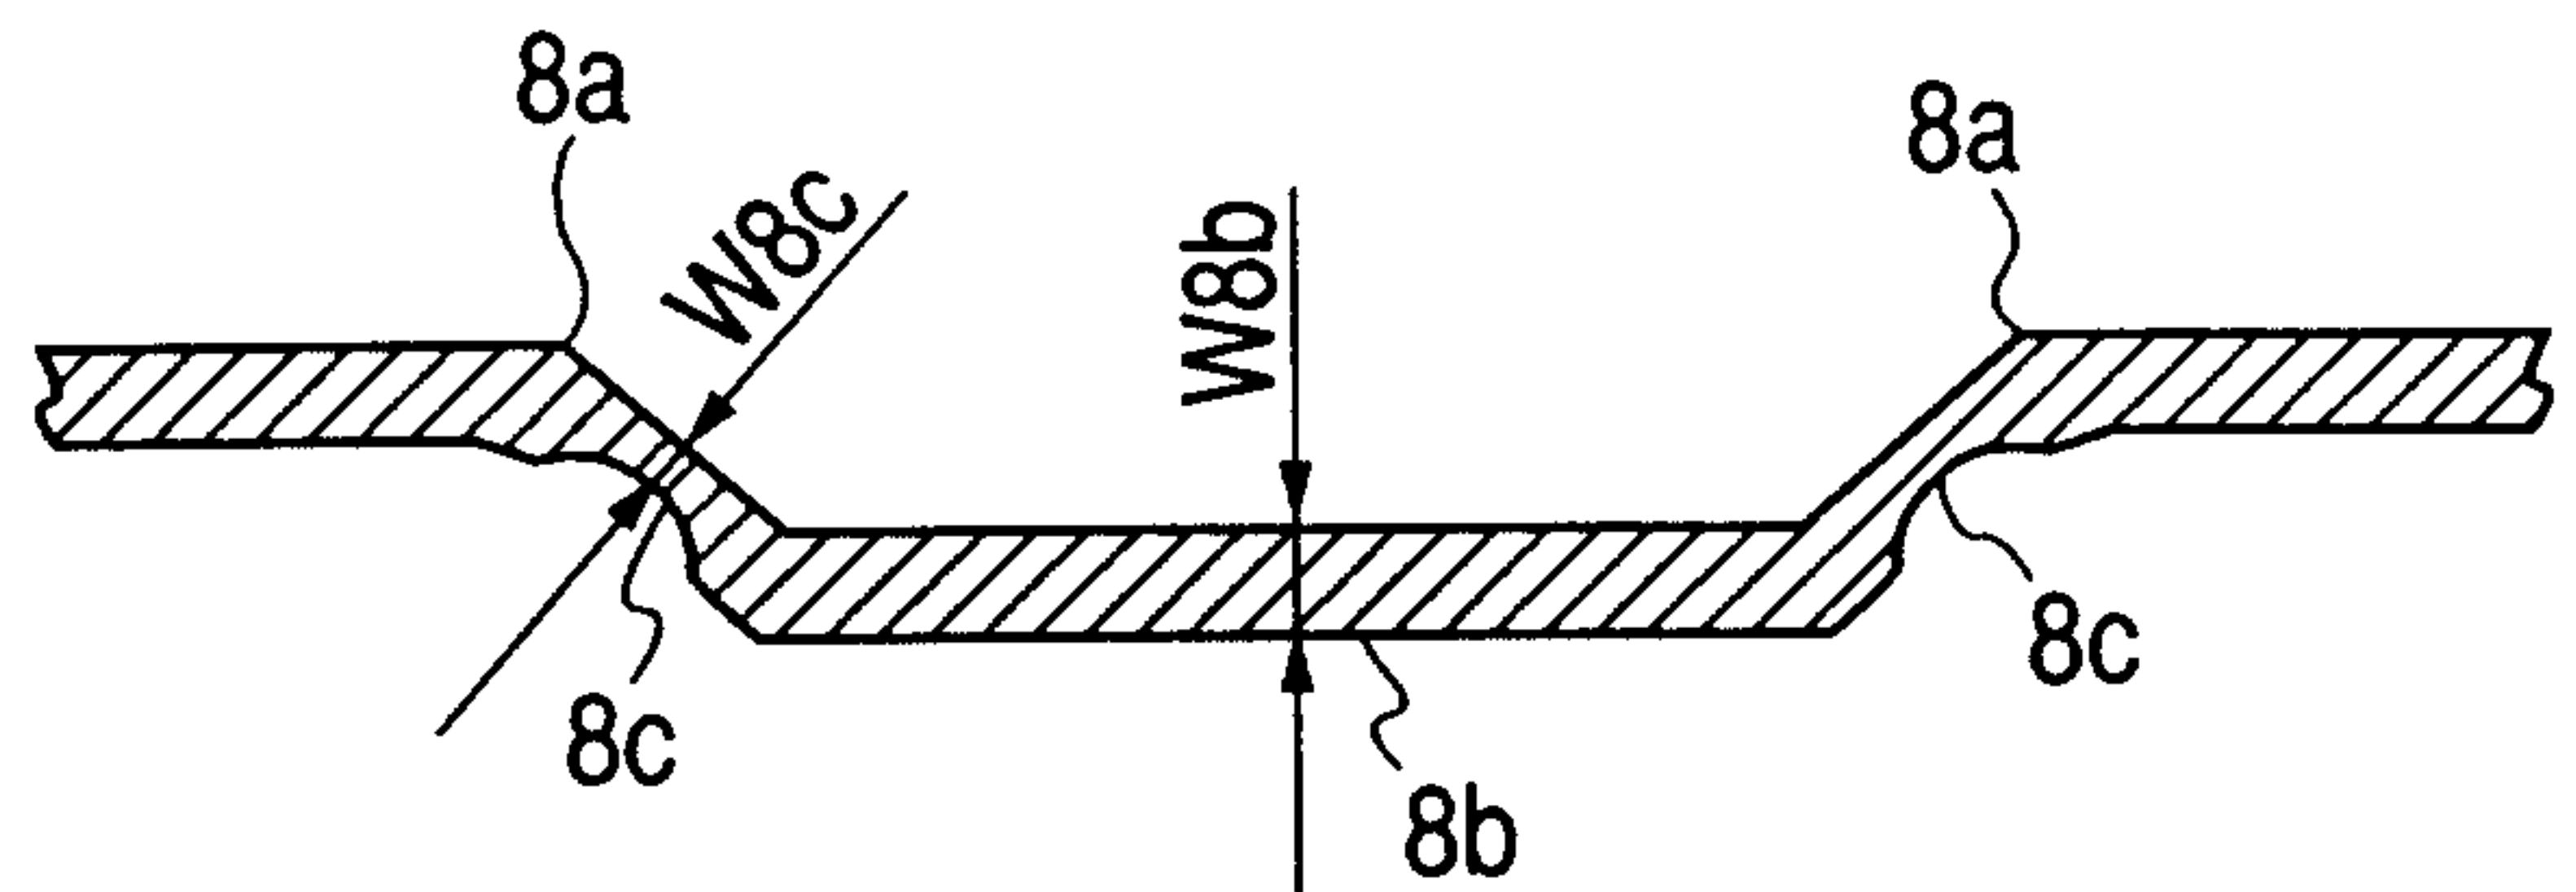
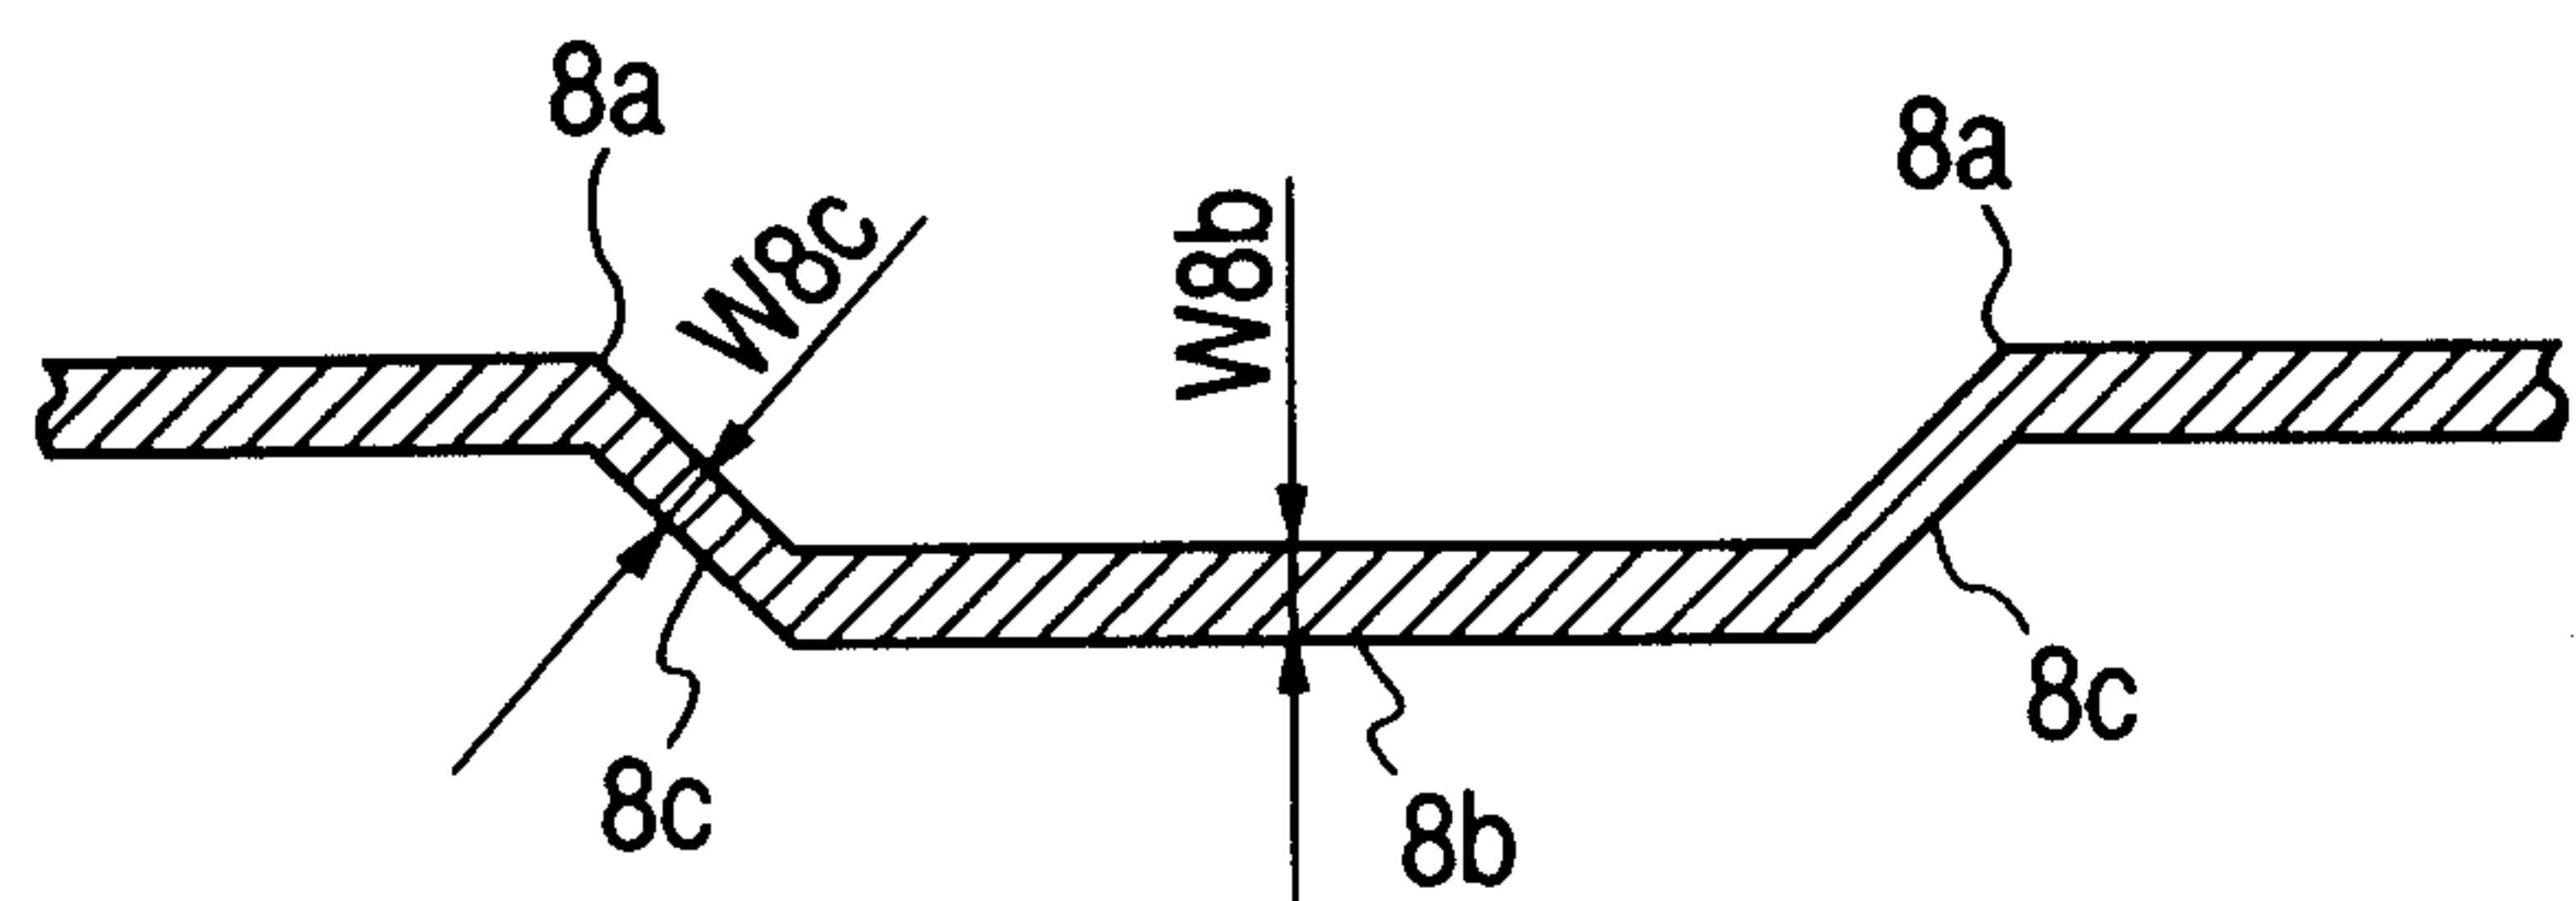
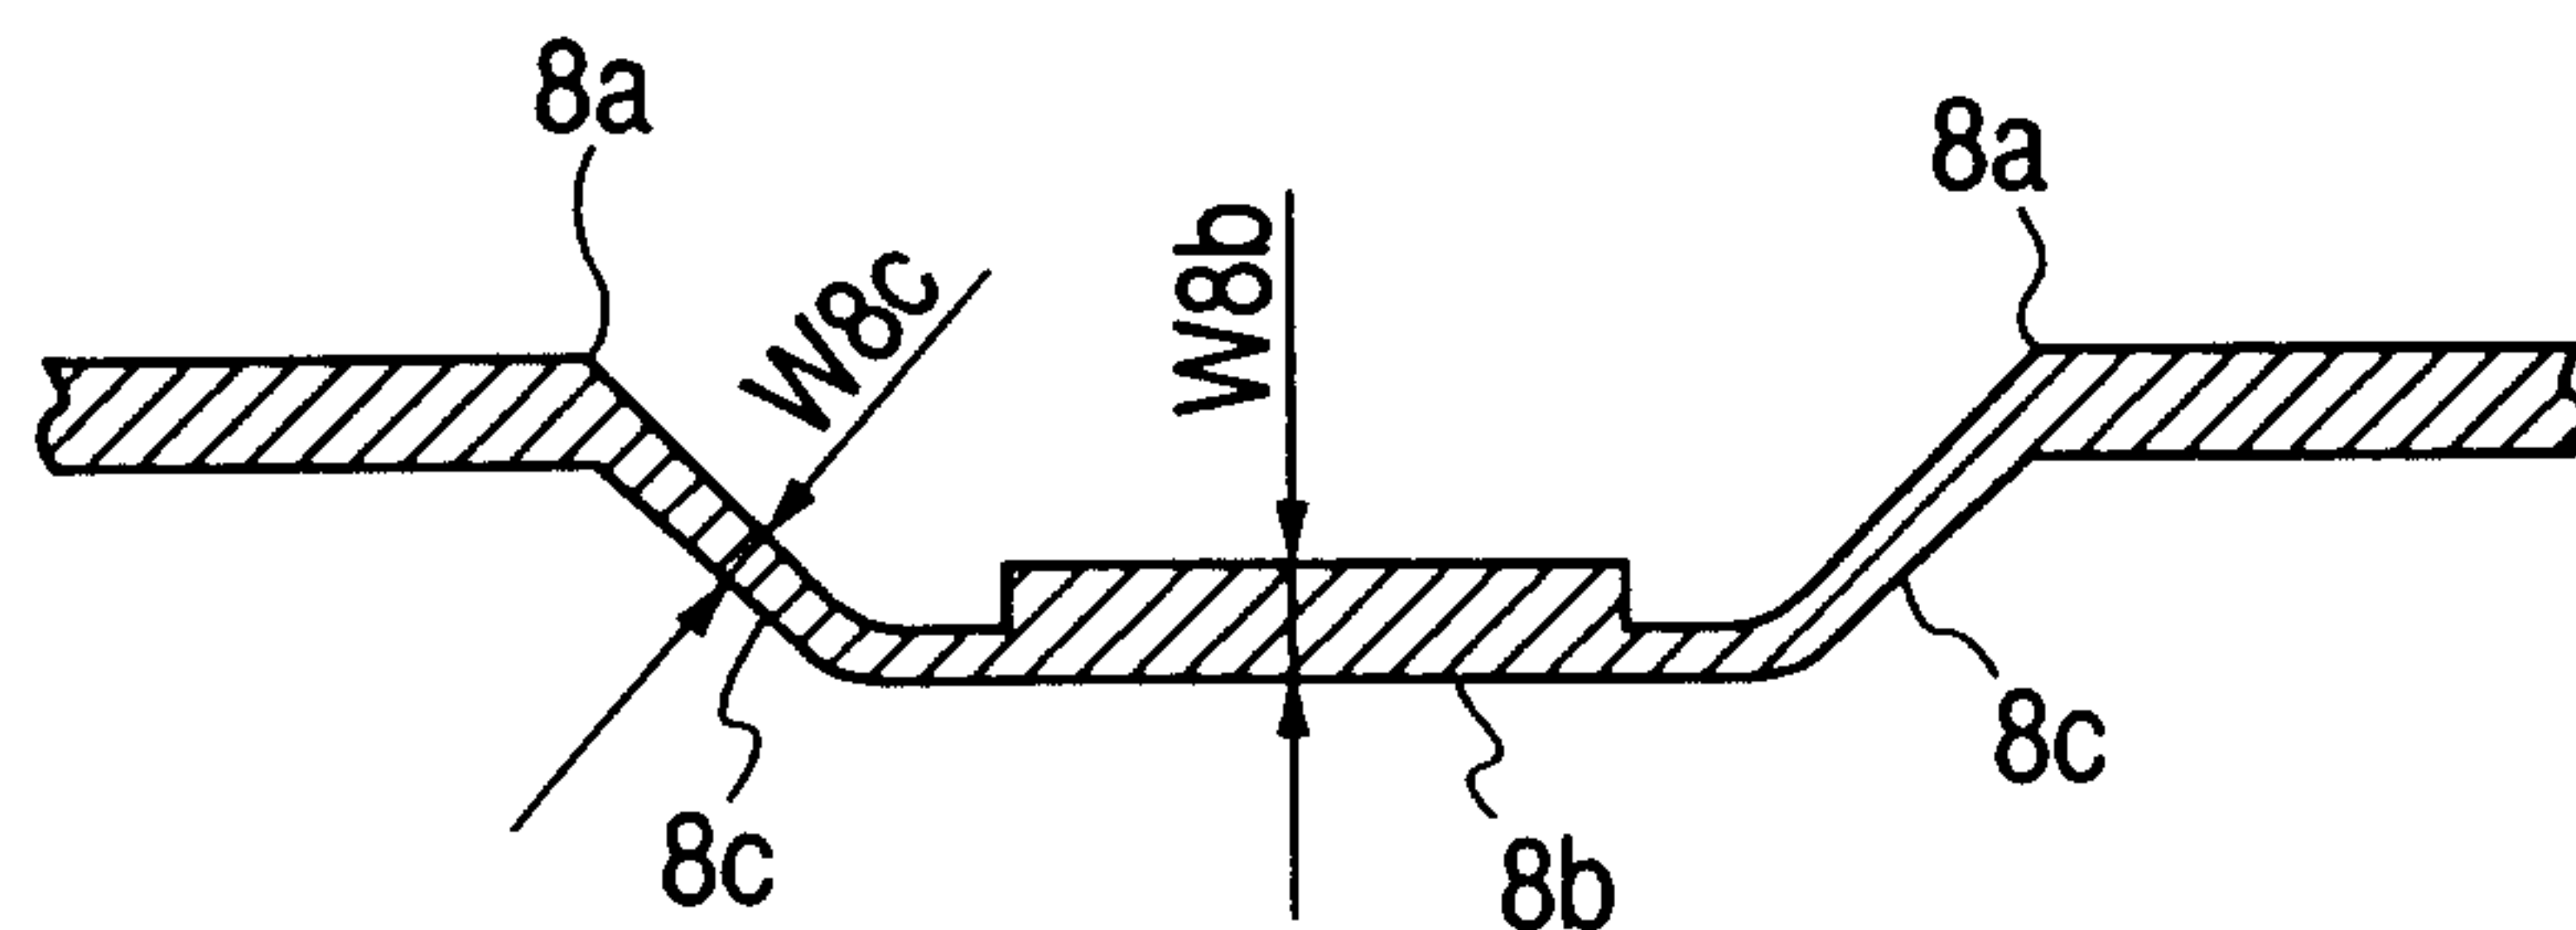
FIG. 18A**FIG. 18B****FIG. 18C****FIG. 18D****FIG. 18E**

FIG. 19A

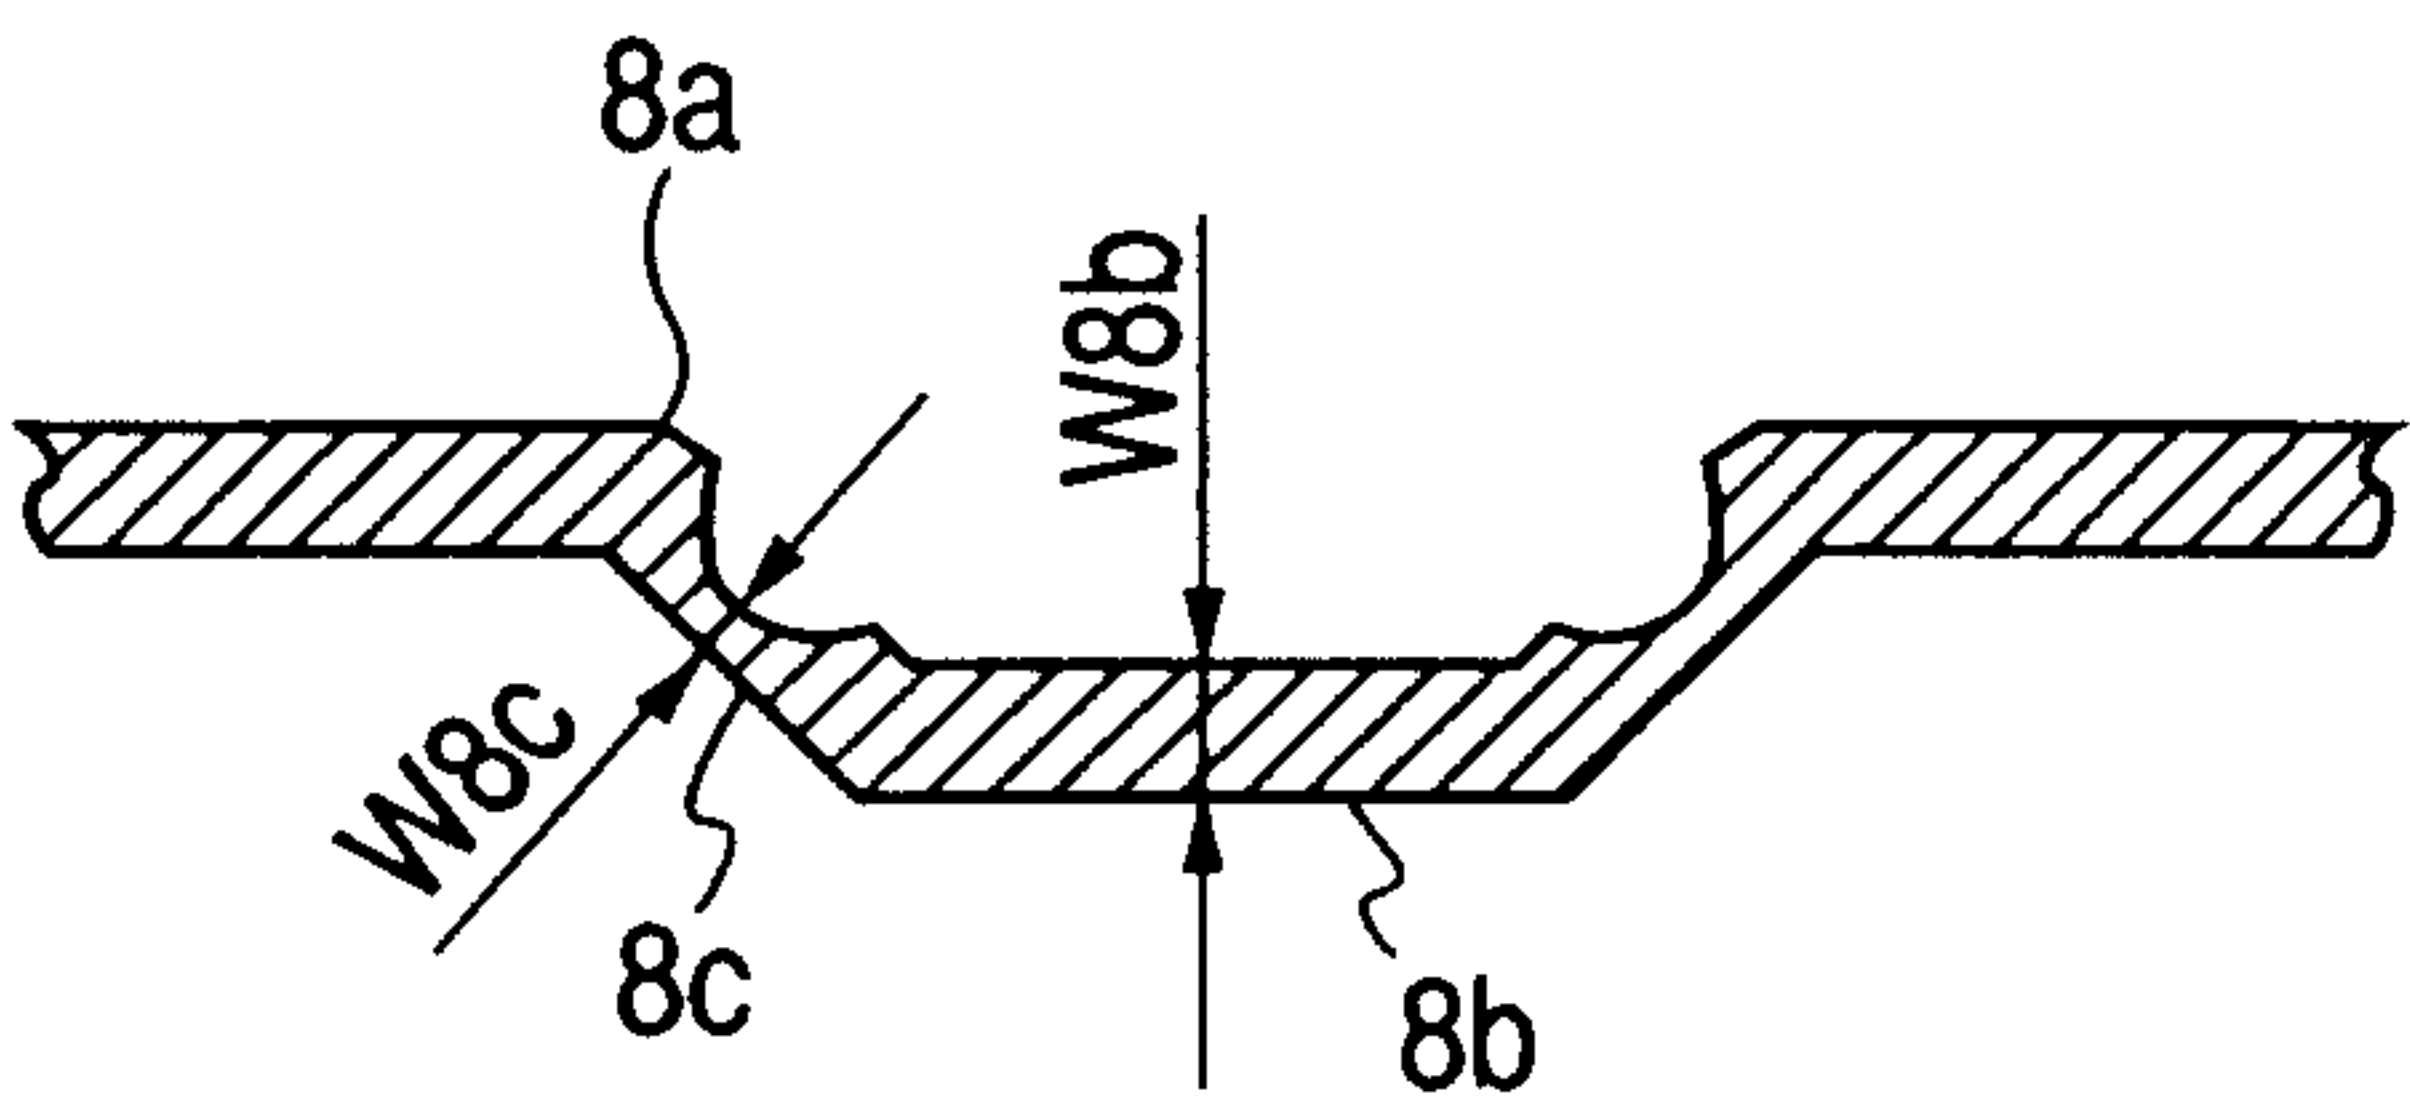


FIG. 19B

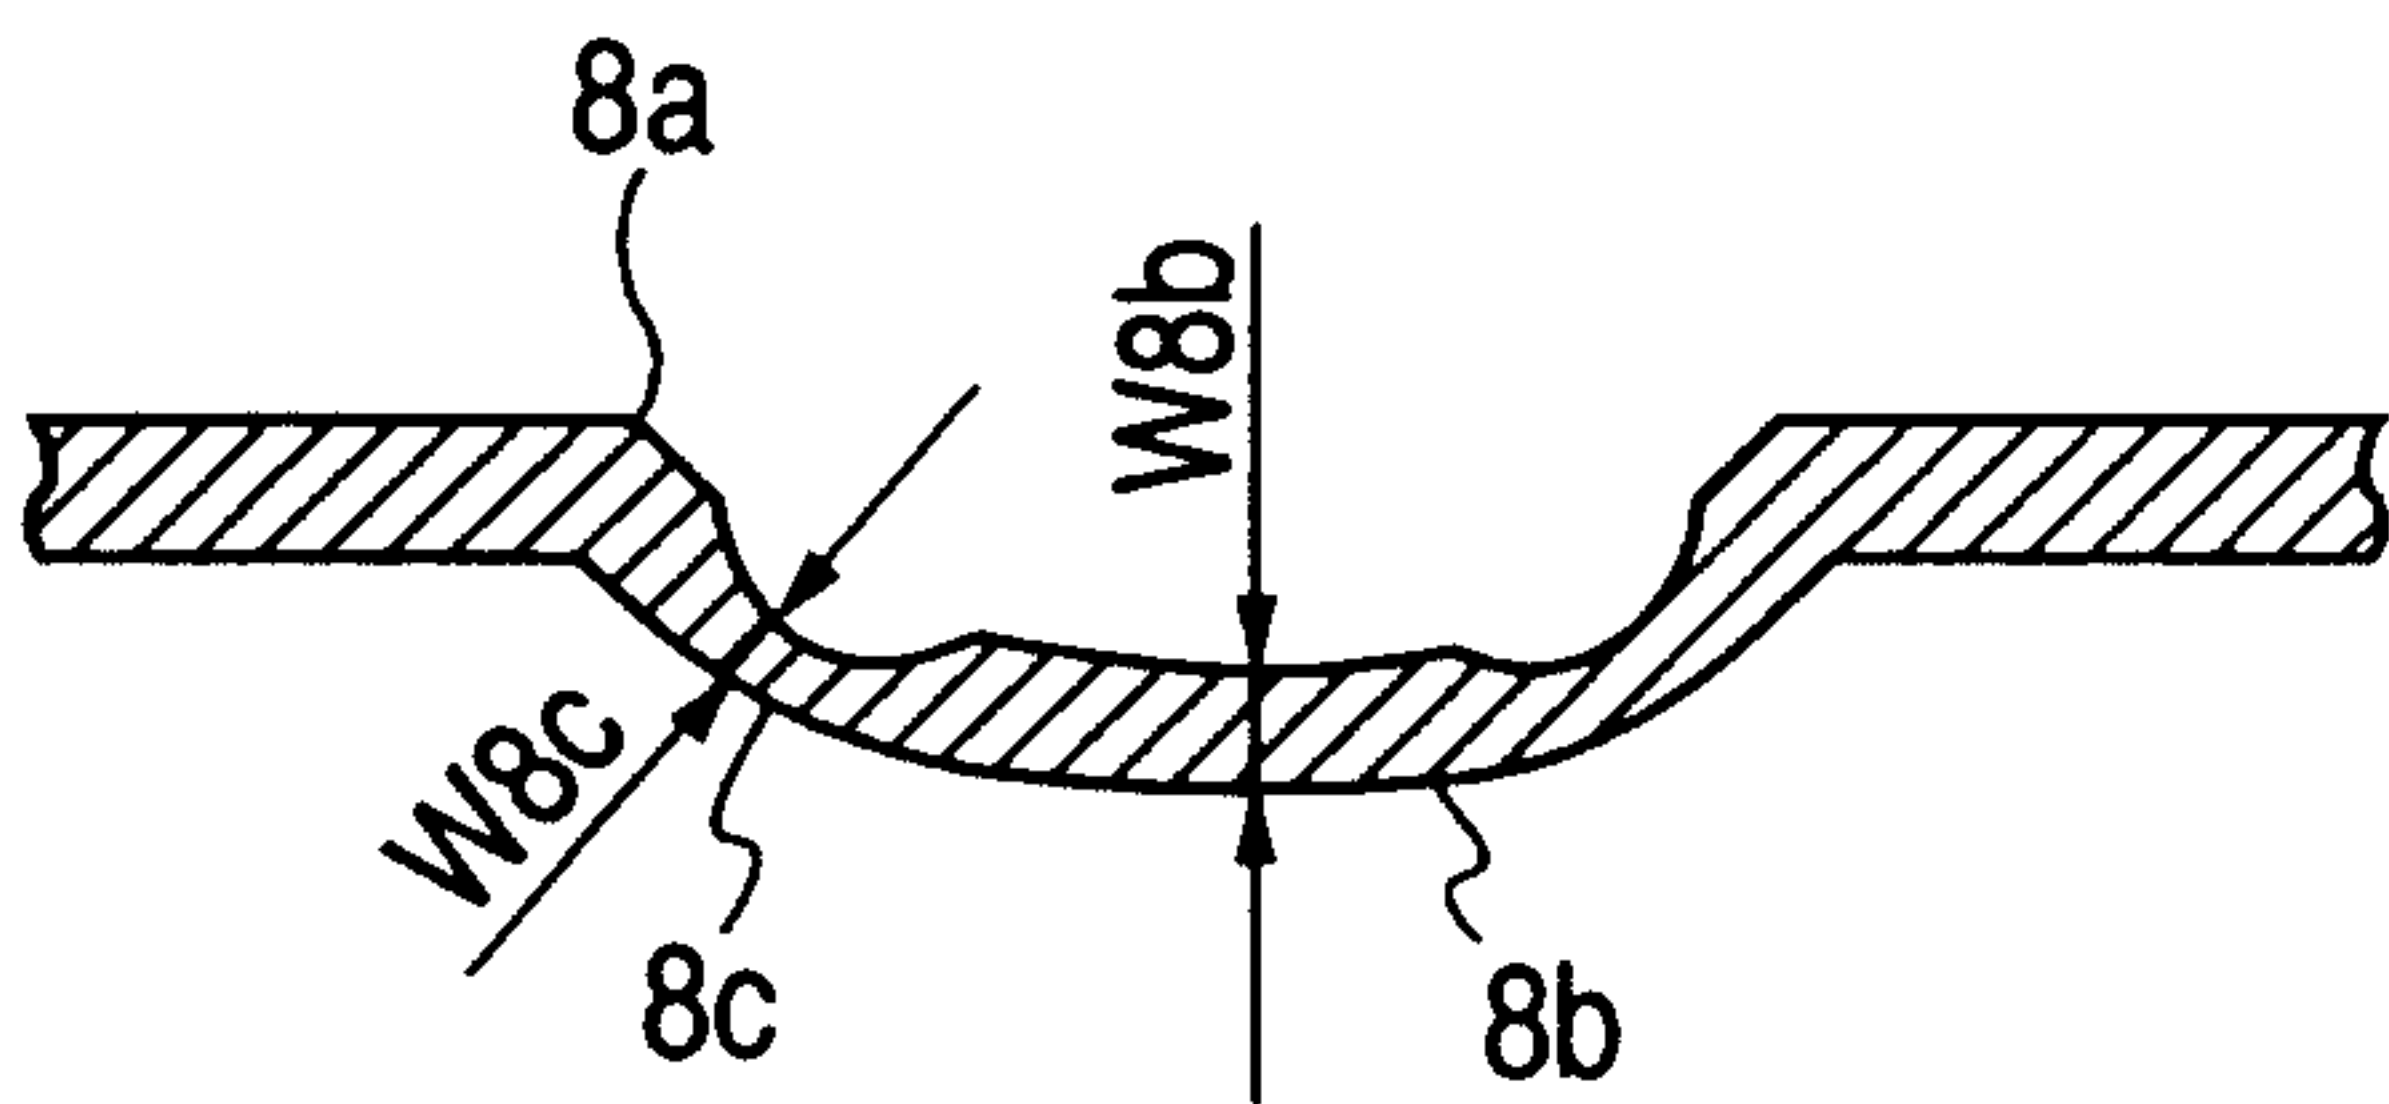


FIG. 20A

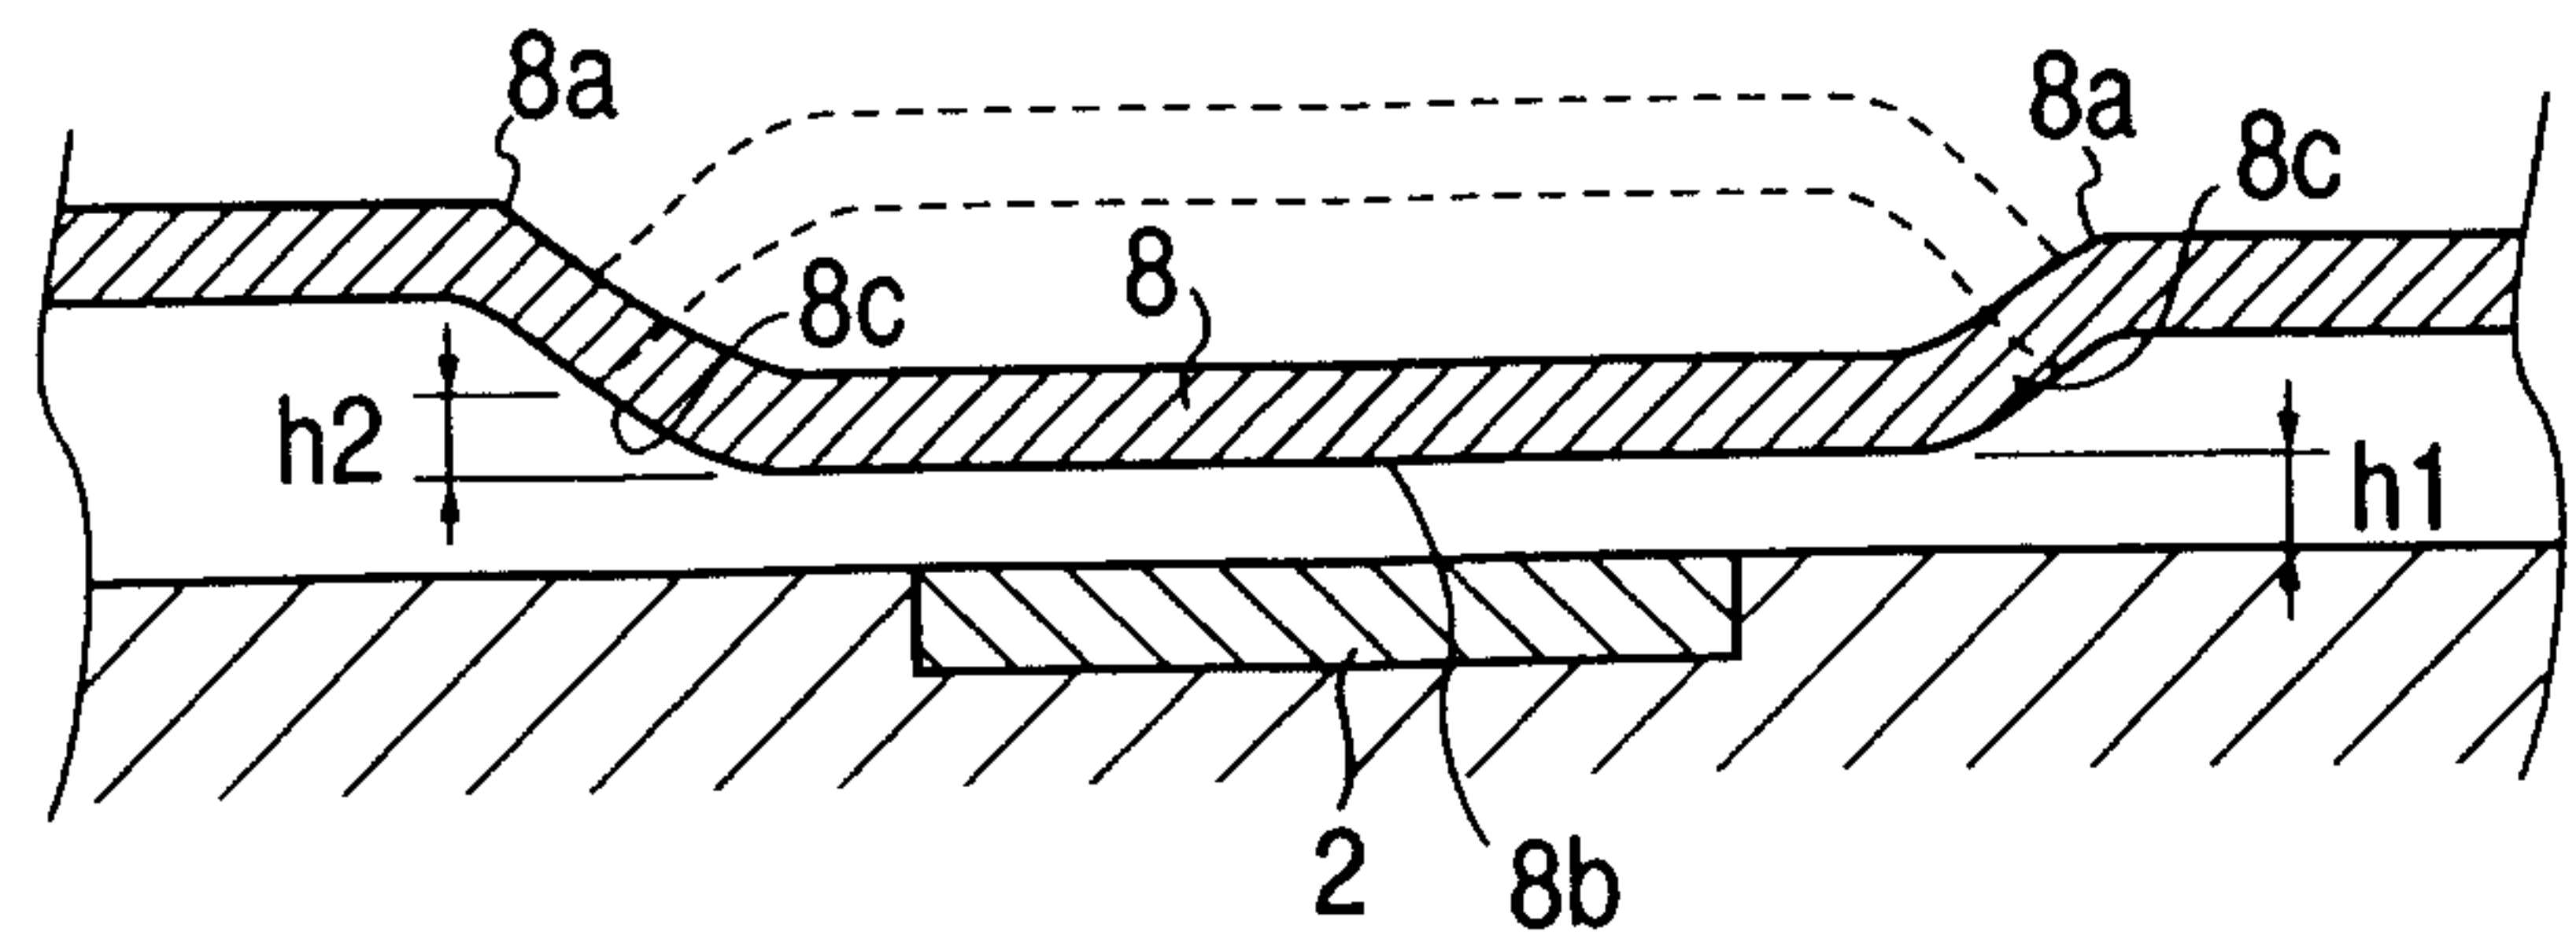


FIG. 20B

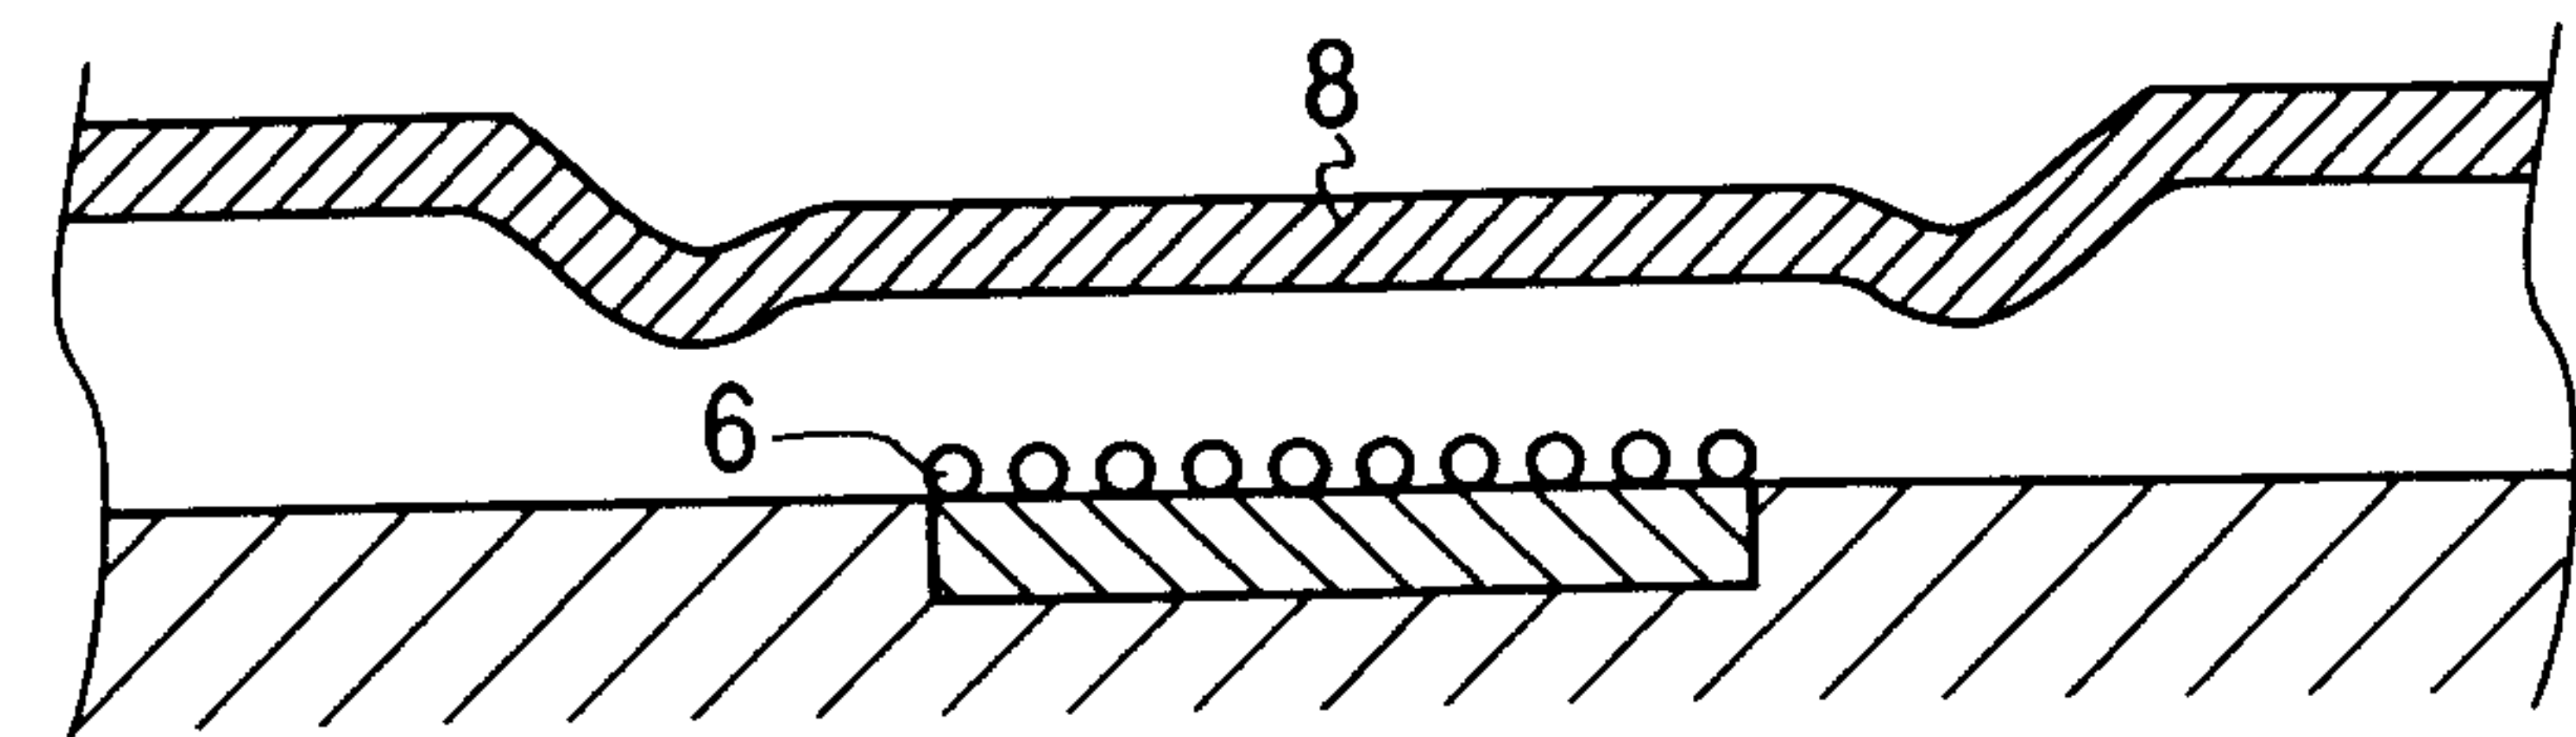


FIG. 20C

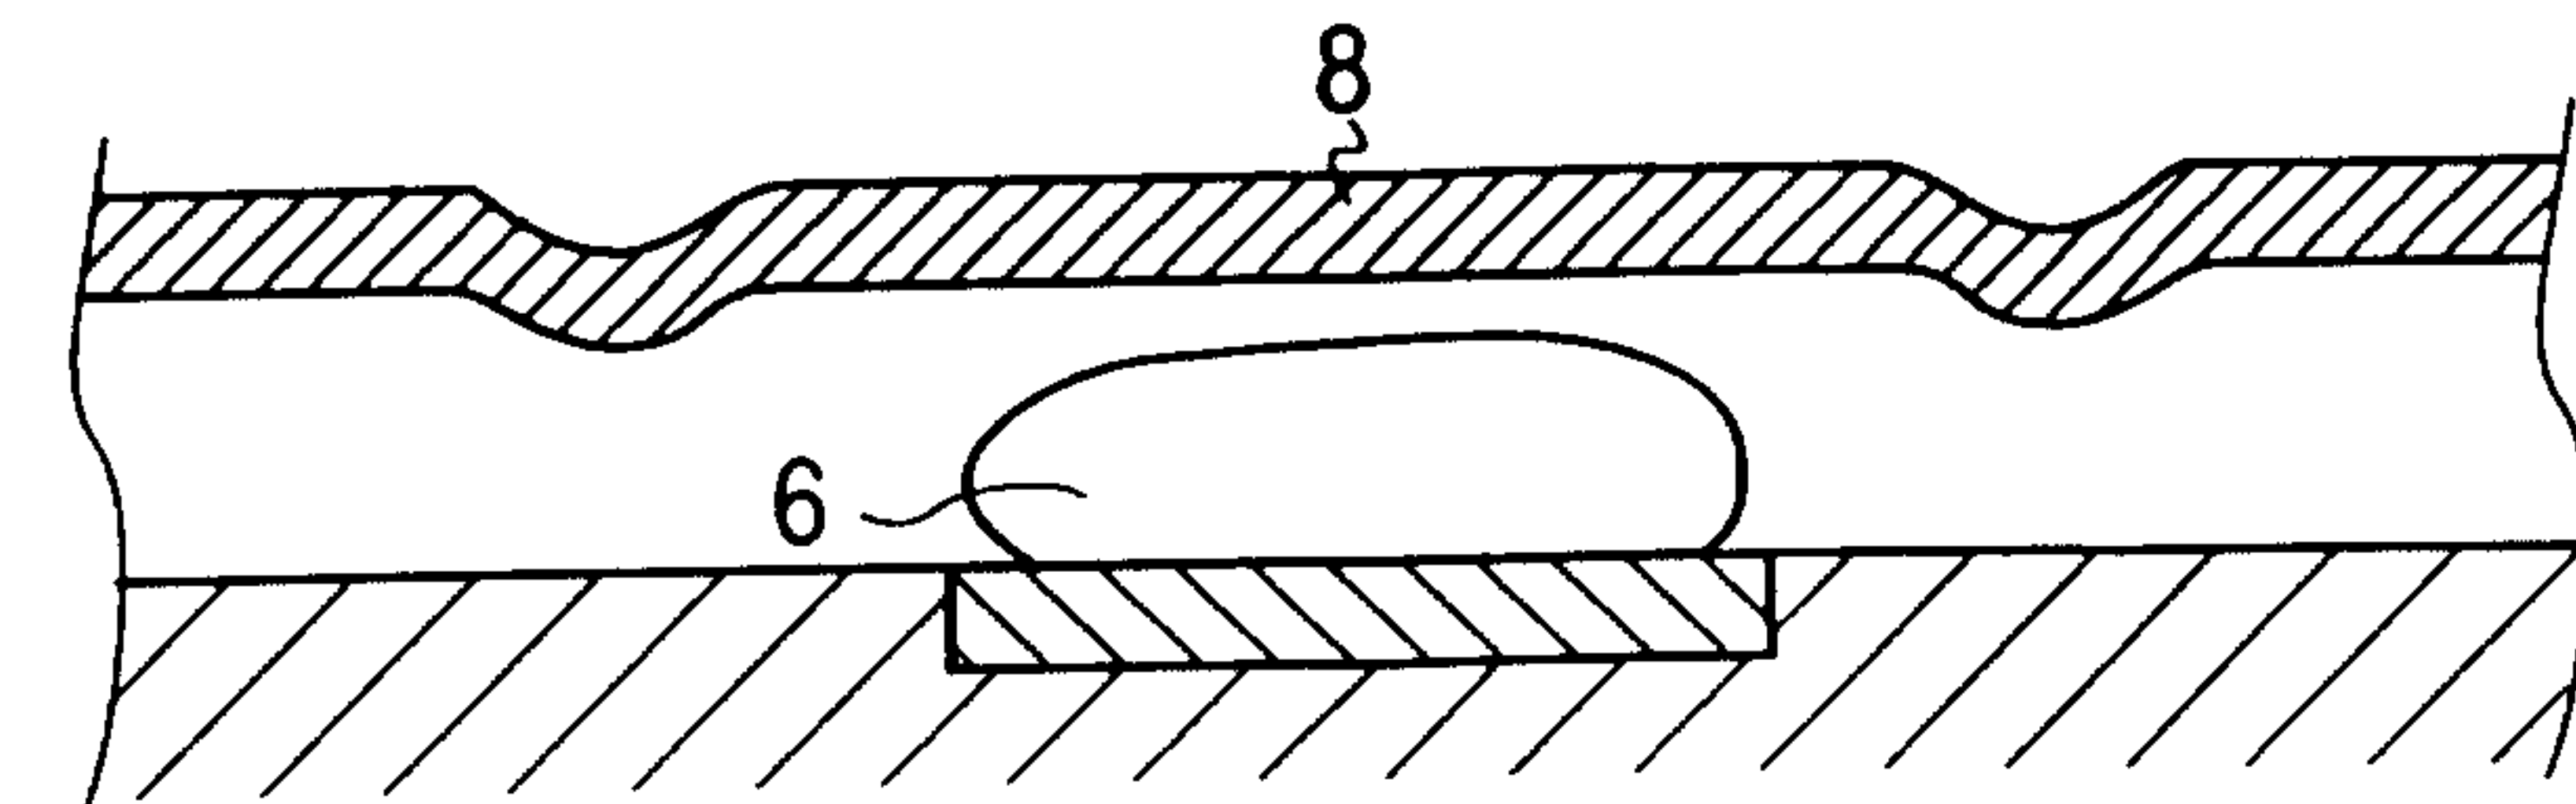


FIG. 20D

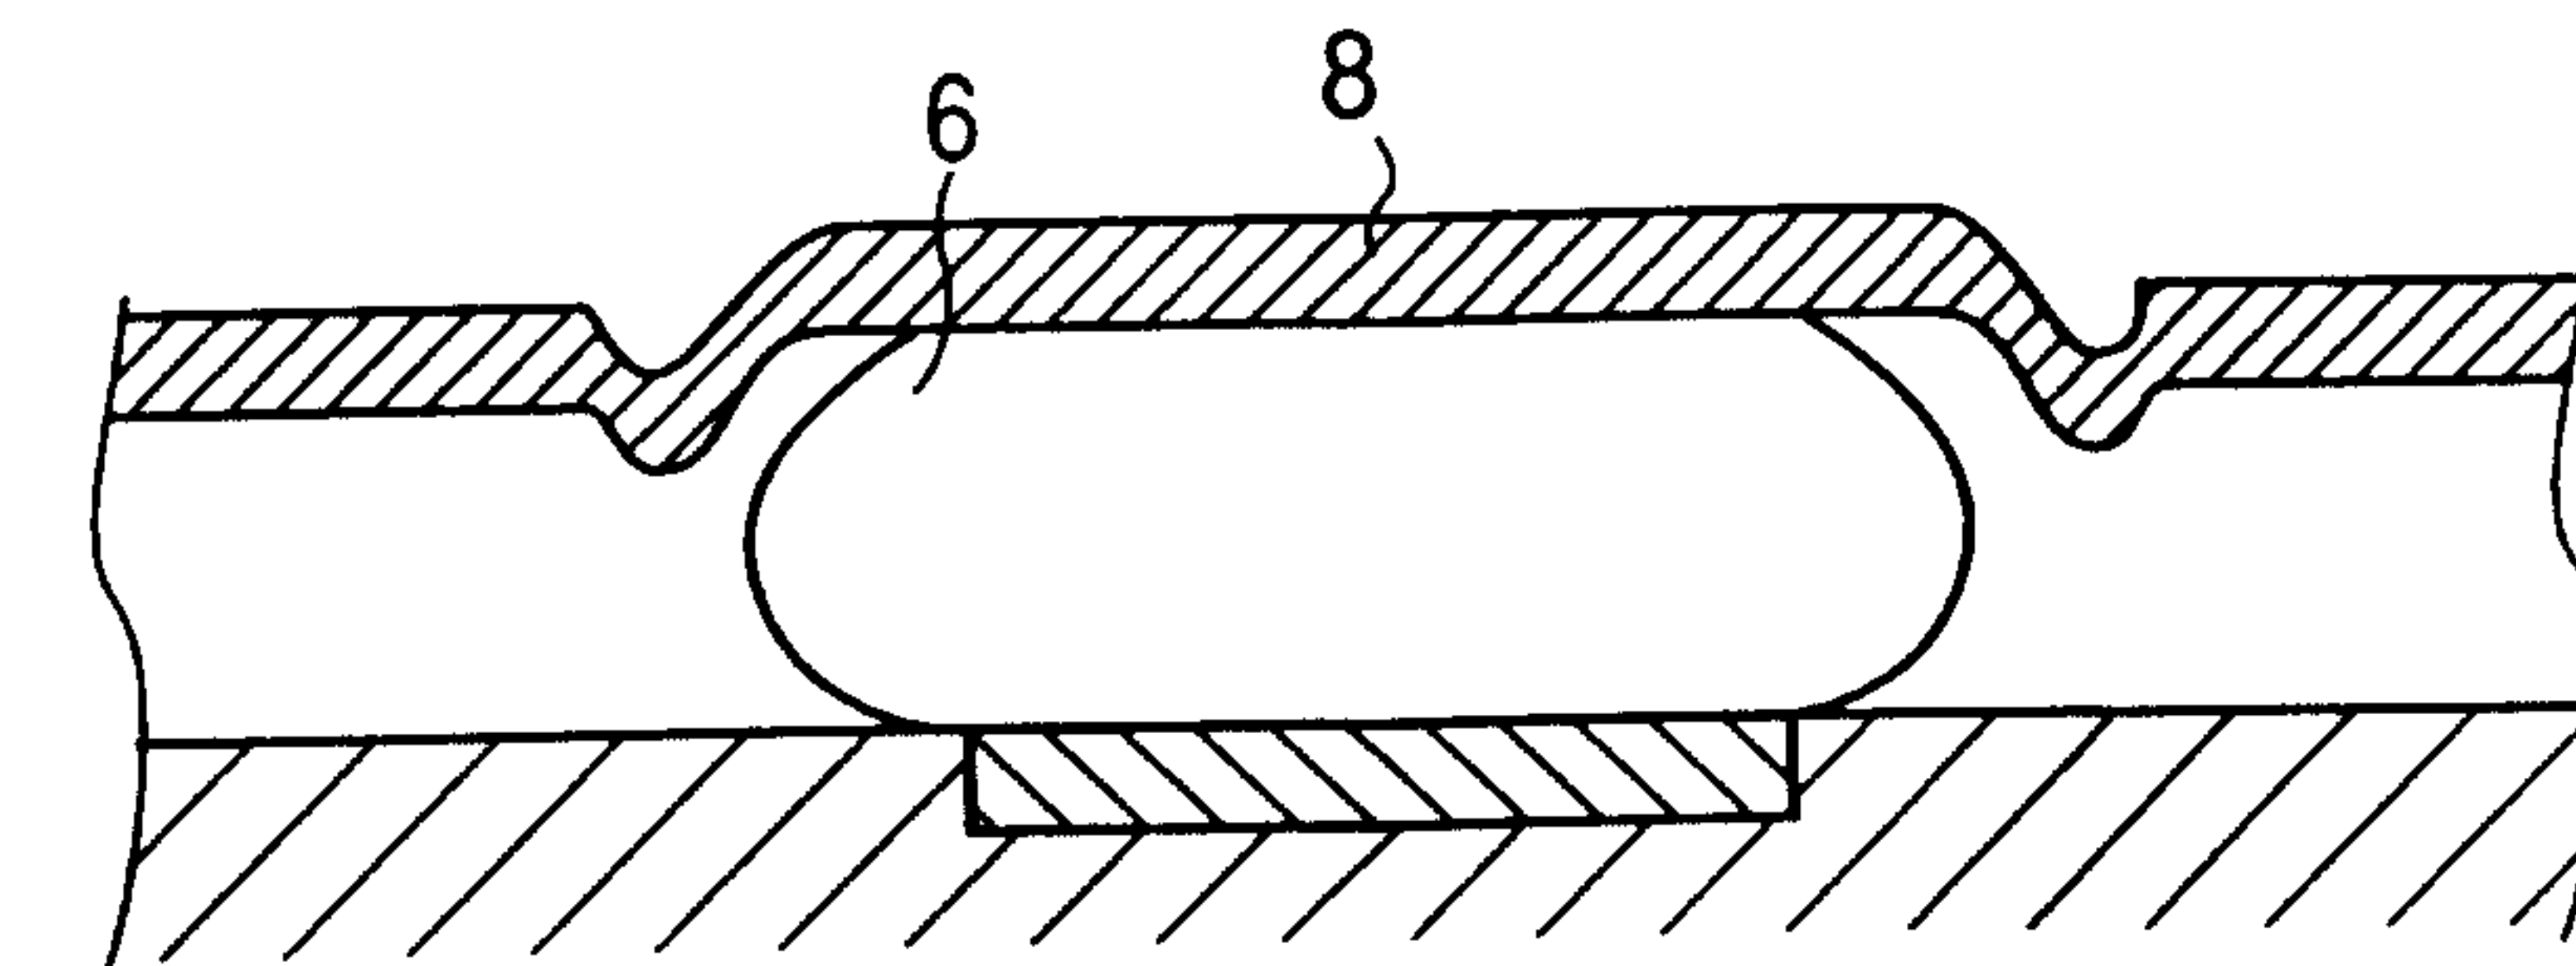


FIG. 20E

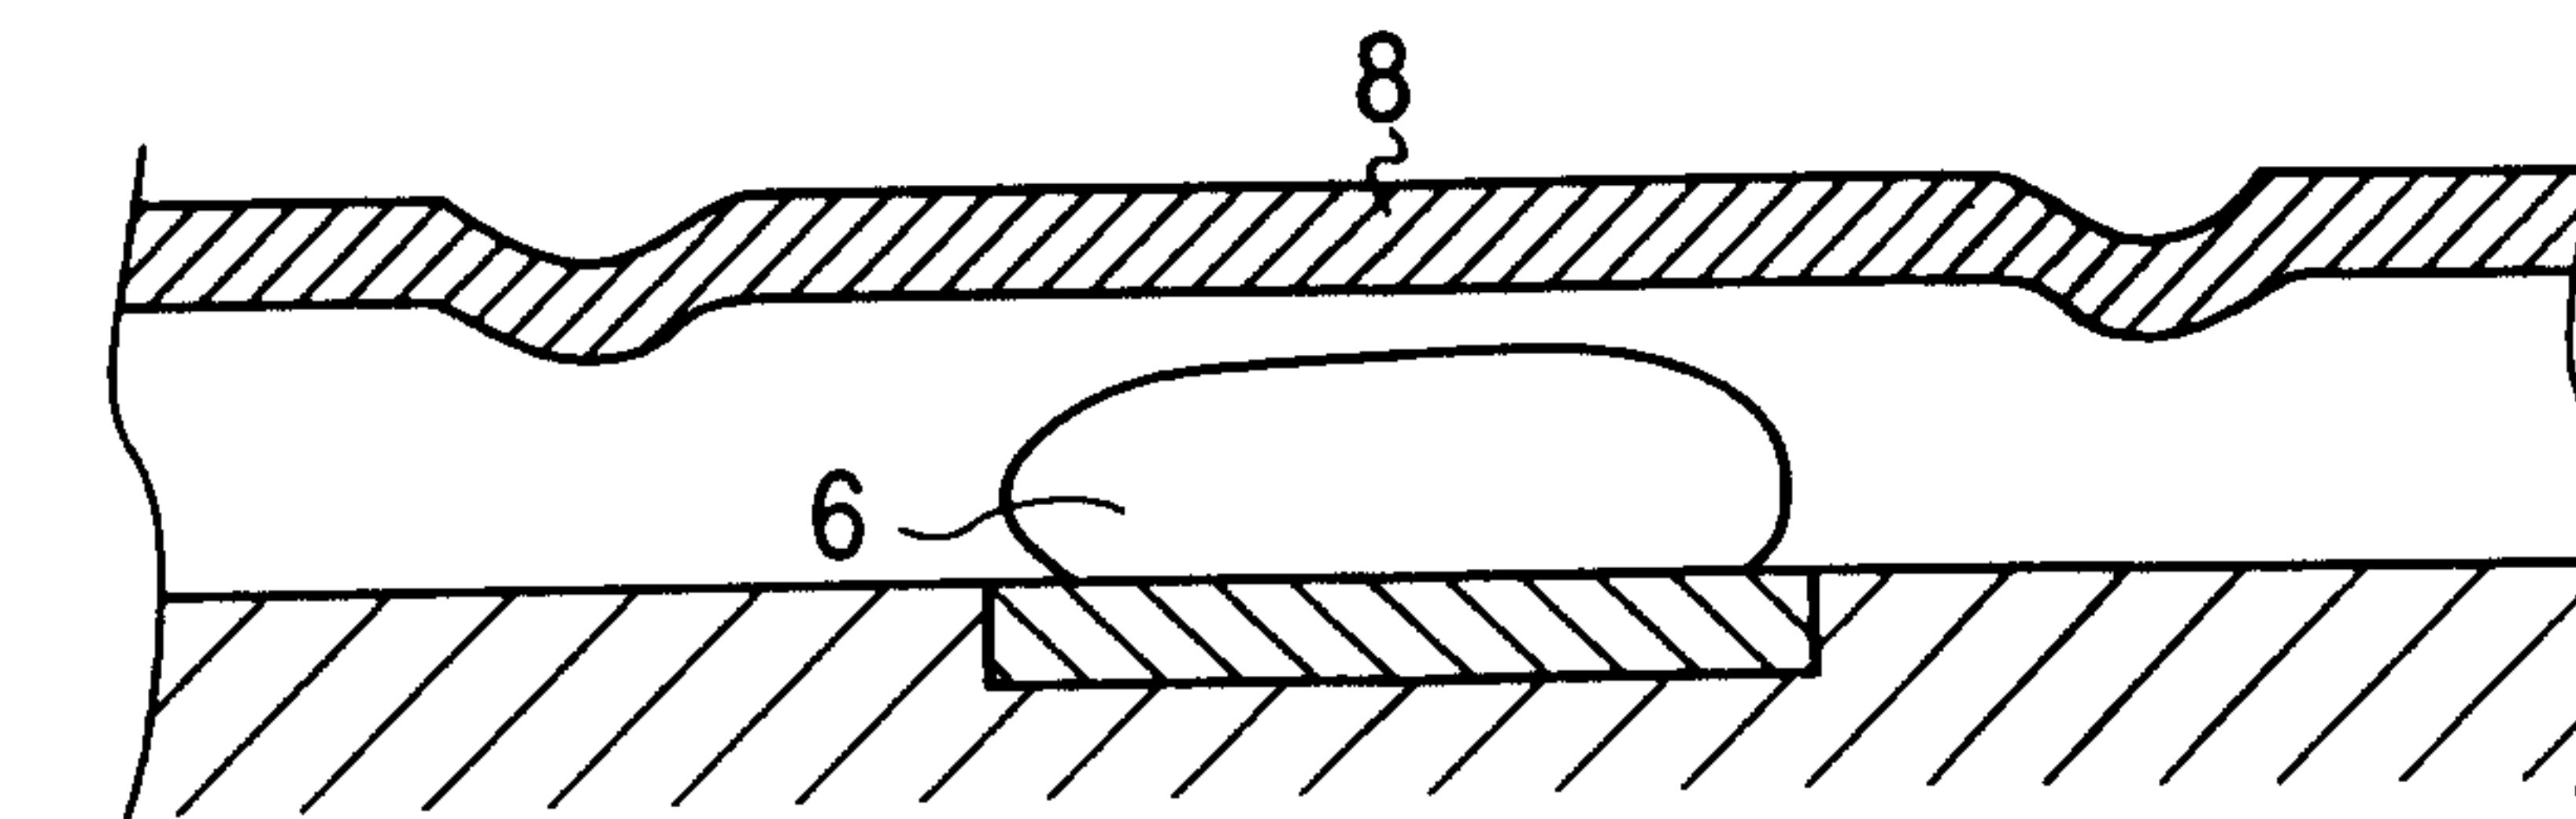
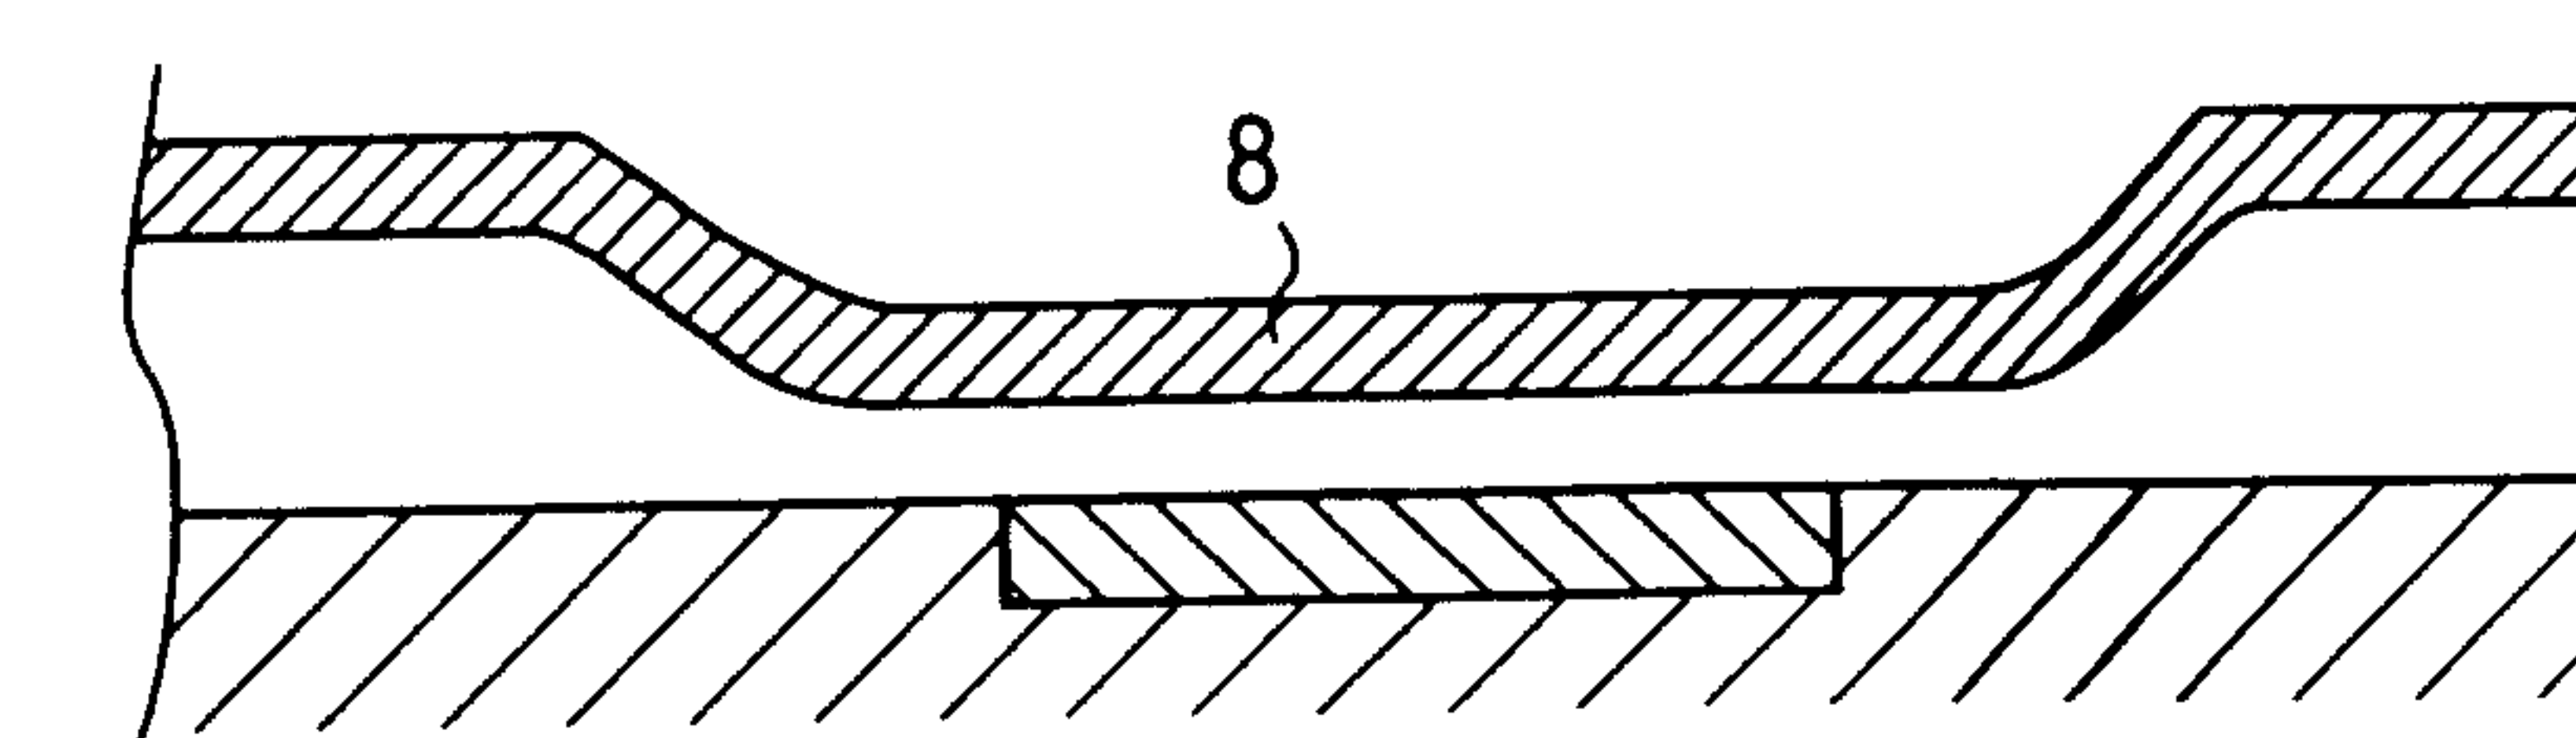


FIG. 20F



17 / 29

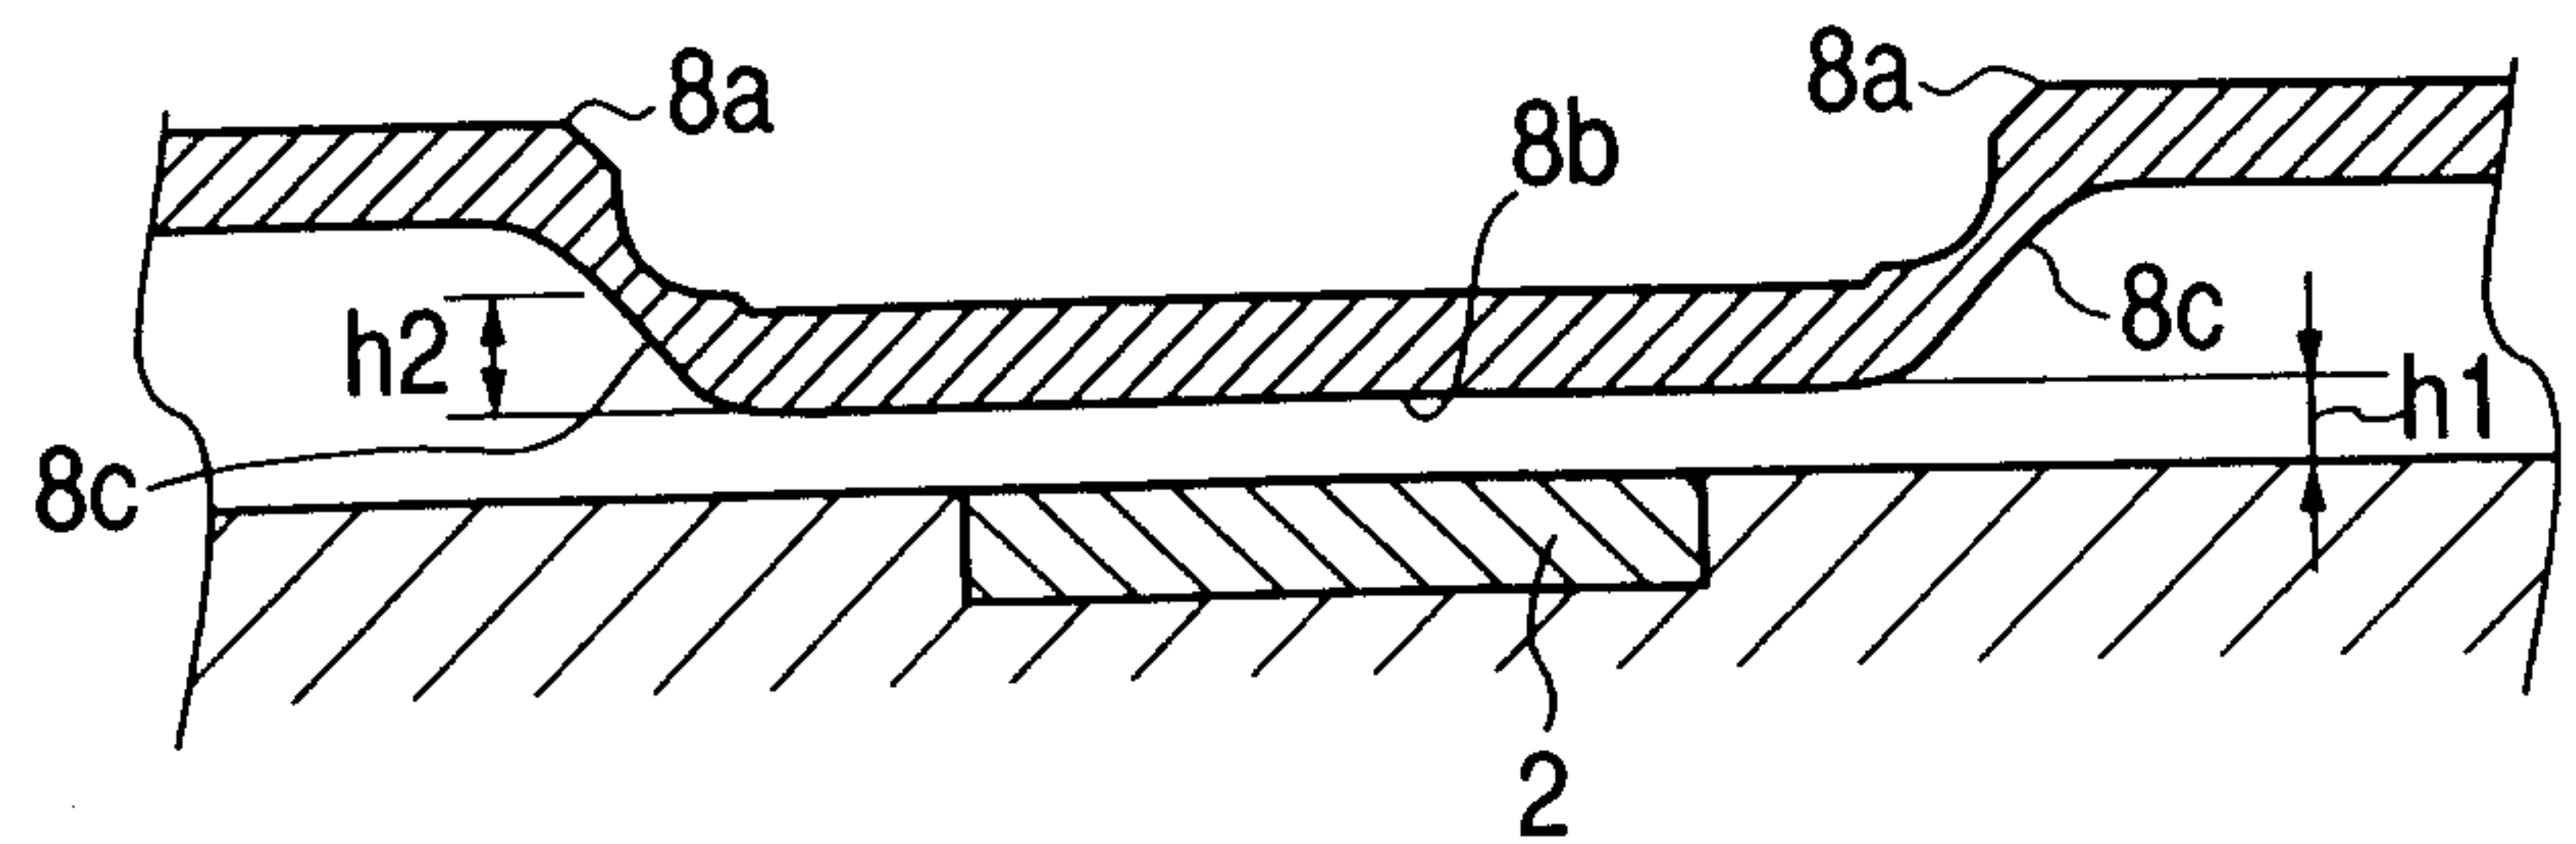
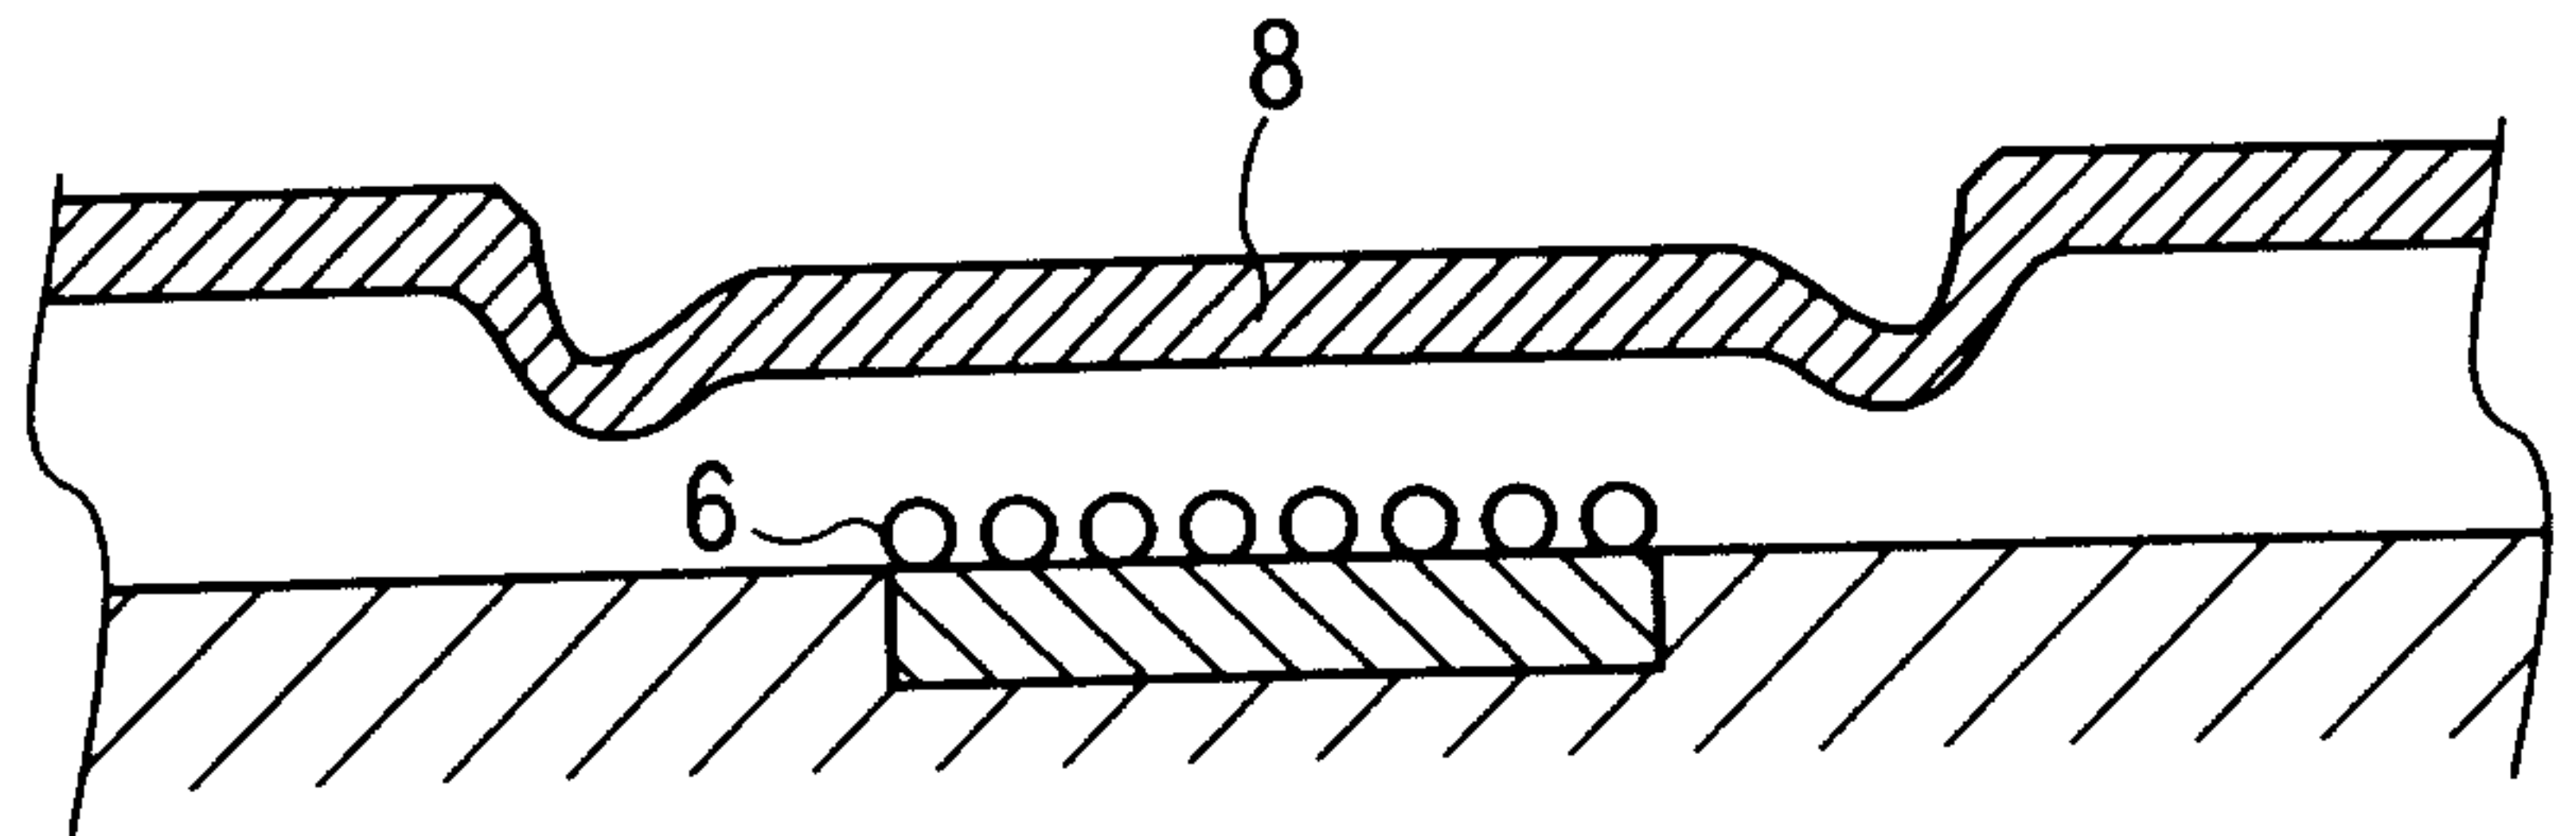
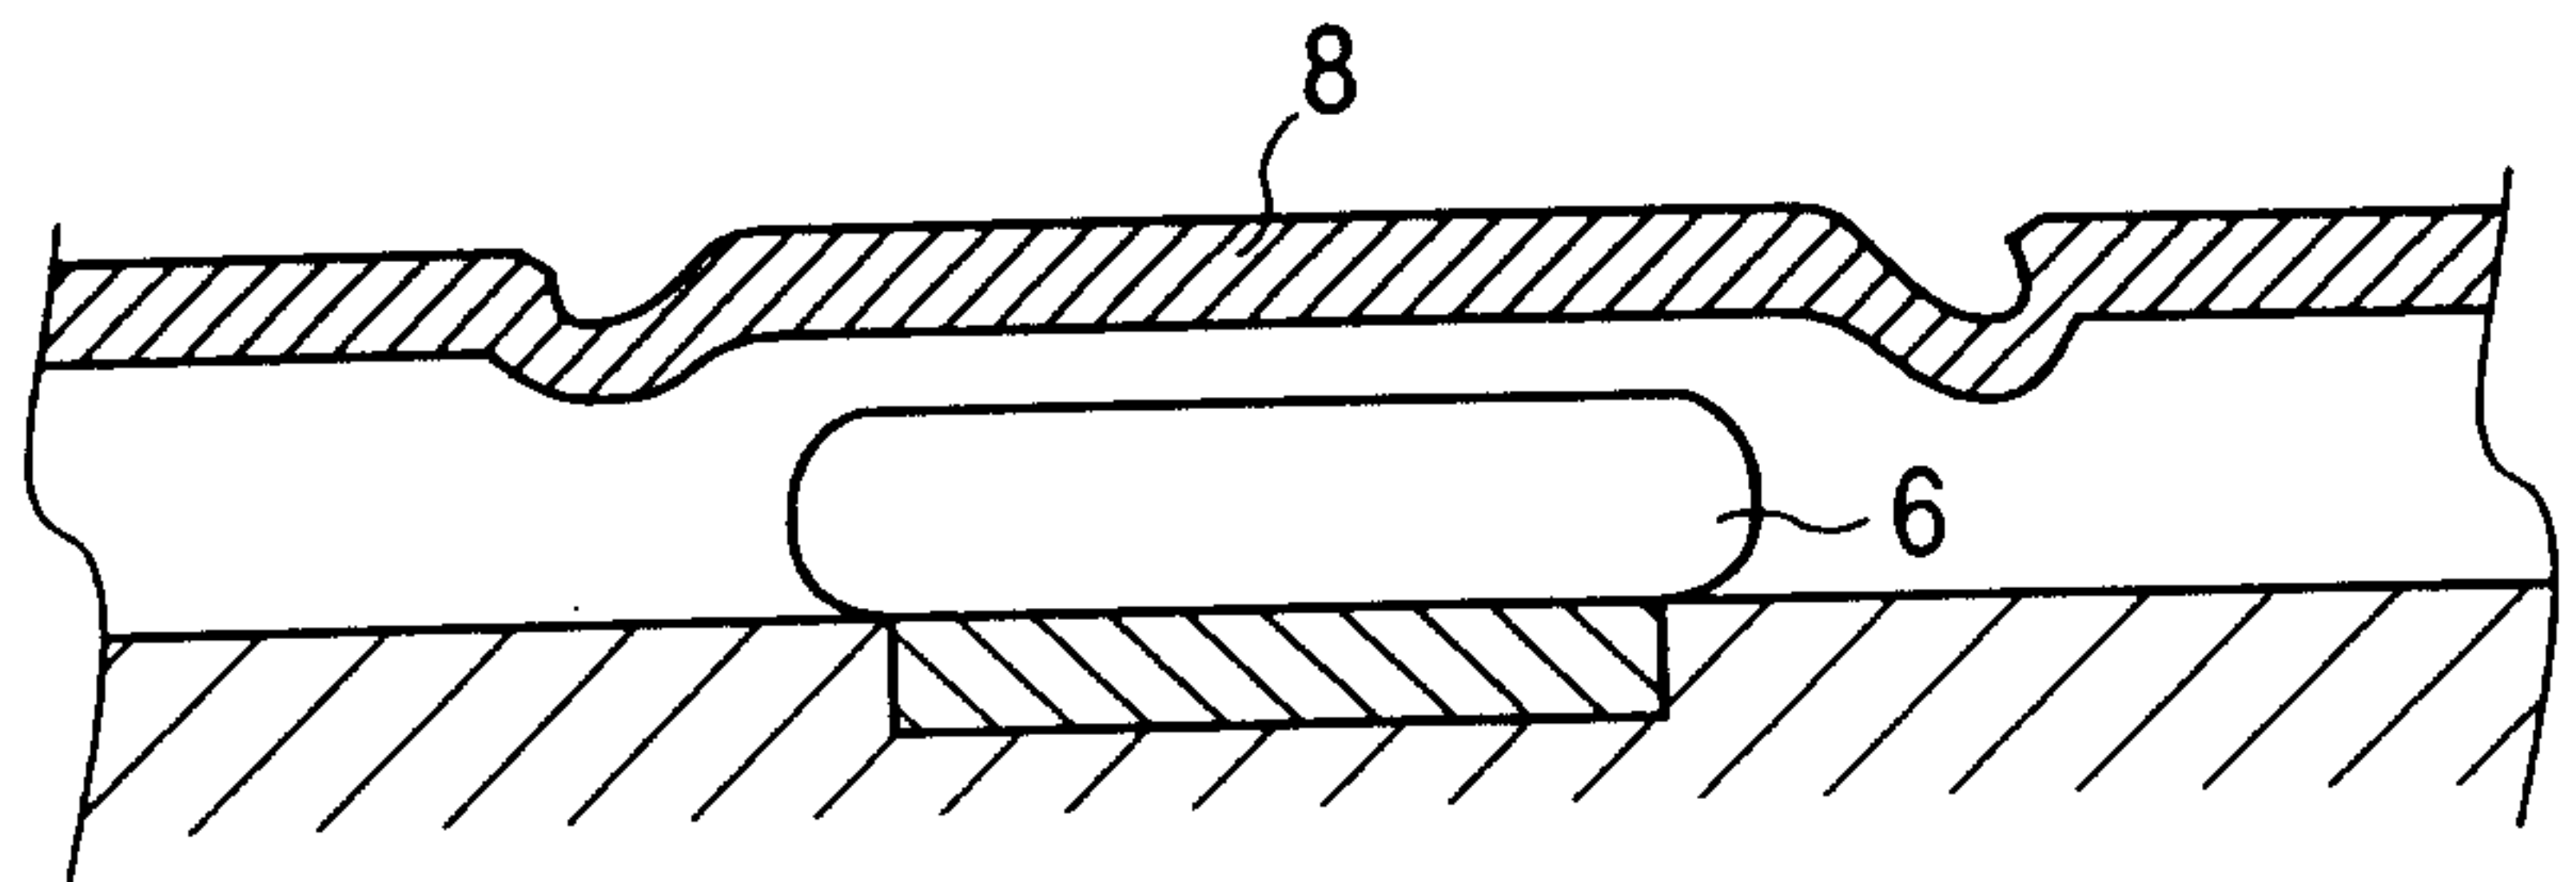
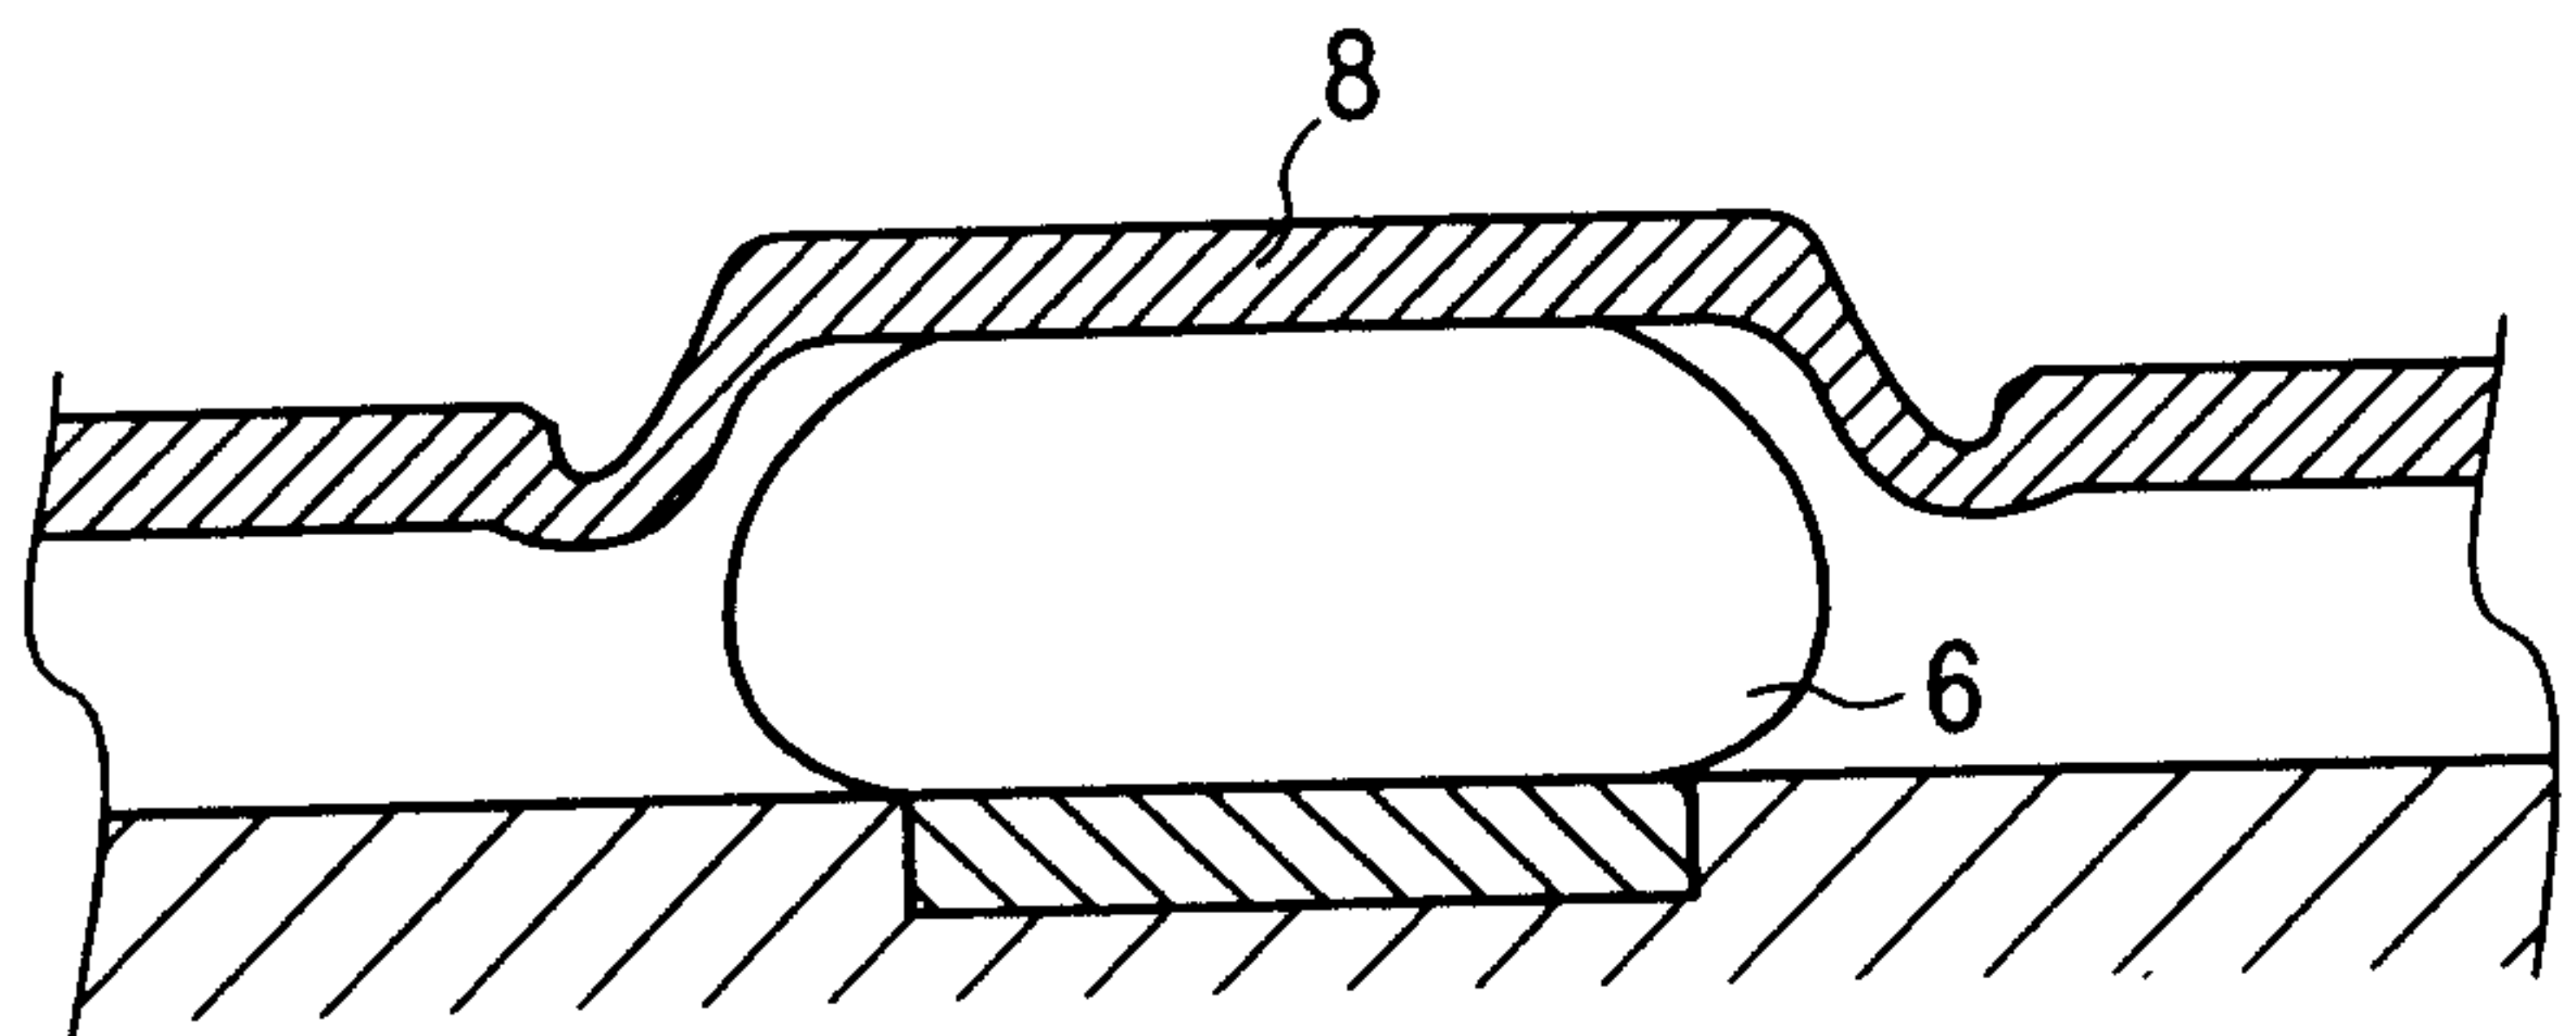
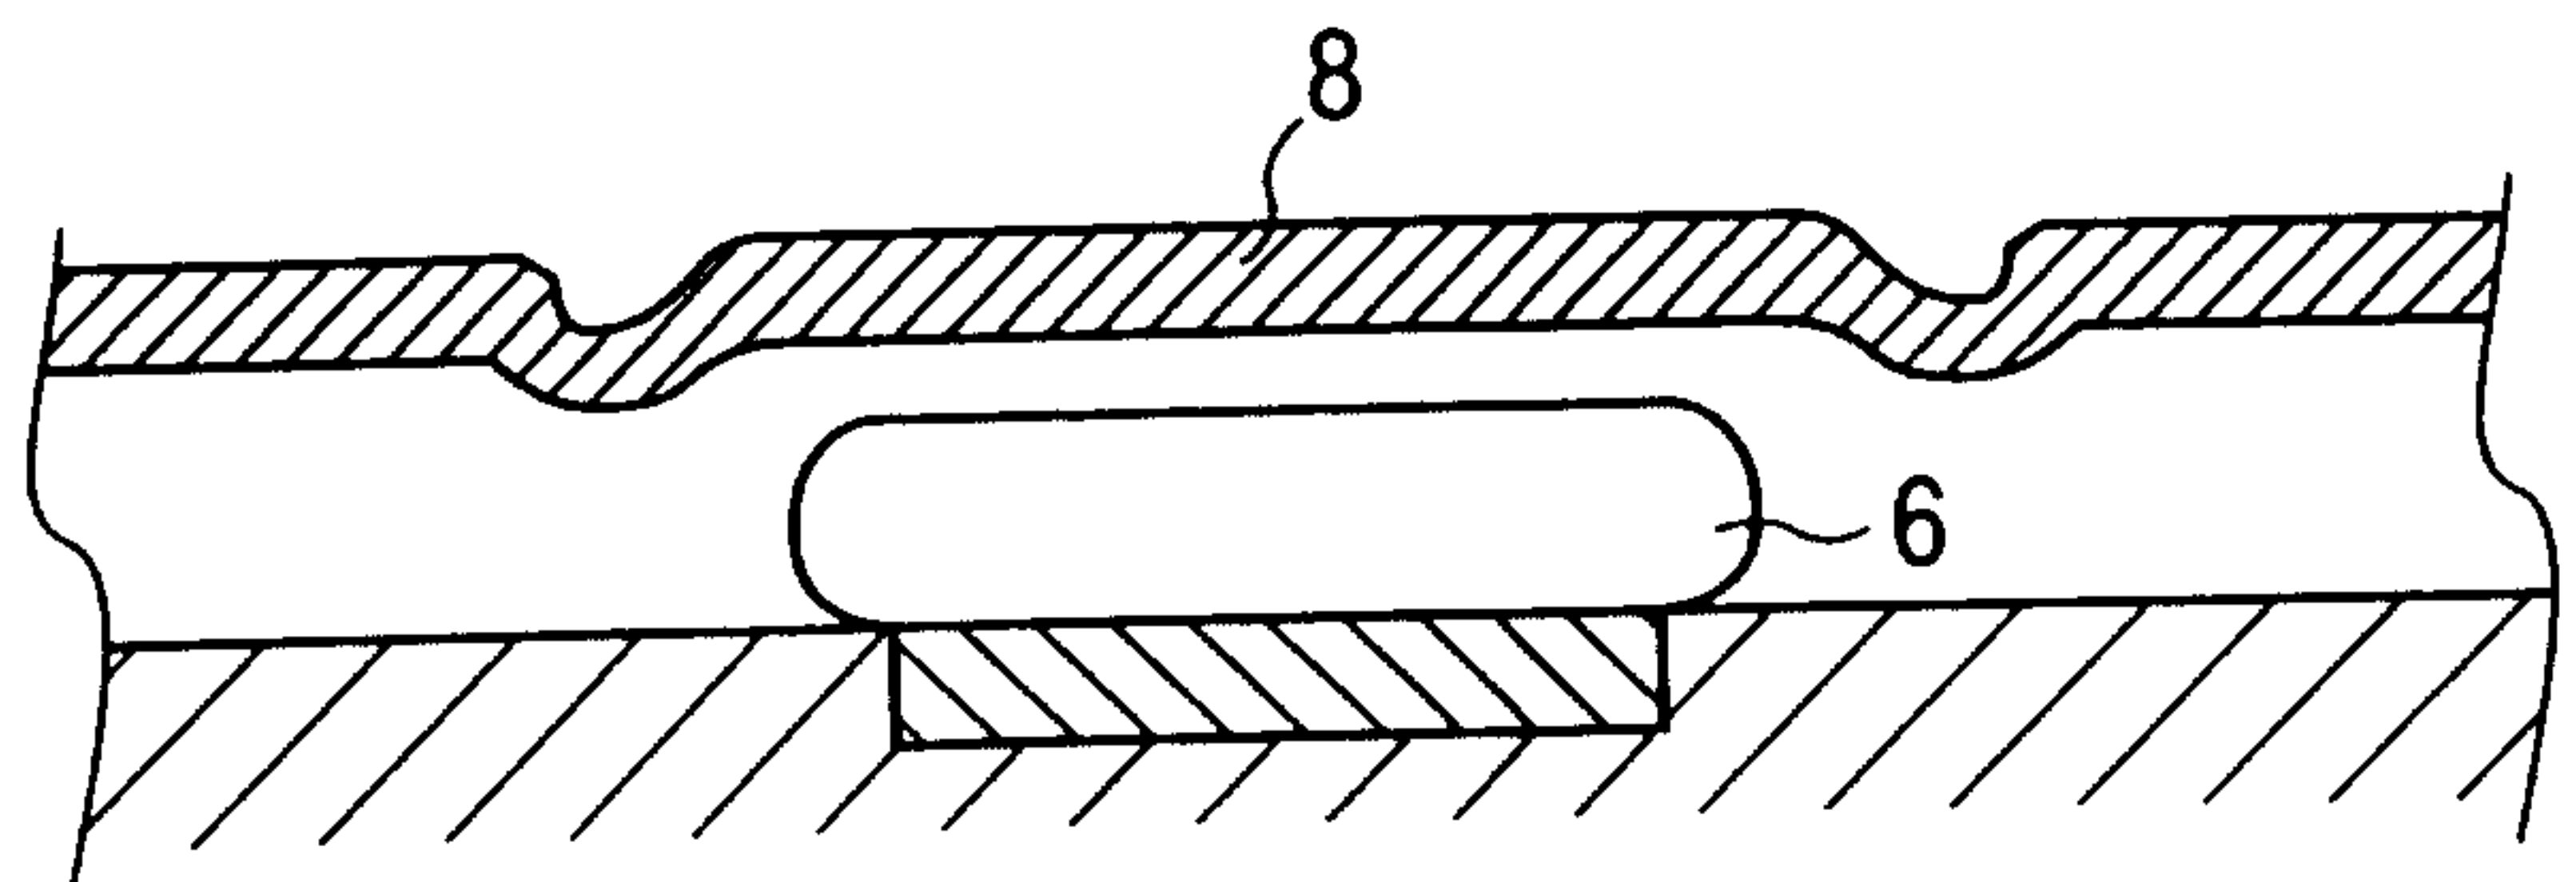
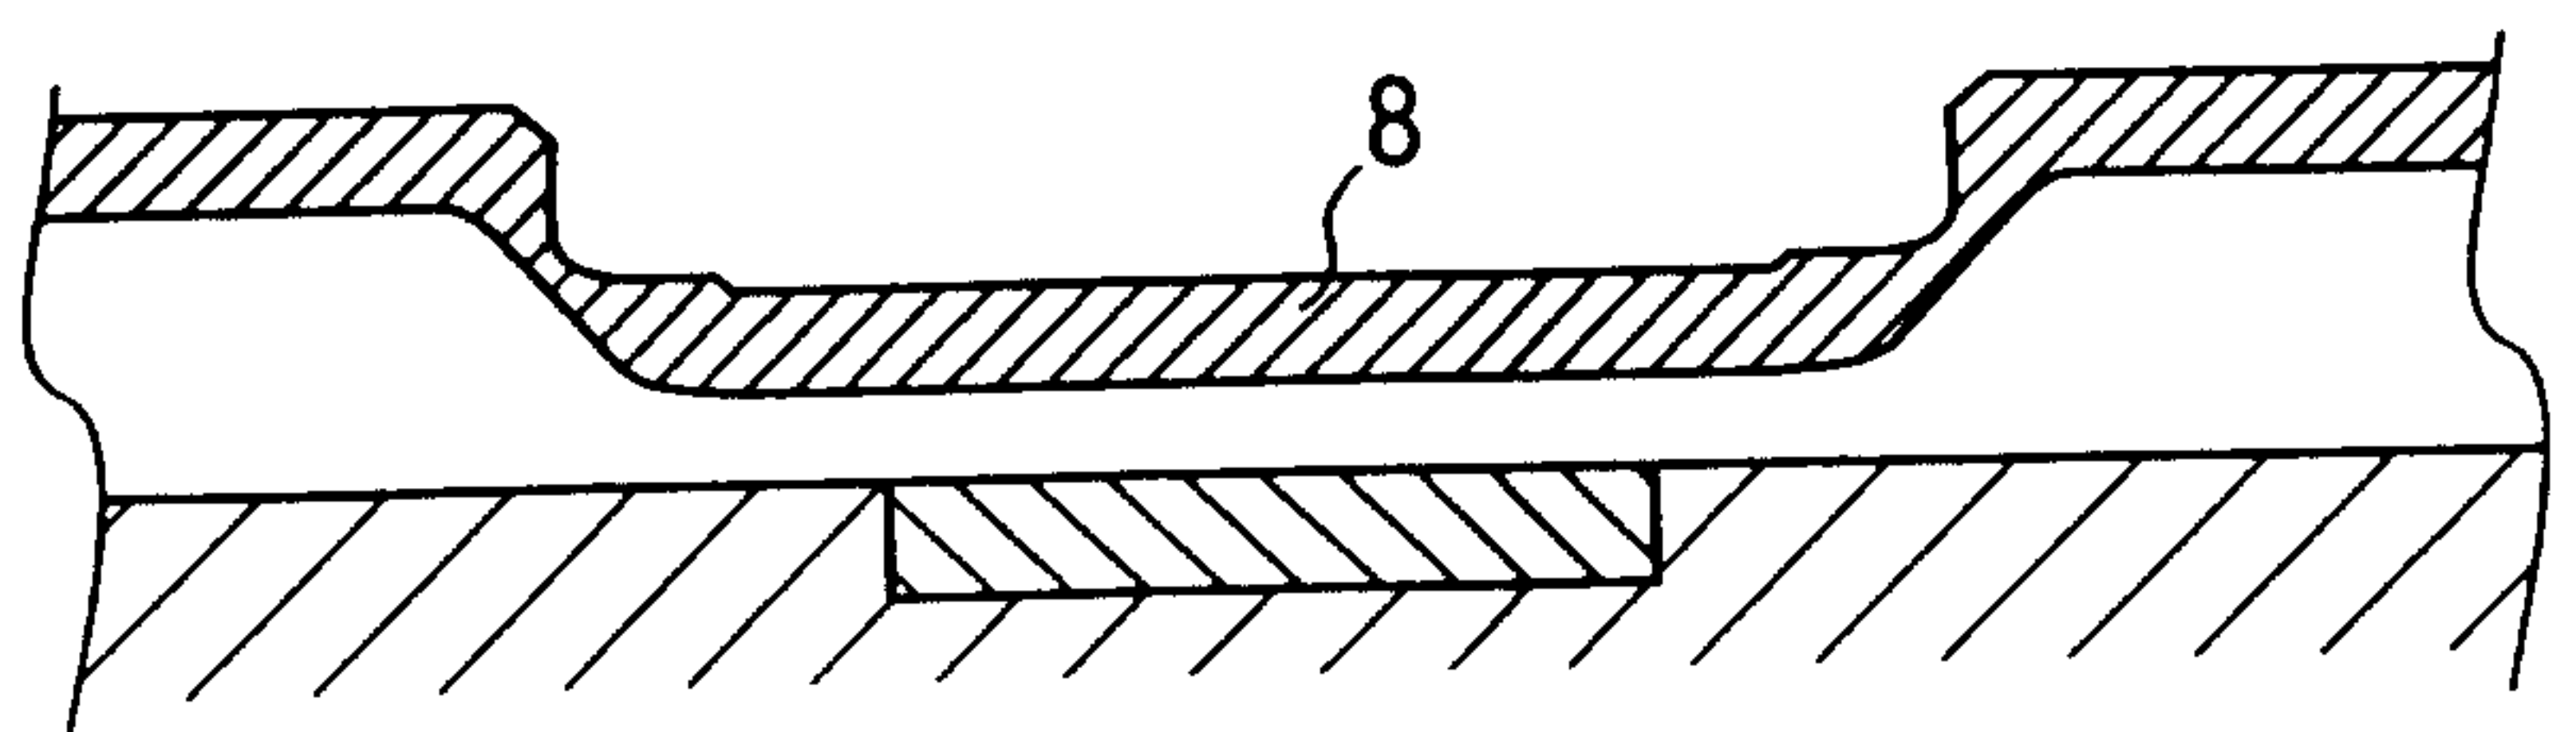
FIG. 21A**FIG. 21B****FIG. 21C****FIG. 21D****FIG. 21E****FIG. 21F**

FIG. 22A FIG. 22B FIG. 22C

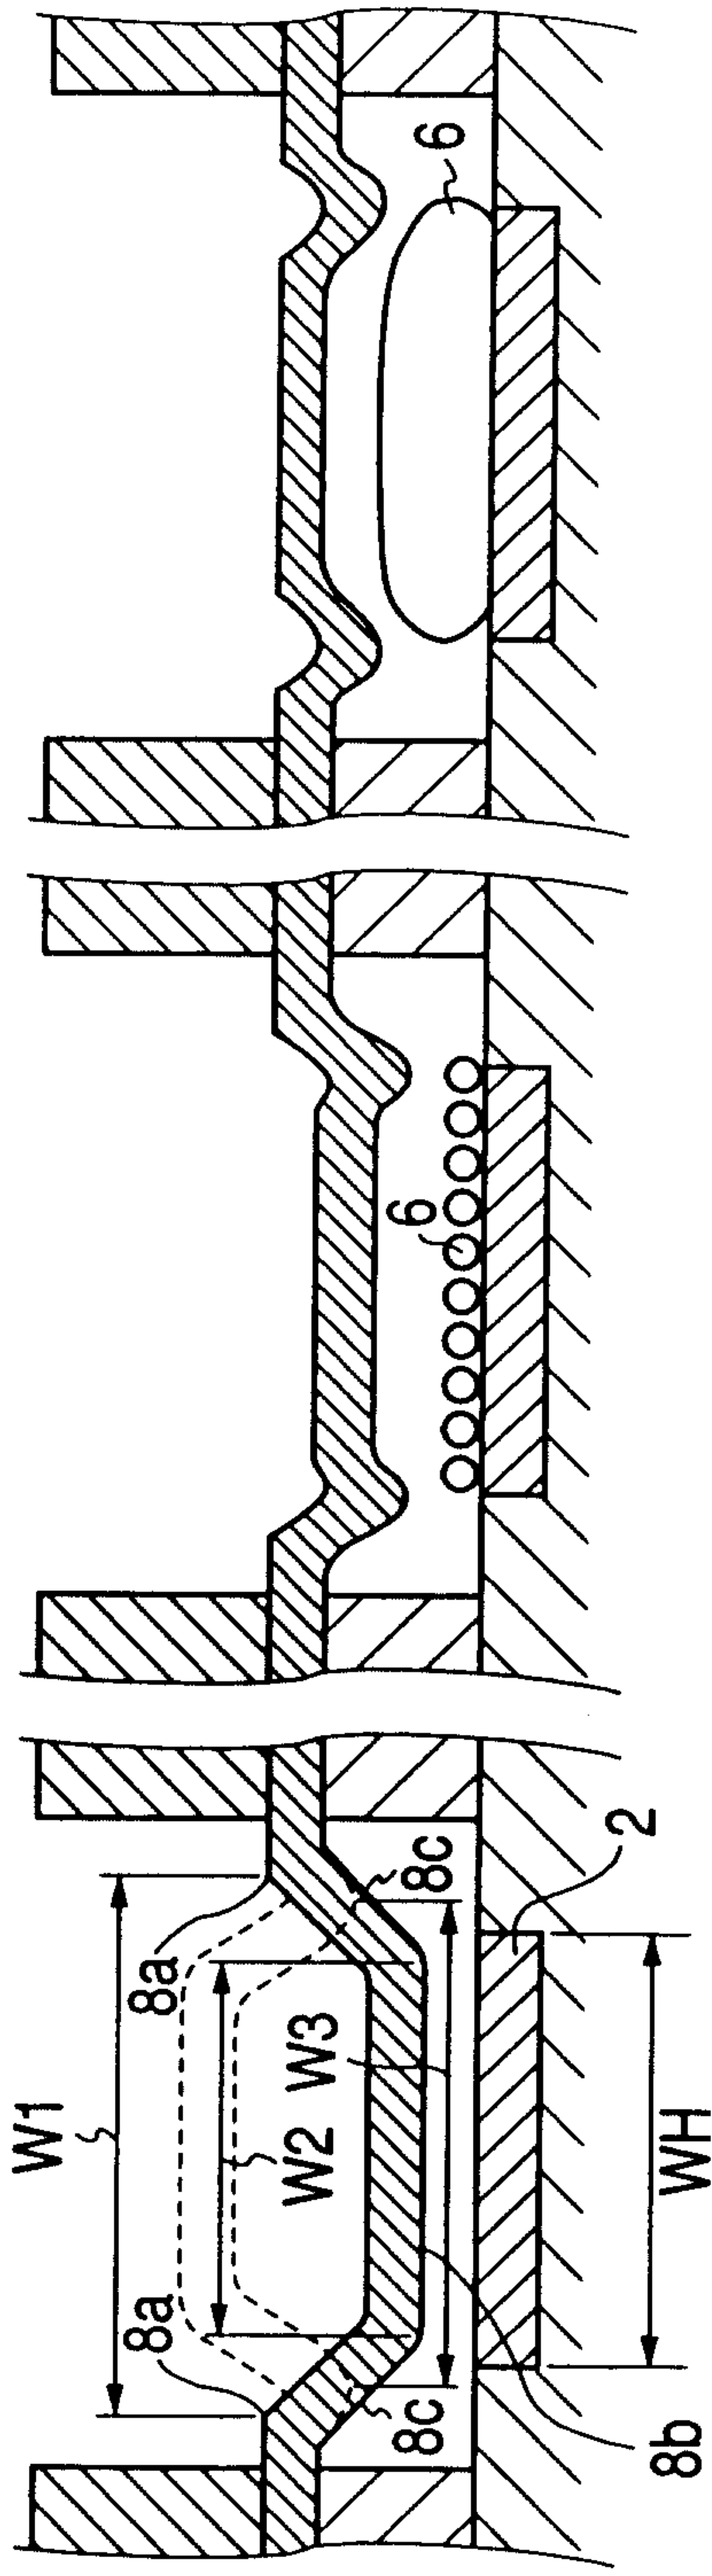


FIG. 22D FIG. 22E FIG. 22F

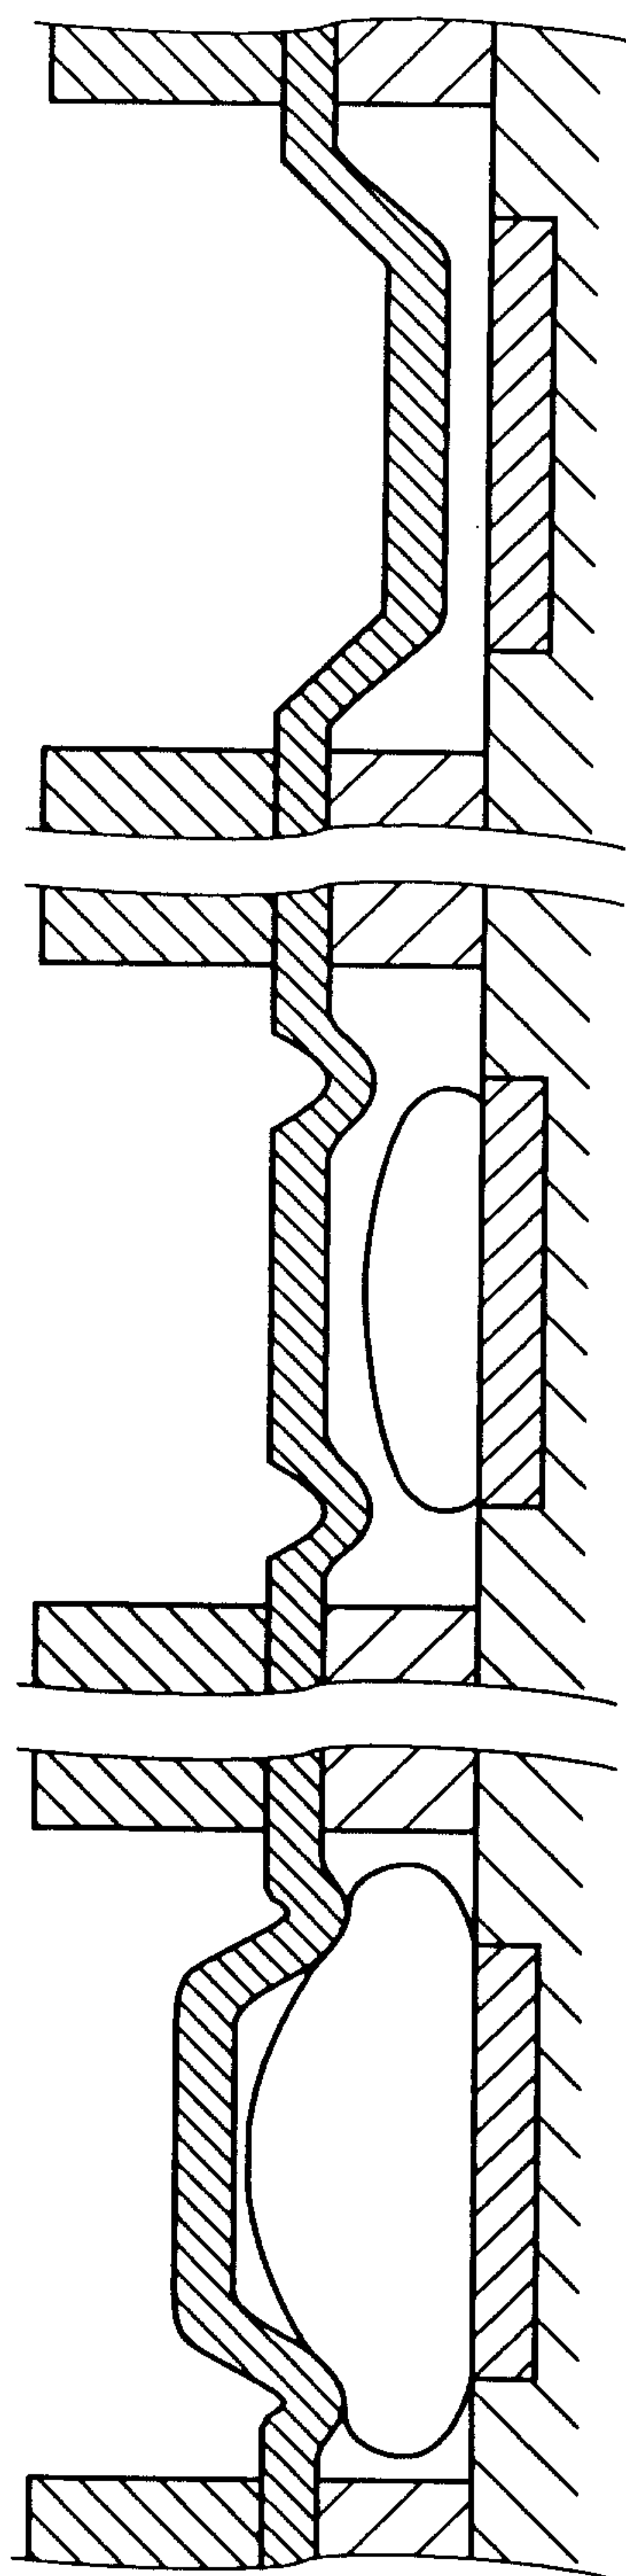


FIG. 23A

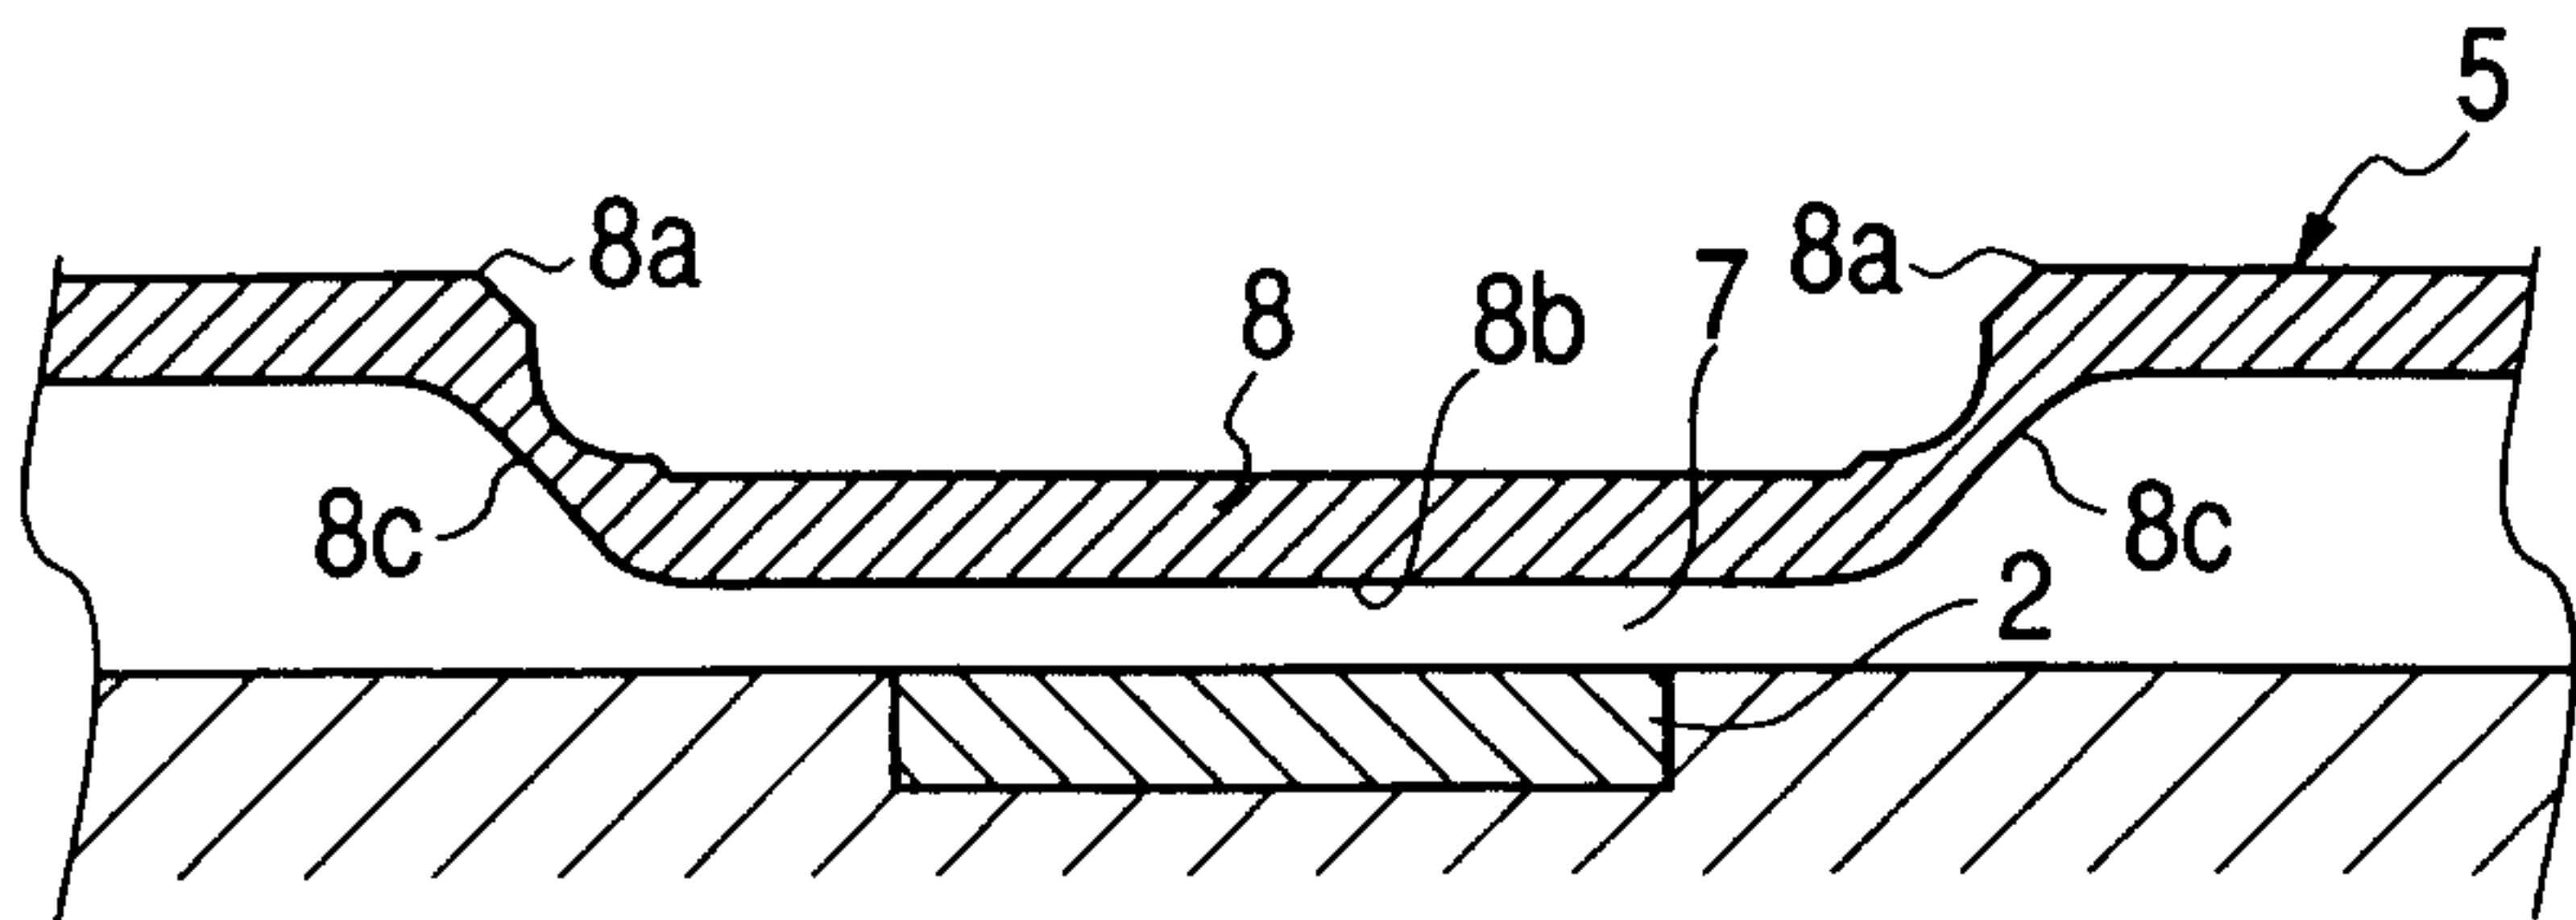


FIG. 23B

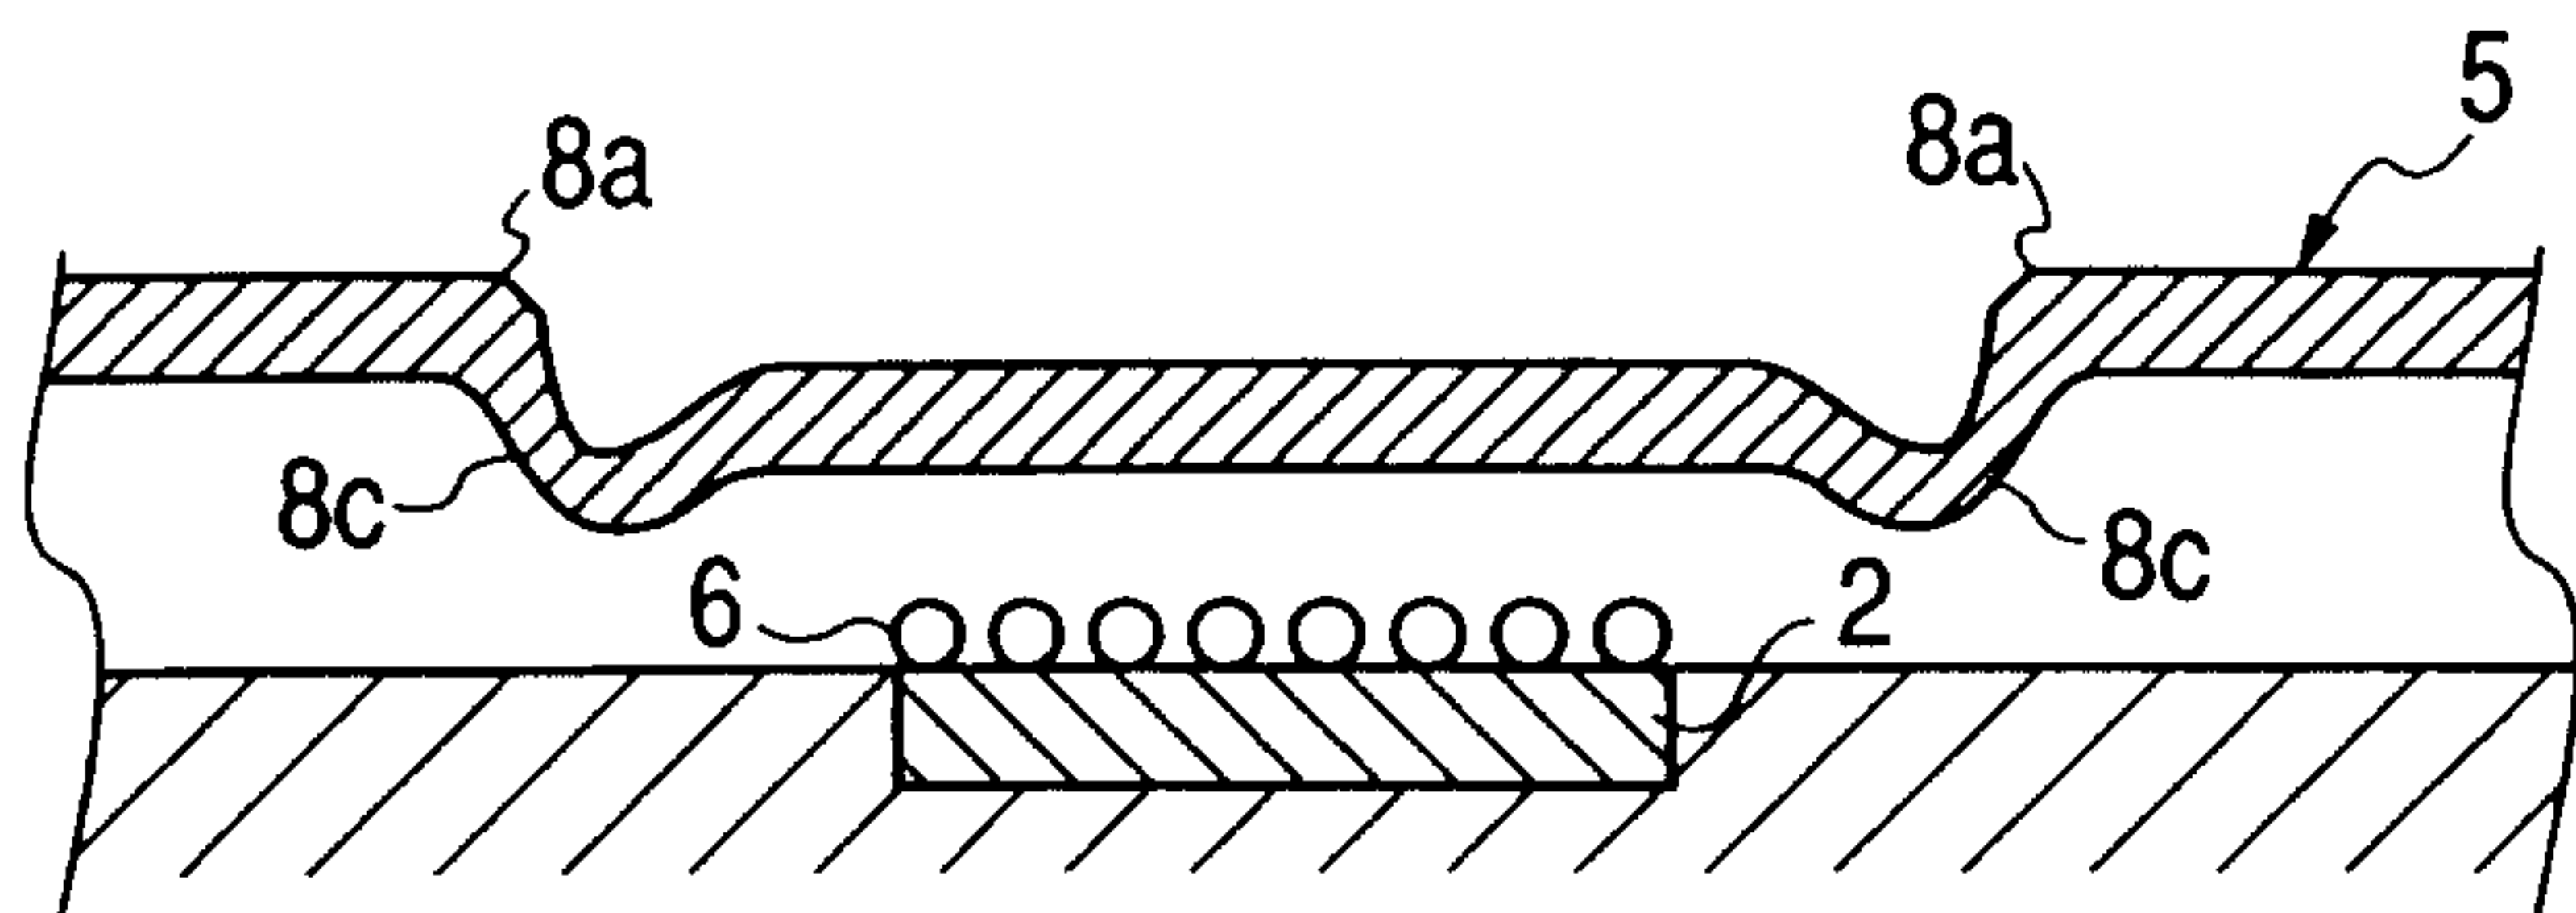


FIG. 23C

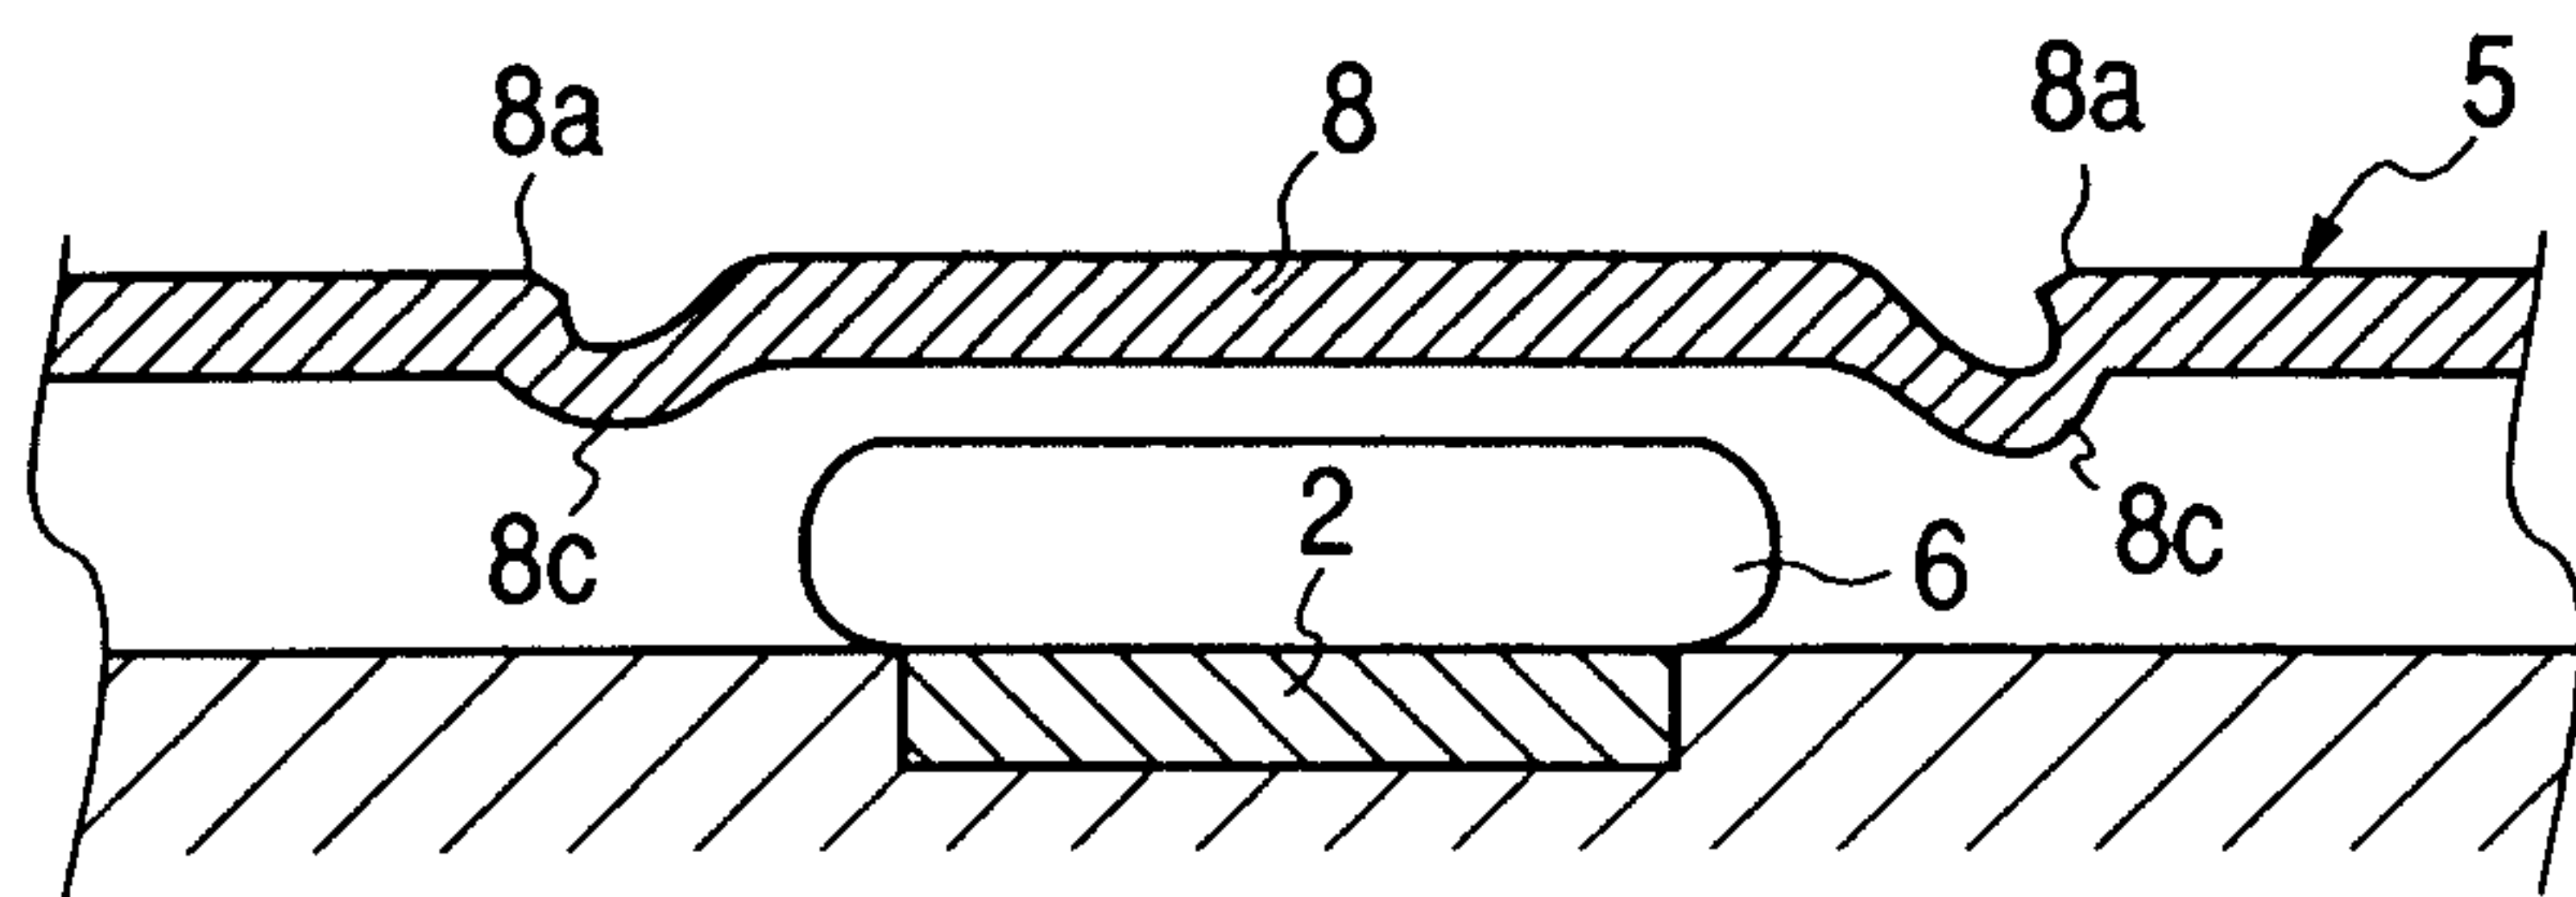


FIG. 23D

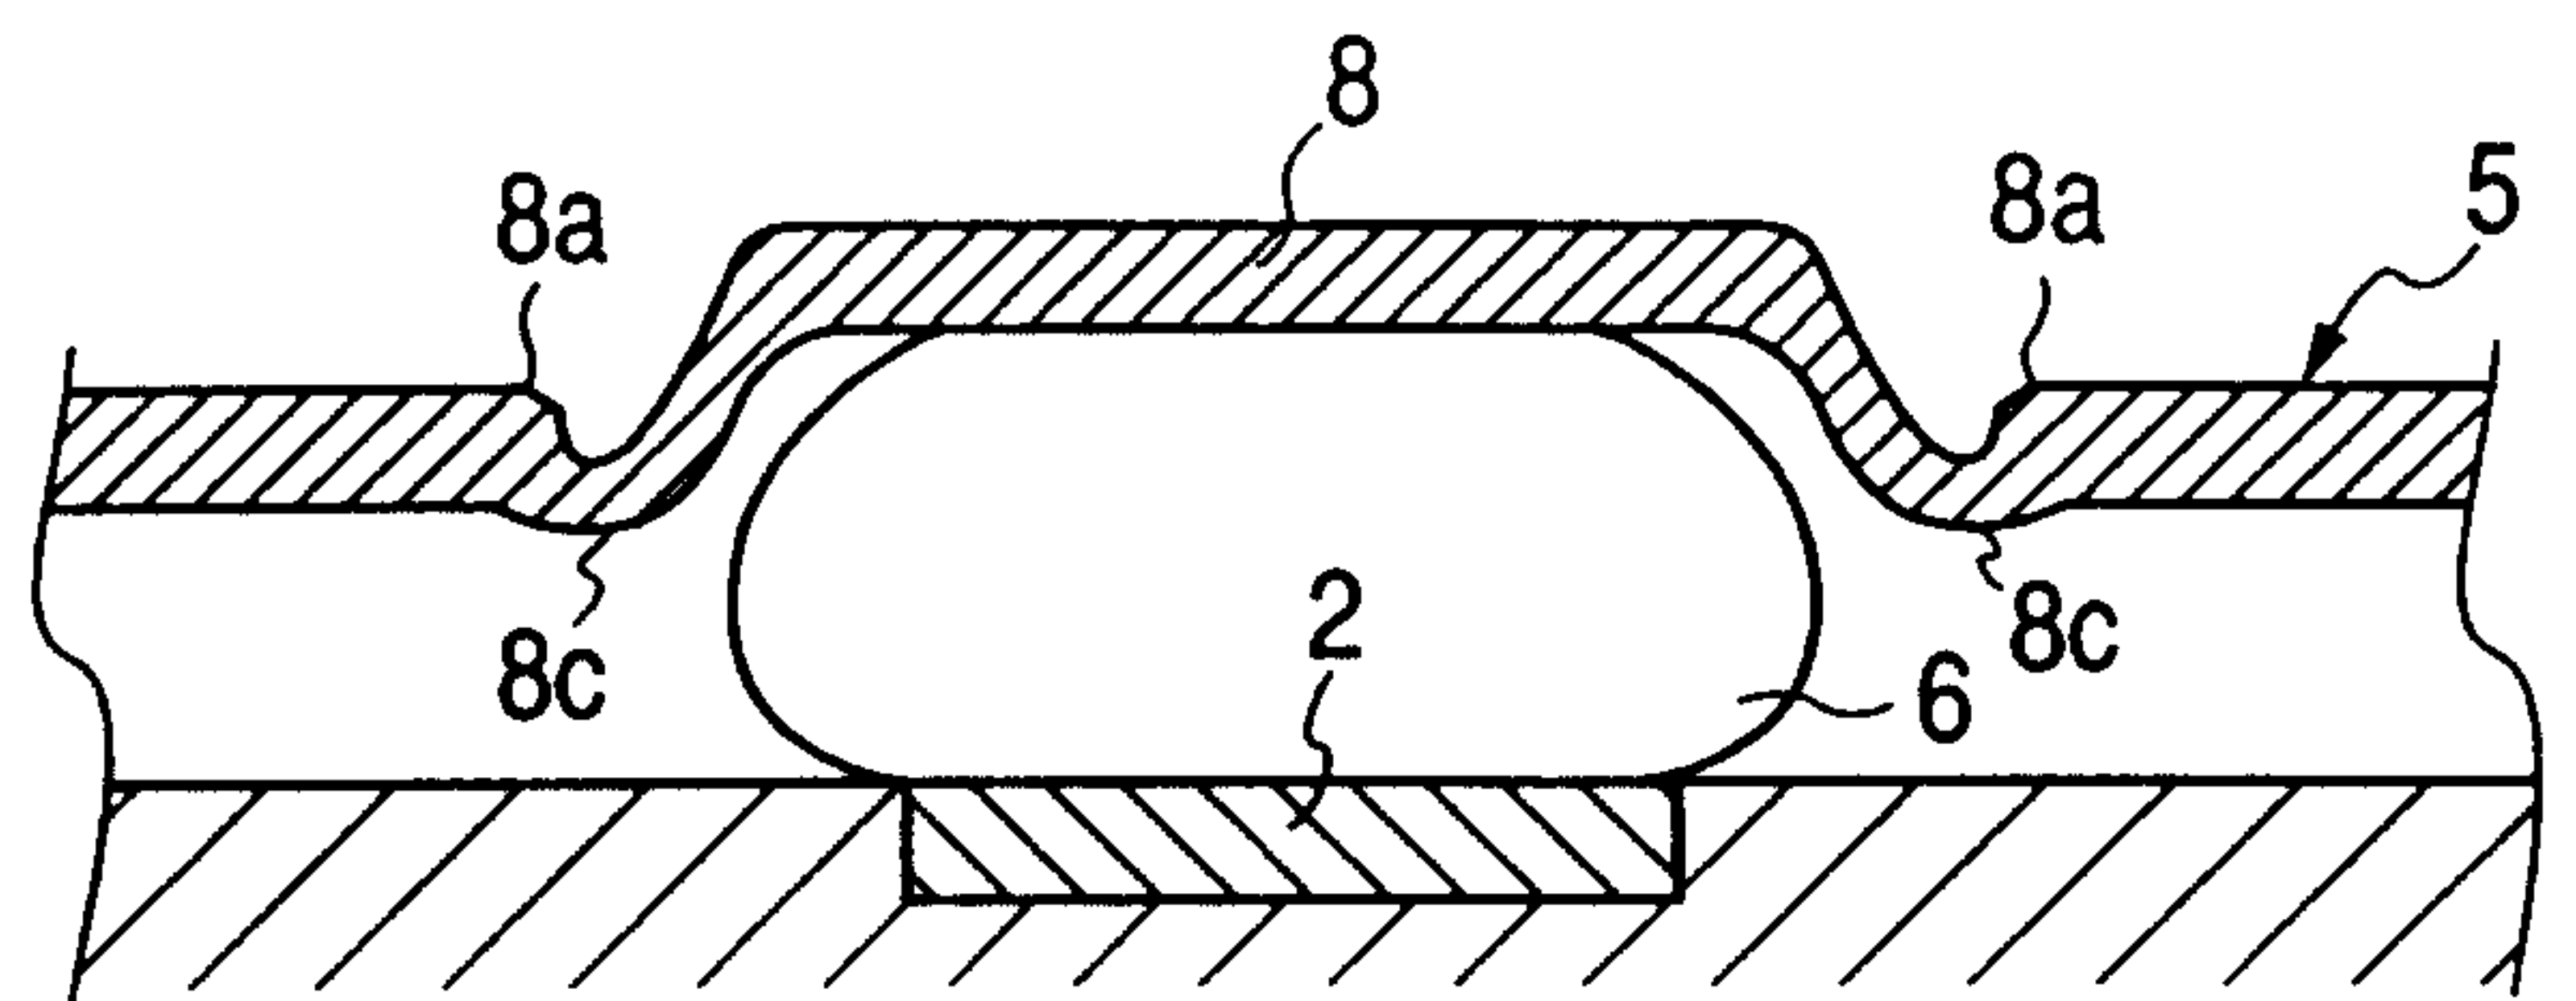


FIG. 23E

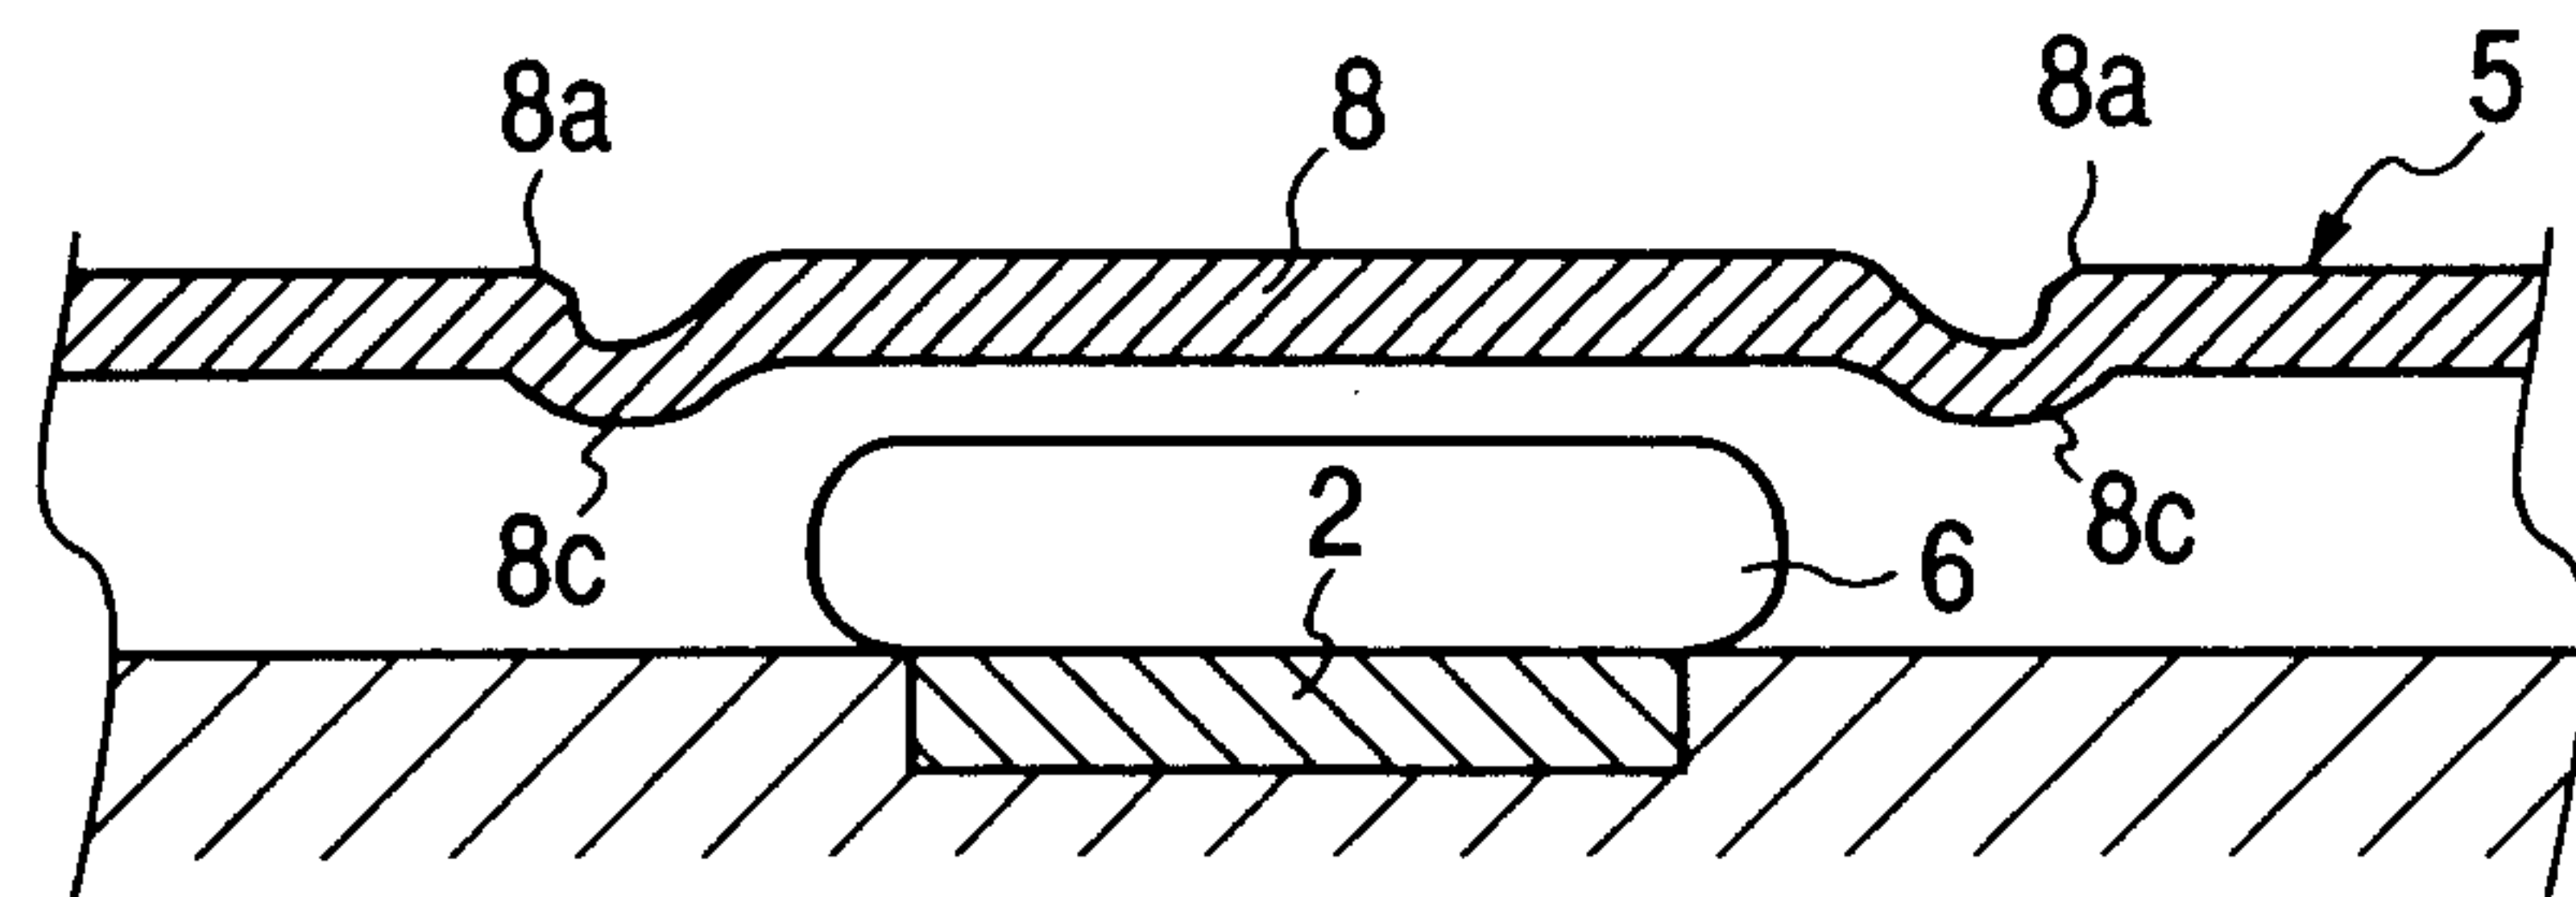


FIG. 23F

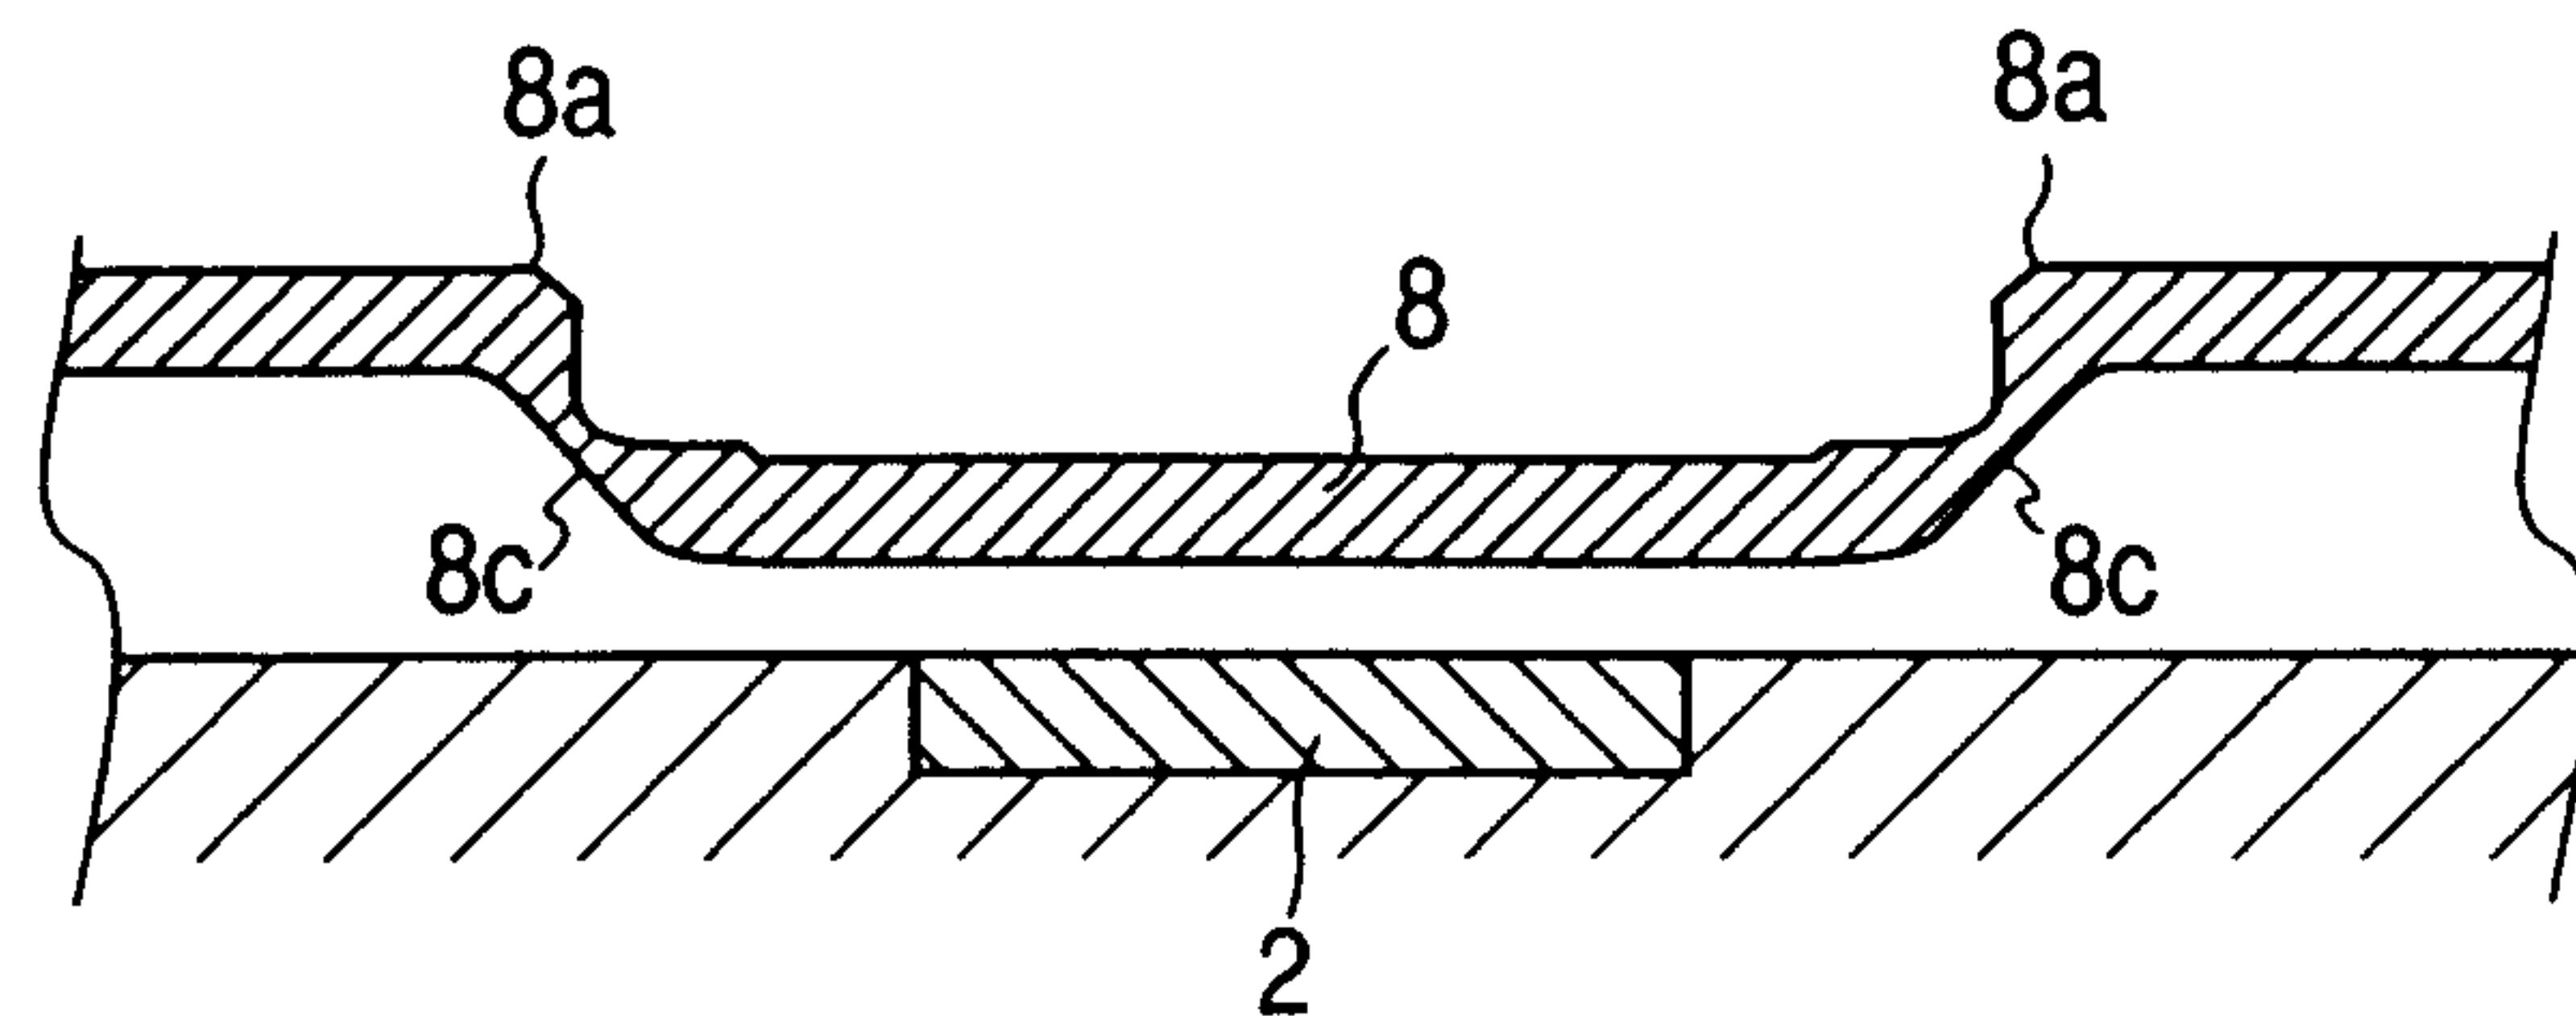


FIG. 24A

FIG. 24B

FIG. 24C

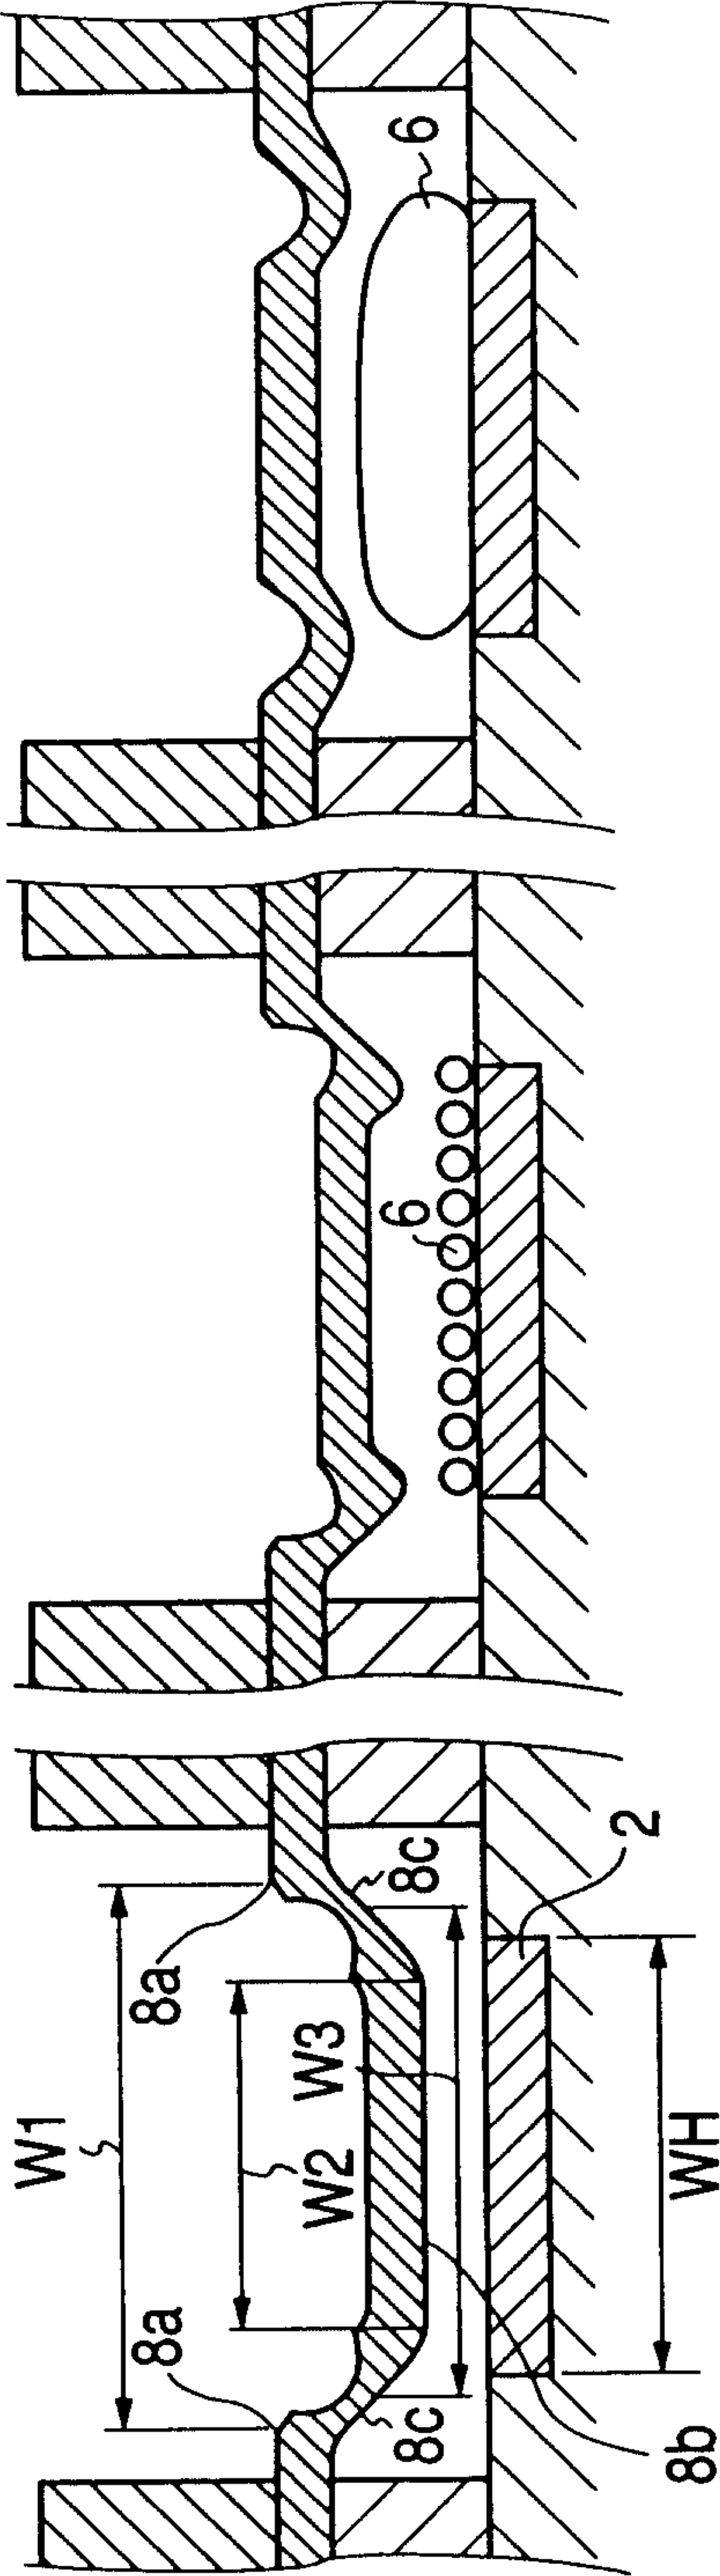


FIG. 24D

FIG. 24E

FIG. 24F

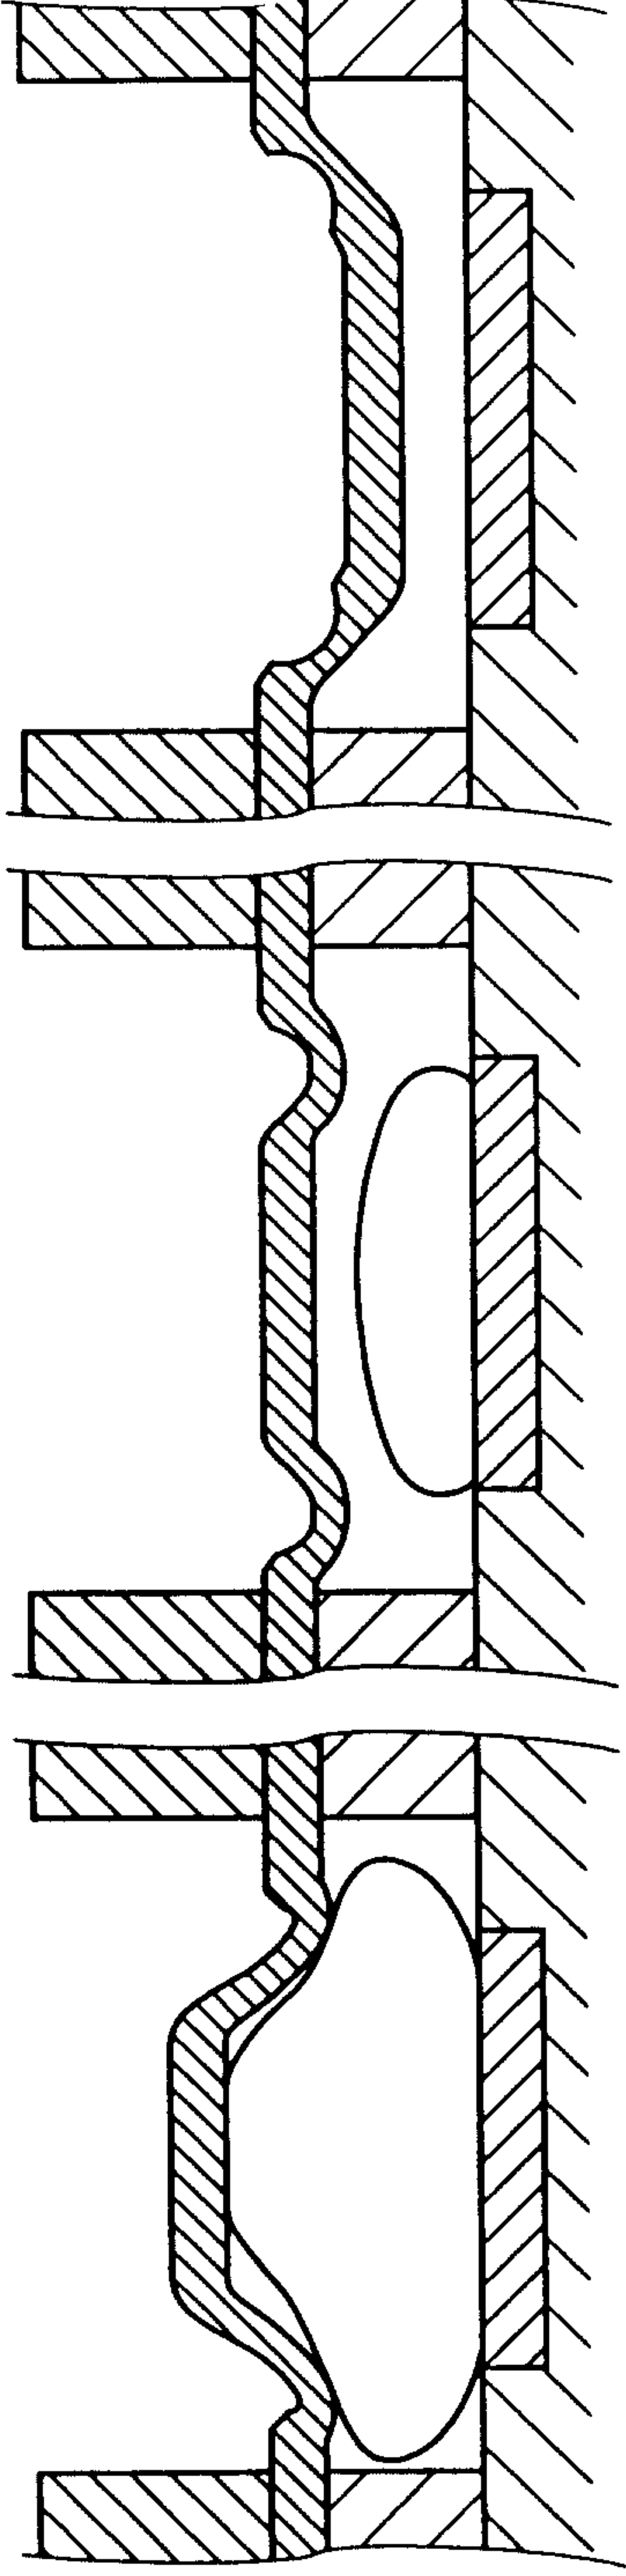


FIG. 25A

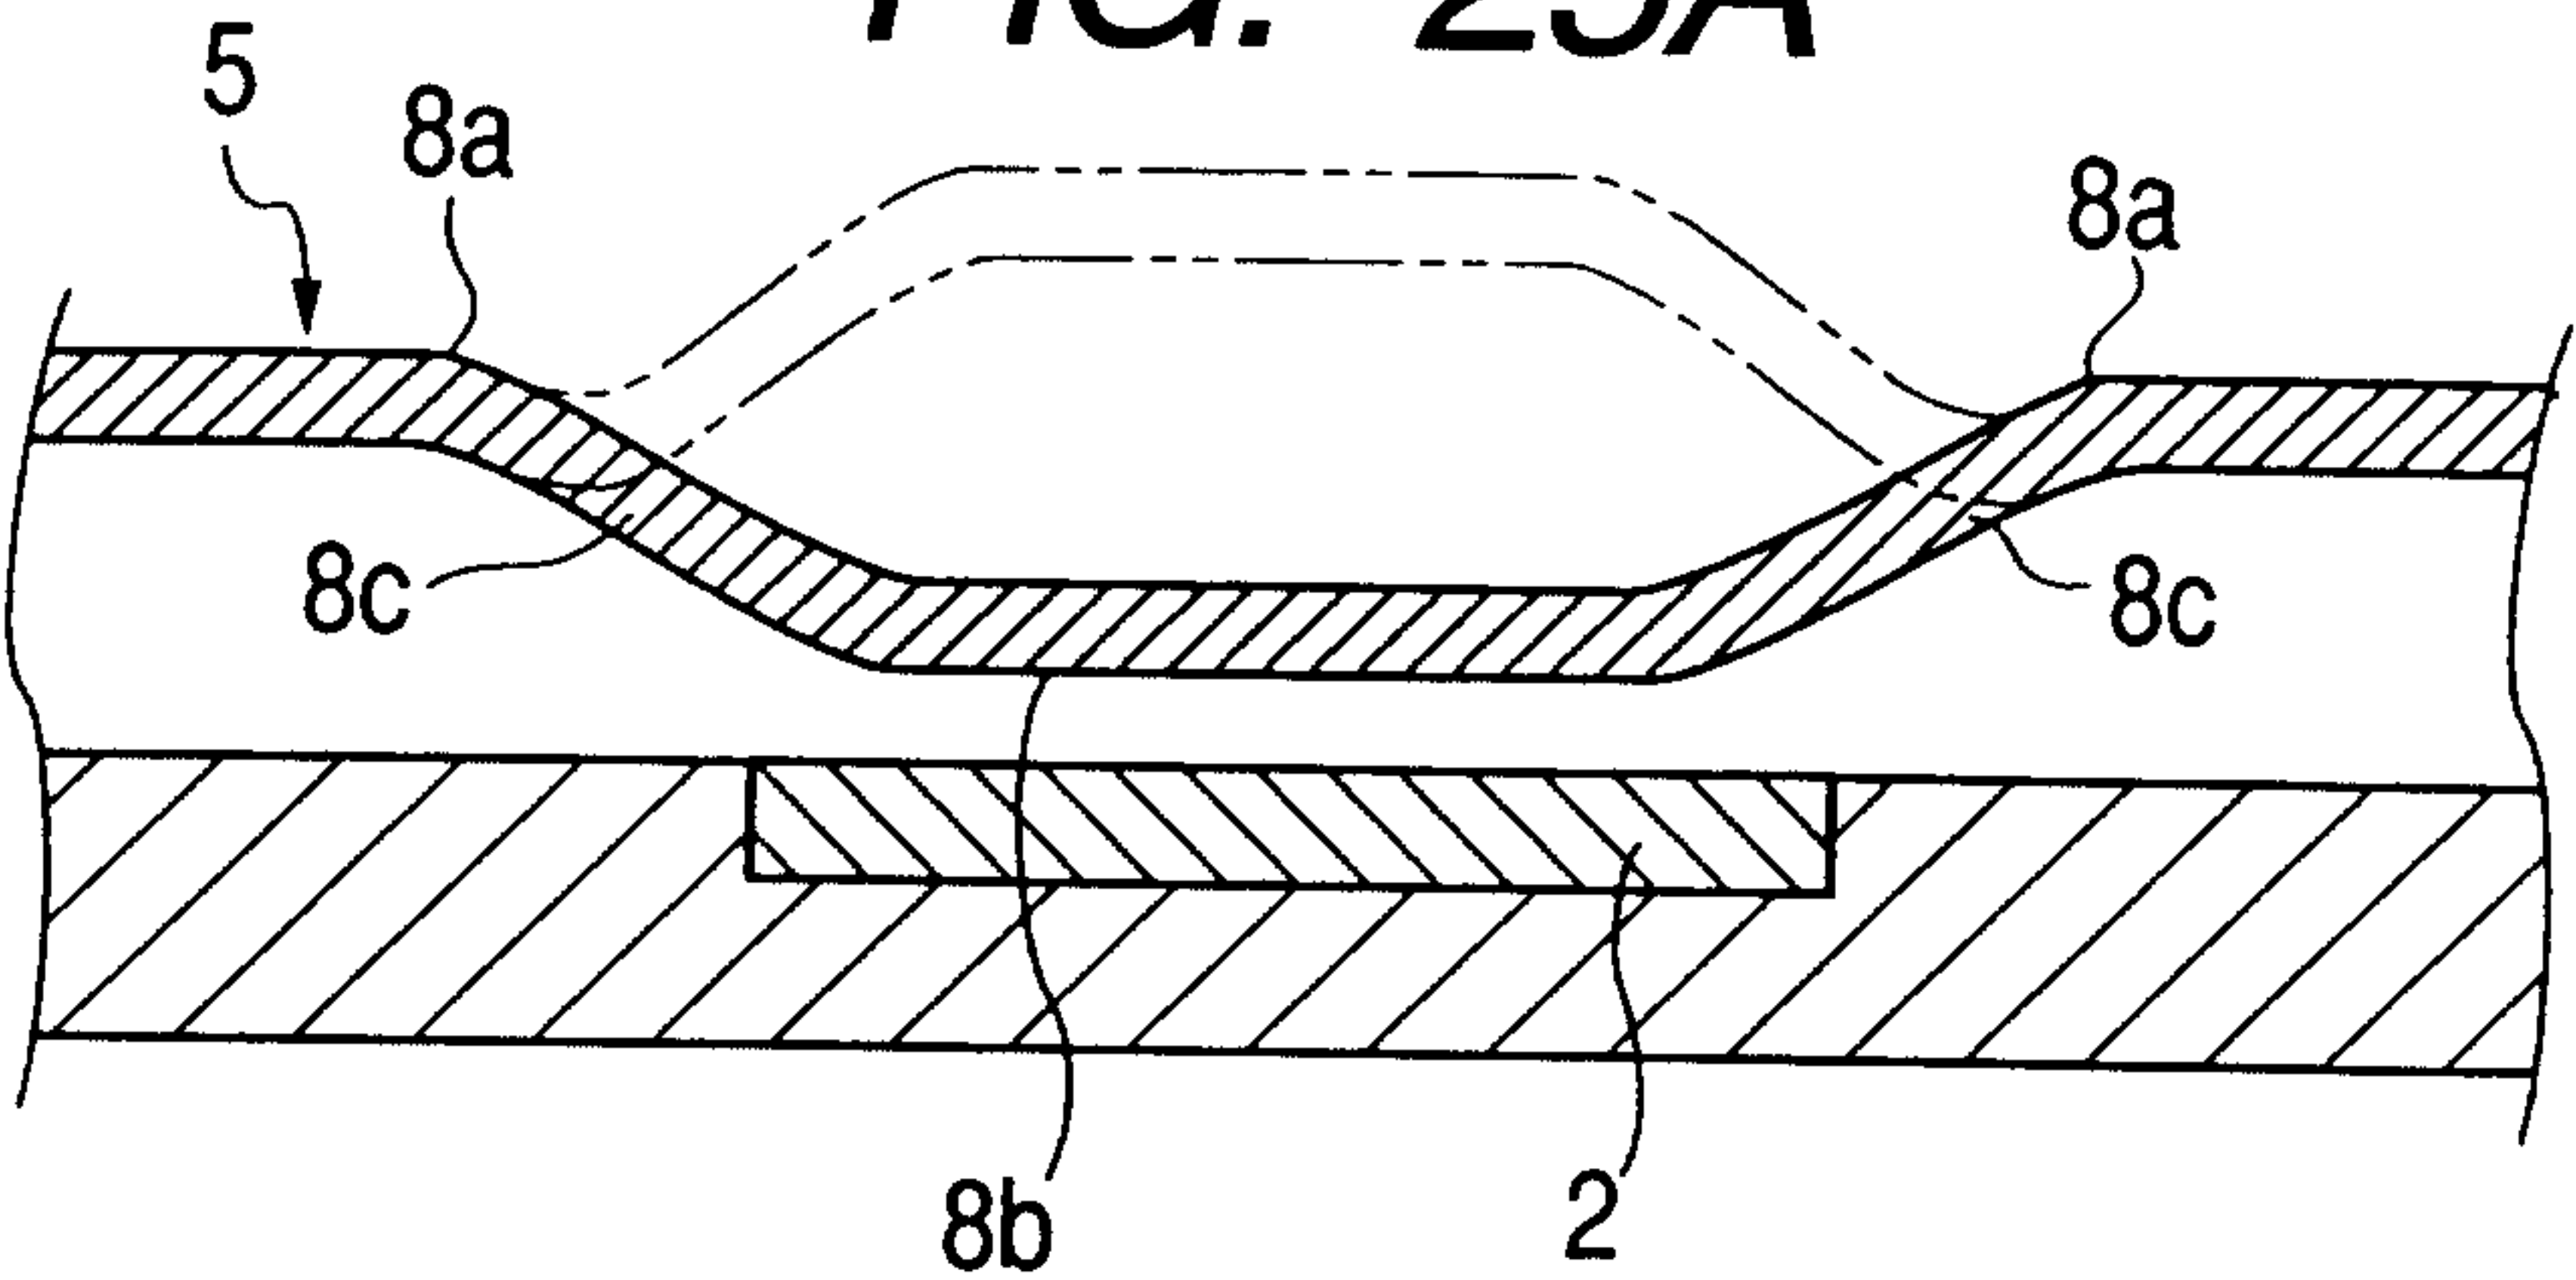


FIG. 25B

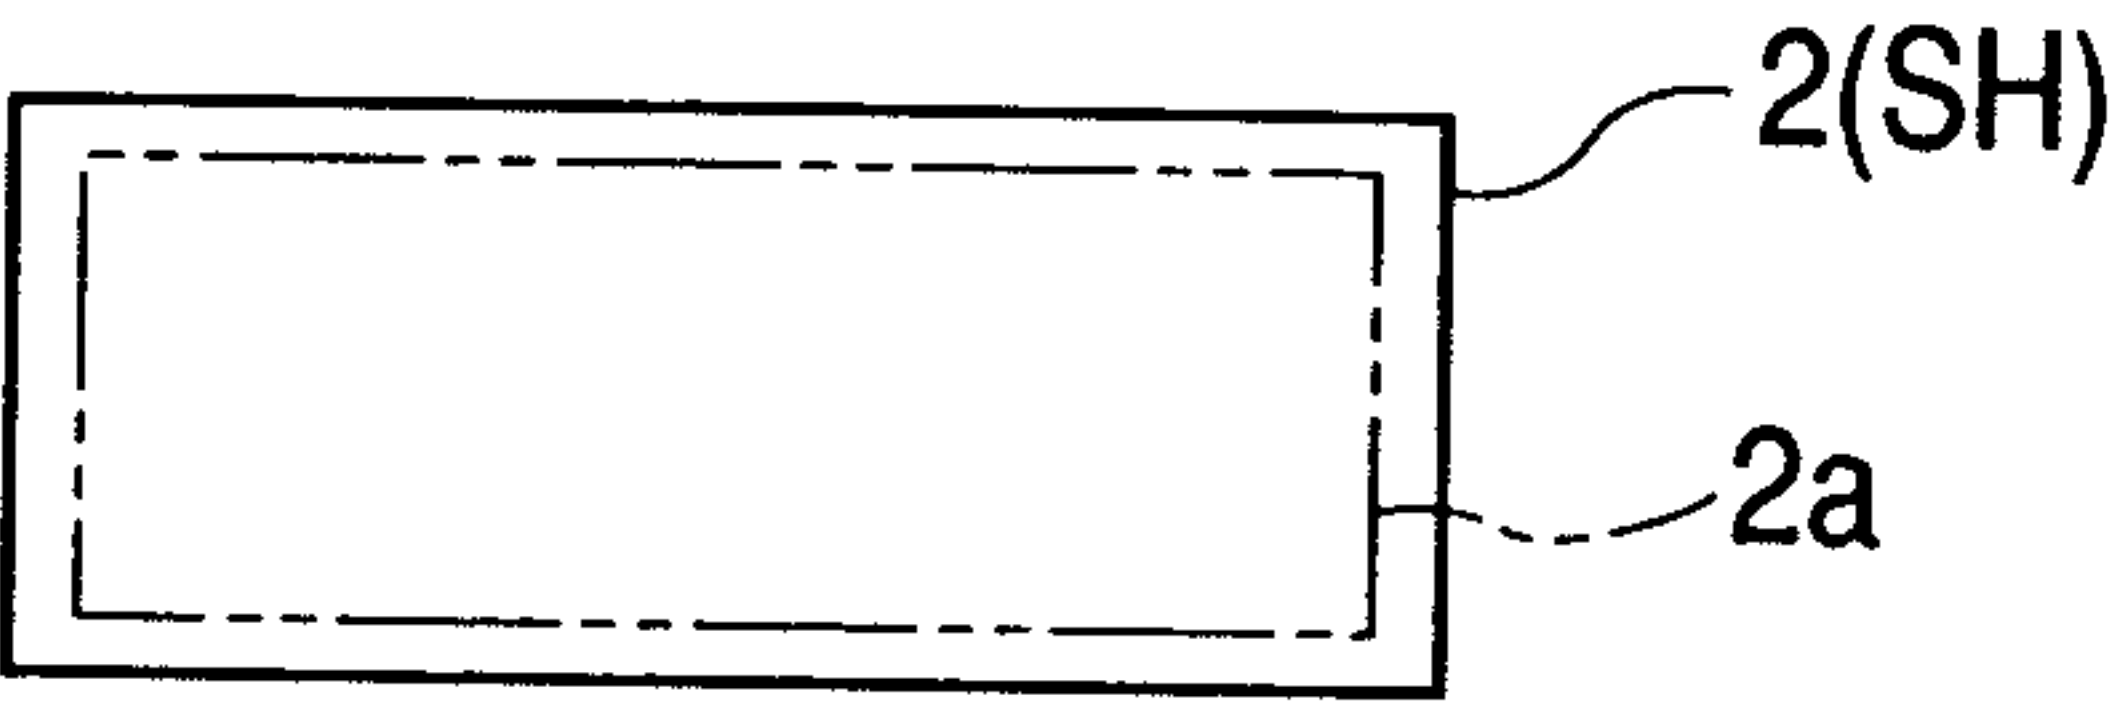


FIG. 25C

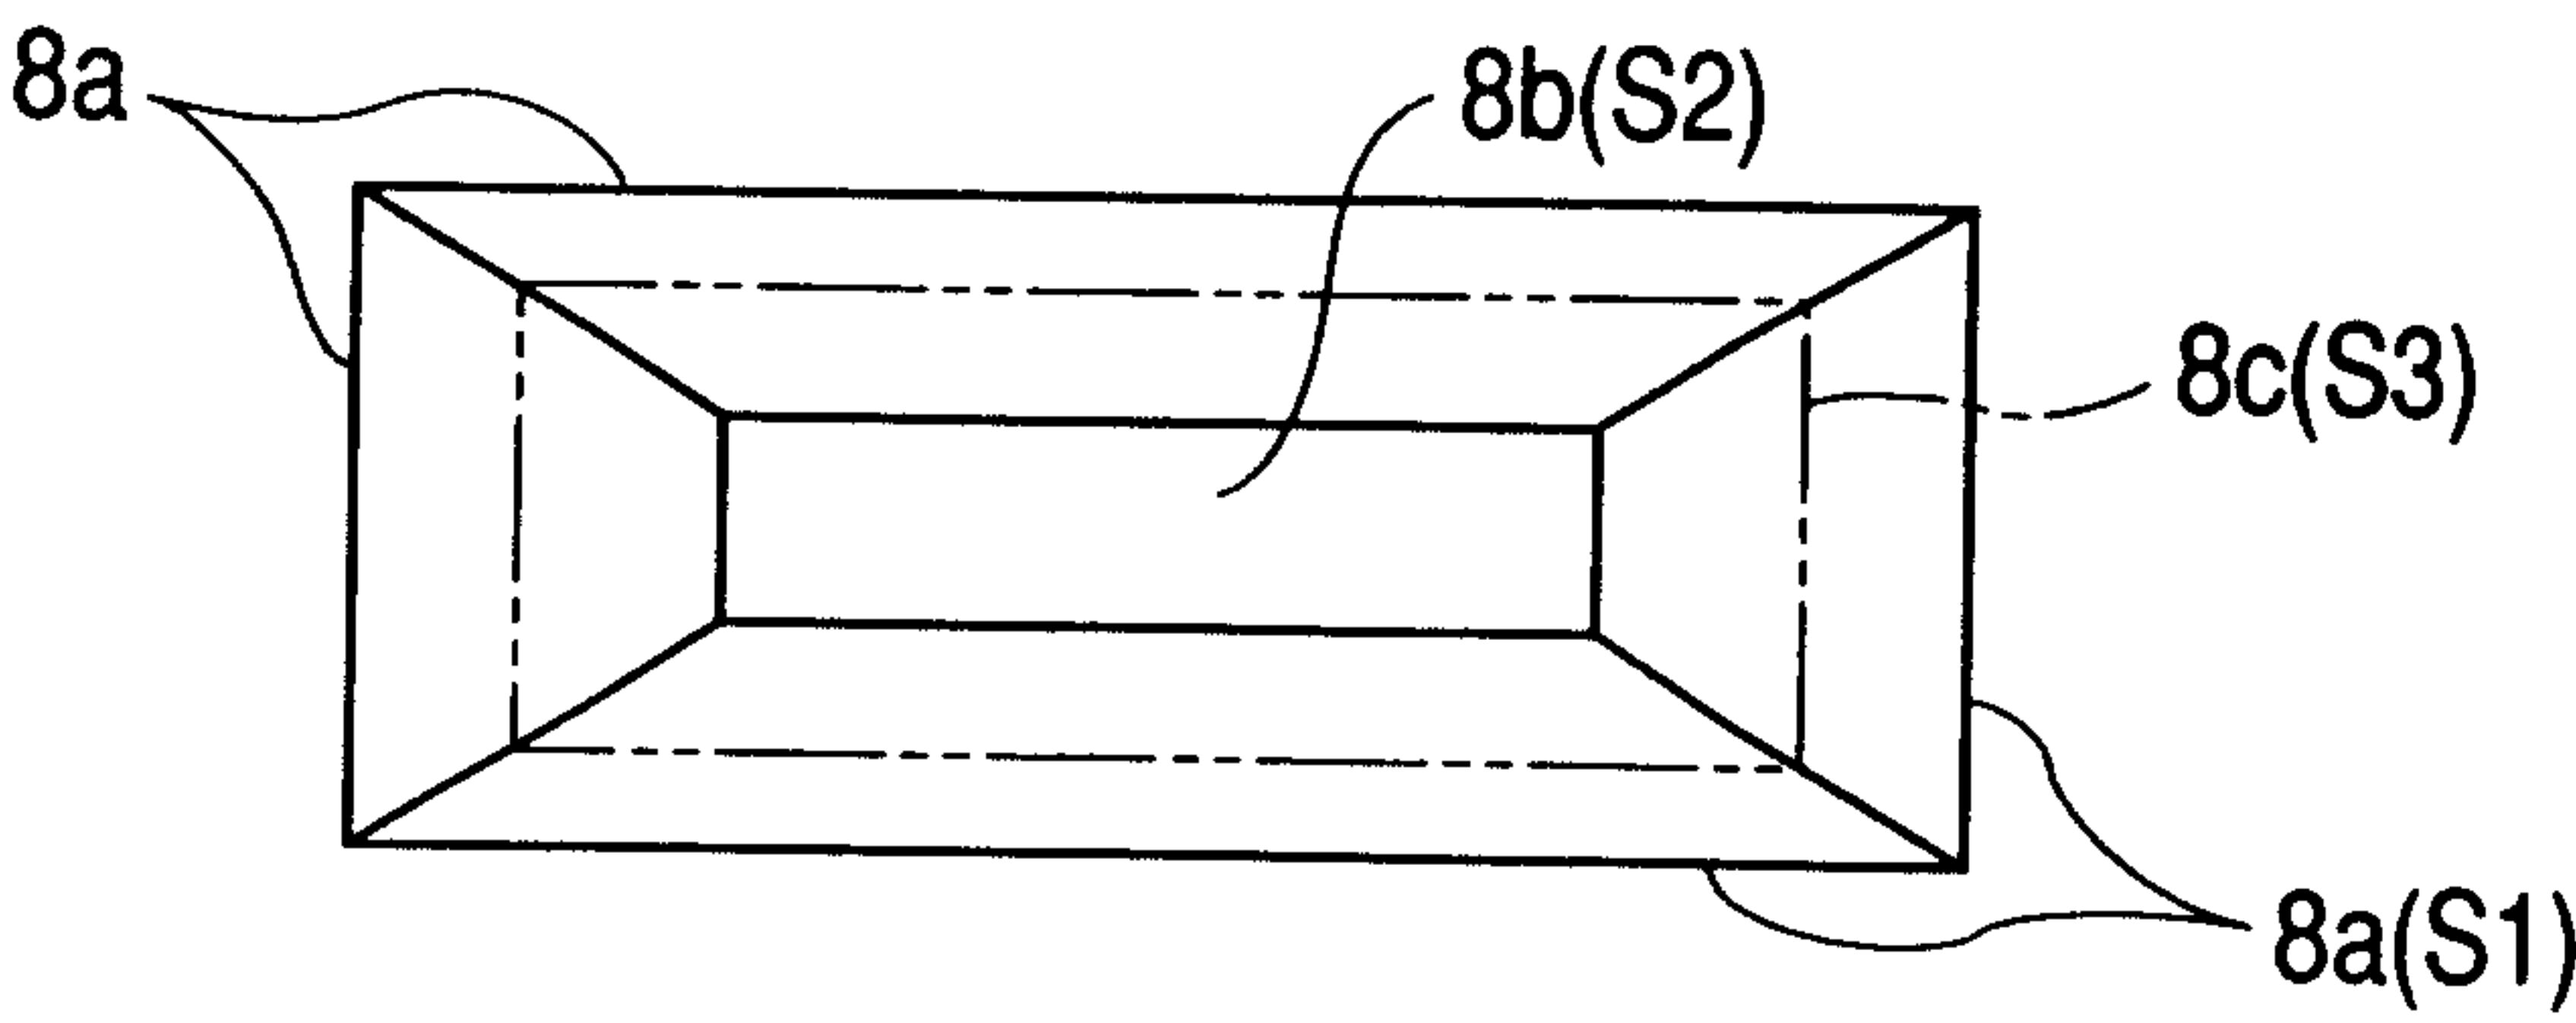


FIG. 25D

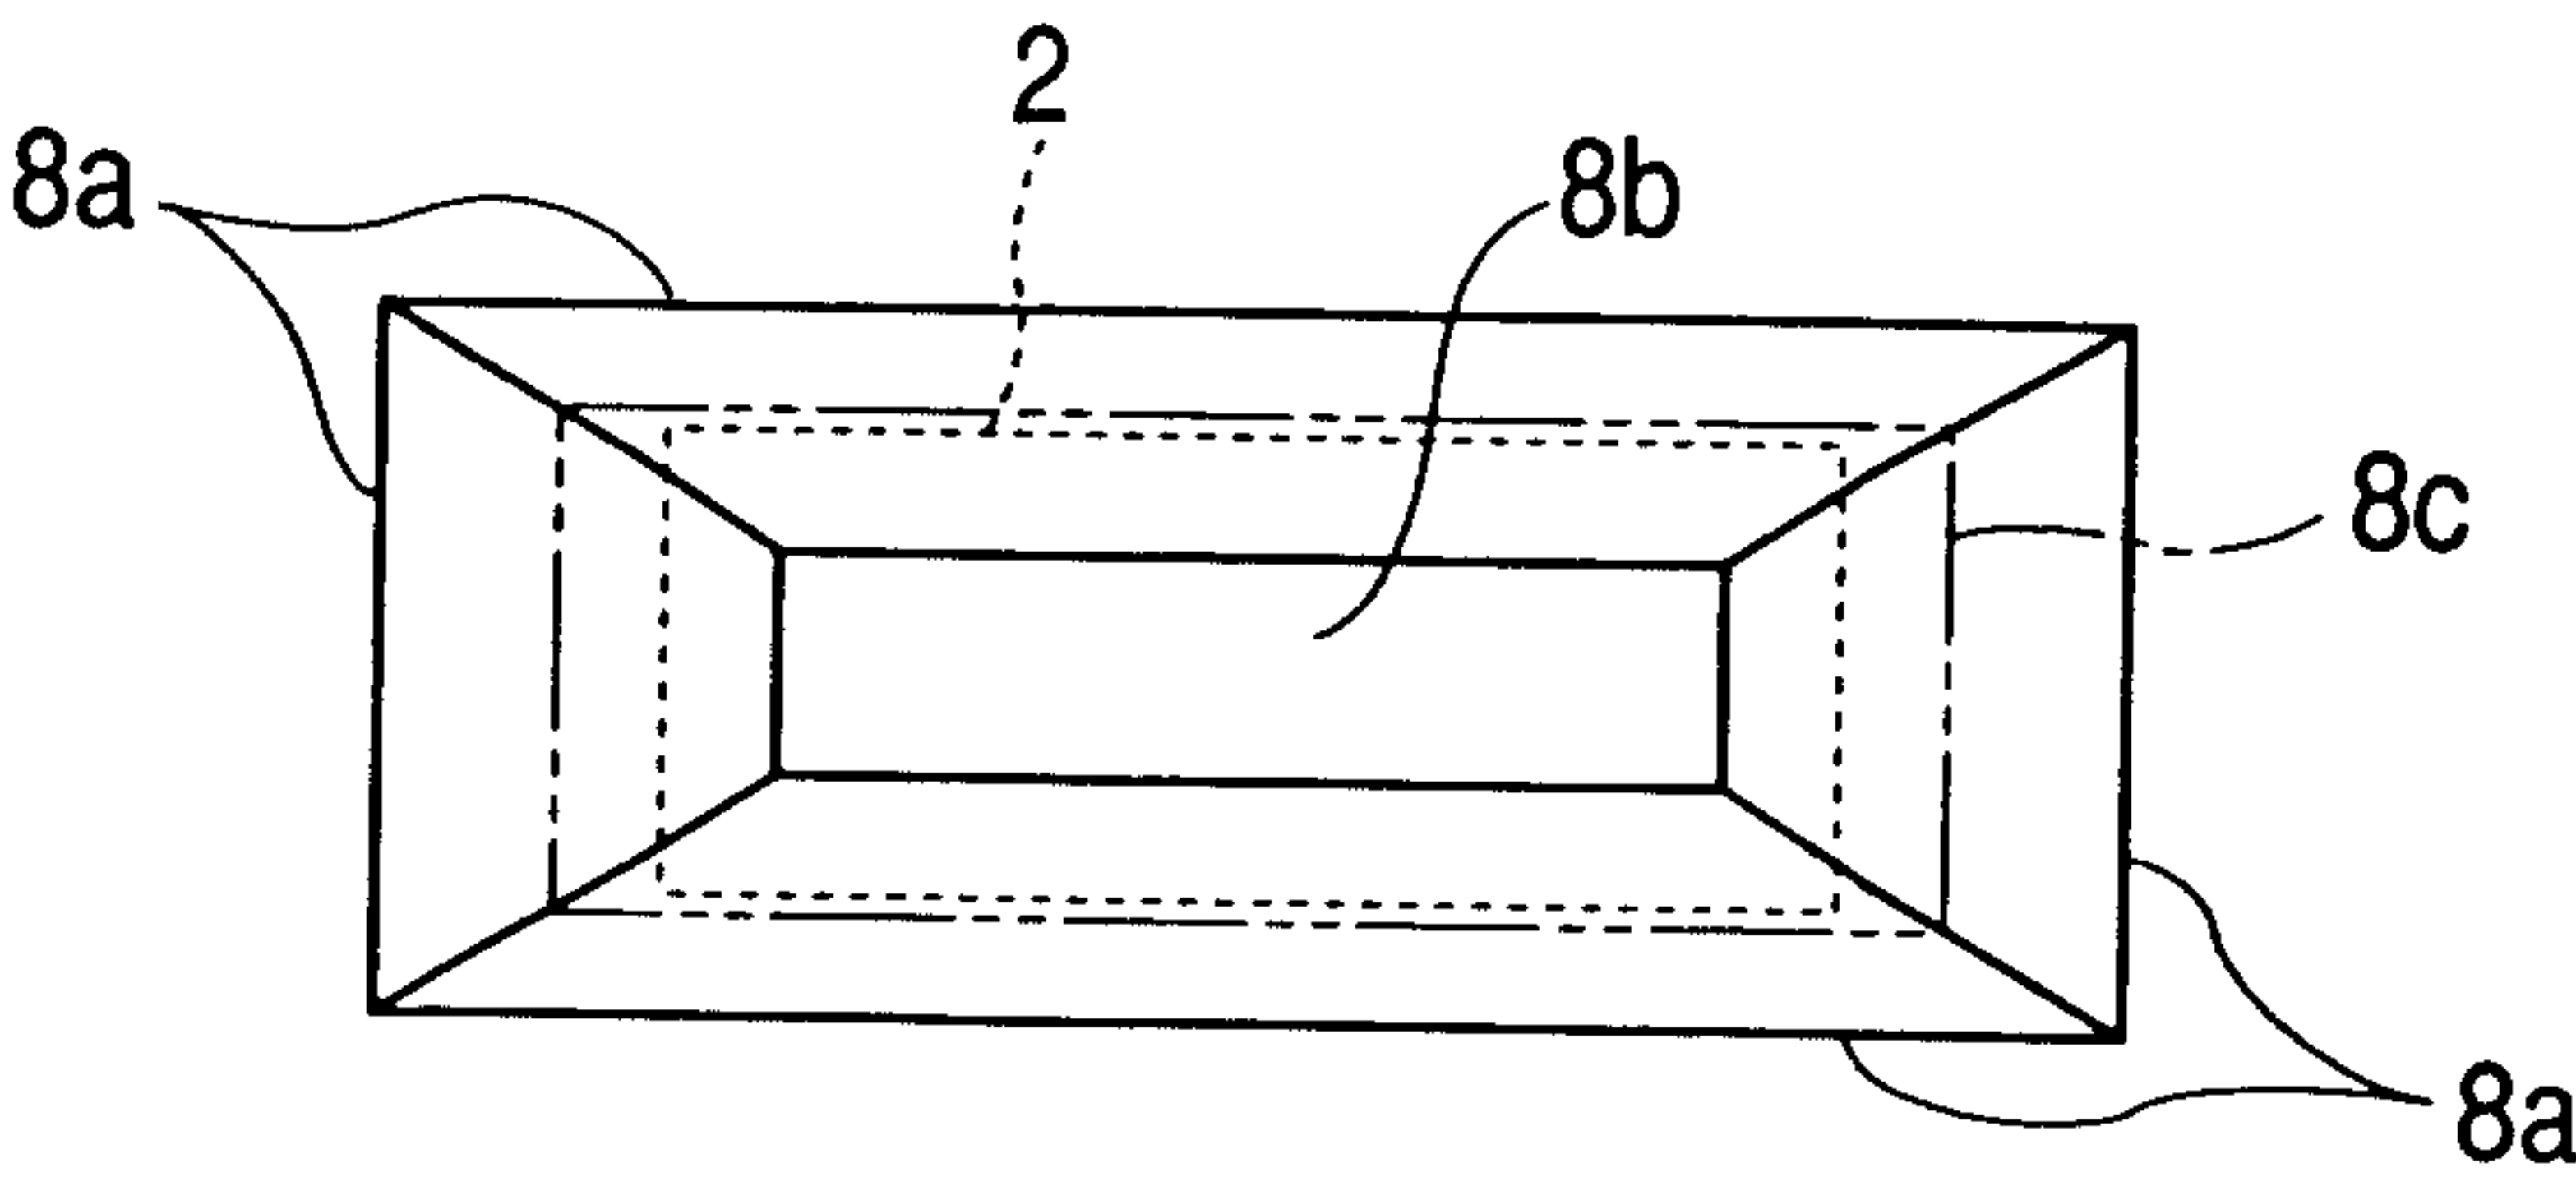


FIG. 26A

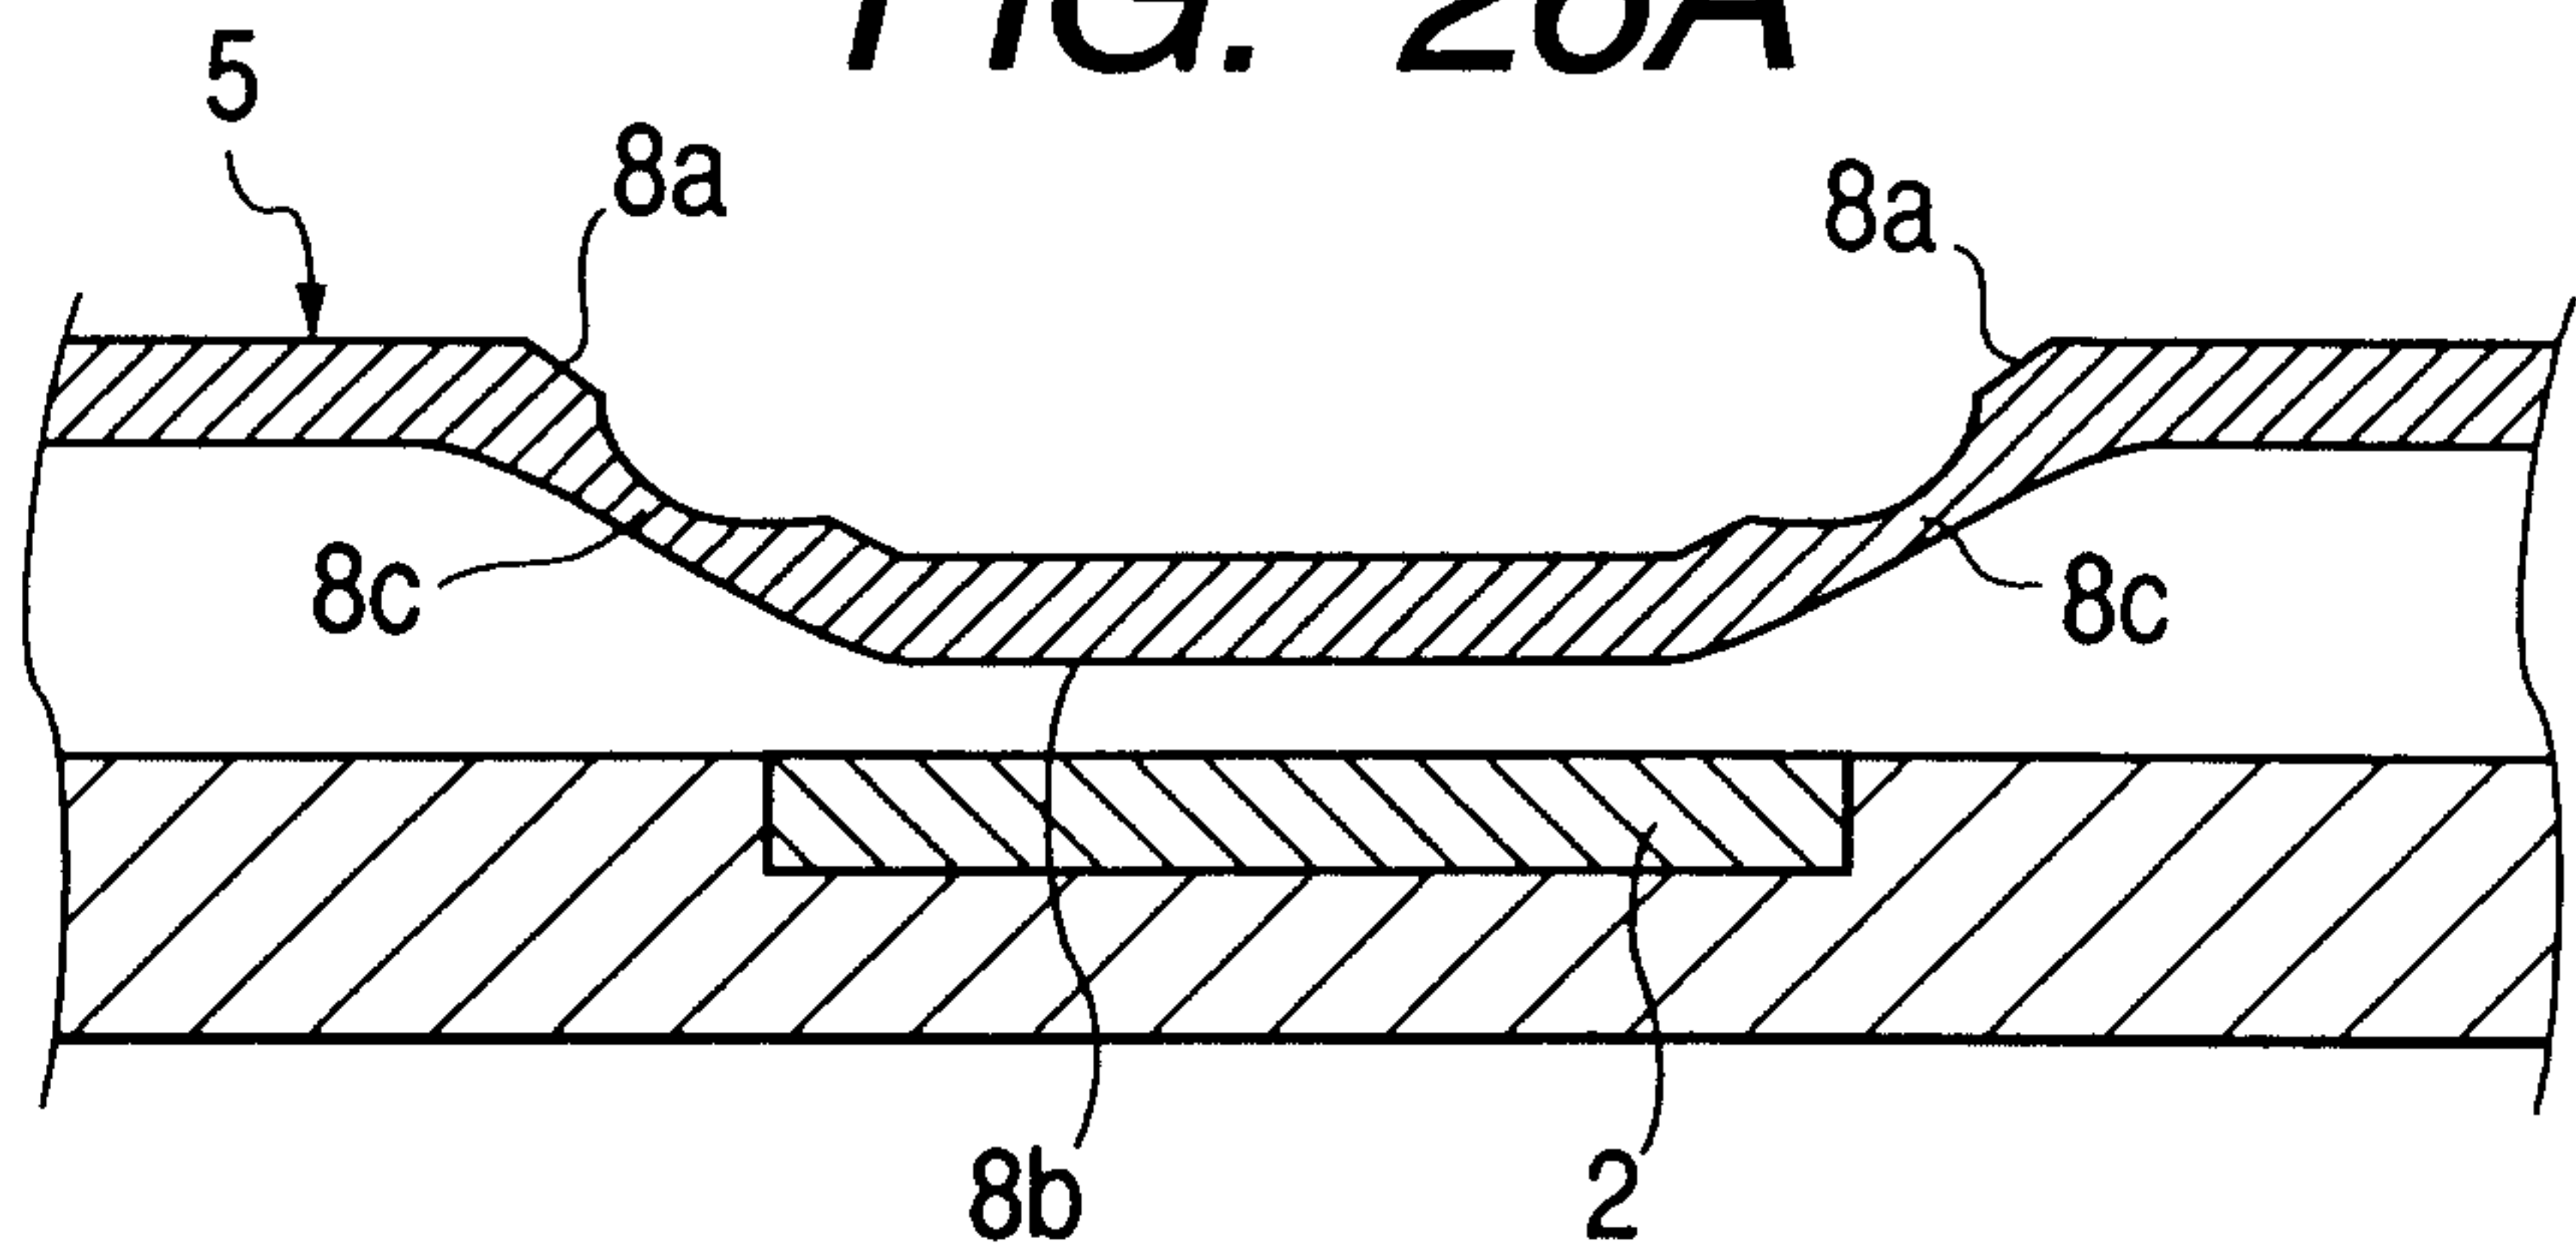


FIG. 26B

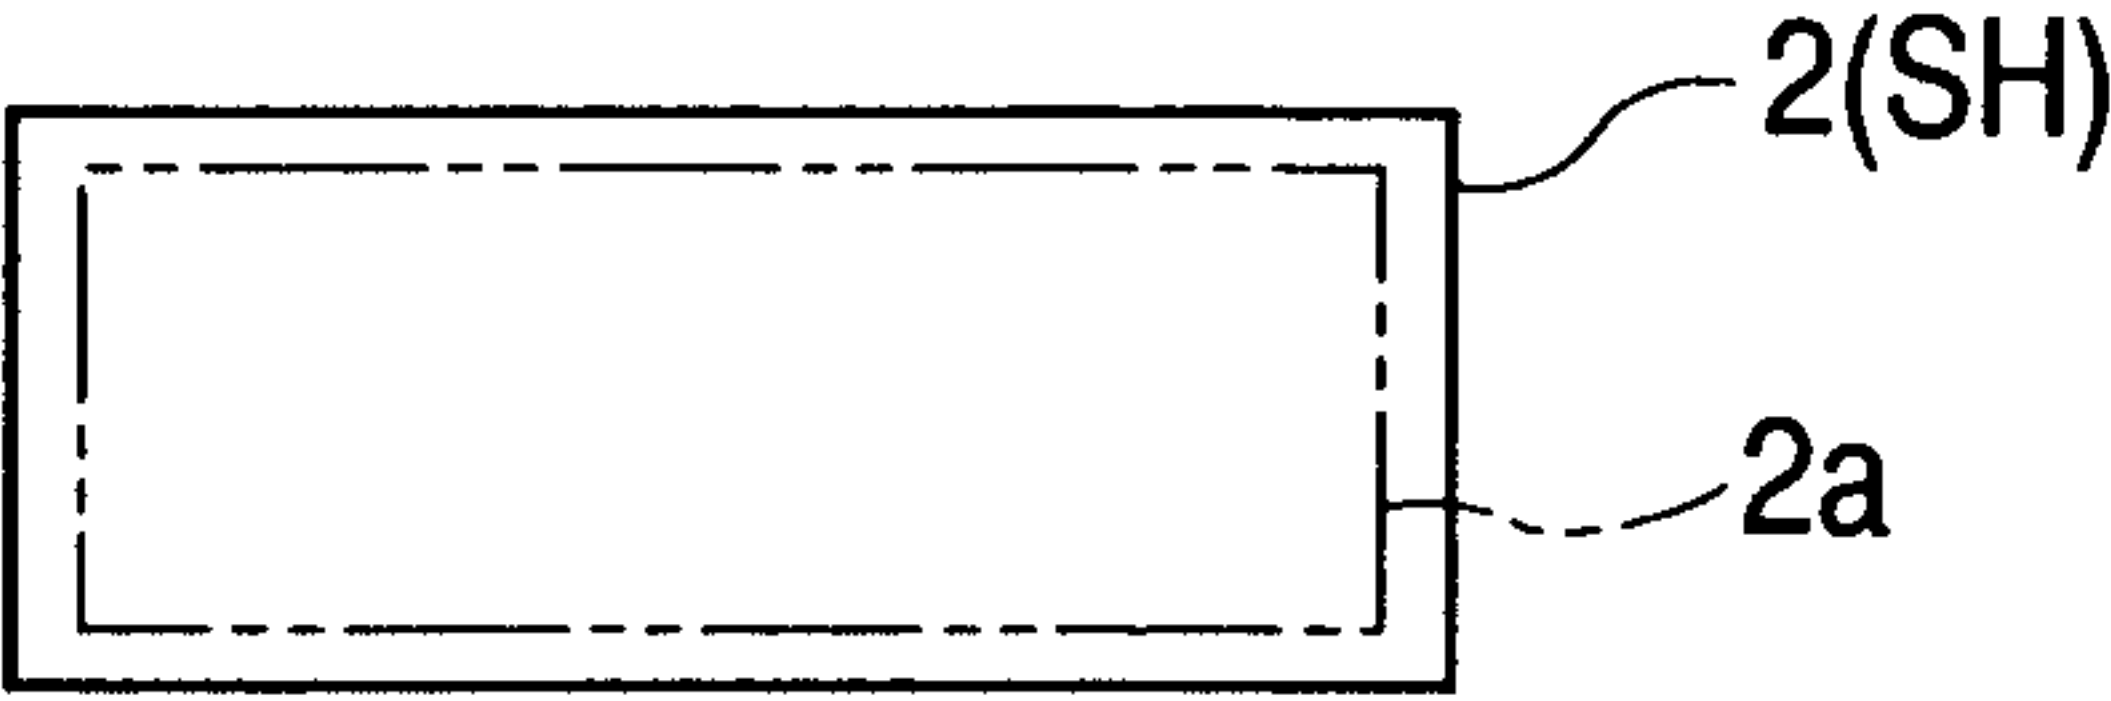


FIG. 26C

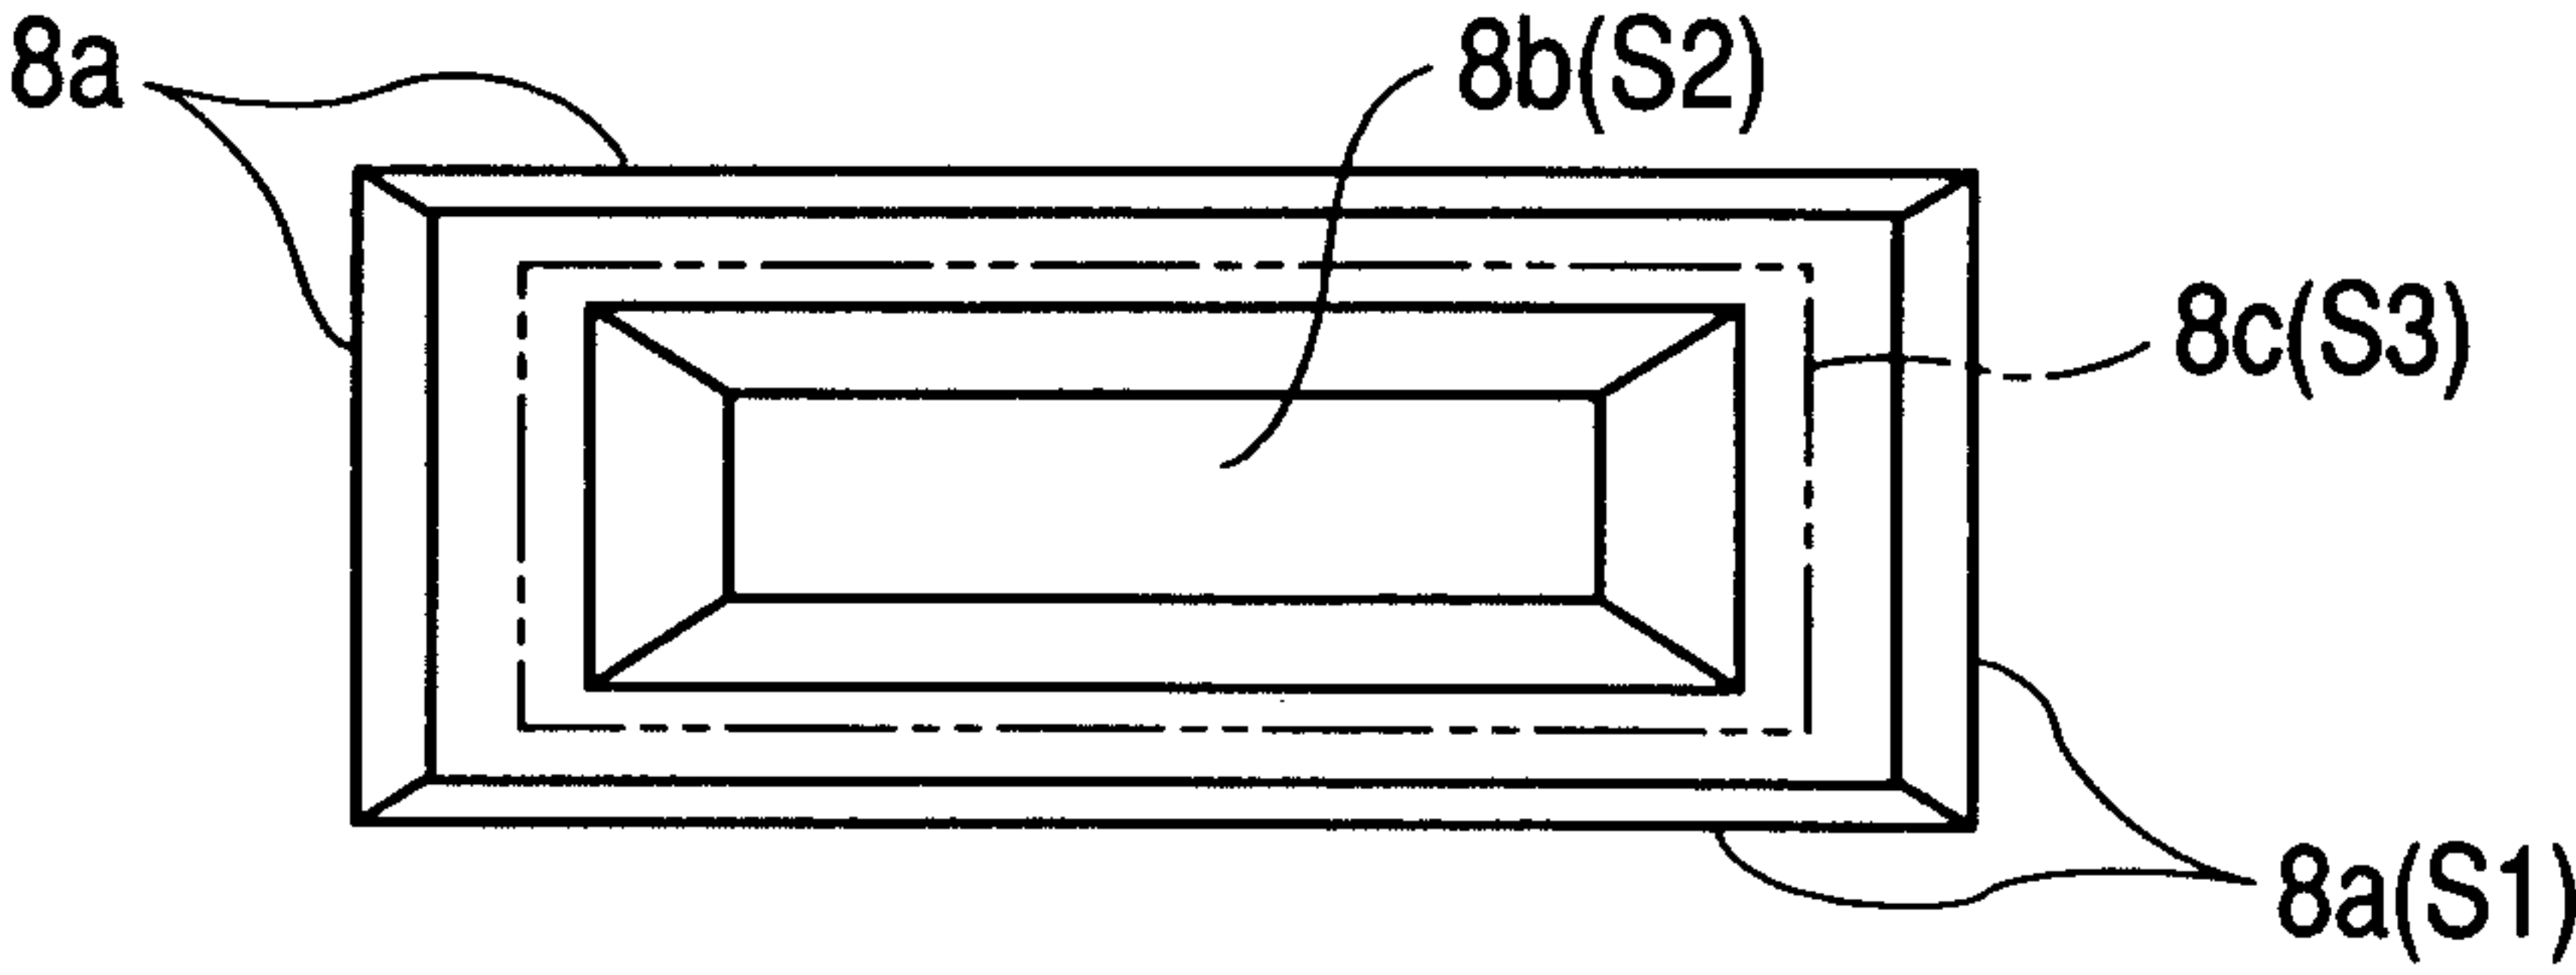


FIG. 26D

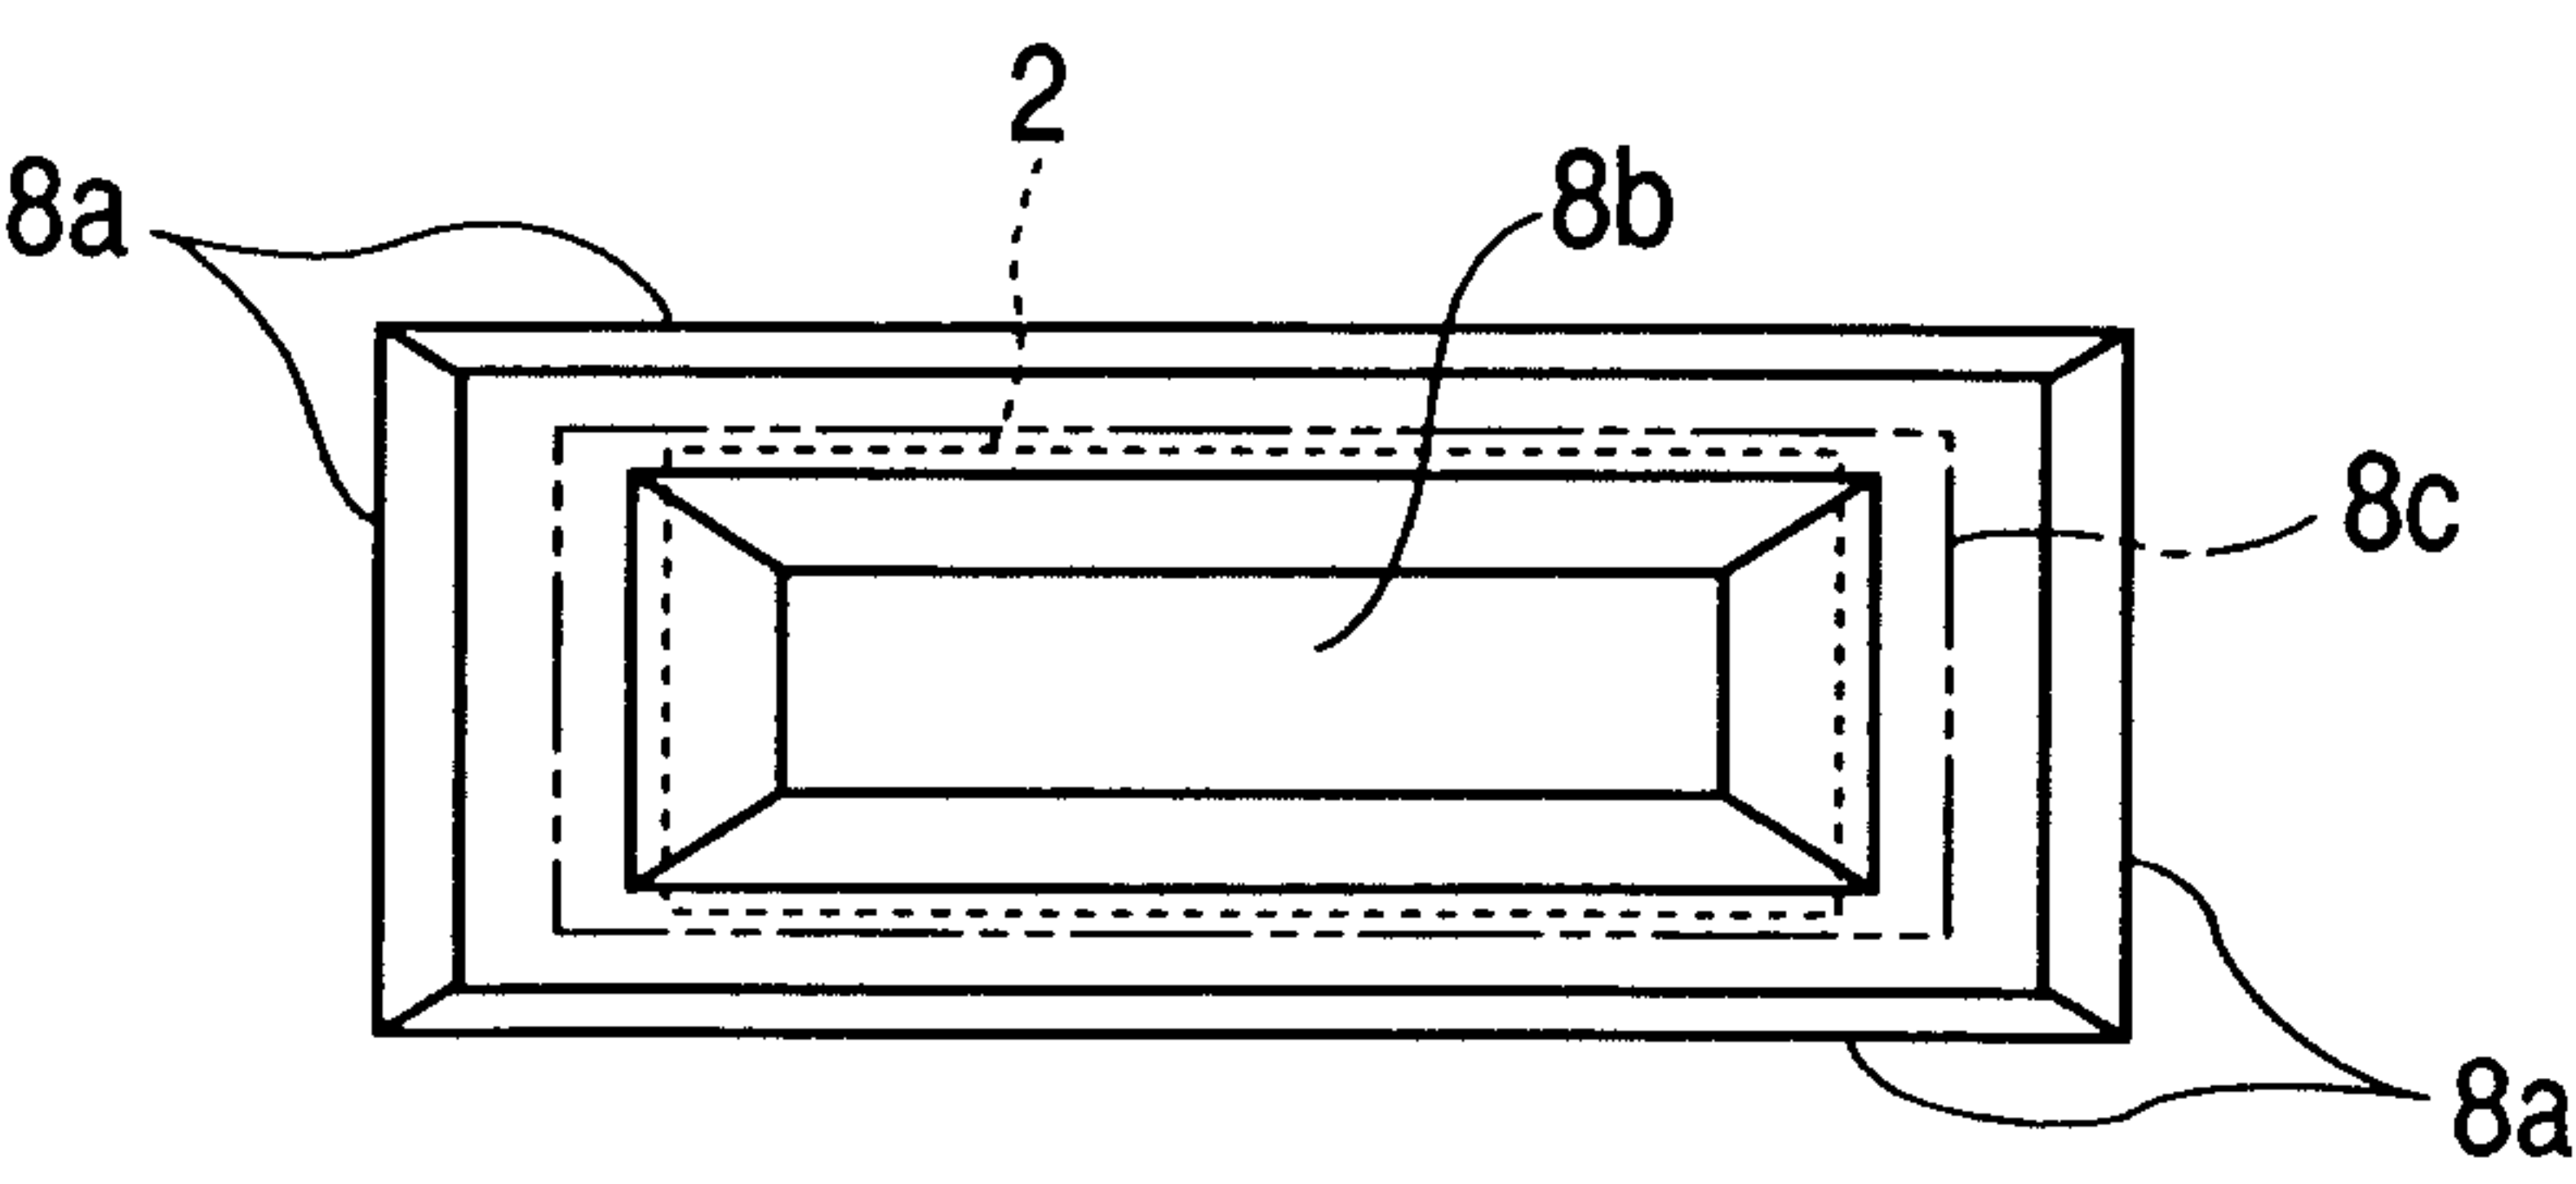


FIG. 27A

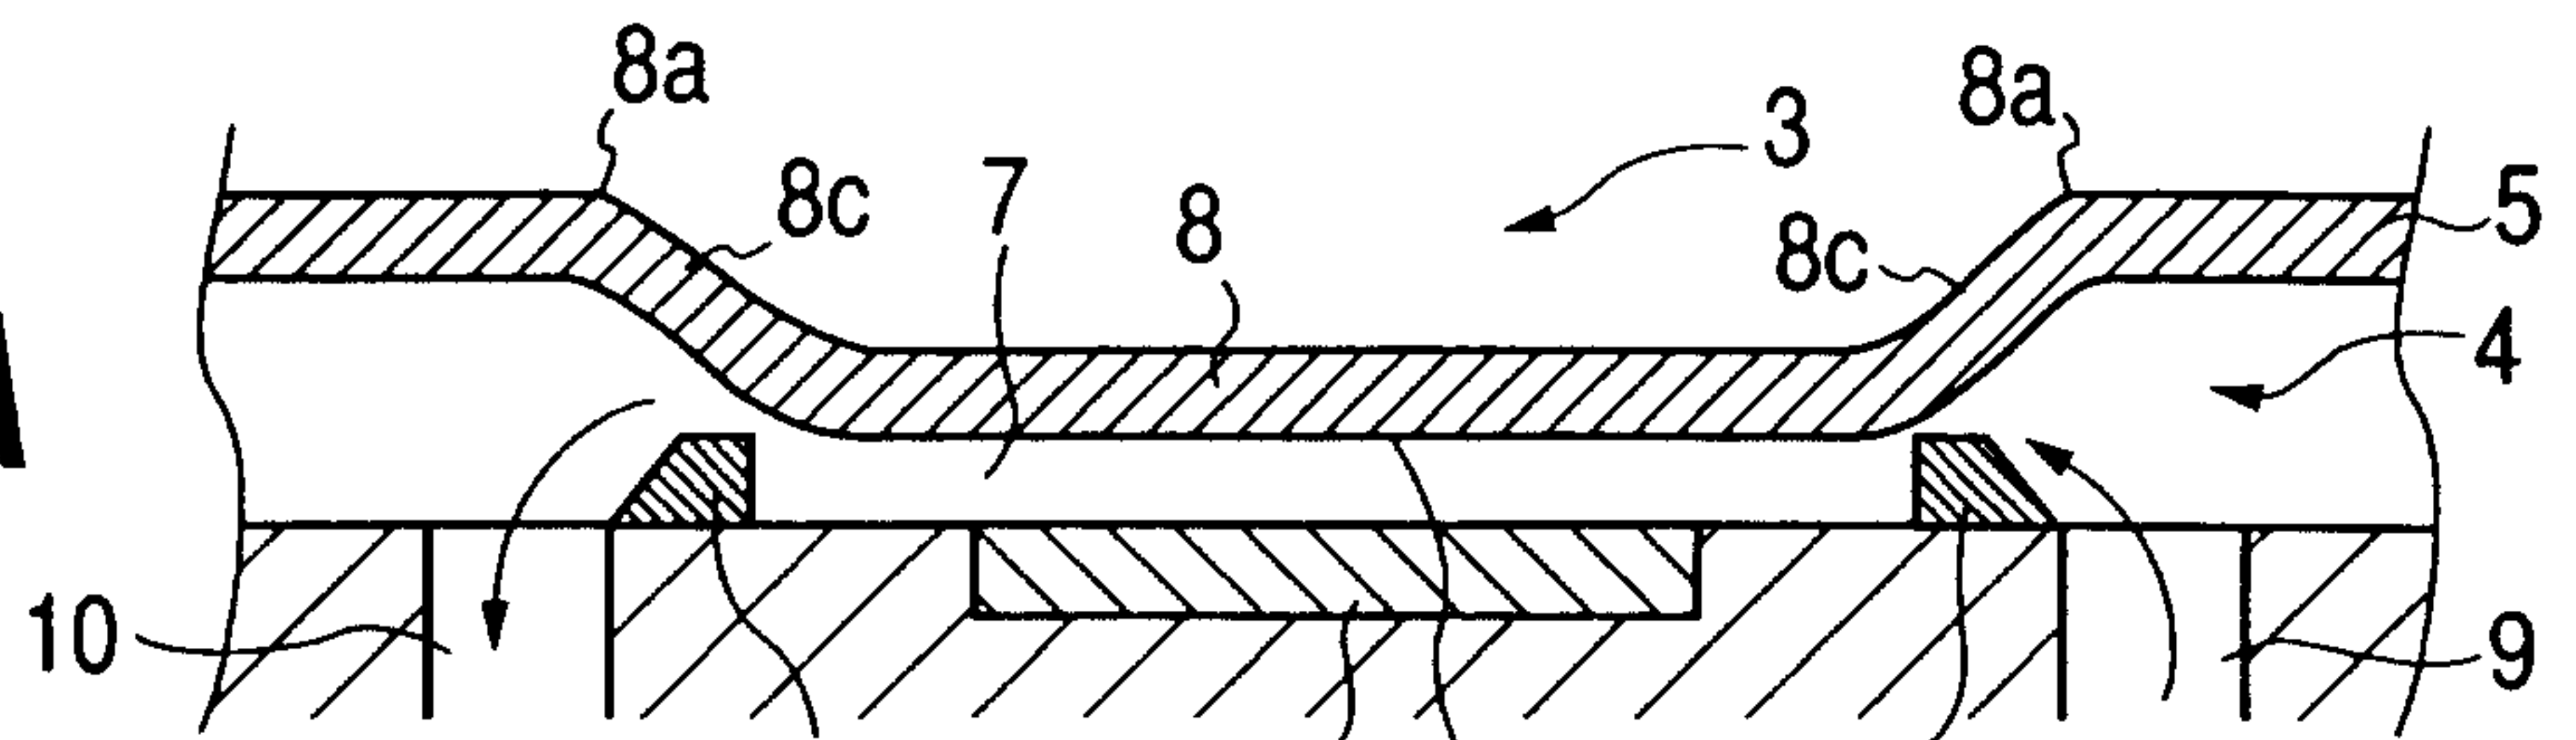


FIG. 27B

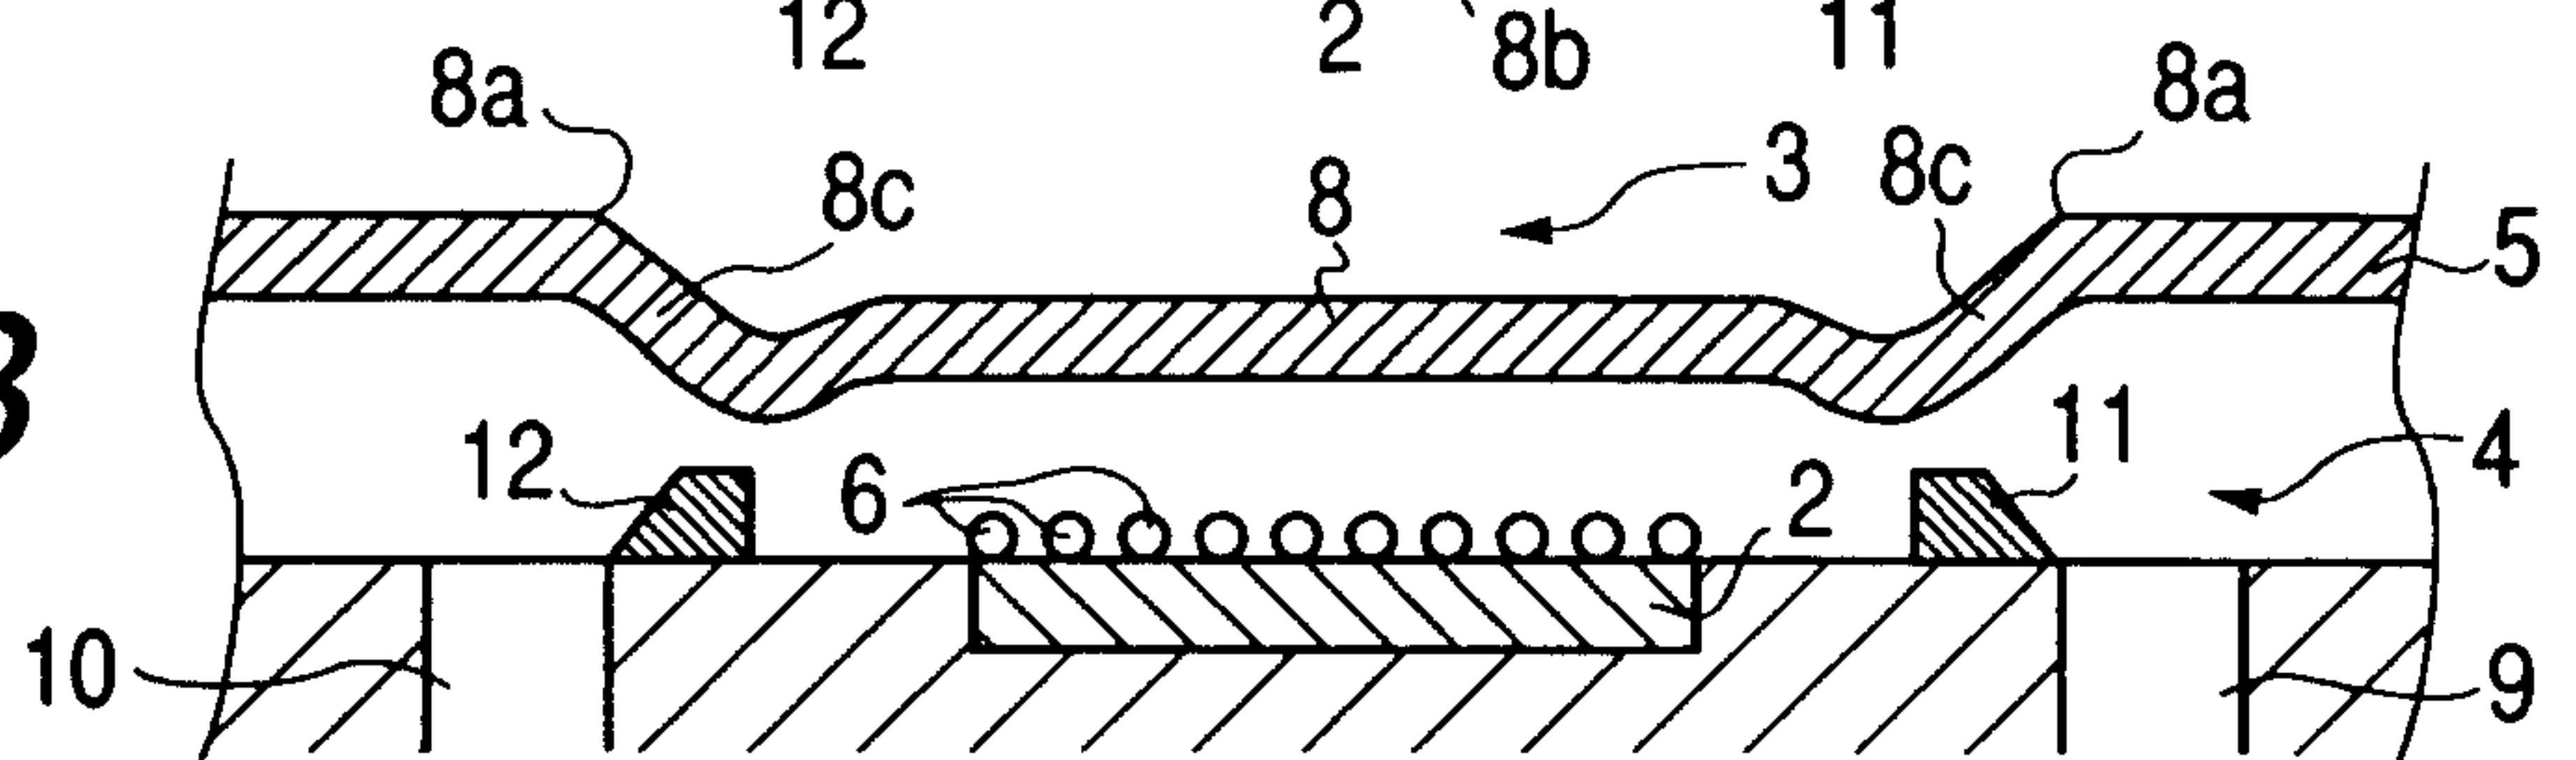


FIG. 27C

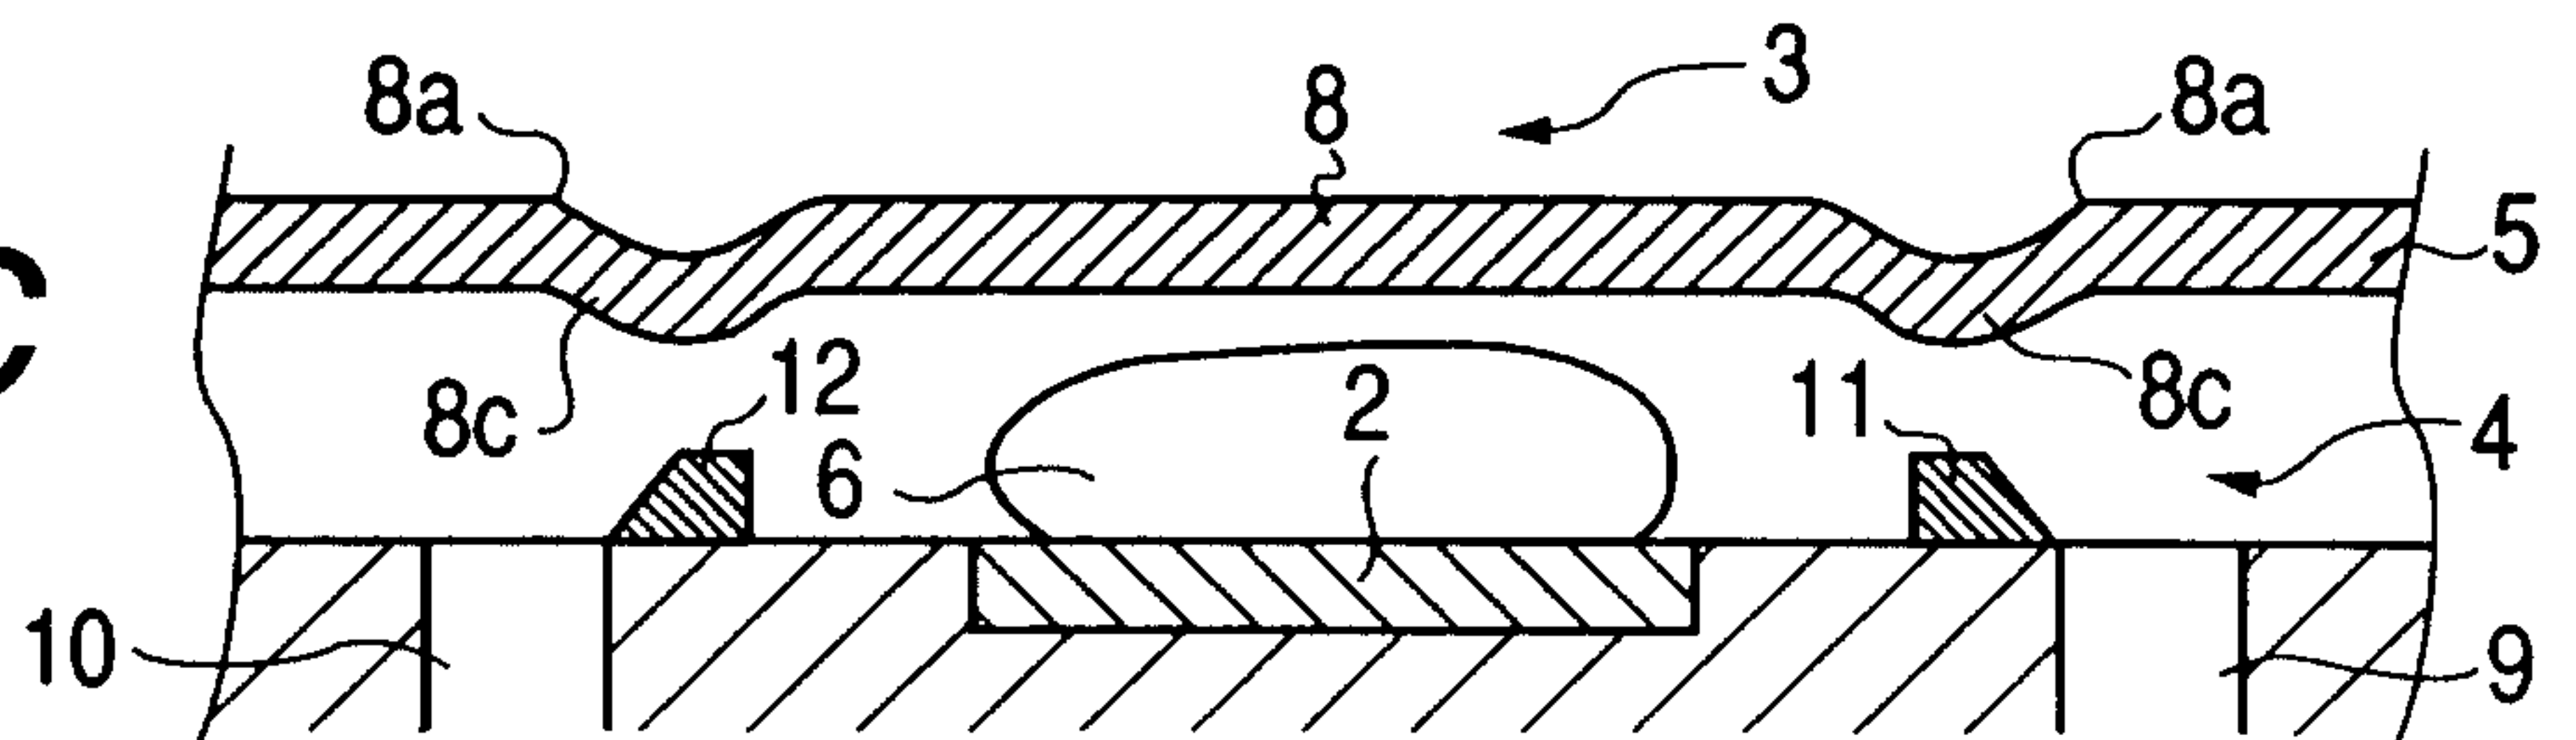


FIG. 27D

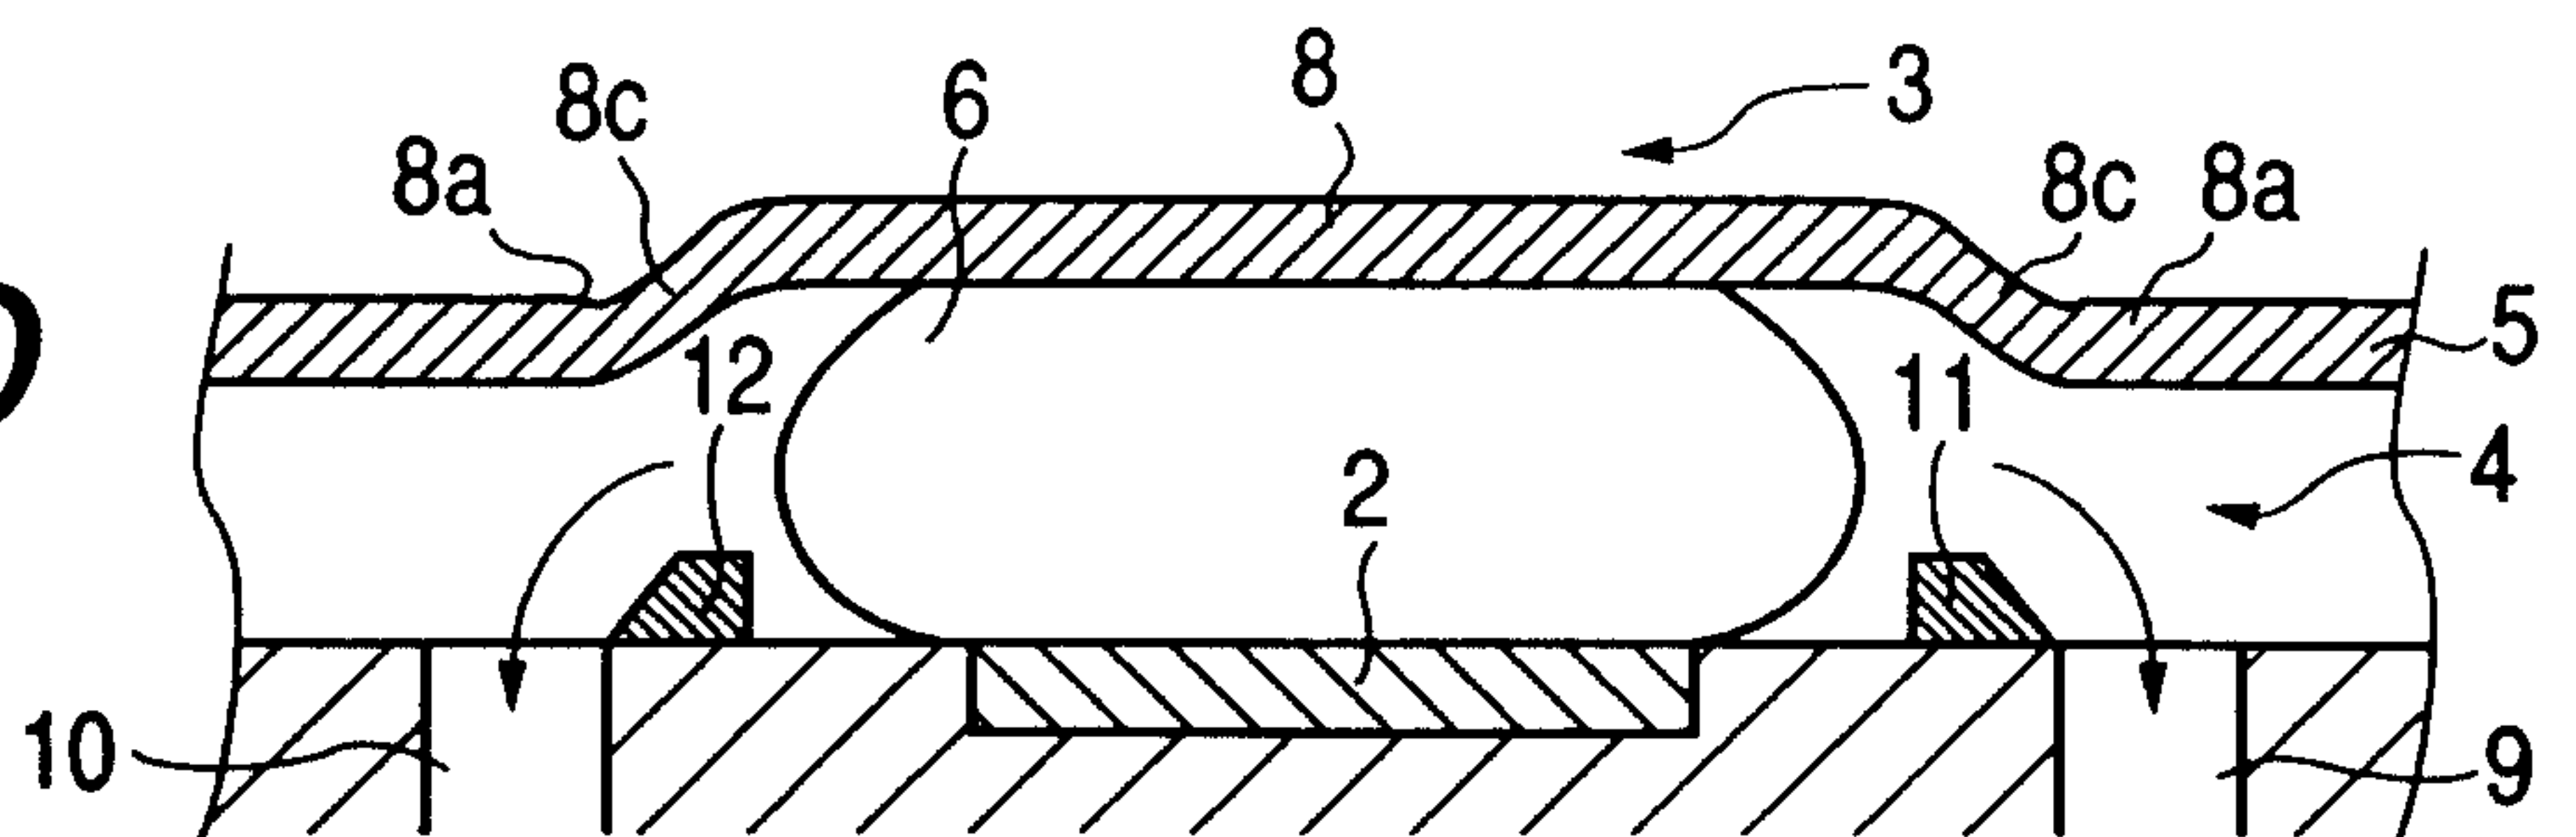


FIG. 27E

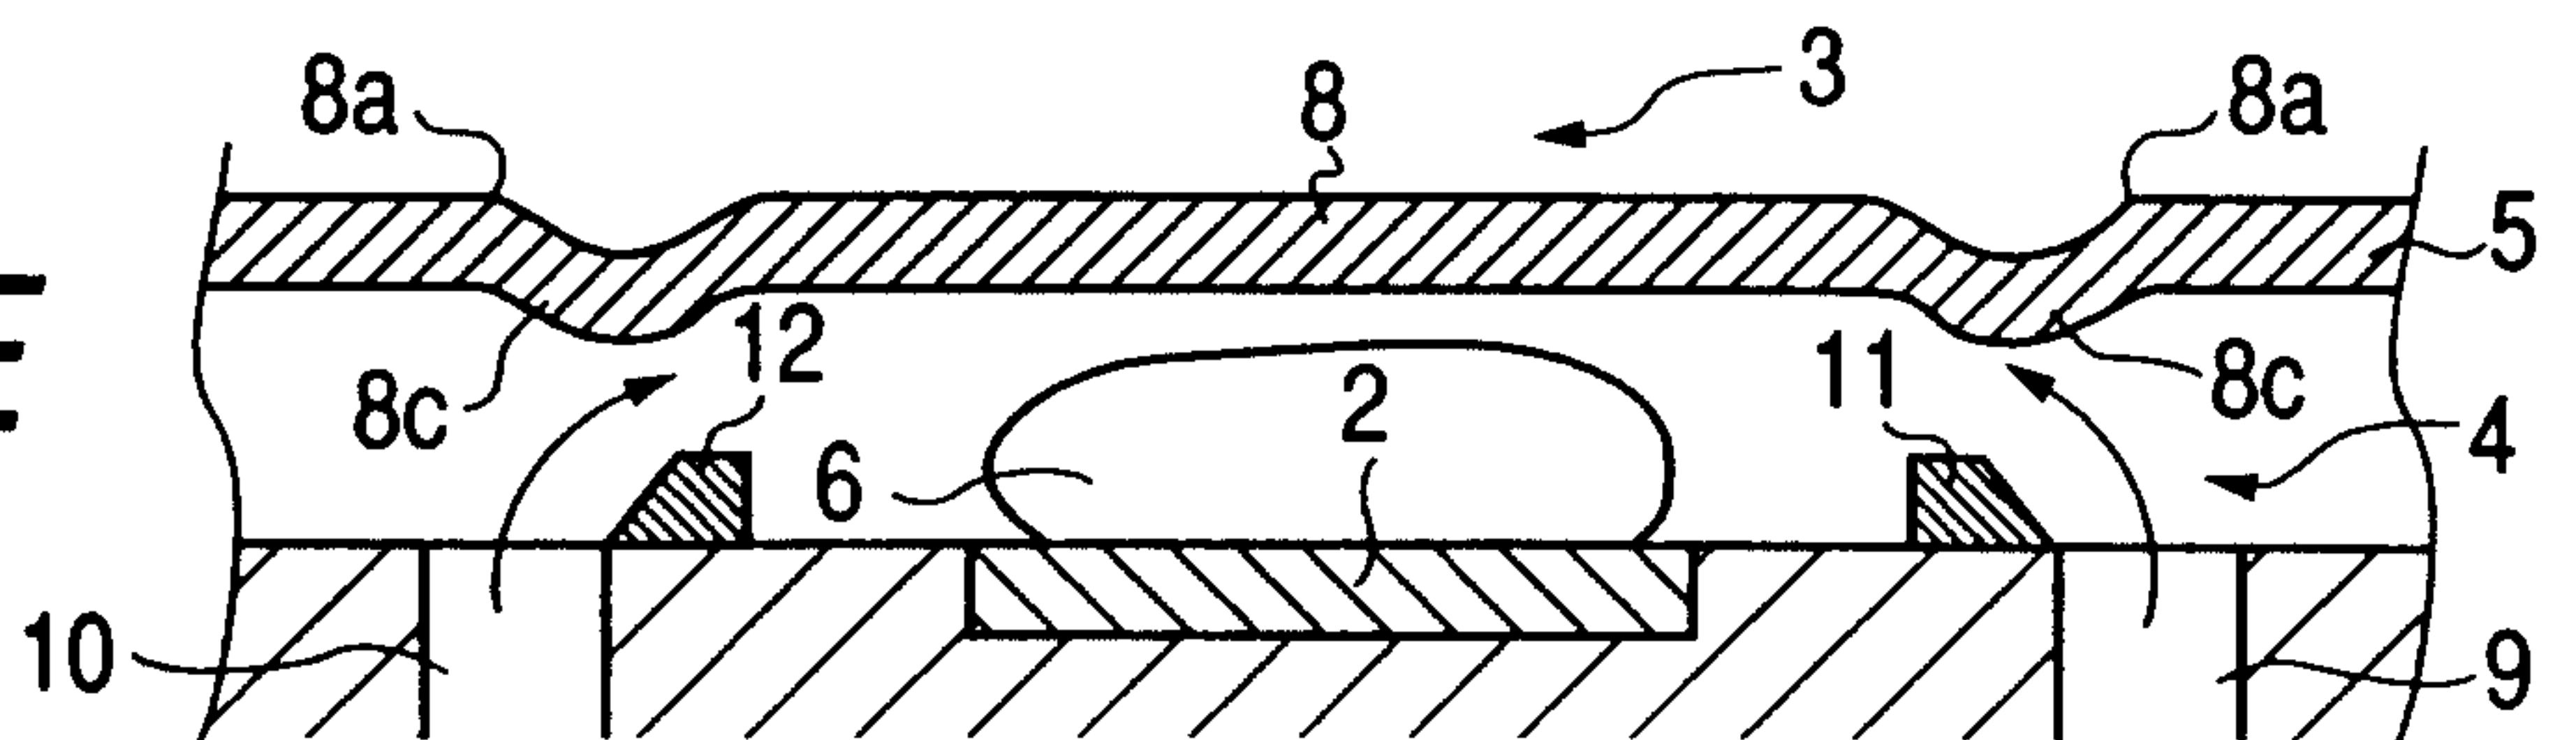
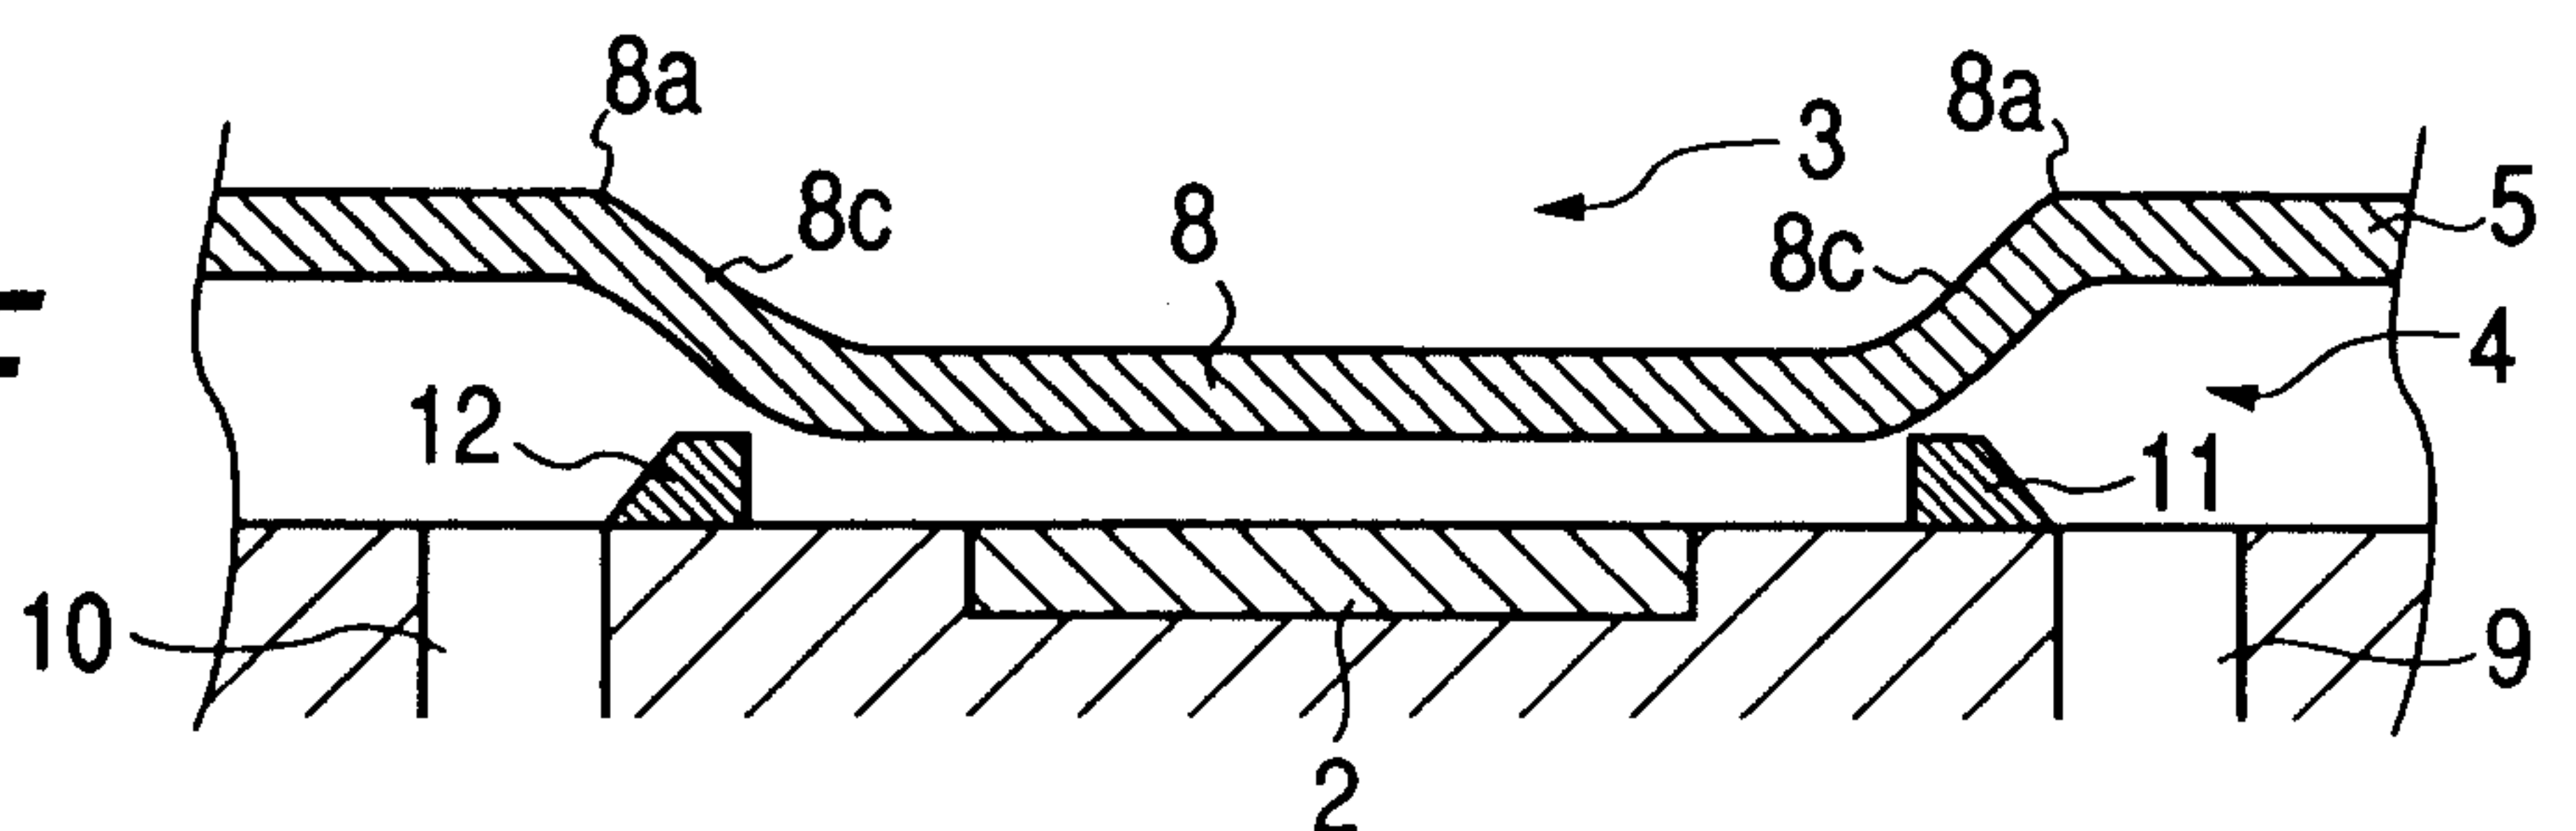
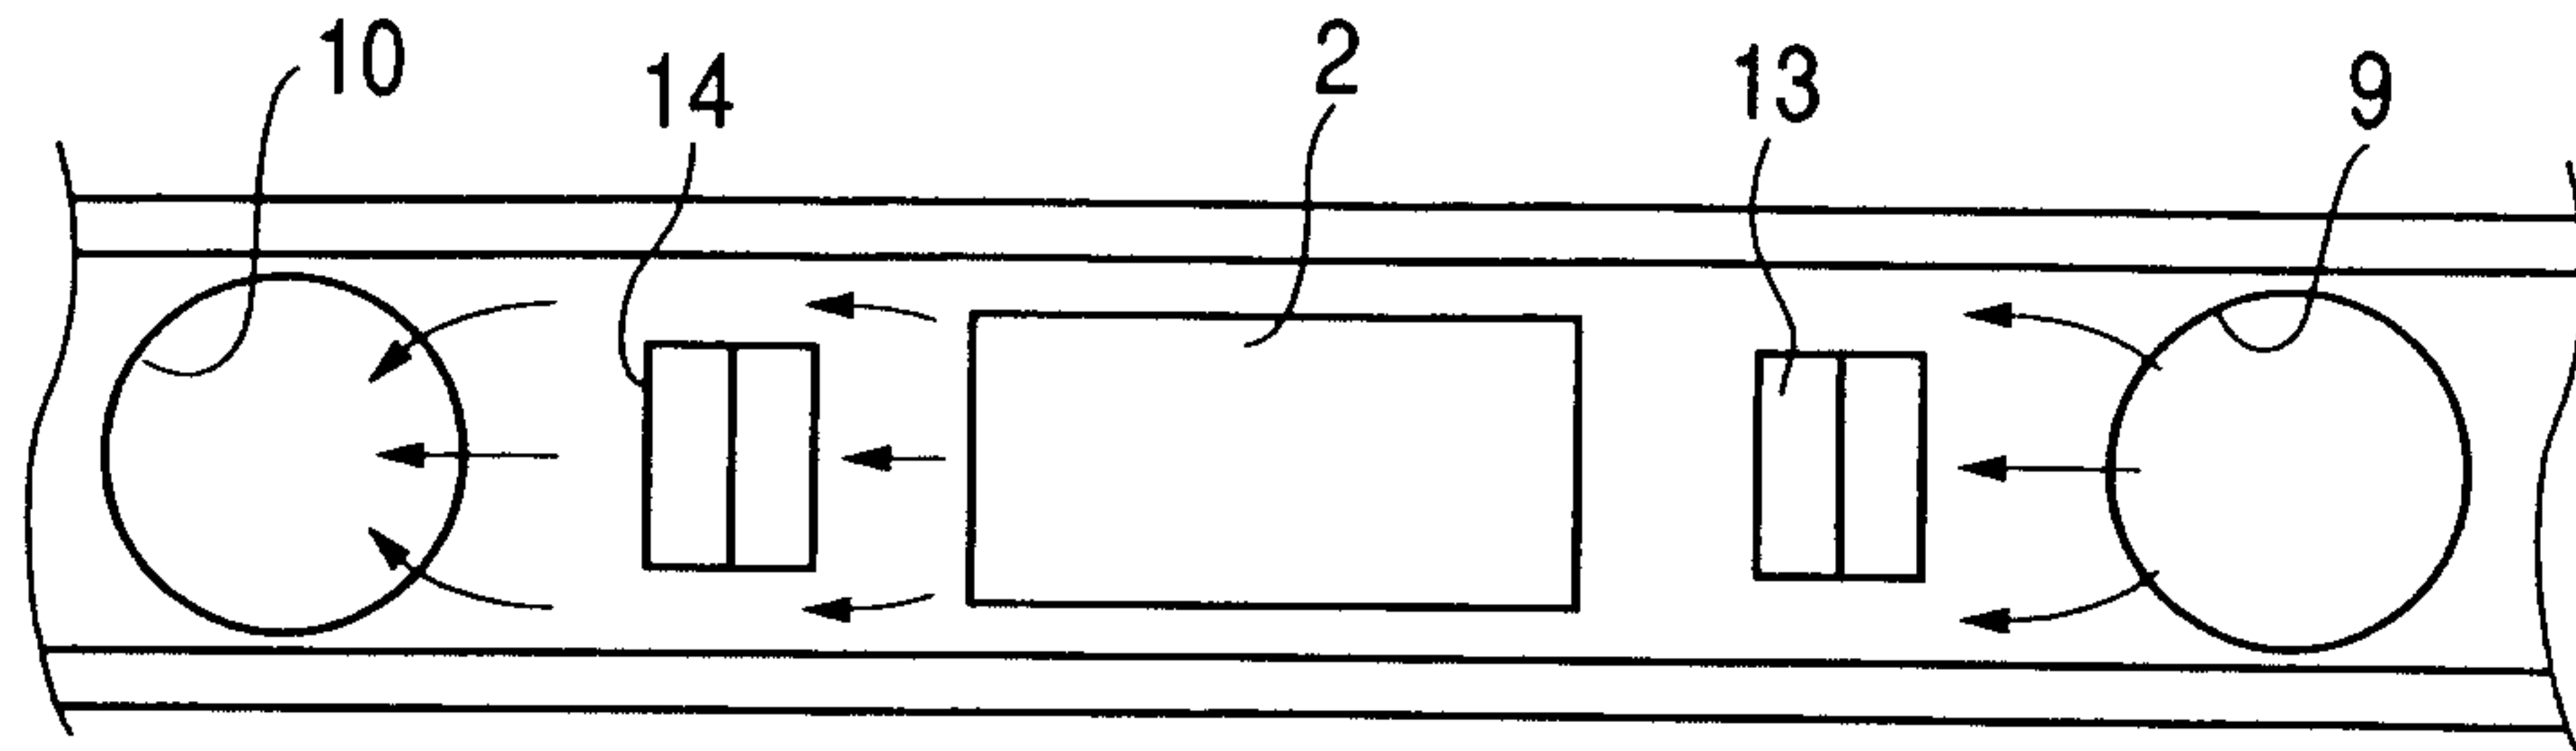
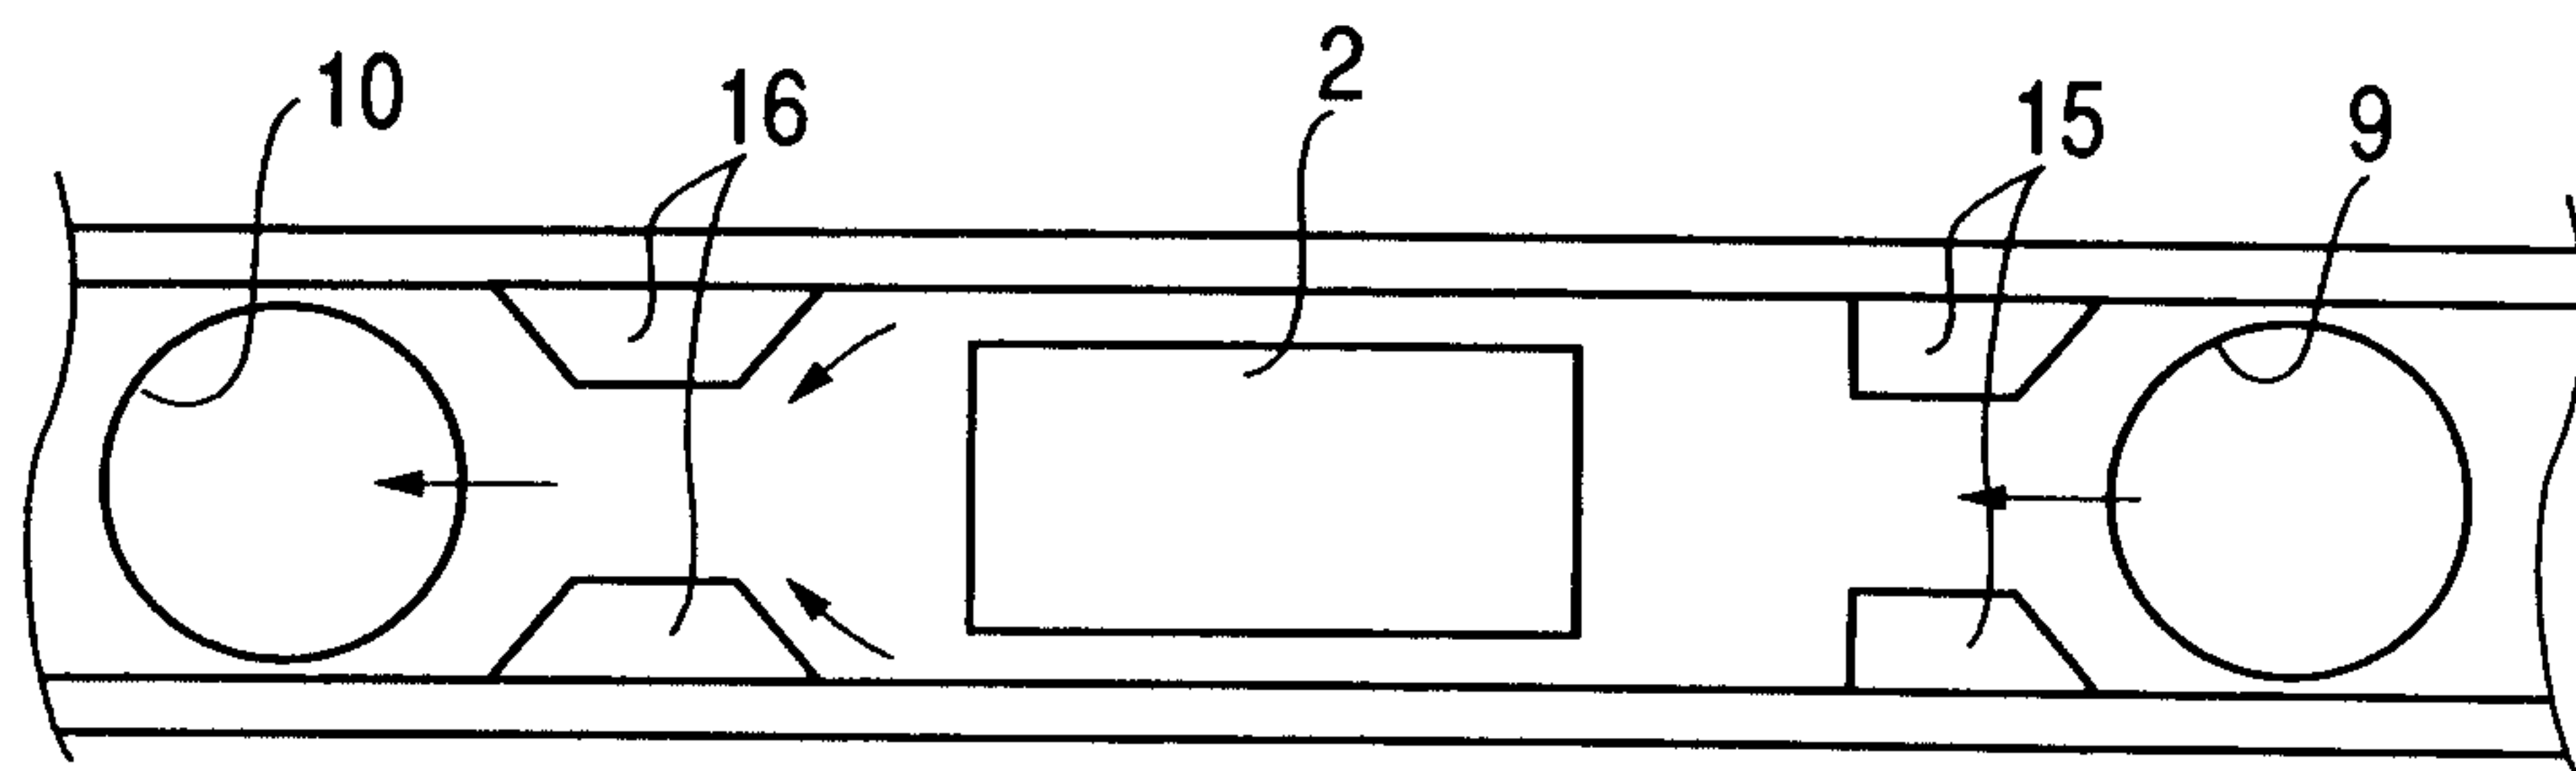
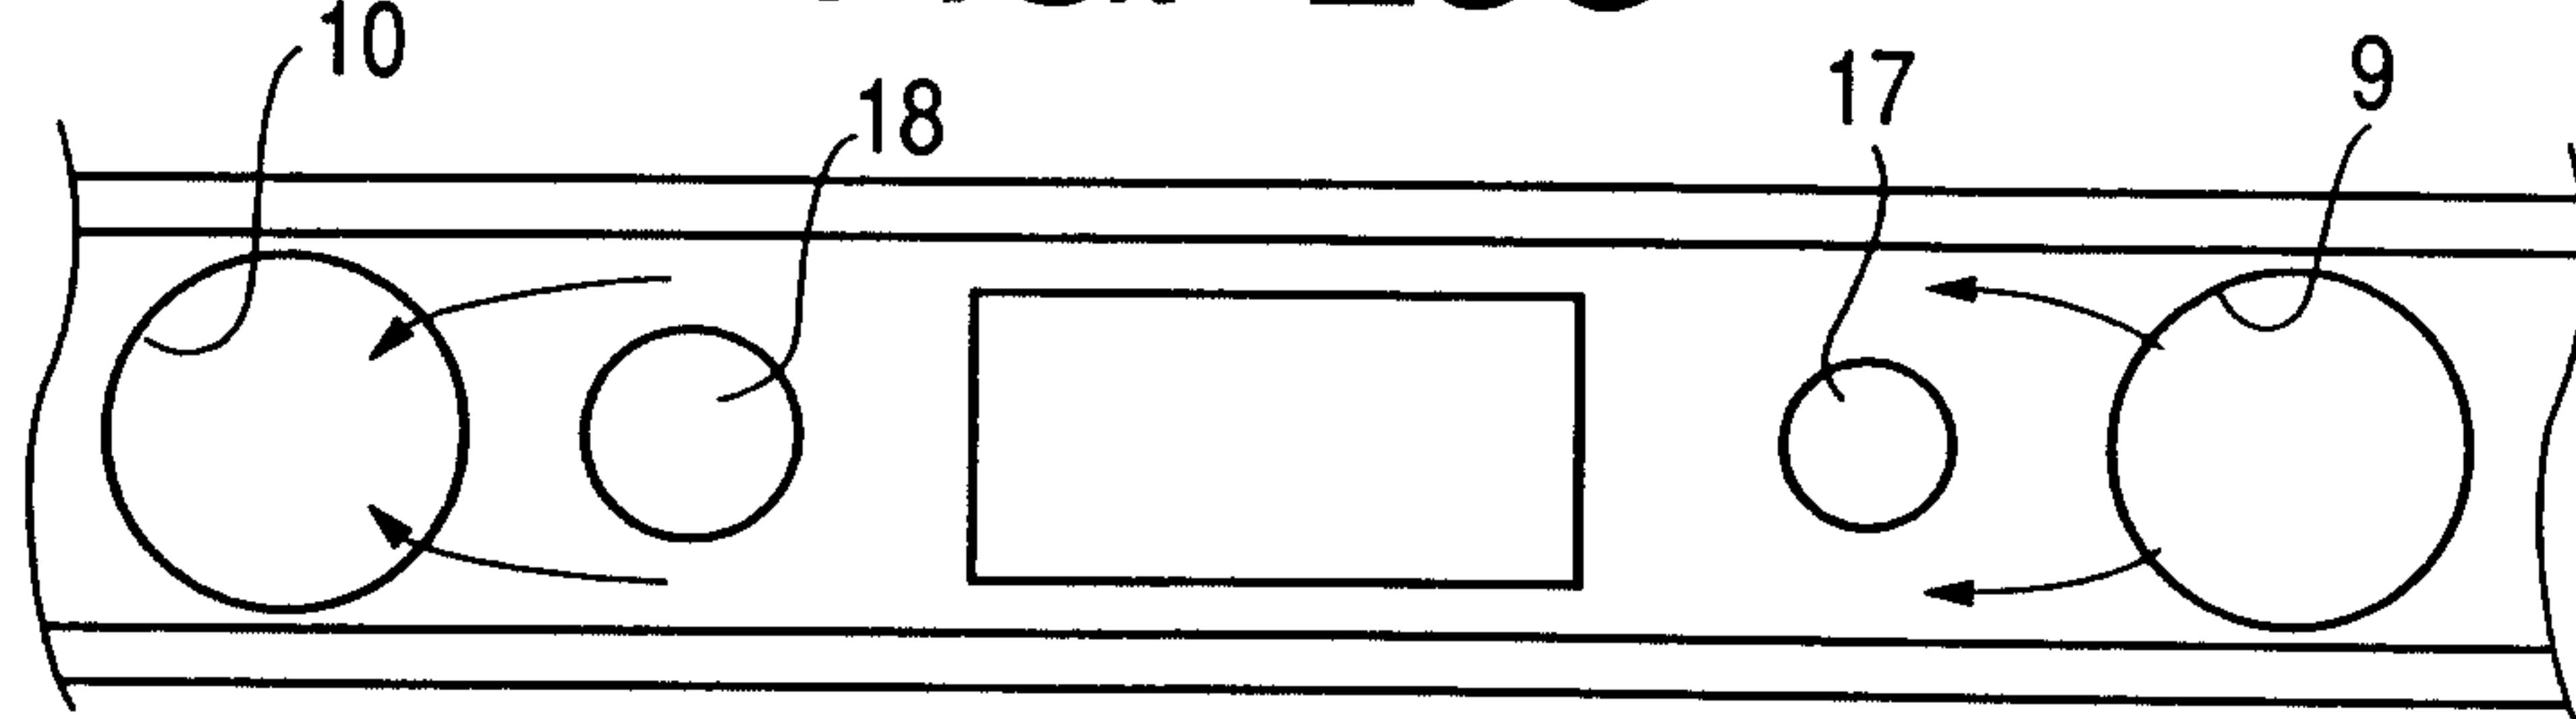
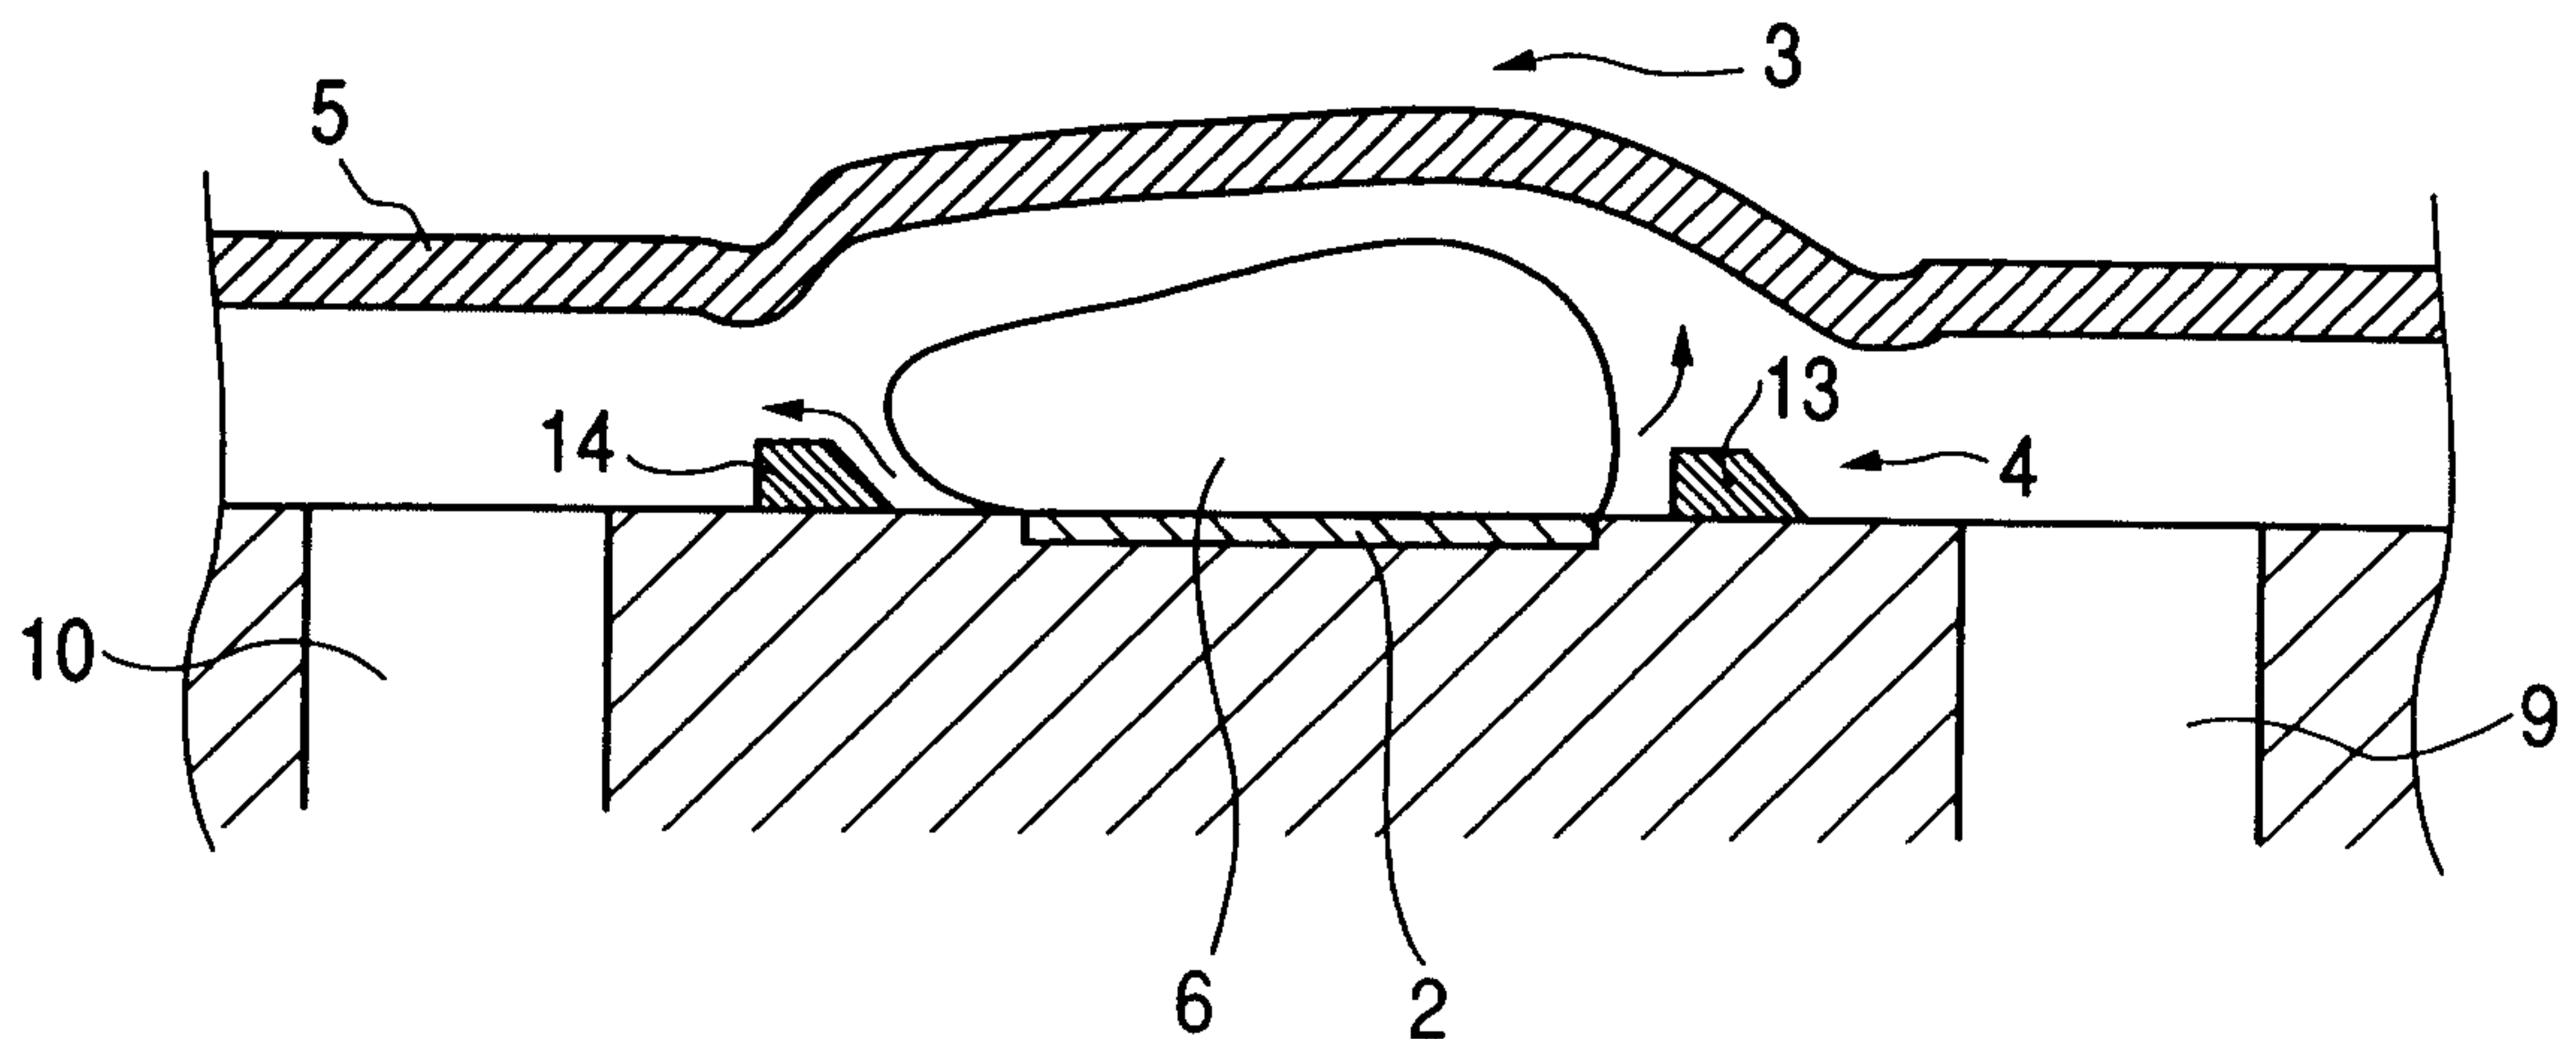


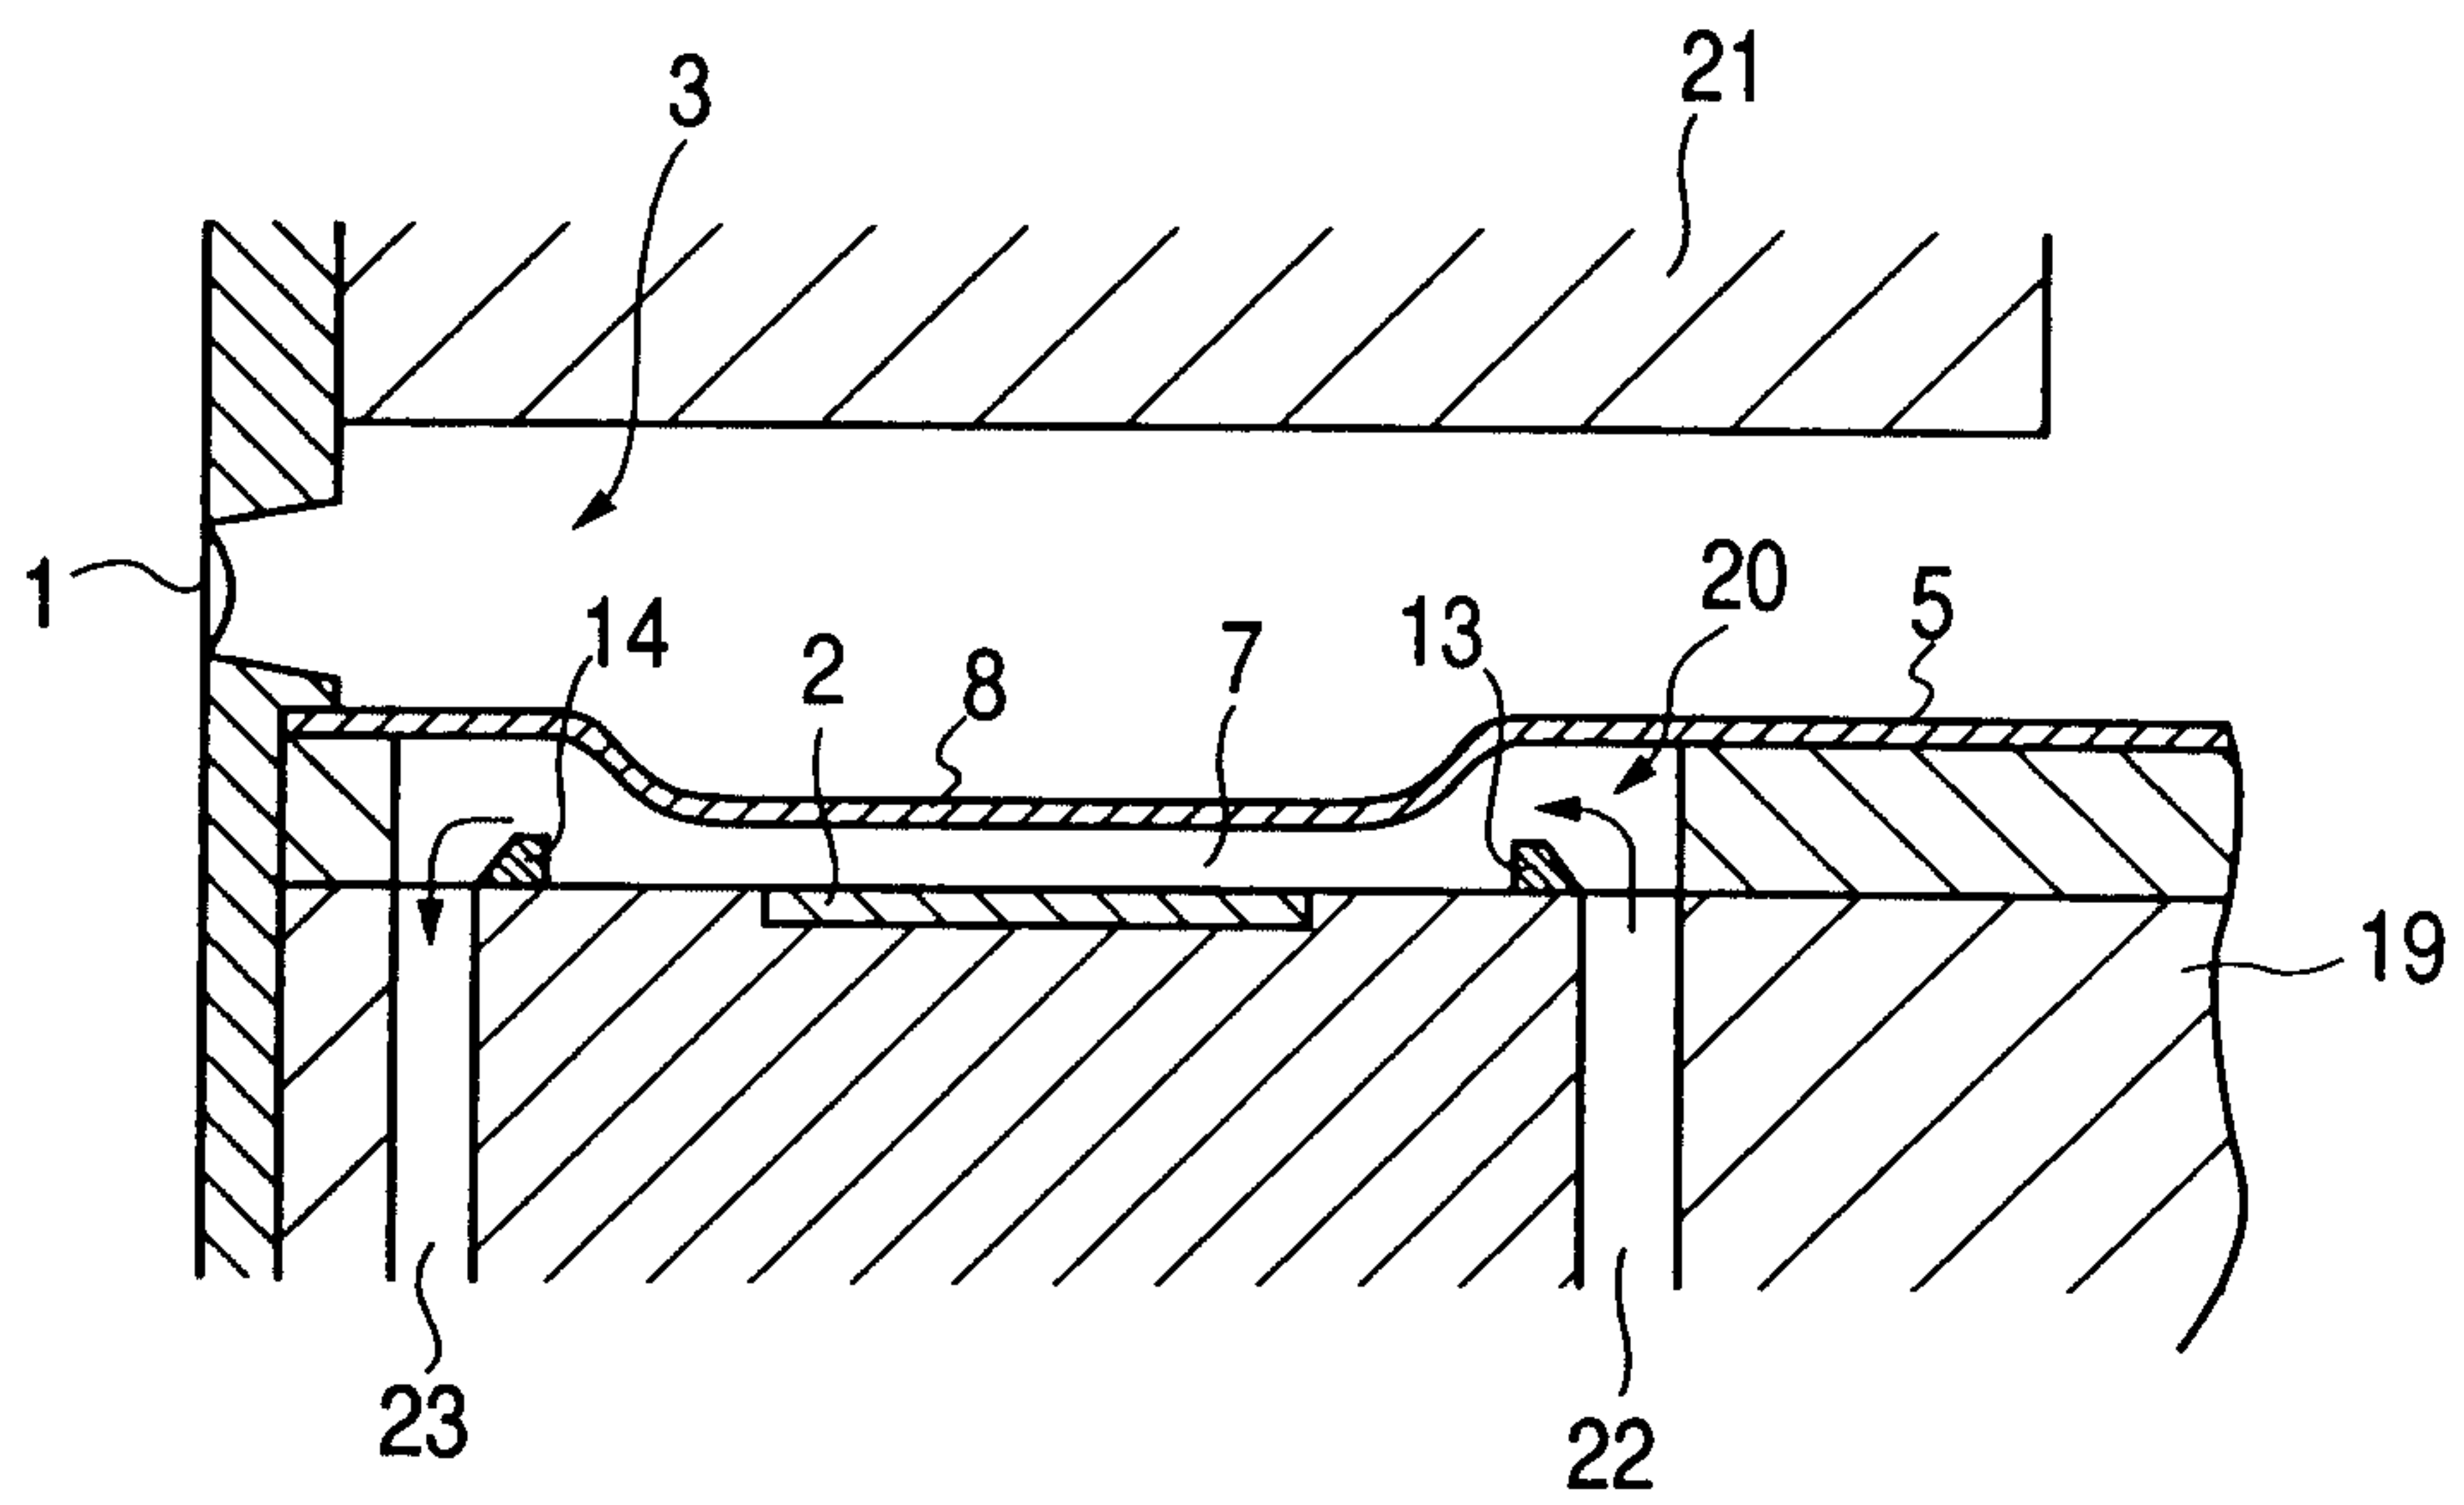
FIG. 27F



24 / 29

FIG. 28A**FIG. 28B****FIG. 28C****FIG. 28D**

25 / 29

FIG. 29

26 / 29

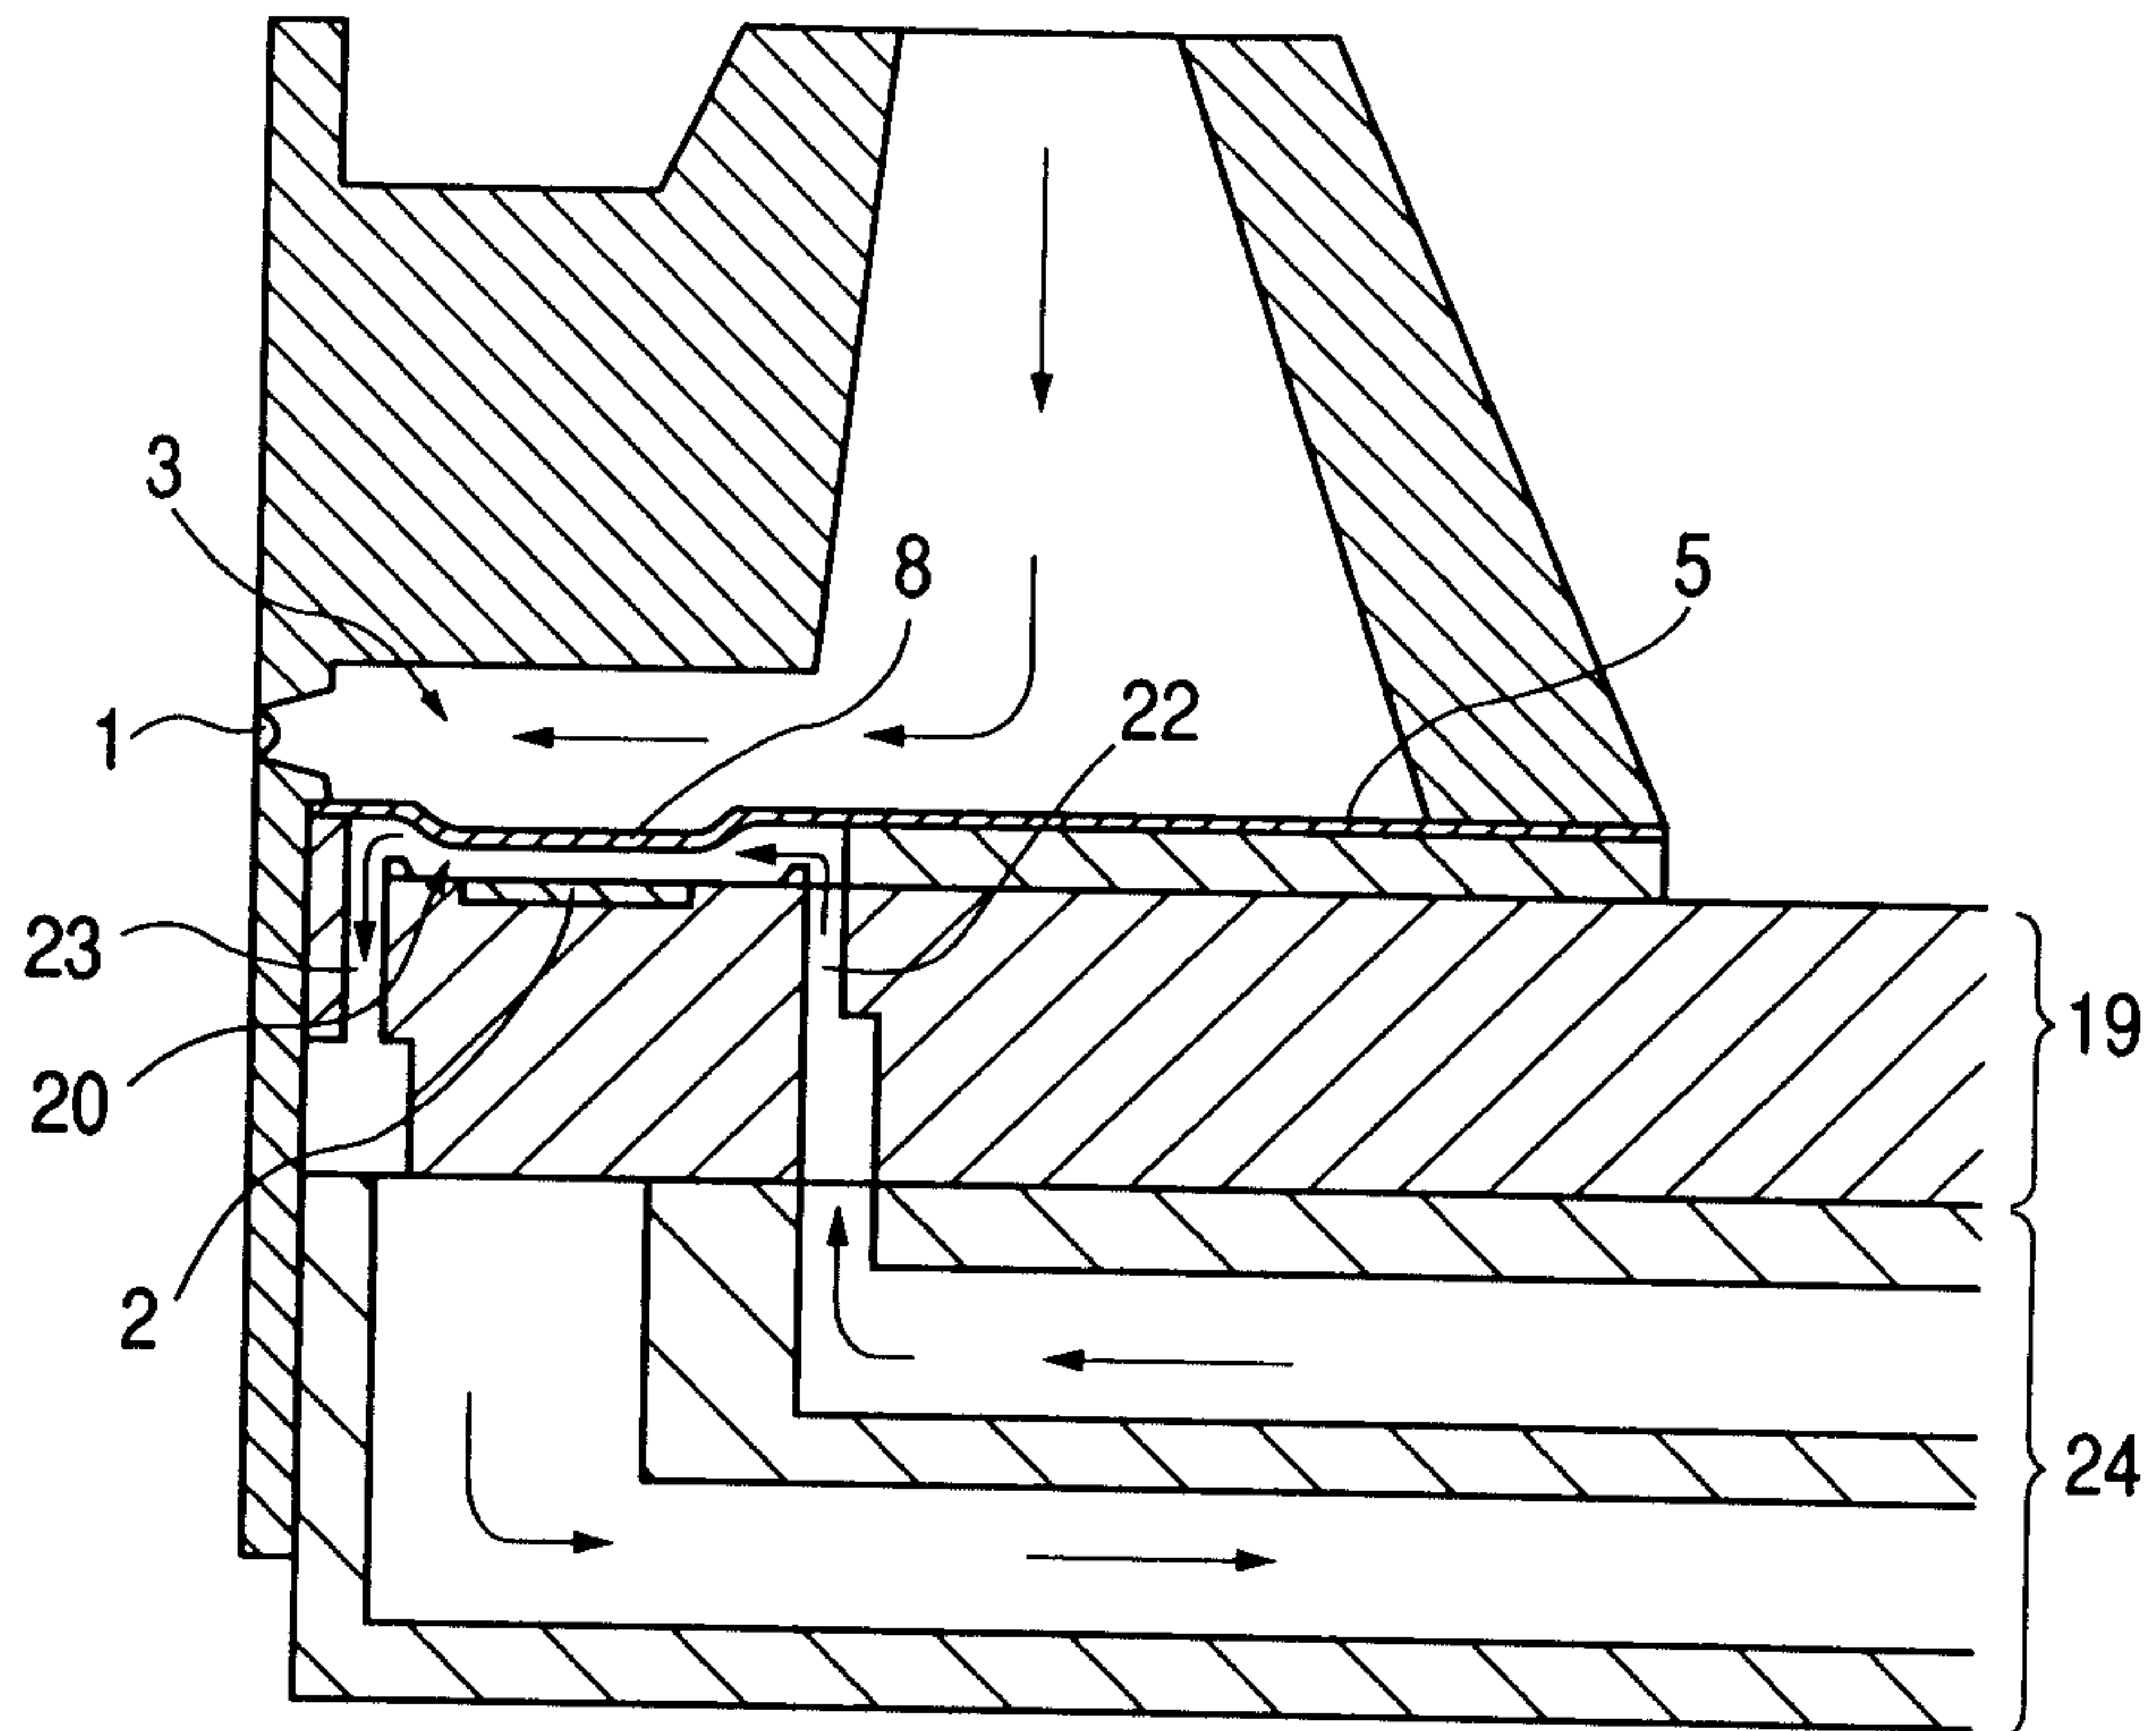
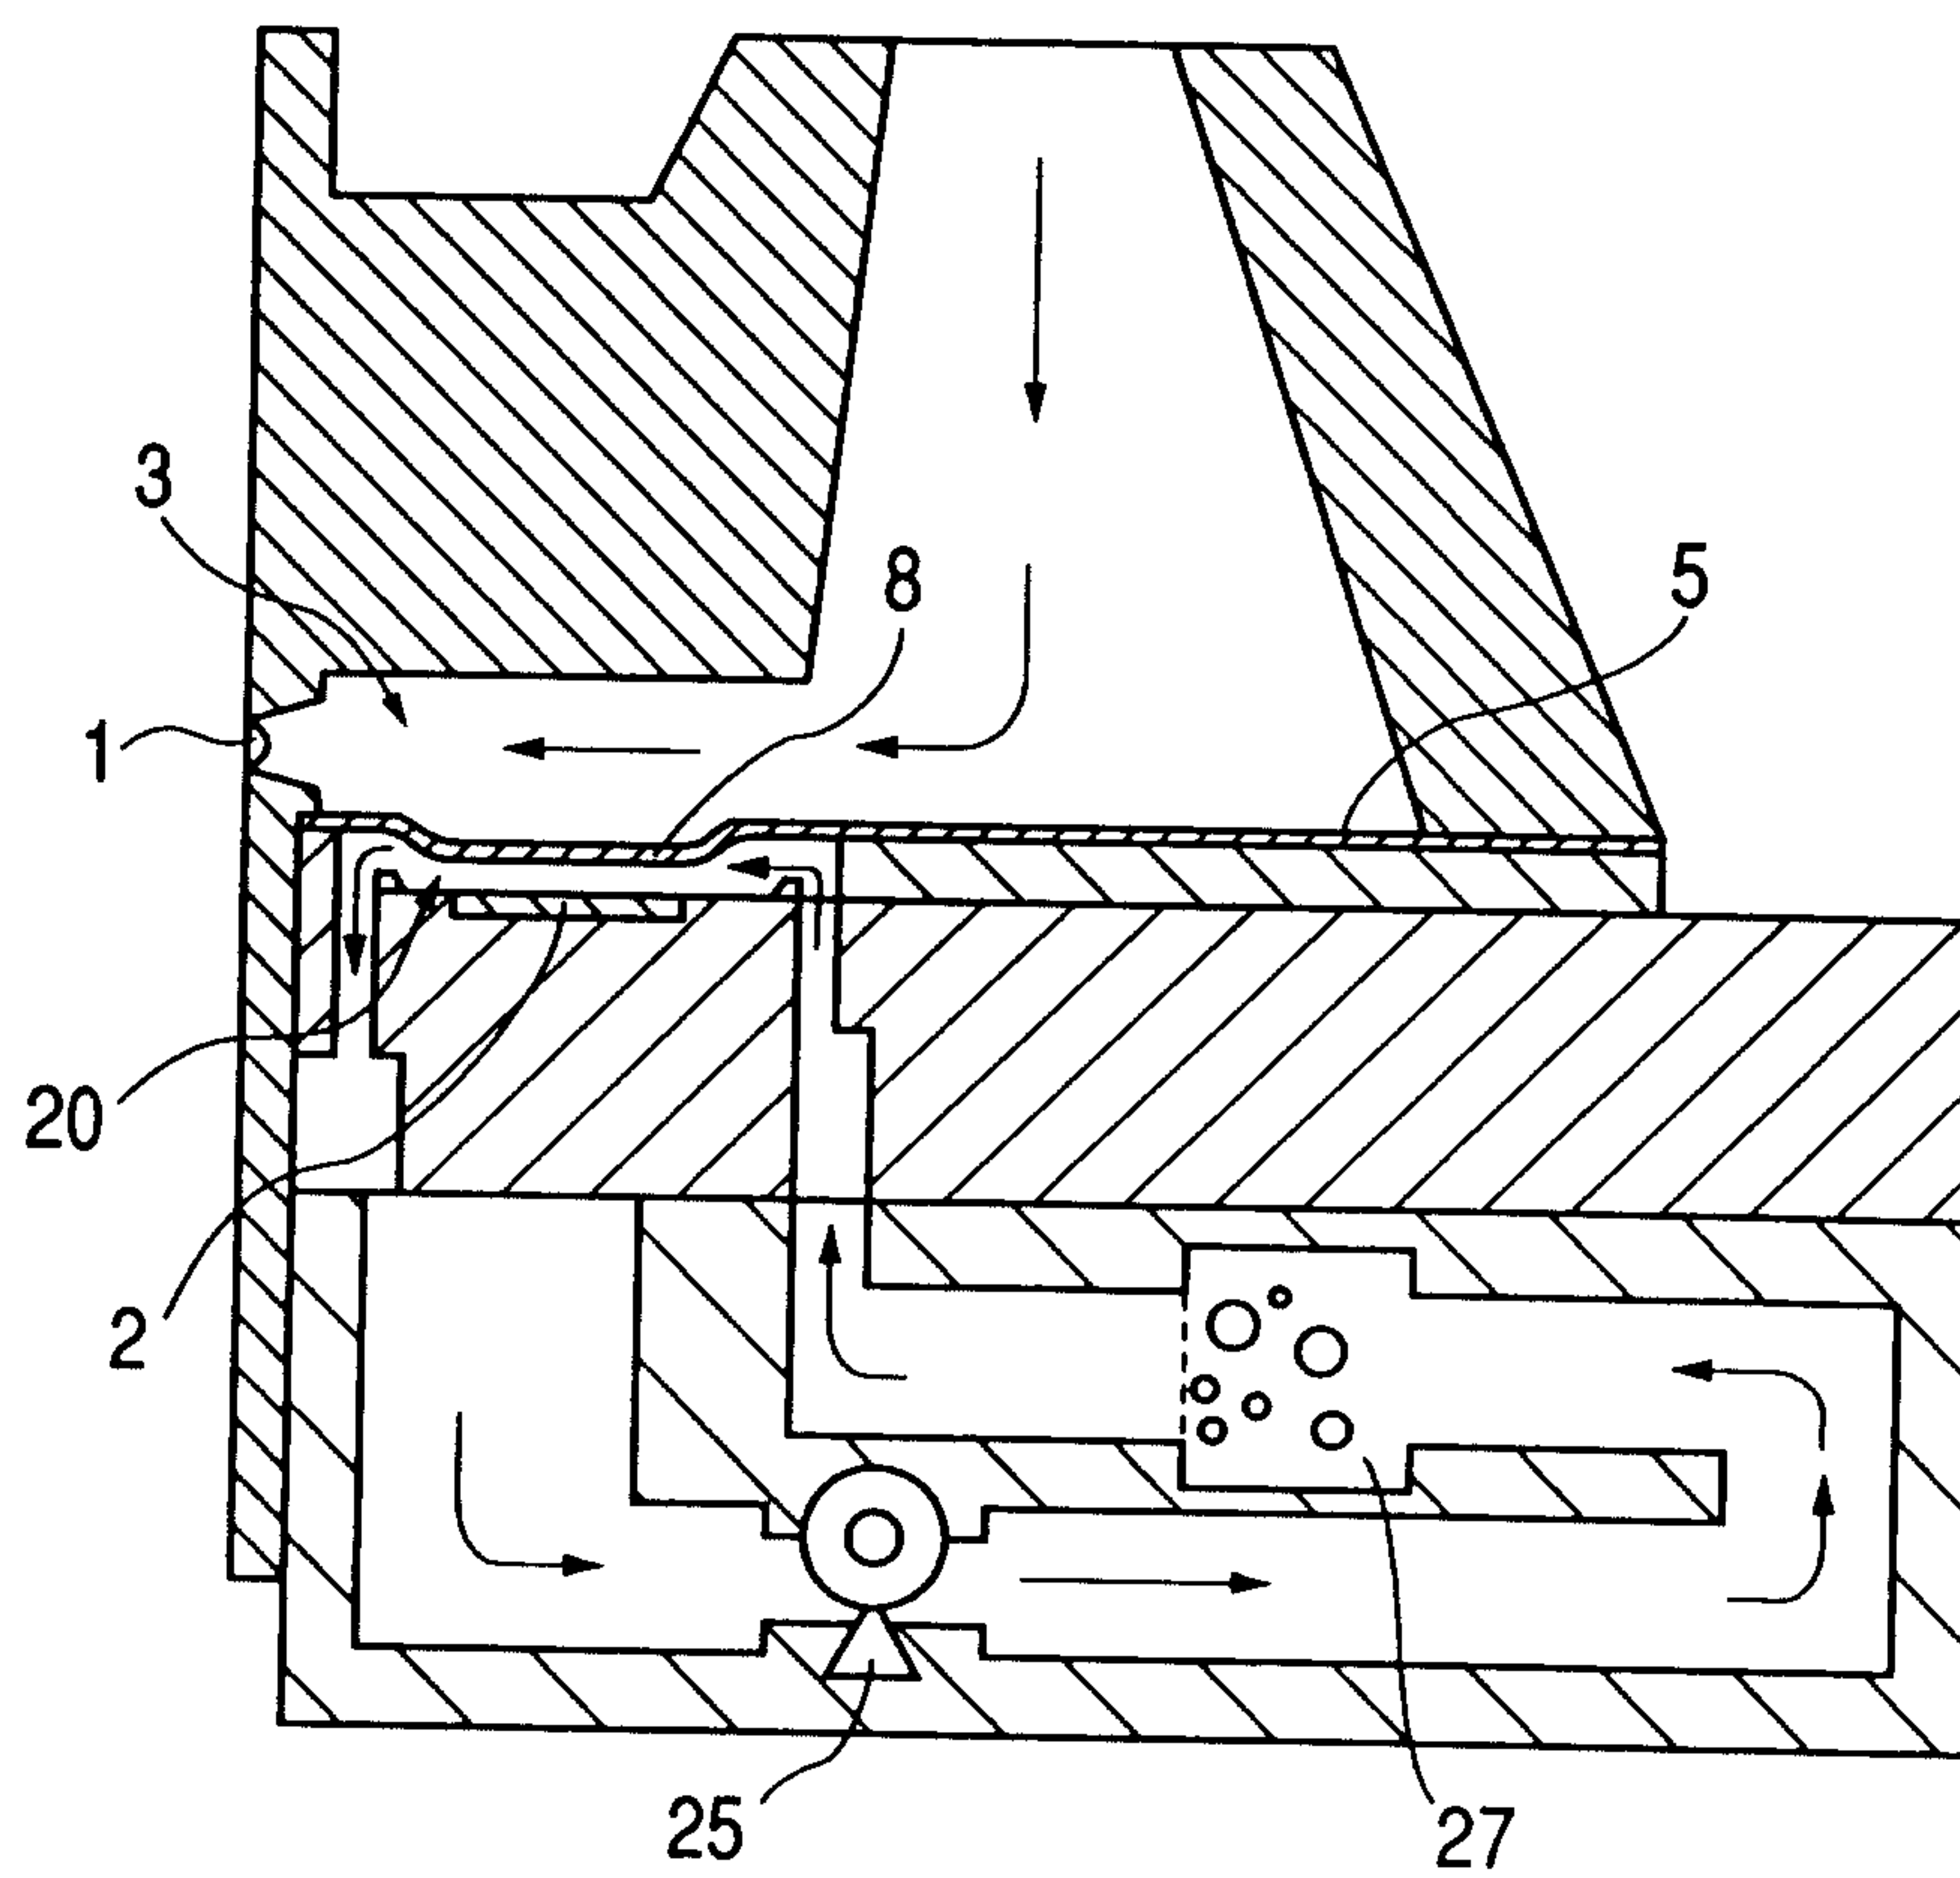
FIG. 30**FIG. 31**

FIG. 32A

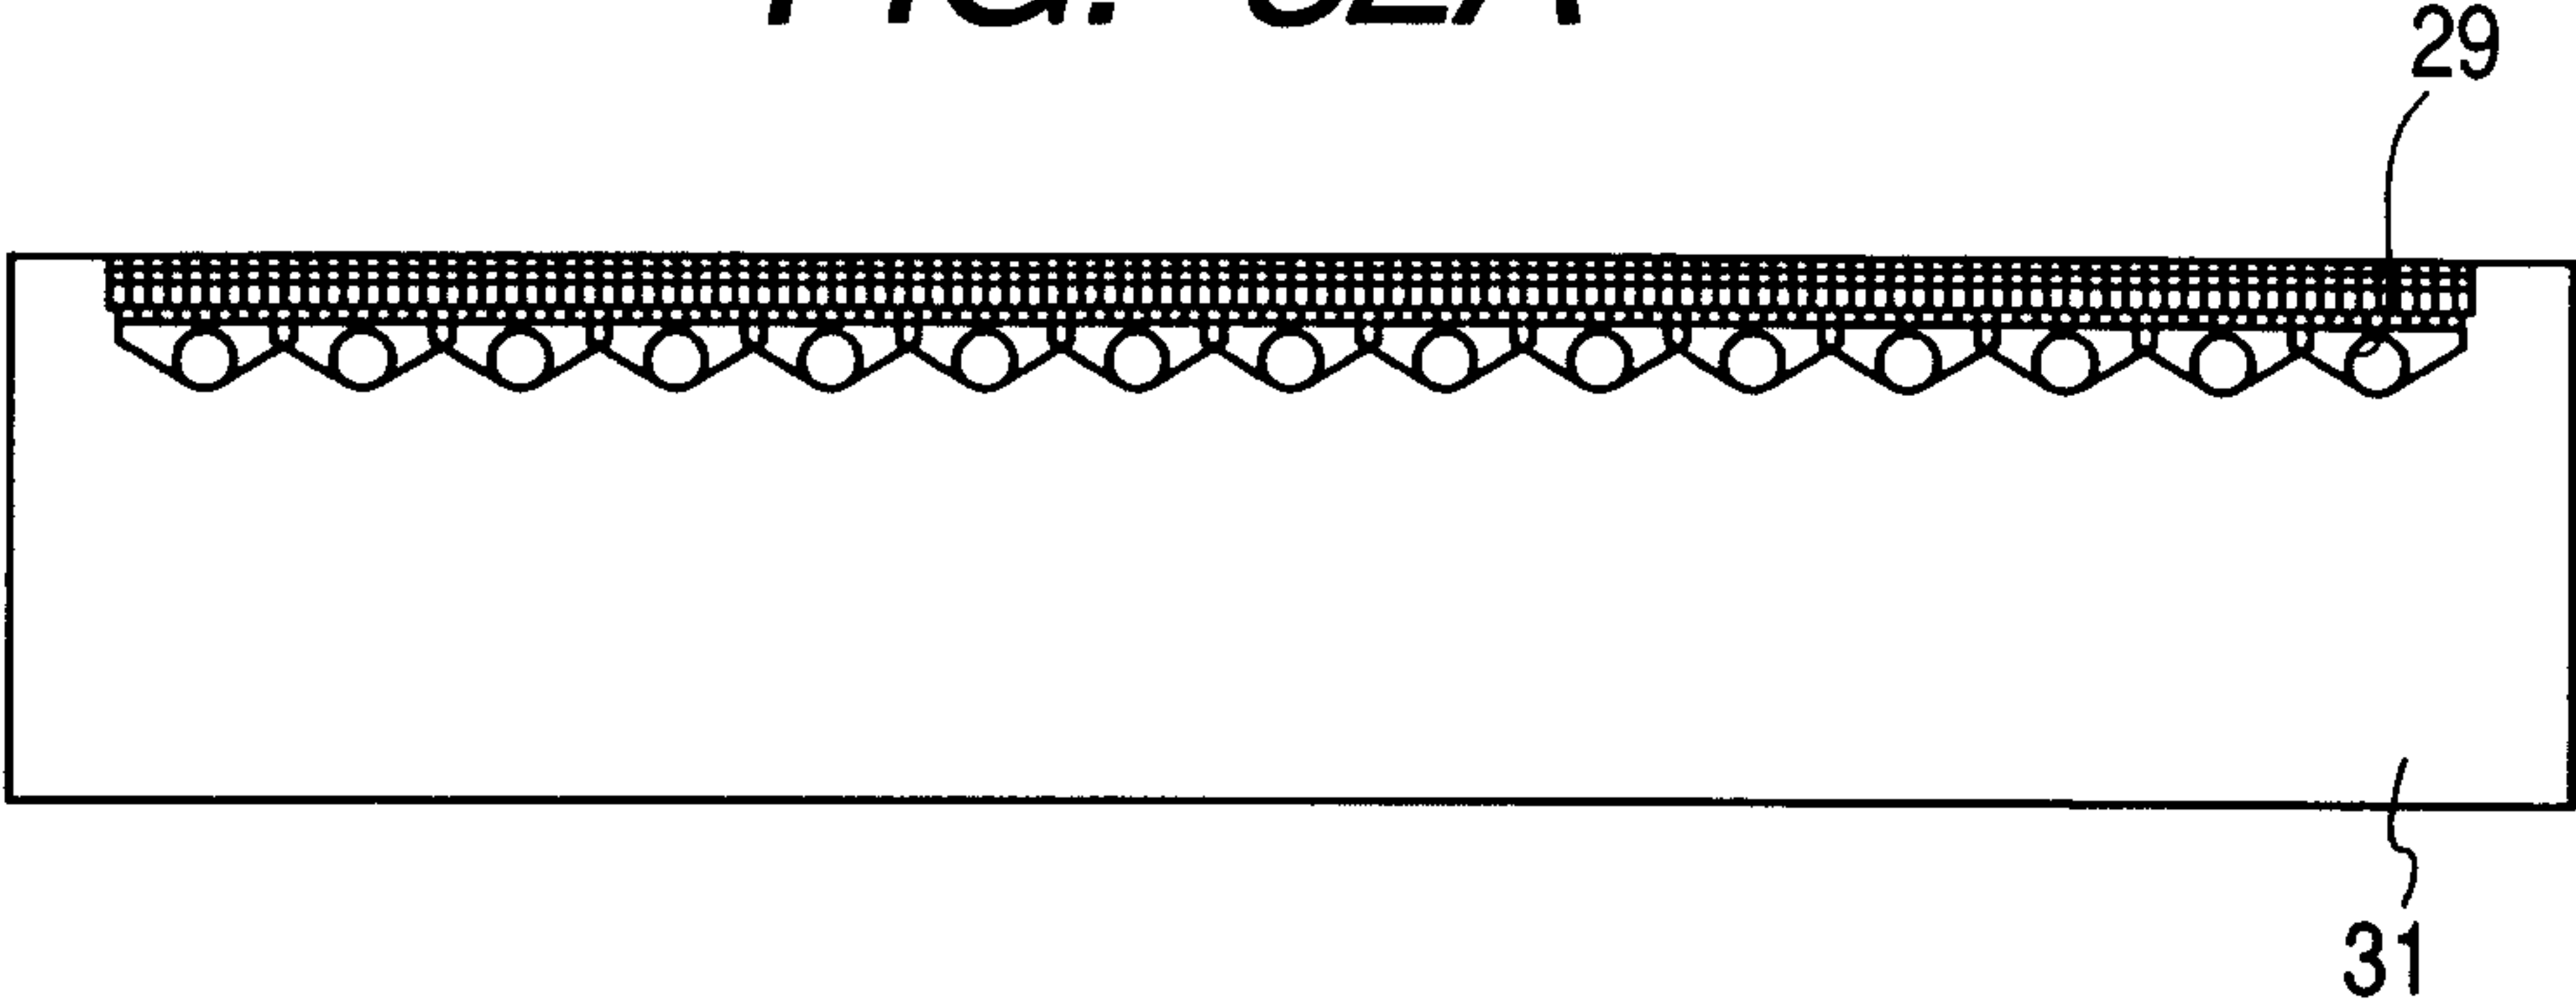


FIG. 32B

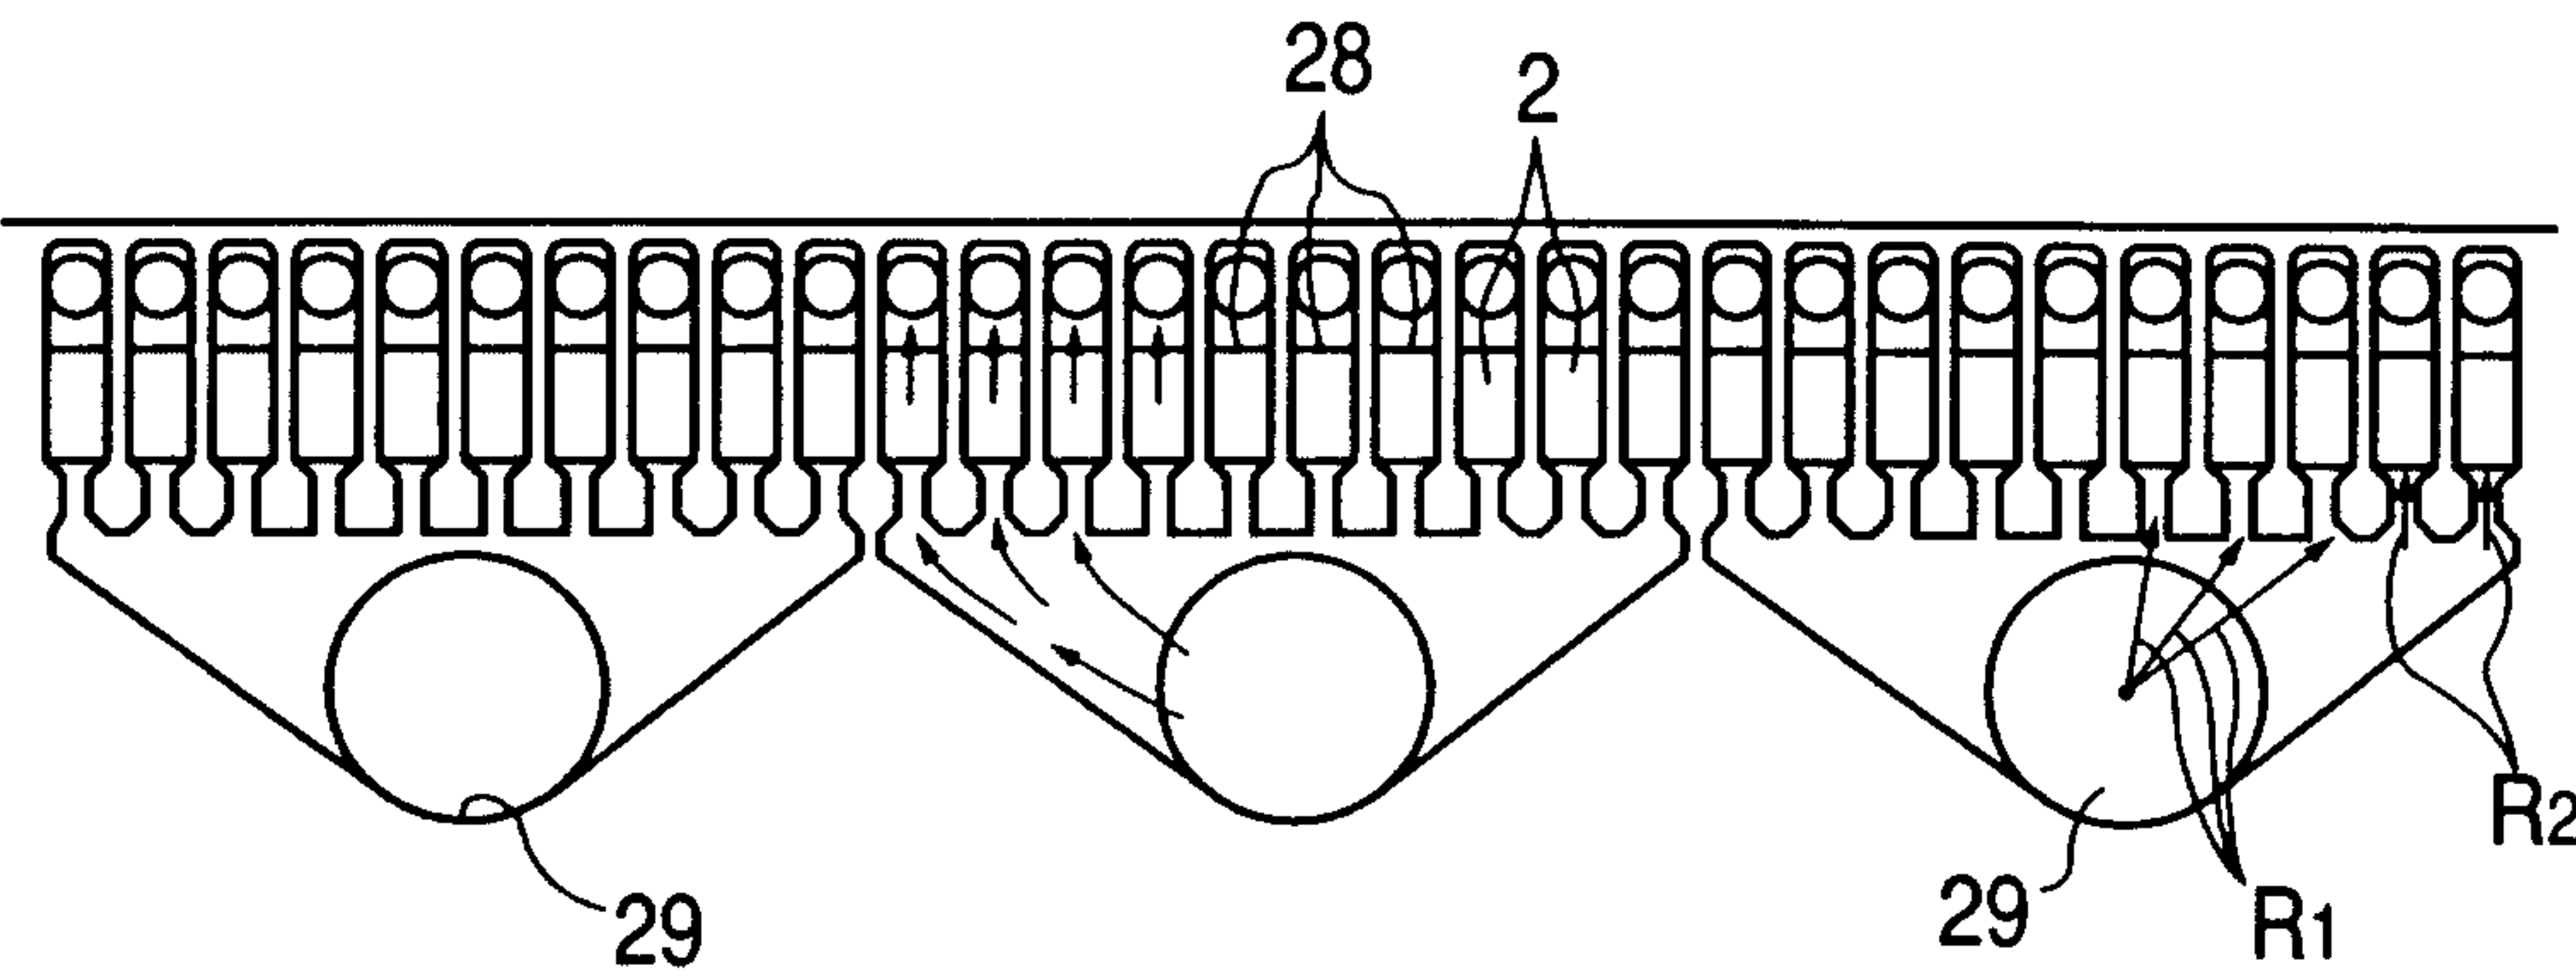
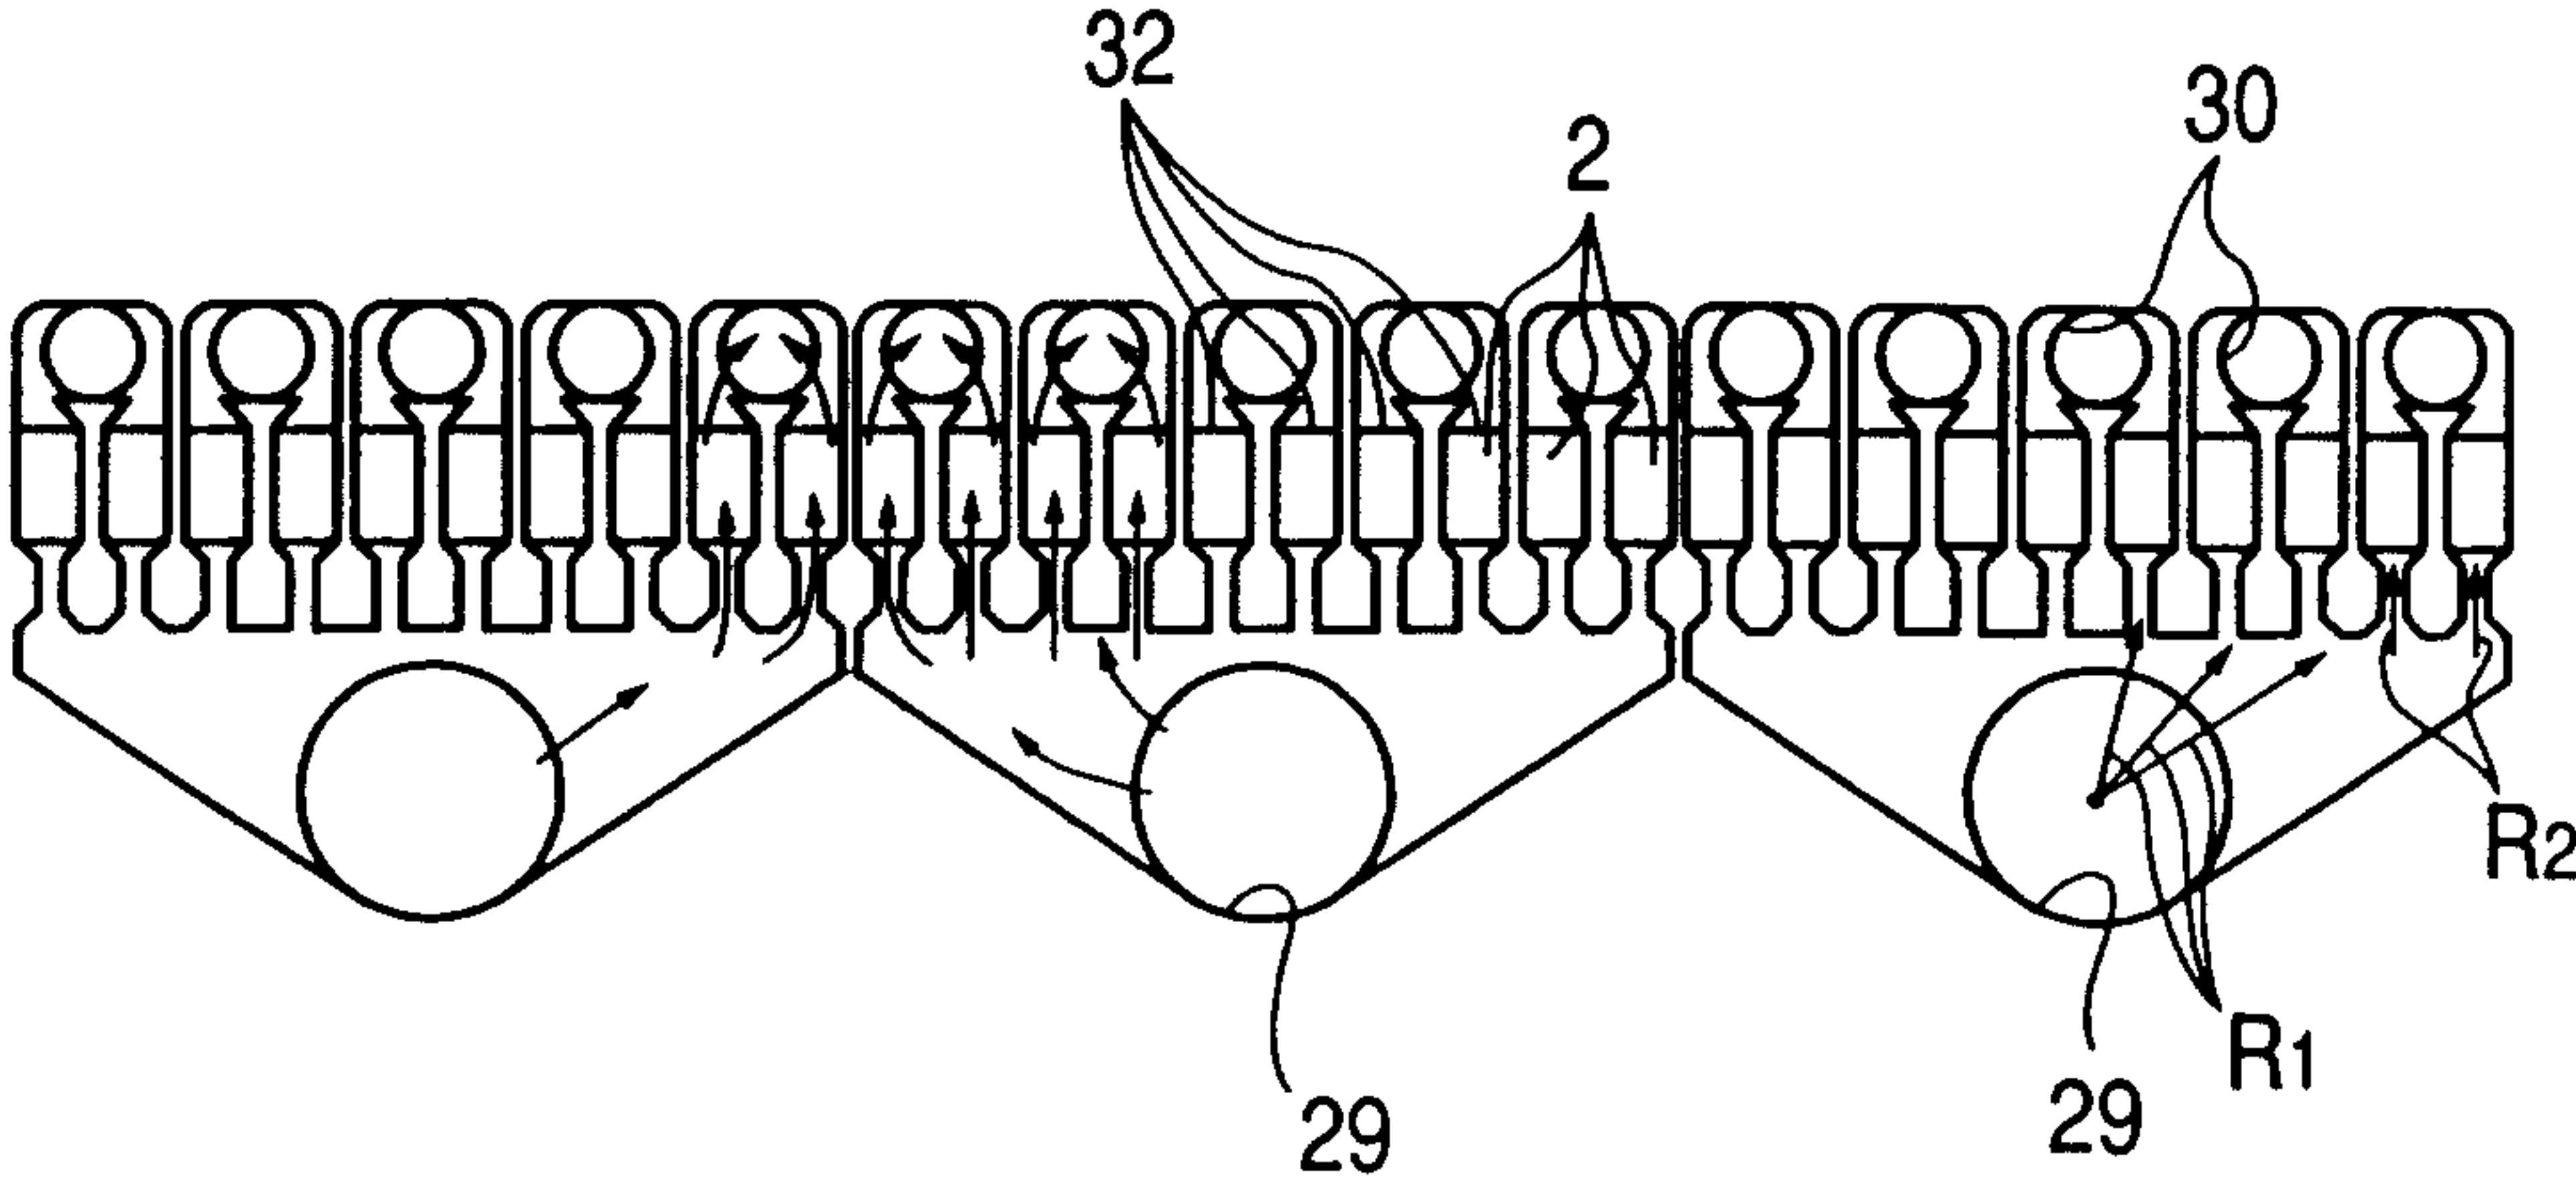
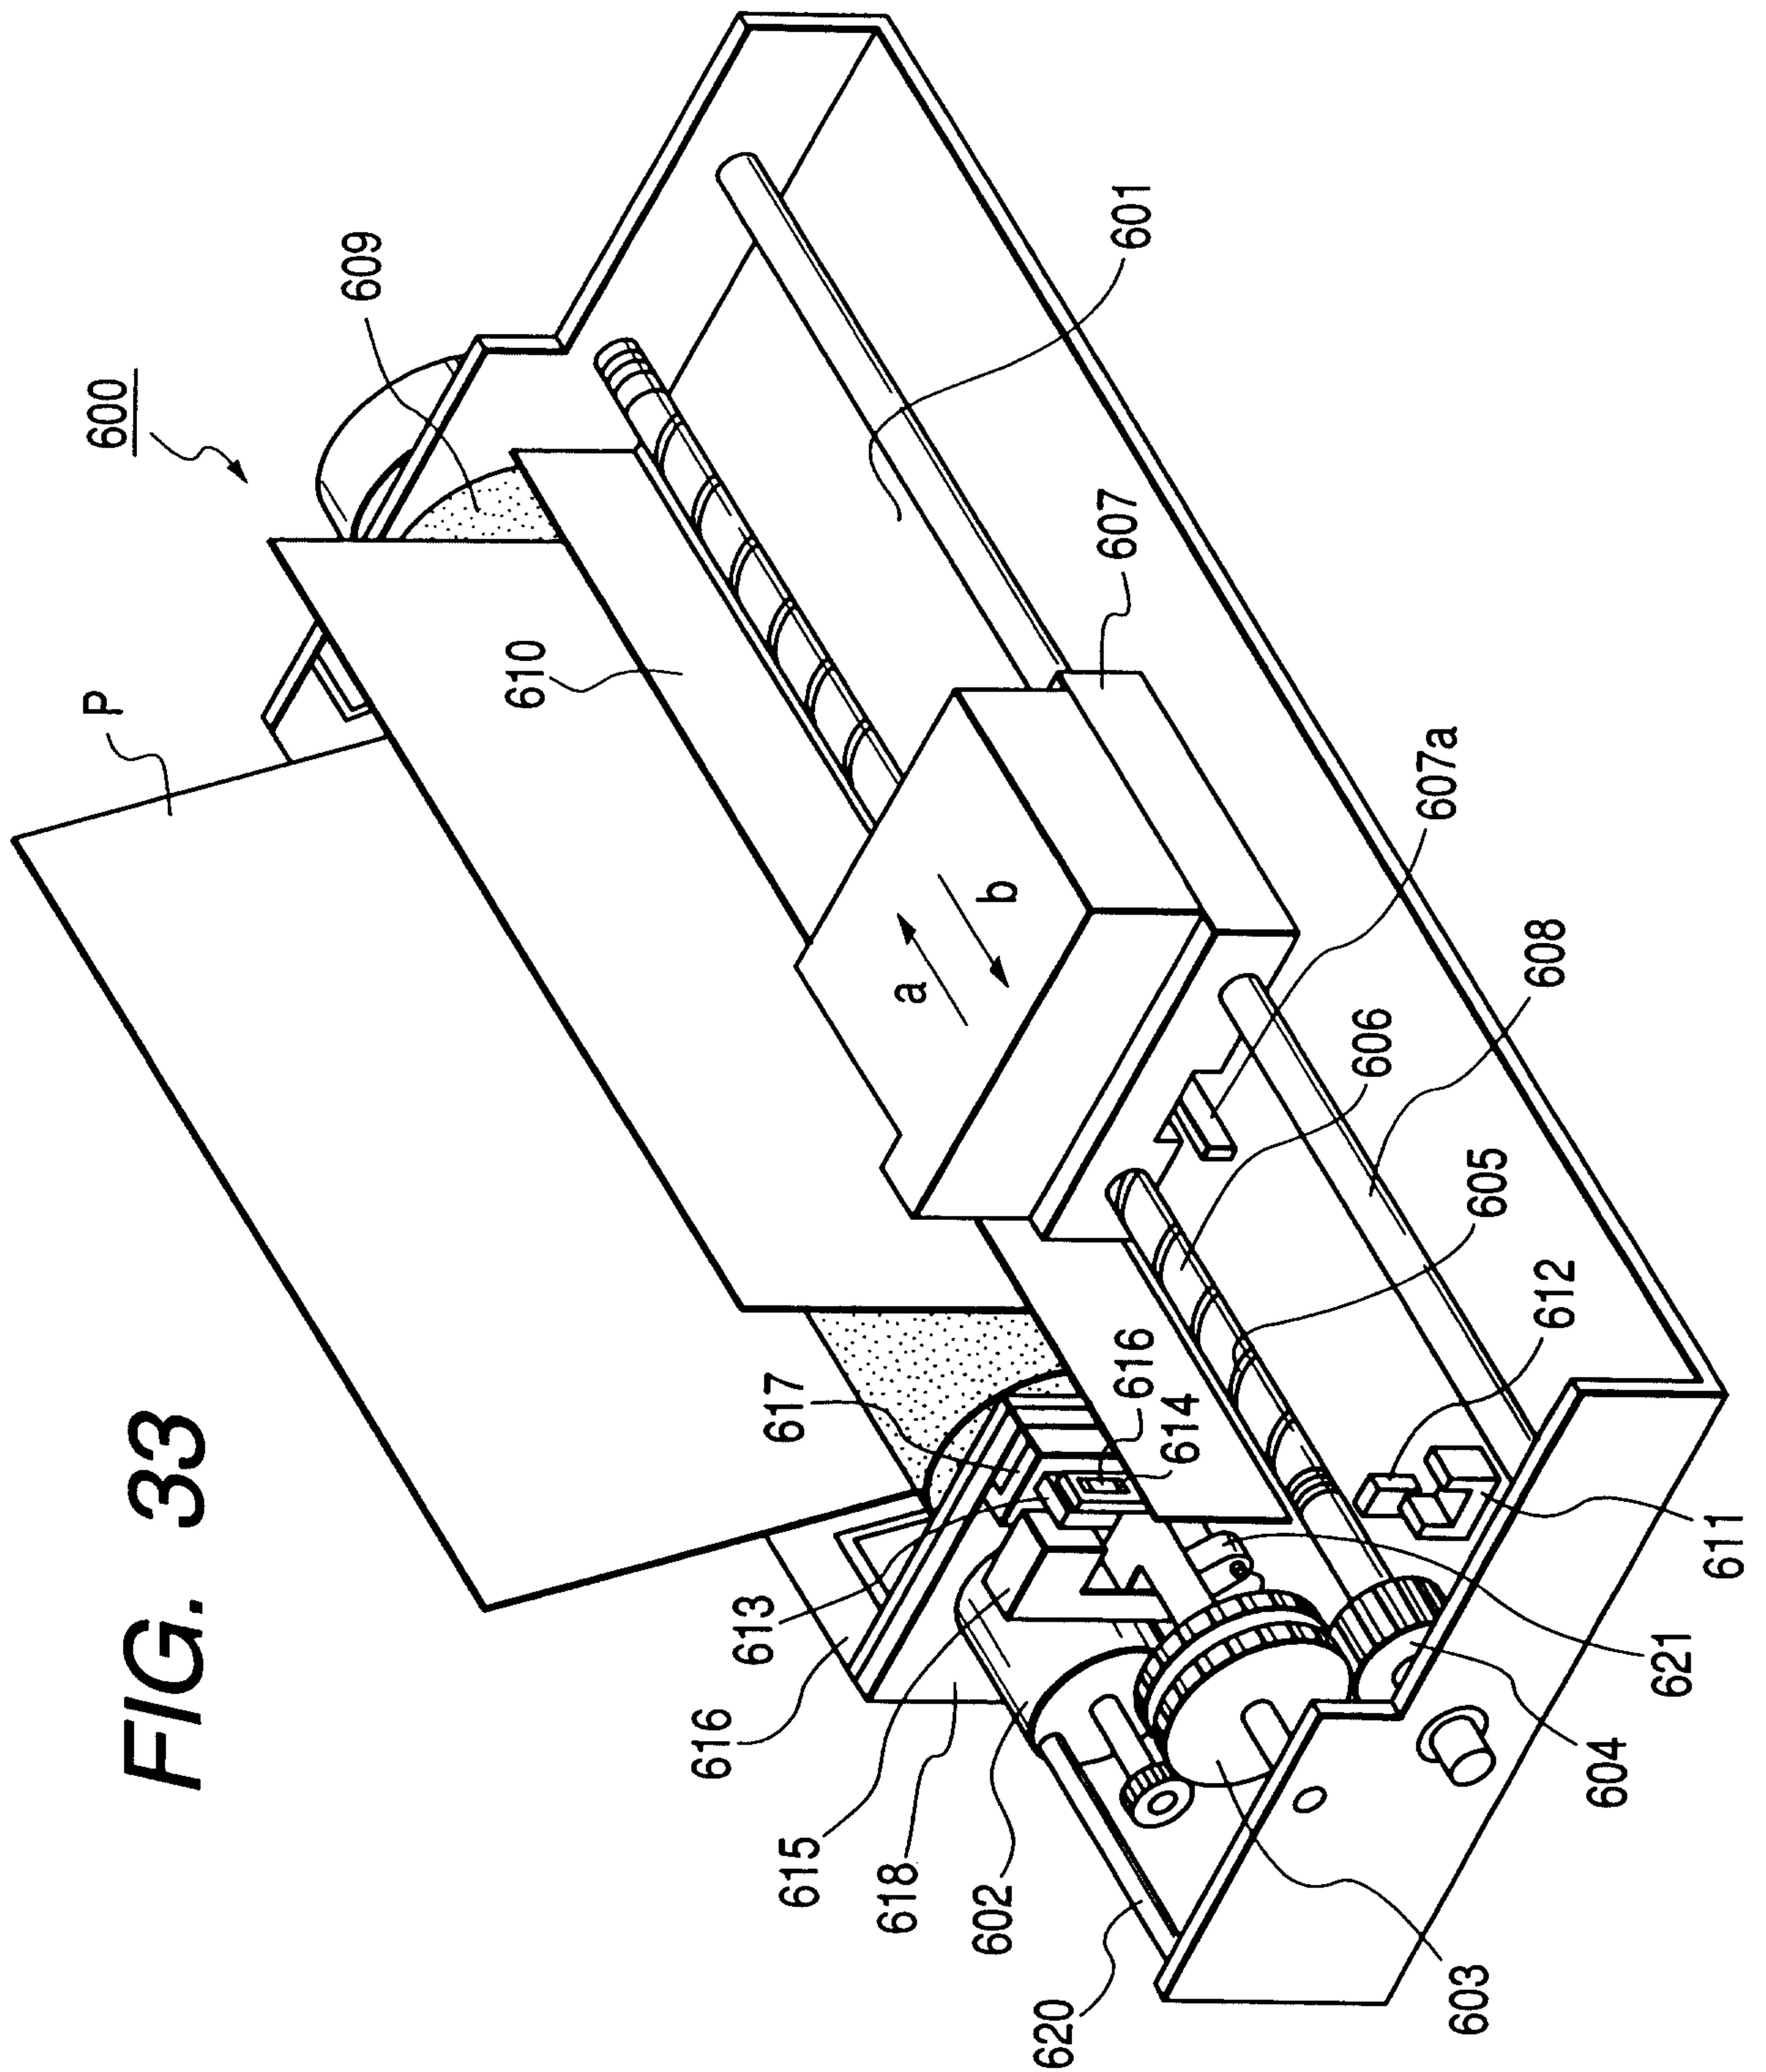


FIG. 32C





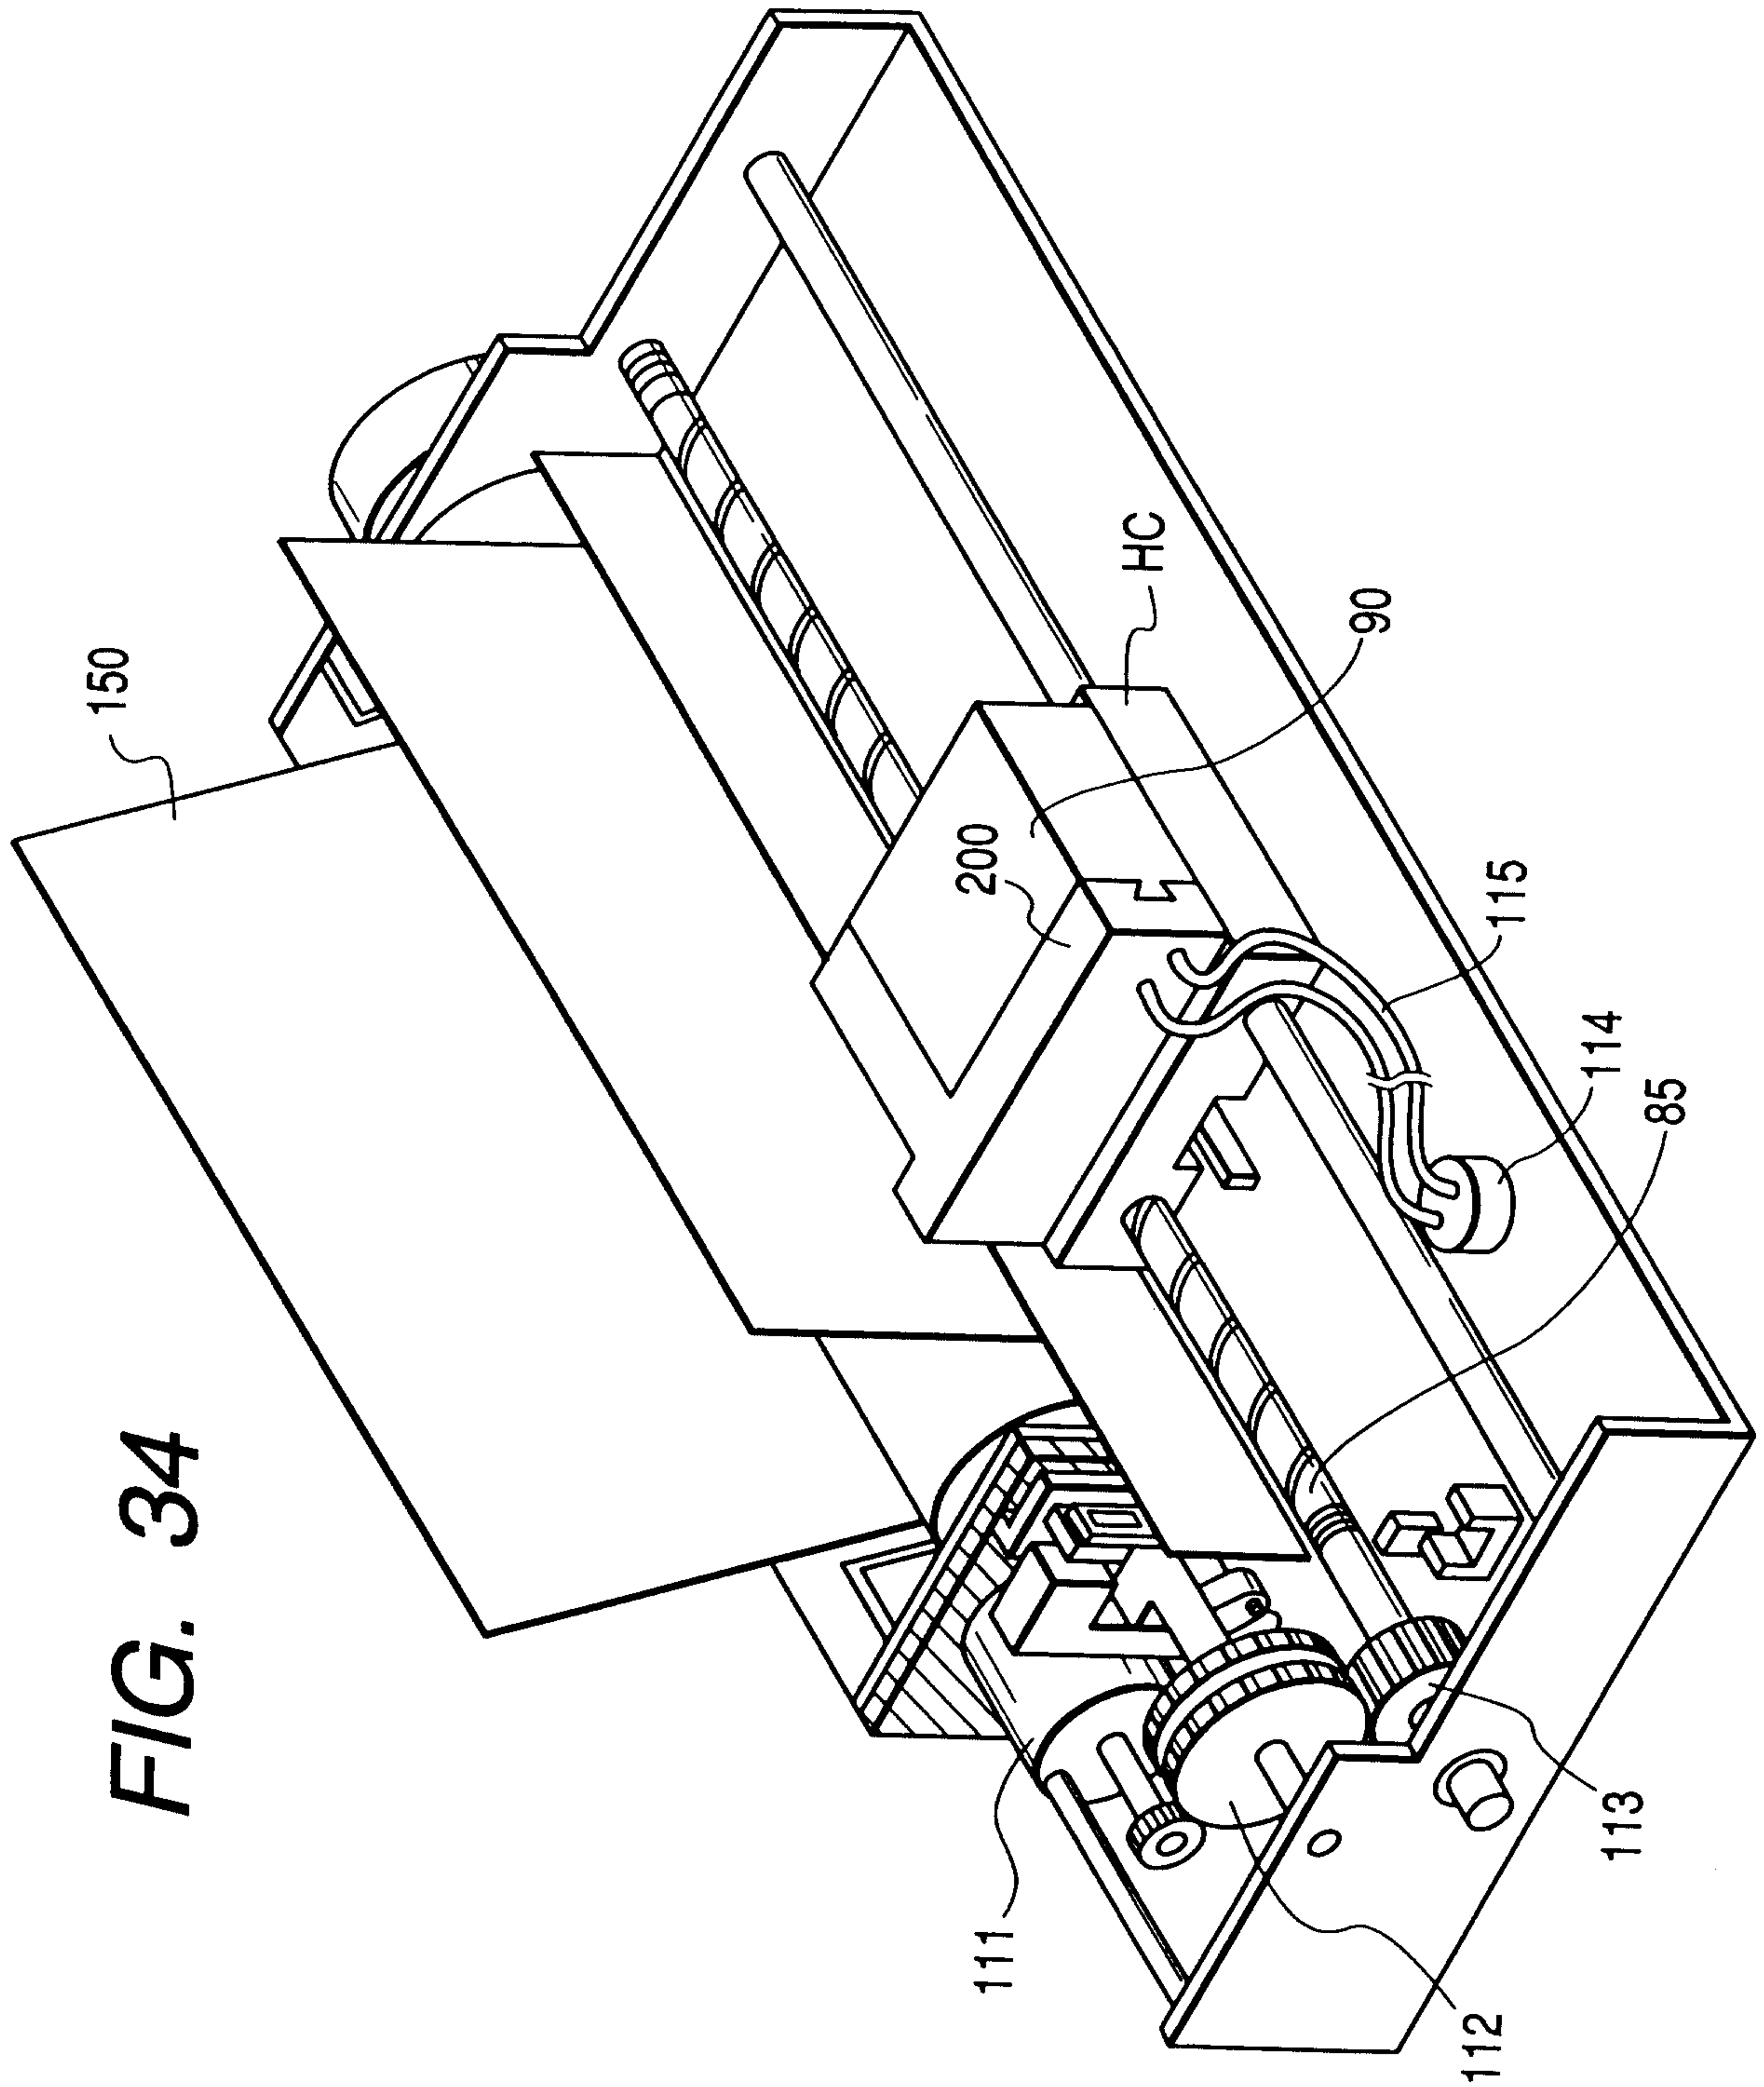


FIG. 34

