

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2012355017 B2

(54) Title
Reverse osmosis treatment device

(51) International Patent Classification(s)
B01D 61/06 (2006.01) **B01D 61/58** (2006.01)
B01D 61/12 (2006.01) **C02F 1/44** (2006.01)

(21) Application No: **2012355017** **(22) Date of Filing:** **2012.12.06**

(87) WIPO No: **WO13/094427**

(30) Priority Data

(31) Number **2011-277238** **(32) Date** **2011.12.19** **(33) Country** **JP**

(43) Publication Date: **2013.06.27**
(44) Accepted Journal Date: **2016.02.04**

(71) Applicant(s)
Hitachi, Ltd.

(72) Inventor(s)
Kitamura, Kotaro;Yoshikawa, Shinichi;Miyakawa, Hiroki

(74) Agent / Attorney
Spruson & Ferguson, L 35 St Martins Tower 31 Market St, Sydney, NSW, 2000

(56) Related Art
JP 2010-0179264
JP 2000-051663

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局

(43) 国際公開日
2013年6月27日(27.06.2013)



(10) 国際公開番号

WO 2013/094427 A1

(51) 国際特許分類:

B01D 61/06 (2006.01) B01D 61/58 (2006.01)
B01D 61/12 (2006.01) C02F 1/44 (2006.01)

(21) 国際出願番号:

PCT/JP2012/081665

(22) 国際出願日:

2012年12月6日(06.12.2012)

(25) 国際出願の言語:

日本語

(26) 国際公開の言語:

日本語

(30) 優先権データ:

特願 2011-277238 2011年12月19日(19.12.2011) JP

(71) 出願人: 株式会社日立プラントテクノロジー
(HITACHI PLANT TECHNOLOGIES, LTD.) [JP/JP];
〒1708466 東京都豊島区東池袋4丁目5番2号
Tokyo (JP).

(72) 発明者: 北村 光太郎(KITAMURA Kotaro); 〒
1708466 東京都豊島区東池袋4丁目5番2号
株式会社日立プラントテクノロジー内 Tokyo
(JP). 吉川 慎一(YOSHIKAWA Shinichi); 〒1708466
東京都豊島区東池袋4丁目5番2号 株式会社
日立プラントテクノロジー内 Tokyo (JP). 宮川
浩樹(MIYAKAWA Hiroki); 〒1708466 東京都豊島
区東池袋4丁目5番2号 株式会社日立プラン
トテクノロジー内 Tokyo (JP).

(74) 代理人: 磯野 道造(ISONO Michizo); 〒1020093 東
京都千代田区平河町2丁目7番4号 砂防会館
別館内 磯野国際特許商標事務所気付 Tokyo
(JP).


(81) 指定国(表示のない限り、全ての種類の国内保
護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA,
BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN,
CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES,
FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN,
IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX,
MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH,
PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL,
SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG,
US, UZ, VC, VN, ZA, ZM, ZW.

(84) 指定国(表示のない限り、全ての種類の広域保
護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW,
MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア
(AM, AZ, BY, KG, KZ, RU, TJ, TM), ヨーロッパ
(AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT,
NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

[続葉有]

(54) Title: REVERSE OSMOSIS TREATMENT DEVICE

(54) 発明の名称: 逆浸透処理装置

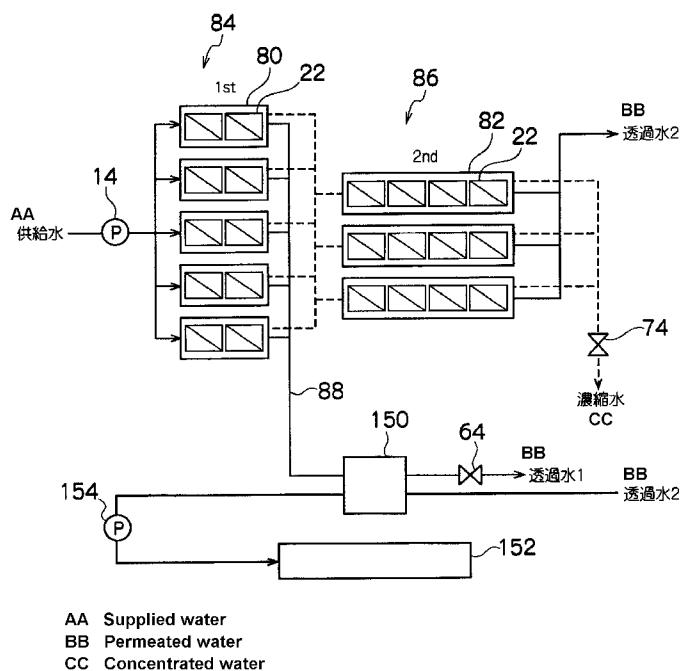

を調整する透過水流量調整バルブ(64)と、を有し、第1の排出管と透過水流量調整バルブ(64)との間に、エネルギー回収装置(150)を有する逆浸透処理装置である。

(57) **Abstract:** The present invention is a reverse osmosis treatment device equipped with a first vessel (80) for subjecting water to be treated to a primary treatment, and a second vessel (82) for subjecting water to be treated, which has been treated by the primary treatment, to a secondary treatment, wherein: the interiors of the first and second vessels (80, 82) are each provided with an element (22) equipped with a reverse osmosis membrane, or a plurality of said elements connected in series by a water-collecting pipe; the first vessel (80) has a first discharge pipe for discharging permeated water, and a permeated-water-flow adjustment valve (64) for adjusting the pressure inside the first vessel (80), and connected to the first discharge pipe; and an energy recovery device (150) is positioned between the first discharge pipe and the permeated-water-flow adjustment valve (64).

(57) **要約:** 本発明は、被処理水を一次処理する第1のベッセル(80)と、一次処理によって処理された被処理水を二次処理する第2のベッセル(82)と、を備え、第1のベッセル(80)内および第2のベッセル(82)内に、逆浸透膜を備えるエレメント(22)を1個、あるいは、集水配管により直列に複数接続して配管されており、第1のベッセル(80)は、透過水を排出する第1の排出管と、第1の排出管に接続され、第1のベッセル(80)内の圧力



添付公開書類:

— 国際調査報告 (条約第 21 条(3))

— 補正された請求の範囲及び説明書 (条約第 19
条(1))

REVERSE OSMOSIS TREATMENT APPARATUS

Technical Field

[0001]

The present invention relates to a reverse osmosis treatment apparatus, in particular, relates to the reverse osmosis treatment apparatus which recovers a back pressure generated when performing pressure regulation.

Background

[0002]

A desalination apparatus having a reverse osmosis membrane (hereinafter, referred to as a “RO membrane”) has a plurality of RO membrane elements 222 which are arranged in series inside a pressure vessel 224 of a cylindrical shape to use reverse osmosis pressure, as shown in FIG. 12, and each RO membrane element 222 is connected to a water collection pipe 234 which is located in the center of the RO membrane elements 222. Feedwater is supplied from one side of the desalination apparatus by a high pressure pump, and the inside of the pressure vessel 224 is pressurized in accordance with an open degree of a valve provided on the side of concentrated water. When the applied pressure exceeds the osmotic pressure of the feedwater, desalinated water (permeated water) flows into the central water collection pipe 234 through the RO membranes.

[0003]

The feedwater supplied into the pressure vessel 224 has higher salt concentration as the feedwater moves toward the concentrated water side from the feedwater side, so that the pressure applied to the pressure vessel 224 can be eventually determined by a salt concentration, an amount of the permeated water, and a flow rate of the feedwater on the membrane surface in the final stage. Therefore, the amount of the permeated water increases on the feedwater side in the pressure vessel 224, because the pressure more than necessary is applied thereto. For example, FIG. 13 shows a relationship between “element position” of the RO membrane and “relative flux”, when seven RO membrane elements 222 are arranged in series. As shown in FIG. 13, the permeated water volume decreases as the element position moves from the feedwater side to the concentrated water side. This is because the salt concentration of an untreated water increases as the element position moves from the feedwater side to the

concentrated water side, and a pressure higher than the pressure on the feedwater side is required on the concentrated water side. However, the pressure applied on the feedwater side is the same with that on the concentrated water side, so that more permeated water can be produced on the feedwater side than on the concentrated water side. Since the amount of the permeated water is not uniform in the pressure vessel 224 as shown in FIG. 13, a required power is increased and the RO membrane elements on the feedwater side is contaminated.

[0004]

To solve such a problem, for example, a seawater desalination apparatus which includes a plug for blocking the water collection pipe on a connection portion of the RO membrane element in the middle of the pressure vessel, and permeated water lines through which the permeated water separated back and forth by the plug is respectively discharged to the outside of the pressure vessel, is described in Japanese Patent Application Publication No. 2010-179264. It is further described that the seawater desalination apparatus has an energy recovery apparatus which regulates an amount of front-side permeated water separated by the plug in the pressure vessel to recover the back pressure.

[0005] [INTENTIONALLY LEFT BLANK]

[0006]

However, the seawater desalination apparatus described in Japanese Patent Application Publication No. 2010-179264 has not been able to take full advantage of the back pressure of the front-side permeated water in the pressure vessel, because a flow control valve is provided between the energy recovery apparatus and the pressure vessel having the reverse osmosis membrane.

[0007]

It is the object of the present invention to substantially overcome or at least ameliorate one or more of the above disadvantages.

Summary

[0008]

A first aspect of the present invention provides a reverse osmosis treatment apparatus, comprising a first pressure vessel for a primary treatment of untreated water, and a second pressure vessel for a secondary treatment of the water treated by the primary treatment, wherein a plurality of reverse osmosis membrane elements having a reverse osmosis membrane are arranged in series along a water collection pipe through which permeated water flows, in the first pressure vessel and the second pressure vessel, wherein the first pressure vessel comprises an untreated water inlet pipe which supplies the untreated water on one end thereof, a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof, a first outlet pipe which discharges permeated water, and a permeated water flow control valve which is connected to the first outlet pipe and regulates a pressure in the first pressure vessel, wherein the number of the reverse osmosis membrane elements in the first pressure vessel is two to three, and less than the number of the reverse osmosis membrane elements in the second pressure vessel, wherein the second pressure vessel comprises a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof, a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and a second outlet pipe which discharges the permeated water, and wherein an energy recovery apparatus is provided between the first outlet pipe and the permeated water flow control valve.

[0009]

In an embodiment, the energy recovery apparatus is provided between the first outlet pipe and the permeated water flow control valve so that a back pressure inside the first pressure vessel can be regulated by the permeated water flow control valve, and the back pressure can be recovered by using the energy recovery apparatus. It is possible to save power of the reverse osmosis treatment apparatus by using the energy of the back pressure as an operation power thereof.

[0010]

The reverse osmosis treatment apparatus according to another embodiment includes the energy recovery apparatus which is preferably a PX-type energy recovery apparatus or a DWEER-type energy recovery apparatus.

[0011]

The reverse osmosis treatment apparatus according to another embodiment can use the energy as a pressure for supplying a liquid therein by using the PX-type energy recovery apparatus or the DWEER-type energy recovery apparatus.

[0012]

The reverse osmosis treatment apparatus according to another embodiment includes the energy recovery apparatus which is preferably a turbocharger-type energy recovery apparatus.

[0013]

The reverse osmosis treatment apparatus according to another embodiment can use the energy as a pressure for supplying a liquid therein by using the turbocharger-type energy recovery apparatus. In addition, the turbocharger-type energy recovery apparatus can be used for a wide range of liquids, because the liquids are not required to be in contact with each other when the pressure is transmitted.

[0014]

The reverse osmosis treatment apparatus according to another embodiment includes the energy recovery apparatus which is preferably a turbine generator.

[0015]

The reverse osmosis treatment apparatus according to another embodiment can use the back pressure in the first pressure vessel for the turbine generator to use a generated power for the apparatus.

[0016]

In a second aspect, the present invention provides a reverse osmosis treatment apparatus, comprising

a first pressure vessel for a primary treatment of untreated water,

a second pressure vessel for a secondary treatment of the water treated by the primary treatment, and

a third pressure vessel having reverse osmosis membrane elements which are capable of reverse osmosis treatment at low pressure, wherein

a reverse osmosis membrane element having a reverse osmosis membrane or the plurality of reverse osmosis membrane elements are arranged in series along a water collection

pipe in the first pressure vessel and the second pressure vessel, wherein

the first pressure vessel comprises

an untreated water inlet pipe which supplies the untreated water on one end thereof,

a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof,

a first outlet pipe which discharges permeated water, and

a permeated water flow control valve which is connected to the first outlet pipe and regulates a pressure in the first pressure vessel, wherein

the second pressure vessel comprises

a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof,

a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and

a second outlet pipe which discharges the permeated water, wherein

an energy recovery apparatus is provided between the first outlet pipe and the permeated water flow control valve, wherein

the energy recovery apparatus converts a back pressure of the permeated water which is discharged from the first pressure vessel, to the pressure applied to the permeated water which is discharged from the second pressure vessel, and wherein

the permeated water having an increased pressure from the second pressure vessel is treated in the third pressure vessel.

[0017]

In an embodiment, the energy recovery apparatus converts the back pressure from the first pressure vessel to the pressure applied to the permeated water from the second pressure vessel. The permeated water from the second vessel is not sufficiently treated in some cases, because the water which is supplied to the second pressure vessel is concentrated water which has been treated by the first treatment. In this case, the reverse osmosis treatment can be further performed with low pressure, because the water to be treated is the permeated water which has already been treated. Therefore, the permeated water from the second vessel can be used as the pressure to be sent to the third vessel. Even if the liquids to exchange the pressures have contact with each other, the difference between the qualities of the liquids is so small and the contact time between the liquids is so short that the qualities of the liquids are not particularly affected.

[0018]

The reverse osmosis treatment apparatus according to another embodiment includes a high pressure pump which supplies the untreated water to the first pressure vessel, wherein an energy which is recovered by the turbocharger-type energy recovery apparatus is preferably used as a supply means which supplies an untreated liquid to the high pressure pump.

[0019]

The reverse osmosis treatment apparatus according to another embodiment uses the back pressure from the first pressure vessel as the supply means which supplies the untreated liquid to the high pressure pump. The untreated liquid can be supplied to the high pressure pump with low pressure by using the back pressure from the first pressure vessel.

[0020]

The reverse osmosis treatment apparatus according to another embodiment includes a pretreatment system which performs a pretreatment for the untreated water which is supplied to the first pressure vessel, wherein the energy which is recovered by the turbocharger-type energy recovery apparatus is preferably used as a supply means which supplies the untreated liquid to the pretreatment system.

[0021]

The reverse osmosis treatment apparatus according to another embodiment uses the back pressure from the first pressure vessel as a supply means which supplies the untreated liquid to the pretreatment system. The untreated liquid can be supplied to the pretreatment system with low pressure by using the back pressure from the first pressure vessel.

[0021a]

In a third aspect, the present invention provides a reverse osmosis treatment method by using a reverse osmosis treatment apparatus, comprising

a first pressure vessel for a primary treatment of untreated water, and

a second pressure vessel for a secondary treatment of the water treated by the primary treatment, wherein

a reverse osmosis membrane element having a reverse osmosis membrane or the plurality of reverse osmosis membrane elements are arranged in series along a water collection pipe in the first pressure vessel and the second pressure vessel, wherein

the first pressure vessel comprises

an untreated water inlet pipe which supplies the untreated water on one end thereof,

a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof,

a first outlet pipe which discharges permeated water, and

a permeated water flow control valve which is connected to the first outlet pipe and regulates a pressure in the first pressure vessel, wherein

the second pressure vessel comprises

a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof,

a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and

a second outlet pipe which discharges the permeated water, wherein

an energy recovery apparatus of a turbo charger type is provided between the first outlet pipe and the permeated water flow control valve, and wherein

the energy recovered by the energy recovery apparatus of the turbo charger type is used in the following order:

(1) a supply means that supplies an untreated liquid to a high pressure pump which

supplies the untreated water to the first pressure vessel;

(2) a supply means that supplies the untreated liquid to a pretreatment system which performs a pretreatment for the untreated water supplied to the first pressure vessel; and

a supply means that supplies the water treated by the first treatment in the first pressure vessel to the second pressure vessel.

[0021a]

In a fourth aspect, the present invention provides a reverse osmosis treatment apparatus, comprising

a first pressure vessel for a primary treatment of untreated water, and

a second pressure vessel for a secondary treatment of the water treated by the primary treatment, wherein

a plurality of reverse osmosis membrane elements having a reverse osmosis membrane are arranged in series along a water collection pipe through which permeated water flows, in the first pressure vessel and the second pressure vessel, wherein

the first pressure vessel comprises

an untreated water inlet pipe which supplies the untreated water on one end thereof,

a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof, and

a first outlet pipe which discharges permeated water, wherein

the number of the reverse osmosis membrane elements in the first pressure vessel is two to three, and less than the number of the reverse osmosis membrane elements in the second pressure vessel, wherein

the second pressure vessel comprises

a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof,

a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and

a second outlet pipe which discharges the permeated water, and wherein an energy recovery apparatus is provided in the first outlet pipe.

[0022]

According to at least a preferred embodiment, the reverse osmosis treatment apparatus has the first pressure vessel and the second pressure vessel separately, respectively used for the primary treatment of the untreated water and the secondary treatment of the water treated by the primary treatment, so that a total amount of the permeated water by the reverse osmosis treatment apparatus can be increased. In addition, the reverse osmosis treatment apparatus can use the energy effectively by recovering the back pressure by the energy recovery system, wherein the back pressure is generated by decreasing the amount of the permeated water in the first vessel.

Brief Description of Drawings

[0022b]

Preferred embodiments of the invention will be described hereinafter by way of examples only, with reference to the accompanying drawings:

[0023]

FIG. 1 is a block diagram of a desalination system which is provided with a reverse osmosis treatment apparatus according to an embodiment of the present invention.

FIG. 2 is a perspective view showing a configuration of an element of the reverse osmosis treatment apparatus according to the embodiment of the present invention.

FIG. 3 is a front view of the element in a state before the RO membranes of the element shown in FIG. 2 are wound around.

5 FIG. 4 is a front view of the element shown in FIG. 2.

FIG. 5 is a cross-sectional view showing a schematic configuration of the reverse osmosis treatment apparatus according to the embodiment of the present invention.

10 FIG. 6 is a graph showing a relationship between a "relative flux" of permeated water and an "element position" of the RO membrane element of the reverse osmosis treatment apparatus according to the embodiment of the present invention.

FIG. 7 is a cross-sectional view showing a schematic configuration of the reverse osmosis treatment apparatus according to another embodiment of the present invention.

FIG. 8 is a schematic diagram of the reverse osmosis treatment apparatus including a PX/DWEER-type energy recovery apparatus.

15 FIG. 9 is a schematic diagram of the reverse osmosis treatment apparatus including a turbocharger-type energy recovery apparatus.

FIG. 10 is a diagram illustrating an energy exchange destination used by the turbocharger-type energy recovery apparatus.

20 FIG. 11 is a schematic diagram of the reverse osmosis treatment apparatus including a turbine generator.

FIG. 12 is a cross-sectional view showing a schematic configuration of a conventional reverse osmosis treatment apparatus.

25 FIG. 13 is a graph showing a relationship between a "relative flux" of permeated water and an "element position" of the RO membrane element of the conventional reverse osmosis treatment apparatus.

{Description of Embodiments}

{0024}

Hereinafter, preferred embodiments of the present invention will be explained with reference to the accompanying drawings. The present invention will be explained 5 with reference to the preferred embodiments below, however, the embodiments can be modified by many methods without departing from the scope of the present invention, and embodiments other than the present embodiment can be utilized. Therefore, all modifications in the scope of the present invention are included in claims.

{0025}

10 FIG. 1 is a block diagram of a desalination system 20 which is assembled with a reverse osmosis treatment apparatus 10 according to an embodiment of the present invention. It should be noted that the reverse osmosis treatment apparatus according to the present invention can be used for the desalination system which is utilized for wastewater reuse, pure water production, brine desalination, and seawater desalination, for 15 example.

{0026}

The desalination system 20 shown in FIG. 1 is configured with the reverse osmosis treatment apparatus 10, a high pressure pump 14, and a tank 12 which stores an untreated water. The untreated water in the tank 12 is supplied to the reverse osmosis 20 treatment apparatus 10 with high pressure by the high pressure pump 14, and is treated (desalinated) with reverse osmosis by respective RO membranes (treatment membranes) of the reverse osmosis treatment apparatus 10, so that the untreated water can be separated into permeated water (separated water) 16 and concentrated water (untreated water) 18 which is concentrated with salt. The permeated water 16 obtained in this manner is 25 discharged to the outside of the reverse osmosis treatment apparatus 10 through one outlet

pipe, and the concentrated water 18 is also discharged to the outside of the reverse osmosis treatment apparatus 10 through the other outlet pipe which is different from the outlet pipe through which the permeated water is discharged. The pressure in the reverse osmosis treatment apparatus 10 can be raised to a high pressure by the high pressure pump 14. In 5 addition, a valve is provided on the outlet side of the reverse osmosis treatment apparatus 10, so that the pressure in the reverse osmosis treatment apparatus 10 can be regulated by the opening degree of the valve.

{0027}

The untreated water in the tank 12 can be used as a raw water, but the water which 10 has been treated to remove turbid components and the like contained in the raw water by a pretreatment is preferably used as the untreated water. As the pretreatment, there are treatments such as use of filters, and sterilizing microorganisms as well as removing precipitated particles in the raw water by introducing the raw water to a sedimentation tank and adding fungicides such as chlorine. The untreated water which has been treated to 15 remove by filtration the turbid components aggregated by adding aggregating agent such as iron chlorides to the raw water, can be also used.

{0028}

The reverse osmosis treatment apparatus 10 is configured with a single unit which includes a first module 84 and a second module 86 shown in FIG. 5, or is configured with 20 the plurality of single units connected in parallel with one another. The first module 84 and the second module 86 are assembled by filling up an element 22 shown in FIG. 2, respectively, into a cylindrical first vessel 80 and a cylindrical second vessel 82 shown in FIG. 5, or by filling up the plurality of elements 22 which are connected in series, respectively, into the cylindrical first vessel 80 and the cylindrical second vessel 82 shown 25 in FIG. 5.

{0029}

As shown in FIG. 2, the element 22 is configured by arranging a membrane unit 32 including RO membranes 28 and an outlet pipe 30 around a water collection pipe 34. The membrane unit 32 is configured by connecting four bag-body shaped RO membranes 28 radially to the outer periphery of the water collection pipe 34 as shown in FIG. 3, and further by winding the RO membranes 28 spirally around the water collection pipe 34 as shown in FIG. 4. The bag-body shaped RO membrane 28 has an open end to be connected to the water collection pipe 34 so that the open end can be in communication with through holes 36 of the water collection pipe 34 shown in FIG. 3. The untreated water flows on the outer surface of the RO membranes 28, and is desalinated by being permeated through the RO membranes 28. The permeated water after desalination through the RO membranes 28 is collected in the water collection pipe 34 from inside the RO membranes 28 through the opening of the RO membranes 28 and the through holes 36 of the water collection pipe 34, and is discharged from the element 22 through the water collection pipe 34 and the outlet pipe 30. Reference numerals 38 in FIG. 3 denote mesh spacers which are arranged inside the RO membranes 28. Inner spaces of the RO membranes 28 are kept not to be collapsed by the mesh spacers 38, even if the RO membranes 28 are spirally wound around the water collection pipe 34. Further, reference numerals 40 denote mesh spacers which are arranged between the adjacent RO membranes 28. The mesh spacers 40 are also connected radially to the periphery of the water collection pipe 34 in the same manner as the RO membranes 28.

{0030}

FIG. 5 is a cross-sectional view of the reverse osmosis treatment apparatus 10 according to the embodiment of the present invention. In the present embodiment, the first module 84 for the first treatment has two elements 22 connected in series in the first

vessel 80, and the second module 86 for the second treatment has five elements 22 connected in series in the second vessel 82. The first vessel 80 has one opening through which the untreated water is introduced therein on one end portion thereof, and has the other opening through which a first concentrated water (water treated by the first treatment) which remains untreated in the first vessel 80 is discharged therefrom on the other end portion thereof. The second vessel 82 has also one opening through which the untreated water is introduced therein on one end portion thereof, and has the other opening through which a second concentrated water (water treated by the second treatment) which remains untreated in the second vessel 82 is discharged therefrom on the other end portion thereof. The opening on the introduction side of the first vessel 80 is subjected to a predetermined operation pressure by the high pressure pump 14. In addition, the first vessel 80 and the second vessel 82 can be made of an FRP or the like, so that they can withstand a high pressure (not less than 5 MPa). In addition, the first vessel 80 and the second vessel 82 are preferably connected with each other by a pipe which is made of material capable of withstanding the high pressure.

{0031}

As shown in FIG. 5, the first vessel 80 has an untreated water inlet pipe 56 through which the untreated water is introduced in the first vessel 80, and has a first concentrated water outlet pipe 62 through which the first concentrated water remaining as the untreated water which was not permeated into the water collection pipe 34 is discharged. The permeated water collected in the water collection pipe 34 through the RO membranes 28 is discharged from the first vessel 80 through a first outlet pipe 58 which is provided on the side of the first concentrated water outlet pipe 62. An energy recovery apparatus 150, a measuring instrument 66, and a permeated water flow control valve 64 are provided on the outlet of the first outlet pipe 58. The pressure in the first vessel 80 is adjusted to regulate

an amount of the permeated water from the vessel 80 by applying a back pressure which is regulated by the permeated water flow control valve 64. The operation power of the reverse osmosis treatment apparatus 10 can be reduced by recovering the back pressure by the energy recovery apparatus 150 and by using the back pressure therefor.

5 {0032}

The second vessel 82 has a primary treated water inlet pipe 68 through which the first concentrated water discharged from the first vessel 80 is introduced in the second vessel 82, and has a second concentrated water outlet pipe 70 through which the second concentrated water remaining as the untreated water which was not permeated into the 10 water collection pipe 34 is discharged. A concentrated water outlet valve 74 which regulates the pressure in the second vessel 82 is provided on the outlet of the second concentrated water outlet pipe 70. The permeated water collected in the water collection pipe 34 through the RO membranes 28 is discharged from the second vessel 82 through the second outlet pipe 72 which is provided on the side of the second concentrated water outlet 15 pipe 70. A measuring instrument 76 is provided on the outlet of the second outlet pipe 72.

{0033}

According to the reverse osmosis treatment apparatus 10, the untreated water supplied from the tank 12 in FIG. 1 through the untreated water inlet pipe 56 is introduced 20 sequentially into elements 22 through a flow passage 57, and is collected in the water collection pipe 34 after being permeated through the RO membranes 28 of the elements 22. In the present embodiment, the reverse osmosis treatment is performed by two steps of the first vessel 80 and the second vessel 82, and the permeated water which is treated in the first vessel 80 is discharged from the first vessel 80 through the first outlet pipe 58. The 25 first concentrated water which remains not permeated into the water collection pipe 34 is

discharged from the first concentrated outlet pipe 62, and is supplied to the second vessel 82 through the primary treated water inlet pipe 68 to be introduced sequentially into elements 22 through a flow passage 69, and is collected in the water collection pipe 34 after being permeated by the RO membranes 28. The permeated water treated in the 5 second vessel 82 is discharged from the second vessel 82 through the second outlet pipe 72. The second concentrated water which remains not permeated into the water collection pipe 34 is discharged from the second concentrated water outlet pipe 70.

{0034}

FIG. 6 is a graph showing a relationship between a “relative flux” of permeated 10 water and an “element position” of the RO membrane element of the reverse osmosis treatment apparatus according to the embodiment of the present invention. Here, the data of the present invention are obtained by experiments using two elements (“element positions” No. 1 and No. 2 on the horizontal axis in FIG. 6) installed in the first vessel and five elements (“element positions” No. 3 to No. 7 on the horizontal axis in FIG. 6) installed 15 in the second vessel. As for conventional reverse osmosis treatment apparatuses, much permeated water is produced from the feedwater side, and the amount of the permeated water decreases as the element position moves to the concentrated water side. This is because the pressure applied to the vessel is determined by the pressure applied to the element of the final stage. On the other hand, as for the present invention, the pressure in 20 the first vessel 80 can be regulated by the permeated water flow control valve 64, so that the “relative flux” can be set to the desired value as shown in FIG. 6, and the amount of the permeated water can be decreased. The salt concentration of the first concentrated water can be reduced by decreasing the amount of the permeated water in the first vessel 80, so 25 that the amount of the permeated water in the second vessel 82 can be increased as shown by the “element positions” No. 3 to No. 7 in FIG. 6. Therefore, the ununiformity of the

amount of the permeated water from each RO membrane element can be eliminated, and thereby the amount of the permeated water from the reverse osmosis treatment apparatus can be increased as a whole.

{0035}

5 The flow rate of the permeated water in the first vessel 80 can be regulated by adjusting the opening degree of the permeated water flow control valve 64 in accordance with the value measured by the measuring instrument 66, and the flow rate of the permeated water in the second vessel 82 can be regulated by adjusting the opening degree of the concentrated water discharge valve 74 in accordance with the value measured by the 10 measuring instrument 76. The flow rate of the permeated water can be also controlled by providing a pressure gauge between the high pressure pump 14 and the reverse osmosis treatment apparatus 10 to adjust the pressure pump 14 in accordance with the value of the pressure gauge. As measuring instruments 66, 76, a flow rate meter, the pressure gauge, and a conductivity meter can be used. Since the conductivity is varied depending on the 15 salt concentration, the amount of the permeated water can be confirmed by measuring the conductivity to monitor the salt concentration. By adjusting the flow rate of the permeated water in the first vessel 80 by the opening degree of the permeated water flow control valve 64, the pressure of 1 to 2 MPa is applied to inside the first vessel 80.

{0036}

20 Although two elements 22 are installed in the first vessel 80 and five elements are installed in the second vessel 82 in FIG. 5, the number of the elements is not limited to this. However, the number of the elements 22 in the first vessel 80 is preferably equal to or less than the number of the elements 22 in the second vessel 82. The permeated water can be produced effectively from the reverse osmosis treatment apparatus as a whole by changing 25 the elements 22 in the first vessel, because the elements 22 on the feedwater side are easily

contaminated. The elements 22 in the first vessel 80 can be replaced easily by reducing the number of the elements 22 in the first vessel 80. Taking into consideration that the permeated water is discharged from the first vessel 80, it is preferred to use two elements 22 in the first vessel 80 according to FIG. 6, however, it is enough to use one element 22 5 from the view point of the contamination. The number of the elements 22 in the first vessel 80 is preferably 1 to 4, and more preferably 2 to 3.

{0037}

FIG. 7 is a cross-sectional view of the reverse osmosis treatment apparatus 110 according to another embodiment of the present invention. The reverse osmosis treatment apparatus 110 shown in FIG. 7 is different from the reverse osmosis treatment apparatus 10 shown in FIG. 5 in that two first vessels 80a, 80b are installed. The reverse osmosis treatment apparatus 110 shown in FIG. 7 includes end-port vessels which have outlets of the concentrated water at the end portions of the first vessels 80a, 80b and the second vessel 82 in the flow direction of the untreated water. On the other hand, FIG. 5 10 shows the side-port vessels which have the outlets of the concentrated water on the side surfaces of the vessels. The amount of the permeated water which is treated in the first vessels 80a, 80b is increased, and the amount of the first concentrated water which remains not treated in the first vessels 80a, 80b, is decreased. By supplying the first concentrated 15 water to the second vessel 82 from the plurality of first vessels 80a, 80b as shown in FIG. 7, shows the side-port vessels which have the outlets of the concentrated water on the side surfaces of the vessels. The amount of the permeated water which is treated in the first vessels 80a, 80b is increased, and the amount of the first concentrated water which remains not treated in the first vessels 80a, 80b, is decreased. By supplying the first concentrated water to the second vessel 82 from the plurality of first vessels 80a, 80b as shown in FIG. 7, the treatment is performed effectively. In the reverse osmosis treatment apparatus 110 20 shown in FIG. 7, the permeated water which is discharged from the outlet pipes 58a, 58b of the respective first vessels 80a, 80b, is mixed by the pipe 88 and discharged to the outside of the first vessels. The energy recovery apparatus 150, the measuring instrument 66, and the permeated water flow control valve 64 are provided on the pipe 88, and the amount of 25 the permeated water can be regulated by adjusting the pressure in the first vessels 80a, 80b

by the permeated water flow control valve 64.

{0038}

Next, a specific usage of the energy recovery apparatus will be explained with reference to FIGS. 8 to 11.

5 {0039}

FIG. 8 is a schematic diagram of the reverse osmosis treatment apparatus when using a PX (Pressure Exchange)-type energy recovery apparatus or a DWEER (Dual Work Energy Exchanger)-type energy recovery apparatus. As shown in FIG. 8, the energy recovery system 150 is provided between a first outlet pipe 58 (see FIG. 7) and the permeated water flow control valve 64. By providing the energy recovery system 150 between the first outlet pipe 58 and the permeated water flow control valve 64, the back pressure which is caused by regulating the flow rate by the permeated water flow control valve 64 can be recovered by the energy recovery apparatus 150. By providing the energy recovery system 150 between the permeated water flow control valve 64 and the first vessel 80, the pressure which is applied to the first vessel 80 can be recovered effectively. As the energy recovery apparatus, the PX-type energy recovery apparatus or the DWEER-type energy recovery apparatus can be used. As the PX-type energy recovery apparatus or the DWEER-type energy recovery apparatus, known ones can be used. By using the PX-type energy recovery apparatus or the DWEER-type energy recovery apparatus, the energy of about 95 % can be recovered.

20 {0040}

The PX-type energy recovery apparatus or the DWEER-type energy recovery apparatus transmits the pressure of the permeated water (referred to as "permeated water 1") which is discharged from the first vessel 80 and has the high pressure of 1 to 2 MPa, to 25 the permeated water (referred to as "permeated water 2") which is discharged from the

second vessel 82. The permeated water 2 having the exchanged high pressure is treated by a low pressure RO module 152 which can perform the reverse osmosis treatment with low pressure, so that the salt concentration of the permeated water 2 can be further reduced. The untreated water which is supplied to the second vessel 82 has high salt concentration, 5 because the untreated water has been subjected to the primary treatment in the first vessel 80. Therefore, the permeation water 2 which is discharged from the second vessel 82 has the salt concentration higher than that of the permeated water which is discharged from the first vessel 80. The permeated water 2 having the lower salt concentration can be obtained by treating the permeated water 2 which is discharged from the second vessel 82 10 by the low pressure RO module 152. By using the back pressure applied to the first vessel 80 for the pressure feed to the low pressure RO module 152, the energy can be used effectively. In addition, since the pressure of the permeated water from the first vessel 80 is varied according to the operation conditions, a booster pump 154 can be provided considering a case where the pressure cannot be sufficiently applied to the permeated water 15 2. If the back pressure from the first vessel 80 is not sufficient, the pressure of the permeated water 2 can be raised by the booster pump 154.

{0041}

The PX-type energy recovery apparatus has a plurality of cylindrical rotating bodies of revolver-shape, in which a pressure of a piston flow of the permeated water 1 20 from the first vessel 80 in one direction is transmitted to a pressure of a piston flow of the permeated water 2 from the second vessel 82 in the other direction.

{0042}

The DWEER-type energy recovery apparatus has a plurality of cylindrical pressure vessels, in which the permeated water 1 from the first vessel 80 and the permeated 25 water 2 from the second vessel 82 are divided by a partition wall in each cylinder, and

switches the flow direction alternately to transmit a pressure in one direction to a pressure in the other direction.

{0043}

Although the pressure transmission is performed between the permeated water 1 and the permeated water 2 in FIG. 8, it is not particularly limited to this if the pressure transmission can be performed between liquids. However, each of the liquids is in contact with each other in each energy recovery apparatus, the PX-type energy recovery apparatus or the DWEER-type energy recovery apparatus. If there is a difference between the salt concentrations of the used liquids (for example, the sea water and the permeated water), the concentration changes are caused when the pressure transmission is performed. Therefore, it is preferred that the difference between the salt concentrations of the liquids which exchange the pressures with each other is small, the permeated water 1 from the vessel 80 and the permeated water 2 from the vessel 82 are preferably used as shown in FIG. 8.

15 {0044}

It is also preferred that the flow ratio of the permeated water 1 from the vessel 80 and the permeated water 2 from the vessel 82 is 1 to 1, because a volume ratio of an exchange destination and an exchange origination is approximately 1 to 1 in the PX-type energy recovery apparatus and the DWEER-type energy recovery apparatus. However, 20 there are cases where either of the volumes of the exchange destination and the exchange origination increases depending on the operation conditions. When the volume of the permeated water 2 from the second vessel is larger than that of the permeated water 1 from the first vessel, the pressure can be increased by the booster pump 154, and when the volume of the permeated water 1 from the first vessel is larger than that of the permeated water 2 from the second vessel, the surplus energy can be merely discarded without any 25

problems.

{0045}

FIG. 9 shows a schematic diagram of the reverse osmosis treatment apparatus when the turbocharger-type energy recovery apparatus is used as the energy recover apparatus. The turbocharger-type energy recovery apparatus converts the back pressure from the first vessel 80 into the rotation power of the turbine, and uses the rotation energy to increase the liquid pressure of the exchange destination. It is possible to recover the energy of about 90% by using the turbocharger-type energy recovery apparatus.

{0046}

When the turbocharger-type energy recovery apparatus is used, all water in the reverse osmosis treatment apparatus can utilize the back pressure, because the liquids exchanging energies with each other are not in contact with each other.

{0047}

The pressures of liquids which are supplied on the positions shown in FIG. 10 can be boosted by utilizing the back pressures. The energy recovery apparatus 150 which is described in FIG. 10 can be provided on respective positions “160-1” to “160-6” in FIG. 10, and can supply the liquids by performing the energy exchanges. More specifically, the energy recovery apparatus 150 is provided on the respective positions as described below. The position “160-1” shows an alternative or auxiliary feed pump for the high pressure pump 14 which supplies the untreated water to the first vessels 80. The position “160-2” shows a feed pump which supplies the untreated liquid to a pretreatment system 162 which can treat the untreated liquid at low pressure, for example, by sand filtration, MF (Microfiltration) membranes, and UF (Ultrafiltration) membranes. The position “160-3” shows a feed pump which supplies waste water from a tank 164 to the feed pump on the position “160-2”, and which can be used at the pressure lower than that of the pretreatment

system 162. The position "160-4" shows a feed pump which supplies the permeated water from the second vessels 82 to the low pressure RO module 152. The position "160-5" shows an auxiliary pump which boosts the high pressure pump 14. The position "160-6" shows a pump which boosts the primary concentrated water discharged from the 5 first vessel 80 and can be used to increase the recovery rate and the amount of water production at the second vessel 82. Since the liquids utilize the back pressure from the first vessel 80 to be boosted, it is preferred that the liquids are used at the low pressure portion and used in the order of the positions described above.

{0048}

10 FIG. 11 is a schematic diagram of the reverse osmosis treatment apparatus when a turbine generator is used as the energy recovery apparatus 150. In FIG. 11, the turbine generator can generate power by utilizing the back pressure from the first vessel 80 to rotate a turbine. The operation power for the reverse osmosis treatment apparatus can be decreased by using the power generated by the turbine generator for the power of the 15 reverse osmosis treatment apparatus.

{Reference Signs List}

{0049}

10, 110: reverse osmosis treatment apparatus

12, 164: tank

20 14: high pressure pump

16: permeated water

18: concentrated water

20: desalination system

22: element (reverse osmosis membrane element)

25 28: RO membrane

30: outlet pipe

32: membrane unit

34: water collection pipe

36: through hole

5 38, 40: spacer

56: treatment water inlet pipe

57, 69: flow passage

58: first outlet pipe

62: first concentrated water outlet pipe

10 64: permeated water flow control valve

66, 76: measuring equipment

68: primary treated water inlet pipe

70: secondary concentrated water outlet pipe

72: secondary outlet pipe

15 74: concentrated water outlet valve

80: first vessel (first pressure vessel)

82: second vessel (second pressure vessel)

84: first module

86: second module

20 88: pipe

150: energy recovery apparatus

152: low pressure RO module

154: booster pump

162: pretreatment system

CLAIMS

1. A reverse osmosis treatment apparatus, comprising
a first pressure vessel for a primary treatment of untreated water, and
a second pressure vessel for a secondary treatment of the water treated by the primary treatment, wherein
a plurality of reverse osmosis membrane elements having a reverse osmosis membrane are arranged in series along a water collection pipe through which permeated water flows, in the first pressure vessel and the second pressure vessel, wherein
the first pressure vessel comprises
an untreated water inlet pipe which supplies the untreated water on one end thereof,
a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof,
a first outlet pipe which discharges permeated water, and
a permeated water flow control valve which is connected to the first outlet pipe and regulates a pressure in the first pressure vessel, wherein
the number of the reverse osmosis membrane elements in the first pressure vessel is two to three, and less than the number of the reverse osmosis membrane elements in the second pressure vessel, wherein
the second pressure vessel comprises
a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof,
a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and
a second outlet pipe which discharges the permeated water, and wherein
an energy recovery apparatus is provided between the first outlet pipe and the permeated water flow control valve.
2. The reverse osmosis treatment apparatus as set forth in claim 1, wherein the energy recovery apparatus is a PX-type energy recovery apparatus or a DWEER-type energy recovery apparatus.
3. The reverse osmosis treatment apparatus as set forth in claim 1, wherein the energy recovery apparatus is a turbocharger-type energy recovery apparatus.

4. The reverse osmosis treatment apparatus as set forth in claim 1, wherein the energy recovery apparatus is a turbine generator.
5. A reverse osmosis treatment apparatus, comprising
 - a first pressure vessel for a primary treatment of untreated water,
 - a second pressure vessel for a secondary treatment of the water treated by the primary treatment, and
 - a third pressure vessel having reverse osmosis membrane elements which are capable of reverse osmosis treatment at low pressure, wherein
 - a reverse osmosis membrane element having a reverse osmosis membrane or the plurality of reverse osmosis membrane elements are arranged in series along a water collection pipe in the first pressure vessel and the second pressure vessel, wherein
 - the first pressure vessel comprises
 - an untreated water inlet pipe which supplies the untreated water on one end thereof,
 - a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof,
 - a first outlet pipe which discharges permeated water, and
 - a permeated water flow control valve which is connected to the first outlet pipe and regulates a pressure in the first pressure vessel, wherein
 - the second pressure vessel comprises
 - a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof,
 - a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and
 - a second outlet pipe which discharges the permeated water, wherein
 - an energy recovery apparatus is provided between the first outlet pipe and the permeated water flow control valve, wherein
 - the energy recovery apparatus converts a back pressure of the permeated water which is discharged from the first pressure vessel, to the pressure applied to the permeated water which is discharged from the second pressure vessel, and wherein
 - the permeated water having an increased pressure from the second pressure vessel is treated in the third pressure vessel.

6. The reverse osmosis treatment apparatus as set forth in claim 3, further comprising a high pressure pump which supplies the untreated water to the first pressure vessel, wherein

an energy which is recovered by the turbocharger-type energy recovery apparatus is used as a supply means which supplies an untreated liquid to the high pressure pump.

7. The reverse osmosis treatment apparatus as set forth in claim 3, further comprising a pretreatment system which performs a pretreatment for the untreated water which is supplied to the first pressure vessel, wherein

the energy which is recovered by the turbocharger-type energy recovery apparatus is used as a supply means which supplies the untreated liquid to the pretreatment system.

8. A reverse osmosis treatment method by using a reverse osmosis treatment apparatus, comprising

a first pressure vessel for a primary treatment of untreated water, and

a second pressure vessel for a secondary treatment of the water treated by the primary treatment, wherein

a reverse osmosis membrane element having a reverse osmosis membrane or the plurality of reverse osmosis membrane elements are arranged in series along a water collection pipe in the first pressure vessel and the second pressure vessel, wherein

the first pressure vessel comprises

an untreated water inlet pipe which supplies the untreated water on one end thereof,

a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof,

a first outlet pipe which discharges permeated water, and

a permeated water flow control valve which is connected to the first outlet pipe and regulates a pressure in the first pressure vessel, wherein

the second pressure vessel comprises

a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof,

a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and

a second outlet pipe which discharges the permeated water, wherein

an energy recovery apparatus of a turbo charger type is provided between the first outlet

pipe and the permeated water flow control valve, and wherein

the energy recovered by the energy recovery apparatus of the turbo charger type is used in the following order:

- (1) a supply means that supplies an untreated liquid to a high pressure pump which supplies the untreated water to the first pressure vessel;
- (2) a supply means that supplies the untreated liquid to a pretreatment system which performs a pretreatment for the untreated water supplied to the first pressure vessel; and
- (3) a supply means that supplies the water treated by the first treatment in the first pressure vessel to the second pressure vessel.

9. A reverse osmosis treatment apparatus, comprising

a first pressure vessel for a primary treatment of untreated water, and

a second pressure vessel for a secondary treatment of the water treated by the primary treatment, wherein

a plurality of reverse osmosis membrane elements having a reverse osmosis membrane are arranged in series along a water collection pipe through which permeated water flows, in the first pressure vessel and the second pressure vessel, wherein

the first pressure vessel comprises

an untreated water inlet pipe which supplies the untreated water on one end thereof,

a first concentrated water outlet pipe which discharges the water treated by the primary treatment on the other end thereof, and

a first outlet pipe which discharges permeated water, wherein

the number of the reverse osmosis membrane elements in the first pressure vessel is two to three, and less than the number of the reverse osmosis membrane elements in the second pressure vessel, wherein

the second pressure vessel comprises

a primarily treated water inlet pipe which introduces the water treated by the primary treatment on one end thereof,

a second concentrated water outlet pipe which discharges the water treated by the secondary treatment on the other end thereof, and

a second outlet pipe which discharges the permeated water, and wherein an energy recovery apparatus is provided in the first outlet pipe.

Hitachi, Ltd.

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

FIG.1

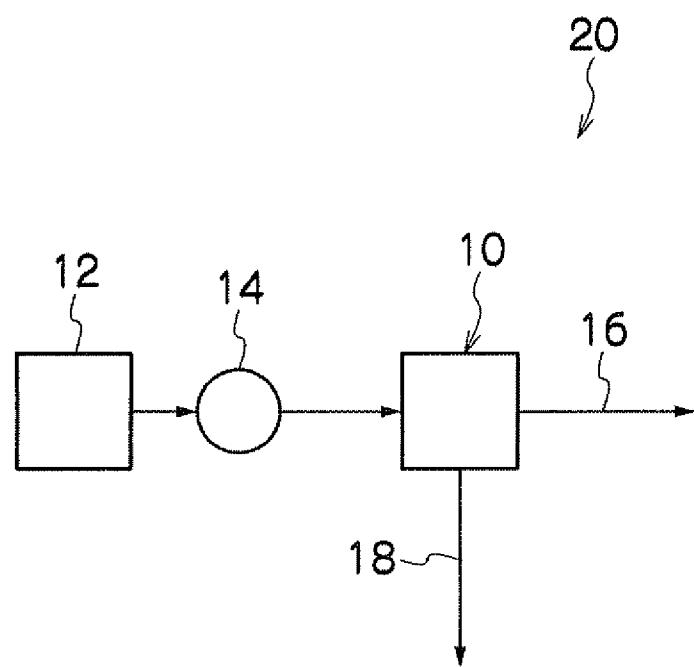


FIG.2

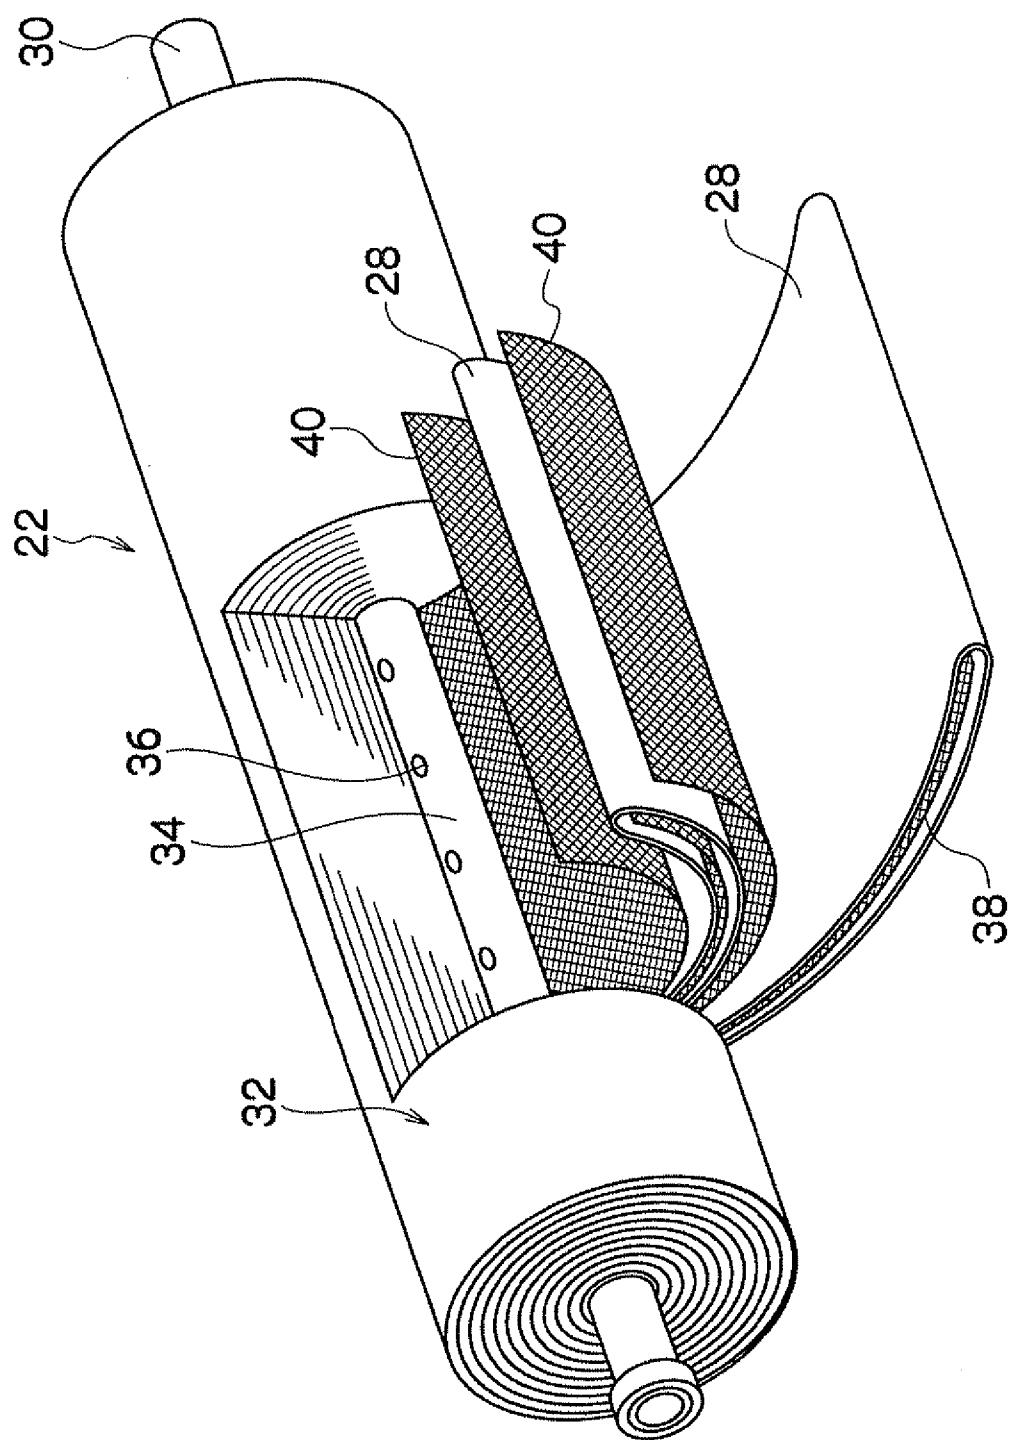


FIG.3

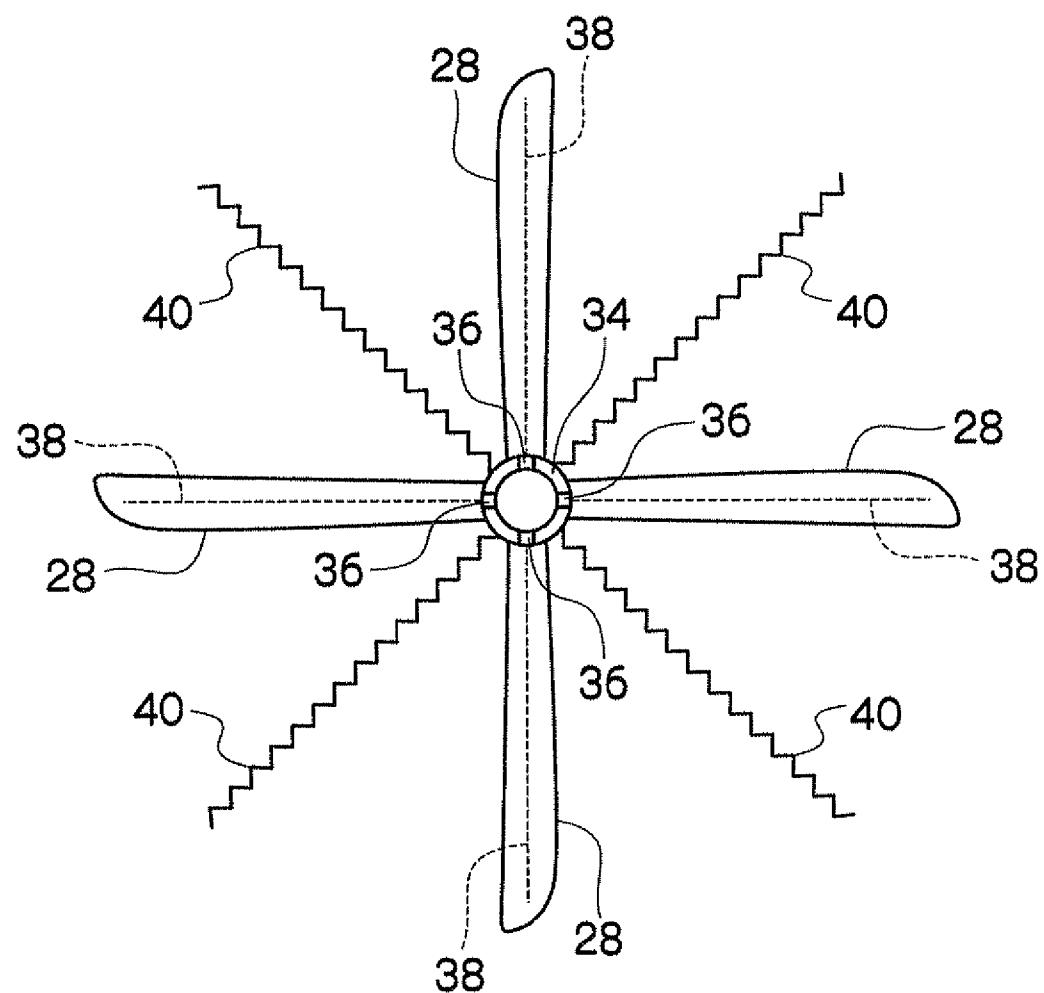


FIG.4

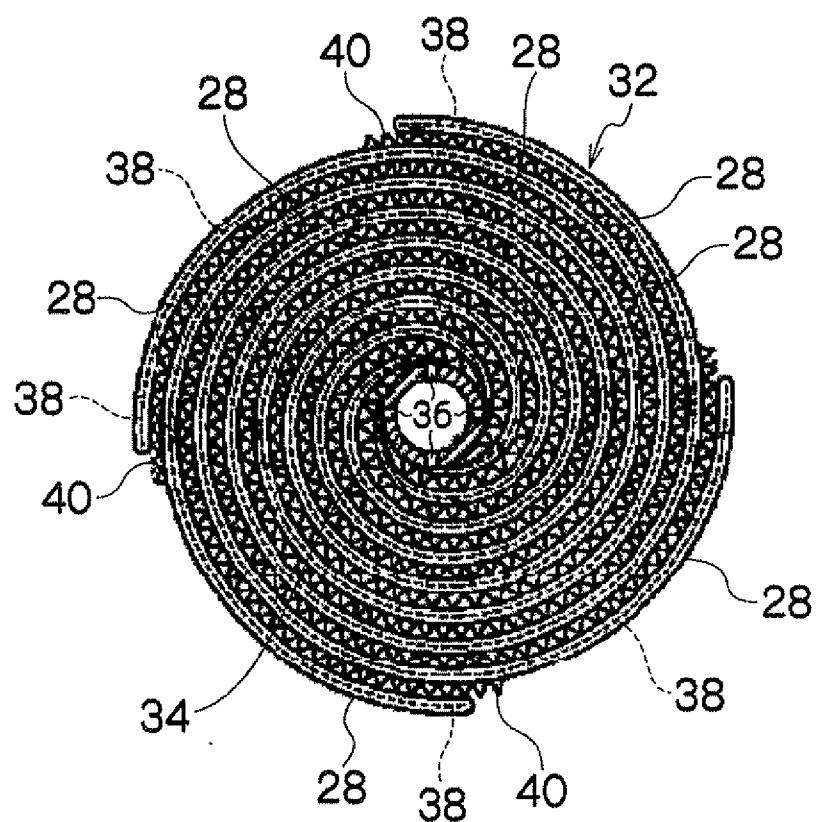


FIG.5

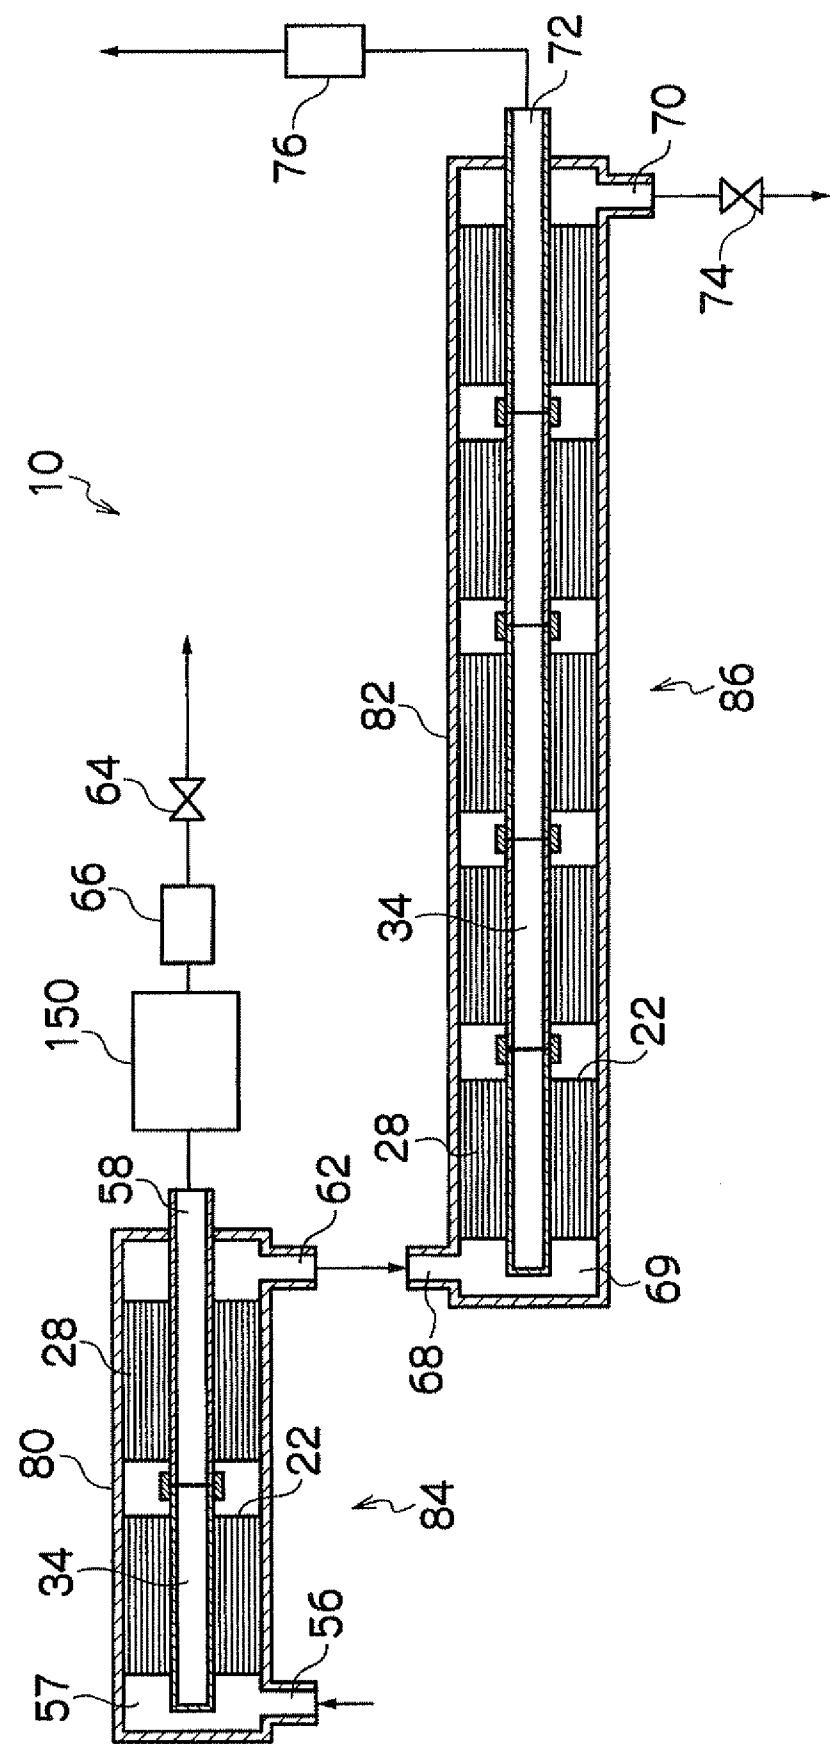


FIG.6

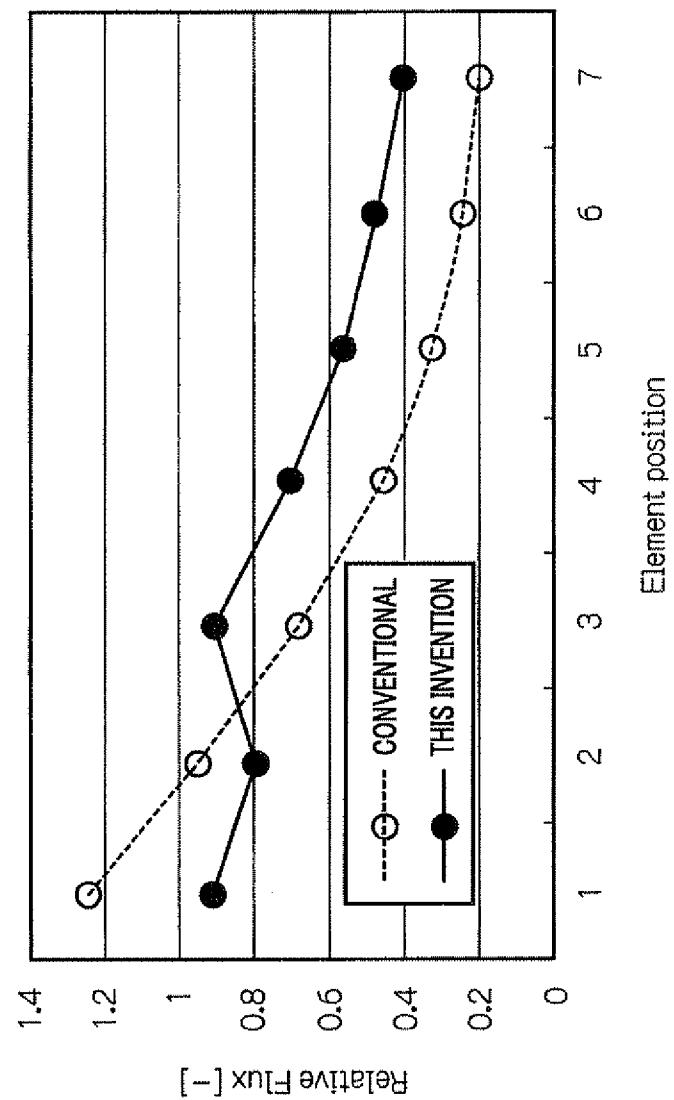


FIG.7

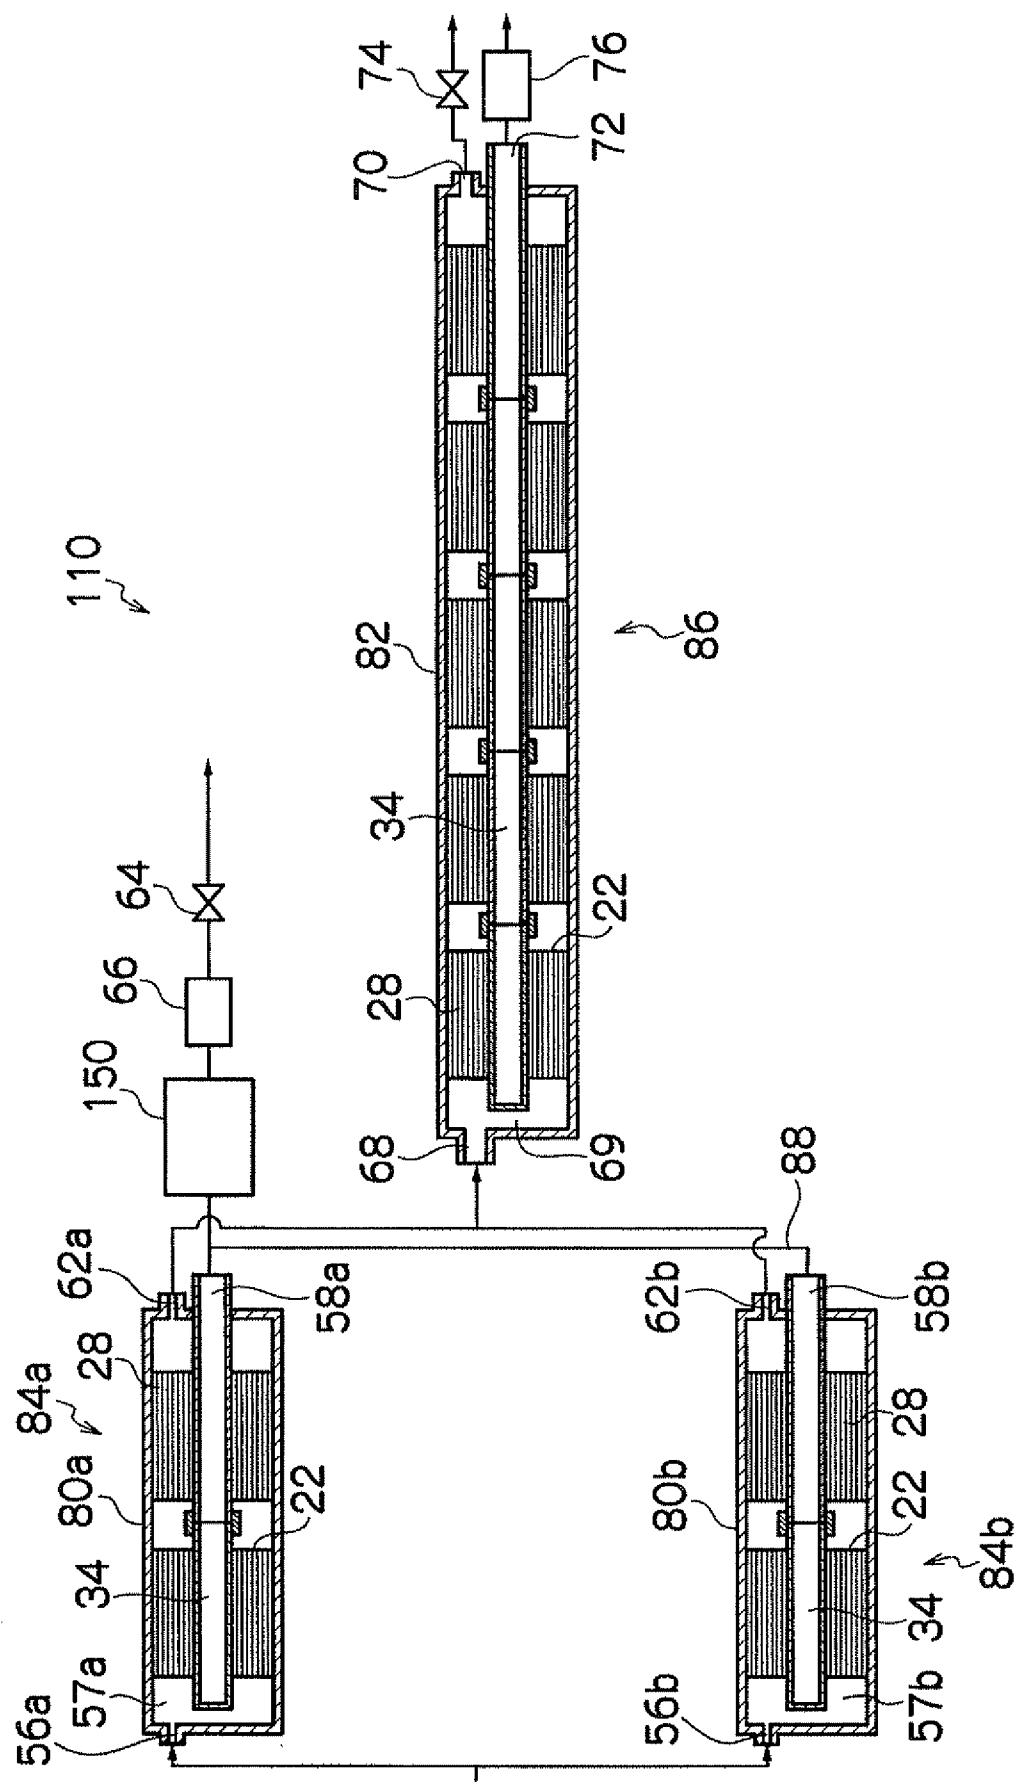


FIG.8

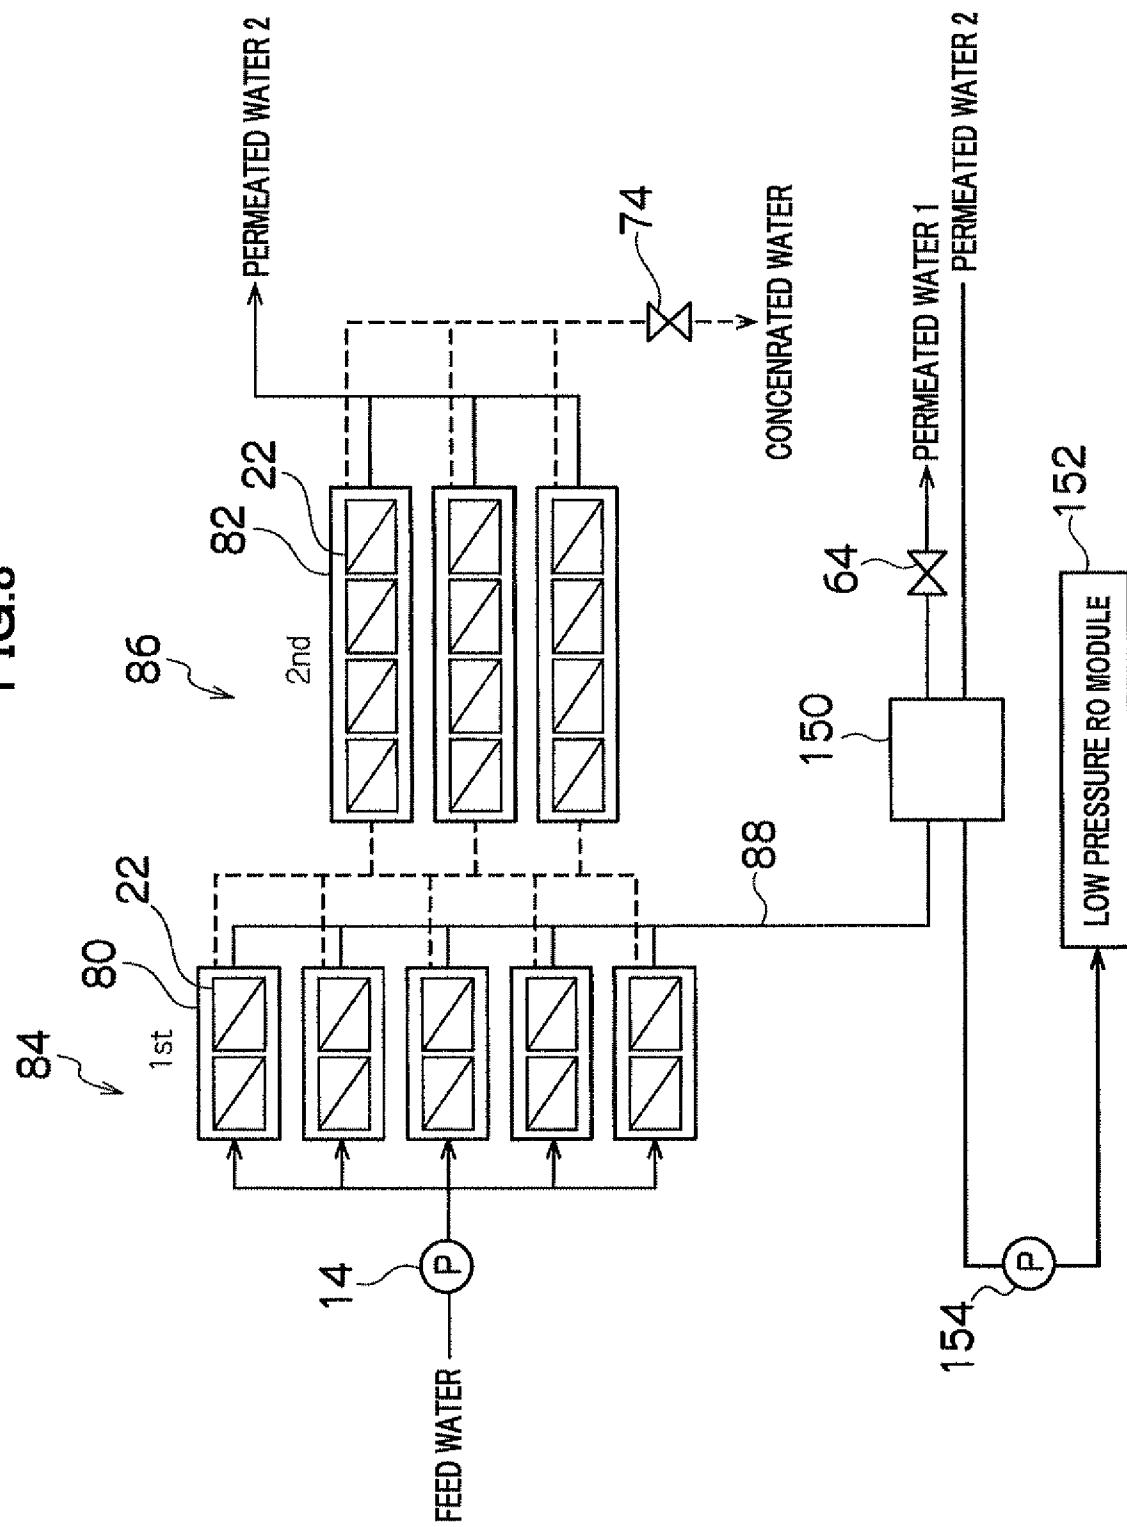


FIG.9

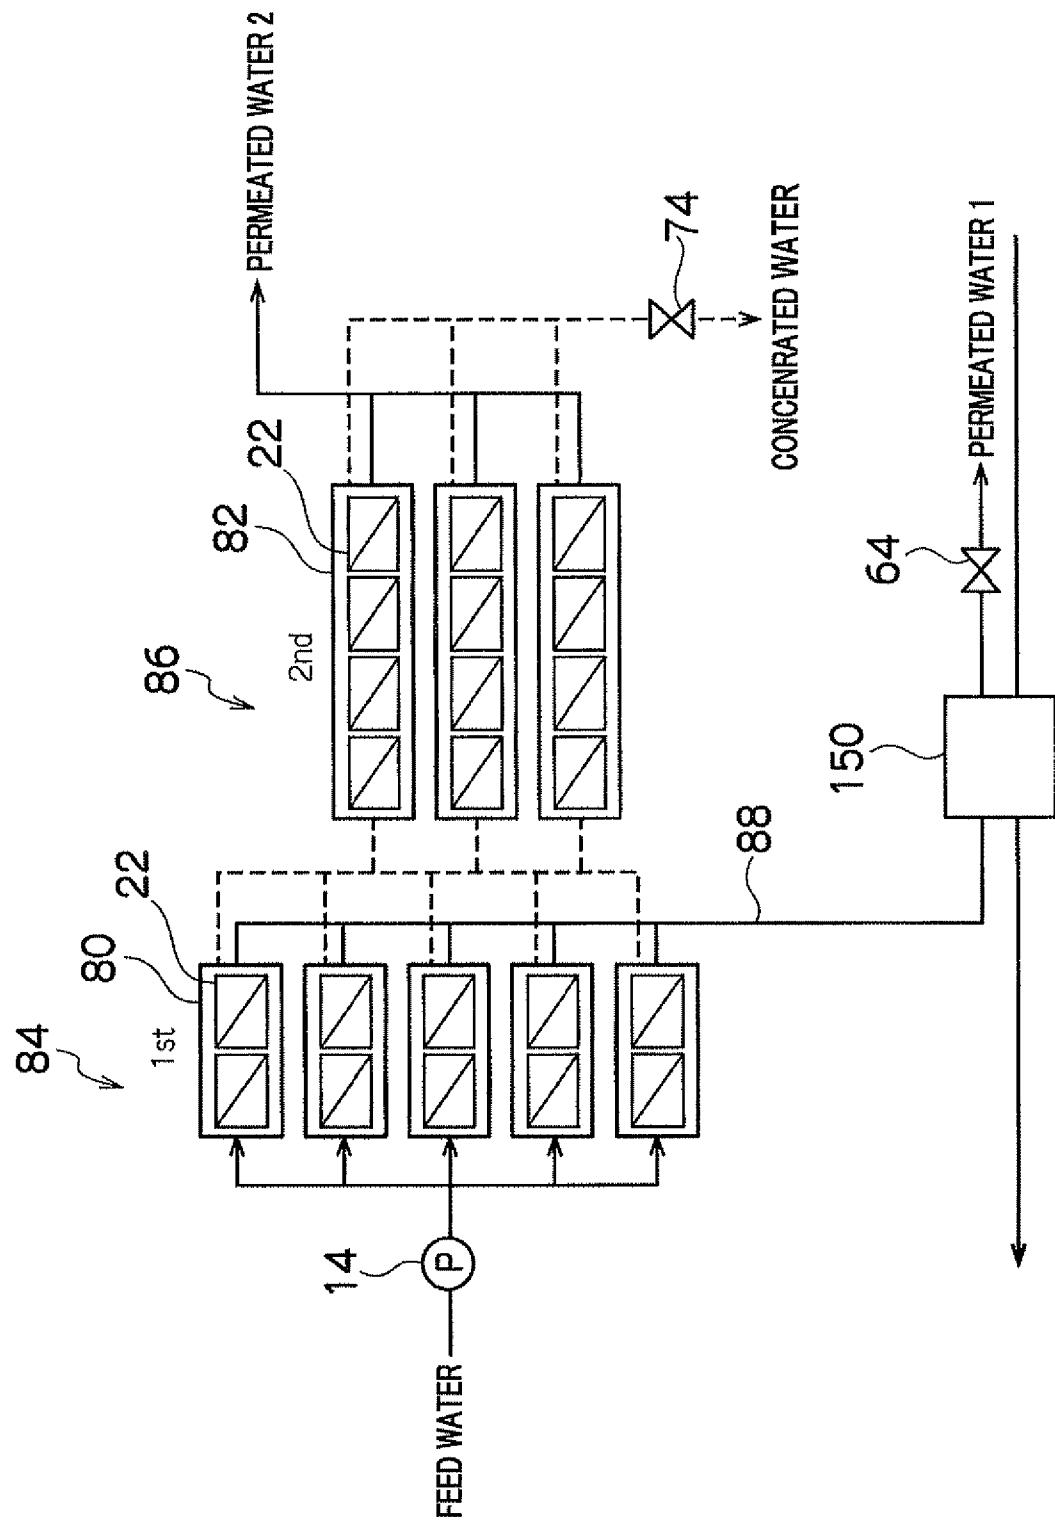


FIG.10

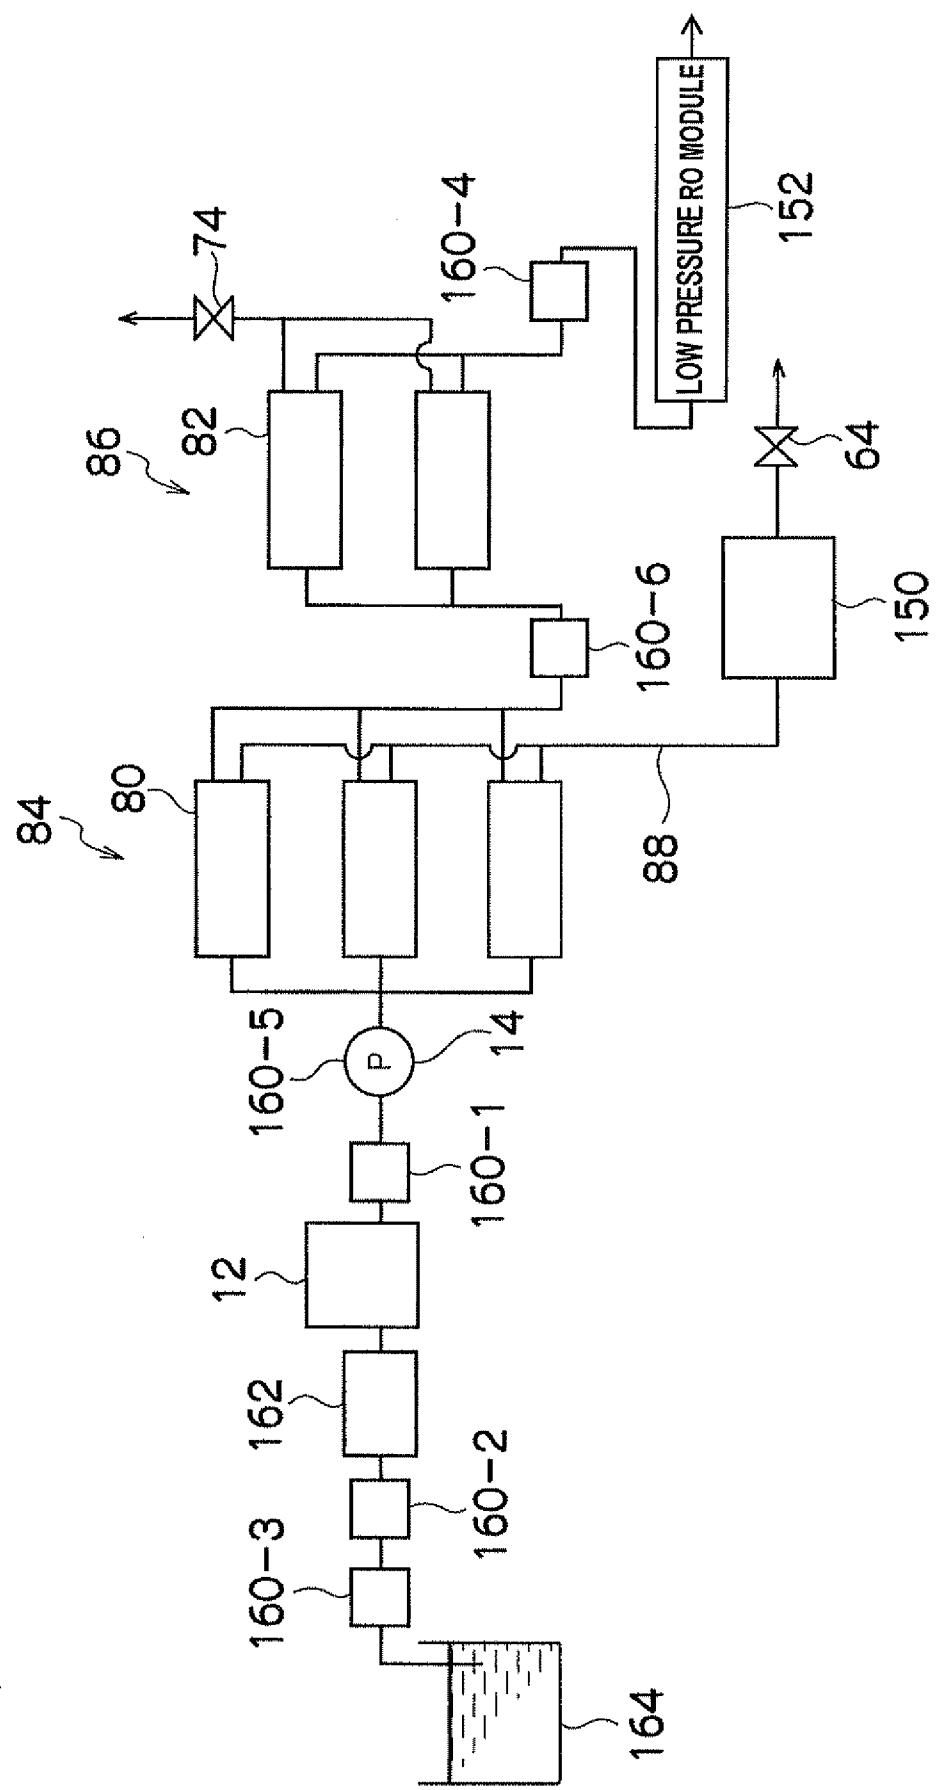


FIG.11

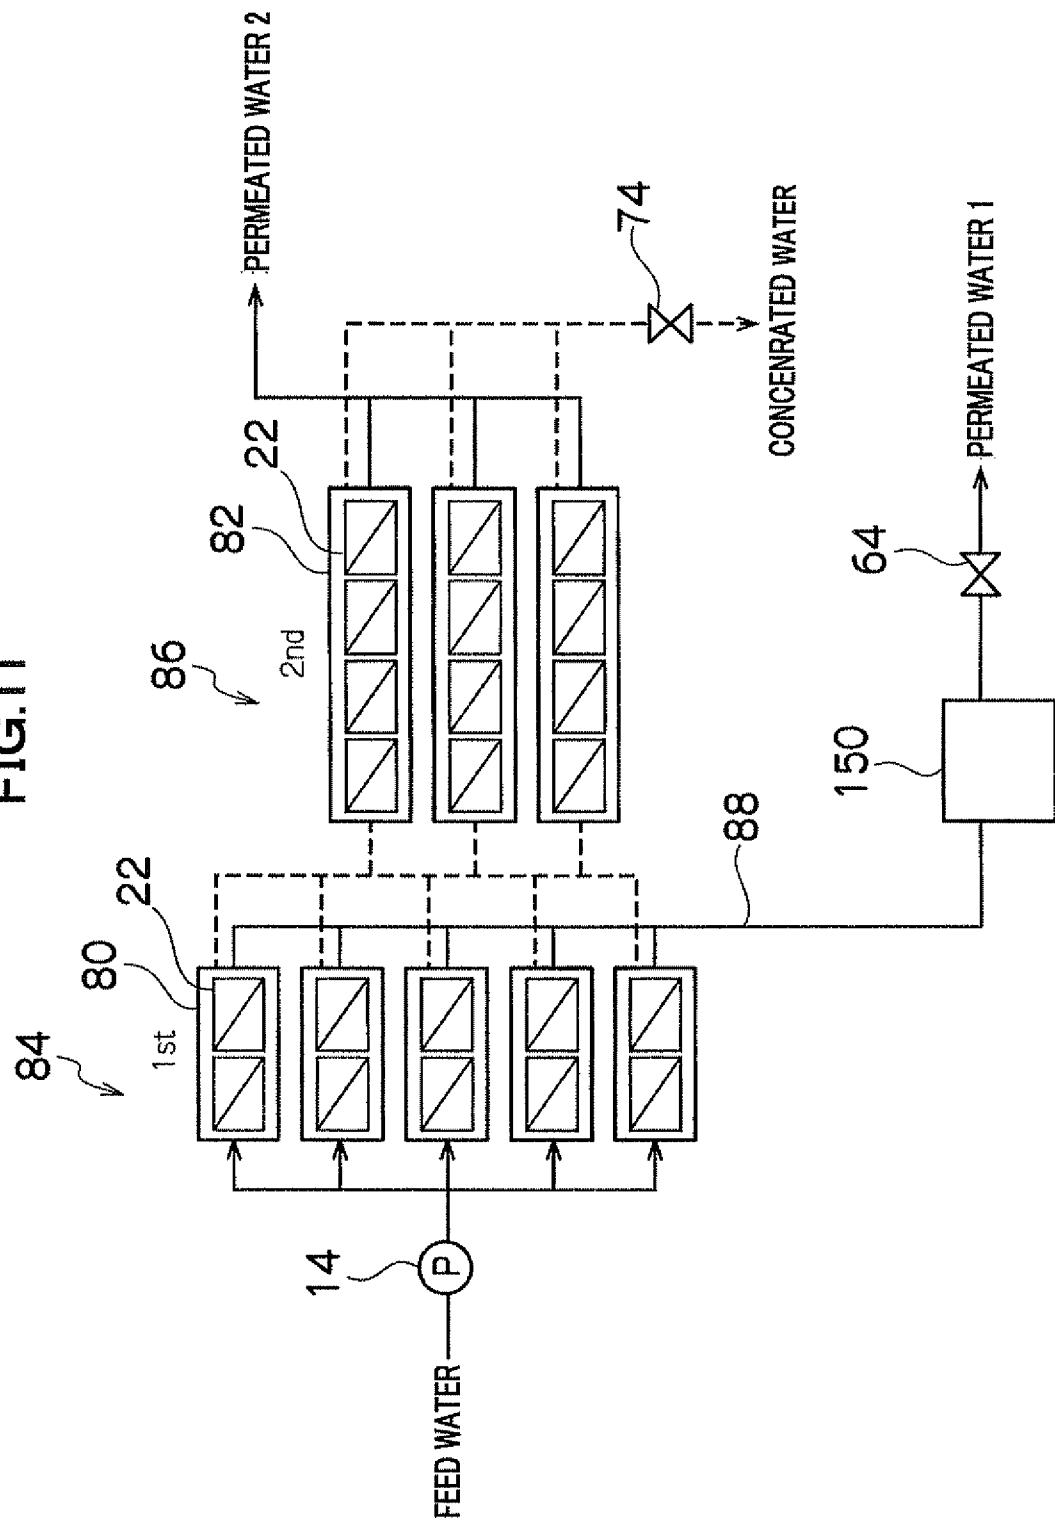


FIG.12

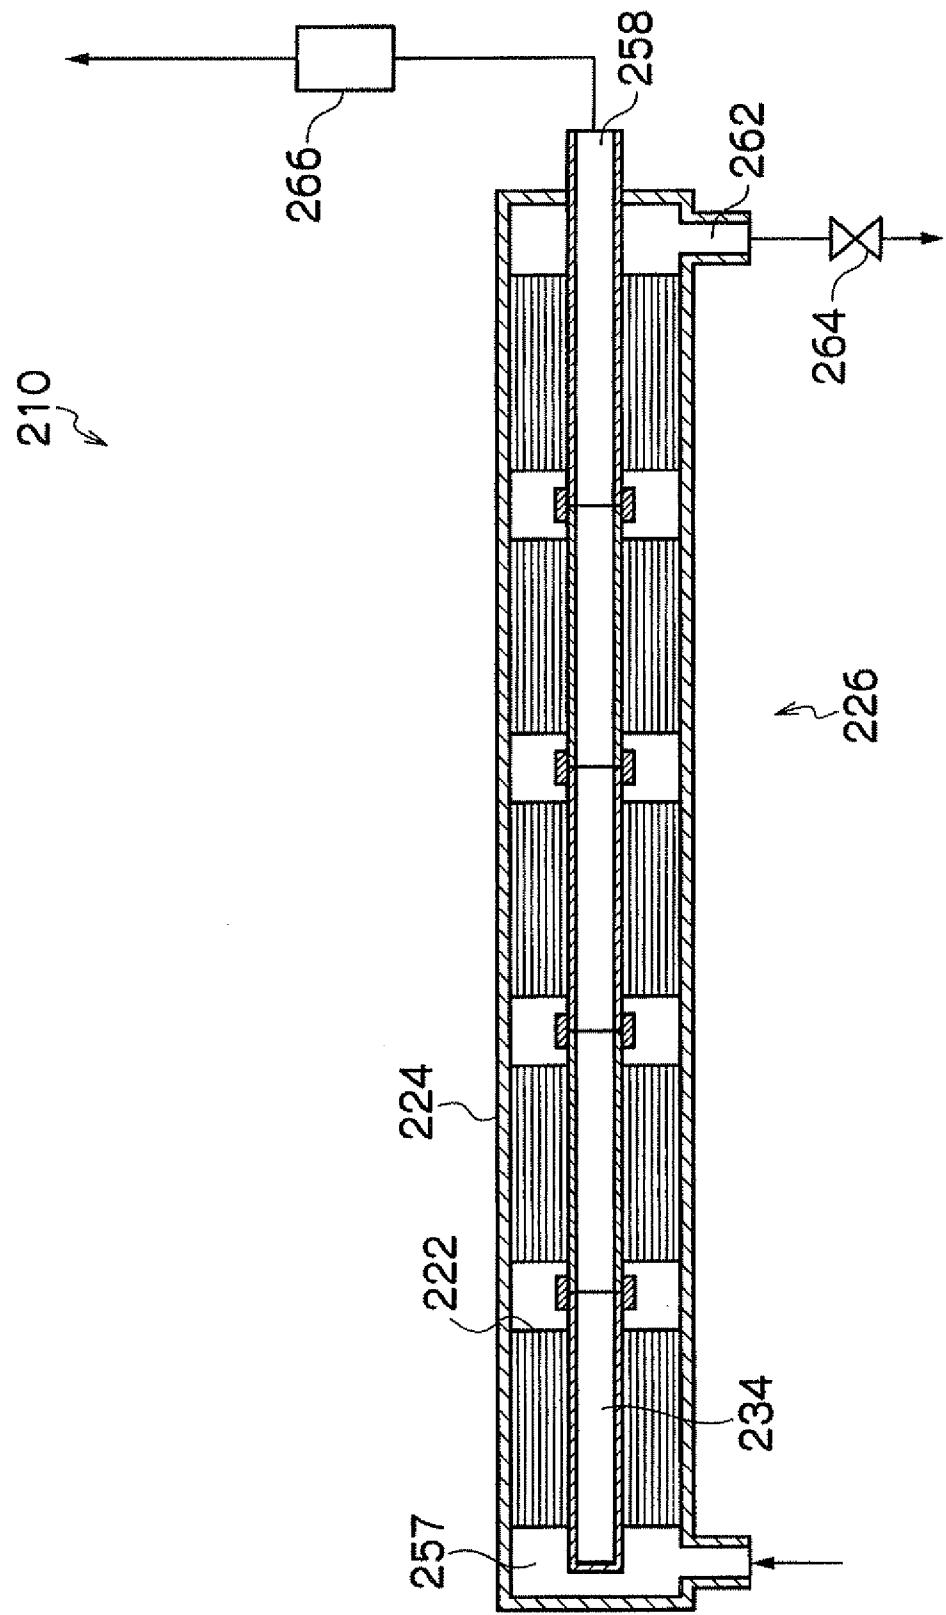


FIG.13

