

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 February 2006 (09.02.2006)

PCT

(10) International Publication Number
WO 2006/014274 A1

(51) International Patent Classification⁷: **C30B 23/02**

(21) International Application Number:
PCT/US2005/022989

(22) International Filing Date: 27 June 2005 (27.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/885,051 6 July 2004 (06.07.2004) US

(71) Applicant (for all designated States except US):
HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P. [US/US]; Hewlett-Packard Company, Intellectual Property Administration, 20555 S.H. 249, Houston, Texas 77070 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHAMPION, David** [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US). **O'NEIL, James** [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US).

MARDILOVICH, Peter [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US). **HERMAN, Gregory S.** [US/US]; 1000 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US).


(74) Agents: **COULMAN, Donald J.** et al.; Hewlett-Packard Company, Intellectual Property Administration, P.O. Box 272400, Mail Stop 35, Fort Collins, Colorado 80527-2400 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD FOR MAKING A PHOTONIC STRUCTURE

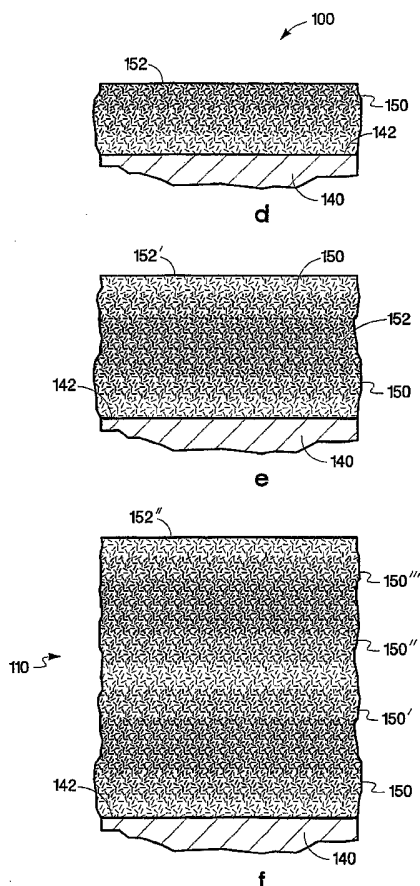

(57) Abstract: A method for making a photonic structure, including creating a first vapor stream of a first vapor material (120, 220, 320, 420, 520), the first vapor stream having a first non-uniform flux (122, 222) in at least one direction; and moving a substrate (140, 240, 340, 440, 540) in at least a portion of the vapor stream. In addition, the method includes depositing the first vapor material on a first major surface (142, 242) of said substrate, and forming a first layer (150) and a density gradient in the first layer during deposition. The first layer is disposed on and the density gradient is in a direction perpendicular to the first major surface.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

5

METHOD FOR MAKING A PHOTONIC STRUCTURE

10

BACKGROUND

Description of the Art

[0001] The demand for cheaper and higher performance electronic and opto-electronic devices has led to a growing need to manufacture electronic devices utilizing thin film technologies to generate ever more complex thin films.

15 Photonic crystals and other photonic structures are good examples of the ever-increasing demands on the ability to form multilayer thin films having both complex chemical compositions as well as complex physical and mechanical properties.

[0002] Although incandescent lamps are inexpensive and the most widely
20 utilized lighting technology in use today, they are also the most inefficient lighting source in regards to the amount of light generated per unit of energy consumed. An incandescent lamp works by heating a filament, typically tungsten, to a very high temperature so that it radiates in the visible portion of the electromagnetic spectrum. Unfortunately, at such high temperatures the filament radiates a
25 considerable amount of energy in the non-visible infrared region of the electromagnetic spectrum. Photonic crystals are spatially periodic structures having useful electromagnetic wave properties, such as photonic band gaps. Photonic crystals having the proper lattice spacing offer the potential of improving the luminous efficiency of an incandescent lamp by modifying the emissivity of the
30 tungsten filament. Such a filament, incorporated into a photonic crystal, would emit

most if not all light in the visible portion of the spectrum and little or no light in the non-visible infrared portion. In addition, the incorporation of reflective and antireflective coatings in such a light source would further increase its efficiency.

5 **[0003]** Many of the methods currently available for the manufacture of photonic crystals are extremely costly. Other methods are unable to control the microscopic properties over macroscopic dimensions. The complexity in manufacturing photonic crystals and other photonic structures severely limits their applications.

10

[0004] If these problems persist, the continued growth and advancements in the use of electronic devices, especially in the area of photonic will be reduced. In areas like consumer electronics, the demand for cheaper, smaller, more reliable, higher performance electronics constantly puts pressure on improving and
15 optimizing performance of ever more complex and integrated devices. The ability to optimize and control the physical and chemical properties of thin films will open up a wide variety of applications that are currently either impractical, or are not cost effective.

20

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Figs. 1a - 1c are cross-sectional views of a vapor source and substrate utilized to form a photonic structure according to an embodiment of the present invention.

25

[0006] Fig. 1d is a cross-sectional view of a layer having a density gradient according to an embodiment of the present invention.

[0007] Fig. 1e is a cross-sectional view of a layer having a density gradient according to an alternate embodiment of the present invention.

[0008] Fig. 1f is a cross-sectional view of a multilayer structure having a periodic variation in density according to an alternate embodiment of the present invention.

5 [0009] Fig. 2 is a cross-sectional view of a vapor source tilted with respect to a rotatable substrate according to an alternate embodiment of the present invention.

[0010] Fig. 3a is a plan view of a vapor source and substrate illustrating movement in two dimensions of the substrate relative to the vapor source according to an alternate embodiment of the present invention.

10 [0011] Fig. 3b is a graph of the density of a thin film as a function of film thickness according to an embodiment of the present invention.

[0012] Fig. 3c is a plan view of a vapor source and substrate illustrating movement in two dimensions of the substrate relative to the vapor source according to an alternate embodiment of the present invention.

15 [0013] Fig. 3d is a graph of the density of a thin film as a function of film thickness according to an embodiment of the present invention.

[0014] Fig. 3e is a plan view of a vapor source and substrate illustrating movement in two dimensions of the substrate relative to the vapor source according to an alternate embodiment of the present invention.

20 [0015] Fig. 3f is a graph of the density of a thin film as a function of film thickness according to an embodiment of the present invention.

[0016] Fig. 4a is a plan view of two vapor sources and a substrate illustrating movement in two dimensions of the substrate relative to the vapor sources according to an alternate embodiment of the present invention.

25 [0017] Fig. 4b is a graph of the density of two thin films as a function of film thickness according to embodiments of the present invention.

[0018] Fig. 4c is a plan view of two vapor sources and a substrate illustrating movement in two dimensions of the substrate relative to the vapor sources according to an alternate embodiment of the present invention.

[0019] Fig. 4d is a graph of the density of two thin films as a function of film thickness according to embodiments of the present invention.

[0020] Fig. 4e is a plan view of two vapor sources and a substrate illustrating movement in two dimensions of the substrate relative to the vapor sources according to an alternate embodiment of the present invention.

[0021] Fig. 4f is a graph of the density of two thin films as a function of film thickness according to embodiments of the present invention.

[0022] Fig. 5a is a plan view of two vapor sources producing vapor streams of two dissimilar materials and a substrate illustrating movement in two dimensions of the substrate relative to the vapor sources according to an alternate embodiment of the present invention.

[0023] Fig. 5b is a graph of the density of two thin films as a function of film thickness according to embodiments of the present invention.

[0024] Fig. 5c is a plan view of two vapor sources producing vapor streams of two dissimilar materials and a substrate illustrating movement in two dimensions of the substrate relative to the vapor sources according to an alternate embodiment of the present invention.

[0025] Fig. 5d is a graph of the density of two thin films as a function of film thickness according to embodiments of the present invention.

[0026] Fig. 5e is a plan view of two vapor sources producing vapor streams of two dissimilar materials and a substrate illustrating movement in two dimensions of the substrate relative to the vapor sources according to an alternate embodiment of the present invention.

[0027] Fig. 5f is a graph of the density of two thin films as a function of film thickness according to embodiments of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0028] This invention is directed to various photonic structures utilizing multilayer films. The present invention provides a method of fabricating a wide

variety of one dimensional photonic structures that include films having a gradient in the porosity or density of the film in a direction perpendicular to a major surface of a substrate on which the photonic structures are formed. By moving at least a portion of the substrate in at least a portion of a vapor stream the method of the present invention can fabricate a multilayer film where the gradient in the porosity or density of each layer is independently controlled. The method also provides the ability to generate multilayer films having a periodic change in the dielectric function in the nanometer regime that is desirable for controlling light in the visible region of the electromagnetic spectrum. Such films may be utilized in light sources, as well as forming reflective and anti-reflective coatings.

[0029] It should be noted that the drawings are not true to scale. Further, various elements have not been drawn to scale. Certain dimensions have been exaggerated in relation to other dimensions in order to provide a clearer illustration and understanding of the present invention. In particular, vertical and horizontal scales may differ and may vary from one drawing to another. In addition, although some of the embodiments illustrated herein are shown in two dimensional views with various regions having height and width, it should be clearly understood that these regions are illustrations of only a portion of a device that is actually a three dimensional structure. Accordingly, these regions will have three dimensions, including length, width, and height, when fabricated on an actual device. In addition, in some figures the change in density or porosity of a film is depicted utilizing a change in cross-hatching density and is meant only to illustrate a change in density and is not meant to represent any particular density or change in density. Further, in those figures graphically illustrating the density or porosity of a film it should be noted that 100 percent represents 100 percent density for the particular source being utilized, and may or may not represent the accepted or typical density of the particular material being deposited.

[0030] A process utilized to create a density gradient layer according to an embodiment of the present invention is illustrated in Figs. 1a - 1c in cross-sectional views. In this embodiment, vapor source 120 produces a vapor stream of a specified material where the vapor stream has non-uniform flux 122 formed in at least one direction. Generally, vapor source 120 has a cylindrical shape and produces a cylindrically shaped vapor stream having a flux gradient in the radial direction. However, in alternate embodiments, vapor source 120 may have any of a wide range of geometric shapes such as square, rectangular, or polygonal producing a wide range of geometrically shaped vapor streams with a wide range of flux gradients. For example, the shape of the vapor stream may be achieved by the shape of the target, by the utilization of a shutter or mask, or by combinations thereof. For illustrative purposes only Figs. 1a - 1c depict the flux gradient in the X direction. In this embodiment, substrate 140 is mounted to moveable substrate holder 116. As substrate holder 116 and substrate 140 are moved from position A to position B, as illustrated in Figs. 1a and 1b gradient layer 150 of the specified material is formed on substrate 140 as illustrated in Fig. 1d. In this embodiment, gradient layer 150 includes a density gradient, of the specified material, that varies from being less dense at first major surface 142, of substrate 140 of electronic device 100, and increases in density moving perpendicular from first major surface 142 to gradient layer surface 152 where the specified material is more dense. In an alternate embodiment, gradient layer 150 may be formed having the more dense portion of the layer at first major surface 152 with the least dense portion at gradient layer surface 142 by starting at position B and moving substrate 140 to position A.

25

[0031] As substrate holder 116 and substrate 140 are moved from position B in Fig. 1b back to position A, as illustrated in Figs. 1b and 1c, gradient layer 150' of the specified material is formed on gradient layer 150 as illustrated in Fig. 1e. In this case the density gradient, of the specified material, varies from a less dense region at substrate surface 142 to a higher density in the middle region of the two

30

gradient layers (i.e. gradient layer surface 152) to a less dense region at gradient layer surface 152' forming a thin film having a double density gradient. In an alternate embodiment, the double layer density gradient also may be formed by translating substrate 140 in a single pass from position A through position B to position C. By making 4 passes from A to B (e.g. A-B-A-B-A) or 2 passes from A to C (e.g. A-C-A) multilayer film 110, as illustrated in Fig. 1f, may be formed having a density gradient that varies periodically. As illustrated in fig. 1f, multilayer film 110 includes 4 density gradient sub-layers depicted as 150, 150', 150'', and 150''' in a film morphology that has a porosity or density that goes from low to high to low to high to low in moving away from substrate surface 142 toward gradient layer surface 152". This process may be repeated to generate a multilayer film comprising many layers.

[0032] In this embodiment, vapor source 120 may be any of a wide range of vapor sources, such as a sputtering target, a thermal or electron beam evaporation source, or a molecular beam source. Substrate 140, in this embodiment, may be formed from any of a wide range of materials or combinations of materials, such as various glasses, for example, any of the borosilicate, soda lime or quartz glasses (including crystalline and amorphous forms); materials such as silicon oxide including silicon dioxide or silicon oxynitride, or silica mixed with oxides of, for example, potassium, calcium, barium or lead; ceramics such as aluminum oxide, boron nitride, silicon carbide, and sapphire; metals; semiconductors such as silicon, gallium arsenide, indium phosphide, and germanium; and various polymers such as polycarbonates, polyethylene terephthalate, polystyrene, polyimides, and acrylates including polymethylacrylate are just a few examples of the materials that may be utilized. Accordingly, the present invention is not intended to be limited to those devices fabricated in silicon semiconductor materials, but includes those devices fabricated in one or more of the available semiconductor materials and technologies known in the art, such as thin-film-transistor (TFT) technology using polysilicon on glass substrates. Further,

substrate 140 is not restricted to typical wafer sizes, and may include processing a polymer sheet or film or glass sheet or, for example, a single crystal sheet or a substrate handled in a different form and size than that of conventional wafers or substrates. The actual substrate material utilized will depend on various factors
5 such as the particular material utilized to form the multilayer structure, the particular device in which the photonic structure will be utilized, the expected lifetime of the photonic structure, and the particular environment to which the photonic structure will be subjected.

10 **[0033]** In this embodiment multilayer 110 also may be formed from any of a wide range of materials or combinations of materials including semiconductors and ceramics such as borides, nitrides, and carbides. In one embodiment, a samarium strontium cobalt oxide ($\text{Sm}_{0.5}\text{Sr}_{0.5}\text{CoO}_3$) sputtering target was utilized to form a 5 layer film with each layer about 60 nanometer thick. The multilayer was
15 sputter deposited by radio frequency (RF) magnetron sputtering utilizing a gas composition of 5 percent oxygen in argon at a pressure of 10 milli Torr (mTorr), with a flow rate of 49 sccm (flow of Standard gas at a pressure of one atmosphere at a rate of one Cubic Centimeter per Minute) and a power of 250 Watts (W) utilizing a 3 inch target, and a transition speed in the range from about 2 centimeters per
20 minute to about 10 centimeters per minute. In alternate embodiments, dc plasma powers in the range from about 10 W to about 400W utilizing a three inch target also may be utilized for sputtering metals and ceramics that do not, generally, present charging problems; or for RF sputtering powers from about 100 W to about 400 W also may be utilized. In still other embodiments, a DC-Pulse power source
25 also may be utilized when sputtering materials that charge. In addition, transition speeds in the range from about 0.7 centimeters per minute or higher also may be utilized. In alternate embodiments, other vapor sources such as, samarium doped ceria ($\text{Ce}_{0.8}\text{Sm}_{0.2}\text{O}_{1.9}$), and yttria-stabilized zirconia, ZrO_2 , 8% Y_2O_3 also may be utilized.

[0034] An alternate embodiment of a process utilized to create a multilayer photonic structure, is shown in a cross-sectional view, in Fig. 2. In this embodiment, vapor source 220 includes vapor source central axis 221 that is tilted at an angle to the surface normal of substrate surface 242. In addition, substrate 240 is also rotatable about substrate holder central axis 218 of substrate holder 216 where the surface normal of substrate 240 and substrate holder central axis 218 are substantially parallel. However, in alternate embodiments, the substrate surface normal and the substrate holder axis may also be tilted at an angle relative to each other. In still other embodiments, the surface normal of substrate 240 and vapor source central axis 221 are non-coplanar. In this embodiment, by rotating substrate 240 about substrate holder central axis 218 and reciprocally translating substrate 240 from position A to position B, a pre-determined number of times, a multilayer film having a desired number of sub-layers may be formed. By controlling various parameters such as the translation distance and speed, the rotational speed, tilt angle and the non-uniformity of non-uniform flux 222 the density gradient of each sub-layer can be independently controlled.

[0035] An alternate embodiment of a process utilized to create a multilayer photonic structure, is shown in a plan view, in Figs. 3a, 3c, and 3e. In this embodiment, vapor source 320 is a cylindrically or disk shaped sputter target having vapor source central axis 324. In addition, substrate 340 is rotated about vapor source central axis 324 and is moved in a stepwise manner between two different positions (designated "a" and "b") within the non-uniform flux of vapor source 320 generating a film having a substantially step function change in the films density or porosity. In this embodiment, position "a" is directly under the central portion of the radially non-uniform flux of vapor source 320 and position "b" is at a position of lower flux. As illustrated in Fig 3a, by repeatedly moving substrate 340 in a substantially step function manner from position "a" to position "b" (i.e. represented by the arrow and distance X shown in Fig. 3a) a multilayer film is generated having a substantially step function change in density. An example of

such a multilayer film is illustrated in Fig. 3b showing the periodic variation in density as a function of film thickness. Figs. 3c - 3f illustrates how both the maximum and minimum density of a multilayer film may be controlled. In Fig. 3c, substrate 340 in position "a" is in a region of lower flux than the central region shown in Fig. 3a. Substrate 340 is rotated about the central axis of vapor source 320 a pre-selected number of times. Substrate 340 is then moved to position "b" a region of lower flux, and in this particular example, the same position as shown in Fig. 3a. The periodic variation in the density of the multilayer film as a function of thickness, as illustrated in Fig. 3d, has a lower maximum density than that produced in Figs. 3a -3b, but the multilayer film has the same lower or minimum density as that shown in Figs 3a -3b. Another example is illustrated in Figs. 3e -3f. In Fig. 3e, substrate 340 is in position "a" at a position that is intermediate between that shown in Figs. 3a and 3c. Position "b," in this example, is a region of lower flux than position "b" shown in Figs. 3a and 3c. The density of the multilayer film as a function of thickness, as illustrated in Fig. 3f, has maximum density slightly less than 100 percent and a minimum density substantially less than that shown in Figs 3b and 3d. In alternate embodiments, substrate 340 may be moved from a position of lower flux to a position of higher flux to generate multilayer films whose density gradient starts with a low density closest to the substrate and then increases in moving away from the substrate. In other embodiments, the substrate may be tilted with respect to the vapor source to generate an even greater change in density or porosity. In still other embodiments, the speed or rate of change in moving substrate 340 from a first position (i.e. position "a") to a second position (i.e. position "b") also may be controlled to generate multilayer films having a slope or controlled profile in the change in the density gradient. For example, substrate 340 may be moved in a linear manner generating a density gradient having a linear slope between the maximum and minimum values. A non-linear translation is another example generating a non-linear slope in the density gradient. In addition, in all of these embodiments, substrate 340 also may be rotated about the central

axis of the substrate holder providing for an increase in the lateral homogeneity of each sub-layer of the multilayer film when desired.

[0036] An alternate embodiment of a process utilized to create a multilayer photonic structure, is shown in a plan view, in Figs. 4a, 4c, and 4e. In this embodiment, two vapor sources each producing a vapor stream of the same material are utilized to generate multilayer films having a periodic variation in density as a function of film thickness. Vapor sources 420 and 426 each produce a vapor stream having a non-uniform flux in at least one direction and are separated by a distance L. Substrate 440, in this embodiment, is smaller than the size of vapor sources 420 and 426. Generally, substrate 440 is about a fourth the size of the target or smaller. In this embodiment, substrate 440 may be moved either a pre-selected distance linearly in at least a portion of the non-uniform vapor fluxes of both targets as illustrated in Figs. 4a, 4c, and 4e and denoted by arrow "a;" or substrate 440 may be moved in two dimensions as denoted by curved trajectory lines "b", "c", and "d" in Figs. 4a, 4c, and 4e. As illustrated in Fig. 4a by reciprocally translating substrate 440 between the central region of vapor sources 420 and 426 a multilayer film is formed having an oscillating density gradient as shown in Fig. 4b where the density of the film as a function of film thickness is illustrated. By moving substrate 440 in a curvilinear manner through the central portion of both vapor sources, a multilayer film is formed having a density gradient that oscillates from the maximum value to a lower value than that obtained by reciprocally translating between the two central regions as illustrated by curve d in Fig. 4b. In the embodiment shown in Figs. 4a - 4b, substrate 440 passes through the central portion of the non-uniform vapor fluxes of each vapor source producing a multilayer film having a density gradient oscillating from the maximum density or porosity for that particular vapor source to some lesser value that depends on various factors such as particular path utilized, the particular non-uniformity in flux as well as the particular distance L utilized to separate the two vapor sources. In the embodiment shown in Figs. 4c - 4d substrate 440 is moved between the two vapor sources

forming multilayer films having relative maximum density gradient less than that illustrated in Figs. 4a -4b. Again by utilizing a curvilinear path the difference between the relative minimum and maximum can be increased. In the embodiment shown in Figs. 4e - 4f substrate 440 is moved across both vapor sources forming
5 multilayer films having a density gradient that starts with a low density closest to the substrate and then increases to a higher density moving away from the substrate as illustrated in curves a and d in Fig. 4f. In this embodiment, substrate 440 may be reciprocally translated a specified distance k beyond central axis 424 of vapor source 420 or a distance k beyond central axis 428 of vapor source 426 or
10 both. In alternate embodiments, many other translations, movements, and rotations also may be utilized to generate complex paths in which substrate 440 may be moved to generate various multilayer structures having complex density gradients. As noted above for those embodiments shown in Figs 3a - 3f, in all of these embodiments shown in Figs. 4a - 4f substrate 440 also may be rotated about
15 the central axis of the substrate holder providing for an increase in the lateral homogeneity of each sub-layer of the multilayer film when desired. These examples are just a few of the wide variety of density gradients that may be formed in a multilayer film utilizing the present invention.

20 **[0037]** An alternate embodiment of a process utilized to create a multilayer photonic structure, is shown in a plan view, in Figs. 5a, 5c, and 5e. In this embodiment, again two vapor sources are utilized, however, first vapor source 520 produces a vapor stream of a first material and second vapor source 526 produces a vapor stream of a second material. Vapor sources 520 and 526 each produce a
25 vapor stream having a non-uniform flux in at least one direction and the two sources are separated by a distance L. Substrate 540, in this embodiment, is smaller than the size of vapor sources 520 and 526. Generally, substrate 540 is about a fourth the size of the vapor sources or smaller. In the embodiments shown in Figs. 5a, 5c, and 5e substrate 540 may be moved, rotated, and translated in a
30 manner similar to that described in Figs. 4a, 4c, and 4e. In addition, as described

above a wide variety of other trajectories for substrate 540 also may be utilized to generate complex density gradients in multilayer films. In this embodiment, both a periodic compositional variation and a periodic variation in density or porosity as a function of film thickness for a particular trajectory is illustrated in the graphs shown in Figs. 5b, 5d, and 5f. For illustrative purposes only the same density gradients and the same trajectories are shown in Figs. 5a- 5f as shown in Figs. 4a -4f; however, other density gradients and trajectories also may be utilized in this embodiment. In addition, again for illustrative purposes only, the non-uniformity in the flux of the two vapor streams is the same; however, in alternate embodiments, the non-uniformity in the flux of the two vapor streams may be dissimilar. The change in composition of the multilayer film formed utilizing two vapor sources each generating a vapor stream of a different material is illustrated in Fig. 5b. The change in composition of the first material as a function of film thickness is illustrated by dashed line 525, and the change in composition of the second material as a function of film thickness is illustrated by solid line 527 in Fig. 5b. In this embodiment, substrate 540 begins its trajectory of movement in the central region of second vapor source 526 and then moves to the central region of first vapor source 520. As illustrated in Fig. 5b such movement of substrate 540 results in a multilayer film oscillating, in composition, between 100 percent of the second material (i.e. solid line 527) and 100 percent of the first material (i.e. solid line 525), where this oscillation may be repeated many times. Fig. 5d illustrates a multilayer film having a periodic compositional profile where each sub-layer includes a mixture of the first and second materials as well as a periodic variation in density or porosity. In both Figs. 5b and 5d the density gradient is of the same thickness as the compositional gradient. Fig. 5f illustrates a multilayer film where the periodic compositional profile is essentially twice the thickness as the density gradient profile. As noted above substrate 540 also may be tilted relative to vapor sources 520 and 526 and substrate 540 also may be rotated about the central axis of the substrate holder providing for even more complex density and compositional

profiles as a function of thickness as well as increasing the lateral homogeneity of each sub-layer of the multilayer film.

5 **[0038]** What is Claimed is:

Claims

1. A method for making a photonic structure, comprising:
creating a first vapor stream of a first vapor material (120, 220, 320, 420,
5 520), said first vapor stream having a first non-uniform flux (122, 222) in at least
one direction;
moving a substrate (140, 240, 340, 440, 540) in at least a portion of said first
vapor stream;
depositing said first vapor material on a first major surface (142, 242) of said
10 substrate; and
forming a first layer (150) and a density gradient in said first layer during
deposition, said first layer disposed on said first major surface, wherein said
density gradient is in a direction perpendicular to said first major surface.
- 15 2. The method in accordance with claim 1, wherein creating said first
layer further comprises forming a multilayer structure (110) of said first vapor
material on said substrate, said multilayer structure having a periodic variation in
density perpendicular to said first major surface.
- 20 3. The method in accordance with claim 1, wherein moving said
substrate in at least said portion of said first vapor stream further comprises
translating at least said portion of said substrate in at least said portion of said first
vapor stream.
- 25 4. The method in accordance with claim 1, wherein creating said first
vapor stream further comprises creating said first vapor stream having a first
central axis (221, 324, 424, 524, 428), and wherein moving said substrate further
comprises rotating about said first central axis at least said portion of said substrate
in at least said portion of said first vapor stream.

5. The method in accordance with claim 1, wherein creating said first vapor stream further comprises creating said first vapor stream having a first central axis (221, 324, 424, 524, 428), and wherein depositing said first vapor material further comprises depositing said first vapor material on said first major surface of said substrate, said first major surface having a substrate surface normal, wherein said substrate surface normal and said first central axis are not coplanar.

6. The method in accordance with claim 1, wherein moving said substrate further comprises rotating said substrate about a substrate holder central axis (218).

7. The method in accordance with claim 1, wherein moving said substrate in at least said portion of said first vapor stream further comprises reciprocally translating at least said portion of said substrate in at least said portion of said first vapor stream.

8. The method in accordance with claim 1, further comprising:
creating a second vapor stream of said first vapor material (426), said second vapor stream having a second non-uniform flux in at least one direction;
and

moving at least said portion of said substrate in at least a portion of said second vapor stream.

9. The method in accordance with claim 8, wherein creating said first vapor stream further comprises creating said first vapor stream having a first central axis (221, 324, 424, 524), wherein said first non-uniform flux of said first vapor stream decreases radially from said first central axis, and wherein creating said second vapor stream further comprises creating said second vapor stream

having a second central axis (428), wherein said second non-uniform flux decreases radially from said second vapor central axis.

10. The method in accordance with claim 9, wherein moving at least said
5 portion of said substrate further comprises reciprocally translating at least said portion of said substrate between said first central axis and said second central axis.

11. The method in accordance with claim 9, wherein moving at least said
10 portion of said substrate further comprises moving at least said portion of said substrate in a curvilinear manner (b, c, d) between said first central axis and said second central axis.

12. The method in accordance with claim 9, wherein said first central axis
15 and said second central axis are separated a distance L, and wherein moving at least said portion of said substrate further comprises reciprocally translating at least said portion of said substrate a specified distance k beyond said first central axis and said second central axis.

20 13. The method in accordance with claim 12, wherein reciprocally translating at least said portion of said substrate said specified distance k further comprises reciprocally translating at least said portion of said substrate said specified distance k, wherein said specified distance k equals said distance L.

25 14. The method in accordance with claim 12, wherein moving at least said portion of said substrate further comprises moving at least said portion of said substrate in a curvilinear manner (b, c, d) a specified distance k beyond said first central and said second central axes.

15. The method in accordance with claim 12, wherein moving at least said portion of said substrate further comprises reciprocally translating at least said portion of said substrate a specified distance k between said first central axis and said second central axis, wherein said specified distance k is less than said
5 distance L .

16. The method in accordance with claim 1, wherein creating said first vapor stream further comprises creating said first vapor stream from a source, said first vapor stream having a first vapor stream central axis and a vapor stream
10 lateral dimension X , wherein said first non-uniform flux decreases from a maximum value at said first vapor stream central axis to essentially zero at said vapor stream lateral dimension X ; and wherein said substrate has a substrate dimension R and a substrate central axis perpendicular to said first major surface.

17. The method in accordance with claim 1, further comprising:
creating a second vapor stream of a second vapor material (526), said second vapor stream having a second non-uniform flux in at least one direction;
moving at least said portion of said substrate in at least a portion of said second vapor stream; and
20 forming a multilayer structure having alternating layers of said first and said second vapor materials, wherein each layer of said first vapor material has a first density gradient perpendicular to said first major surface, and wherein each layer of said second vapor material has a second density gradient perpendicular to said first major surface.

18. A method of making a photonic structure, comprising:
creating a first vapor stream of a first vapor material (120, 220, 320, 420, 520), said first vapor stream having a non-uniform density in at least one direction;

moving at least a portion of a substrate (140, 240, 340, 440, 540) in at least a portion of said first vapor stream, said substrate having a first major surface (142, 242);

creating a first layer (150) of said first vapor material on at least a portion of
5 said substrate, said first layer having a first density; and

creating a second layer (150') of said first vapor material on said first layer, said second layer having a second density different from said first density.

Fig. 1a

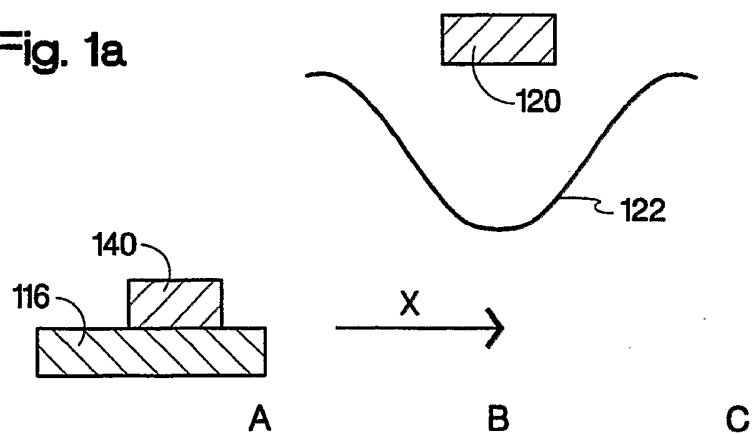


Fig. 1b


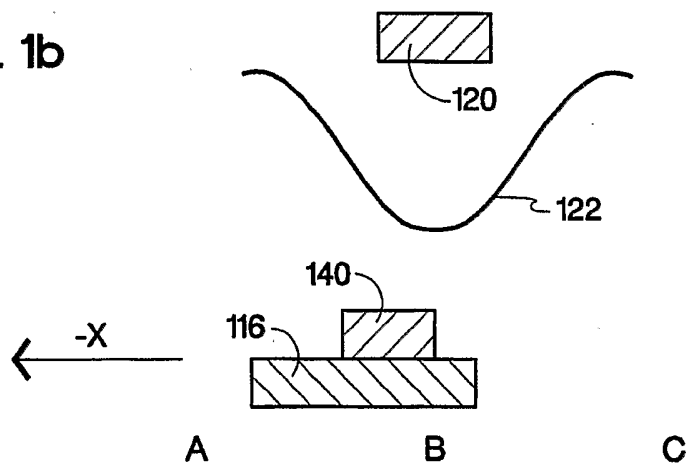


Fig. 1c

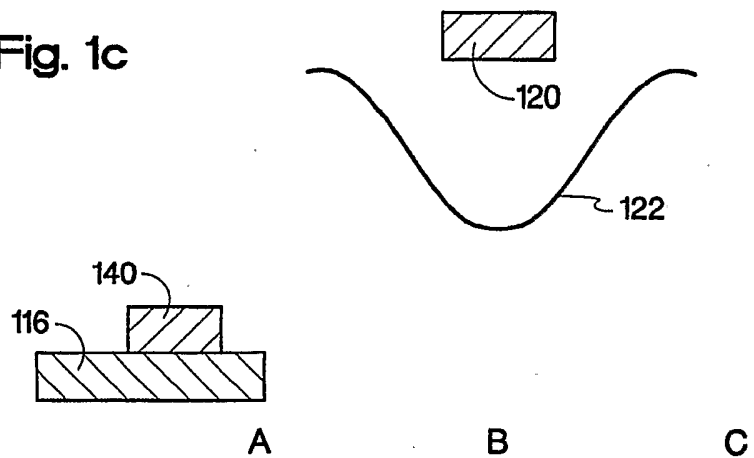

2/7

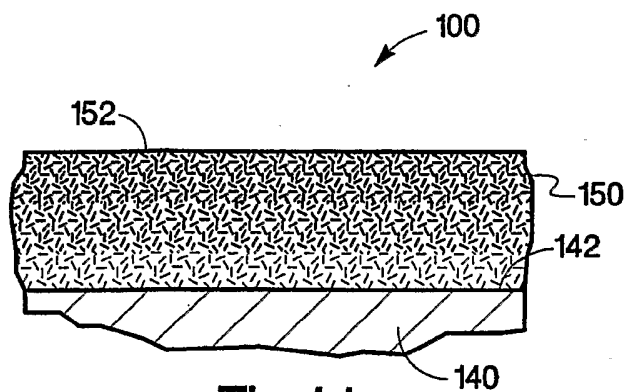


Fig. 1d

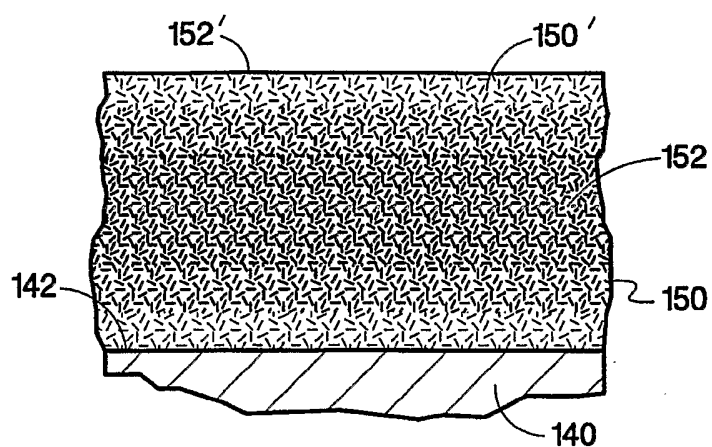


Fig. 1e

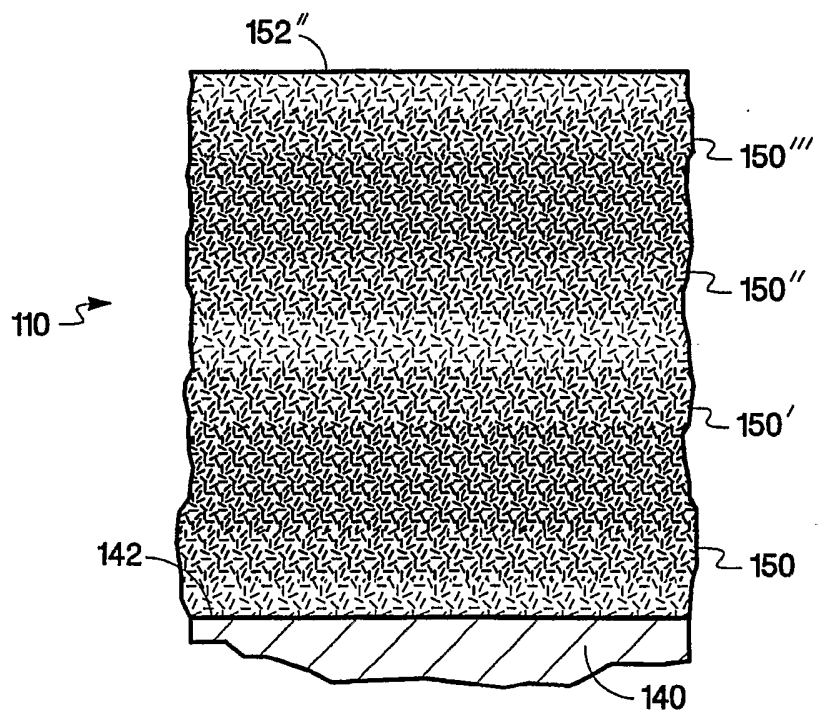


Fig. 1f

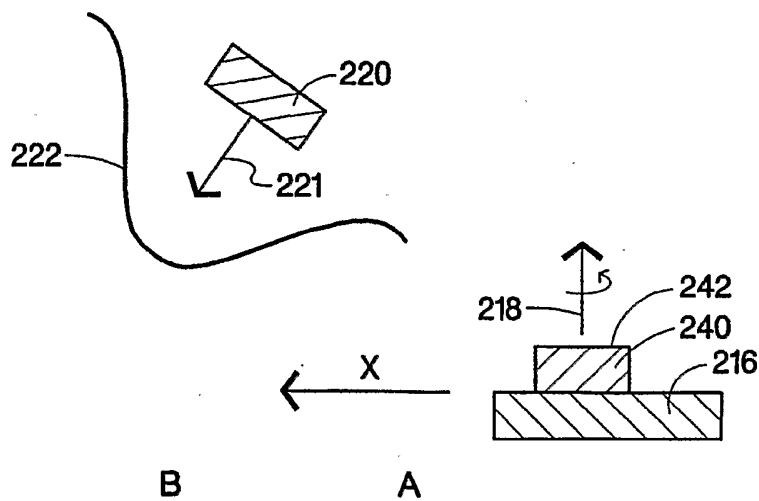


Fig. 2

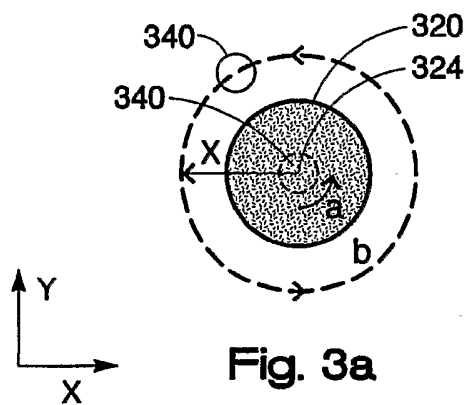


Fig. 3a

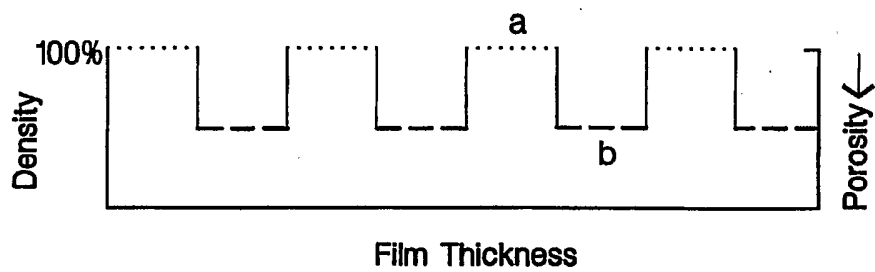


Fig. 3b

4/7

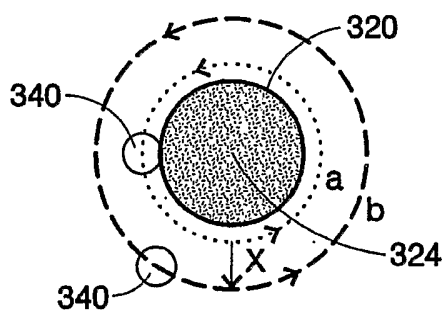


Fig. 3c

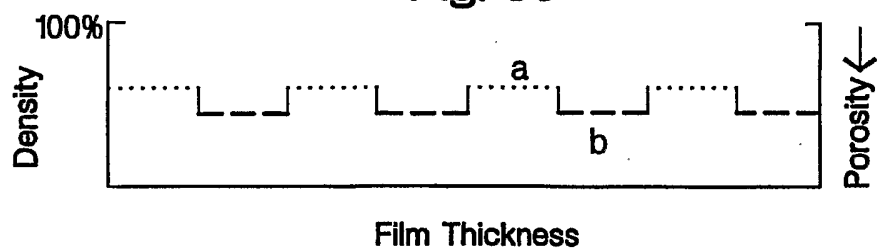


Fig. 3d

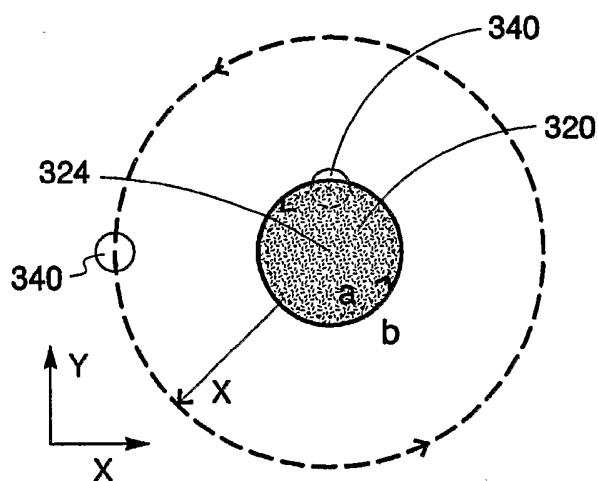


Fig. 3e

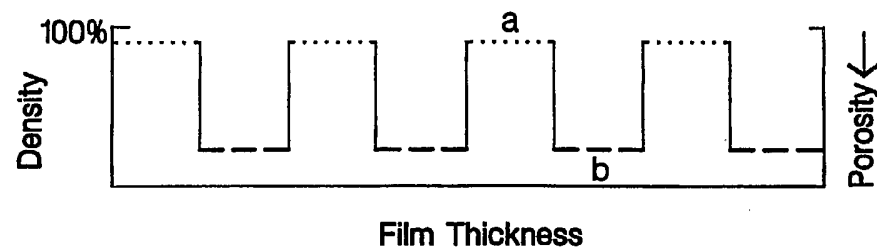


Fig. 3f

5/7

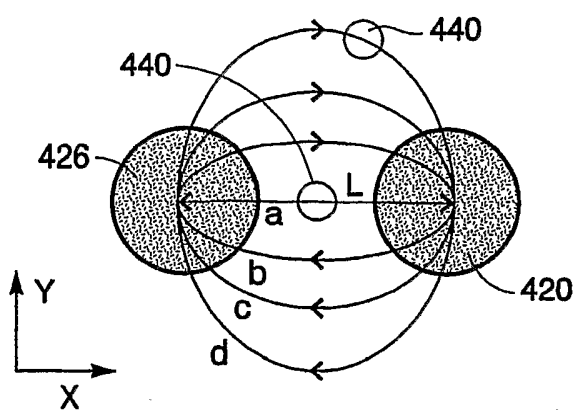


Fig. 4a

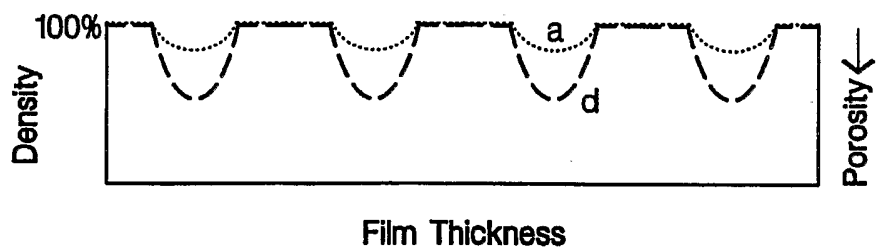


Fig. 4b

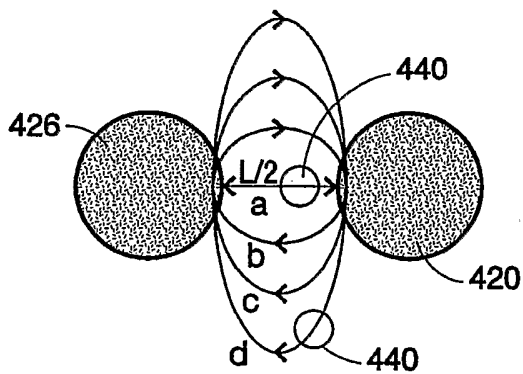


Fig. 4c

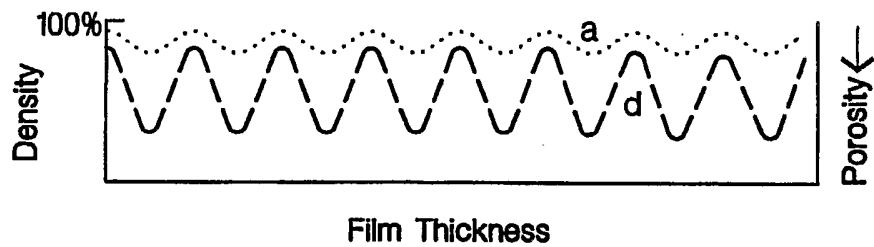


Fig. 4d

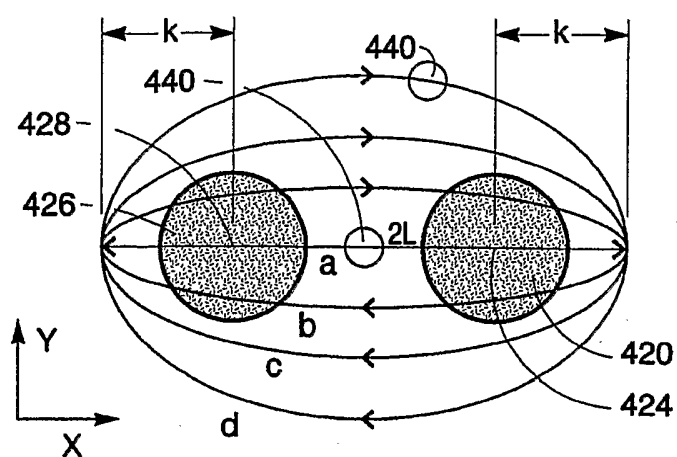


Fig. 4e

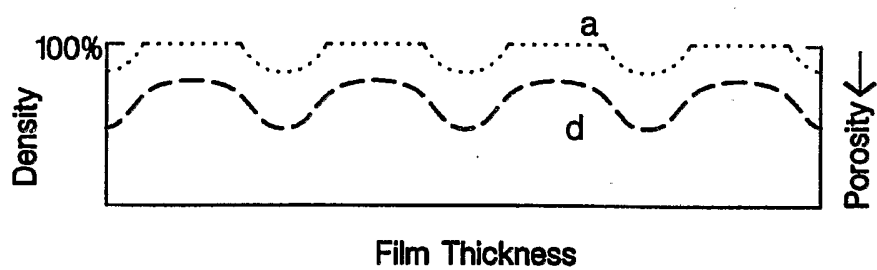


Fig. 4f

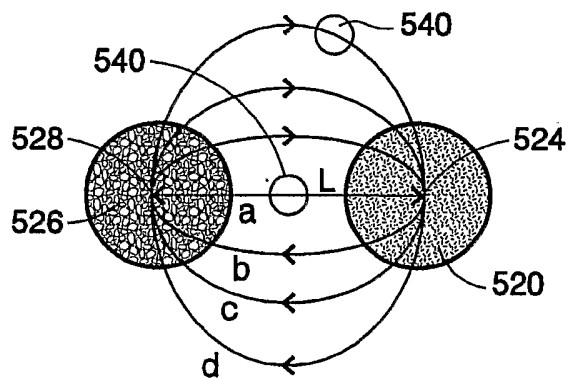


Fig. 5a

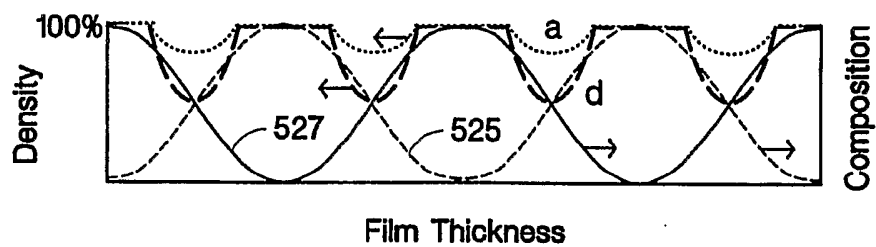


Fig. 5b

7/7

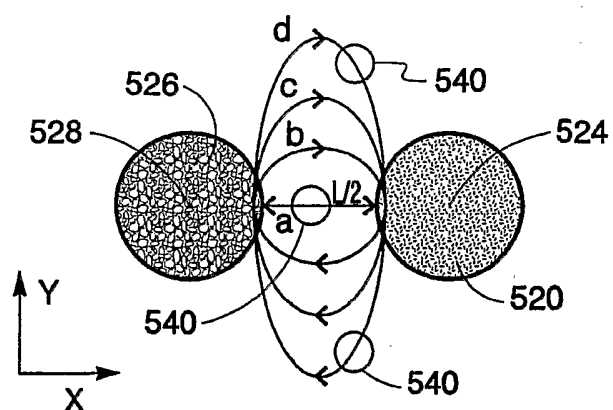


Fig. 5c

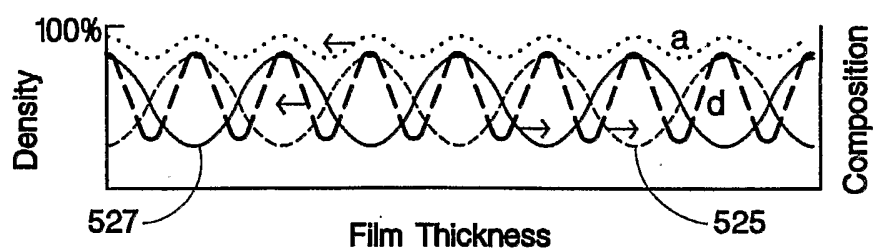


Fig. 5d

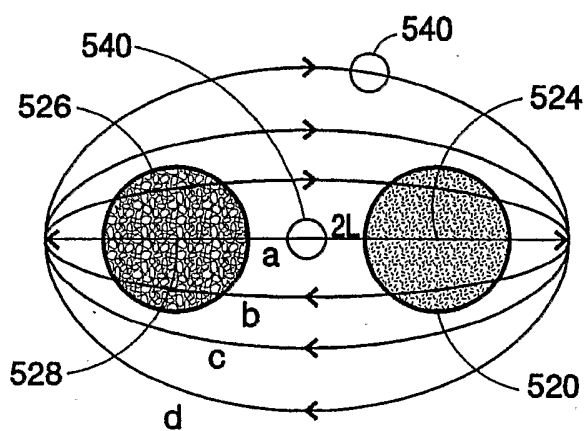


Fig. 5e

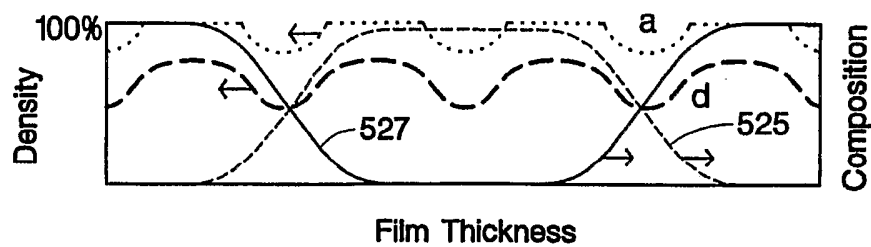


Fig. 5f

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/022989

A. CLASSIFICATION OF SUBJECT MATTER

C30B23/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C30B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 31 25 150 A1 (INTERNATIONAL STANDARD ELECTRIC CORP; INTERNATIONAL STANDARD ELECTRIC) 25 March 1982 (1982-03-25) abstract; claims	1-18
A	PATENT ABSTRACTS OF JAPAN vol. 007, no. 151 (C-174), 1 July 1983 (1983-07-01) & JP 58 061273 A (KOGYO GIJUTSUIN; others: OJ), 12 April 1983 (1983-04-12) abstract	1-18
A	US 2004/115954 A1 (TODD MICHAEL A) 17 June 2004 (2004-06-17) the whole document	1-18
A	US 4 591 544 A (SASA ET AL) 27 May 1986 (1986-05-27) column 7, line 35 - column 8, line 55	18



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

29 November 2005

Date of mailing of the international search report

06/12/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brisson, O

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2005/022989

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 3125150	A1	25-03-1982	NONE	
JP 58061273	A	12-04-1983	JP 1258006 C JP 59039664 B	29-03-1985 25-09-1984
US 2004115954	A1	17-06-2004	JP 2004193622 A	08-07-2004
US 4591544	A	27-05-1986	EP 0082588 A2	29-06-1983