




(86) **Date de dépôt PCT/PCT Filing Date:** 2005/11/30
(87) **Date publication PCT/PCT Publication Date:** 2006/06/08
(45) **Date de délivrance/Issue Date:** 2015/01/06
(85) **Entrée phase nationale/National Entry:** 2007/05/22
(86) **N° demande PCT/PCT Application No.:** US 2005/042994
(87) **N° publication PCT/PCT Publication No.:** 2006/060341
(30) **Priorité/Priority:** 2004/12/01 (US11/000,129)

(51) **Cl.Int./Int.Cl. A62C 37/08** (2006.01),
A62C 2/00 (2006.01), **A62C 37/11** (2006.01),
A62C 37/14 (2006.01)
(72) **Inventeur/Inventor:**
SILVA, MANUEL R., JR., US
(73) **Propriétaire/Owner:**
TYCO FIRE PRODUCTS LP, US
(74) **Agent:** KIRBY EADES GALE BAKER

(54) **Titre : SPRINKLEUR ANTIGEL A ENSEMBLE DEFLECTEUR A FERMETURE ETANCHE**
(54) **Title: DRY SPRINKLER WITH A DIVERTER SEAL ASSEMBLY**

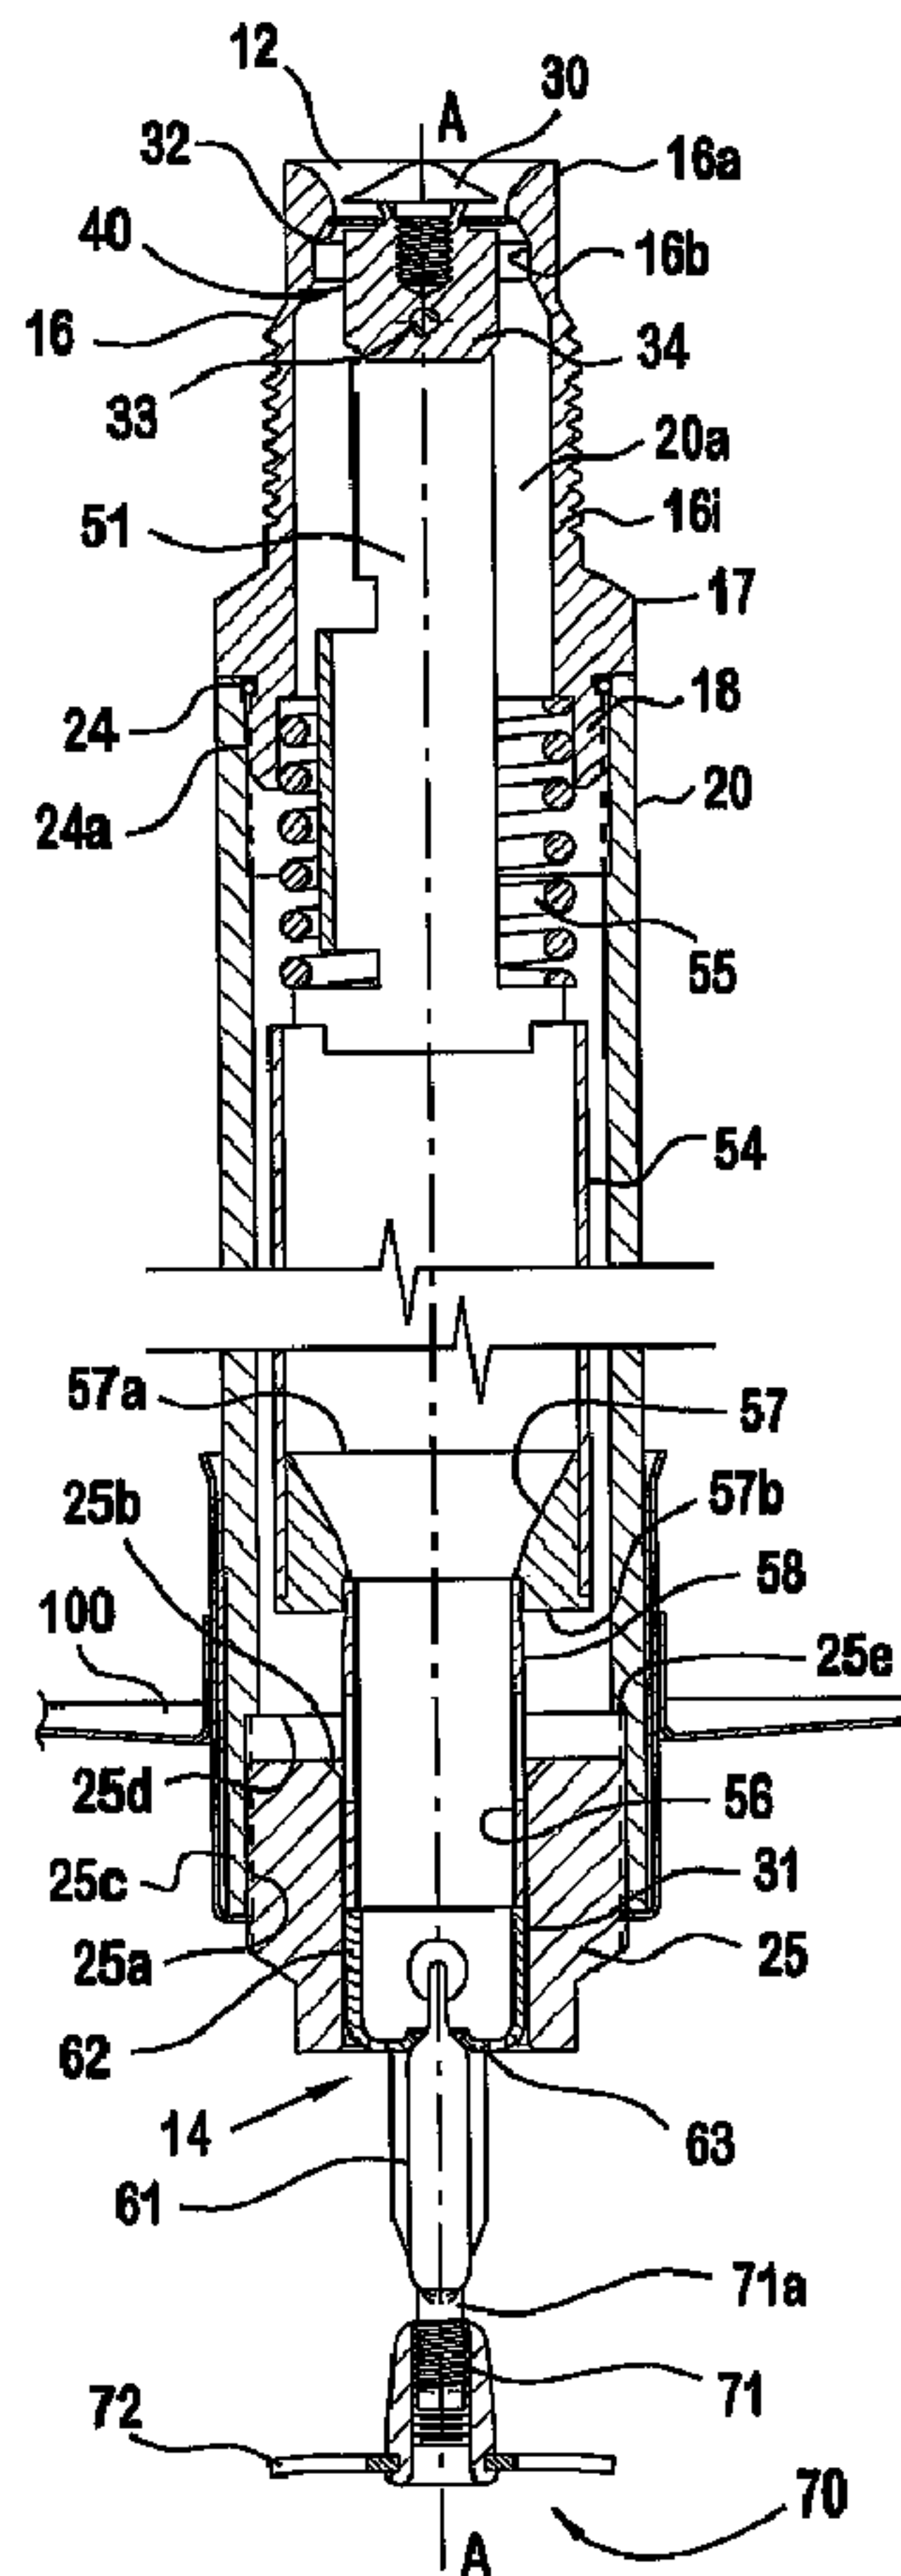

(57) **Abrégé/Abstract:**

A dry sprinkler (10) is provided that includes a structure (20), a fluid deflecting structure (70), a locator (50), a metallic annulus (32) and a shield (30). The structure (20) defines a passageway (20a) extending along a longitudinal axis between an inlet (12) and an



(57) Abrégé(suite)/Abstract(continued):

outlet (14). The structure (20) has a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge. The fluid deflecting structure (70) is proximate the outlet. The locator (50) is movable along the longitudinal axis between a first position and a second position. The locator (50) supports the metallic annulus (32). The metallic annulus includes first and second metallic surfaces (32a, 32b) spaced apart along the longitudinal axis between an inner and outer circumference (32c, 32d) with respect to the longitudinal axis. The shield has a first face (30a) exposed to the inlet and a second face (30b) confronting the first metallic surface (32a) to define a gap therebetween. Various methods are also described.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



PCT



(43) International Publication Date
8 June 2006 (08.06.2006)

(10) International Publication Number
WO 2006/060341 A3

(51) International Patent Classification:

A62C 37/08 (2006.01) A62C 37/11 (2006.01)
A62C 2/00 (2006.01) A62C 37/14 (2006.01)

(21) International Application Number:

PCT/US2005/042994

(22) International Filing Date:

30 November 2005 (30.11.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/000,129 1 December 2004 (01.12.2004) US

(71) Applicant (for all designated States except US): **TYCO ENGINEERED PRODUCTS & SERVICES** [US/US]; 9 Roszel Road, Teps. IP Law Dept., Princeton, NJ 08540 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SILVA, JR., Manuel R.** [US/US]; 38 Canonchet Trail, Cranston, RI 02921 (US).


(74) Agents: **SMITH, Montgomery, W. et al.**; Tyco Engineered Products & Services, TEPS IP Law Dept., 9 Roszel Road, Princeton, NJ 08540 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: DRY SPRINKLER WITH A DIVERTER SEAL ASSEMBLY

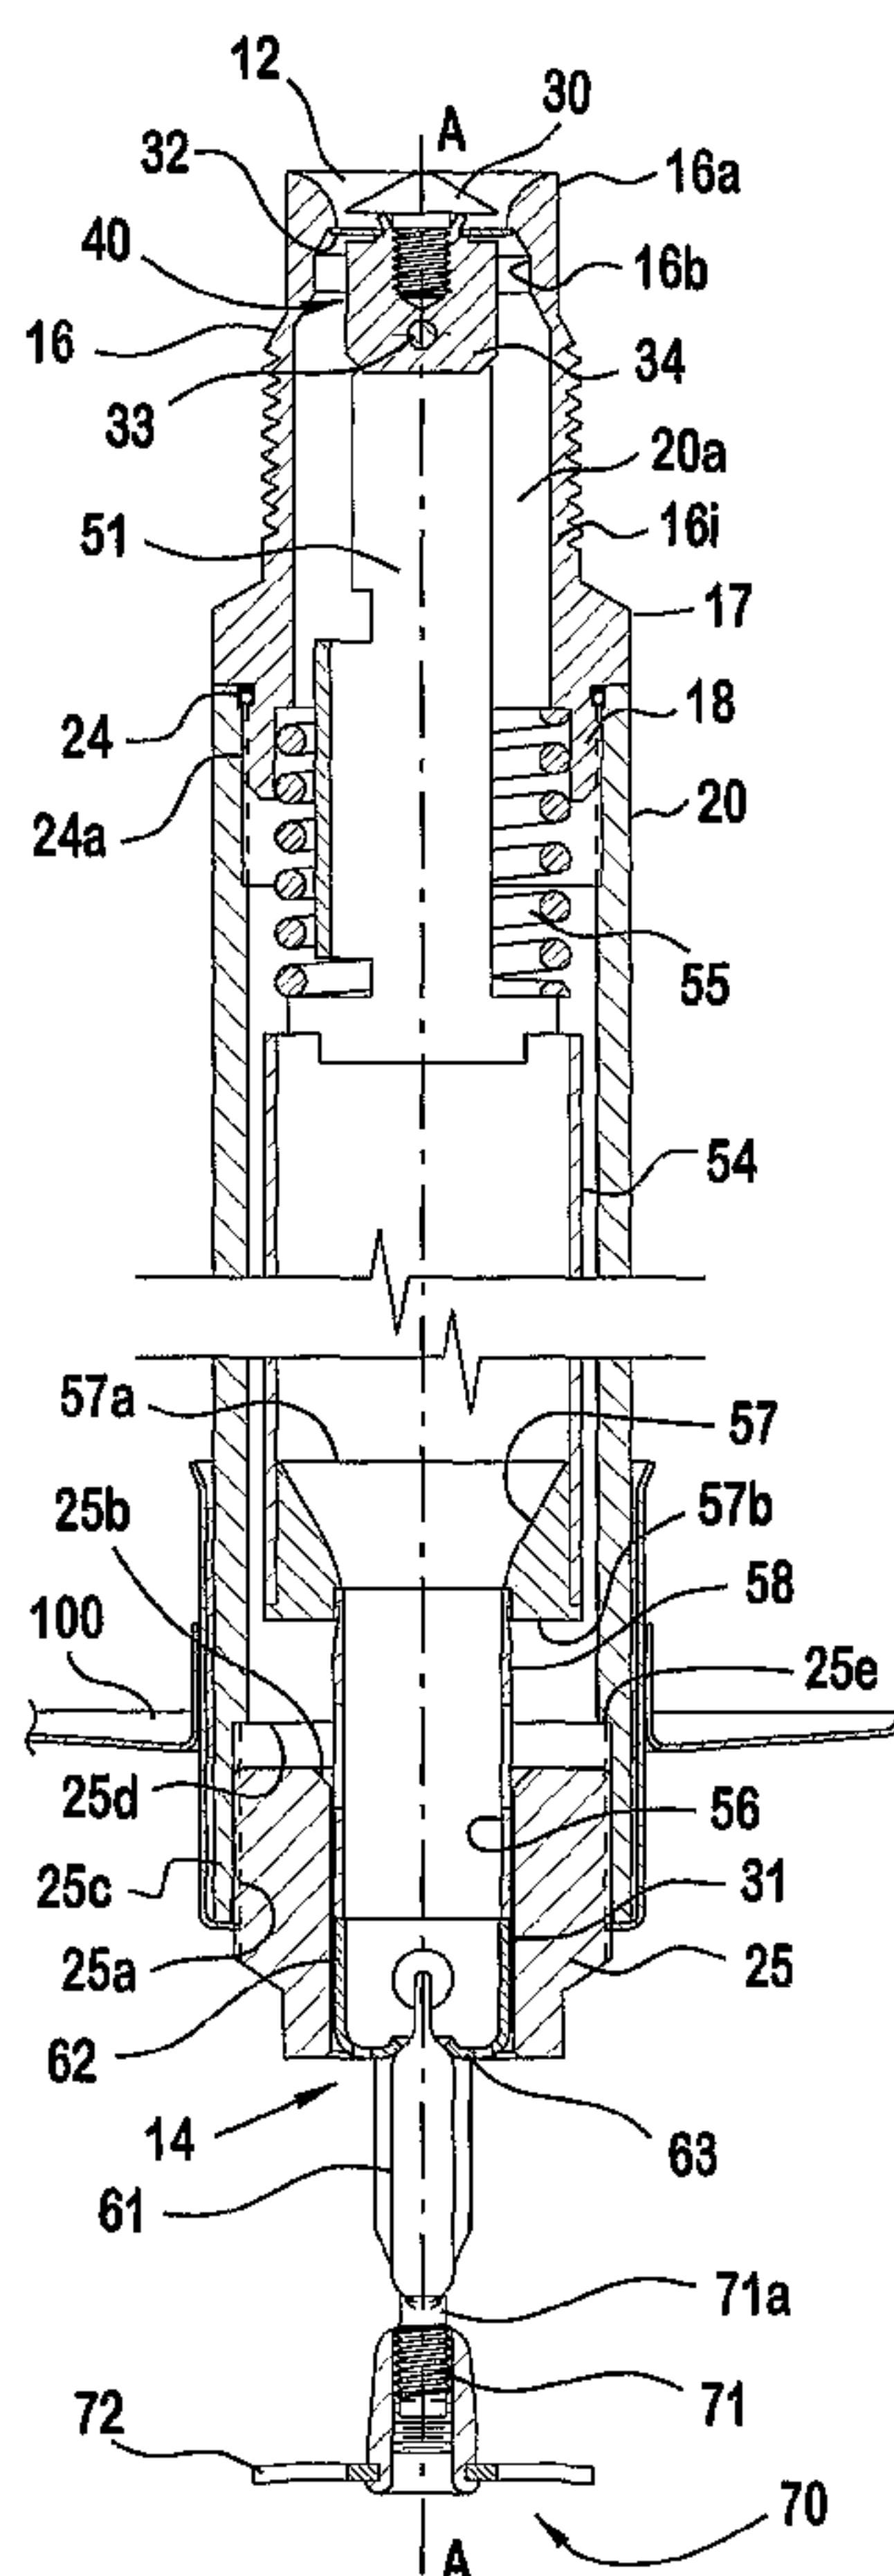

(57) Abstract: A dry sprinkler (10) is provided that includes a structure (20), a fluid deflecting structure (70), a locator (50), a metallic annulus (32) and a shield (30). The structure (20) defines a passageway (20a) extending along a longitudinal axis between an inlet (12) and an outlet (14). The structure (20) has a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge. The fluid deflecting structure (70) is proximate the outlet. The locator (50) is movable along the longitudinal axis between a first position and a second position. The locator (50) supports the metallic annulus (32). The metallic annulus includes first and second metallic surfaces (32a, 32b) spaced apart along the longitudinal axis between an inner and outer circumference (32c, 32d) with respect to the longitudinal axis. The shield has a first face (30a) exposed to the inlet and a second face (30b) confronting the first metallic surface (32a) to define a gap therebetween. Various methods are also described.

WO 2006/060341 A3

WO 2006/060341 A3



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:

1 March 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DRY SPRINKLER WITH A DIVERTER SEAL ASSEMBLY

5

Technical Field and Background

Automatic sprinkler systems are some of the most widely used devices for fire protection. These systems have sprinklers that are activated once the ambient
10 temperature in an environment, such as a room or building exceeds a predetermined value. Once activated, the sprinklers distribute fire-extinguishing fluid, preferably water, in the room or building. A sprinkler system is considered effective if it extinguishes or prevents growth of a fire. Failures of such systems may occur when the system has been rendered inoperative during building alternation or disuse, or the occupancy hazard has
15 been increased beyond initial system capability.

The fluid supply for a sprinkler system may be separate from that used by a fire department. An underground main for the sprinkler system enters the building to supply a riser. Connected at the riser are valves, meters, and, preferably, an alarm to sound when fluid flow within the system exceeds a predetermined minimum. At the top of a vertical
20 riser, a horizontally disposed array of pipes extends throughout the fire compartment in the building. Other risers may feed distribution networks to systems in adjacent fire compartments. Compartmentalization can divide a large building horizontally, on a single floor, and, vertically, floor to floor. Thus, several sprinkler systems may serve one building.

25 In the piping distribution network, branch lines carry the sprinklers. A sprinkler may extend up from a branch line, placing the sprinkler relatively close to the ceiling, or a sprinkler can be pendant below the branch line. For use with concealed piping, a flush-mounted pendant sprinkler may extend only slightly below the ceiling.

Fluid for fighting a fire can be provided to the sprinklers in various
30 configurations. In a wet-pipe system, for buildings having heated spaces for piping branch lines, all the system pipes contain water for immediate release through any sprinkler that is activated. In a dry-pipe system, which may include pipes, risers, and feed

mains, disposed in unheated open areas, cold rooms, passageways, or other areas exposed to freezing temperatures, such as unheated buildings in freezing climates or cold-storage rooms, branch lines and other distribution pipes may contain a dry gas (air or nitrogen) under pressure. This pressure of gas holds closed a dry pipe valve at the riser. When
5 heat from a fire activates a sprinkler, the gas escapes and the dry-pipe valve trips, water enters branch lines, and fire fighting begins as the sprinkler distributes the fluid.

Dry sprinklers are used where the sprinklers may be exposed to freezing temperatures. A dry sprinkler may include a threaded inlet containing a closure assembly, some length of tubing connected to the threaded inlet, and a fluid
10 deflecting structure located at the other end of the tubing. There may also be a mechanism that connects the thermally responsive component to the closure assembly. The threaded inlet is preferably secured to a branch line. Depending on the particular installation, the branch line may be filled with fluid (wet pipe system) or be filled with a gas (dry pipe system). In either installation, the medium within the branch line is
15 generally excluded from the tubing of the dry sprinkler via the closure assembly until activation of the thermally responsive component. In some dry sprinklers, when the thermally responsive component releases, the closure assembly or portions of the mechanism may be expelled from the tubing of the dry sprinkler by fluid pressure and gravity. In other types of dry sprinklers, the closure assembly is pivotally mounted to a
20 movable mechanism that is a tube structure, and the closure assembly is designed to pivot on a pin pivot axis transverse to the longitudinal axis of the dry sprinkler, while the tube structure is maintained within the tubing of the dry sprinkler.

In known dry sprinklers, a sealing plug has been provided as a component of a closure assembly to seal the inlet of the dry sprinkler. The sealing plug includes a
25 metallic annulus that has a face disposed about a central axis between an inner perimeter and outer perimeter. When the dry sprinkler is in an unactuated condition, the central axis of the sealing plug is generally parallel and aligned with the longitudinal axis of the tubing so that the metallic annulus is elastically deformed. Upon actuation of the dry sprinkler, the metallic annulus provides a force to assist in movement of the closure
30 assembly along the longitudinal axis of the tubing.

In order to utilize the sealing plug, an arrangement of components is provided within the known dry sprinklers. This arrangement of components positions the sealing

plug within the passageway defined by the tube structure to prohibit and allow fluid flow through the dry sprinkler. The sealing plug is positioned at the inlet to provide a seal of the inlet, and within the passageway to permit flow through the dry sprinkler. When the sealing plug is positioned to occlude the inlet, the arrangement of components orients the central axis of the sealing plug generally parallel to and aligned with the longitudinal axis. When the sealing plug is positioned within the passage to allow flow through the outlet of the dry sprinkler, the arrangement of components translates the sealing plug along the passageway.

Although the known dry sprinklers have employed a sealing plug with an elastically deformable metallic annulus to translate the closure assembly within the passageway, the arrangement of components, including the sealing plug, has been found to be inadequate for the performance of the dry sprinkler. Specifically, the inventors has discovered that the known arrangements of components apparently fail to provide a flow rate in which the known sprinklers were rated for in a fire protection system.

15 ***Summary of the Invention***

The present invention provides a dry sprinkler for a fire protection system. The present invention allows a dry sprinkler to operate over a range of start pressures for a rated K-factor. The present invention provides an operative dry sprinkler by maintaining a positive seal while the dry sprinkler is in a standby, i.e., unactuated mode, and by permitting a flow of at least 95% of the rated flow as determined by the product of the rated K-factor of the sprinkler and the square root of the pressure of the fluid fed to an inlet in pounds per square inch gauge when a heat responsive trigger actuates the dry sprinkler.

Certain exemplary embodiments can provide a dry sprinkler comprising:
 a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge; a fluid deflecting structure proximate the outlet at a first distance in an unactuated mode and at second distance in an actuated mode, the first and second distances being equal; and a diverter assembly disposed

in the structure, the diverter assembly including: a sealing member having first and second metallic surfaces spaced apart along the longitudinal axis between an inner and outer circumference, the first metallic surface having an orthogonal projection with respect to the longitudinal axis to define a first cross-sectional area about the longitudinal axis; a shield having a first surface disposed about the longitudinal axis, the first surface coupled to a base having a second surface confronting the first metallic surface to define a gap therebetween, the second surface having a second cross-sectional area disposed generally orthogonal about the longitudinal axis, the second cross-sectional area being less than the first cross-sectional area; and a mounting portion having a third face disposed generally orthogonally about the longitudinal axis to define a third cross-sectional area, the third cross-sectional area having a magnitude less than the first cross-sectional area; and a locator disposed in the passageway of the structure and fixed to the diverter assembly.

Certain exemplary embodiments can provide a dry sprinkler comprising: a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge; a fluid deflecting structure proximate the outlet at a first distance in an unactuated mode and at second distance in an actuated mode, the first and second distances being equal; a locator movable along the longitudinal axis between a first position and a second position; a metallic annulus being supported by the locator, the metallic annulus including first and second metallic surfaces spaced apart along the longitudinal axis between an inner and outer circumference with respect to the longitudinal axis, the metallic annulus occludes a flow of fluid through the passageway when the locator is proximate the first position; and a shield having a first surface exposed to the inlet and a second surface confronting the first metallic surface to define a gap therebetween.

Certain exemplary embodiments can provide a dry sprinkler having an unactuated mode and an actuated mode comprising: a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet

divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge; a fluid deflecting structure proximate the outlet at a first distance in the unactuated mode and at a second distance in the actuated mode, the first and second distances being equal; and means for establishing a generally symmetric fluid flow path about the longitudinal axis through the outlet at a flow rate of at least 95 percent of the rated K-factor multiplied by the square root of the pressure of the fluid flow fed into the inlet in pounds per square inch gauge, the means including: a locator having a tubular member with a first end, a second end and a channel extending between the first and second ends coaxially with the longitudinal axis to define a fluid passage, the locator being movable along the longitudinal axis between a first position and a second position; and a diverter assembly supported by the locator for occluding a flow of fluid through the passageway when the locator is in the first position, the diverter assembly including a mounting portion fixed to the locator such that the diverter assembly is not free to translate with respect to the locator.

Certain exemplary embodiments can provide a dry sprinkler comprising: a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge, the inlet including: a planar sealing surface disposed about and perpendicular to the longitudinal axis; an entrance surface disposed about the longitudinal axis, the entrance surface converging toward the longitudinal axis so as to define a curved profile intersecting the sealing surface, and a diverging surface disposed about the longitudinal axis, the diverging surface intersecting the sealing surface and defining a profile diverging from the longitudinal axis at an angle, the sprinkler further comprising: a fluid deflecting structure proximate the outlet at a first distance in an unactuated mode and at second distance in an actuated mode, the first and second distances being equal; a locator disposed within the structure for forming a flow path about the longitudinal axis such that the fluid flow through the outlet is at a flow rate of at least 95 percent of the rated K-factor multiplied by the square root of the pressure of the fluid flow fed into the inlet in pounds per square inch gauge, the locator being movable along the longitudinal axis

between a first position and a second position and having a tubular member, the tubular member having a first end, a second end and a channel extending between the first and second end coaxially to define a portion of the flow path; a mounting portion fixed at the first end of the tubular member such that mounting portion is not free to translate with
 5 respect to the locator when the locator moves between the first and second position; and a metallic annulus having an inner and outer circumference to define a central axis relative thereto, the metallic annulus being disposed on the mounting portion such that the central axis of the metallic annulus remains coaxial with the longitudinal axis when the locator moves from the first position to the second position, the metallic annulus
 10 including first and second metallic surfaces spaced apart along the central axis of the annulus between the inner and outer circumferences, a portion of the first metallic surface engaging the planar sealing surface of the inlet to occlude a flow of fluid through the passageway when the locator is in the first position.

Certain exemplary embodiments can provide a dry sprinkler having an
 15 unactuated state and an actuated state, the sprinkler comprising: an inlet fitting having an inner surface defining an inlet of the dry sprinkler, the inlet including a sealing surface; an outlet frame having an inner surface defining an outlet of the dry sprinkler; a casing tube having an inner surface, the casing tube coupling the inlet fitting to the outlet frame such that the inner surface of the inlet fitting, the inner surface of the outlet frame and the
 20 inner surface of the casing tube define a passageway extending along a longitudinal axis between the inlet and the outlet, the inner surface of the inlet fitting defining a first diameter of the passageway about the longitudinal axis and the inner surface of the casing tube defining a second diameter different from the first, the passageway defining a rated K-factor being an expected flow of fluid in gallons per minute from the outlet
 25 divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge; a fluid deflecting structure located at a fixed axial distance from the outlet such that the axial distance is the same in both the unactuated state and the actuated state; a diverter assembly disposed in the passageway, the diverter assembly including: a sealing member having first and second metallic
 30 surfaces axially spaced apart between an inner and outer circumference; a shield centered about the longitudinal axis, the shield having a first surface and a second surface confronting the first metallic surface; and a mounting portion engaged with the sealing member and the shield; and a locator disposed in the passageway to locate the diverter

assembly along the longitudinal axis such that in the unactuated state the sealing member is engaged with the sealing surface and in the actuated state the sealing member is located along a portion of the passageway spaced from the sealing surface, the locator further being fixed to the diverter assembly such that the shield remains centered about the longitudinal axis and does not translate with respect to the locator in the unactuated state and actuated state, the locator including two portions with a connector in between to space the two portions symmetrically apart about a locator axis that is generally coaxially aligned with the longitudinal axis, the connector defining a channel of the locator.

Certain exemplary embodiments can provide a dry sprinkler having an unactuated state and an actuated state, the sprinkler comprising: an inlet fitting having an inner surface defining an inlet of the dry sprinkler, the inlet including a sealing surface; an outlet frame having an inner surface defining an outlet of the dry sprinkler; a casing tube having an inner surface, the casing tube coupling the inlet fitting to the outlet frame such that the inner surface of the inlet fitting, the inner surface of the outlet frame and the inner surface of the casing tube define a passageway extending along a longitudinal axis between the inlet and the outlet, the inner surface of the inlet fitting defining a first diameter of the passageway about the longitudinal axis and the inner surface of the casing tube defining a second diameter different from the first, the passageway defining a rated K-factor being an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge; a fluid deflecting structure located at a fixed axial distance from the outlet such that the axial distance is the same in both the unactuated state and the actuated state; a diverter assembly disposed in the passageway, the diverter assembly including: a sealing member having first and second metallic surfaces axially spaced apart between an inner and outer circumference; a shield having an outer perimeter disposed about the longitudinal axis, the shield having a first surface and a second surface confronting the first metallic surface; and a mounting portion engaged with the sealing member and the shield; and a locator disposed in the passageway to locate the diverter assembly along the longitudinal axis such that in the unactuated state the sealing member is engaged with the sealing surface and in the actuated state the sealing member is located along a portion of the passageway spaced

from the sealing surface, the locator further being fixed to the diverter assembly such that the shield perimeter remains disposed about the longitudinal axis, the locator including two portions substantially symmetrically spaced apart about the longitudinal axis so as to define at least one opening disposed to one side of axis.

- 5 In other embodiments, a dry sprinkler is provided that includes a structure, a fluid deflecting structure, a diverter assembly and a locator assembly. The structure defines a passageway that extends along a longitudinal axis between an inlet and an outlet. The structure has a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid
- 10 fed into the inlet of the passageway in pounds per square inch gauge. The fluid deflecting structure is located proximate the outlet. The diverter assembly includes a sealing member, a shield and a mounting portion. The sealing member has first and

second metallic surfaces spaced apart along a longitudinal axis between an inner and outer circumference. The first metallic surface has an orthogonal projection with respect to the longitudinal axis to define a first cross-sectional area about the longitudinal axis. The shield has a first surface disposed about the longitudinal axis. The first surface
 5 is coupled to a base having a second surface confronting the first metallic surface to define a gap therebetween. The second surface has a second cross-sectional area disposed generally orthogonal about the longitudinal axis. The second cross-sectional area is less than the first cross-sectional area. The mounting portion has a third face disposed generally orthogonally about the longitudinal axis to define a third cross-
 10 sectional area. The third cross-sectional area has a magnitude less than the first cross-sectional area. The locator is disposed in the structure and fixed to the diverter assembly.

In other embodiments, a dry sprinkler is provided that includes a structure, a fluid deflecting structure, a locator, a metallic annulus and a shield. The structure defines a passageway extending along a longitudinal axis
 15 between an inlet and an outlet. The structure has a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge. The fluid deflecting structure is proximate the outlet. The locator is movable along the longitudinal axis between a first position and a second position. The
 20 locator supports the metallic annulus. The metallic annulus includes first and second metallic surfaces spaced apart along the longitudinal axis between an inner and outer circumference with respect to the longitudinal axis. The metallic annulus occludes a flow of fluid through the passageway when the locator is proximate the first position. The shield has a first face exposed to the inlet and a second face confronting the first
 25 metallic surface to define a gap therebetween.

In other embodiments, a dry sprinkler is provided. The dry sprinkler includes a structure, a fluid deflecting structure, a locator and means for establishing a generally symmetric fluid flow path about the longitudinal axis through the outlet at a flow rate of at least 95 percent of the rated K-factor multiplied by the square
 30 root of the pressure of the fluid flow fed into the inlet in pounds per square inch gauge. The structure defines a passageway extending along a longitudinal axis between an inlet and an outlet. The structure has a rated K-factor defining an expected flow of fluid in

gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge. The fluid deflecting structure is proximate the outlet. The locator is movable along the longitudinal axis between a first position and a second position.

5 In other embodiments, a method of operating a dry sprinkler is provided. The dry sprinkler includes a structure extending along a longitudinal axis between an inlet and an outlet. The structure includes a rated K-factor representing a flow of fluid from the outlet of the structure in gallons per minute divided by the square root of the pressure of the fluid fed into the inlet of the structure in pounds per square
10 inch gauge. The method can be achieved by locating a central axis of a diverter assembly generally coincident with respect to the longitudinal axis with the diverter assembly spaced apart from the inlet; and verifying that a rate of fluid flow from the outlet is approximately equal to 95 percent of the rated K-factor of the structure multiplied by the square root of the pressure of fluid in psig fed to the inlet of the
15 structure for each start pressure provided to the inlet prior to an actuation of the dry sprinkler at from approximately 0 to 175 psig.

Brief Description of the Drawings

The accompanying drawings, which are incorporated herein and constitute part of this specification, illustrate exemplary embodiments of the invention, and, together with
20 the general description given above and the detailed description given below, serve to explain the features of the invention.

Figures 1A-1D illustrate a preferred embodiment of the dry sprinkler.

Figure 2 illustrates the dry sprinkler of Figures 1A-1D in an installed configuration.

Detailed Description

As installed, a sprinkler is coupled to a piping network (not shown), which is supplied with a fire fighting fluid, e.g., fluid from a pressurized supply source. The preferred embodiments include dry sprinklers that are suitable for use such as, for example, with a dry pipe system. (e.g. that is the entire system is exposed to freezing
30 temperatures in an unheated portion of a building) or a wet pipe system {e.g. the sprinkler extends into an unheated portion of a building). Pipe systems may be

installed in accordance with the 2002 Edition of the National Fire Protection Association Standard for the Installation of Sprinkler Systems, NFPA 13 (2002 edition), which is incorporated by reference herein in its entirety.

Figures 1A, 1B, 1C, 1D, and 2 illustrate preferred embodiments of a dry sprinkler 10. The dry sprinkler 10 includes an outer structure assembly 20, outlet frame 25, locator 50, trigger 61, and fluid deflecting structure 70. The locator 50 includes a diverter assembly 40 and an inner assembly 501 (Fig. 1D). The sprinkler 10 can be mounted through a holder or escutcheon 100 as shown in a perspective view of Figure 2. The outer structure assembly 20 defines a passageway 20a that extends along a longitudinal axis A-A between an inlet 12 and an outlet 14. The longitudinal axis A-A can be a central axis of the geometric center of the outer structure with a generally constant cross-sectional area over an axial length along the longitudinal axis of the structure.

The outer structure assembly 20 includes the inlet fitting 16 coupled to a casing tube 24, and an outlet frame 25 coupled to the casing tube 24. The casing tube 24 has an inner casing tube surface 24a that cinctures part of the passageway 20a. According to the preferred embodiment, the inner casing tube surface 24a has complementary threads formed at one end that cooperatively engage first coupling threads 18 of the inlet fitting 16. The inner casing tube surface 24a has third coupling threads 24d formed proximate the other end of the casing tube 24. The threads 24d terminate at an interior portion 24e of the casing tube 24.

The casing tube 24 can be coupled to inlet fitting 16 and outlet frame 25 by any suitable technique, such as, for example, thread connections, crimping, bonding, welding, or by a pin and groove. A stop surface 17 can be provided as part of the inlet fitting 16. According to one configuration of the inlet, the outer inlet fitting surface 16a has fitting threads 16i formed proximate the inlet 12, and the inner inlet fitting surface 16b has first coupling threads formed distal to the threads 16i. The fitting threads are used for coupling the dry sprinkler to the piping network, and the inlet fitting 16 has an inlet entrance surface 16c. The inlet fitting 16a can be provided with at least one of $\frac{3}{4}$ inch, 1 inch, 1.25 inch NPT and 7-1 ISO (Metric) threads 16i formed thereon.

The inlet fitting 16 has an outer inlet fitting surface 16a and an inner inlet fitting surface 16b. The surface 16a cinctures part of the passageway 20a to define an entrance surface 16c and inlet sealing surface 16d. In one preferred embodiment, the

entrance surface 16c can include a convex profile that forms a compound curved surface intersecting a generally planar surface of the inlet sealing surface 16d. The inlet fitting 16 can have various different internal surface configurations proximate the entrance surface 16c, however, any suitable configuration may be employed. In the preferred embodiment
5 of Figure 1A, a radiused entrance surface 16c intersects the sealing surface 16d, and the entrance surface 16c can be a surface disposed about the longitudinal axis that has, in a cross-sectional view, a curved profile converging towards the longitudinal axis A-A.

Alternatively, entrance surface 16c can be a frustoconical surface disposed about the longitudinal axis that has, in a cross-sectional view, a linear profile converging
10 towards the longitudinal axis A-A. The sealing surface 16d intersects a surface 16e diverging, and preferably about 60 degrees, to the longitudinal axis A-A. The surface 16e intersects a surface 16b extending generally parallel to the longitudinal axis A-A. The generally parallel surface 16b intersects a diverging surface 16g, which intersects a surface 16h generally parallel to the longitudinal axis A-A.

15 According to the preferred embodiments, the inlet fitting 16 is provided with a radially projecting boss portion 17. The boss portion 17 provides a stop that limits relative threaded engagement between, for example, the inlet fitting 16 and the piping network, the inlet fitting 16 and the casing tube 24, or the outlet frame 25 and the casing tube 24.

20 According to a preferred embodiment, the inlet fitting 16 is provided with screw threads so that the inlet fitting 16 can be coupled to the casing tube 24 via the threaded portion 18. Alternatively, the inlet fitting 16 and the casing tube 24 can be formed as a unitary member such that thread portion 18 is not utilized. For example, the casing tube 24 can extend as a single tube from the inlet 12 to the outlet 14.

25 Alternatives to the threaded connection to secure the inlet to the casing can also be utilized such as other mechanical coupling techniques, which can include crimping or bonding. Additionally, either of the respective inner and outer surfaces of the inlet fitting 16, casing tube 24, and outlet frame 25 may be threaded so long as the mating part is cooperatively threaded on the opposite surface, i.e., threads on an inner
30 surface cooperate with threads on an outer surface.

The locator 50 can include a solid member of a predetermined cross-section such that fluid flows through an inner assembly 501. The locator 50, preferably, is disposed

within the tubular outer structure assembly 20, which includes the casing tube 24. The terms "tube" or "tubular," as they are used herein, denote an elongate member with a suitable cross-sectional shape transverse to the longitudinal axis A-A, such as, for example, circular, oval, or polygonal. Moreover, the cross-sectional profiles of the inner
5 and outer surfaces of a tube may be different.

The locator 50 is coupled to the inner assembly 501, which includes a fluid tube 54, a guide tube 56, and the trigger 61. In the non-actuated configuration, the locator 50 is coupled to the fluid tube 54, and the fluid tube 54 is coupled to the guide tube 56, and the guide tube 56 is coupled to the trigger seat 62 of the trigger 61. The locator
10 50 can locate the diverter assembly 40 with respect to the longitudinal axis A-A. The locator 50 has a first yoke support end 51a contacting the diverter assembly 40 and a second yoke support end 51b coupled to the fluid tube 54. The locator 50 may optionally include a biasing member that in a preferred embodiment includes an assist spring 55 to assist movement of the locator 50 from its unactuated position (Fig. 1A) to an
15 actuated position (Fig. 1D).

Referring to Figure 1C, the locator 50 has a central axis Y extending generally coincident with the longitudinal axis A-A. Locator 50 has two main portions 511 and 512 symmetric about the central axis Y. Each of the main portions has a first end and a second end 51a and 51b. A connecting portion 502a connects the main portions 511
20 and 512 between a first end 51a and a second end 51b of each of the main portions 511 and 512. The main portions 511 and 512 are each provided with an opening 51c extending along an axis P-P transversely intersecting the yoke axis Y. The diverter assembly 40 is fixed to the connector 33 so that the diverter assembly 40 is not free to translate with respect to the locator 50.

As shown in Figure 1C, the connecting portion 502a can be a single arcuate member connecting the main portions 511 and 512 on one side of the axis Y to form an elongate member having an arcuate channel extending between the ends of the main portions 511 and 512. Locator 50 has some freedom of movement relative to the fluid tube 54 as long as the fluid flow F through the inlet forms a generally
25 symmetric flow path about the locator 50.
30

In lieu of the connector 33 of the preferred embodiment, the diverter assembly 40 can be fixed to the locator 50 by a rivet, bolt and nut, screw, two pins, a protrusion

cooperating with a recess, or any suitable arrangement that prevents the diverter assembly 40 from rotating with respect to the locator 50 and also allows for compression of the metallic annulus 32 against the sealing surface 16d in a closed position of the dry sprinkler 10.

5 Due to the alignment of the diverter assembly 40 with the sealing surface 16d of the inlet fitting 16 in the closed position (Fig. 1A), locator 50 is generally coaxial with the longitudinal axis A-A in the closed position. Due to the assist spring 55 acting against the asymmetric connecting portion 502a, locator 50 translates along the longitudinal axis A-A in the open position of the dry sprinkler (Fig. 1D) such that the
10 outer circumference 32d of the metallic annulus 32 separates from the sealing surface 16d and circumscribes the longitudinal axis A-A to permit a flow of fluid around the shield 30 in a generally symmetric flow path through the passageway 20a.

Various configurations of the outlet frame can be used with the dry sprinklers of the preferred embodiments. Any suitable outlet frame, however, may be used so long as
15 the outlet frame positions a fluid deflecting structure proximate the outlet of the dry sprinkler. A preferred outlet frame 25 is shown in Figure 1A. Another preferred outlet frame 251 is shown in Figure 1D.

The outlet frame 25 has an outer outlet frame surface 25a and an inner outlet frame surface 25b, which surfaces cincture part of the passageway 20a. The outer
20 outlet frame surface 25a can be provided with coupling threads formed proximate one end of the outlet frame 25 that cooperatively engage coupling threads of the structure 20. The outlet frame 25 has an opening 31 so that an annular member, such as a trigger seat 62, can be mounted therein.

The other end of the outlet frame 25 can include at least one frame arm 27 that is
25 coupled to the fluid deflecting structure 70. Preferably, the outlet frame 25 and frame arms 27 are formed as a unitary member. The outlet frame 25, frame arms 27, and fluid deflecting structure 70 can be made from rough or fine casting, and, if desired, machined.

The thermal trigger 61 is disposed proximate to the outlet 14 of the sprinkler 10. Preferably, the trigger 61 is a frangible bulb that is interposed between a trigger seat 62
30 and the fluid deflecting structure 70. Alternatively, the trigger 61 itself can be a solder link, or any other suitable heat responsive arrangement instead of a frangible bulb. Instead of a frangible bulb or a solder link, the heat responsive trigger may be any

suitable arrangement of components that reacts to the appropriate condition(s) by actuating the dry sprinkler.

The trigger 61 operates to: (1) maintain the inner tubular assembly proximate the first position over the first range of temperatures between about minus 60 degrees Fahrenheit to about just below a temperature rating of the trigger; and (2) permit the inner tubular assembly to move along the longitudinal axis to the second position over a second range of temperatures at or greater than the temperature rating of the trigger. The temperature rating can be a suitable temperature such as, for example, about 134, 155, 175, 200, or 286 degrees Fahrenheit and plus-or-minus ($\pm$) 20% of each of the stated values.

The trigger seat 62 can be an annular member with a nub portion formed at one end of the trigger seat 62. The trigger seat 62 may also include a drain port 63. The nub portion has an interior cavity configured to receive a terminal end of the frangible bulb 61. The trigger seat 62 has a biasing spring 64 located in a groove 62a. The spring 64 is connected to the frame arms 27 of the fluid deflecting structure 70. A spacer (not shown) can be located between the second guide tube portion 58 and the trigger seat 62. The longitudinal thickness of the spacer would be selected to increase the travel of the locator 50 as it moves from the first position to the second position. In particular, the longitudinal thickness of the spacer would be selected to establish a predetermined travel of the locator 50 before the second end 57b of the first guide tube portion 57 comes to rest on the outlet frame 25.

The fluid deflecting structure 70 may include an adjustment screw 71 and a planar surface 74 coupled to the frame arms 27 of the outlet frame 25. The adjustment screw 71 is provided with external threads 73 that can be used to adjust an axial spacing between the trigger seat 62 and the frangible glass bulb 61. The adjustment screw 71 also has a screw seat portion 71a that engages the frangible bulb 61. Although the adjustment screw 71 and the planar surface member 74a have been described as separate parts, they can be formed as a unitary member.

A generally planar surface member 74 can be coupled to the adjustment screw 71. The planar surface member 74 can be provided with a plurality of tines 74a and a plurality of slots, which are disposed in a predetermined periodic pattern about the longitudinal axis A-A so as to deflect the fluid flow F to form an appropriate spray

pattern. Instead of a planar surface 74, other configurations could be employed to provide the desired fluid deflection pattern. Preferably, the member 74 includes a plurality of tines 74a disposed equiangularly about the longitudinal axis A-A that cooperates with deflecting arms 74b formed on the frame arm 27 to deflect fluid over a
5 desired coverage area.

The dry sprinkler 10 can extend for a predetermined length L from, for example, a ceiling, a wall, or a floor of an enclosed area. The length L can be any value, and preferably, between two to fifty inches depending on the application of the sprinkler 10.

10 To form a seal with the sealing surface 16d of the inlet fitting 16, a diverter assembly 40 can be used. The diverter assembly 40 includes a shield 30, a metallic annulus 32 and a mounting portion 34. The shield 30 includes a first face 30a and a second face 30b disposed about a central axis X-X. The central axis X-X preferably defines an axis of the diverter assembly 40, and more particularly, an axis
15 of the first face 30a. The first face 30a of the shield 30 extends continuously between the central axis X-X and an outer perimeter of the shield. The first face 30a forms an air gap with the inlet surface 16c and preferably forms an air gap with both the inlet surface 16c and the metallic annulus 32. Preferably, the first face 30a has circumference of about 0.5 inches with respect to the central axis X-X, the first face 30 defining a generally conic
20 surface that extends at an included angle θ of about 30 degrees with respect to the second face 30b with a tip portion of the conic surface having a radius of curvature R1 of about 0.125 inches with respect to the central axis X-X, where the tip portion is located at a distance "h" of about 1/8 inches from the second face 30b. The diverter assembly 40 also includes a resilient metallic annulus 32. The metallic annulus 32 includes a first metallic
25 surface 32a and a second metallic surface 32b spaced apart between an inner circumference 32c to an outer circumference 32d with respect to the central axis X-X. Preferably, the metallic annulus 32 is member that, in its uncompressed state, may have a frustoconical configuration with a base of the frustum facing the inlet, and in a compressed state, has a generally planar configuration with respect to its central axis X-
30 X. The metallic annulus 32 can be formed by a suitable resilient material that provides for an appropriate axial spring force as the diverter changes from a compressed to an uncompressed state. The resilient material for the diverter can be, for example, stainless

steel, beryllium, nickel or combinations thereof. A coating may be provided on the diverter such as, for example, synthetic rubber, Teflon[™], or nylon. The metallic annulus 32 can be disposed on the mounting portion 34 so that a third face 34a of the mounting portion 34 confronts the second metallic surface 32b of the metallic annulus 32. The third face 34a includes a boss portion 34b that supports the inner circumference 32c of the metallic annulus 32. The third face 34a also includes an extension portion 34c that extends between the inner circumference 32c of the metallic annulus 32 and the second face 30b of the shield 30. Preferably, the resilient material is a beryllium and nickel alloy categorized as UNS N03360, ½ hard.

The first face 30a and second face 30b of the shield 30 is preferably provided by a unitary member having a threaded shank portion 30c of about 0.2 inches in length along the central axis X-X that can be used to connect the first and second faces 30a, 30b to the mounting aperture 34d of the mounting portion 34. The second face 30b has a first cross-sectional area A1 orthogonal to the central axis X-X less than a second cross-sectional area A2 of the metallic annulus 32 as projected orthogonally with respect to the central axis X-X. The third face 34a of the mounting portion 34 has a third cross-sectional area A3 orthogonally with respect to the central axis X-X preferably the same as the first cross-sectional area A1.

The mounting portion 34 can be coupled to the locator 51 via a connector 33 fixed to both the mounting portion 34 and an opening 51c of the locator 51. Preferably, the mounting portion 34 is fixed to the locator 51 with a suitable connector, such as, for example, a rivet or threaded screw so that the mounting portion 34 is not rotatable about the connector 33.

The metallic annulus 32 of the diverter assembly 40, in conjunction with the sealing surface 16d of the inlet fitting 16, can form a seal against fluid pressure proximate the sealing surface 16d at any start pressure from approximately zero to approximately 175 psig so that the third face 34a of the mounting portion 34 facing the outlet 14 is generally free of fluid. In particular, a start pressure, i.e., an initial pressure present at the inlet when the dry sprinkler is actuated, can be at various start pressures. Preferably, the start pressure is at least 20 pounds per square inch (psig), and, more particular, greater than 100 psig.

Preferably, the dry sprinkler 10 has a rated discharge coefficient, or rated K-factor, that is at least 5.6, and, can be 8.0, 11.2, 14.0, 16.8, 14.4 or 25.5. However, any suitable value for the K-factor could be provided for the dry sprinkler of the preferred embodiments. As used herein, the discharge coefficient or K-factor is
5 quantified as a flow of fluid, preferably fluid, from the outlet 14 of the outer structure assembly 20, e.g., in gallons per minute (GPM), divided by the square root of the pressure of the fluid fed into the outer structure assembly 20, e.g., in pounds per square inch gauge (psig). The rated K-factor, or rated discharge coefficient is a mean value. The rated K-factors are expressed in standard sizes, which have an acceptable range,
10 which is approximately five percent or less deviation from the standard value over the range of pressures. For example, a "rated" K-factor of 11.2 encompasses all measured K-factors between 11.0 and 11.5. The K-factors of the preferred embodiment may decrease as the sprinkler length L increases. For example, when L is 48 inches, the K-factor of the dry sprinkler 10 can be reduced from 11.2 to approximately 10.2.

15 The K-factor allows for an approximation of flow rate to be expected from the outlet of a sprinkler based on the square root of the pressure of fluid fed into the inlet of the sprinkler. In relation to the preferred embodiments, the dry sprinkler of each of the preferred embodiments has a rated K-factor of at least 5.6. Based on the rated K-factor of the dry sprinkler of the preferred embodiments, each dry sprinkler has an
20 arrangement of components that allows for an actual minimum flow rate in gallons per minute (GPM) through the outlet as a product of the rated K-factor and the square root of the pressure in pounds per square inch gauge (psig) of the fluid fed into an inlet of the dry sprinkler of each preferred embodiment. Specifically, the preferred embodiment has an actual minimum flow rate from the outlet 14 of approximately equal to 95% of the
25 magnitude of a rated K-factor times the square root of the pressure of the flow of fluid fed into the inlet of each embodiment.

To minimize the restriction upon the fluid flowing through outer structure assembly 20 of the dry sprinkler 10, the diverter assembly 40 can include a suitable shape that presents as small a frontal area and as small a coefficient of drag as suitable when
30 the diverter assembly 40 is translated to the open position. In particular, a frontal surface area is provided by the first face 30a of the shield 30 and the metallic annulus 32. Preferably, by virtue of the shape of the first face 30a, a flow of fluid through the

inlet is diverted into a generally symmetrical flow path about the shield 30 when the locator is translated to a second position (Fig. 1D) in the structure 24. And more preferably, the flow of fluid is diverted by the shield 30 when the locator is translated to a second position so that a majority of the flow does not impinge upon the metallic surface 32a of the annulus 32 during operation of the dry sprinkler where the pressure of the fluid flow F is between 0 and 175 psig and the flow rate is about 95% of the rated K-factor times the square root of the pressure of the fluid fed to the inlet. In particular, the cross-sectional area A1 of the shield is less than the largest cross-sectional area A2 of the diverter assembly 40 and the height "h" of the shield and the angle of inclination θ with respect to an orthogonal axis relative to axis X-X are configured so that the majority of flow does not impinge upon operational flow of fluid through the dry sprinkler. In the preferred embodiments, the first face 30a is configured with the height "h" so that the face 30a does not extend past the outer periphery of inlet surface 16c.

The diverter assembly 40 is supported by contacting the mounting portion 34 against a portion of the locator 50 so that the metallic annulus 32 of the diverter assembly 40, in an unactuated position of the dry sprinkler 10, engages a sealing surface 16d of the inlet fitting 16. During engagement with the sealing surface 16d, the first metallic surface 32a of the metallic annulus 32 of the diverter assembly 40 is preferably compressed against the sealing surface 16d such that the central axis X-X of the metallic surface 32a is generally coaxial with the longitudinal axis A-A and the shield 30 acts to reduce the formation of an ice dam on the inlet surface 16c. When the dry sprinkler 10 is actuated by activation of the trigger 61 so that the metallic annulus 32 is biased from the sealing surface 16d, the metallic annulus 32 forms a generally truncated cone with its central axis X-X generally coaxial with the longitudinal axis A-A. Preferably, each of the inlet fitting, means for establishing a generally symmetric flow, the first face 30a or bias member 55 can be made of a copper, bronze, galvanized carbon steel, carbon steel, or stainless steel material.

In operation, when the trigger 61 is actuated, e.g., by shattering where the trigger is frangible bulb, the trigger 61 separates from the dry sprinkler 10. The separation of the trigger 61 removes the support for the locator 50 against the resilient spring force of the metallic annulus 32 or the mass of the fluid at the inlet 12. Consequently, the metallic

annulus 32 separates from the sealing surface 16d as the diverter assembly 40 translates along with the locator 50 and inner assembly 501. The axial force provided by the metallic annulus 32 or the spring 55 assists in separating the diverter assembly 40 from the inlet fitting 16. Thereafter, fluid or a suitable fire-fighting fluid is allowed to flow
5 through the inlet 12. Due to the configuration of the diverter assembly 40, including the first face 30a, fluid flow F through the inlet 12 to the outlet 14 forms a generally symmetric flow path about the axis A-A through a portion of the passageway 20a. Hence, the diverter assembly 40 and the locator 50 provide the means for establishing a generally symmetric fluid flow F path about the longitudinal axis A-A through the outlet
10 at a flow rate of at least 95 percent of the rated K-factor multiplied by the square root of the pressure of the fluid flow F fed to the inlet 12 in pounds per square inch gauge. Thereafter, the deflector 72 distributes the fluid flow F over a protection area below the sprinkler 10. It should be noted that the means, however, do not include any sealing member whose sealing member is positioned, in its entirety, offset or asymmetric
15 to the longitudinal axis A-A in the passageway 20a in either in the closed or opened position of the locator 50.

While the present invention has been disclosed with reference to certain preferred embodiments, numerous modifications, alterations, and changes to the described
embodiments are possible without departing from the sphere and scope of the present
20 invention, as defined in the appended claims. Accordingly, it is intended that the present invention not be limited to the described embodiments, but that it have the full scope defined by the language of the following claims, and equivalents thereof.

CLAIMS

1. A dry sprinkler comprising:

a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge;

a fluid deflecting structure proximate the outlet at a first distance in an unactuated mode and at second distance in an actuated mode, the first and second distances being equal; and

a diverter assembly disposed in the structure, the diverter assembly including:

a sealing member having first and second metallic surfaces spaced apart along the longitudinal axis between an inner and outer circumference, the first metallic surface having an orthogonal projection with respect to the longitudinal axis to define a first cross-sectional area about the longitudinal axis;

a shield having a first surface disposed about the longitudinal axis, the first surface coupled to a base having a second surface confronting the first metallic surface to define a gap therebetween, the second surface having a second cross-sectional area disposed generally orthogonal about the longitudinal axis, the second cross-sectional area being less than the first cross-sectional area; and

a mounting portion having a third face disposed generally orthogonally about the longitudinal axis to define a third cross-sectional area, the third cross-sectional area having a magnitude less than the first cross-section area; and

a locator disposed in the passageway of the structure and fixed to the diverter assembly.

2. A dry sprinkler comprising:

a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge;

a fluid deflecting structure proximate the outlet at a first distance in an unactuated mode and at second distance in an actuated mode, the first and second distances being equal;

5 a locator movable along the longitudinal axis between a first position and a second position;

a metallic annulus being supported by the locator, the metallic annulus including first and second metallic surfaces spaced apart along the longitudinal axis between an inner and outer circumference with respect to the longitudinal axis, the metallic annulus occludes a flow of fluid through the passageway when the locator is proximate the first
10 position; and

a shield having a first surface exposed to the inlet and a second surface confronting the first metallic surface to define a gap therebetween.

3. The dry sprinkler of any one of claims 1 or 2, wherein the structure comprises a tubular member disposed about the longitudinal axis.

15 4. The dry sprinkler of claim 3, wherein the locator comprises a yoke having wall portions symmetric to the longitudinal axis.

5. The dry sprinkler of claim 4, wherein the first surface of the shield comprises a generally conical surface disposed about an axis extending through the shield, the first surface including a first cross-sectional area disposed about the axis.

20 6. The dry sprinkler of claim 5, wherein the second surface of the shield comprises a generally planar surface disposed about the axis, the second surface including a second cross-sectional area disposed about the axis.

7. The dry sprinkler of claim 6, wherein the axis of the shield comprises an axis generally coincident with the longitudinal axis.

25 8. The dry sprinkler of claim 2, further comprising a mounting portion having a third surface spaced apart from the first and second surfaces of the shield and confronting the second metallic surface of the metallic annulus, wherein the shield

defines a first cross-sectional area and the metallic annulus defines a second cross-sectional area, the third surface of the mounting portion including a third cross-sectional area orthogonal about the longitudinal axis.

9. The dry sprinkler of claim 8, wherein each of the first and third cross-sectional areas having a magnitude less than the second cross-sectional area.
10. The dry sprinkler of claim 9, wherein the third surface comprises a portion that extends across the gap between the second surface and the metallic annulus.
11. The dry sprinkler of claim 1, wherein the locator comprises an elongate member disposed within the structure to support the diverter assembly.
12. The dry sprinkler of claim 11, wherein the locator is coupled to the diverter assembly by a pin disposed along an axis generally orthogonal to the longitudinal axis.
13. The dry sprinkler of any one of claims 1 or 2, wherein the inlet comprises a sealing surface disposed about the longitudinal axis proximate the inlet.
14. The dry sprinkler of claim 13, wherein the locator has a first non-actuated position and a second actuated position, and the first and second metallic surfaces define a plane generally orthogonal to the longitudinal axis, the first metallic surface being contiguous to the sealing surface of the inlet in the first position of the locator.
15. The dry sprinkler of claim 14, wherein the first and second metallic surfaces circumscribe the longitudinal axis to define a generally truncated cone with its base generally orthogonal to the longitudinal axis in the second position of the locator.
16. The dry sprinkler of claim 15, wherein the inlet comprises a generally cylindrical outer surface having one of $\frac{3}{4}$ inch, 1 inch, 1.25 inch NPT and 7-1 ISO threads formed thereon.
17. The dry sprinkler of claim 16, wherein the inlet further comprises a curved surface exposed to the inlet, the curved surface being connected to a generally planar sealing surface, the generally planar sealing surface being coupled to a truncated conical

surface facing the longitudinal axis adjacent the generally planer sealing surface, the truncated conical surface extending at an angle of about sixty degrees with respect to the longitudinal axis.

18. The dry sprinkler of claim 16, wherein the inlet comprises an entrance surface
5 having a first end and a second end disposed along and surrounding the longitudinal axis with a generally radiused surface of curvature and a seat surface adjacent the second end of the entrance surface that provides a seal in conjunction with the metallic annulus.

19. The dry sprinkler of claim 18, wherein the entrance surface comprises a convex
10 surface surrounding the longitudinal axis and the seat surface comprises a planar annulus surface surrounding the longitudinal axis.

20. The dry sprinkler of claim 19, wherein the inlet further comprises an oblique surface adjacent the planar annulus surface.

21. A dry sprinkler having an unactuated mode and an actuated mode comprising:
a structure defining a passageway extending along a longitudinal axis between an
15 inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge;
a fluid deflecting structure proximate the outlet at a first distance in the
unactuated mode and at a second distance in the actuated mode, the first and second
20 distances being equal; and

means for establishing a generally symmetric fluid flow path about the
longitudinal axis through the outlet at a flow rate of at least 95 percent of the rated K-
factor multiplied by the square root of the pressure of the fluid flow fed into the inlet in
pounds per square inch gauge, the means including:
25 a locator having a tubular member with a first end, a second end and a
channel extending between the first and second ends coaxially with the longitudinal axis
to define a fluid passage, the locator being movable along the longitudinal axis between a
first position and a second position; and

a diverter assembly supported by the locator for occluding a flow of fluid through the passageway when the locator is in the first position, the diverter assembly including a mounting portion fixed to the locator such that the diverter assembly is not
 5 free to translate with respect to the locator.

22. The dry sprinkler of claim 21, wherein the diverter assembly further includes:
 a metallic annulus having first and second metallic surfaces spaced apart along the longitudinal axis between an inner circumference and outer circumference with respect to the longitudinal axis, the metallic annulus occluding the flow of fluid through
 10 the passageway when the locator is proximate the first position;
 a shield having a first face exposed to the inlet, a second face confronting the first metallic surface to define a gap therebetween; and
 the mounting portion supporting the metallic annulus and the shield, the mounting portion further having a third face confronting the second metallic surface.
- 15 23. The dry sprinkler of claim 22, wherein the first face comprises a generally conical surface disposed about an axis extending through the first face, the first face including a first cross-sectional area disposed about the axis, the first metallic surface having an orthogonal projection defining a second cross-sectional area disposed about the axis, the third face of the mounting portion including a generally planar surface
 20 disposed about the axis defining a third cross-sectional area disposed about the axis, and each of the first and third cross-sectional areas having a magnitude less than the second cross-sectional area.
24. The dry sprinkler of claim 23, wherein the mounting portion comprises a portion that extends across the gap between the second face and the first metallic surface.
- 25 25. The dry sprinkler of claim 24, wherein the structure comprises a tubular member disposed about the longitudinal axis and the locator comprises a yoke having wall portions symmetric to the longitudinal axis.
26. The dry sprinkler of claim 25, wherein the inlet comprises a sealing surface disposed about the longitudinal axis proximate the inlet.

27. The dry sprinkler of claim 26, wherein the first and second metallic surfaces comprise a planar surface generally orthogonal to the longitudinal axis, the first metallic surface being contiguous to the sealing surface in the first position of the locator.

28. The dry sprinkler of claim 27, wherein the first and second metallic surfaces
5 circumscribe the longitudinal axis to define a cone with its base generally orthogonal to the longitudinal axis in the second position of the locator.

29. A dry sprinkler comprising:

a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected
10 flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge, the inlet including:

a planar sealing surface disposed about and perpendicular to the longitudinal axis;

15 an entrance surface disposed about the longitudinal axis, the entrance surface converging toward the longitudinal axis so as to define a curved profile intersecting the sealing surface, and

a diverging surface disposed about the longitudinal axis, the diverging surface intersecting the sealing surface and defining a profile diverging from
20 the longitudinal axis at an angle, the sprinkler further comprising:

a fluid deflecting structure proximate the outlet at a first distance in an unactuated mode and at second distance in an actuated mode, the first and second distances being equal;

a locator disposed within the structure for forming a flow
25 path about the longitudinal axis such that the fluid flow through the outlet is at a flow rate of at least 95 percent of the rated K-factor multiplied by the square root of the pressure of the fluid flow fed into the inlet in pounds per square inch gauge, the locator being movable along the longitudinal axis between a first position and a second position and having a tubular member, the tubular member having a first end, a second end and a
30 channel extending between the first and second end coaxially to define a portion of the flow path;

a mounting portion fixed at the first end of the tubular member such that mounting portion is not free to translate with respect to the locator when the locator moves between the first and second position; and

a metallic annulus having an inner and outer circumference to
 5 define a central axis relative thereto, the metallic annulus being disposed on the mounting portion such that the central axis of the metallic annulus remains coaxial with the longitudinal axis when the locator moves from the first position to the second position, the metallic annulus including first and second metallic surfaces spaced apart along the central axis of the annulus between the inner and outer circumferences, a
 10 portion of the first metallic surface engaging the planar sealing surface of the inlet to occlude a flow of fluid through the passageway when the locator is in the first position.

30. The dry sprinkler of claim 36, further comprising a shield defining a central axis coaxial with the longitudinal axis, the shield connected to the mounting portion such that the shield forms a gap with the first metallic surface of the metallic annulus and the
 15 central axis of the shield remains coaxial with the longitudinal axis when the locator moves from the first position to the second position.

31. The dry sprinkler of claim 1, wherein the inlet of the passageway includes:
 a planar sealing surface disposed about and perpendicular to the longitudinal axis;
 an entrance surface disposed about the longitudinal axis, the entrance surface
 20 converging toward the longitudinal axis so as to define a curved profile intersecting the sealing surface, and
 a diverging surface disposed about the longitudinal axis, the diverging surface intersecting the sealing surface and defining a profile diverging from the longitudinal axis at an angle.

25 32. A dry sprinkler having an unactuated state and an actuated state, the sprinkler comprising:

an inlet fitting having an inner surface defining an inlet of the dry sprinkler, the inlet including a sealing surface;

an outlet frame having an inner surface defining an outlet of the dry
 30 sprinkler;

a casing tube having an inner surface, the casing tube coupling the inlet fitting to the outlet frame such that the inner surface of the inlet fitting, the inner surface of the outlet frame and the inner surface of the casing tube define a passageway

5 extending along a longitudinal axis between the inlet and the outlet, the inner surface of the inlet fitting defining a first diameter of the passageway about the longitudinal axis and the inner surface of the casing tube defining a second diameter different from the first, the passageway defining a rated K-factor being an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid
10 fed into the inlet of the passageway in pounds per square inch gauge;

a fluid deflecting structure located at a fixed axial distance from the outlet such that the axial distance is the same in both the unactuated state and the actuated state;

a diverter assembly disposed in the passageway, the diverter assembly including:

15 a sealing member having first and second metallic surfaces axially spaced apart between an inner and outer circumference;

a shield centered about the longitudinal axis, the shield having a first surface and a second surface confronting the first metallic surface; and

a mounting portion engaged with the sealing member and the
20 shield; and

a locator disposed in the passageway to locate the diverter assembly along the longitudinal axis such that in the unactuated state the sealing member is engaged with the sealing surface and in the actuated state the sealing member is located along a portion of the passageway spaced from the sealing surface, the locator further being fixed to the
25 diverter assembly such that the shield remains centered about the longitudinal axis and does not translate with respect to the locator in the unactuated state and actuated state, the locator including two portions with a connector in between to space the two portions symmetrically apart about a locator axis that is generally coaxially aligned with the longitudinal axis, the connector defining a channel of the locator.

30 33. The dry sprinkler of claim 32, wherein the K-factor is greater than 14.

34. The dry sprinkler of claim 33, wherein the K-factor is 16.8.

35. The dry sprinkler of claim 32, further comprising a trigger to support the locator in the unactuated state, the trigger having a temperature rating of any one of 134, 155, 175, 200 or 286 degrees Fahrenheit.

36. The dry sprinkler of claim 32, wherein the inlet fitting includes threads for
5 connecting to a piping network, the threads being any one of NPT and 7-1 ISO (Metric) threads.

37. A dry sprinkler having an unactuated state and an actuated state, the sprinkler comprising:

an inlet fitting having an inner surface defining an inlet of the dry
10 sprinkler, the inlet including a sealing surface;

an outlet frame having an inner surface defining an outlet of the dry
sprinkler;

a casing tube having an inner surface, the casing tube coupling the inlet
fitting to the outlet frame such that the inner surface of the inlet fitting, the inner surface
15 of the outlet frame and the inner surface of the casing tube define a passageway
extending along a longitudinal axis between the inlet and the outlet, the inner surface of
the inlet fitting defining a first diameter of the passageway about the longitudinal axis
and the inner surface of the casing tube defining a second diameter different from the
first, the passageway defining a rated K-factor being an expected flow of fluid in gallons
20 per minute from the outlet divided by the square root of the pressure of the flow of fluid
fed into the inlet of the passageway in pounds per square inch gauge;

a fluid deflecting structure located at a fixed axial distance from the outlet
such that the axial distance is the same in both the unactuated state and the actuated state;

a diverter assembly disposed in the passageway, the diverter assembly
25 including:

a sealing member having first and second metallic surfaces axially
spaced apart between an inner and outer circumference;

a shield having an outer perimeter disposed about the longitudinal
axis, the shield having a first surface and a second surface confronting the first metallic
30 surface; and

a mounting portion engaged with the sealing member and the
shield; and

a locator disposed in the passageway to locate the diverter assembly along the longitudinal axis such that in the unactuated state the sealing member is engaged with the sealing surface and in the actuated state the sealing member is located along a portion of the passageway spaced from the sealing surface, the locator further being fixed to the diverter assembly such that the shield perimeter remains disposed about the longitudinal axis, the locator including two portions substantially symmetrically spaced apart about the longitudinal axis so as to define at least one opening disposed to one side of axis.

38. The dry sprinkler of claim 37, wherein the sealing surface is planar, disposed about and perpendicular to the longitudinal axis; the inlet including an entrance surface disposed about the longitudinal axis, the entrance surface converging toward the longitudinal axis so as to define a curved profile intersecting the sealing surface, the inlet further including a diverging surface disposed about the longitudinal axis, the diverging surface intersecting the sealing surface and defining a profile diverging from the longitudinal axis at an angle.

39. The dry sprinkler of claim 37, wherein the locator including a connector portion disposed to one side of the longitudinal axis connecting the two spaced apart portions so as to define a locator axis that is generally coincident with the longitudinal axis.

40. The dry sprinkler of claim 37, wherein the actuated state, the shield does not translate relative to the locator.

41. A dry sprinkler comprising:

a structure defining a passageway extending along a longitudinal axis between an inlet and an outlet, the structure having a rated K-factor defining an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of

5 fluid fed into the inlet of the passageway in pounds per square inch gauge;

a fluid deflecting structure proximate the outlet;

a trigger assembly proximate the outlet that has an actuated and unactuated position;

and

the fluid deflecting structure located at a fixed axial distance from the outlet such that

10 the axial distance is the same in both an unactuated state and an actuated state; and

a diverter assembly disposed within the passageway between the inlet and the outlet when the trigger assembly is in the actuated and unactuated position, the diverter assembly including:

a sealing member having first and second metallic surfaces spaced apart along
15 the longitudinal axis between an inner and outer circumference of the sealing member, the first metallic surface having an orthogonal projection with respect to the longitudinal axis to define a first cross-sectional area about the longitudinal axis the first metallic surface being located along the longitudinal axis between the inlet and the second metallic surface;

a shield having a first surface disposed about the longitudinal axis, the first
20 surface coupled to a base having a second surface confronting the first metallic surface to define a gap there between, the second surface having a second cross-sectional area disposed generally orthogonal about the longitudinal axis, the second cross-sectional area being less than the first cross-sectional area; and

a mounting portion having a third surface disposed generally orthogonally
25 about the longitudinal axis to define a third cross-sectional area, the third cross-sectional area having a magnitude less than the first cross-sectional area; and

a locator disposed in the structure and fixed to the diverter assembly.

42. A dry sprinkler having an unactuated state and an actuated state, the sprinkler comprising:

an inlet fitting having an inner surface defining an inlet of the dry sprinkler, the inlet including a sealing surface;

5 an outlet frame having an inner surface defining an outlet of the dry sprinkler;

a casing tube having an inner surface, the casing tube coupling the inlet fitting to the outlet frame such that the inner surface of the inlet fitting, the inner surface of the outlet frame and the inner surface of the casing tube define a passageway extending along a longitudinal axis between the inlet and the outlet, the inner surface of the inlet fitting
10 defining a first diameter of the passageway about the longitudinal axis and the inner surface of the casing tube defining a second diameter different from the first, the passageway defining a rated K-factor being an expected flow of fluid in gallons per minute from the outlet divided by the square root of the pressure of the flow of fluid fed into the inlet of the passageway in pounds per square inch gauge;

15 a fluid deflecting structure located at a fixed axial distance from the outlet such that the axial distance is the same in both the unactuated state and the actuated state;

a diverter assembly disposed within the passageway in both the unactuated state and the actuated state, the diverter assembly having a generally conical surface and a sealing member, the generally conical surface having an angle of inclination with respect to
20 an orthogonal axis relative to the longitudinal axis and a height along the longitudinal axis so that in an unactuated state an imaginary extension of the generally conical surface circumscribes the sealing member, the sealing member having first and second metallic surfaces, one of the first and second metallic surfaces providing a sealing member surface facing the sealing surface and defining an outer peripheral edge of the sealing member
25 disposed about the longitudinal axis; and

a locator including a tubular inner assembly, the locator disposed in the passageway to locate the outer peripheral edge of the sealing member to circumscribe the longitudinal axis in both the unactuated and actuated states, with the sealing member engaged with the sealing surface in the unactuated state, and with the sealing member

located along a portion of the passageway spaced from the sealing surface in the actuated state, the locator being coupled to the diverter assembly such that fluid flow through the outlet in the actuated state is at a flow rate of at least 95 percent of the rated K-factor multiplied by the square root of the pressure of the fluid flow fed into the inlet in pounds per square inch gauge.


43. The dry sprinkler of claim 42, wherein the angle of inclination of the generally conical surface allows the fluid flow fed into the inlet to flow along a generally symmetric fluid flow so that a majority of the fluid avoids impingement with the sealing member.

44. The dry sprinkler of claims 42 or 43, wherein the angle of inclination is about 30 degrees.

45. The dry sprinkler of claim 44, wherein the rated K-factor comprises at least 14.0.

46. The dry sprinkler of claim 42, wherein the rated K-factor comprises at least 14.0.

47. The dry sprinkler of claims 42 or 46, wherein the diverter assembly comprises a shield, the shield having a first surface providing the generally conical surface disposed about the longitudinal axis, the first surface coupled to a base having a second surface confronting the first metallic surface to define a gap there between.

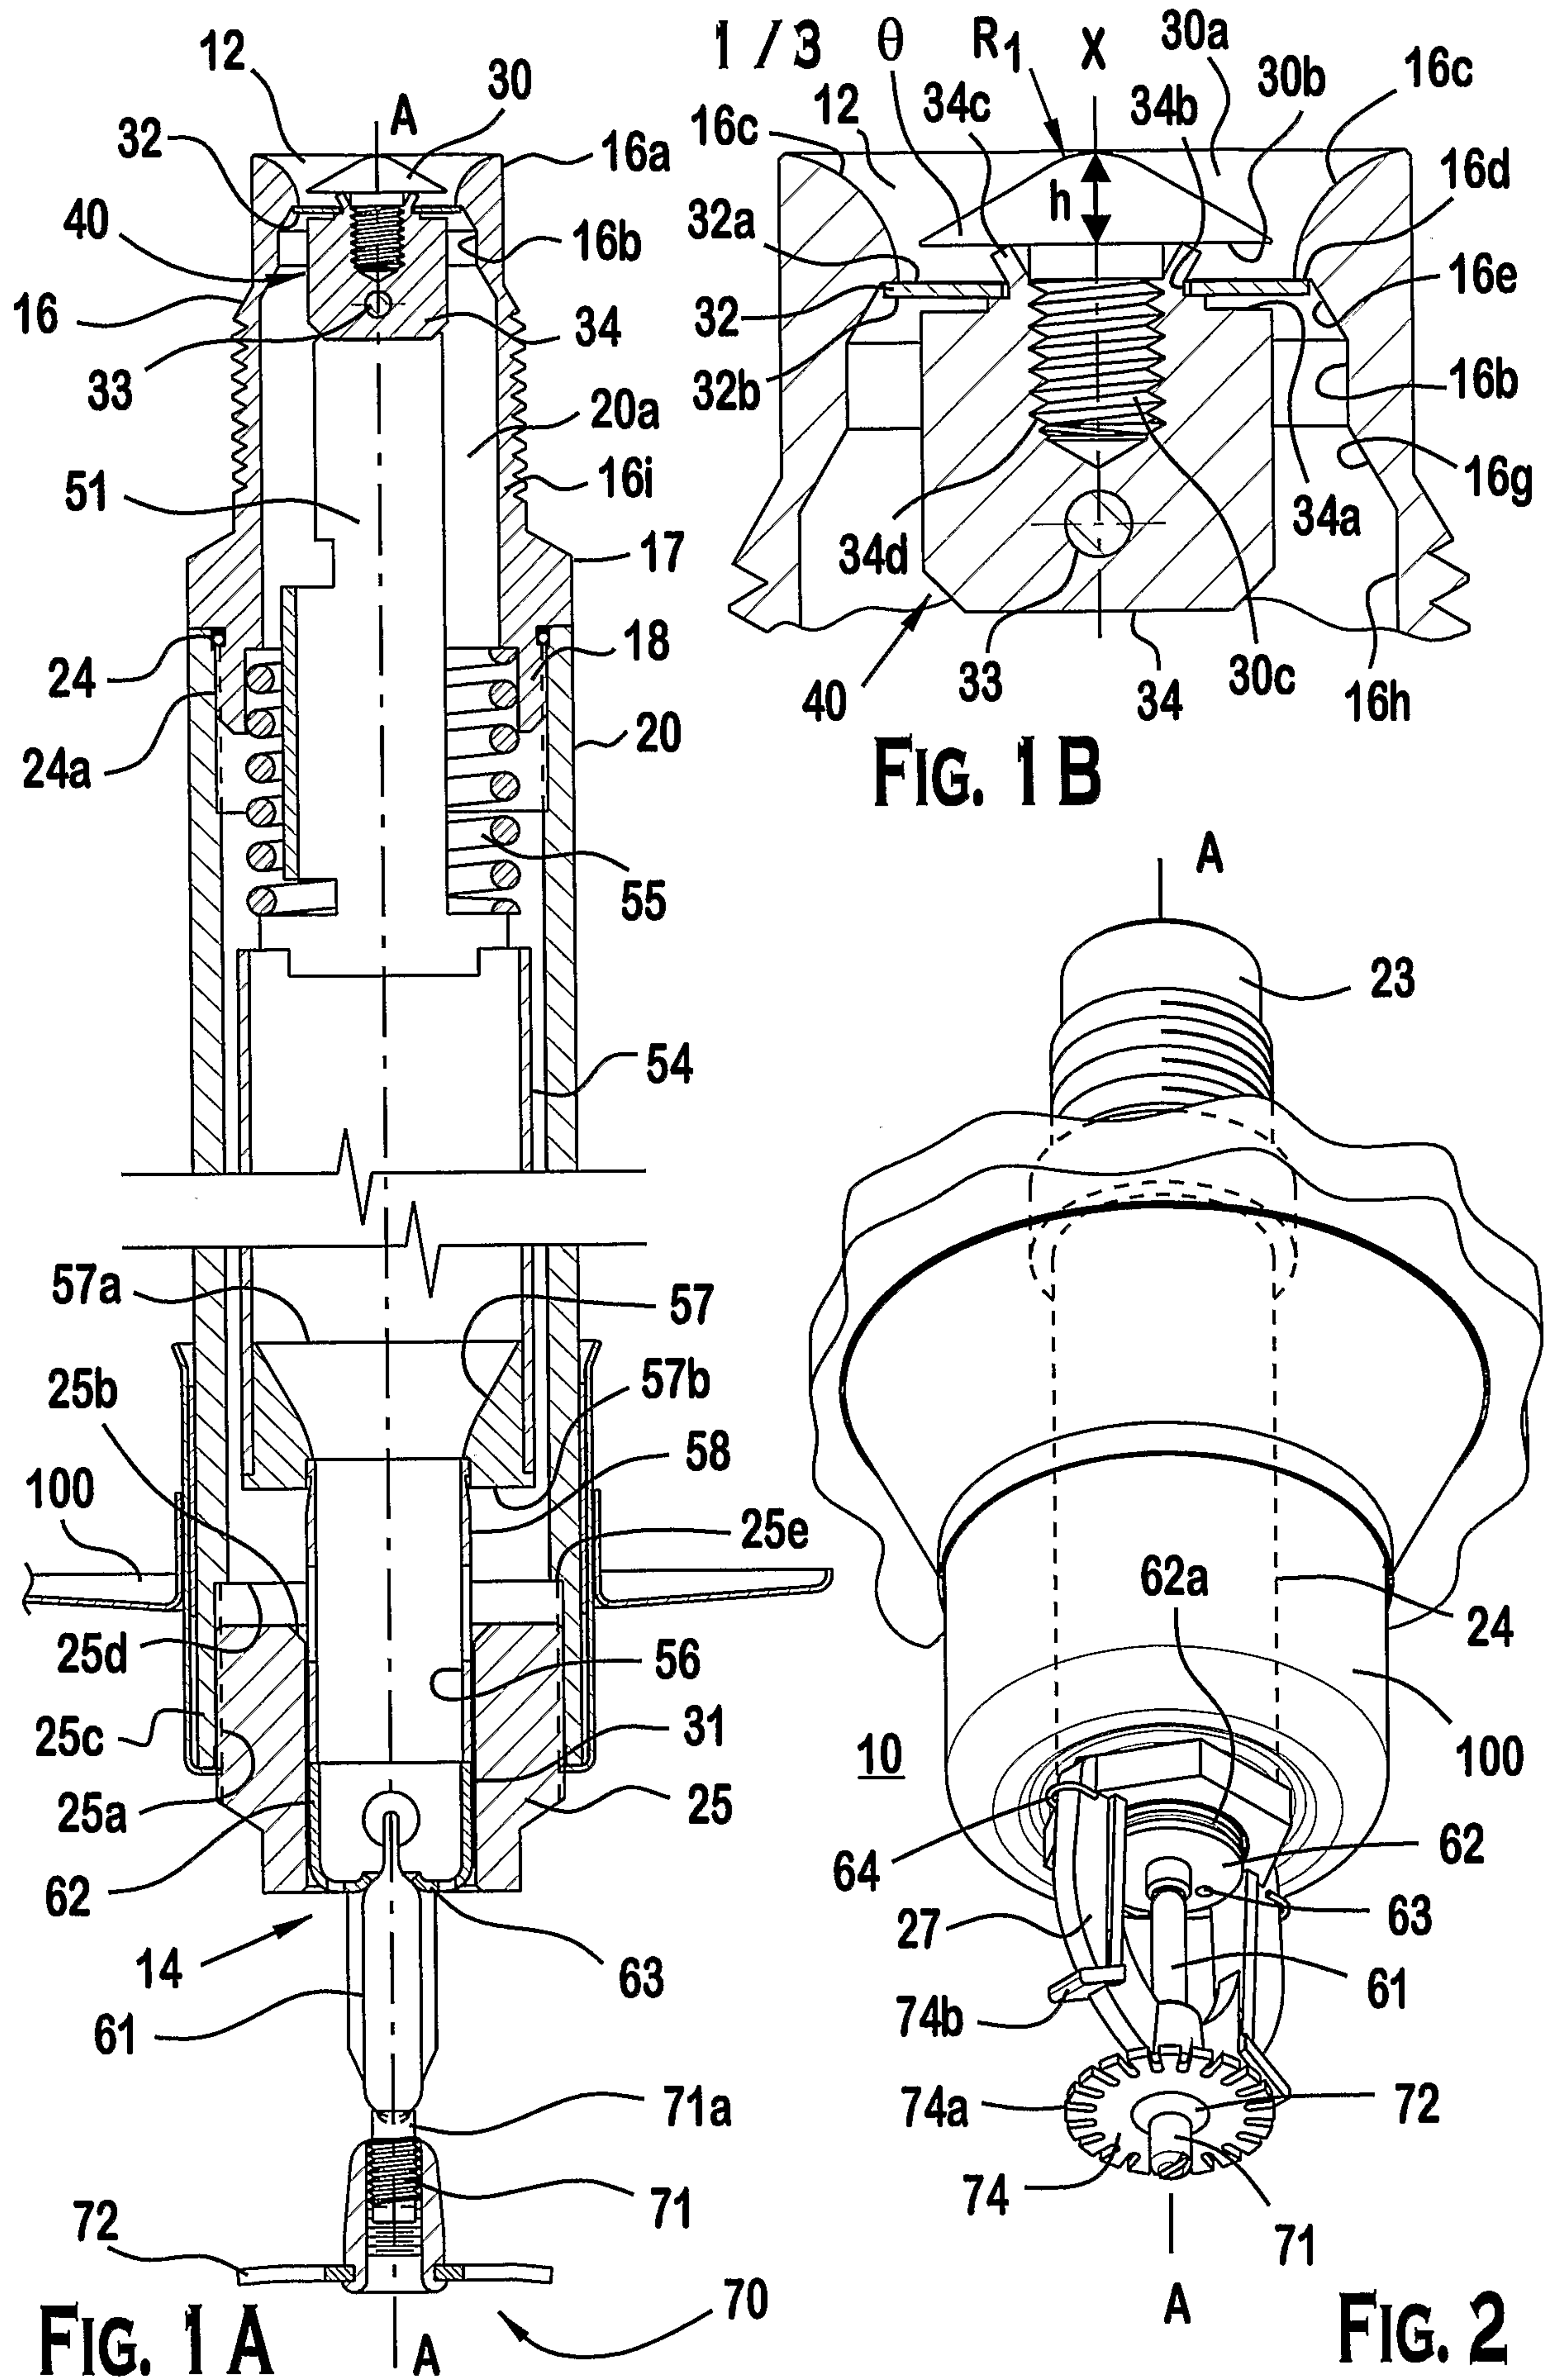

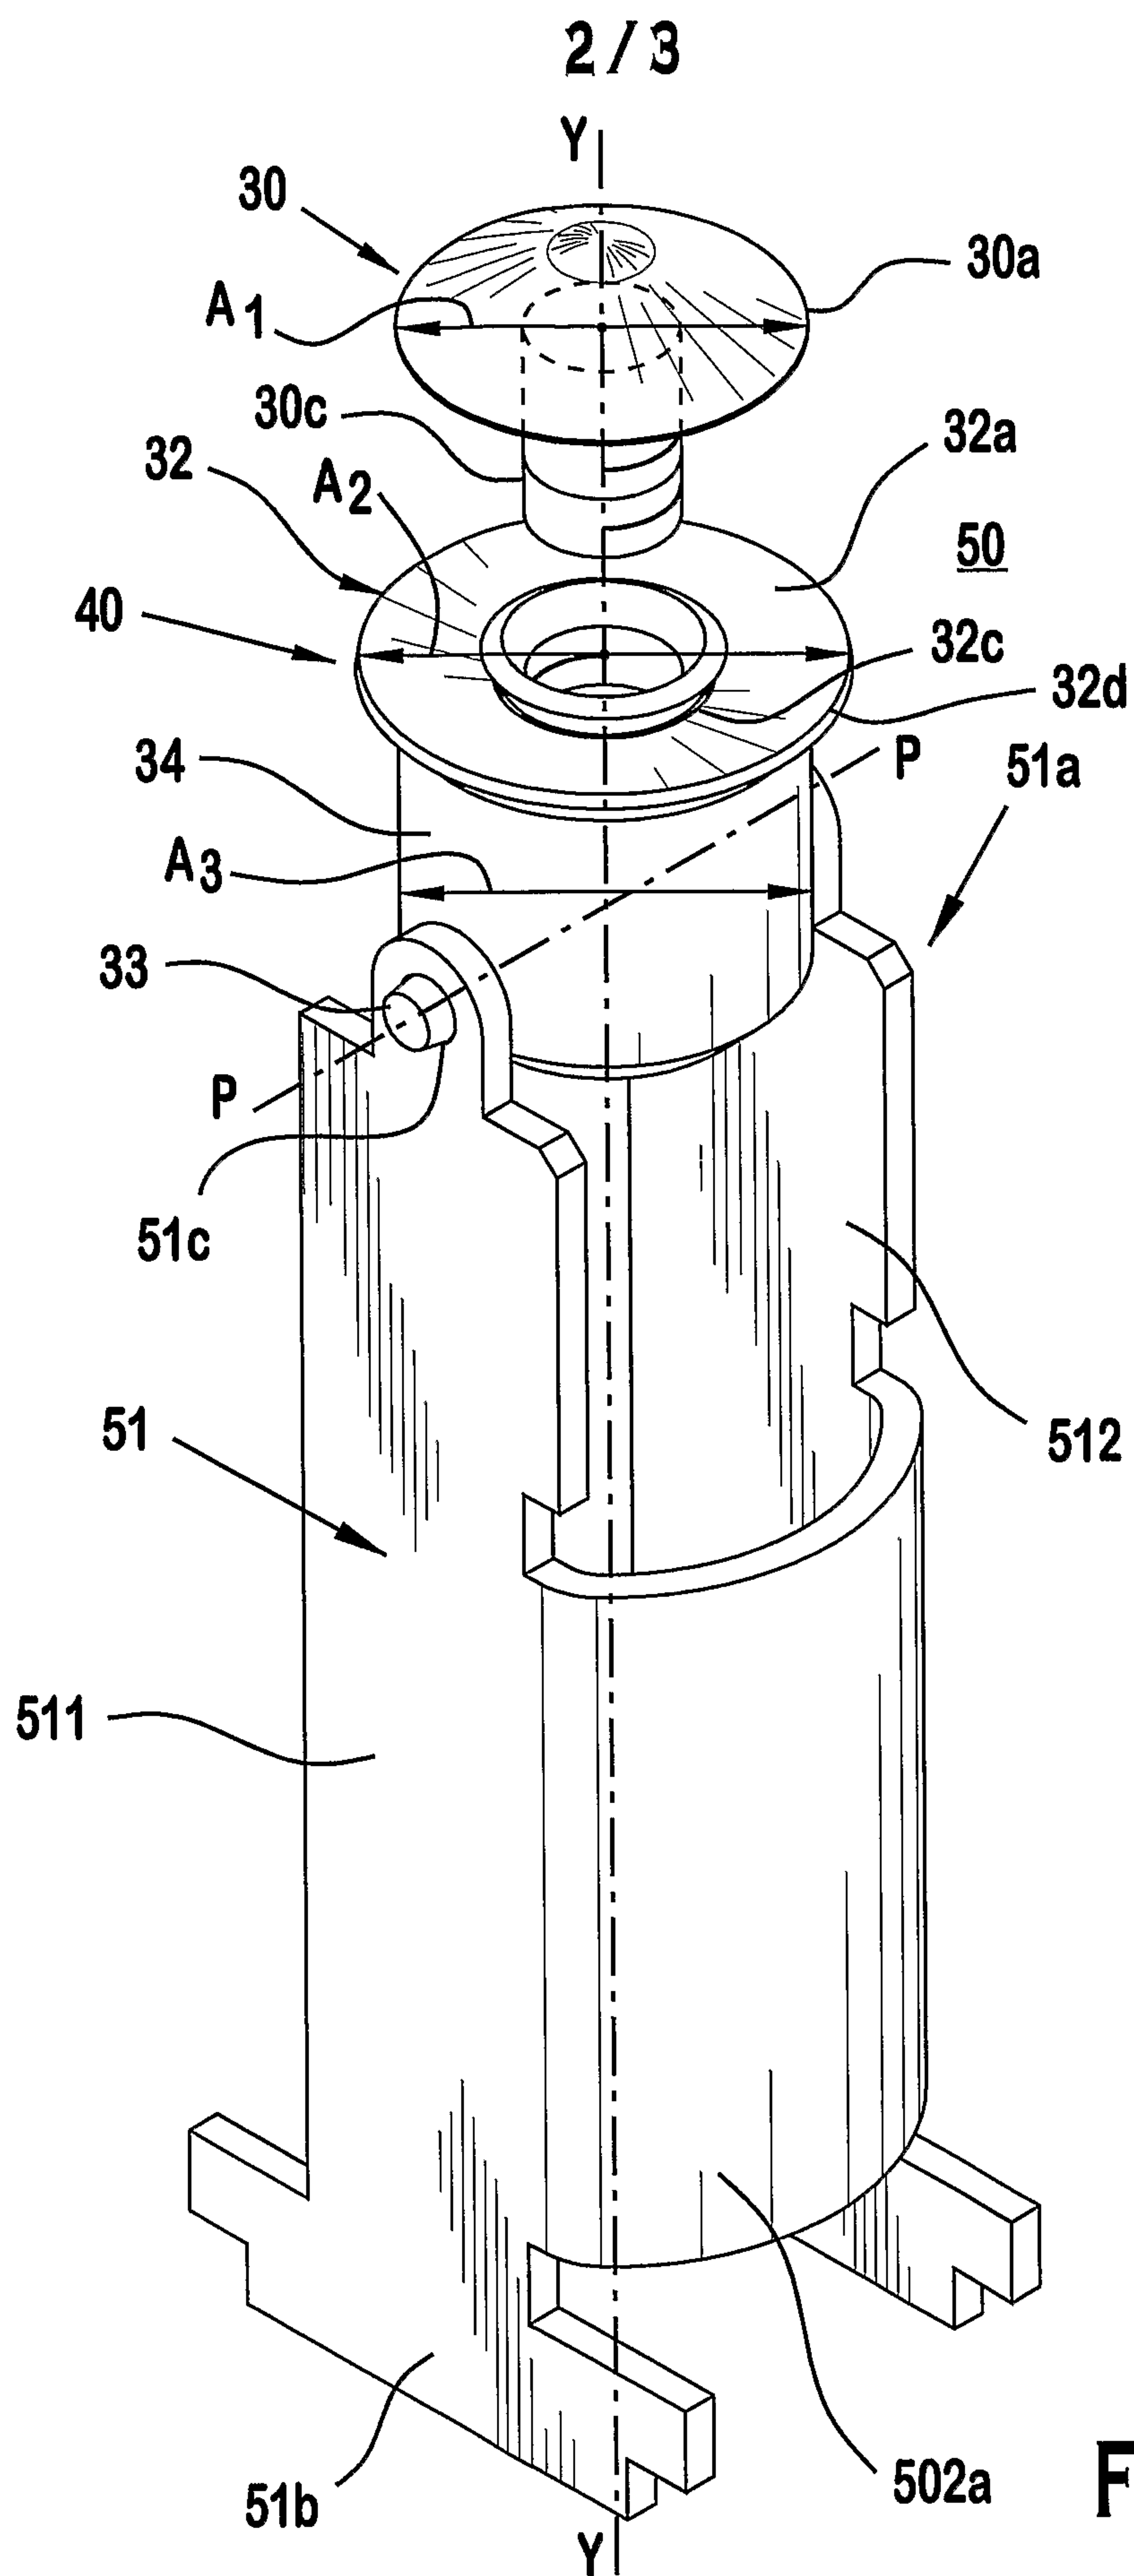


FIG. 1 C

