




- (51) International Patent Classification:  
C25B 15/08 (2006.01)
- (21) International Application Number:  
PCT/CA2005/001684
- (22) International Filing Date:  
2 November 2005 (02.11.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/522,737 2 November 2004 (02.11.2004) US  
60/594,869 13 May 2005 (13.05.2005) US
- (71) Applicant (for all designated States except US):  
HY-DRIVE TECHNOLOGIES LTD. [CA/CA]; 6760  
Campobello Road, Mississauga, Ontario L5N 2L8 (CA).
- (71) Applicant (for AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES,  
FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,  
RO, SE, SI, SK, TR only): GASKATEL GMBH [DE/DE];  
Hollandische Strasse 195, Gebaude M 11, D-34127 Kassel  
(DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HELMKE,  
Joachim [DE/DE]; An der Wange 7, D-34379 Calden  
(DE). SAUER, Gerhard [DE/DE]; Hollandische Strasse  
195, Gebaude M 11, D-34127 Kassel (DE).
- (74) Agent: BENNETT JONES LLP; Attention: Roseann B.  
Caldwell, 4500 Bankers Hall East, 855 2nd Street SW, Cal-  
gary, Alberta T2P 4K7 (CA).
- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,  
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,  
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,  
SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: ELECTROLYSIS CELL ELECTROLYTE PUMPING SYSTEM

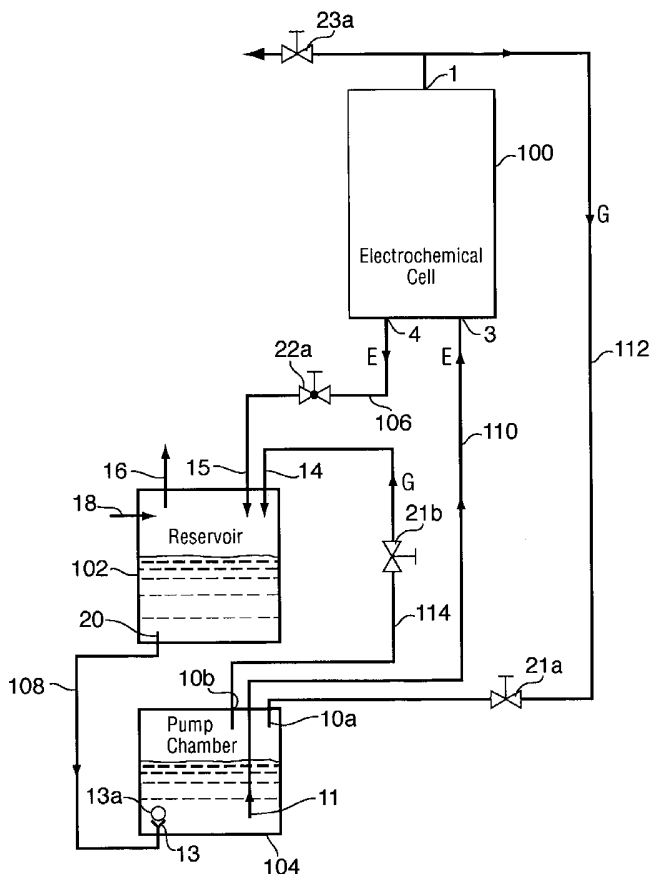

(57) Abstract: A system for pumping electrolyte through an electrolysis cell where the pressure of at least a portion of the gas generated by the electrolysis cell is used as driving force for the pumping. The system may include an electrolyte reservoir and a pumping chamber connected via an inlet conduit to receive electrolyte from the electrolysis cell and connected via an outlet conduit to flow electrolyte to the electrolysis cell. The pumping chamber is connected to the electrolysis cell to receive at least a portion of the gas generated by the electrolysis cell to elevate the pressure of the electrolyte therein and force it into the electrolysis cell.

WO 2006/047876 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## ELECTROLYSIS CELL ELECTROLYTE PUMPING SYSTEM

### CROSS REFERENCE TO RELATED APPLICATIONS

The present application claims priority to U.S. Provisional patent application  
5 60/522,737, filed November 2, 2004 and 60/594,869, filed May 13, 2005.

### FIELD OF THE INVENTION

The present invention relates to a system for pumping electrolyte through  
an electrolysis cell.

10

### BACKGROUND OF THE INVENTION

Electrolysis cells use electrical energy to generate reaction gases by  
splitting a compound of an electrolyte. Due to the chemical reaction of  
electrolysis, the concentration of the electrolyte constantly increases.  
15 Electrolysis cells work properly within a limited range of electrolyte  
concentration. If the concentration is too low, the electrical resistance of the  
electrolyte becomes too high and the efficiency of the electrolysis cell goes  
down. Alternately, if the electrolyte concentration is too high, the electrolyte  
becomes very corrosive and the electrolysis cell might be irreversibly  
20 damaged. For an alkaline electrolysis cell, a typical concentration range may,  
for example, be from 15 to 30 % KOH.

The energy efficiency of an electrolysis cell depends on its internal  
resistance. Thus the distance between positive and negative electrode of the  
electrolysis cell is kept small in order to have a low ohmic resistance between  
25 the electrodes. In some electrolysis cells, a typical distance is 1 mm. In an  
electrolysis cell with an active area of 100 cm<sup>2</sup> the electrolyte volume inside

the cell is 10 ccm. At a current density of 200 mA/cm<sup>2</sup> about 6 to 7 ccm of water are consumed by the electrolysis cell per hour. Therefore, the electrolyte in some cells may be pumped from a reservoir through the cell in order to keep the cell's electrolyte concentration in the proper range. The size of the reservoir determines the operating time of the electrolysis system. The electrolyte flow that has to be pumped through the cell depends on the concentration of the electrolyte in the reservoir. For example, assuming that the highest accepted concentration is 30 %, one has to replace the electrolyte in the electrolysis cell 5 times per hour at a starting concentration of 15 % and 68 times per hour at a starting concentration of 29 %. This means that the electrolyte flow that has to be pumped through the cell is between 50 and 680 ccm per hour.

The gas diffusion electrodes that are used in some electrolysis cells for generating the reaction gases work best with a small differential pressure between the reaction gases and the electrolyte, with the electrolyte pressure being lower than the gas pressure. One has to take care about the differential pressure when pumping electrolyte through the cell. For the same reason the electrolyte pressure has to be quite constant all over the cell and the pressure drop caused by the flow resistance has to be small. For example, typical operation pressures of electrolysis cells may be 0.5 to 3 bars and the electrolyte pressure may also have to be that high for proper cell operation.

Usually, the electrolyte is pumped by conventional pumps such as, for example, rotary pumps, gear type pumps, piston pumps or membrane pumps. However, in an efficient electrolysis system these pumps may offer one or more limitations, including for example, problems with handling low flow rates and/or high pressure flows and problematic power consumption.

### SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention, there is provided a system for pumping electrolyte through an electrolysis cell characterized in that the pressure of at least a portion of the gas generated by the electrolysis cell is used as driving force for the pumping.

It is to be understood that other aspects of the present invention will become readily apparent to those skilled in the art from the following detailed description, wherein various embodiments of the invention are shown and described by way of illustration. As will be realized, the invention is capable for other and different embodiments and its several details are capable of modification in various other respects, all without departing from the spirit and scope of the present invention. Accordingly the drawings and detailed description are to be regarded as illustrative in nature and not as restrictive.

### BRIEF DESCRIPTION OF THE DRAWINGS

Referring to the drawings wherein like reference numerals indicate similar parts throughout the several views, several aspects of the present invention are illustrated by way of example, and not by way of limitation, in detail in the figures, wherein:

Figure 1 is a schematic block diagram of an electrolysis cell and electrolyte pumping system according to one aspect of the present invention;

Figure 2 is a schematic block diagram of an electrolysis cell and electrolyte pumping system according to another aspect of the present invention;

Figure 3 is a schematic block diagram of an electrolysis cell and electrolyte pumping system according to another aspect of the present invention;

Figure 4 is a schematic block diagram of an electrolysis cell and electrolyte pumping system according to another aspect of the present invention; and

Figure 5 is a schematic block diagram of an electrolysis cell and electrolyte pumping system according to another aspect of the present invention.

5

#### DETAILED DESCRIPTION OF THE INVENTION

The detailed description set forth below in connection with the appended drawings is intended as a description of various embodiments of the present invention and is not intended to represent the only embodiments contemplated by the inventor. The detailed description includes specific details for the purpose of providing a comprehensive understanding of the present invention. However, it will be apparent to those skilled in the art that the present invention may be practiced without these specific details.

The present invention relates to a system for pumping electrolyte through an electrolysis cell by using the pressure of at least one of the reaction gases generated by the cell itself. The present invention may also relate to an electrolysis system that couples the pressures of the generated gases with the pressure of the electrolyte.

The present invention uses the pressure of reaction gas generated by the electrolysis cell to cause pumping of electrolyte through the cell. With reference to Figure 1, a pumping system according to the present invention may include an electrolysis cell 100, an electrolyte reservoir 102 and an electrolyte pumping chamber 104. In operation, pumping chamber 104 may be positioned lower, as determined by gravity, than electrolyte reservoir 102.

The electrolysis cell, the electrolyte reservoir and the pumping chamber are connected by electrolyte conduits in a circuit so that an electrolyte flow circuit, arrows E, may be set up wherein electrolyte may flow through a conduit 106 from the cell to the reservoir, then through a conduit 108 from the reservoir to

the pumping chamber and then through a conduit 110 back to the cell. Also, the pumping chamber 104 may be connected to both the cell and the reservoir by reaction gas conduits 112, 114 respectively to permit pumping of electrolyte using the flow of generated gas, arrows G, as will be explained in greater detail below.

The electrolysis cell has at least one outlet 1 for the reaction gases, an electrolyte inlet 3 and an electrolyte outlet 4. The reservoir may have an electrolyte inlet 15 that is connected through conduit 106 to the electrolyte outlet 4 of the electrolysis cell. The pumping chamber may have a gas inlet 10a that is connected via conduit 112 and a valve 21a to the cell reaction gas outlet 1 and a gas outlet 10b that is connected via conduit 114 and another valve 21b to a gas inlet 14 of the reservoir chamber. The pumping chamber may also have an electrolyte outlet 11 that is connected to the electrolyte inlet of the electrolysis cell 3 and an electrolyte inlet 13 that is connected to an electrolyte outlet 20 of the reservoir through the gas flow conduits. Valves 21a, 21b may be coordinated, as, for example, by use of a switch, communication or control, such that only one of the valves can be open at any one time so that the pumping chamber is either in gas communication with the reservoir or in gas communication with the electrolysis cell 100.

An electrolysis cell starts to generate gases generally as soon as a sufficient voltage is applied. In operation of a system according to Figure 1, for example, a gas pressure is generated once cell 100 begins operation. In the described system, when valve 21a is open a portion of the generated reaction gas from cell 100 flows into the pumping chamber, where the pressure thereby also increases. Due to the increasing gas pressure, the electrolyte in the pumping chamber is also pressurized and driven out, and thus pumped out, of pumping chamber 104 to inlet 3, then through the electrolysis cell, out through outlet 4 and back to the reservoir through conduit 106 and the reservoir's electrolyte inlet 15. If the valves 21a, 21b are switched, so that valve 21a is closed and valve 21b is opened, the connection between the

electrolysis cell and the pumping chamber is interrupted and no further gas from the cell can reach the pumping chamber. Instead, with valve 21b open, the pumping chamber is now connected to the gas inlet 14 of the electrolyte reservoir through conduit 114 and renders pumping chamber 104 and  
5 electrolyte reservoir 102 pressure equilibrated. As such, electrolyte may flow from the reservoir to the pumping chamber through conduit 108 due to gravity.

While the flow of electrolyte from reservoir 102 to pumping chamber 104 may be accomplished by gravity, other flows such as from the pumping chamber back to the cell may be positively driven by pumping drive generated  
10 from the use of reaction gas and, as such, need not require positioning to act on gravity.

The reservoir, being connected to the electrolysis cell by conduit 106 from outlet 4, may continue to fill with electrolyte that is passing, as for example by residual pumping pressure through the cell and/or by electrolyte that is  
15 draining along conduit 106.

While the reservoir fills the pumping chamber with electrolyte, the electrolysis cell can remain in operation and can continue to generate gas. When the valves are switched back, to open valve 21a and close valve 21b, pumping chamber 104 may be substantially immediately pressurized again,  
20 the electrolyte flow from the reservoir to the pumping chamber stops and electrolyte is pumped to and through the electrolysis cell again. This cyclic operation can be used to pump electrolyte through the system.

One or more valves, such as valve 13a at inlet 13 and or valve 11a at pump chamber outlet 11 (Figure 2), can be provided to control the direction of flow  
25 of gas or liquid, where desired or needed. Such valves can be check valves or positively driven valves as desired. Where valves 13a, 11a, etc. are positively driven, their opening and closing may have to be coordinated with valves 21a, 21b in order to permit appropriate operation of the system.

As the system uses an alternating and coordinated opening and closing of valves 21a, 21b, it may be desirable to use a connected valve, such as a 3/2 way valve so that the opening of one valve automatically closes the other. Switching between valves 21a, 21b can be controlled by controllers such as, 5 for example, level sensors, timers, etc. as desired. Such a system may also be useful for other valves in the system for which opening and closing needs to be coordinated.

As may be appreciated, it may be possible to reduce the numbers of conduits between the components by combining the conduits adjacent gas inlet 10a and the gas outlet 10b into one conduit, as gas flow will only be in one direction at one time, as controlled by valves 21a, 21b. 10

It is usually desired to have the reaction gases available for use at a particular pressure for example 0.5 to 3 bar and in a closed electrolysis system it is desirable to maintain the electrolyte and reaction gases with a small differential pressure. In the illustrated embodiment, cell 100 may 15 operate under a pressure greater than ambient and optimal system operation may be dependent on maintaining the gas and electrolyte differential pressure. Thus, care may be taken for the balance of the absolute pressure of the system. In particular, it is noted that in some embodiments the reservoir may be at ambient pressures, while the generated reaction gases and electrolyte in the cell may be at significantly higher pressures and it may be desirable to control pressure in the pumping system to avoid adverse differential pressures through the system. Pressure control may be achieved by use of pressure control devices 22a, 23a such as electrolyte flow resistors, 20 controls, valves, etc. and/or reaction gas flow resistors, controls, valves, etc. Selection of these pressure control devices and positioning thereof may be used to couple directly the pressures of at least the pumping portion of the generated gases with the pressure of the electrolyte so that an operationally acceptable differential pressure is maintained in the cell. 25

The illustrated system permits the water, which is consumed during electrolysis, to be replenished to adjust the electrolyte concentration without opening cell 100. For example, an electrolyte/water refill inlet 18 may be provided in the system in either the pumping chamber or the reservoir, as  
5 desired. In some embodiments, the refill inlet may be positioned to permit introduction of liquid to the system without shutting the system down. In one embodiment, the refill may be positioned in the reservoir which operates open to atmosphere.

Thus, in view of the foregoing, an electrolysis cell electrolyte pumping  
10 system is provided wherein the pressure of at least a portion of the gas generated by the electrolysis cell is used as driving force for the pumping of the electrolyte. In one embodiment, the electrolyte pressure is coupled with the pressure of the pumping gas in such a way that the differential pressure between the electrolyte and the gas is as high as that differential pressure  
15 selected for the operation of the electrolysis cell. Where the cell generates two reaction gases separately, the pressures of both reaction gases may also be coupled in such a way that the differential pressure between the two gases is as high as that differential pressure selected for the operation of the electrolysis cell.

20 The present pumping system for electrolysis cells can be realized in different ways as described in the following examples. The following examples show various components of the system and it should be appreciated that such components may be used alone or in combination, as desired, to provide an operational system with various selected attributes.

25

#### EXAMPLE 1

Figure 2 shows one example electrolysis system that employs a first portion of the reaction gas from electrolysis cell 100 for pumping and provides a second portion of the reaction gas to a user through line 120 for an application

other than pumping the electrolyte. In this particular embodiment, the system actually generates two gasses with the first gas (gas 1) being used for pumping and the second gas (gas 2) passed for use/collection by the user. In one embodiment, the system may be selected to generate oxygen as gas 1 and hydrogen as gas 2. However, formation of other reaction gasses may be of interest in an electrolysis system.

After use for pumping, gas 2 is emitted to the environment, as indicated at outlet 16. Thus, the electrolyte reservoir 102 is not pressurized in this example.

In this embodiment, it is desirable that the electrolyte pressure in the electrolysis cell be kept quite constant for optimal conditions of gas diffusion electrodes in the cell. Therefore, the electrolyte outlet 4 of the electrolysis cell isn't connected directly to the inlet 15 of the reservoir inlet, since if it were, the ambient pressure in the reservoir would be communicated to the outlet 4 which would generate an electrolyte pressure close to the pressure of gas 1 at the inlet 3 and close to ambient pressure at the outlet 4. In that case, the pressure drop between electrolyte inlet and outlet of the electrolysis cell would be close to the pressure of gas 1. Hence, an adjustable flow resistor 22 is used between the electrolysis cell and the reservoir. In Figure 2, a primary pressure valve is shown but flow resistor 22 could also be embodied in different ways, for example, as through the use of a needle valve. The flow resistance has to be adjusted so that the electrolyte pressure at the outlet of the electrolysis cell is almost as high as at the inlet. The pressure of reaction gas 2 is also regulated by a primary pressure valve 23 and may have to be adjusted to the pressure of gas 1.

A 3/2 way valve 21 is provided to control gas flow into and out of pumping chamber 104 through gas port 10. Valve 21 is switched by a liquid level switch 12. Using liquid level switch 12, as soon as the electrolyte in the pumping chamber is sensed as being at a low level, valve 21 is switched to refill mode, which connects pumping chamber gas port 10 and reservoir gas inlet 14.

When switch 12 senses that the electrolyte level is at a high level, it signals valve 21 to switch to a pumping mode, wherein pumping chamber gas port 10 and gas outlet 1 of electrolysis cell are connected.

5 The pressures of the two reaction gases and the electrolyte are not cooperatively coupled since the reservoir, and any gas 1 flowing therein, is open to atmosphere. Thus, the pressures of the reaction gases and the electrolyte are not directly coupled but are controlled individually and may have to be monitored in order to be adjusted on each other to maintain an operationally acceptable pressure differential in the cell. Monitoring can be for  
10 example by use of pressure sensors 5, 6.

Of course, the system can include other operational components to facilitate operation such as, for example, one or more of strippers and filters 7, 8, 9 for removing entrained electrolyte from gas flows and returning it to electrolyte flow lines, a venting inlet 17, an electrolyte/water fill inlet 18, an electrolyte  
15 level switch 19, as may be useful for indicating when the system requires a water refill and a drain 27.

## EXAMPLE 2

Figure 3 shows schematically a system that is similar to the one described  
20 in Example 1 but makes two reaction gases (gas 1 and gas 2) available to a user through lines 120a, 120b. In this embodiment, the pressure of reaction gas 1 is also regulated by a primary pressure valve 24. Thus, the electrolyte in the reservoir is pressurized and a flow resistor, such as the flow resistor 22 of example 1 is not needed. The pressure difference used for the electrolyte  
25 pumping is generated while the pumping chamber is refilled from the reservoir.

In this embodiment, the pressure of the pumping gas (gas 1) and the electrolyte are directly coupled. Thus, only the pressures of the two gases

have to be monitored and adjusted on each other to control pressure differentials through the electrolysis cell.

### EXAMPLE 3

5 Figure 4 shows a system where the pressures of the two reaction gases are also coupled. Thus, instead of the two primary pressure valves, indicated as 23, 24 in Figure 3, a differential pressure valve 25 is used. Thus only the pressure of gas 1 has to be monitored and the pressure differences between gas 1 and gas 2 and between gas 1 and the electrolyte are fixed.

10

### EXAMPLE 4

The system shown in Figure 5 differs from the system of Example 3 in the way in which the 3/2 way valve 21 is switched. In particular, instead of using a liquid level switch to trigger valve 21 the triggering is done by a timer 28. In addition, the check valves 13a, 11a at the electrolyte inlet 13 and outlet 11 of pumping chamber 104 are replaced by another 3/2 way valve 26 also triggered by timer 28. Valve 26 is capable of switching between a first connection between an electrolyte port 11b of the pumping chamber and electrolysis cell electrolyte inlet 3 and a second connection between pumping chamber port 11b and reservoir electrolyte outlet 20.

The previous description of the disclosed embodiments and examples is provided to enable any person skilled in the art to make or use the present invention. Various modifications to those embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the embodiments shown herein, but is to be accorded the full scope consistent with the claims, wherein reference to an element in the singular,

such as by use of the article "a" or "an" is not intended to mean "one and only one" unless specifically so stated, but rather "one or more". All structural and functional equivalents to the elements of the various embodiments described throughout the disclosure that are known or later come to be known to those  
5 of ordinary skill in the art are intended to be encompassed by the elements of the claims. Moreover, nothing disclosed herein is intended to be dedicated to the public regardless of whether such disclosure is explicitly recited in the claims. Specifically with respect to the United States, no claim element is to be construed under the provisions of 35 USC 112, sixth paragraph, unless the  
10 element is expressly recited using the phrase "means for" or "step for".

**We claim:**

1. A system for pumping electrolyte through an electrolysis cell characterized in that the pressure of at least a portion of the gas generated by the electrolysis cell is used as driving force for the pumping.  
5
2. The system according to claim 1 wherein the electrolysis cell includes an electrolyte pressure and wherein the at least a portion of the gas generated includes a pumping gas pressure and wherein the electrolyte pressure is coupled with the pumping gas pressure in such a way that any differential pressure between the electrolyte and the at least a portion of the gas generated is as high as that differential pressure selected for operation of the electrolysis cell.  
10
3. The system according to claim 2 wherein the at least a portion of the gas generated is a first gas and the electrolysis cell generates a second gas and wherein the pressures of both the first gas and the second gas are coupled in such a way that the differential pressure between the two gases is as high as that differential pressure selected for the operation of the electrolysis cell.  
15
4. The system according to claim 1 wherein the at least a portion of the gas generated is pressure controlled to maintain an operational gas pressure within the electrolysis cell.  
20
5. The system according to claim 1 wherein the flow of electrolyte through the electrolysis cell has an electrolyte pressure and is pressure controlled to maintain an operational electrolyte pressure within the electrolysis cell.  
25
6. The system according to claim 5 wherein the at least a portion of the gas generated has a gas pressure and is pressure controlled to

maintain an operational gas pressure within the electrolysis cell and the gas pressure of the at least a portion of the gas generated is monitored and adjusted against the electrolyte pressure to maintain an operational pressure differential within the electrolysis cell.

- 5        7. The system according to claim 5 wherein the at least a portion of the gas generated has a gas pressure and the gas pressure is directly coupled to the electrolyte pressure in such a way that any differential pressure between the electrolyte and the at least a portion of the gas generated is as high as that differential pressure selected for operation
- 10       of the electrolysis cell.
8. The system according to claim 1 further comprising an electrolyte reservoir and a pumping chamber connected via an inlet conduit to receive electrolyte from the electrolysis cell and connected via an outlet conduit to flow electrolyte to the electrolysis cell.
- 15       9. The system according to claim 8 further comprising a pressure control in the inlet conduit and a pressure control in the outlet conduit to pressure isolate the electrolyte of the electrolysis cell from the electrolyte reservoir and from the pumping chamber.
- 20       10. The system according to claim 8 wherein the electrolyte reservoir is pressure isolatable from the pumping chamber.
11. The system according to claim 1 wherein the electrolysis cell generates a second gas portion, which is passed to an application other than pumping the electrolyte.
- 25       12. The system according to claim 1 wherein the electrolysis cell operates at an elevated pressure greater than ambient and the system operates to pump electrolyte while maintaining the elevated pressure in the electrolysis cell.

13. The system according to claim 1 wherein the system circulates electrolyte from the electrolysis cell to an electrolyte reservoir, then to an electrolyte pumping chamber and then by drive of the at least a portion of the gas generated back to the electrolysis cell.
- 5 14. The system according to claim 1 wherein the at least a portion of the gas generated is applied to an electrolyte pumping chamber to elevate the pressure of the electrolyte therein and force it into the electrolysis cell.
- 10 15. The system according to claim 14 further comprising an electrolyte reservoir to receive electrolyte pumped from the electrolysis cell and then pass the electrolyte to the electrolyte pumping chamber when pressures are equalized between the electrolyte pumping chamber and the electrolyte reservoir.
- 15 16. The system according to claim 15 wherein the at least a portion of the gas generated has a gas pressure and the gas pressure is communicated to, and regulated to be substantially maintained in, the electrolyte pumping chamber and the electrolyte reservoir to maintain an operational pressure differential between the electrolyte and the at least a portion of the gas generated within the electrolysis cell.

20

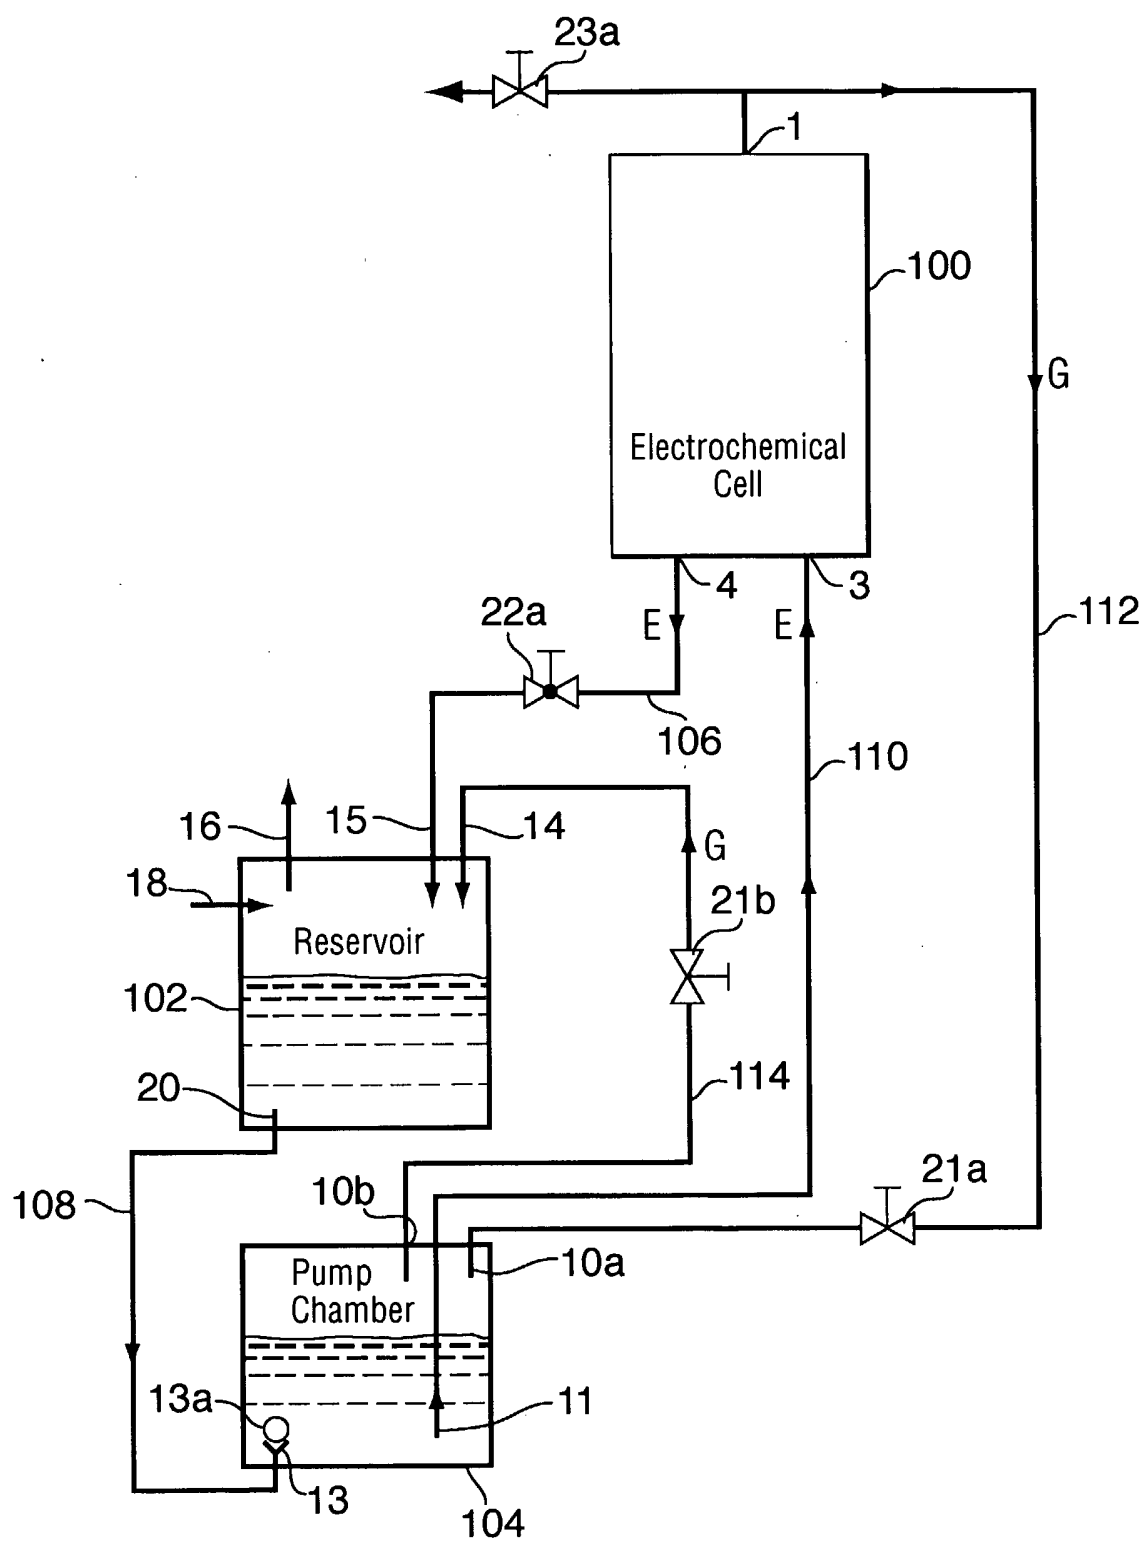


FIG. 1

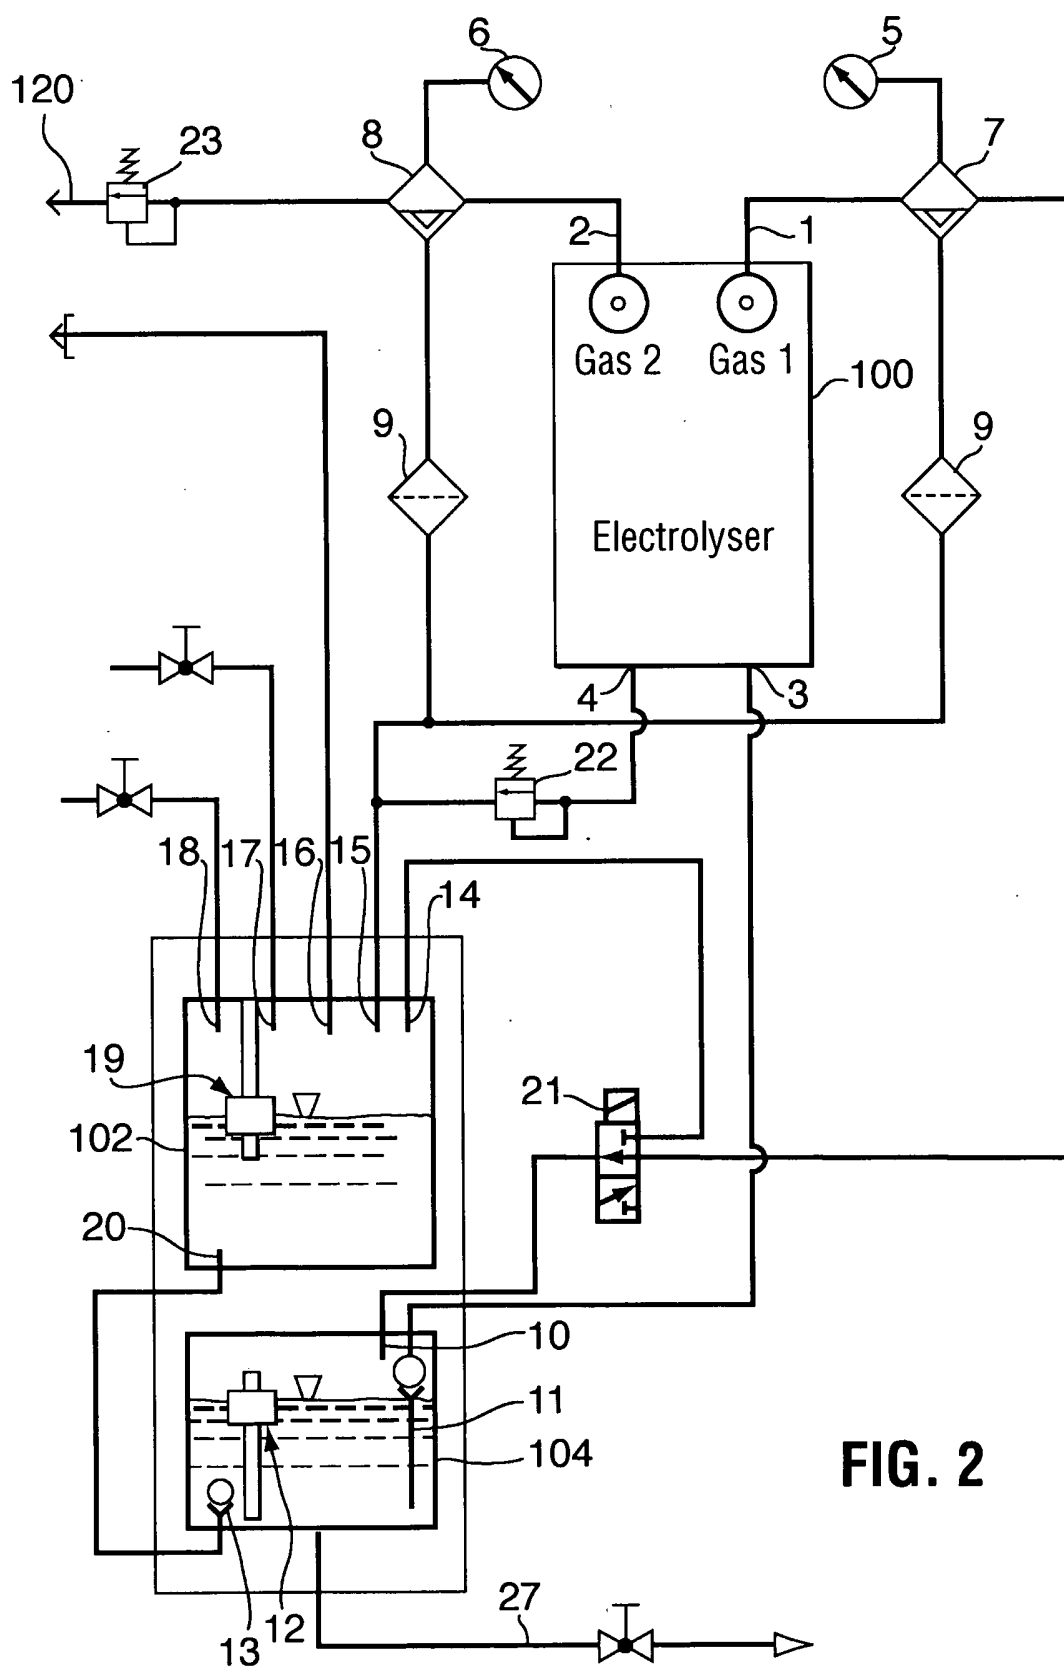


FIG. 2

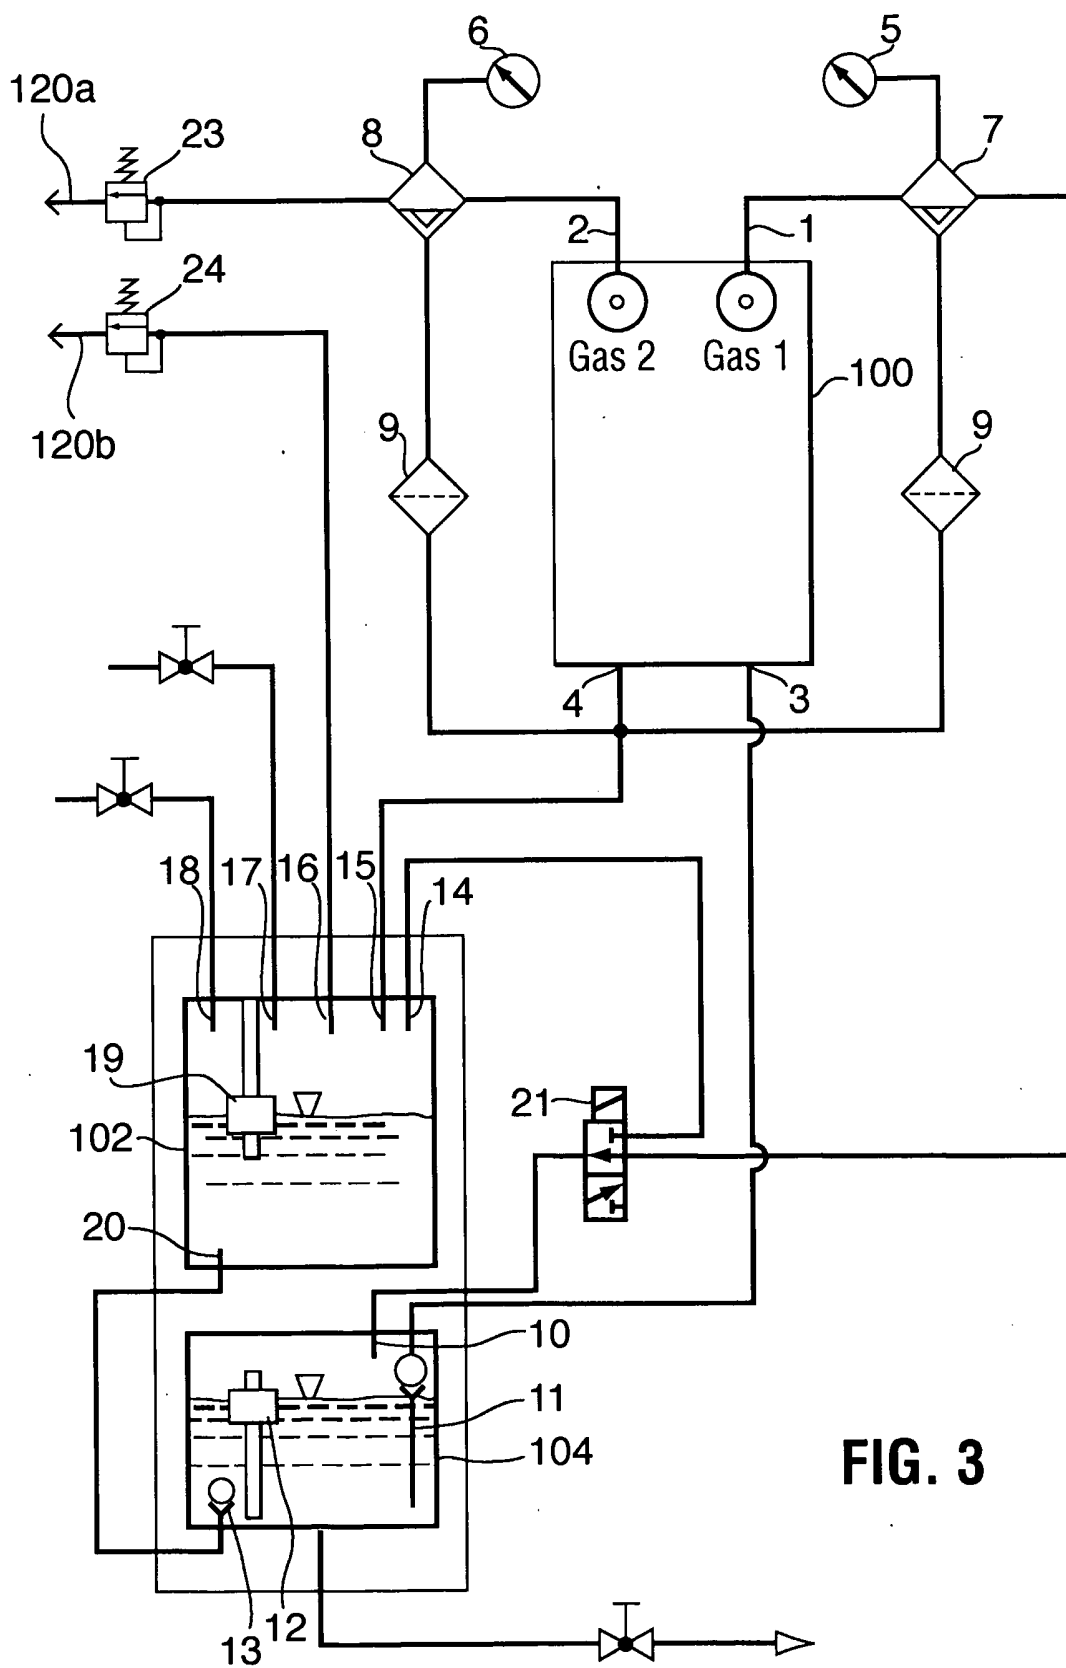


FIG. 3

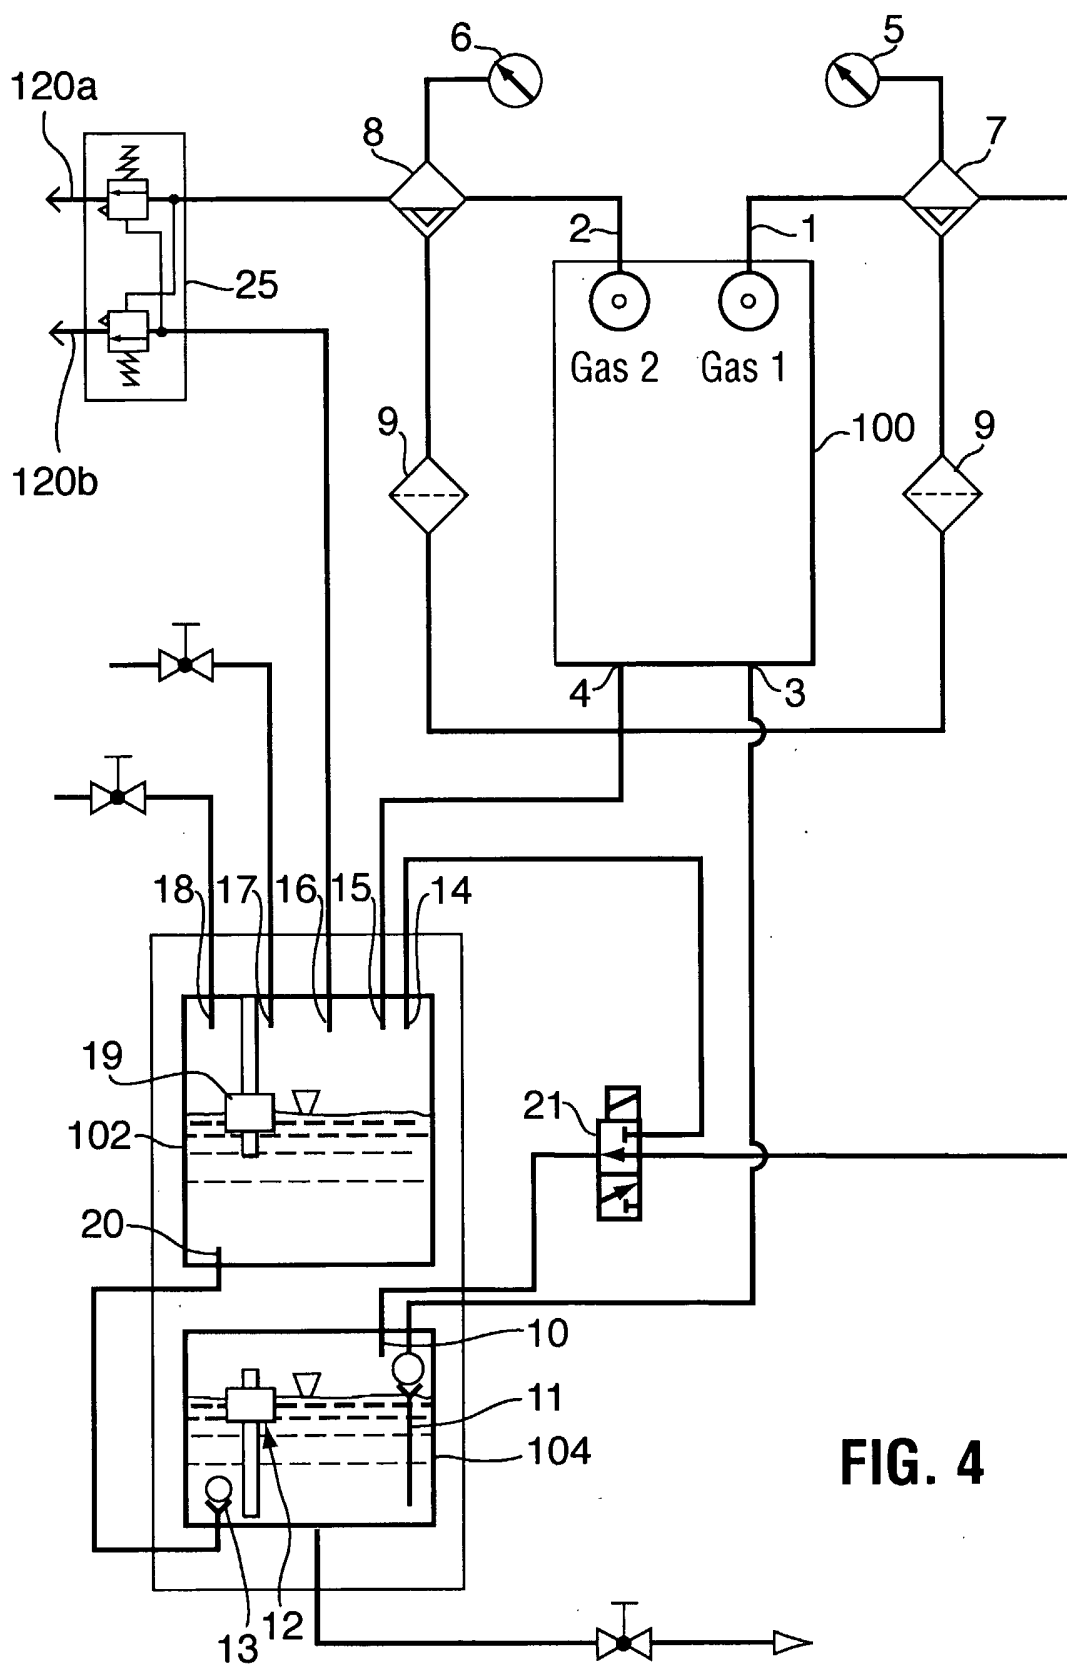


FIG. 4

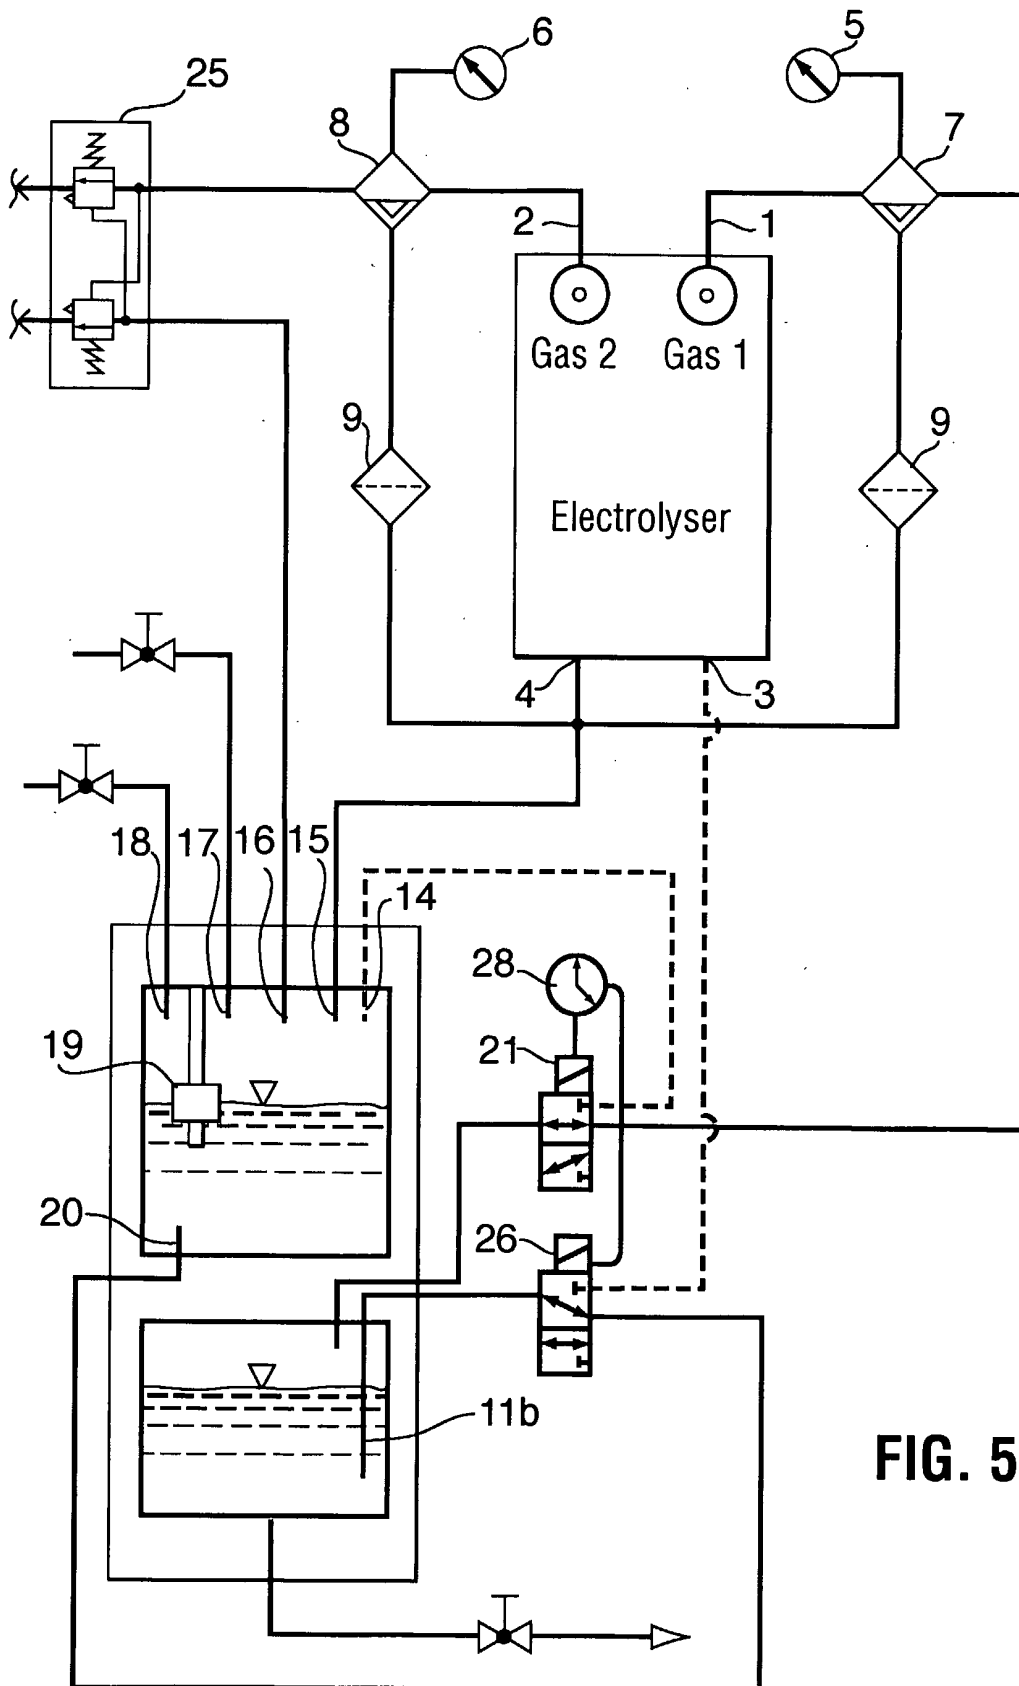


FIG. 5

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA2005/001684

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC: <i>C25B 15/08</i> (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC: C25B (2006.01), C02F (2006.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) CPD, Delphion, Scopus, Knovel *fluid* AND *displacement* AND *electrolysis*, *blowcase*, *acid egg*, “*electrolysis* AND *pump*		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
<b>Category*</b>	<b>Citation of document, with indication, where appropriate, of the relevant passages</b>	<b>Relevant to claim No.</b>
P, X	US 2004/0226873 (Herrington et al.) 18 November 2004 (18-11-2004) *whole document*	1 to 7, 11 and 12
Y	Perry, R.H.; Green, D.W. (1997) Perry’s Chemical Engineers’ Handbook (7th Edition), (page 10-35) McGraw-Hill	1 to 16
A	CA 2,174,545 (Allen) 27 April 1995 (27-04-1995)	
A	CA 2,376,830 (West et al.) 19 September 2002 (19-09-2002)	
A	CA 2,130,911 (Baker et al.) 30 September 1993 (30-09-1993)	
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family	
“O” document referring to an oral disclosure, use, exhibition or other means		
“P” document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 19 January 2006 (19-01-2006)	Date of mailing of the international search report 21 February 2006 (21-02-2006)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001(819)953-2476	Authorized officer Michelle Barriault (819) 934-2331	

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CA2005/001684

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US2004226873	18-11-2004	AU1953901	22-03-2002
		AU5165000	12-12-2000
		AU2004224430 A1	07-10-2004
		CA2492777 A1	30-01-2003
		EP1322407 A1	02-07-2003
		EP1453592 A1	08-09-2004
		EP1603441 A2	14-12-2005
		JP2004508170	18-03-2004
		US6261464 B1	17-07-2001
		US6524475 B1	25-02-2003
		US6558537 B1	06-05-2003
		US6736966 B2	18-05-2004
		US2004011723 A1	22-01-2004
		US2004173528 A1	09-09-2004
		US2004178145 A1	16-09-2004
		US2004211676 A1	28-10-2004
		WO0071783 A1	30-11-2000
		WO0220142 A1	14-03-2002
		WO03008076 A1	30-01-2003
		WO2004084698 A2	07-10-2004
WO2005082787 A1	09-09-2005		
WO2005084178 A2	15-09-2005		
CA2174545	27-04-1995	AU686267 B2	05-02-1998
		AU8084894	08-05-1995
		CN1101861	19-02-2003
		DE69429531D1	31-01-2002
		DE6942953	01-08-2002
		EP0725845 A1	14-08-1996
		EP1031646 A2	30-08-2000
		JP3428998 B2	22-07-2003
		JP9512861	22-12-1997
		PL176918B B1	31-08-1999
		TW406140 B	21-09-2000
		US5427658	27-06-1995
		US5458743	17-10-1995
		US5736016	07-04-1998
		WO9511326 A1	27-04-1995
CA2376830	19-09-2002	US2002129938 A1	19-09-2002
CA2130911	30-09-1993	AR247765 A1	31-03-1995
		AT192944	15-06-2000
		AU667525 B2	28-03-1996
		BR9306134	23-06-1998
		DE69328676 D1	21-06-2000
		DE69328676	28-12-2000
		EP0632746 A1	11-01-1995
		FI944424	23-09-1994
		HU68701 A2	28-07-1995
		IL104989	08-07-1993
		JP3051175 B2	12-06-2000
		JP7505441	15-06-1995
		KR220363 B1	15-09-1999
		MX9301712 A1	31-01-1994
		NO943412	14-09-1994
		RU2123069	10-12-1998
		USRE36972	28-11-2000
		US5316740	31-05-1994
		US5385711	31-01-1995
WO9318854 A1	30-09-1993		