

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2012350159 B2

(54) Title
Percolated mullite and a method of forming same

(51) International Patent Classification(s)
C04B 35/185 (2006.01) **C04B 35/64** (2006.01)
C04B 33/32 (2006.01) **C04B 35/65** (2006.01)
C04B 35/63 (2006.01) **C04B 35/66** (2006.01)

(21) Application No: **2012350159** (22) Date of Filing: **2012.12.07**

(87) WIPO No: **WO13/082670**

(30) Priority Data

(31) Number **2011905129** (32) Date **2011.12.09** (33) Country **AU**

(43) Publication Date: **2013.06.13**
(44) Accepted Journal Date: **2016.08.25**

(71) Applicant(s)
NewSouth Innovations Pty Limited;Vecor IP Holdings Limited

(72) Inventor(s)
Sorrell, Charles Christopher;Koshy, Pramod;Koszo, Sandor

(74) Agent / Attorney
Davies Collison Cave, GPO Box 3876, SYDNEY, NSW, 2001

(56) Related Art
LI, J., et al., 'Effect of V2O5 on the properties of mullite ceramics synthesized from high-aluminum fly ash and bauxite', Journal of Hazardous Materials, 2009, Vol 166, pages 1535-1539.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



WIPO | PCT



(10) International Publication Number

WO 2013/082670 A1

(43) International Publication Date

13 June 2013 (13.06.2013)

(51) International Patent Classification:

C04B 35/185 (2006.01) *C04B 35/65* (2006.01)
C04B 35/63 (2006.01) *C04B 35/66* (2006.01)
C04B 35/64 (2006.01) *C04B 33/32* (2006.01)

New South Wales 2031 (AU). **KOSZO, Sandor**; Unit 18-2-5, Sanhe Garden, Huaxianan Road, Qibin District, Hebi City, Henan 458030 (CN).

(21) International Application Number:

PCT/AU2012/001500

(74) Agent: **DAVIES COLLISON CAVE**; Level 14, 255 Elizabeth Street, Sydney, New South Wales 2000 (AU).

(22) International Filing Date:

7 December 2012 (07.12.2012)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(26) Publication Language:

English

(30) Priority Data:


2011905129 9 December 2011 (09.12.2011) AU

(71) Applicants: **NEWSOUTH INNOVATIONS PTY LIMITED** [AU/AU]; Rupert Myers Building, Gate 14, Barker Street, University of New South Wales, Sydney, New South Wales 2052 (AU). **VECOR IP HOLDINGS LIMITED** [CN/CN]; Suite 1002, Chuang's Tower 30-32, Connaught Road, Central, Hong Kong (CN).

(72) Inventors: **SORRELL, Charles Christopher**; Unit 9, 76 Belmore Road, Randwick, New South Wales 2031 (AU). **KOSHY, Pramod**; Unit 2, 86 St Pauls Street, Randwick,

[Continued on next page]

(54) Title: PERCOLATED MULLITE AND A METHOD OF FORMING SAME

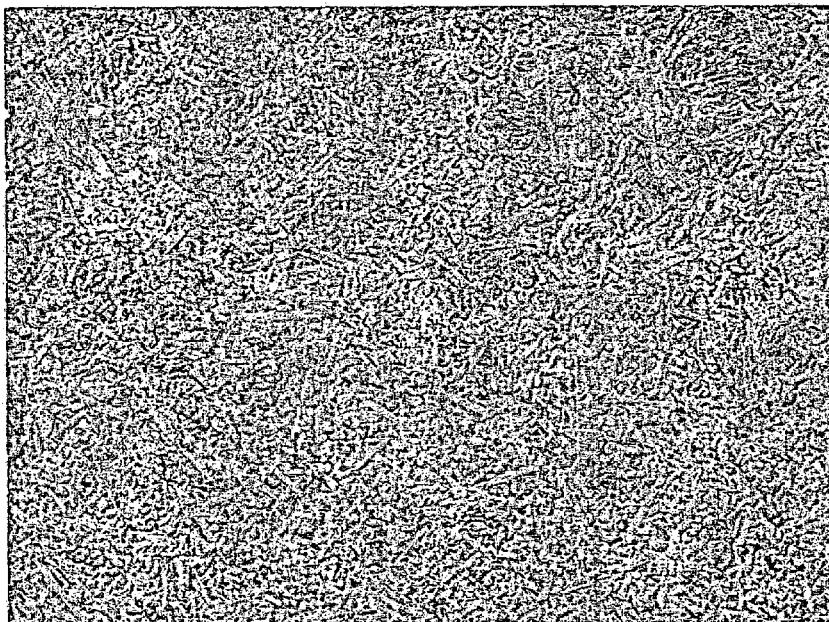

TM3000

2011/03/03 13:03 N D9.0 x1.0k 100 um

Figure 11d

(57) Abstract: A method of producing percolated mullite in a body of material, the method including the step of heating the body of material, wherein the body of material has a composition that includes alumina and silica, and the weight ratio of alumina:silica is from approximately 10:90 to approximately 77:23. The percolated mullite produced extends continuously and/or substantially throughout the entire body of material.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, ML, MR, NE, SN, TD, TG).

- 1 -

PERCOLATED MULLITE AND A METHOD OF FORMING SAME

Field of the Invention

5 The present invention relates to percolated mullite and a method of forming same.

Background

The reference in this specification to any prior publication (or information derived from it),
10 or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that the prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

15 Pure mullite has a melting point (and decomposition temperature) of ~1850°C and as such, mullite often is used as a refractory material. In practice, however, commercial mullite refractory products always contain glass as a residual product of the raw materials and processing. The glass component typically resides between the mullite grains and assists in bonding the grains together. Accordingly, as the glass softens (at ~1200°C), the mullite
20 refractory material begins to deform by viscous flow when heated at or above this temperature (approximating the glass transition temperature). In seeking to address the issue of glass softening, conventional approaches to the formation of mullite tend to focus on the minimisation of the glass-forming components and fluxes in the starting material for commercial mullite formation.

25

Summary of the Invention

In one broad from the present invention provides, a method of producing percolated mullite in a body of material, the method including the step of heating the body of material, wherein the body of material has a composition that includes alumina and silica, and the weight ratio of alumina:silica is from approximately 10:90 to approximately 77:23.

- 2 -

In one form, the percolated mullite produced extends continuously and/or substantially throughout the entire body of material.

5 In another form, the composition includes an alumina:silica weight percent ratio of from approximately 24:76 to approximately 48:52.

In one form, the body includes pre-existing mullite.

10 In another form, the body does not include pre-existing mullite, but mullite forms on heating of the body.

In one form, the body includes a pre-existing glass component.

15 In another form, the body does not include a pre-existing glass component, but glass forms on heating of the body.

In a further form, the body does not include a pre-existing glass component, but glass is added.

20 20 In another form, the composition includes at least one flux.

In another form, the at least one flux is an oxide and/or salt of an alkali, alkaline earth, transition metal or lanthanide, or a semimetal oxide, metalloid oxide, or a halogen.

25 25 In one form, the body is heated to a temperature sufficient to soften the glass component.

In another form, the body is heated at a temperature sufficient to facilitate chemical diffusion through the softened glass.

30 30 In a further form, the body is heated at a temperature above the glass transition temperature of the glass component.

- 3 -

In another form, the body is heated at a temperature such that the glass is deformable and growth of the mullite fibres is not hindered physically or volumetrically by the glass.

5 In another form, the composition of the body includes a naturally occurring raw material and/or a synthetic raw material capable of forming mullite when heated.

In a further form, the composition of the body includes one or more materials selected from the group including kyanite, sillimanite, andalusite, topaz, pyrophyllite, clay, bauxite, 10 quartz, or red mud.

In one form, the body is comprised principally of fly ash.

In one form, the composition further includes at least one aluminous raw material.

15

In one form, the at least one aluminous raw material is bauxite, alumina, an aluminium hydrate, or red mud.

In another form, the composition further includes at least one flux added extrinsically in 20 addition to those present intrinsically.

In one form, the at least one flux is an oxide and/or salt of an alkali, alkaline earth, transition metal or lanthanide, or a semimetal oxide, metalloid oxide, or a halogen.

25 In another form, the body is heated at a temperature of between approximately 1400°C and approximately 1600°C for a period of time.

In one form, the body is heated at a temperature of at least 1500°C.

30 In one form, the period of time is greater than or equal to 2 hours.

In another form, the period of time is greater than or equal to 4 hours.

In another form, the period of time is greater than or equal to 8 hours.

In one form, the method includes sintering the body of material without a mould.

In another form, the method includes fuse-casting the body of material in a mould.

In one form, the body of material is heated at a temperature sufficient to allow rapid (liquid, notviscous) flow into the mould but no higher than 1850°C.

In one form, the percolated mullite is produced in the body such that a 3-3 composite material is formed.

In another form, the percolated mullite is produced in the body such that a 0-3 composite material is formed.

In a further form, the method further includes the step of leaching with a solvent to remove residual glass.

In one form, the present invention provides a method of producing percolated mullite in a body of material, the method including the step of heating the body of material at a temperature in the range of from 1400° to 1600° for at least two hours, wherein the body of material has a composition that includes alumina and silica, and the weight percent ratio of alumina:silica is from 10:90 to approximately 60:40 when normalized to exclude non-alumina and non-silica impurities.

In one form, the present invention provides percolated mullite produced in accordance with the methods as described above.

In another form, the present invention provides use of the percolated mullite as described above in a refractory shape, refractory castable, refractory ramming mix, refractory crucible, refractory setter, refractory tube, refractory plate, refractory grain, refractory aggregate, kiln shelving, kiln post, heat shield, fibre blanket, fibre board, fibre shape, fuse-cast shape, corrosion resistant shape,

2012350159 05 Aug 2016

4A

coating, whiteware, sanitaryware, dinnerware, wear-resistant tile, military armour, proppant, corrosion-resistant shape, glass-ceramic (crystallised glass), filter, electrical insulator, electronic substrate, catalyst and/or infrared-transmitting window.

- 5 -

In a further broad from, the present invention provides a body of material including a percolated mullite microstructure extending continuously and/or substantially throughout the entire body.

5

In one form, the material is a 3-3 composite.

In another form, the material is a 0-3 composite.

10

Brief Description of the Figures

Examples of the present invention will now be described with reference to the accompanying drawings, in which:

15

Figure 1 is a schematic illustration of the effects of temperature and time on the deformation (*viz.*, shrinkage) of typical ceramic materials that contain a vitreous (glassy) sintering (densification) aid.

20

Figure 2 is graph of complete data for diametral shrinkage of three fly ashes (sole component) as a function of heating time to 96 hours or 24 hours at 1500°C; supplementary tabulated information also is included.

25

Figure 3a is a graph of data for diametral shrinkage of an additional five fly ashes (sole component) as a function of heating time to 12 hours at 1500°C.

Figure 3b is a graph of data for diametral shrinkage of an additional four fly ashes (sole component), which melted at 1500°C, as a function of heating time to 12 hours at 1400°C.

30

Figure 4 is a graph of complete data for diametral shrinkage of one set of fly ash/alumina blends as a function of heating time to 24 hours at 1500°C.

- 6 -

Figure 5 is a graph of complete data for diametral shrinkage of one set of fly ash/alumina blends with 1.0 wt% magnesium oxide (periclase, MgO) added as a flux and mullite fibre growth modifier as a function of heating time to 12 hours at 1500°C.

5 Figure 6 is a graph of complete data for diametral shrinkage of one set of fly ash/alumina blends with 0.5 wt% calcium oxide (lime, CaO) added as a flux and mullite fibre growth modifier as a function of heating time to 24 hours at 1500°C.

10 Figure 7 is a graph of complete data for diametral shrinkage of one set of fly ash/alumina blends with 1.0 wt% titanium dioxide (rutile, TiO₂) added as a flux and mullite fibre growth modifier as a function of heating time to 12 hours at 1500°C.

15 Figure 8 is a graph of complete data for diametral shrinkage of one set of fly ash/alumina blends with 1.0 wt% chromium oxide (eskolaite, Cr₂O₃) added as a flux and mullite fibre growth modifier as a function of heating time to 12 hours at 1500°C.

Figure 9 is a graph of complete data for diametral shrinkage of one set of fly ash/alumina blends with 2.0 wt% iron oxide (haematite, Fe₂O₃) added as a flux and mullite fibre growth modifier as a function of heating time to 24 hours at 1500°C.

20

Figure 10 is a graph of complete data for diametral shrinkage of one set of fly ash/alumina blends with 1.0 wt% cerium oxide (cerianite, CeO₂) added as a flux and mullite fibre growth modifier as a function of heating time to 12 hours at 1500°C.

25 Figure 11a is a graph of D10, D50, D90 (i.e., 10%, 50%, 90% of total number of fibres, respectively) and average length as a function of heating time to 96 hours at 1500°C, as extracted from Data Set 1 (fly ash 1).

30 Figure 11b is a graph of the number of fibres and areal distribution of fibres (%) as a function of heating time to 96 hours at 1500°C, as extracted from Data Set 1 (fly ash 1).

- 7 -

Figure 11c is a scanning electron microscope (SEM) image of fly ash 1 (polished and etched) after heat treatment for 1 hour at 1500°C.

Figure 11d is an SEM image of fly ash 1 (polished and etched) after heat treatment for 4
5 hours at 1500°C.

Figure 11e is an SEM image of fly ash 1 (polished and etched) after heat treatment for 24
hours at 1500°C.

10 Figure 11f is an SEM image of fly ash 1 (polished and etched) after heat treatment for 96
hours at 1500°C.

Figure 12a is a graph of D10, D50, D90 (i.e., 10%, 50%, 90% of total number of fibres,
respectively) and average length as a function of heating time to 24 hours at 1500°C, as
15 extracted from Data Set 2 (fly ash 3)

Figure 12b is a graph of the number of fibres and areal distribution of fibres (%) as a
function of heating time to 24 hours at 1500°C, as extracted from Data Set 2 (fly ash 3).

20 Figure 12c is a scanning electron microscope (SEM) image of fly ash 3 (polished and
etched) after heat treatment for 2 hours at 1500°C.

Figure 12d is an SEM image of fly ash 3 (polished and etched) after heat treatment for 4
hours at 1500°C.

25 Figure 12e is an SEM image of fly ash 3 (polished and etched) after heat treatment for 8
hours at 1500°C.

Figure 12f is an SEM image of fly ash 3 (polished and etched) after heat treatment for 24
30 hours at 1500°C.

- 8 -

Figure 13a is a graph of D10, D50, D90 (i.e., 10%, 50%, 90% of total number of fibres, respectively) and average length as a function of heating time to 24 hours at 1500°C, as extracted from Data Set 3 (90/10 fly ash/alumina blend 1)

5 Figure 13b is a graph of the number of fibres and areal distribution of fibres (%) as a function of heating time to 24 hours at 1500°C, as extracted from Data Set 3 (blend 1).

Figure 13c is a scanning electron microscope (SEM) image of blend 1 (polished and etched) after heat treatment for 2 hours at 1500°C.

10

Figure 13d is an SEM image of blend 1 (polished and etched) after heat treatment for 4 hours at 1500°C.

15

Figure 13e is an SEM image of blend 1 (polished and etched) after heat treatment for 8 hours at 1500°C.

Figure 13f is an SEM image of blend 1 (polished and etched) after heat treatment for 24 hours at 1500°C.

20

Figure 14a is a graph of D10, D50, D90 (i.e., 10%, 50%, 90% of total number of fibres, respectively) and average length as a function of heating time to 24 hours at 1500°C, as extracted from Data Set 4 (80/20 fly ash/alumina blend 2)

25

Figure 14b is a graph of the number of fibres and areal distribution of fibres (%) as a function of heating time to 24 hours at 1500°C, as extracted from Data Set 4 (blend 2).

Figure 14c is a scanning electron microscope (SEM) image of blend 2 (polished and etched) after heat treatment for 2 hours at 1500°C.

30

Figure 14d is an SEM image of blend 2 (polished and etched) after heat treatment for 4 hours at 1500°C.

- 9 -

Figure 14e is an SEM image of blend 2 (polished and etched) after heat treatment for 8 hours at 1500°C.

5 Figure 14f is an SEM image of blend 2 (polished and etched) after heat treatment for 24 hours at 1500°C.

Figure 15a is a graph of D10, D50, D90 (i.e., 10%, 50%, 90% of total number of fibres, respectively) and average length as a function of heating time to 24 hours at 1500°C, as 10 extracted from Data Set 5 (70/30 fly ash/alumina blend 3)

Figure 15b is a graph of the number of fibres and areal distribution of fibres (%) as a function of heating time to 24 hours at 1500°C, as extracted from Data Set 5 (blend 3).

15 Figure 15c is a scanning electron microscope (SEM) image of blend 3 (polished and etched) after heat treatment for 2 hours at 1500°C.

Figure 15d is an SEM image of blend 3 (polished and etched) after heat treatment for 4 hours at 1500°C.

20 Figure 15e is an SEM image of blend 3 (polished and etched) after heat treatment for 8 hours at 1500°C.

Figure 15f is an SEM image of blend 3 (polished and etched) after heat treatment for 24 25 hours at 1500°C.

Figure 16a is a graph of D10, D50, D90 (i.e., 10%, 50%, 90% of total number of fibres, respectively) and average length as a function of heating time to 24 hours at 1500°C, as extracted from Data Set 6 (60/40 fly ash/alumina blend 4)

- 10 -

Figure 16b is a graph of the number of fibres and areal distribution of fibres (%) as a function of heating time to 24 hours at 1500°C, as extracted from Data Set 6 (blend 4).

Figure 16c is a scanning electron microscope (SEM) image of blend 4 (polished and etched) after heat treatment for 2 hours at 1500°C.

Figure 16d is an SEM image of blend 4 (polished and etched) after heat treatment for 4 hours at 1500°C.

10 Figure 16e is an SEM image of blend 4 (polished and etched) after heat treatment for 8 hours at 1500°C.

Figure 16f is an SEM image of blend 4 (polished and etched) after heat treatment for 24 hours at 1500°C.

15

Figure 17a is an SEM image of fly ash 3 with 2.0 wt% iron oxide (haematite, Fe_2O_3) added as a flux and mullite fibre growth modifier (polished and etched) after heat treatment for 2 h at 1500°C.

20 Figure 17b is an SEM image of fly ash/alumina blend 1 (90/10) with 2.0 wt% iron oxide (haematite, Fe_2O_3) added as a flux and mullite fibre growth modifier (polished and etched) after heat treatment for 2 h at 1500°C.

25 Figure 17c is an SEM image of fly ash/alumina blend 2 (80/20) with 2.0 wt% iron oxide (haematite, Fe_2O_3) added as a flux and mullite fibre growth modifier (polished and etched) after heat treatment for 2 h at 1500°C.

30 Figure 17d is an SEM image of fly ash/alumina blend 3 (70/30) with 2.0 wt% iron oxide (haematite, Fe_2O_3) added as a flux and mullite fibre growth modifier (polished and etched) after heat treatment for 2 h at 1500°C.

- 11 -

Figure 17e is an SEM image of fly ash/alumina blend 4 (60/40) with 2.0 wt% iron oxide (haematite, Fe_2O_3) added as a flux and mullite fibre growth modifier (polished and etched) after heat treatment for 2 h at 1500°C.

5 Detailed Description

The foregoing describes only some embodiments of the present invention, and modifications and/or changes can be made thereto without departing from the scope and spirit of the invention, the embodiments being illustrative and not restrictive.

- 10 In the context of this specification, the word "comprising" means "including principally but not necessarily solely" or "having" or "including" and not "consisting only of". Variations of the word "comprising", such as "comprise" and "comprises", have correspondingly varied meanings.
- 15 The methods described herein produce bulk and other forms of mullite having a "percolated" microstructure. The term "percolated" refers to a completely or effectively completely continuous and interconnected microstructure, scaffold, or network that extends through the entire body, is direct-bonded (thereby excluding glass from between the mullite grains), and consequently is structurally stable such that it resists high-20 temperature deformation up to, in principle, the melting point (or decomposition temperature) of mullite (1850°C).

- 25 The mullite microstructure may include glass dispersed within the interstices of the percolated matrix. However, any residual glass affects the properties of the percolated mullite in specific and limited ways. As the mullite fibres have grown directly together and interconnected (without an interlayer of glass between the fibres), the percolated mullite may behave effectively as if it were a pure crystalline material despite the presence of "contaminants", such as the residual glass. However, the residual glass phase also may form an independent interconnected network. Some thermomechanical properties, such as 30 creep, may be dominated effectively by the continuous mullite matrix and the material shows extraordinary resistance to creep at temperatures of at least 1500°C and possibly as

high as 1850°C (the melting point and decomposition temperature of mullite). In contrast, some thermomechanical properties, such as thermal shock, may be dominated effectively by the degree of continuity of the glass network. This type of microstructure is known as a 3-3 composite, where each phase is continuous in three dimensions. In such cases, this 5 undesired effect can be avoided or negated by modifying the composition to reduce the amount of glass and/or, alternatively, heating for sufficient temperature and/or time in order to facilitate grain growth, grain coarsening, reduction in glass content (by chemical incorporation in the growing mullite), physical segregation of the residual glass, and void formation. This type of microstructure is known as a 0-3 composite, where the glass phase 10 is isolated in individual regions not in mutual contact and the mullite is retained as a three-dimensional continuous network. This microstructure has the advantage that the glass has effectively no effect on any thermomechanical properties, including thermal shock.

This contrasts with prior art mullite formation in ceramic products, especially refractories, 15 wherein residual glass is relied upon to bond the mullite grains together. Conventional mullite refractories soften at approximately 1200°C due to the presence of this residual intergranular glass. In other products, such as porcelain, such mullite fibres are known to form but, in such products, mullite percolation occurs only in localised regions of the material. In the examples of the present invention, mullite percolation is intended to and 20 has been shown to occur throughout the entire body.

For the presently described methods, a range of aluminosilicate starting materials can be used and, advantageously, contaminants such as fluxing agents do not need to be removed. However, the methods of the present invention are sensitive to the alumina:silica ratio and 25 the presence of fluxing impurities, such as oxides and/or salts of alkalies; alkaline earths; transition metals, in particular, iron oxides; semimetals, metalloids, and/or lanthanides; halogens also may be suitable fluxes.

In contrast with the present invention, most prior studies using similar materials to produce mullite aimed to achieve a mullite composition (3Al₂O₃·2SiO₂ [3:2 mullite: ~72:28 wt% 30 alumina:silica]). These studies did not attempt to produce 2:1 mullite (2Al₂O₃·SiO₂, ~77:23 wt% alumina:silica), which also is a potential compositional limit. The present

invention counter-intuitively uses aluminosilicate compositions containing silica contents greater than that of stoichiometric mullite (3:2, which brackets the 2:1 ratio). Higher proportions of silica and/or the presence of fluxes control the amount and properties, in particular, the viscosity, of the glass. The properties of the glass during heating are critical as they facilitate three phenomena that contribute to the generation of the aforementioned microstructures. These phenomena are (1) softening of the glass, which initially facilitates particle rearrangement and densification; (2) concomitant enhanced chemical diffusion of aluminium and silicon ions (by mass transfer), which accelerates mullite fibre growth; and (3) later viscous deformation of the glass, (viz., being a deformable medium), thereby allowing and not hindering the volumetric growth of the mullite fibres. To lower further the glass softening or glass transition temperature and thus encourage mullite fibre growth, potentially at lower temperatures, the composition also may include fluxes as described previously.

This approach is contrary to conventional approaches for mullite formation in refractories and some other products, wherein the glass content often is sought to be reduced. It also is contrary to conventional approaches to the formation of porcelain and some other products, wherein the glass content is balanced between densification (requiring high content) and deformation (requiring low content).

For the presently described methods, starting raw materials can include inexpensive precursors in the form of waste products, such as coal fly ashes, bottom ashes from furnaces and incinerators, and municipal ashes from incinerators. The inventors have found that coal fly ashes have variable alumina:silica ratios but that essentially all fly ashes have ratios with silica contents greater than that of stoichiometric mullite (3:2 and 2:1). This enables fly ashes alone or fly ashes with added vitrification aids and/or other types of compositional modifiers to be used as the raw materials for production.

Other naturally occurring raw materials may be suitable for the production of percolated mullite owing to their having compositions broadly similar to those of fly ashes. Such raw materials include kyanite, sillimanite, andalusite, topaz, pyrophyllite, clays, and/or other

aluminosilicate minerals with alumina:silica ratios containing excess silica relative to stoichiometric mullite (3:2 and 2:1).

To obtain percolated mullite from fly ash, the inventors have found that it is sufficient to

5 heat pure fly ashes to approximately 1500°C for some fly ashes and lower temperatures (particularly 1400°C) for others for a period of approximately 4 hours, although this can vary depending on the alumina:silica ratio and types and amount of fluxes present in the fly ash. It may be noted that the term "pure" refers to fly ashes containing intrinsic (fluxing) impurities; no fluxes have been added. The addition of some fluxes appears to

10 lower the time required for percolation to a degree sufficient to prevent further shrinkage to 2 hours. Further, some pure fly ashes show percolation in only 2 hours at 1400°C or at 1500°C. Fly ashes with high intrinsic levels of fluxes and those with added vitrification aids (*viz.*, fluxes) are expected to produce percolated mullite at lower temperatures.

15 In preparing a starting composition, alumina sources may include bauxite (high-alumina raw material), aluminium hydrates (which may comprise the majority component of bauxite), calcined alumina, and/or red mud (waste product from aluminium processing; this also contains high contents of iron oxide, which is a flux).

20 Potential aluminosilicate sources for mullite growth may include mullite, kyanite, sillimanite, andalusite, topaz, pyrophyllite, clays (such as kaolinite or illite [which includes iron oxide as a flux], pyrophyllite, phyllite-schist, saproliteclay, kyanite-staurolite, anorthosite, syenite, emery rock, and other naturally occurred aluminosilicate raw materials high in alumina.

25 The growth of mullite fibres in fly ashes during heat treatment is enhanced by the near-universal presence of pre-existing mullite grains. To enhance further the growth of mullite fibres, *ex situ* materials that contain and/or form mullite during heating may be added to the starting composition. For example, mullite-containing and/or mullite-forming

30 materials could be mixed with the fly ash before heating.

- 15 -

It will be appreciated that conventional prior art methods for the production of many mullite-based products typically require either uncontaminated precursor material or the addition of other ingredients (additional alumina or silica) in seeking to bring the starting composition as close as possible to the starting compositions required to produce pure 3:2 mullite as recorded in the literature (72:28 wt% alumina:silica).

It also will be appreciated that conventional prior art methods for porcelain production also typically require either highly pure precursor materials and careful control of the composition (containing potassia, alumina, and silica) in seeking to bring the starting composition as close as possible to the starting compositions that achieve the requisite balance between densification and deformation.

The methods described herein allow use of a vitreous and/or partially vitreous raw material, potentially containing fluxes and other undesirable components and in undesirable contents, to produce a mullite product whose thermomechanical properties can be prevented from being adversely affected by residual glass.

Furthermore, the heat treatment temperature and time (enhancing glass softening, chemical diffusion, and viscous deformation) and composition (by adjusting the alumina:silica ratio and/or adding a flux or fluxes) can be adjusted to generate microstructures whose characteristics are dominated by the continuous mullite matrix. For example, the inventors have shown this using multiple commercially available forms of coal fly ash.

In the presently described methods, mullite fibres grow to the point of percolation, at which point they form a rigid skeleton whereby some or all of the thermomechanical properties are not affected by the presence of the residual glass. Direct grain-to-grain bonding between the mullite fibres allows the exclusion of the glass from between the grains (fibres) in the final product (glass normally is required to assist in conventional mullite densification) and thus eliminates the potential deleterious high-temperature effects of glass (*i.e.*, through softening).

The presently described methods are applicable to both sintered shapes and fuse-cast shapes (using a mould). In the former case, the process requires suitable composition-temperature-time conditions such that the mullite network is able to be established (partially or completely) and thus resist viscous deformation and consequent loss of shape.

5 The principal determinator of this behaviour is the glass viscosity, which must be sufficiently high to retain the shape but sufficiently low to enhance chemical diffusion (to increase the mullite content).

The presently described methods provide a microstructurally stable mullite material that is 10 resistant to high-temperature shrinkage and deformation, to which effectively all conventional aluminosilicate products are subject and so consequently deteriorate during prolonged heating. The produced percolated mullite can be a highly dense or porous product capable of achieving uniquely superior thermomechanical properties.

15 In addition to its most apparent use as a refractory shape, the percolated mullite produced may be used as a refractory castable, refractory ramming mix, refractory crucible, refractory setter, refractory tube, refractory plate, refractory grain, refractory aggregate, kiln shelving, kiln post, heat shield, fibre blanket, fibre board, fibre shape, fuse-cast shape, corrosion-resistant shape, coating, whiteware, sanitaryware, dinnerware, wear-resistant 20 tile, military armour, proppant, corrosion-resistant shape, glass-ceramic (crystallised glass), filter, electrical insulator, electronic substrate, catalyst, and/or, *inter alia*, infrared-transmitting window.

As would be appreciated from the above the inventors have obtained the conditions 25 (materials, composition, temperature, and time) that result in the formation of a ceramic body consisting of percolated and direct-bonded (grain-to-grain) mullite that may extend throughout an entire body of material, with residual glass (and possibly crystalline phases) in the volume between the mullite.

30 This method includes the step of heating a body of material having a composition that incorporates the chemical system consisting of aluminium oxide (alumina) and silicon

dioxide (silica) and other possible components, wherein the composition includes an alumina:silica wt% ratio of from ~10:90 to ~77:23 (normalised to exclude non-alumina and non-silica impurities).

- 5 For example, the composition includes an alumina:silica wt% ratio (normalised to exclude non-alumina and non-silica impurities) of:
 - from approximately 10:90 to approximately 77:23
 - from approximately 10:90 to approximately 75:25
 - from approximately 10:90 to approximately 70:30
- 10 - from approximately 10:90 to approximately 65:35
- from approximately 10:90 to approximately 60:40
- from approximately 10:90 to approximately 55:45
- from approximately 10:90 to approximately 50:50
- from approximately 10:90 to approximately 45:55
- 15 - from approximately 10:90 to approximately 40:60
- from approximately 10:90 to approximately 35:65
- from approximately 10:90 to approximately 30:70
- from approximately 10:90 to approximately 25:75
- from approximately 10:90 to approximately 20:80
- 20 - from approximately 10:90 to approximately 15:85

As would be appreciated by a person skilled in the art, the composition may include pre-existing mullite and/or glass. Alternatively, the composition may not contain pre-existing mullite and/or glass but mullite and/or glass may form upon heating at high temperatures.

25

In addition, glass and/or mullite may be added to the composition before or during heating.

In addition, materials that form mullite upon heating may be added.

- 30 The composition also may include fluxes to encourage softening of the glass (and/or to enhance liquid formation otherwise) and/or lower the temperature and/or time required for

the formation of the percolated mullite. Fluxes may include, for example, oxides and/salts of alkalis, alkaline earths, transition metals, semimetals, metalloids, and/or lanthanides.; halogens also may be suitable fluxes.

- 5 The composition is heated to a temperature for a period of time sufficient to soften the glass component (typically above the glass transition temperature), encourage rapid chemical diffusion through the softened glass, and allow physical expansion of the mullite fibres into the yielding residual glass.
- 10 The inventors have found that particularly suitable starting compositions may include or be comprised principally of fly ash. Other particularly suitable compositions include a mixture of fly ash and aluminous raw materials (for example, alumina, bauxite, and/or aluminium hydrates) or, alternatively include fly ash, aluminous raw material(s) and a flux or fluxes (for example oxides and/or salts of alkalis, alkaline earths, transition metals, semimetals, metalloids, and/or lanthanides); halogens also may be suitable fluxes.
- 15

As would be appreciated the method is not limited to starting compositions including fly ash. The composition of the body of material to be heated may include one or more materials that form mullite on heating. Such materials may be naturally occurring raw materials, naturally occurring crystalline raw materials, and/or synthetic raw materials.

- 20
- 25 For example, the composition may include one or more of kyanite, sillimanite, andalusite, topaz, pyrophyllite, clay, and/or other aluminosilicate minerals. Other particular example compositions may include a mixture of bauxite and quartz (sand, sandstone, quartzite, ganister, *etc.*); mixtures of aluminium oxide (alumina) and silicon dioxide (silica); and mixtures of mullite, bauxite and quartz.

The method may include sintering without a mould in which case, the composition is typically heated to a temperature of a minimum of ~1400°C and a maximum ~1600°C, preferably at least ~1500°C. For fly ashes and other compositions that are silica-rich relative to the mullite composition (*viz.*, compositions containing >23 wt% SiO₂), the

appropriate heating temperature is dictated principally by the following interdependent variables: (a) flux content,(b) alumina:silica wt% ratio, (c) pre-existing mullite:glass ratio, and (d) pre-existing quartz content.

5 It would be appreciated by a person skilled in the art that the time condition commensurate with the temperature being used must be sufficient to achieve nucleation and/or grain growth of the mullite in order to achieve percolation such that the mullite network is continuous throughout the body. For sintering without a mould, the composition is heated to a temperature of a minimum of ~1400°C and a maximum of ~1600°C, preferably at 10 least ~1500°C for a minimal time of ~1 h, preferably ~4 h, and more preferably ~8 h.

The microstructural network may be formed principally of what is known as a 3-3 composite, where both the mullite and residual glass form mutually interpenetrating 3-dimensional networks. The mullite is direct-bonded and so there is no glass between the 15 mullite grains. This microstructure consists of a mullite volume content (relative to the total mullite + glass content) of <90-95%. When sintering without a mould to achieve such a microstructure, the composition is heated to a temperature preferably of at least ~1500°C for a maximal time of ~8 h.

20 The microstructure network alternatively may be formed principally of what is known as a 0-3 composite, where the mullite forms a 3-dimensional network and the residual glass is isolated in individual regions not in mutual contact. The mullite is direct-bonded and so there is no glass between the mullite grains. This microstructure consists of a mullite volume content (relative to the total mullite + glass content) of ≥90-95%. For sintering 25 without a mould to achieve such a microstructure, the composition is heated to a temperature preferably of at least ~1500°C for a minimal time of ~8 h. This may result in grain growth, grain coarsening, reduction in glass content, physical segregation of the residual glass, and void formation.

- 20 -

Residual glass may be removed from the fully percolated microstructure by leaching with a suitable solvent, such as hydrofluoric acid (HF), thereby resulting in a porous and rigid scaffold of mullite whiskers, fibres, and/or equiaxed mullite.

5 The method also may include fuse-casting in a mould, wherein the composition is heated to temperature sufficient to allow rapid liquid flow. As would be appreciated, the minimal temperature depends on the composition but the maximal temperature is 1850°C.

It will be appreciated that, in contrast to prior art mullite formation, the present method
10 provides percolated and direct-bonded mullite throughout the entire body produced in accordance with any one of the methods described above.

It also will be appreciated that the starting composition may be modified in order to avoid the intention of forming of mullite directly but to lead to the formation of other
15 aluminosilicate products. For example, suitable addition levels of a material based on magnesium oxide (periclase, MgO) may be added such that the formation of magnesium aluminosilicate (cordierite, $2\text{MgO}\cdot 2\text{Al}_2\text{O}_3\cdot 5\text{SiO}_2$) is favoured; similarly, a form of sodium oxide (soda, Na₂O) may be added to form sodium aluminosilicate (nepheline, Na₂O·Al₂O₃·2SiO₂). Many other aluminosilicates can be produced by this method.
20 Optional embodiments of the present invention also may be said to consist broadly in the parts, elements, and features referred to or indicated herein, individually or collectively, in any or all combinations of two or more of the parts, elements, and/or features, and wherein specific integers are mentioned herein that have known equivalents in the art to which the invention relates, such known equivalents are deemed to be incorporated herein as if
25 individually set forth.

Although a preferred embodiment has been described in detail, it should be understood that various changes, substitutions, and/or alterations can be made by one of ordinary skill in the art without departing from the scope of the present invention.

It will be appreciated that various forms of the invention may be used individually or in combination.

5 EXAMPLES

The inventors have shown that a highly dense and thermomechanically stable mullite can recrystallise and/or form from fly ash (a waste product of coal combustion) by heat treatment at $\geq 1500^{\circ}\text{C}$ for ≥ 4 hours. In other cases, with fly ashes of lower alumina:silica ratios and/or the presence of fluxes (intrinsic or extrinsic), the temperature and/or time can be reduced (e.g., $\geq 1400^{\circ}\text{C}$ and ≥ 2 hours). The inventors also have shown that lower temperatures and shorter times are possible, depending on the nature of the fly ash and additions, if any. The resultant microstructures are unique in that (1) the fibrous mullite grains form a continuous skeleton (percolate) throughout the body and (2) the grains bond directly to one another in the absence of intergranular glass. Owing to the unique completely percolated microstructure of direct mullite-to-mullite bonding (derived counter-intuitively since the raw materials from which the product is made are vitreous or partially vitreous), this material exhibits high-temperature thermomechanical stability at temperatures $\geq 1500^{\circ}\text{C}$ (possibly as high as 1850°C , the melting point or decomposition temperature of mullite).

Several fly ashes were examined having varying alumina/silica wt% ratios:

Effect on Shrinkage →	Decrease	Increase	Decrease	Decrease	Increase
Fly Ash↓	Al ₂ O ₃ /SiO ₂ (wt%)	Fluxes (wt%)	Mullite/Glass	Quartz	LOI (wt%)
1	48/52	5.0	High	Low	25.0
2	24/76	1.5	Low	High	2.1
3	24/76	2.1	Medium	Medium	2.4
4	30/70	7.0	Medium	Medium	0.9
5	28/72	4.5	Medium	Medium	2.9
6	40/60	7.8	High	Low	5.5
7	40/60	10.7	High	Low	1.0
8	48/52	6.9	High	Low	17.2
9	34/66	12.5	Medium	Medium	6.3
10	37/63	11.6	High	Low	4.9
11	26/74	4.7	Medium	Medium	2.7

2012350159 05 Aug 2016

12	38/62	99	High	Low	113
----	-------	----	------	-----	-----

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as, an acknowledgement or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

2012350159 05 Aug 2016

The claims defining the invention are as follows:

1. A method of producing percolated mullite in a body of material, the method including the step of heating the body of material at a temperature in the range of from 1400° to 1600° for at least two hours, wherein the body of material has a composition that includes alumina and silica, and the weight percent ratio of alumina:silica is from 10:90 to approximately 60:40 when normalized to exclude non-alumina and non-silica impurities.
2. A method as claimed in claim 1, wherein the body includes pre-existing mullite, and/or a pre-existing glass component.
3. A method as claimed in claim 1, wherein the composition includes at least one flux.
4. A method as claimed in claim 3, wherein the at least one flux is an oxide and/or salt of an alkali, alkaline earth, transition metal or lanthanide, or a semimetal oxide, metalloid oxide, or a halogen.
5. A method as claimed in claim 1, wherein the composition of the body includes a naturally occurring raw material and/or a synthetic raw material capable of forming mullite when heated.
6. A method as claimed in claim 1, wherein the body is comprised principally of fly ash, bottom ash, municipal ash, or mixtures thereof.
7. A method as claimed in claim 1, wherein the composition of the body includes one or more materials selected from the group consisting of fly ash, bottom ash, municipal ash, mullite, kyanite, sillimanite, andalusite, topaz, pyrophyllite, clays, phyllite-schist, saprolite clay, kyanite-staurolite, anorthosite, syenite, emery rock, other aluminosilicates, bauxite, alumina, aluminium hydrates, and red mud.


2012350159 05 Aug 2016

8. A method as claimed in any one of the preceding claims, wherein the body is heated at a temperature in the range from 1400°C to 1600°C for at least 8 hours.
9. A method as claimed in any one of the preceding claims, wherein the body is heated at a temperature of at least 1500°C.
10. A body of material including a percolated mullite microstructure formed of a continuous or effectively continuous interconnected scaffold or network of direct-bonded mullite grains, the direct bonded mullite grains being such that glass is excluded from between the grains, wherein the percolated mullite microstructure extends continuously and substantially throughout the entire body.
11. A body of material as claimed in claim 10, wherein the material is principally a 3-3 composite, with mullite and glass forming mutually interpenetrating 3-dimensional networks.
12. A body of material as claimed in claim 10, wherein the material is principally a 0-3 composite, wherein the mullite forms a 3-dimensional network and residual glass is isolated in individual regions not in mutual contact.
13. A body of material as claimed in claim 11, wherein the microstructure consists of a mullite volume content relative to the total mullite and glass content of less than 95%.
14. A body of material as claimed in claim 13, wherein the microstructure consists of a mullite volume content relative to the total mullite and glass content of less than 90%.
15. A body of material as claimed in claim 12, wherein the microstructure consists of a mullite volume content, relative to the total mullite and glass content of greater than or equal to 90%.

16. A body of material as claimed in claim 15, wherein the microstructure consists of a mullite volume content, relative to the total mullite and glass content of greater than or equal to 95%.
17. A method as claimed in claim 1, wherein the weight percent ratio of alumina:silica is from 10:90 to 55:45.
18. A method as claimed in claim 1, wherein the weight percent ratio of alumina:silica is from 10:90 to 35:65.
19. A method as claimed in claim 1, wherein the weight percent ratio of alumina:silica is from 10:90 to 30:70.
20. A method of producing percolated mullite in a body of material, the method including the step of heating the body of material, wherein the body of material has a composition that includes alumina and silica, and the weight percent ratio of alumina:silica is from 24:76 to 48:52 when normalized to exclude non-alumina and non-silica impurities.
21. A method of producing percolated mullite in a body of material, the method including the step of heating the body of material, wherein the body of material has a composition that includes alumina and silica, and the weight percent ratio of alumina:silica is from 10:90 to 65:35 when normalized to exclude non-alumina and non-silica impurities, and wherein the body includes pre-existing mullite.
22. A method of producing percolated mullite in a body of material, the method including the step of heating the body of material, wherein the body of material has a composition that includes alumina and silica, and the weight percent ratio of alumina:silica is from 10:90 to 65:35 when normalized to exclude non-alumina and non-silica impurities, and wherein the body includes a pre-existing glass component.
23. A method of producing percolated mullite in a body of material, the method including the step of heating the body of material, wherein the

body of material has a composition that includes alumina and silica, and the weight percent ratio of alumina:silica is from 10:90 to 65:35 when normalized to exclude non-alumina and non-silica impurities, and wherein the body is comprised principally of fly ash, bottom ash, municipal ash, bagasse ash, rice husk ash, or mixtures thereof.

24. A method of producing percolated mullite in a body of material, the percolated mullite formed of direct bonded mullite grains, the percolated mullite also extending continuously and substantially throughout the entire body of material, the method including the step of heating a composition that includes alumina and silica, wherein the weight ratio of alumina:silica is from approximately 10:90 to approximately 65:35.
25. Percolated mullite produced in accordance with the method of any one of the preceding claims.
26. Use of the percolated mullite as claimed in claim 25 in a refractory shape, refractory castable, refractory ramming mix, refractory crucible, refractory setter, refractory tube, refractory plate, refractory grain, refractory aggregate, kiln shelving, kiln post, heat shield, fibre blanket, fibre board, fibre shape, fuse-cast shape, corrosion resistant shape, coating, whiteware, sanitaryware, dinnerware, wear-resistant tile, military armour, proppant, glass-ceramic (crystallised glass), filter, electrical insulator, electronic substrate, catalyst and/or infrared-transmitting window.
27. A body of material including a percolated mullite microstructure formed of direct-bonded mullite grains, the percolated mullite microstructure extending continuously and substantially throughout the entire body.
28. A body of material as claimed in claim 27, wherein the material is a 3-3 composite.
29. A body of material as claimed in claim 27, wherein the material is a 0-3 composite.

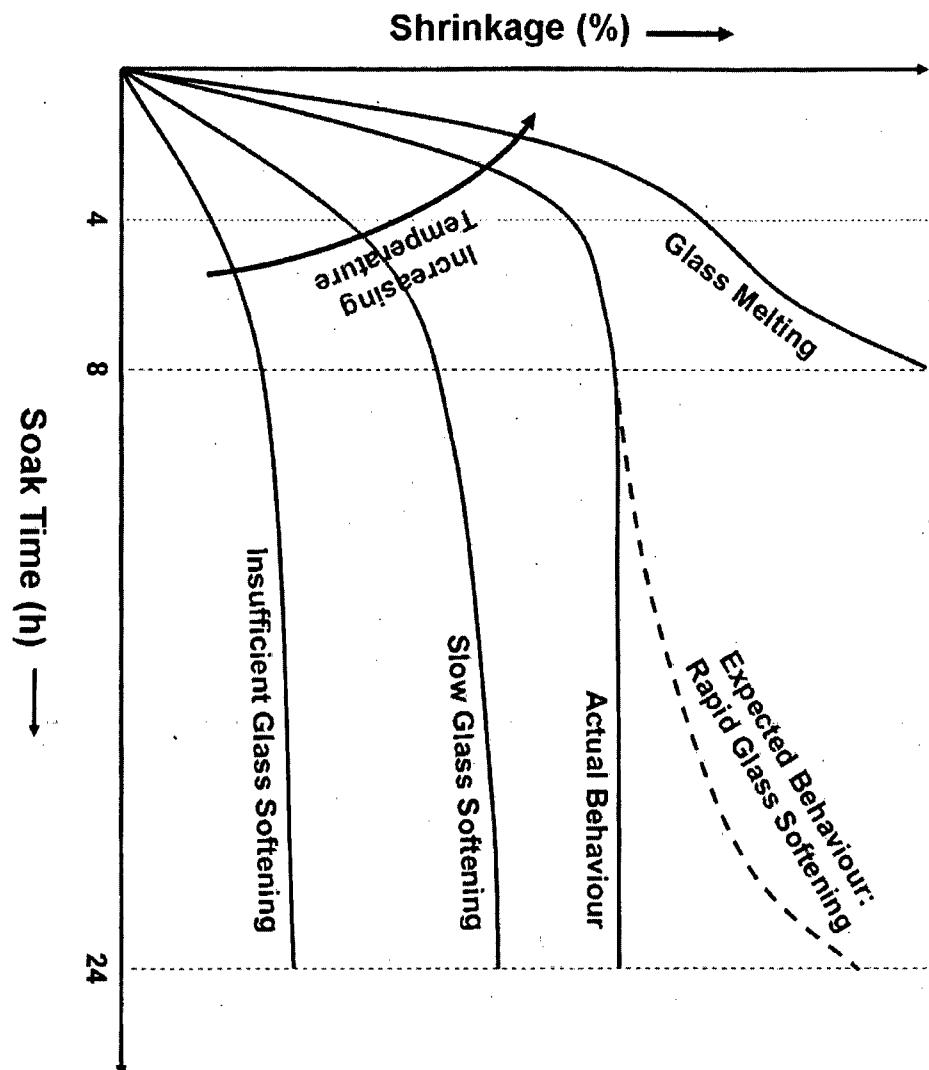

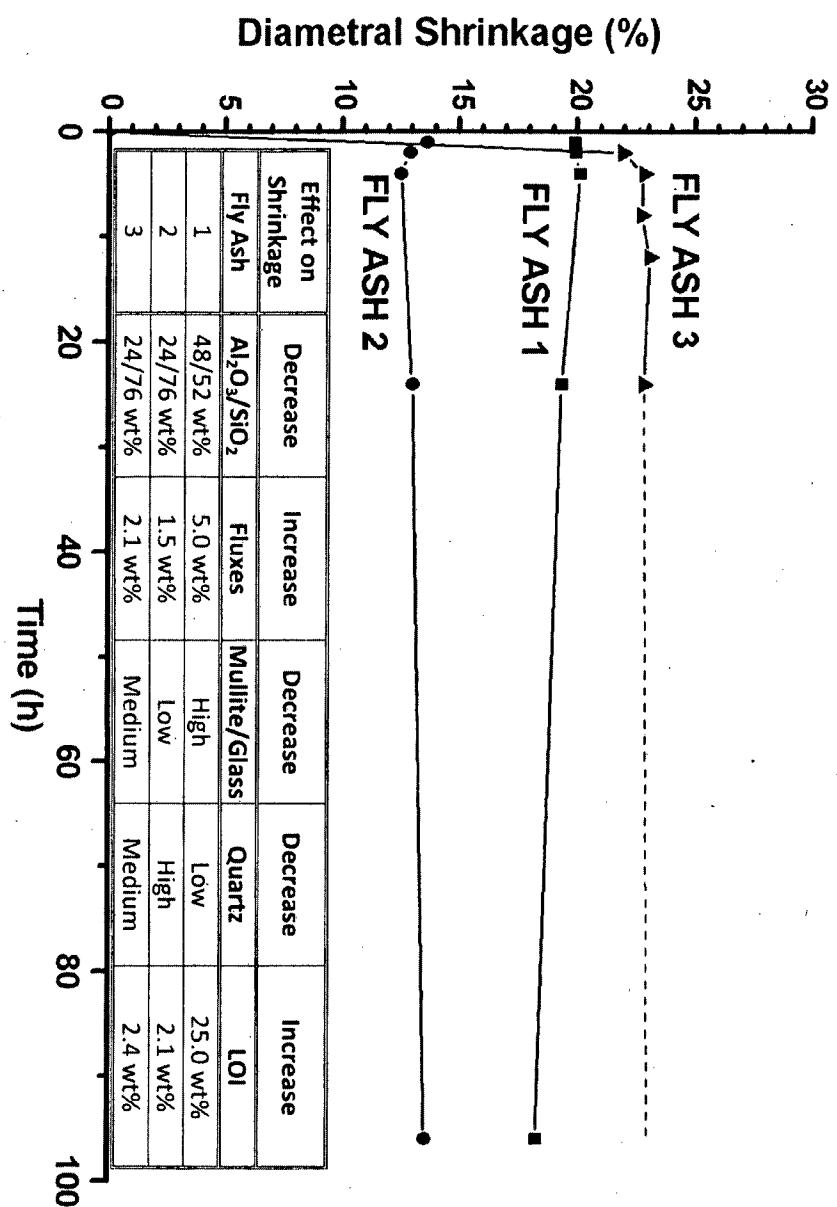


Figure 2

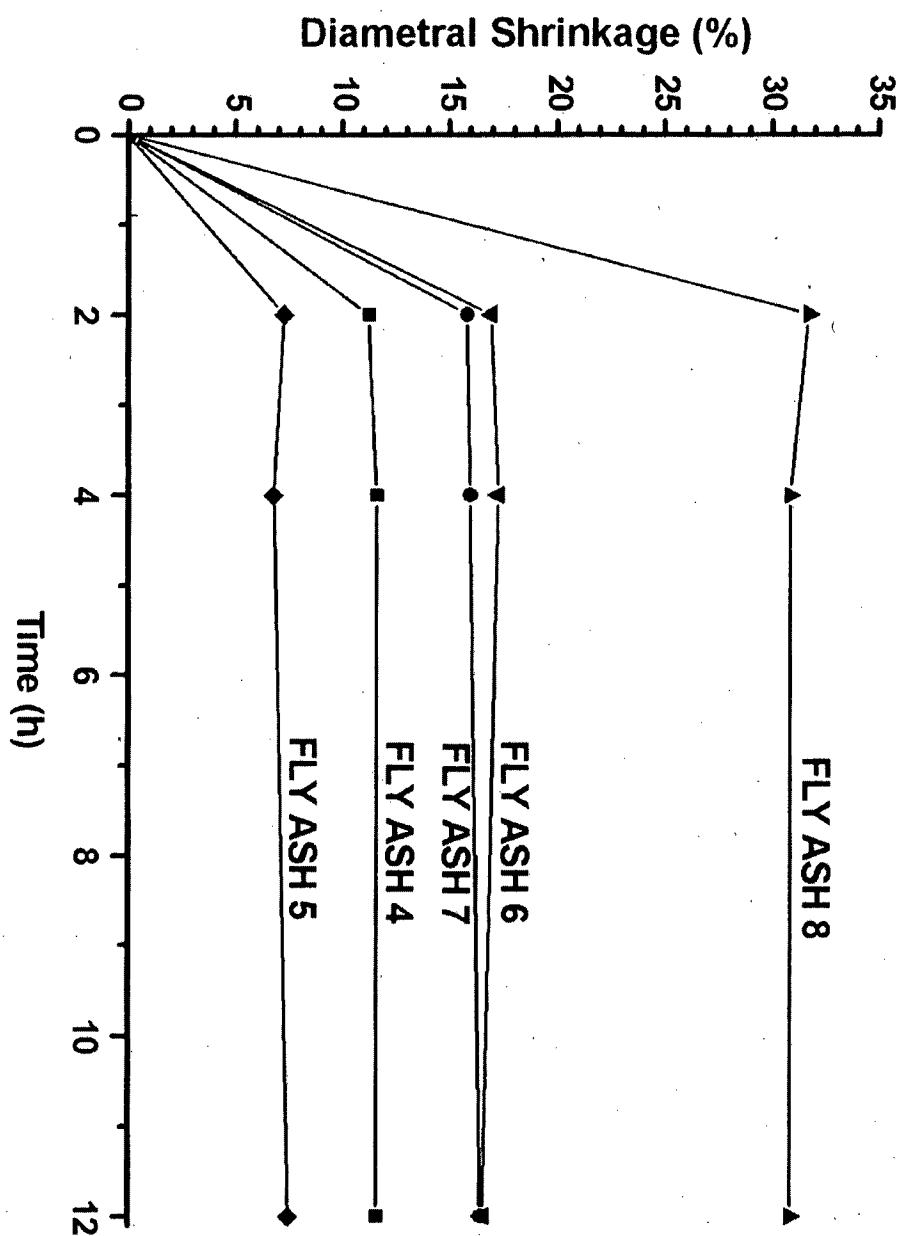


Figure 3a

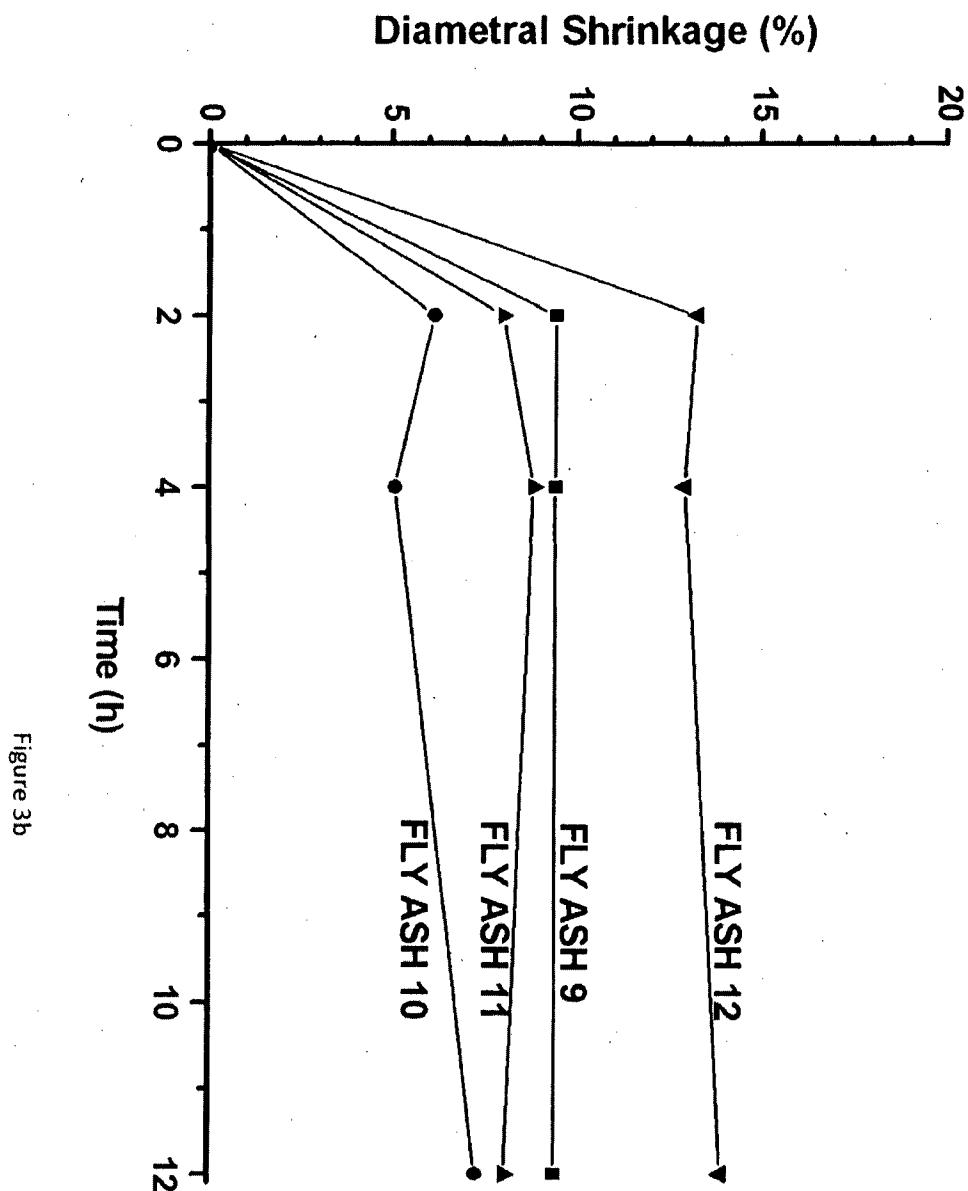


Figure 3b

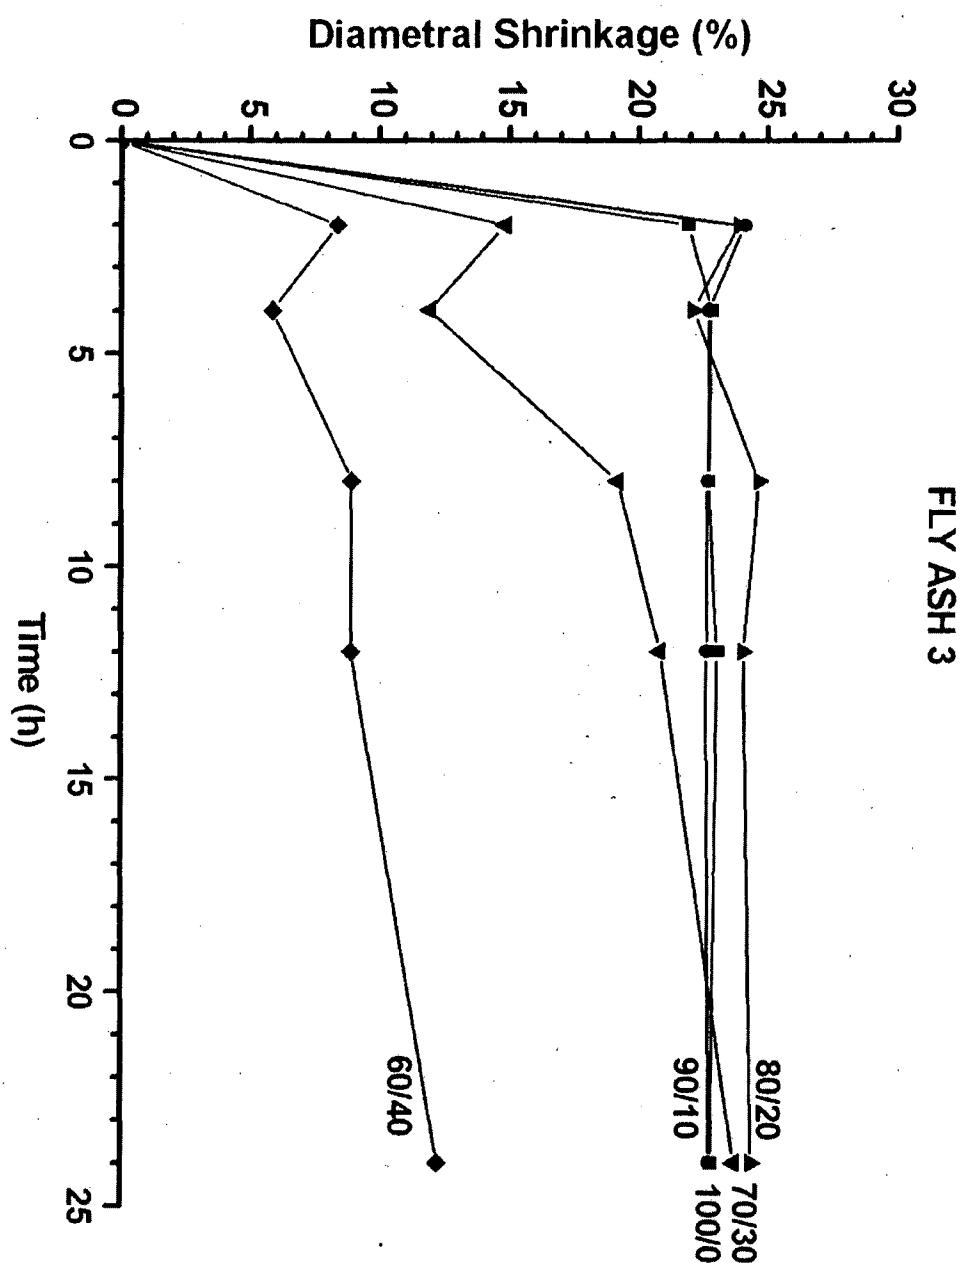


Figure 4

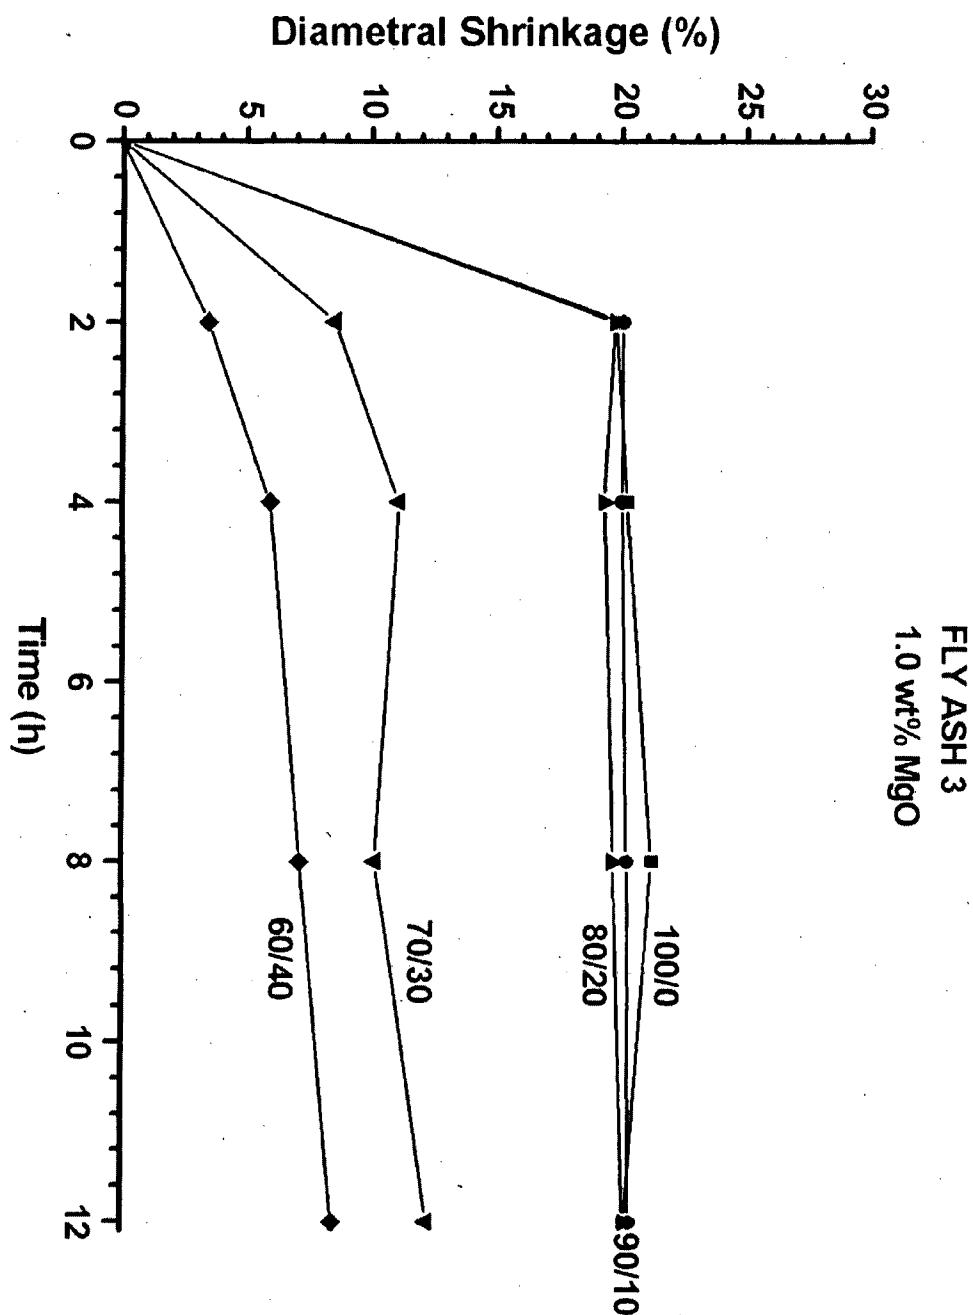


Figure 5


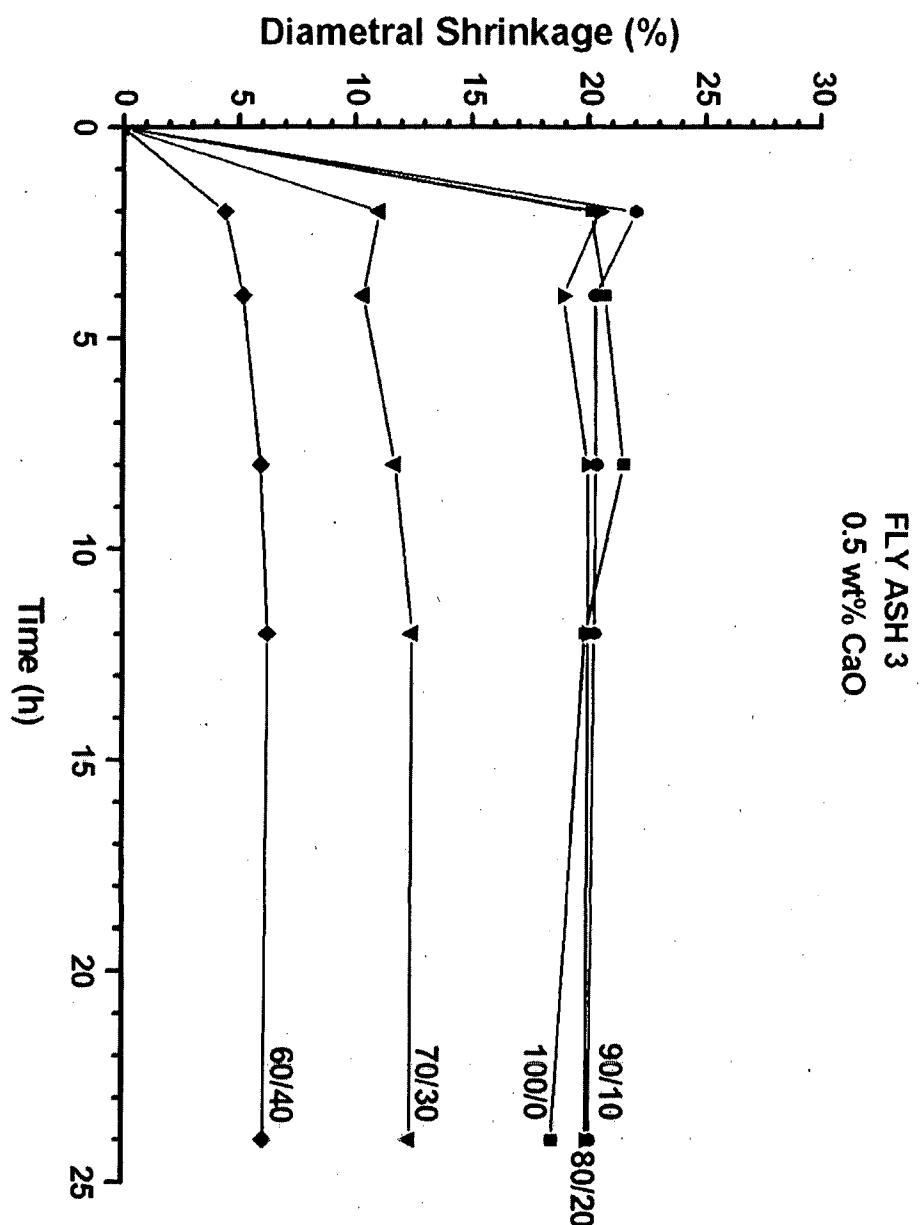


Figure 6

8/58

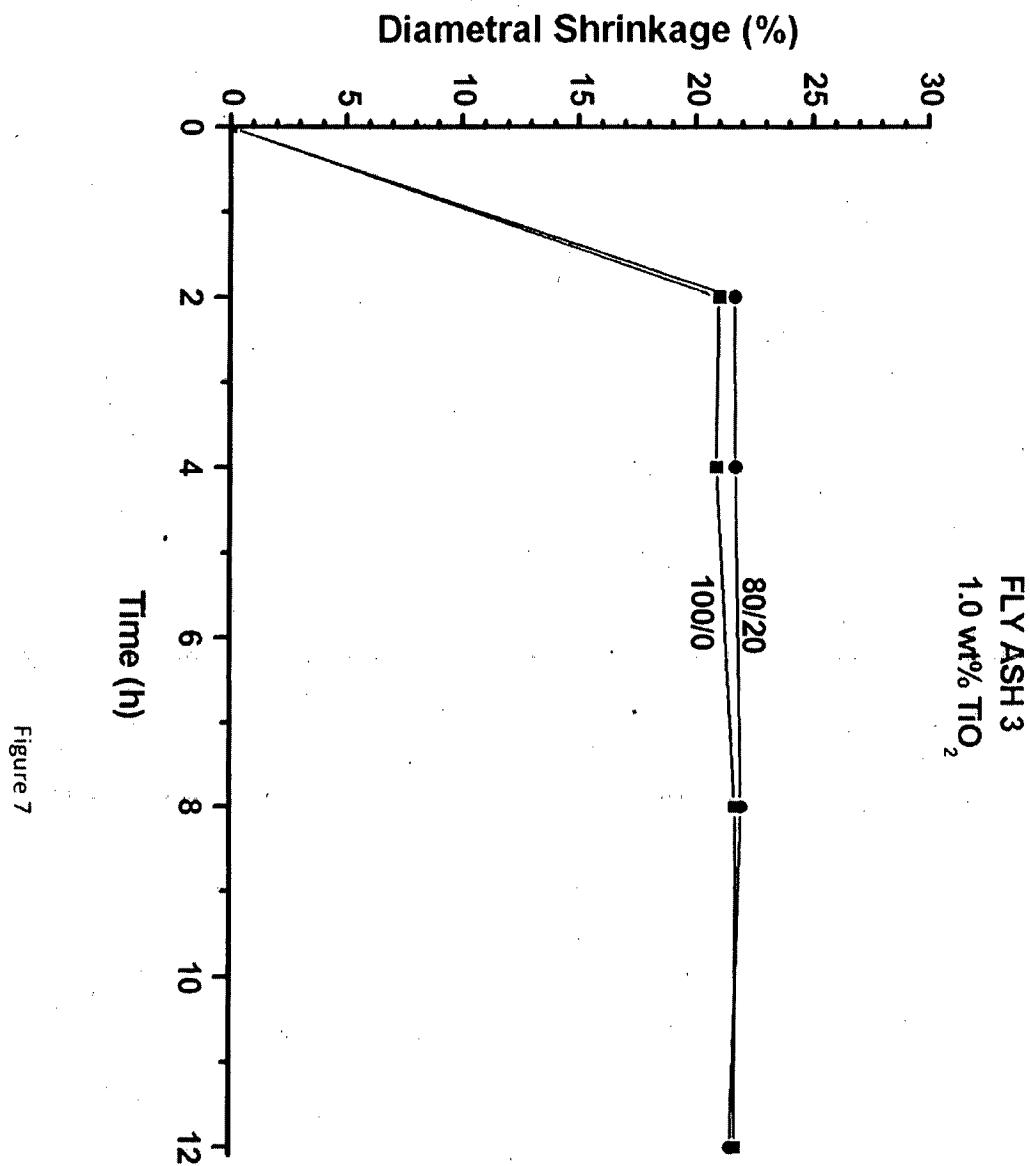

9/58

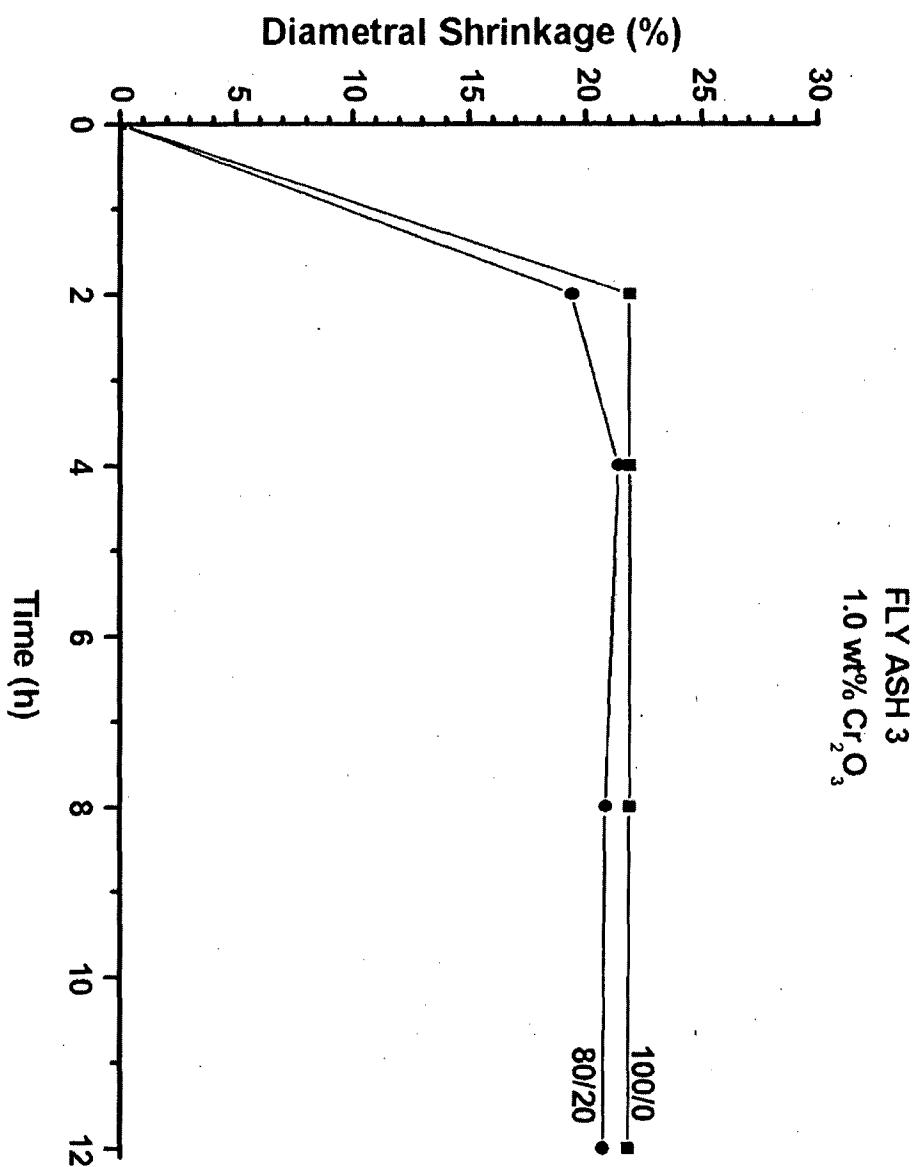


Figure 8

10/58

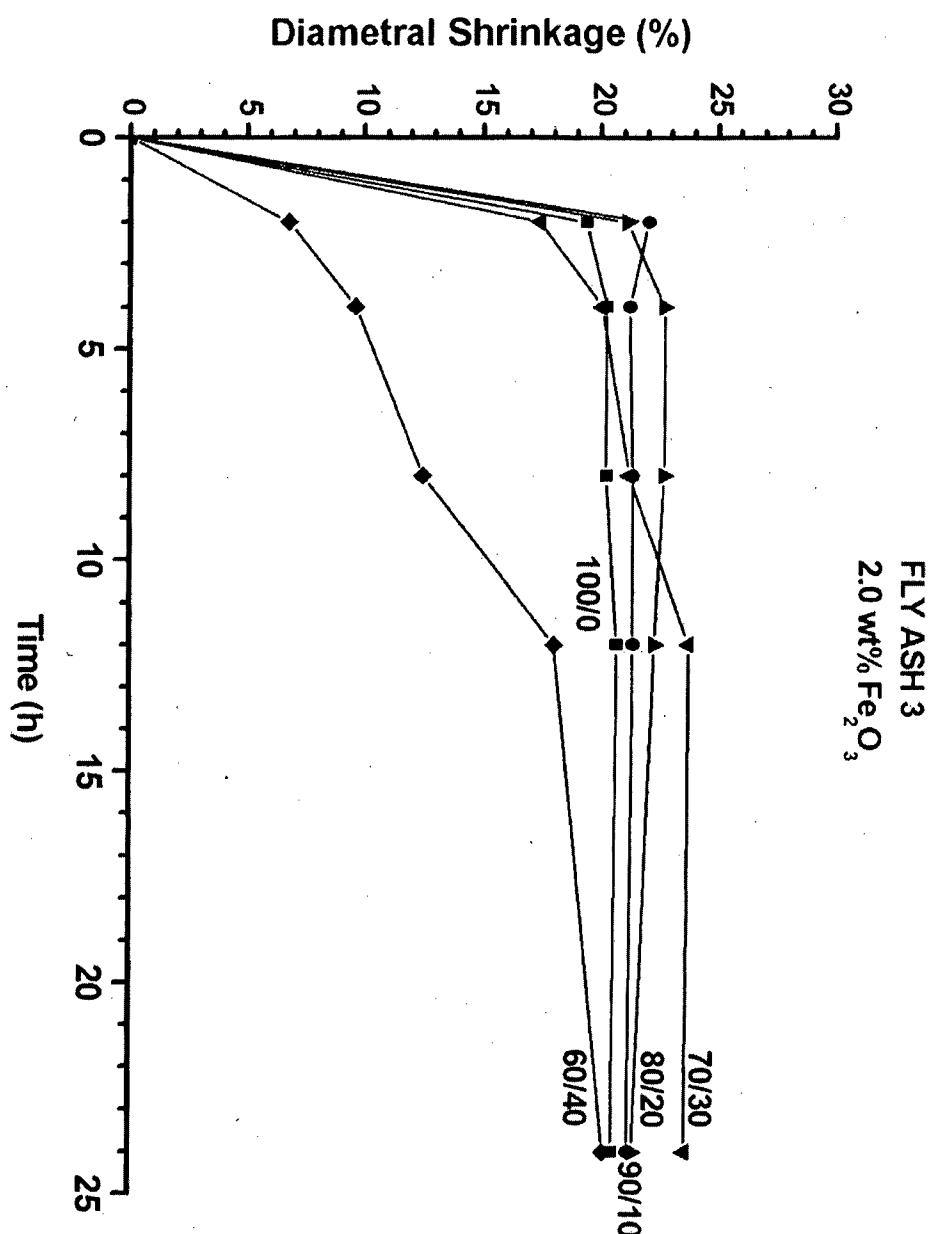


Figure 9

11/58

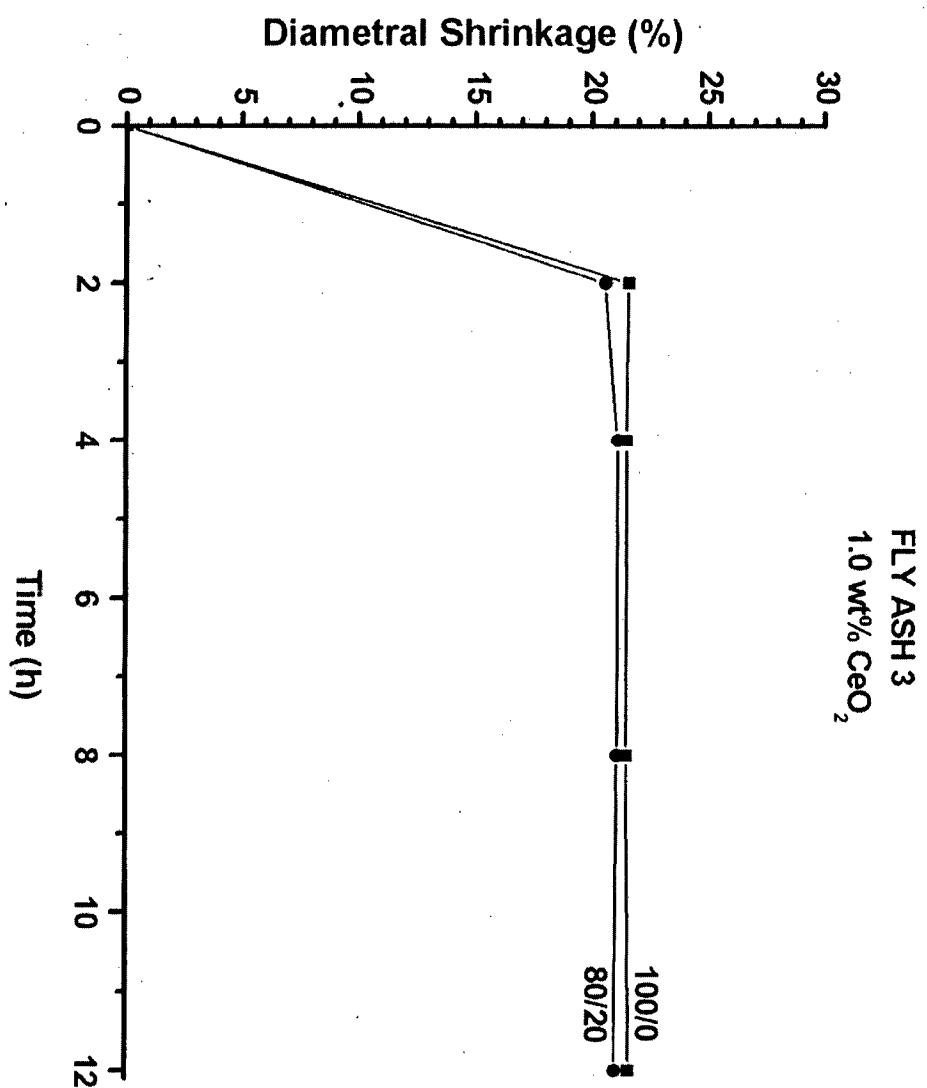


Figure 10

12/58

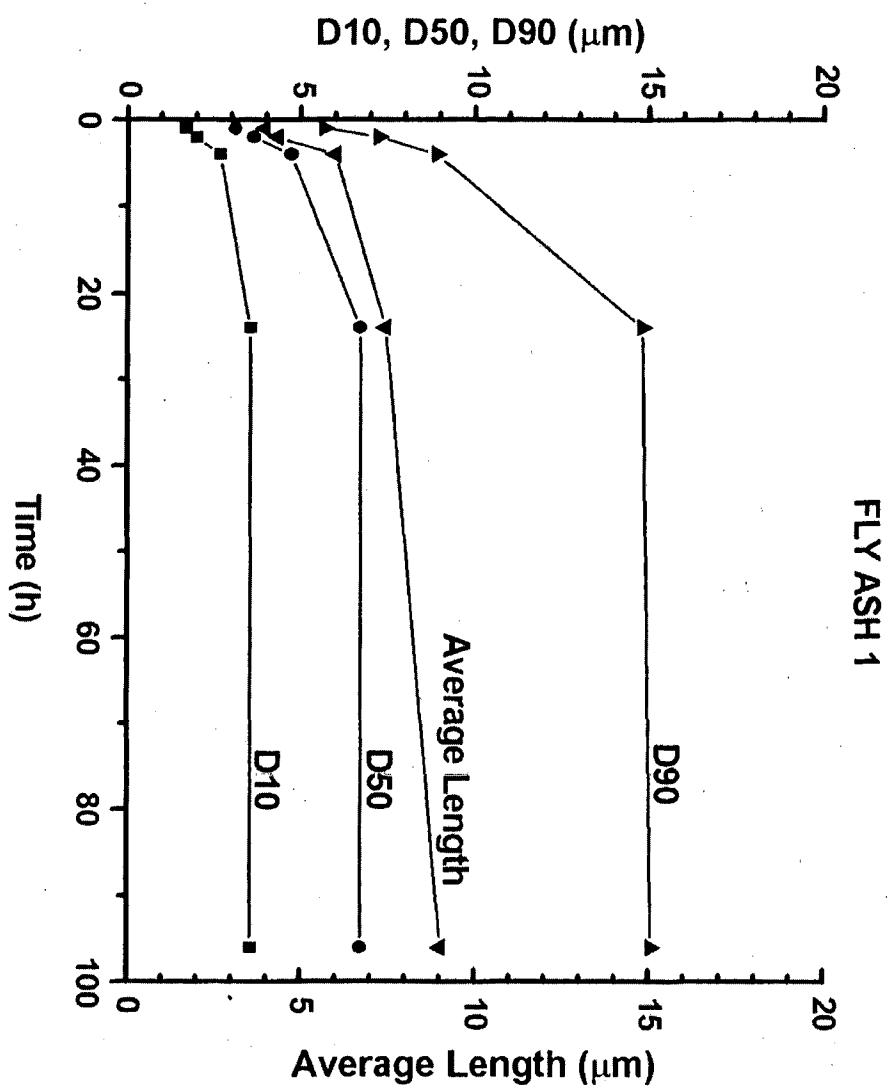


Figure 11a


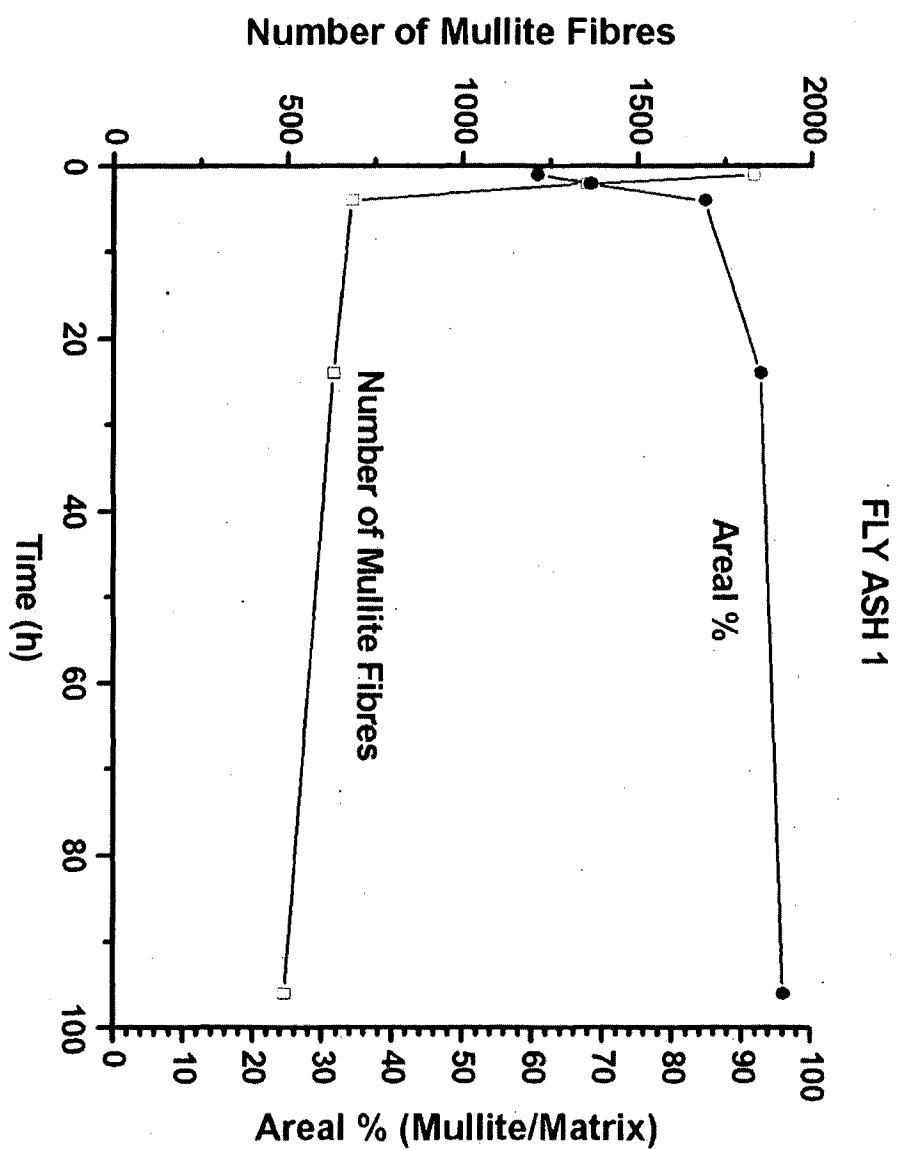


Figure 11b

14/58

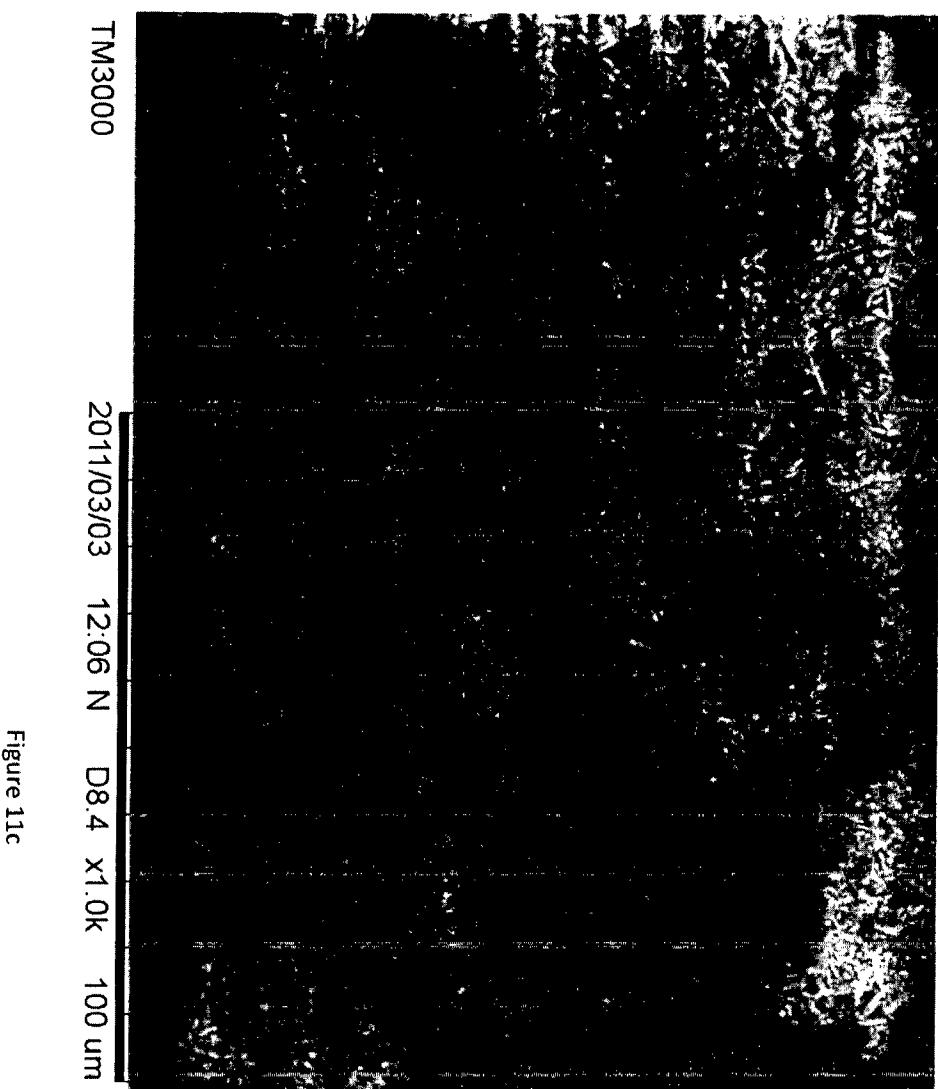

15/58

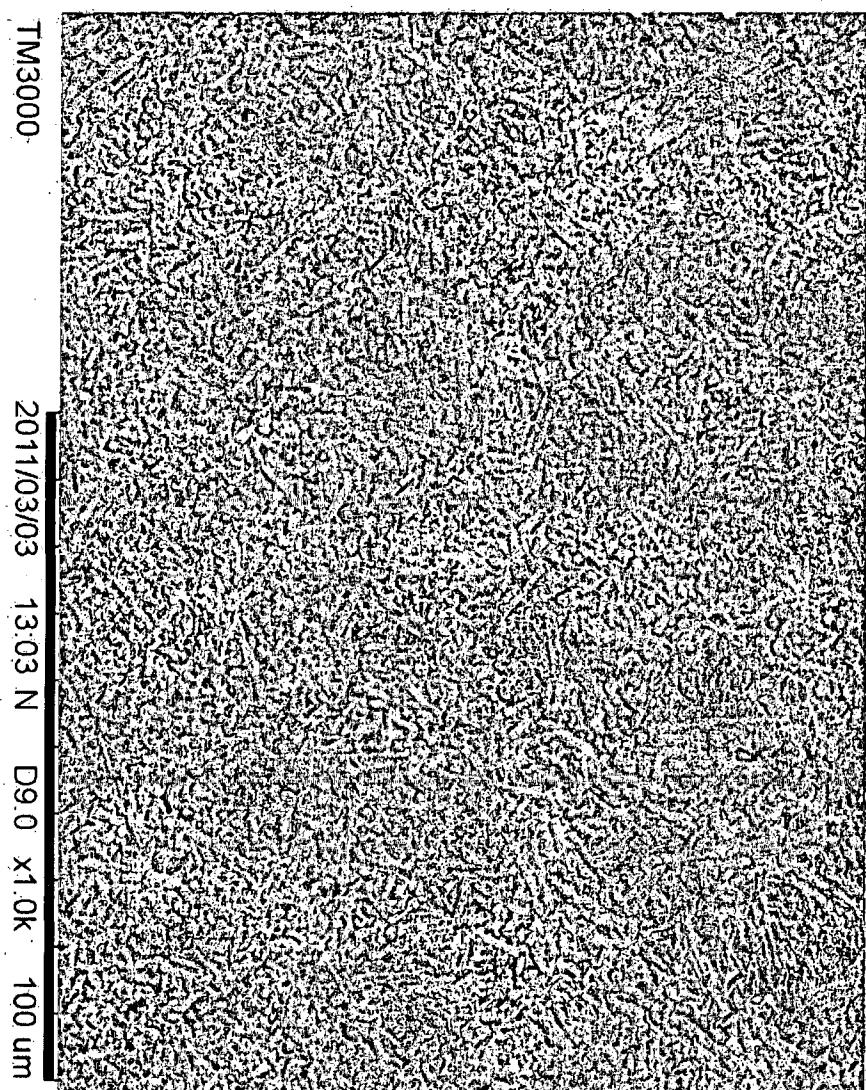


Figure 11d

16/58

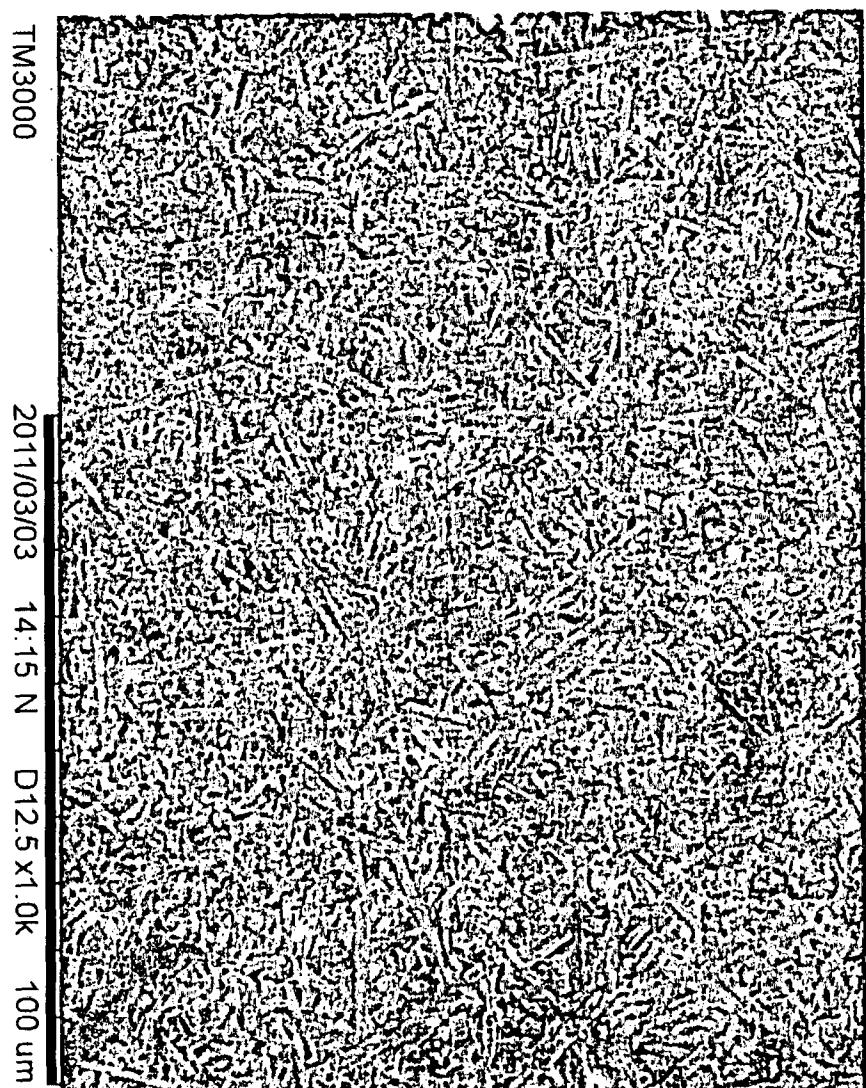


Figure 11e

17/58

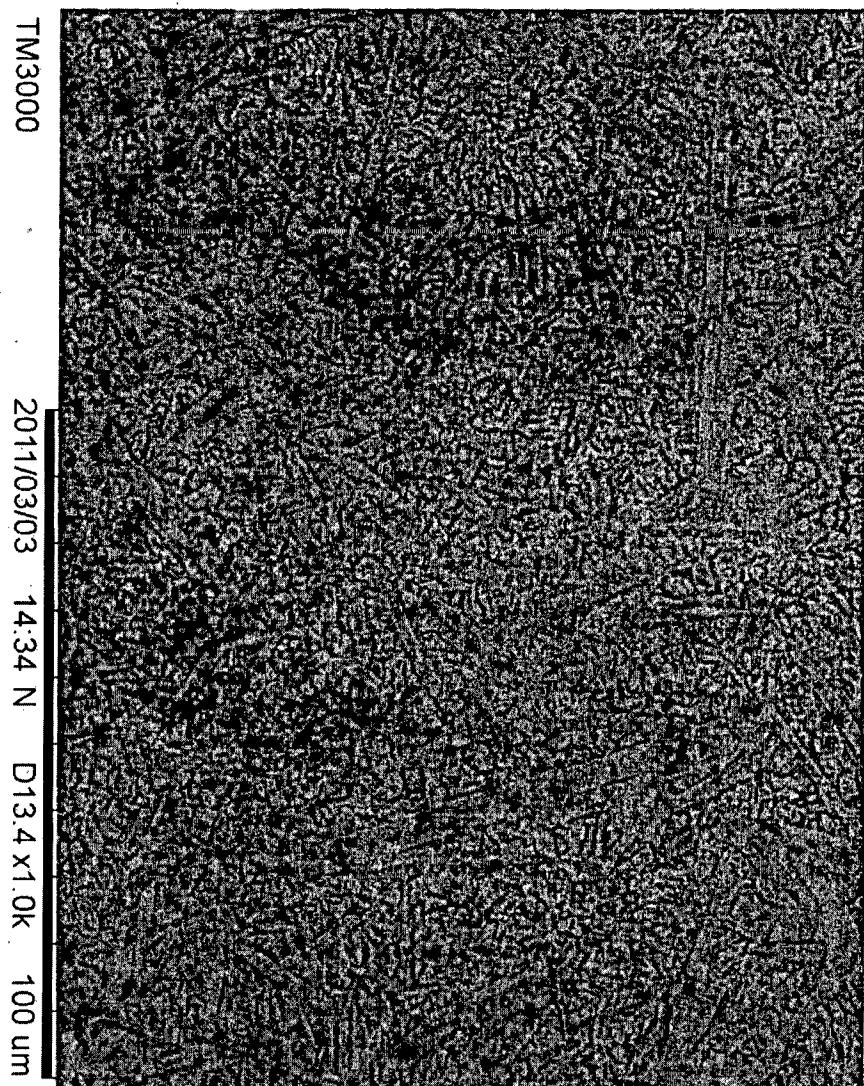


Figure 11f

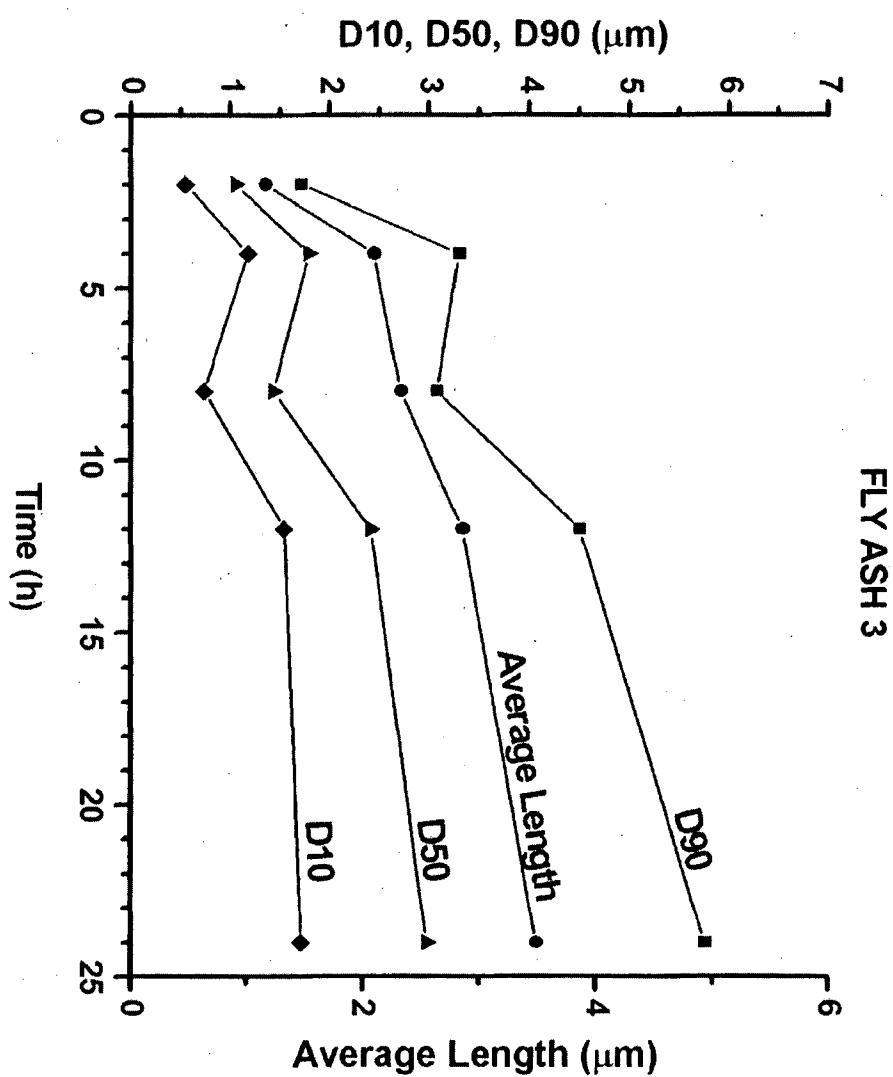


Figure 12a

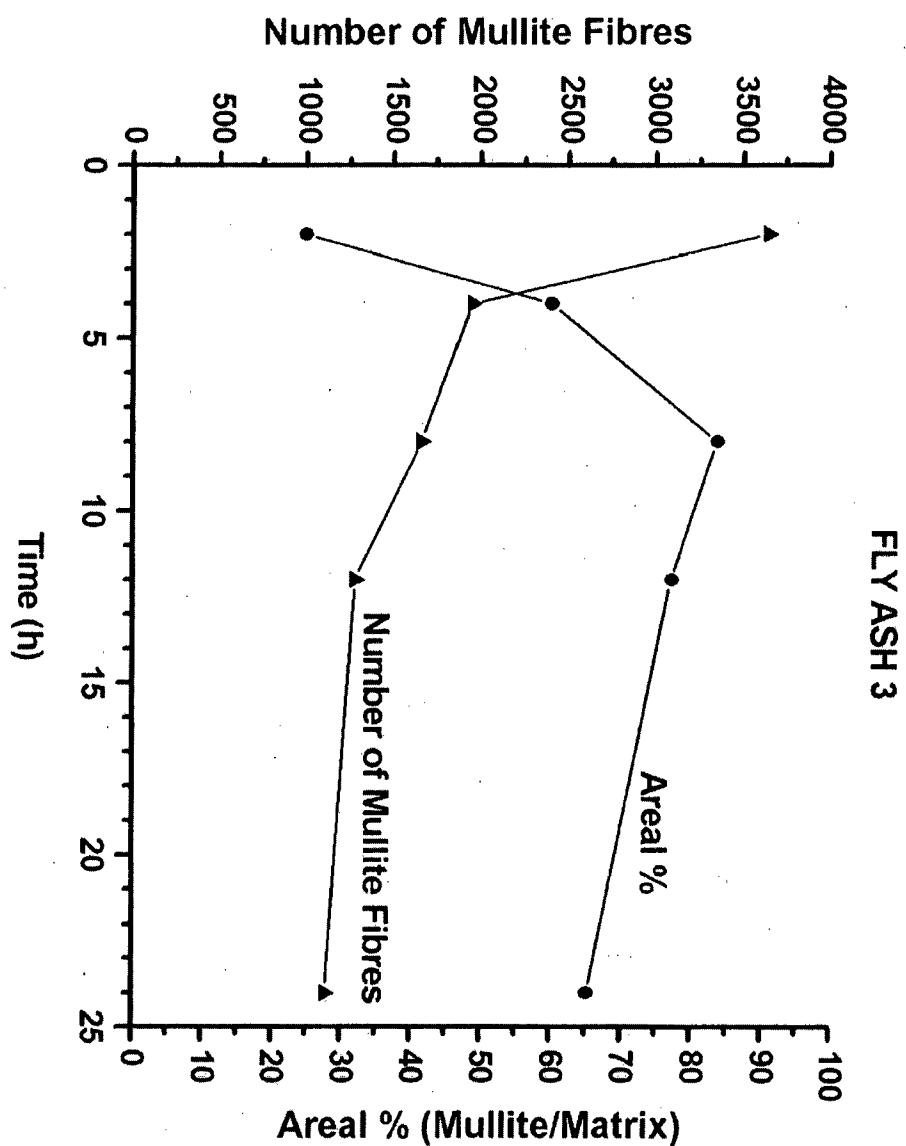


Figure 12b

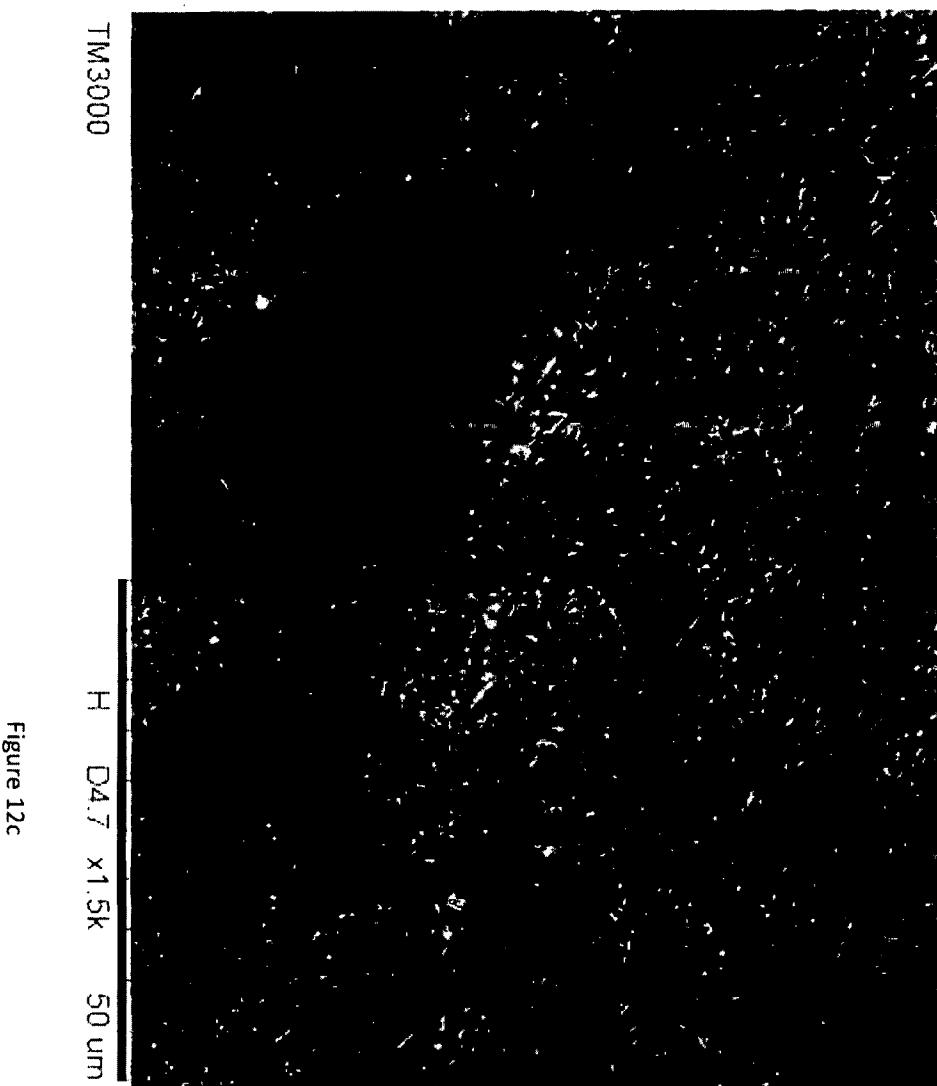


Figure 12c

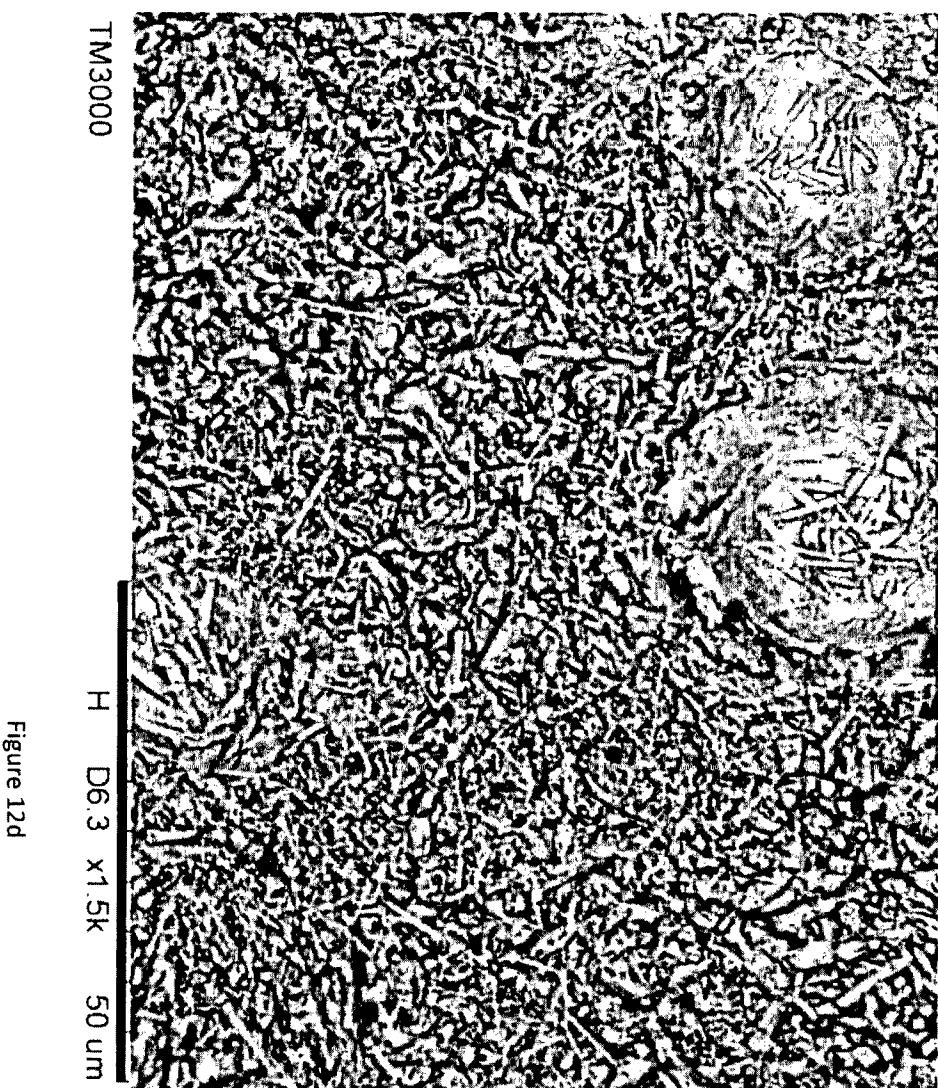


Figure 12d

22/58

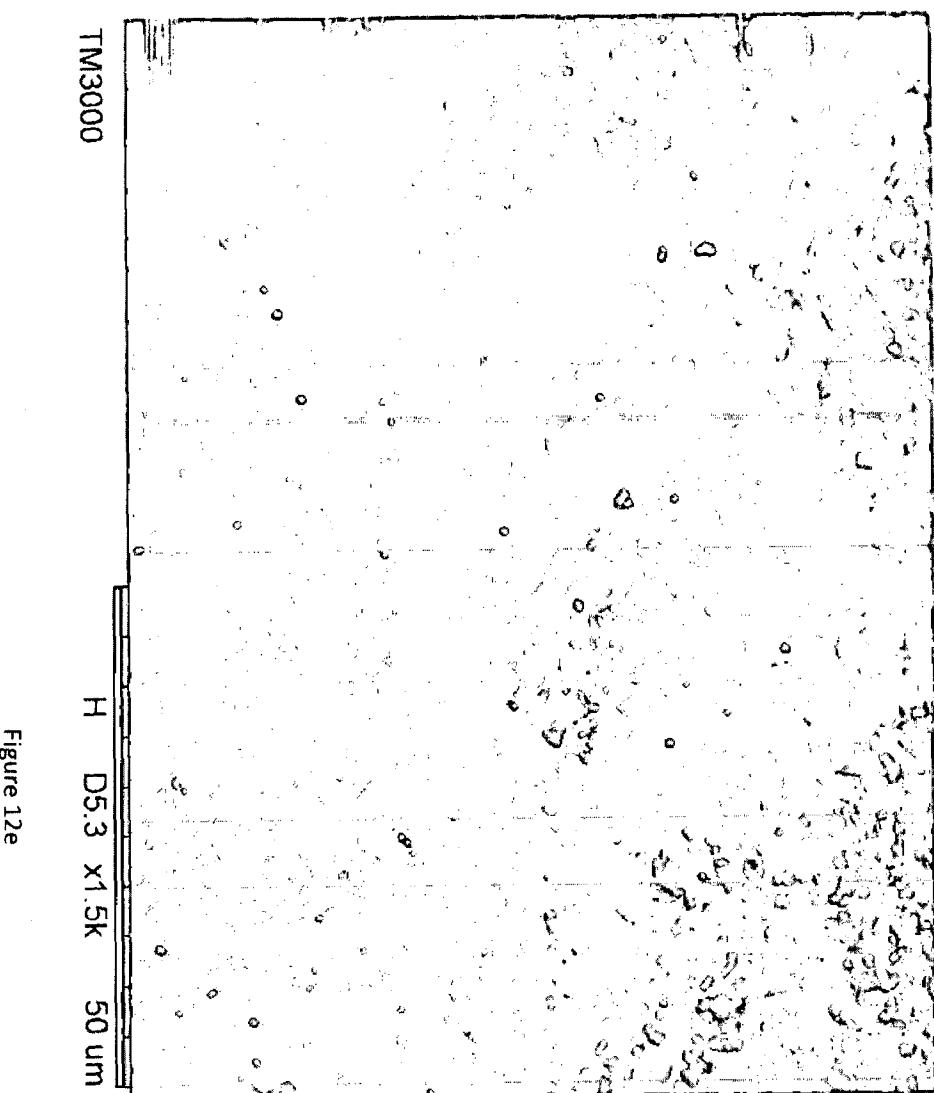


Figure 12e

23/58

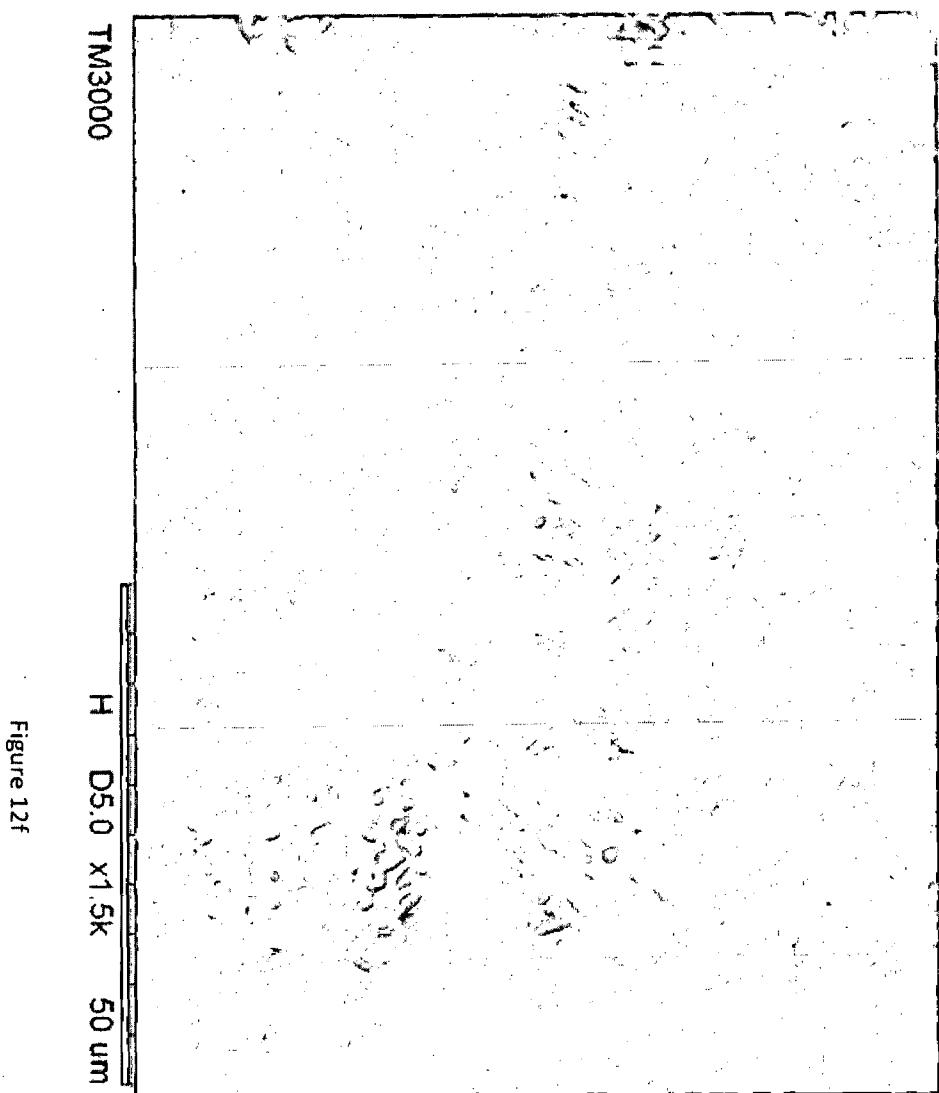


Figure 12f

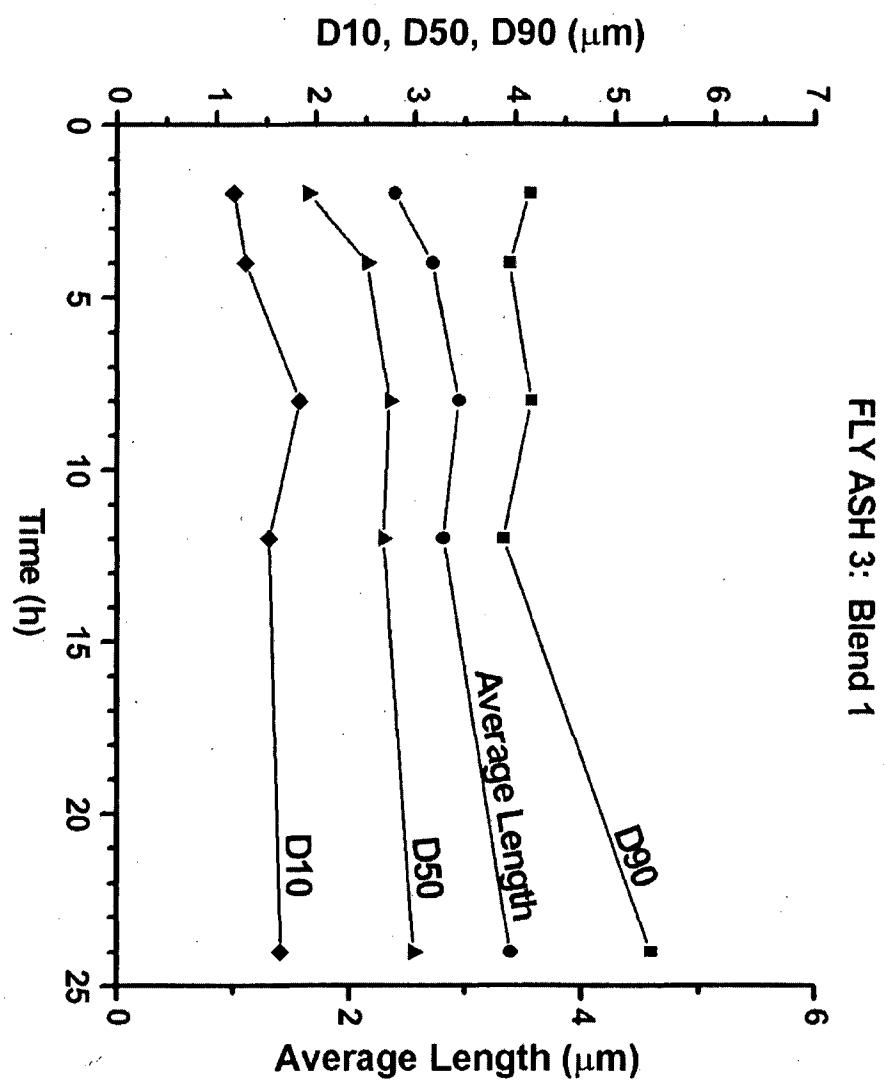


Figure 13a

25/58

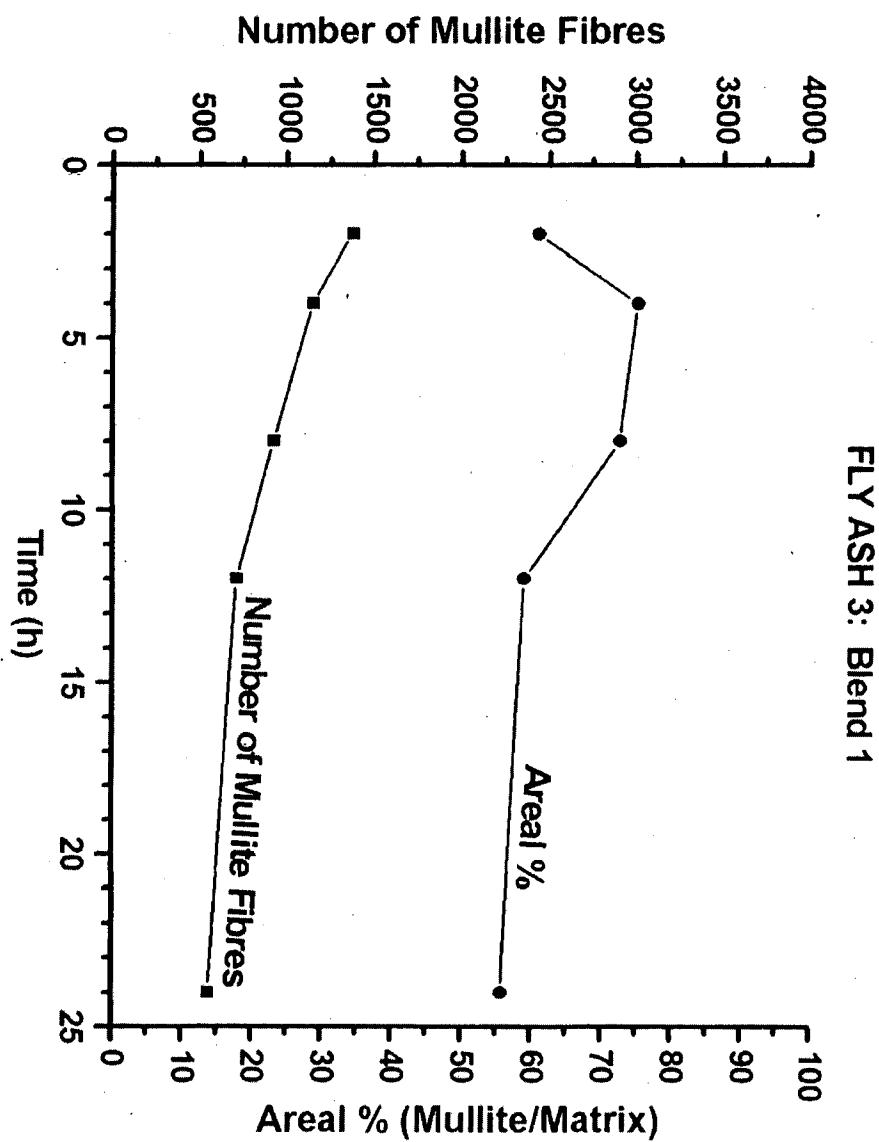


Figure 13b

26/58

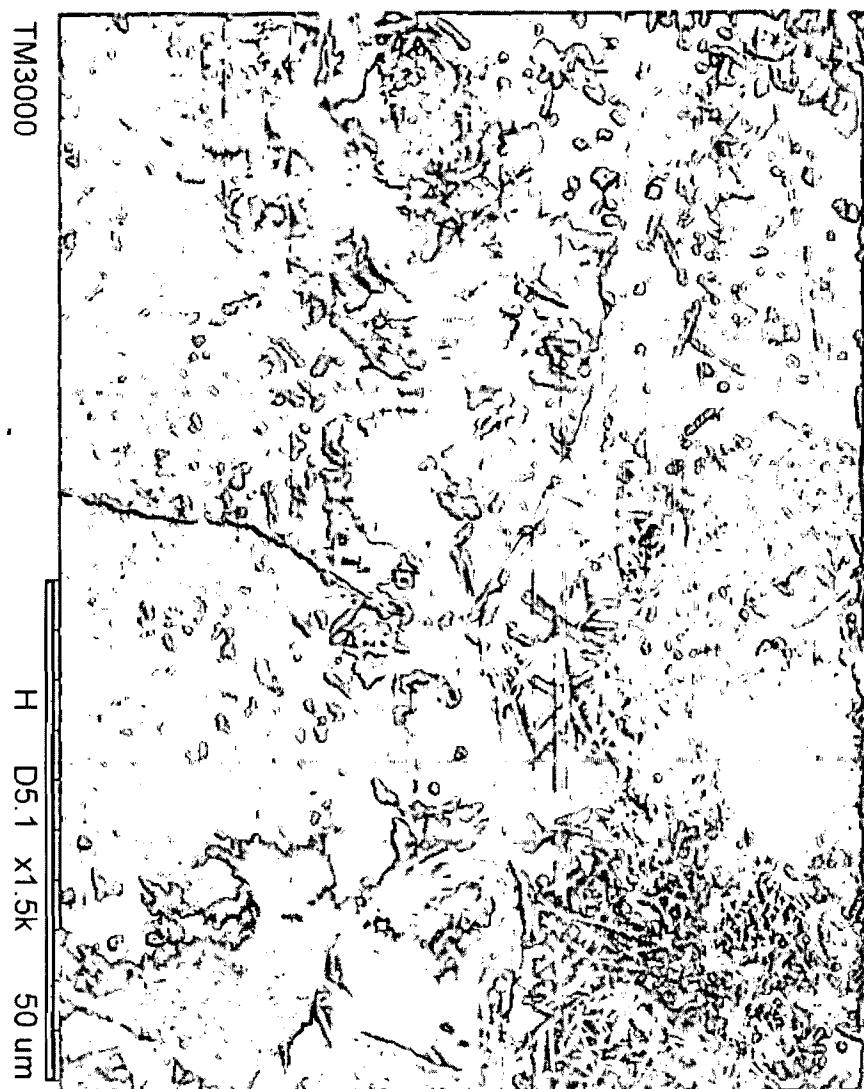


Figure 13c

27/58


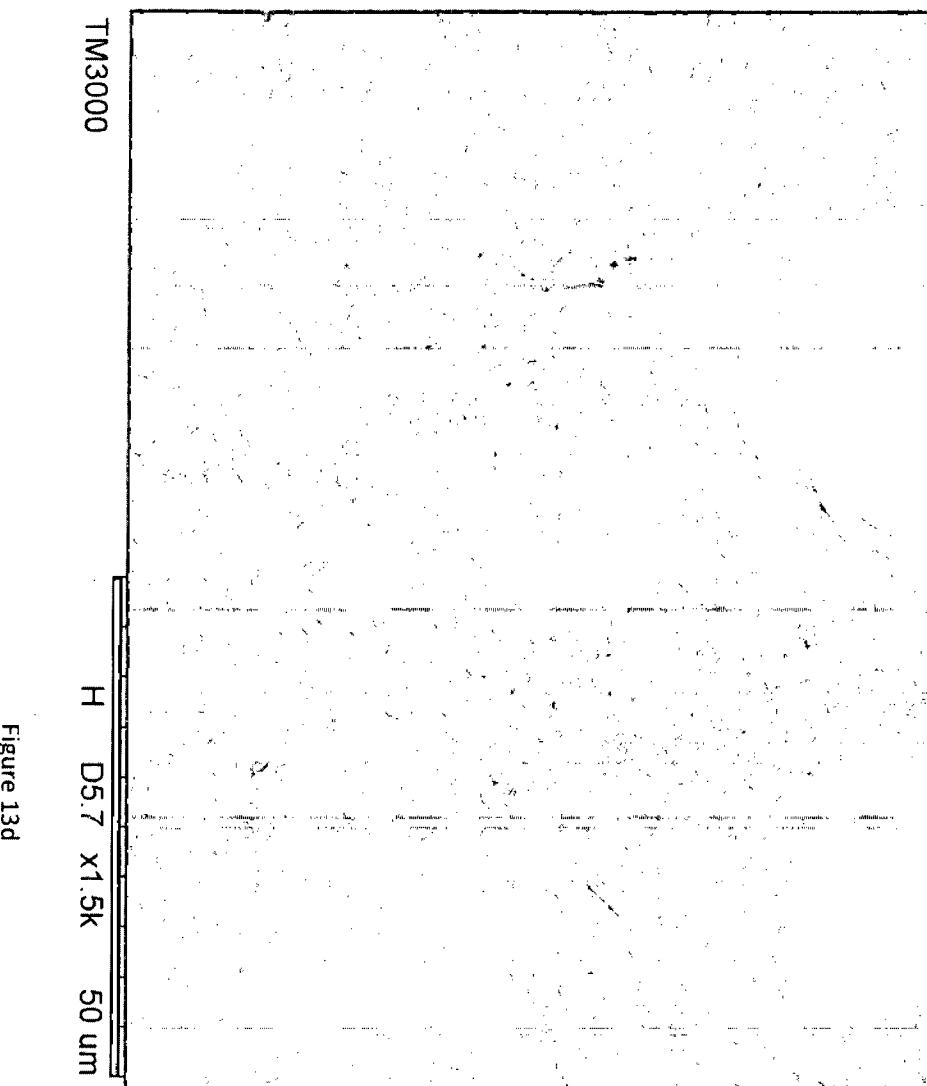


Figure 13d

28/58

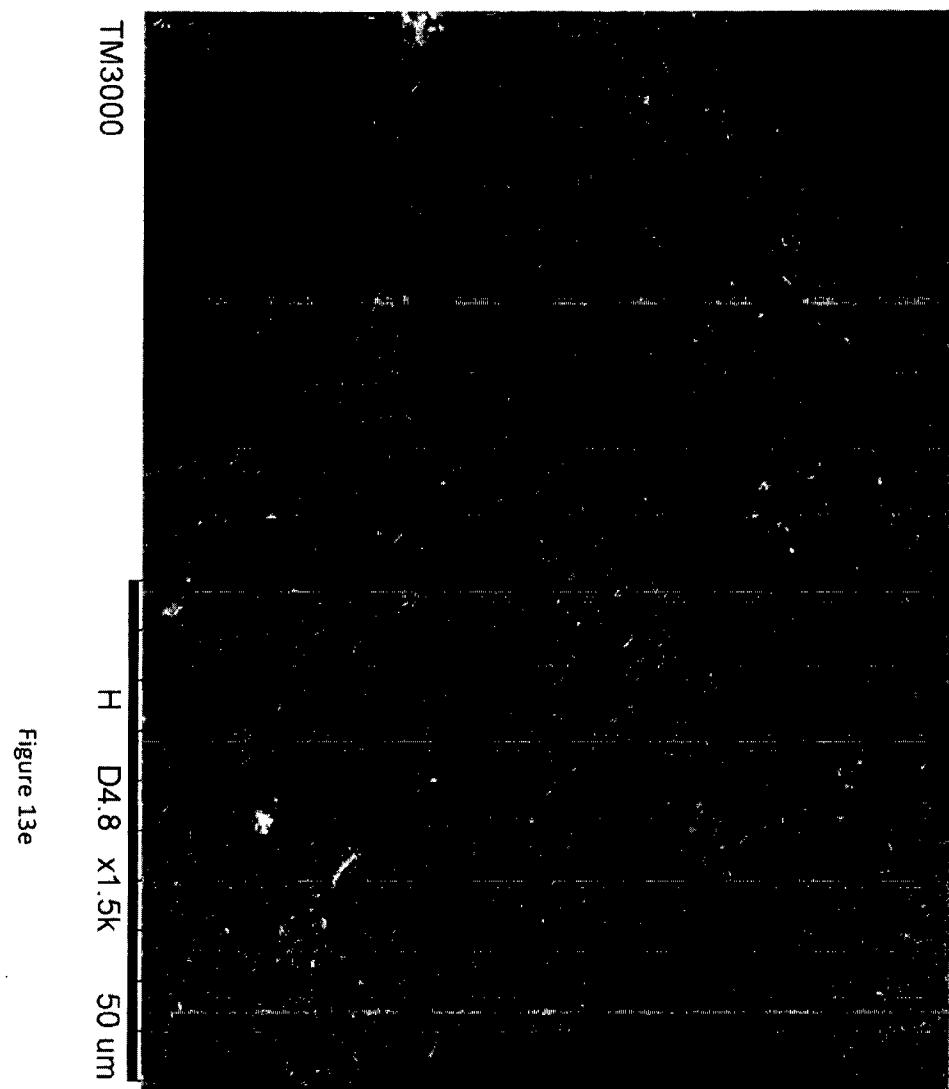

29/58

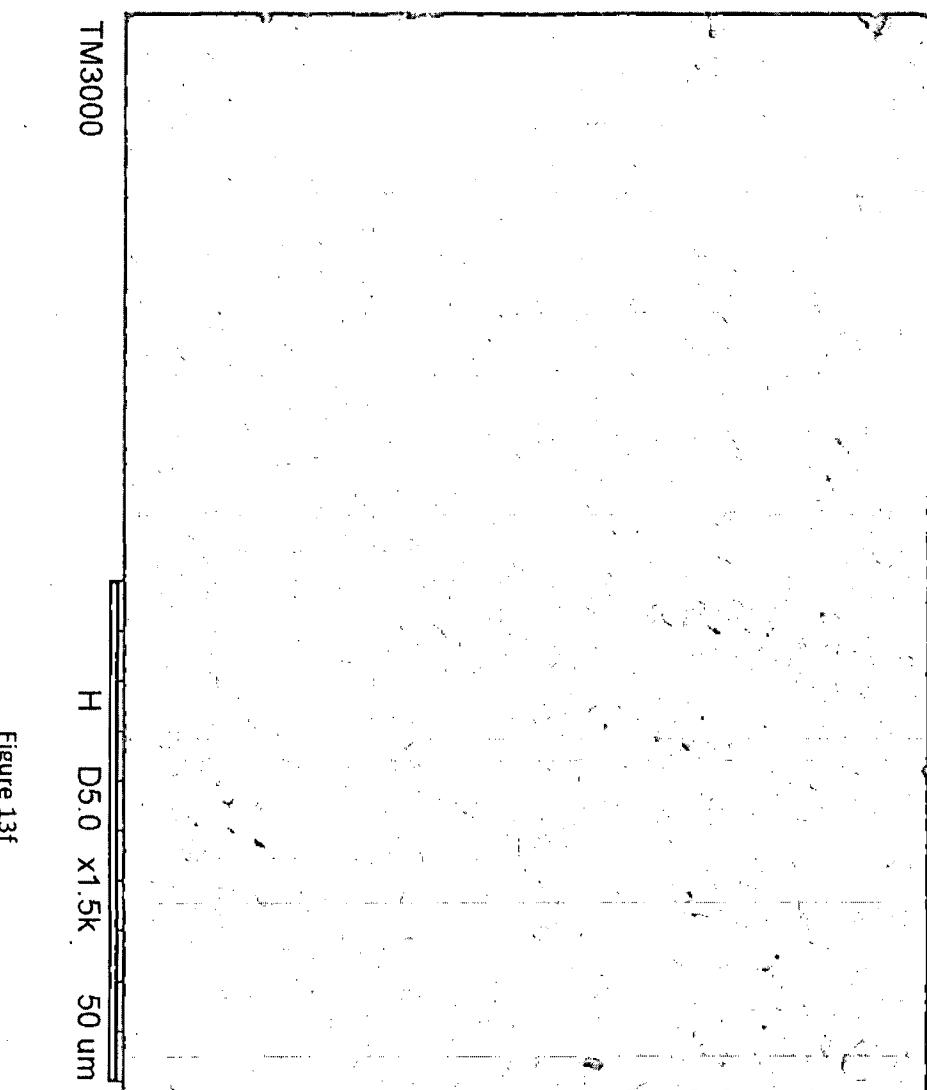


Figure 13f

30/58

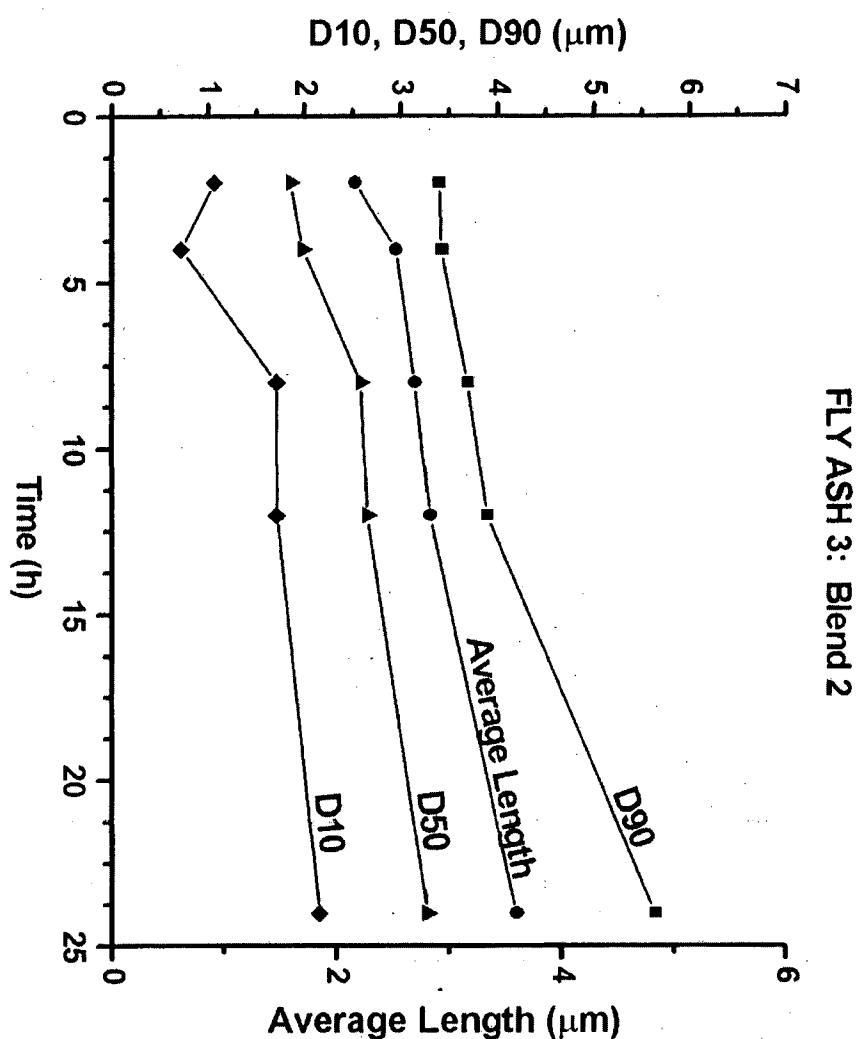


Figure 14a


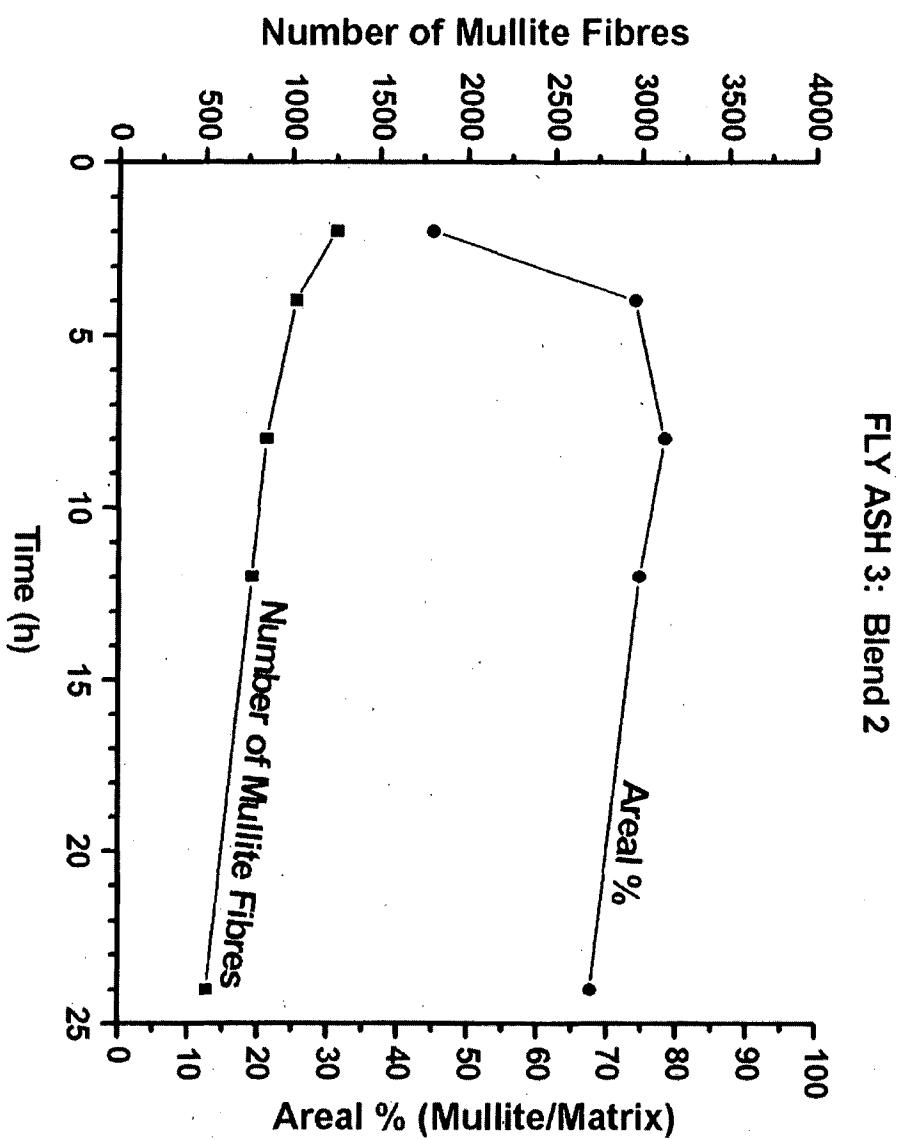


Figure 14b

32/58

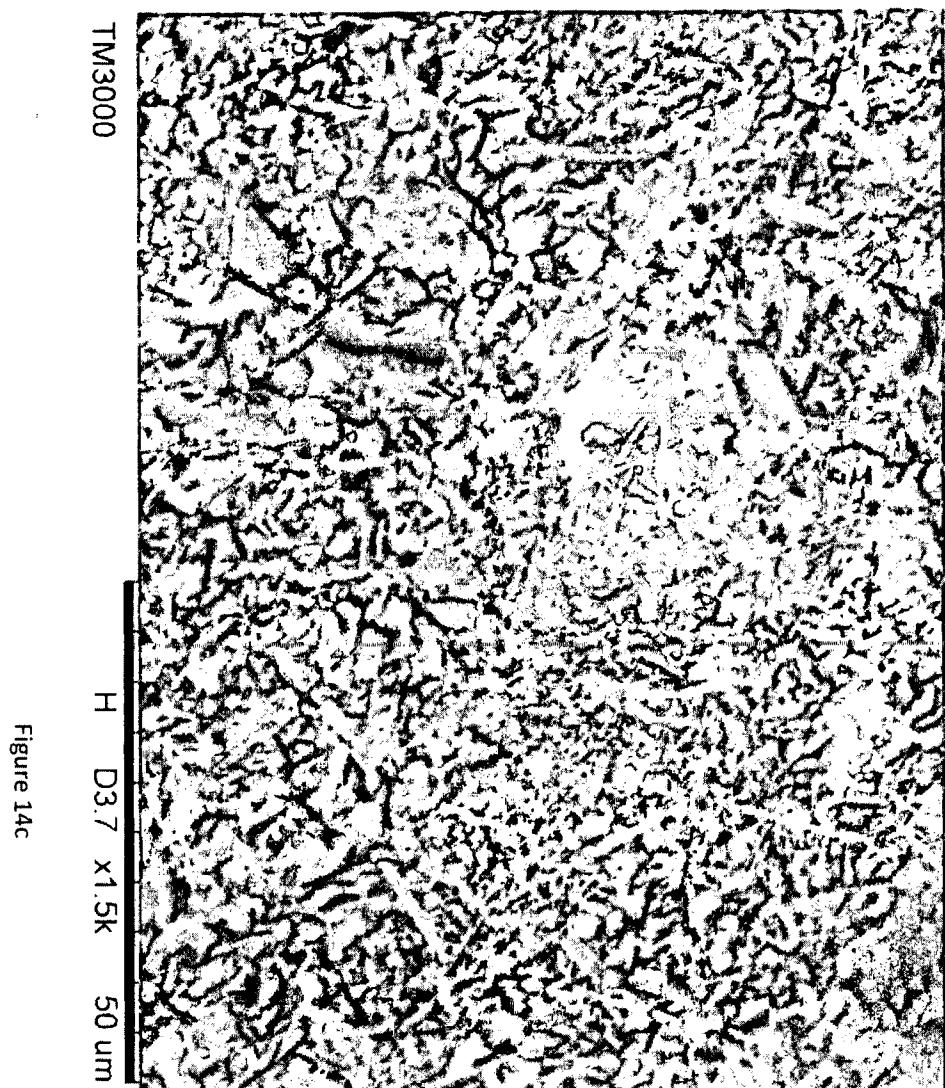

33/58



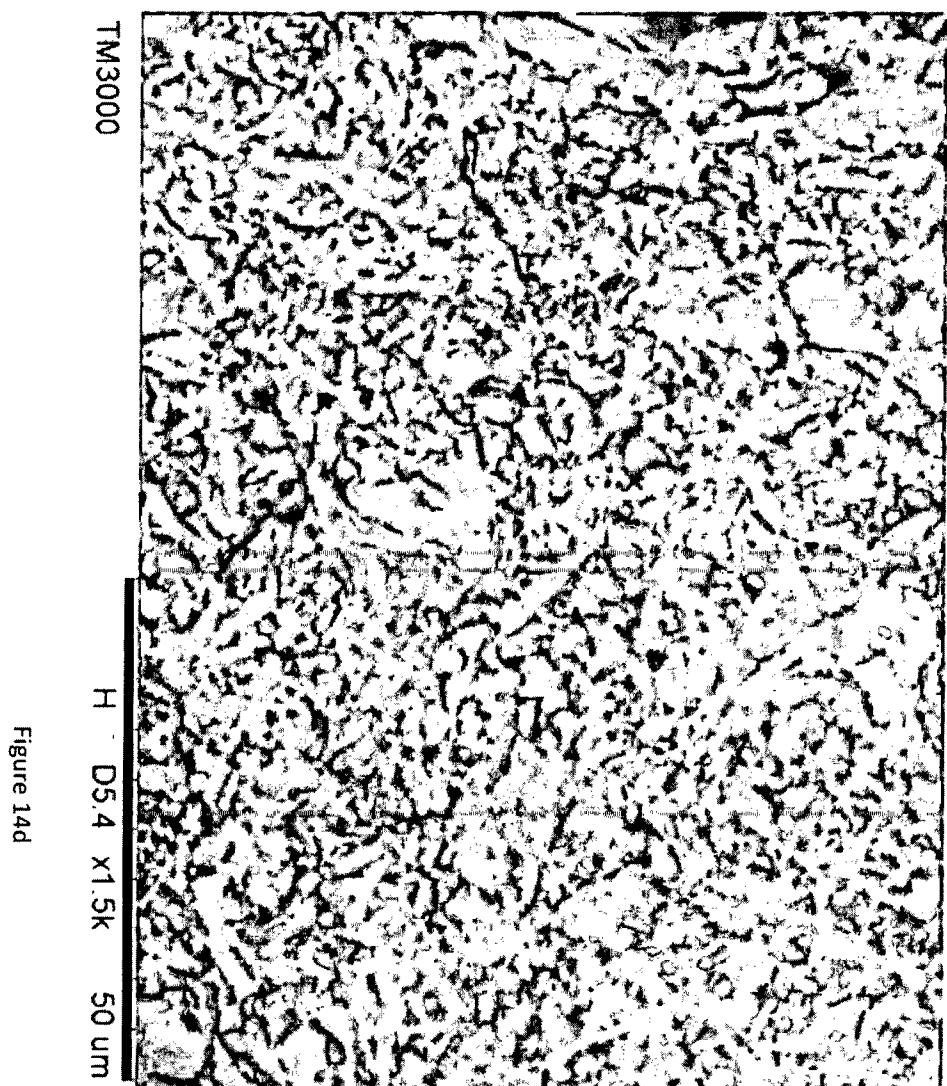


Figure 14d

34/58

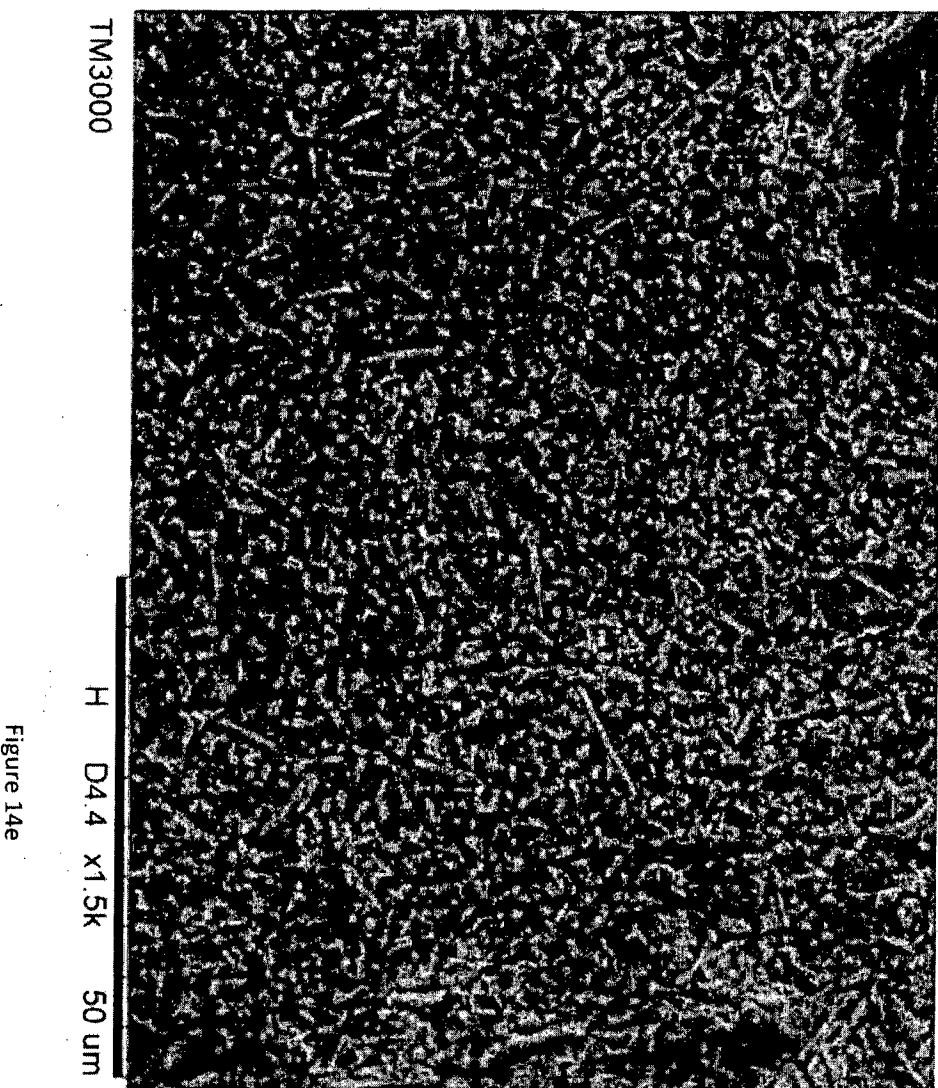

35/58

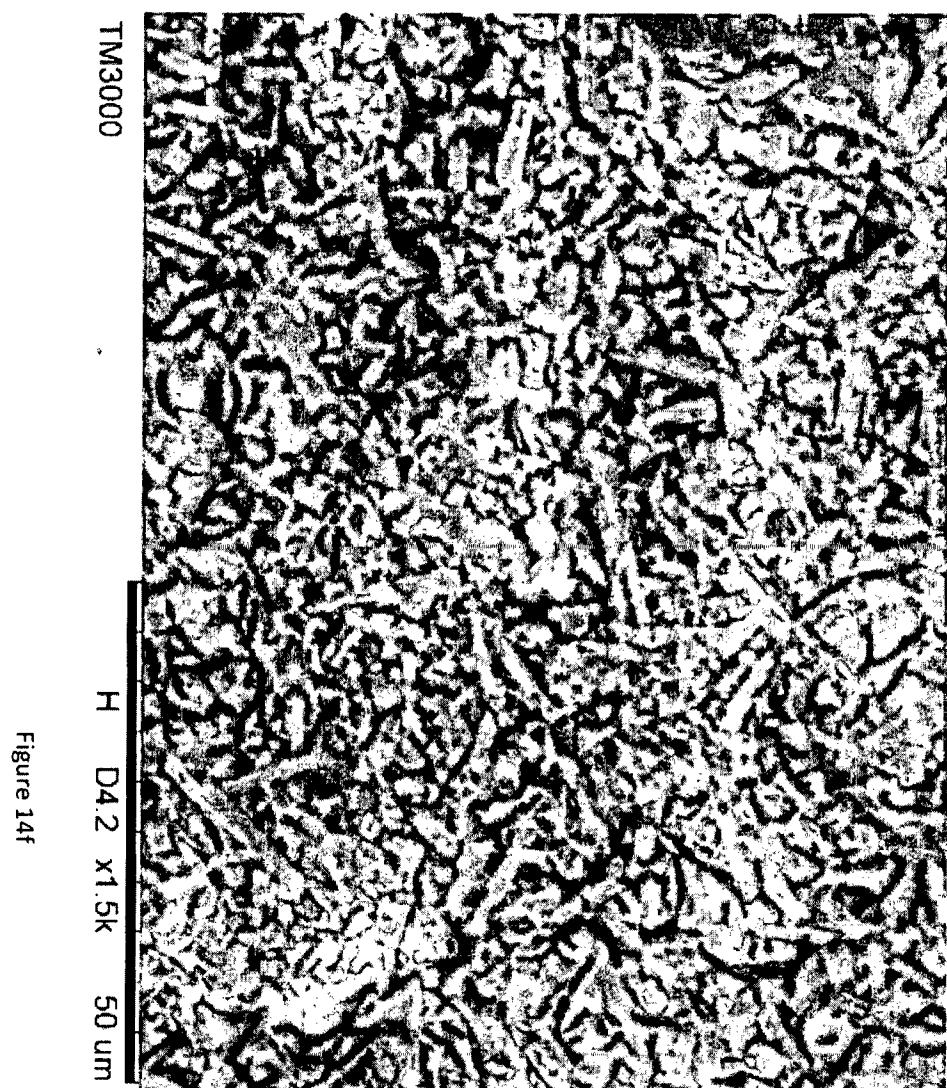

36/58

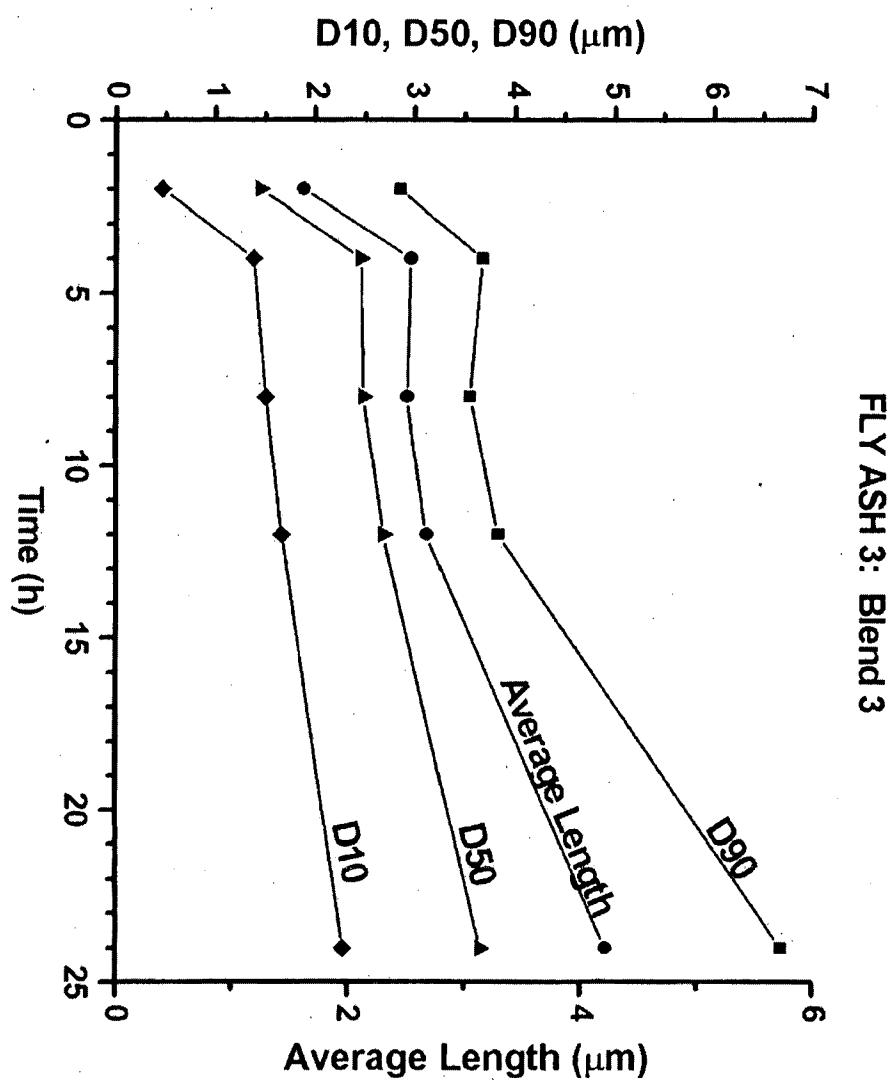


Figure 15a

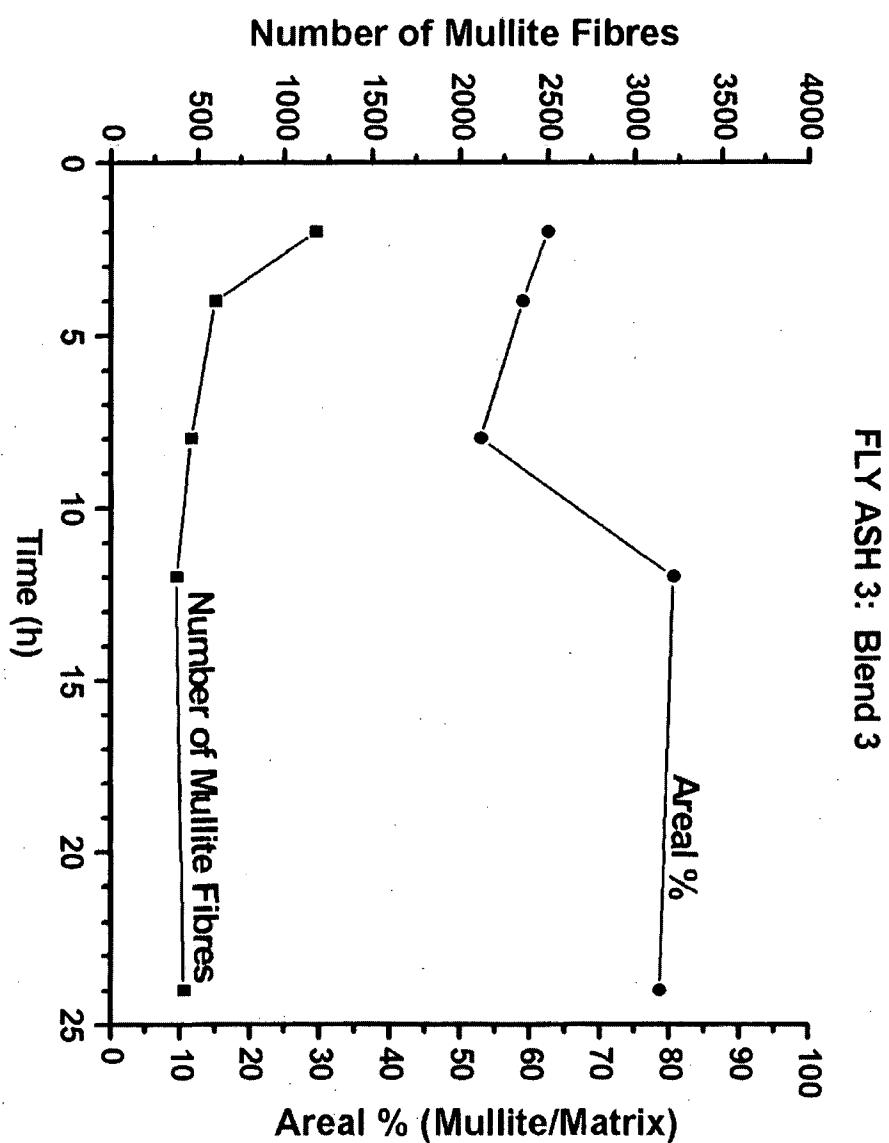
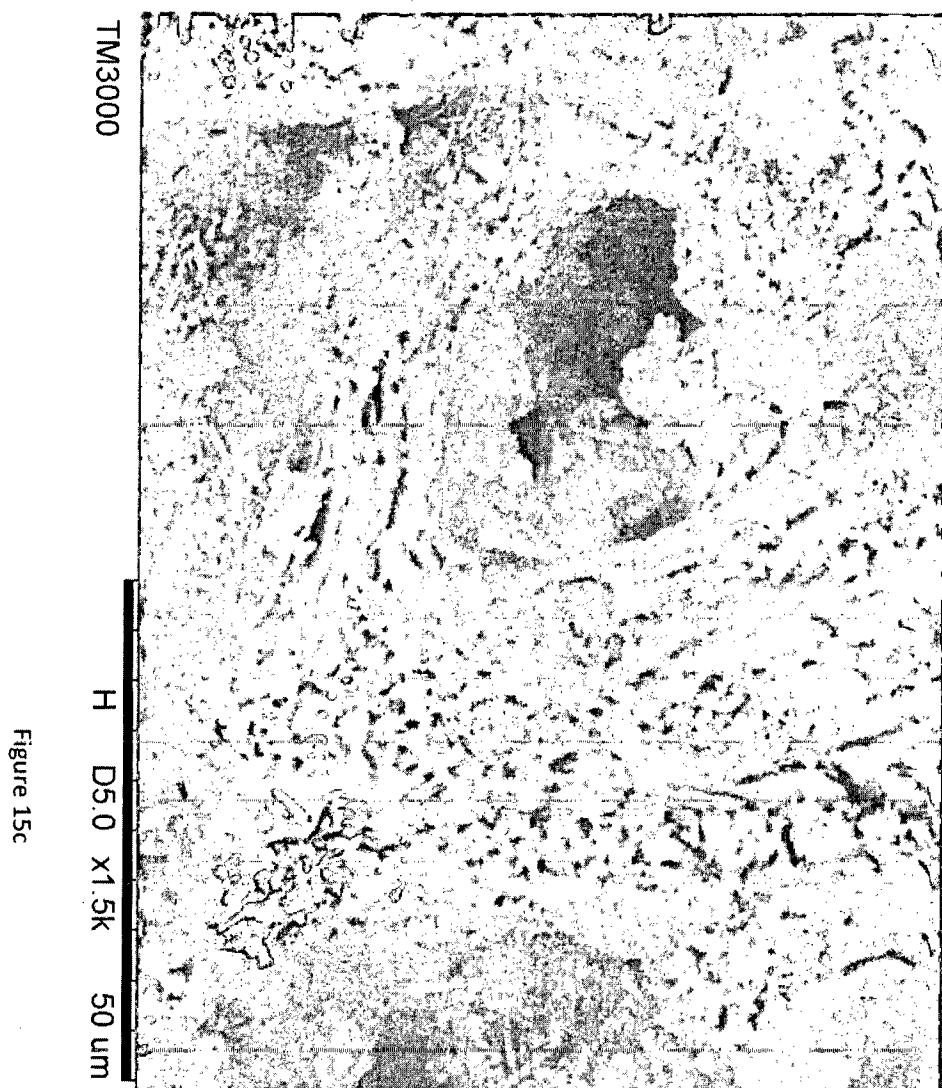


Figure 15b

38/58



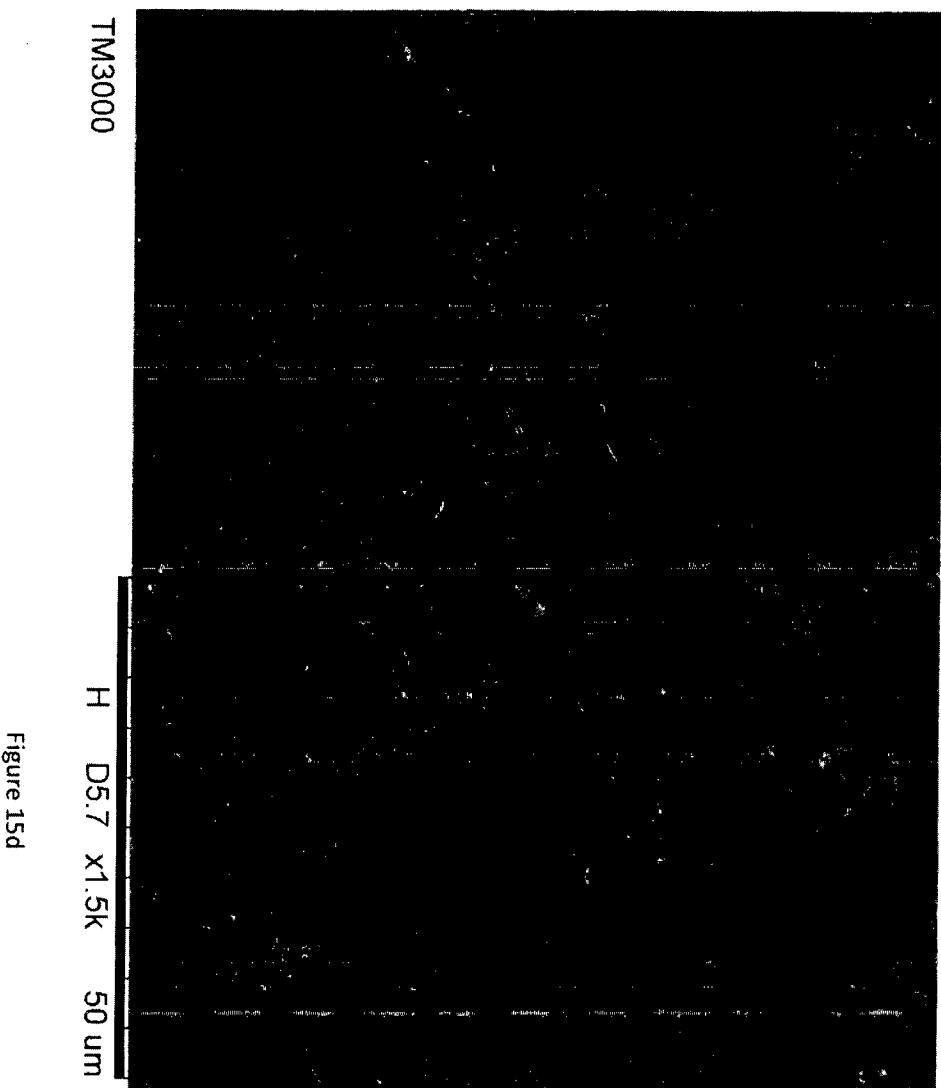


Figure 15d

40/58

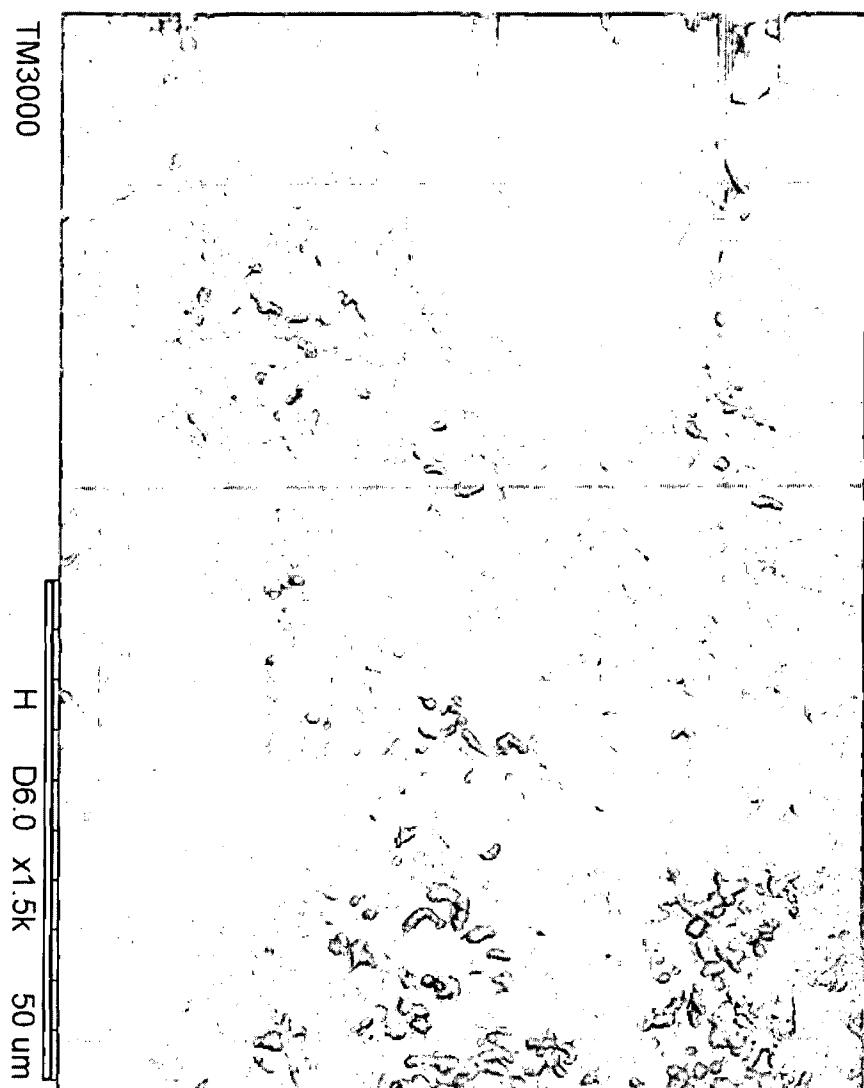


Figure 15e

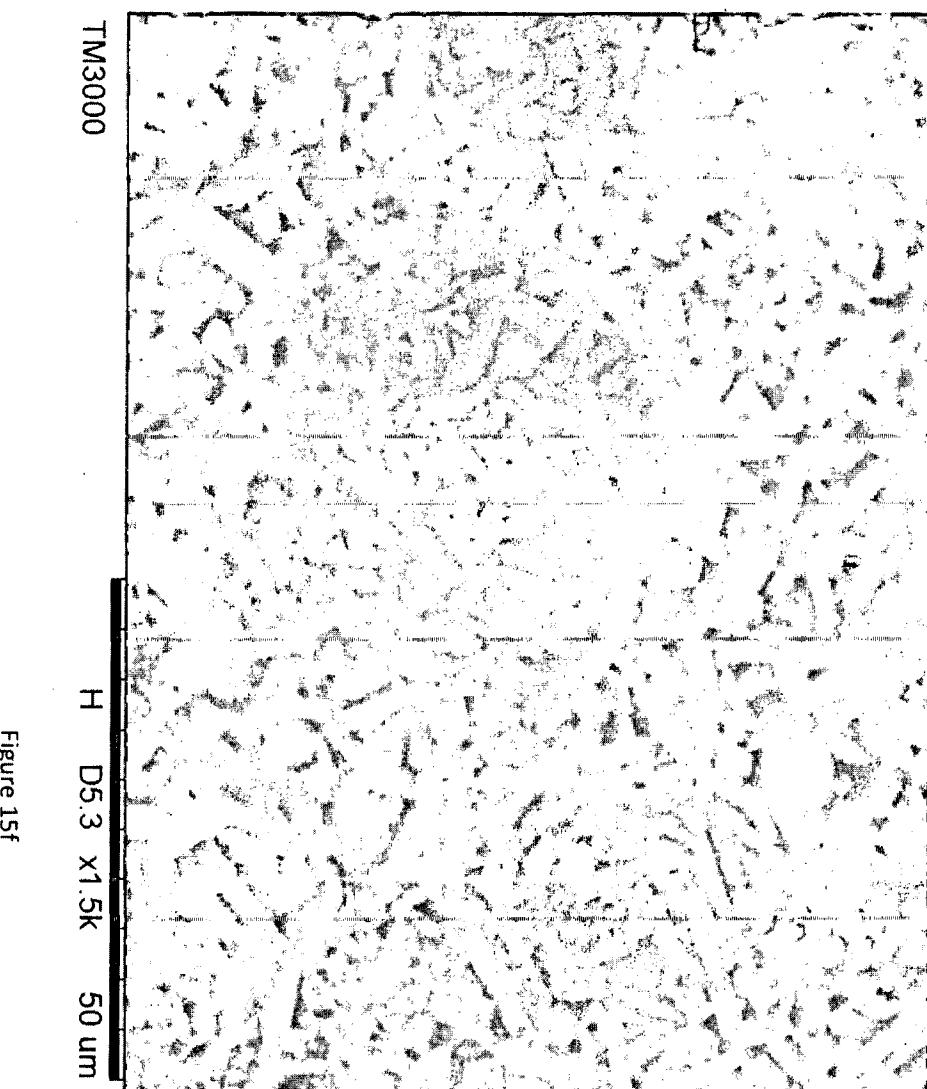


Figure 15f

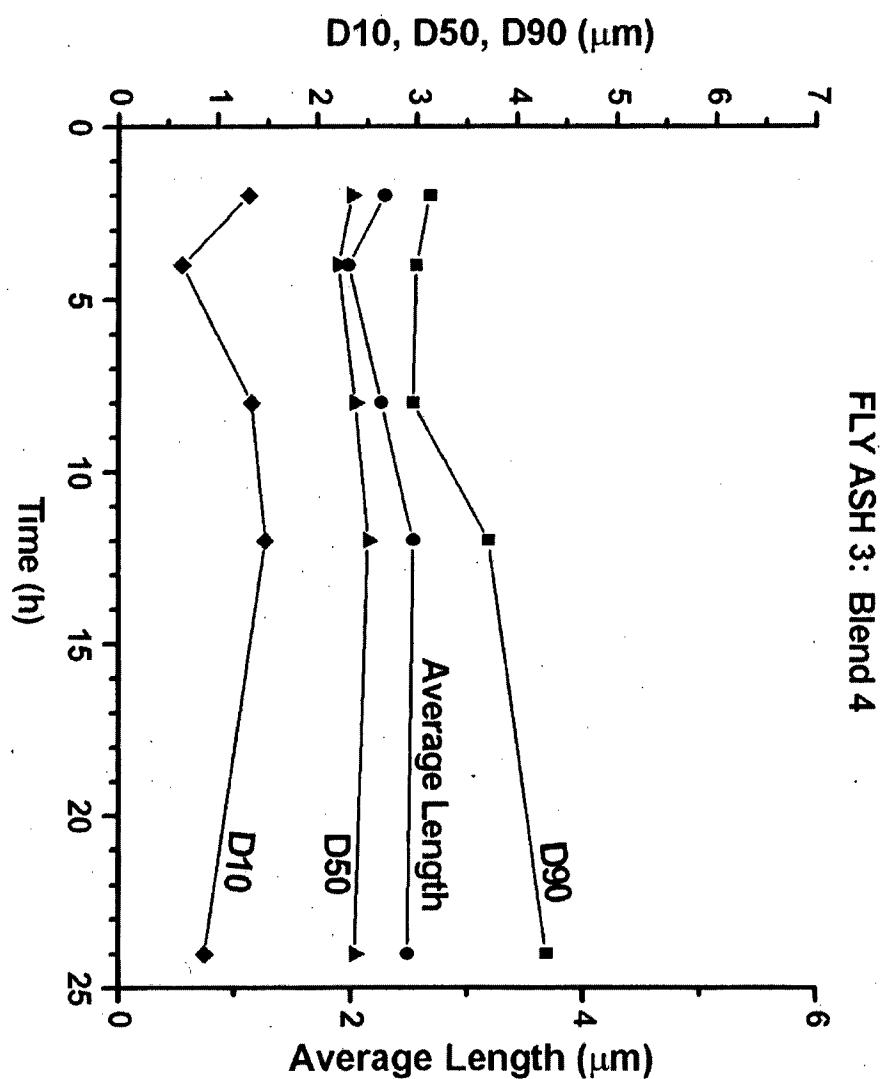


Figure 16a

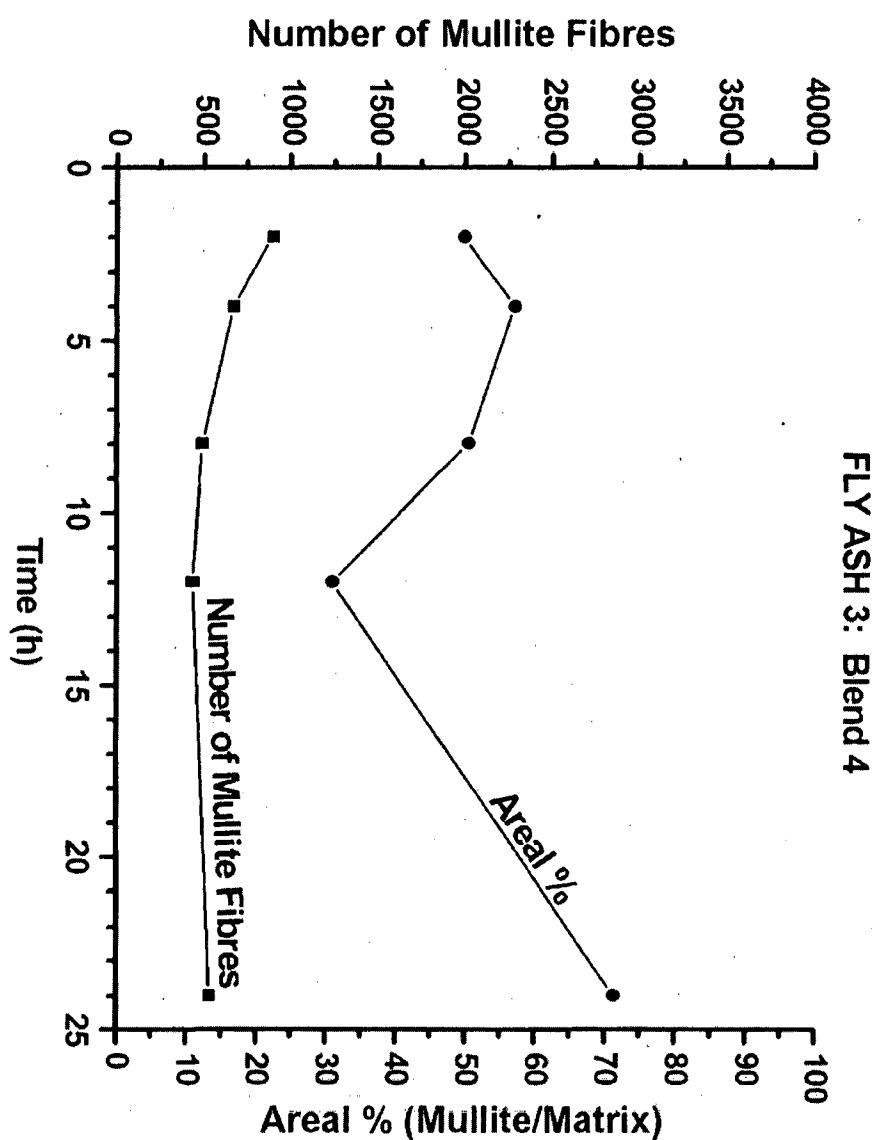


Figure 16b

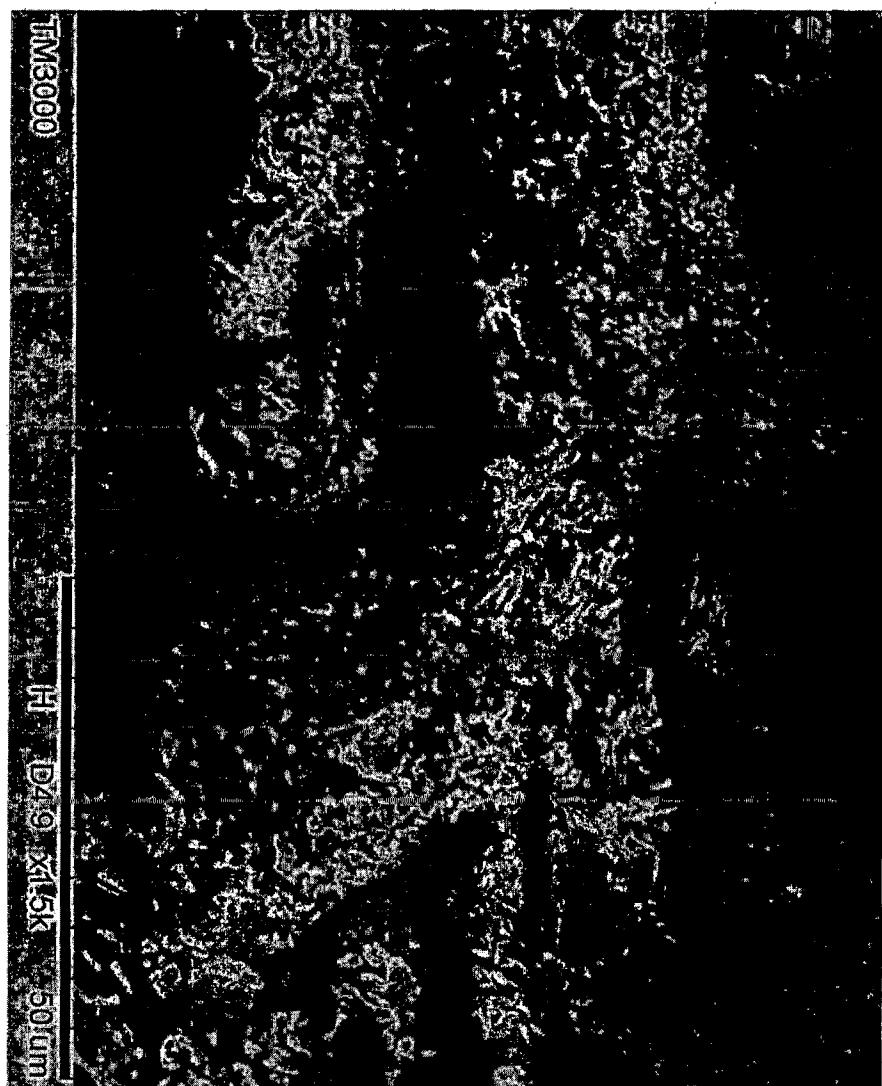


Figure 16c

45/58

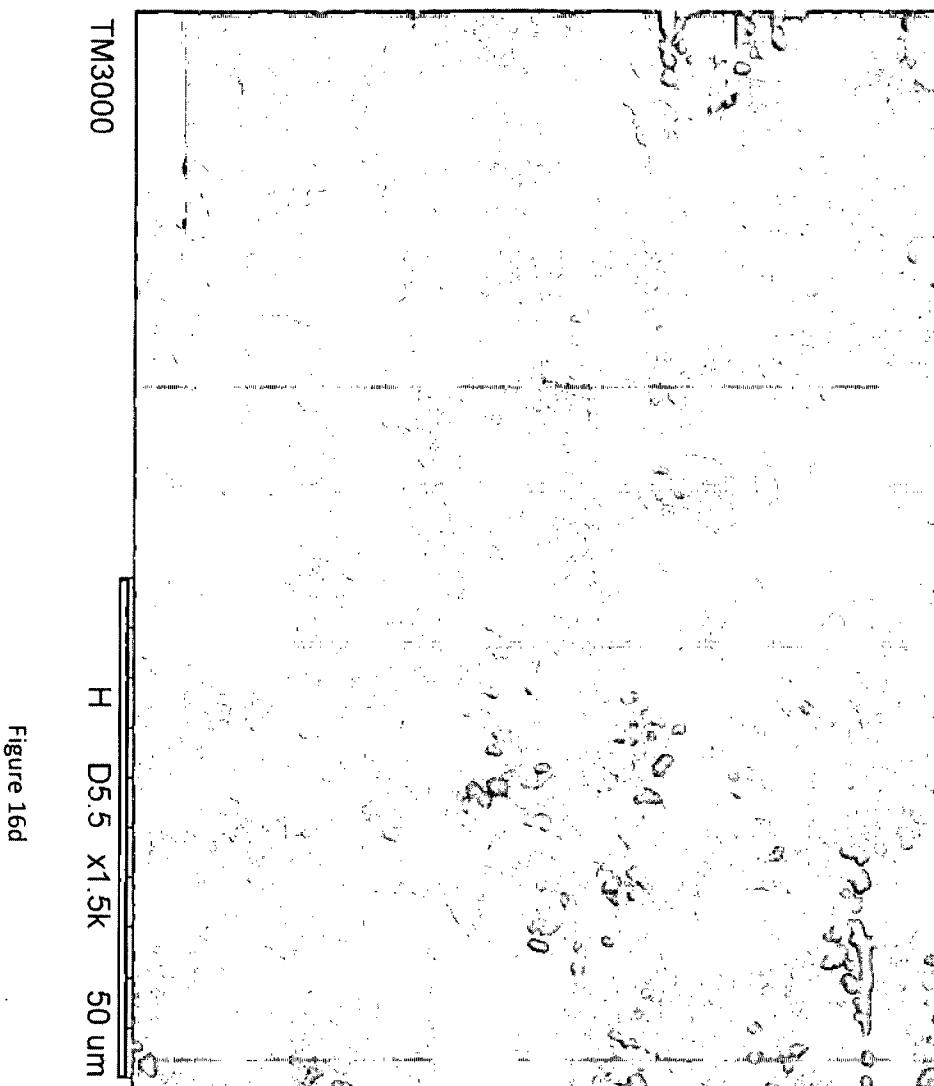
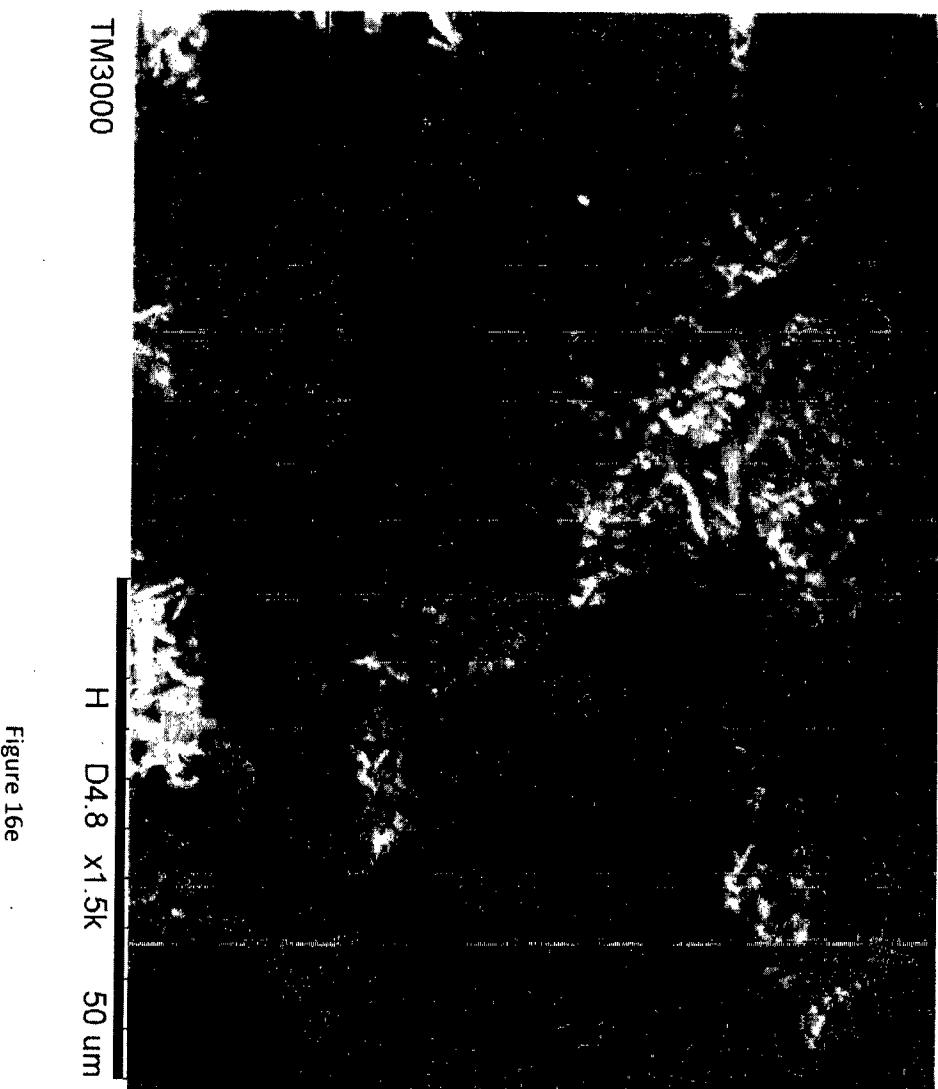


Figure 16d

46/58



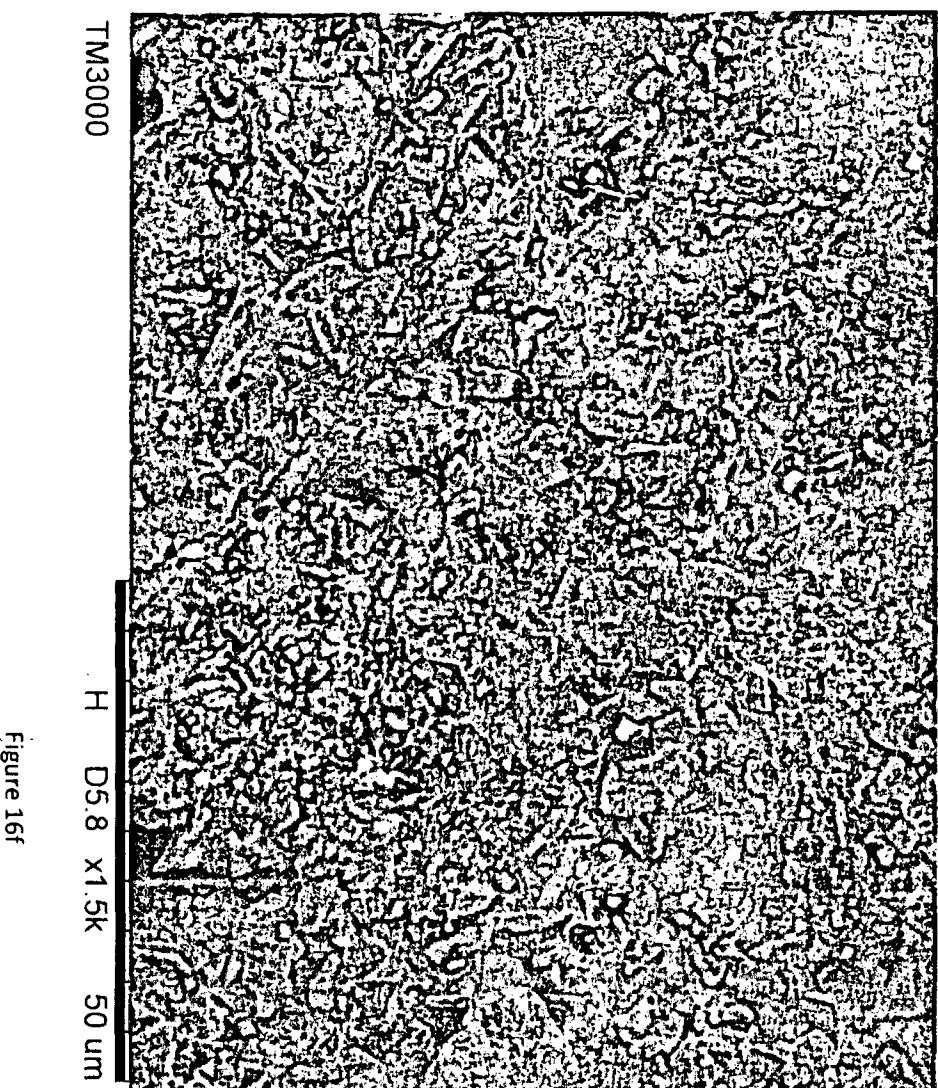


Figure 16f

48/58

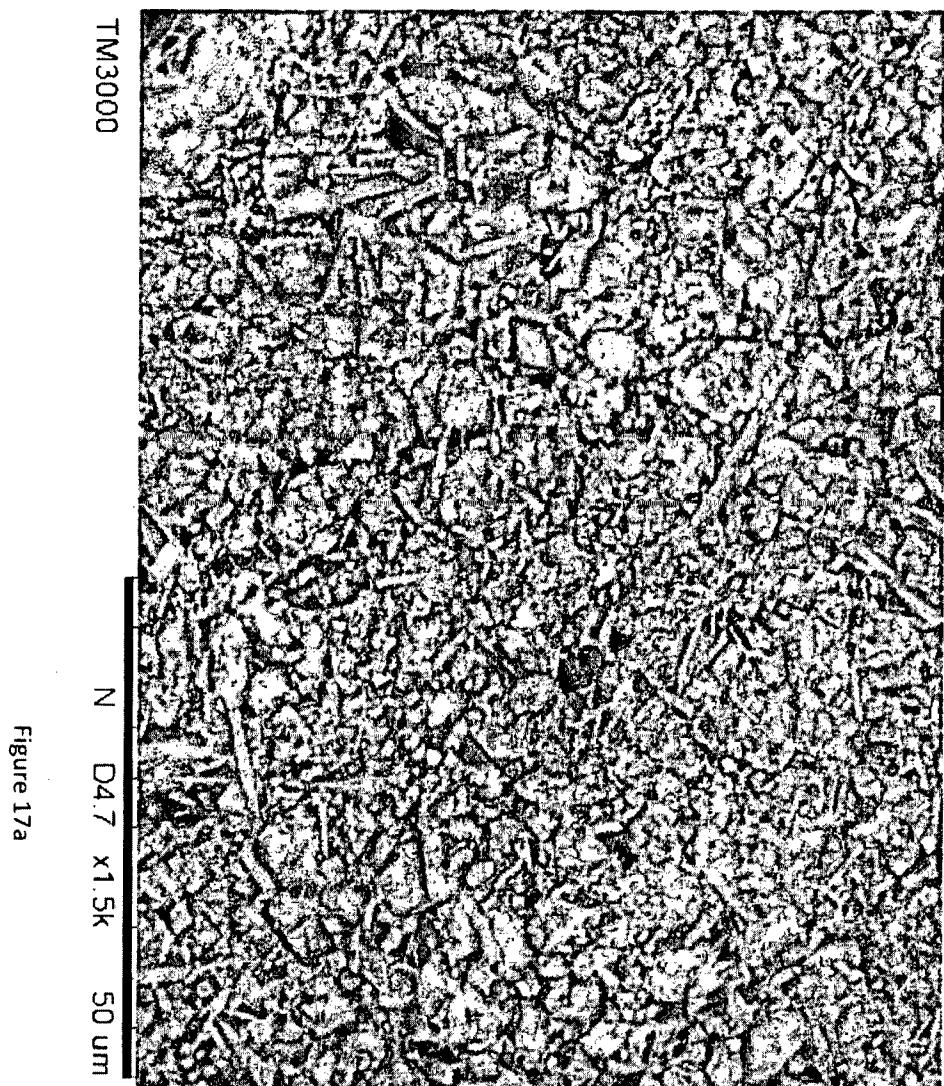


Figure 17a

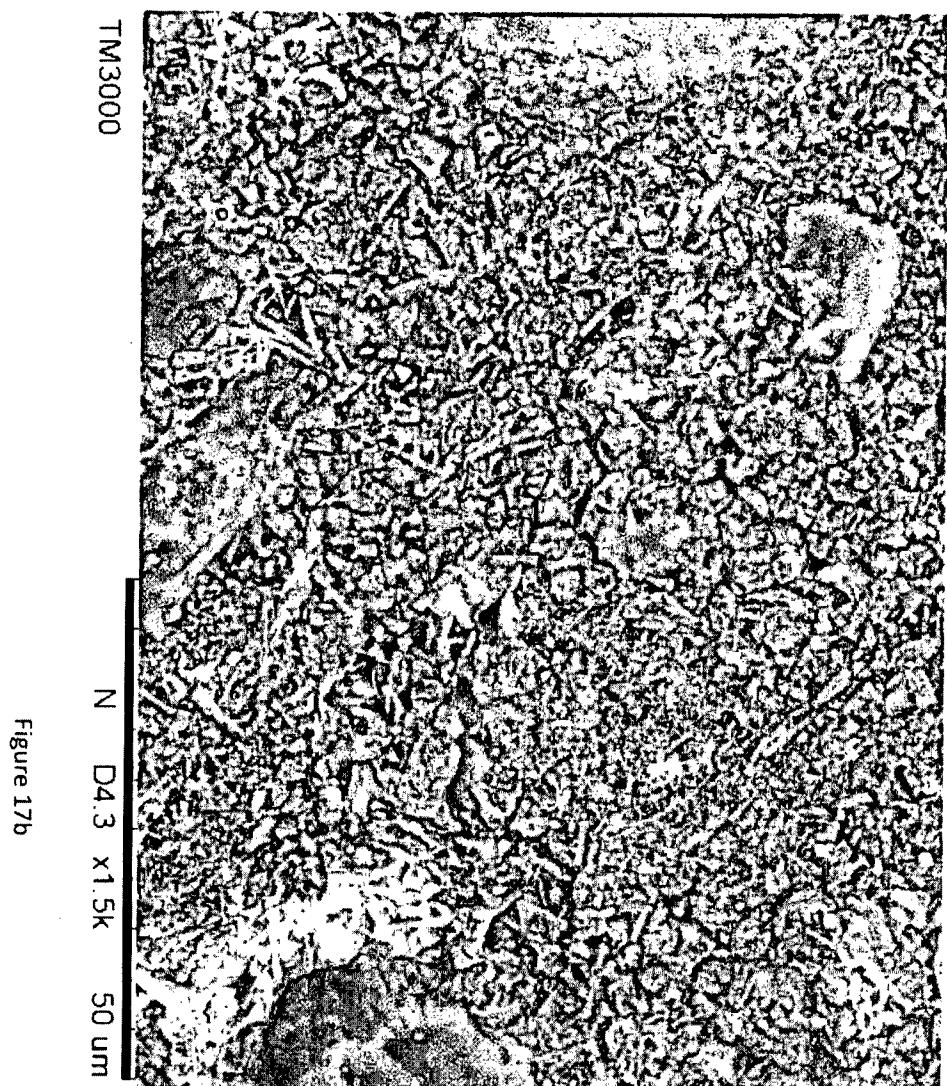


Figure 17b

50/58

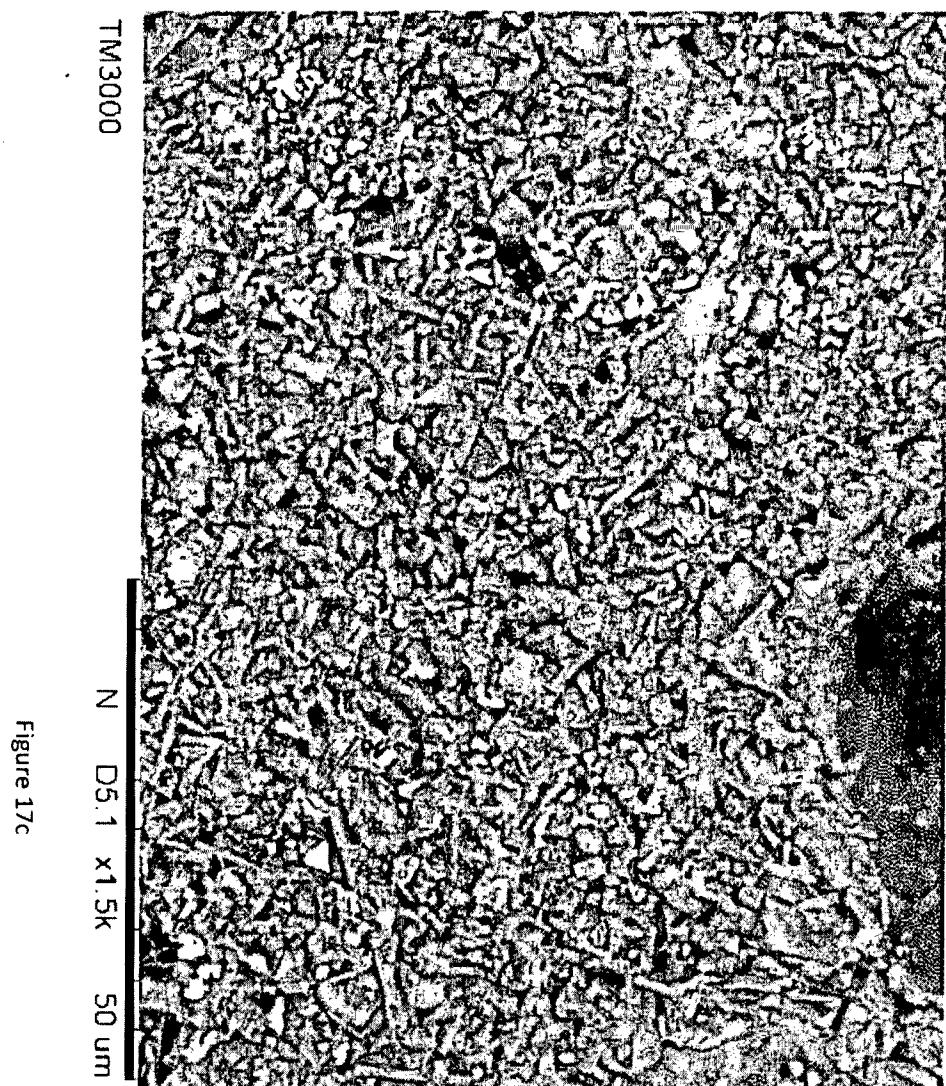


Figure 17c

51/58


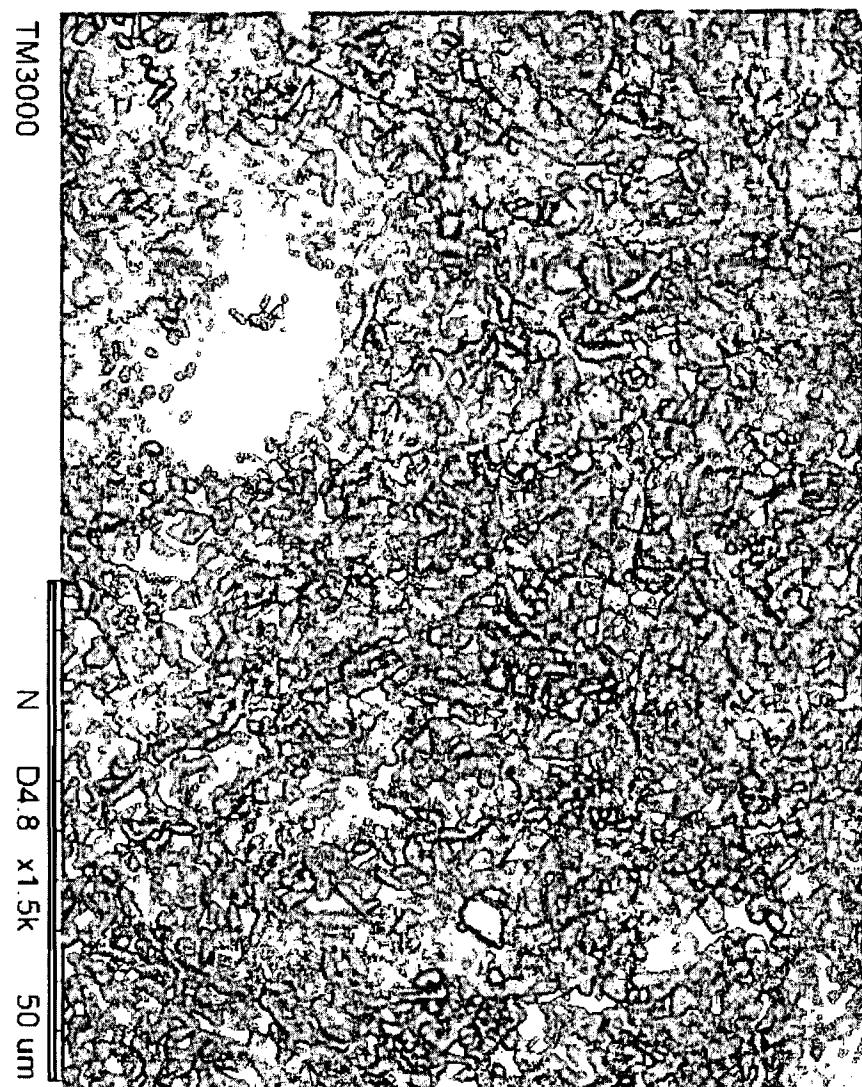


Figure 17d

52/58

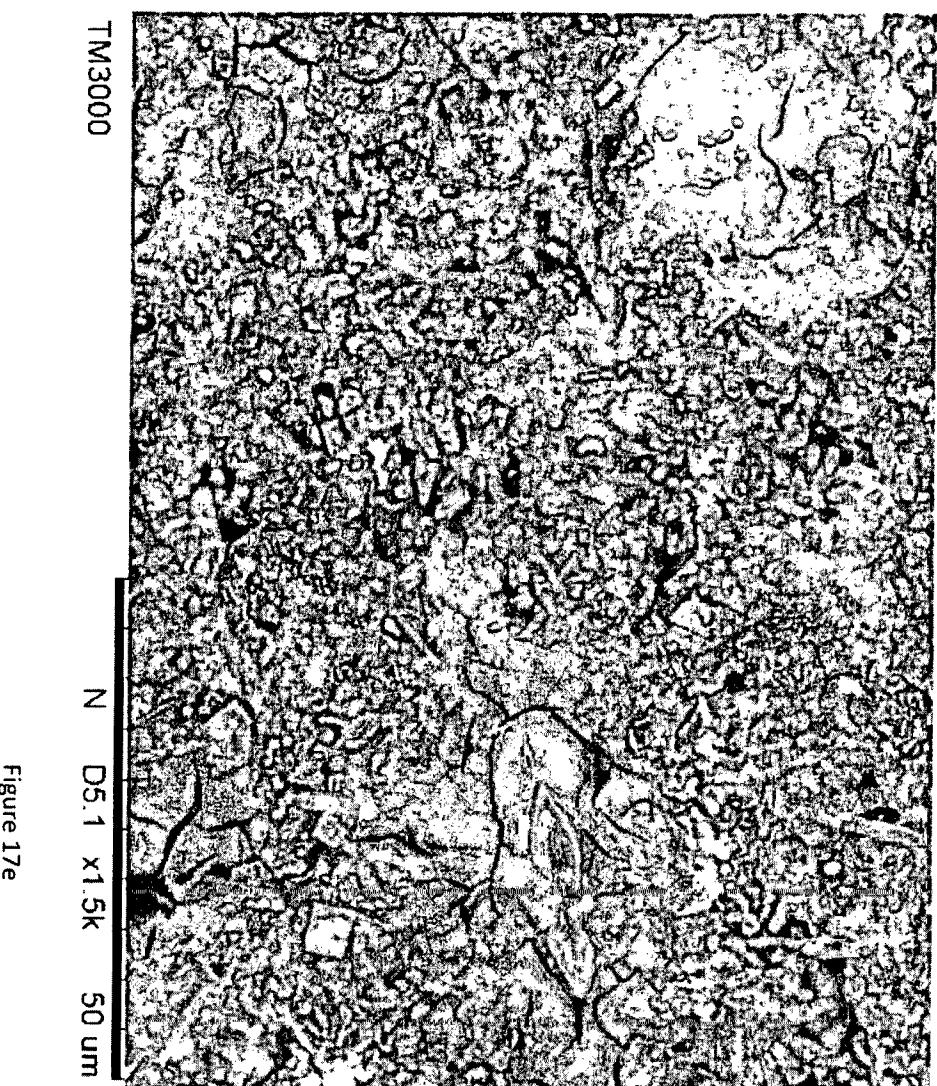

DATA SET 1

Microstructural area considered = 160 μm x 120 μm

Sintering Time (h)	1	2	4	24	96
Number of Fibres	1833	1355	684	631	492
% of Fibres	Fibre Length in μm (Number of Fibres)				
D0	0.61	0.79	1.78	2.26	1.78
D10	1.67 (183.3)	1.99 (135.5)	2.66 (68.4)	3.55 (63.1)	3.55 (49.2)
D20	2.17 (366.7)	2.44 (271.0)	3.24 (136.8)	4.38 (126.2)	4.38 (98.4)
D30	2.47 (549.9)	2.83 (406.5)	3.69 (205.2)	5.11 (189.3)	5.09 (147.6)
D40	2.78 (733.2)	3.23 (542.0)	4.16 (273.6)	5.82 (252.4)	5.82 (196.8)
D50	3.11 (916.5)	3.62 (677.5)	4.71 (342.0)	6.71 (315.5)	6.71 (246.0)
D60	3.50 (1099.8)	3.99 (813.0)	5.30 (410.4)	7.80 (378.6)	7.80 (295.2)
D70	3.90 (1283.1)	4.78 (948.5)	5.94 (478.8)	9.23 (441.7)	9.25 (344.4)
D80	4.59 (1466.4)	5.72 (1084.0)	6.96 (547.2)	11.18 (504.8)	11.20 (393.6)
D90	5.66 (1649.7)	7.23 (1219.5)	8.91 (615.6)	14.81 (567.9)	15.07 (442.8)
D100	23.59	46.49	40.01	32.40	78.85
Average Length (μm)	3.94	4.32	5.98	7.45	9.03
Areal Distribution (Fibre % of Matrix)	60.60	68.15	84.55	92.70	96.10

Heating rate 150°C/hour

Heating the fly ash for 4 h at 1500°C led to: ~85% mullite + ~15% glass + pores
 Heating the fly ash for 96 h at 1500°C led to: ~95% mullite + ~5% glass + pores

Figure 18

54/58

DATA SET 2

Microstructure Area Considered = 100 μm x 75 μm

Soak Time (h)	2	4	8	12	24
Number of Fibres	3644	1951	1663	1279	1112
% of Fibres	Fibre Length in μm				
<i>D0</i>	0.17	0.24	0.68	0.68	0.85
<i>D10</i>	0.55	1.18	0.74	1.55	1.72
<i>D20</i>	0.70	1.39	1.05	1.78	2.05
<i>D30</i>	0.80	1.52	1.21	2.03	2.37
<i>D40</i>	0.93	1.67	1.36	2.24	2.61
<i>D50</i>	1.05	1.79	1.44	2.42	2.98
<i>D60</i>	1.18	1.94	1.71	2.69	3.30
<i>D70</i>	1.30	2.17	2.02	3.03	3.82
<i>D80</i>	1.40	2.59	2.33	3.59	4.63
<i>D90</i>	1.71	3.30	3.08	4.51	5.76
<i>D100</i>	11.91	12.44	13.74	15.25	23.01
<i>Average Length</i> (μm)	1.16	2.10	2.33	2.86	3.49
<i>Areal Distribution</i> (<i>Fibre % of Matrix</i>)	24.82	60.10	83.74	77.17	65.24

55/58

DATA SET 3

Microstructure Area Considered = 100 μm x 75 μm

<i>Soak Time (h)</i>	2	4	8	12	24
<i>Number of Fibres</i>	1374	1150	926	710	551
<i>Fibre Length in μm</i>					
<i>D0</i>	0.54	0.87	1.20	1.37	1.20
<i>D10</i>	1.17	1.29	1.84	1.53	1.65
<i>D20</i>	1.34	1.65	2.19	2.04	2.15
<i>D30</i>	1.56	1.96	2.35	2.24	2.40
<i>D40</i>	1.76	2.29	2.54	2.46	2.71
<i>D50</i>	1.92	2.51	2.74	2.68	2.99
<i>D60</i>	2.29	2.79	2.93	2.88	3.37
<i>D70</i>	2.62	3.10	3.27	3.16	3.77
<i>D80</i>	3.24	3.52	3.66	3.57	4.32
<i>D90</i>	4.14	3.94	4.16	3.88	5.36
<i>D100</i>	13.62	7.24	7.83	6.74	11.94
<i>Average Length (μm)</i>	2.39	2.72	2.94	2.81	3.39
<i>Areal Distribution (Fibre % of Matrix)</i>	60.90	75.12	72.61	58.99	55.67

56/58

Microstructure Area Considered = 100 μm x 75 μm

DATA SET 4

Soak Time (h)	2	4	8	12	24
Number of Fibres	1248	1017	849	766	508
% of Fibres	Fibre Length in μm				
D0	0.34	0.54	0.85	1.03	1.07
D10	1.07	0.72	1.72	1.72	2.16
D20	1.29	1.34	2.06	2.09	2.48
D30	1.51	1.62	2.22	2.29	2.78
D40	1.69	1.79	2.43	2.46	3.06
D50	1.86	1.99	2.59	2.66	3.28
D60	2.05	2.19	2.76	2.82	3.36
D70	2.38	2.37	2.93	2.99	3.81
D80	2.77	2.65	3.19	3.33	4.31
D90	3.39	3.42	3.69	3.89	5.64
DI00	12.62	7.62	10.99	12.01	14.14
Average Length (μm)	2.16	2.53	2.70	2.83	3.60
Areal Distribution (Fibre % of Matrix)	44.95	73.93	78.23	74.59	67.67

57/58

DATA SET 5

Microstructure Area Considered = 100 μm x 75 μm

<i>Soak Time (h)</i>	2	4	8	12	24
<i>Number of Fibres</i>	1178	602	462	379	424
<i>% of Fibres</i>			Fibre Length in μm		
<i>D0</i>	0.41	1.04	1.04	1.24	1.24
<i>D10</i>	0.47	1.39	1.51	1.67	2.29
<i>D20</i>	0.98	1.76	2.01	2.09	2.65
<i>D30</i>	1.18	2.07	2.18	2.29	2.99
<i>D40</i>	1.31	2.29	2.35	2.49	3.33
<i>D50</i>	1.45	2.46	2.49	2.69	3.66
<i>D60</i>	1.65	2.65	2.65	2.79	3.99
<i>D70</i>	1.78	2.85	2.85	2.99	4.64
<i>D80</i>	1.98	3.13	3.02	3.41	5.61
<i>D90</i>	2.85	3.67	3.55	3.83	6.68
<i>D100</i>	10.06	7.24	5.24	5.49	14.18
<i>Average Length (μm)</i>	1.61	2.54	2.51	2.67	4.21
<i>Areal Distribution (Fibre % of Matrix)</i>	62.57	58.99	52.94	80.58	78.62

58/58

DATA SET 6

Microstructure Area Considered = 100 μm x 75 μm

Soak Time (h)	2	4	8	12	24
Number of Fibres	894	669	489	434	531
Fibre Length in μm					
D0	0.70	0.17	0.76	1.04	0.38
D10	1.31	0.64	1.34	1.48	0.87
D20	1.65	1.17	1.73	1.96	1.36
D30	1.98	1.56	2.09	2.15	1.73
D40	2.18	1.96	2.23	2.32	2.12
D50	2.35	2.21	2.38	2.51	2.38
D60	2.51	2.40	2.51	2.68	2.62
D70	2.68	2.57	2.68	2.87	2.90
D80	2.85	2.76	2.85	3.10	3.46
D90	3.13	2.99	2.96	3.71	4.30
D100	7.83	5.44	11.74	5.75	9.86
Average Length (μm)	2.29	1.98	2.26	2.54	2.49
Areal Distribution (Fibre % of Matrix)	49.77	57.13	50.48	30.86	71.29

Figure 23