



(86) Date de dépôt PCT/PCT Filing Date: 1992/04/15

(87) Date publication PCT/PCT Publication Date: 1992/10/29

(45) Date de délivrance/Issue Date: 2002/10/22

(85) Entrée phase nationale/National Entry: 1993/09/28

(86) N° demande PCT/PCT Application No.: US 1992/003017

(87) N° publication PCT/PCT Publication No.: 1992/018082

(30) Priorité/Priority: 1991/04/15 (685,188) US

(51) Cl.Int.⁵/Int.Cl.⁵ A61G 7/005, A61G 7/065

(72) Inventeurs/Inventors:

Borders, Richard L., US;

Fussner, Robert T., US;

Hamilton, Michael W., US


(73) Propriétaire/Owner:

Hill-Rom Company, Inc., US

(74) Agent: MACRAE & CO.

(54) Titre : PARTIE D'UN LIT D'ACCOUCHEMENT SERVANT D'APPUI POUR LES JAMBES

(54) Title: FOOT SECTION FOR BIRTHING BED

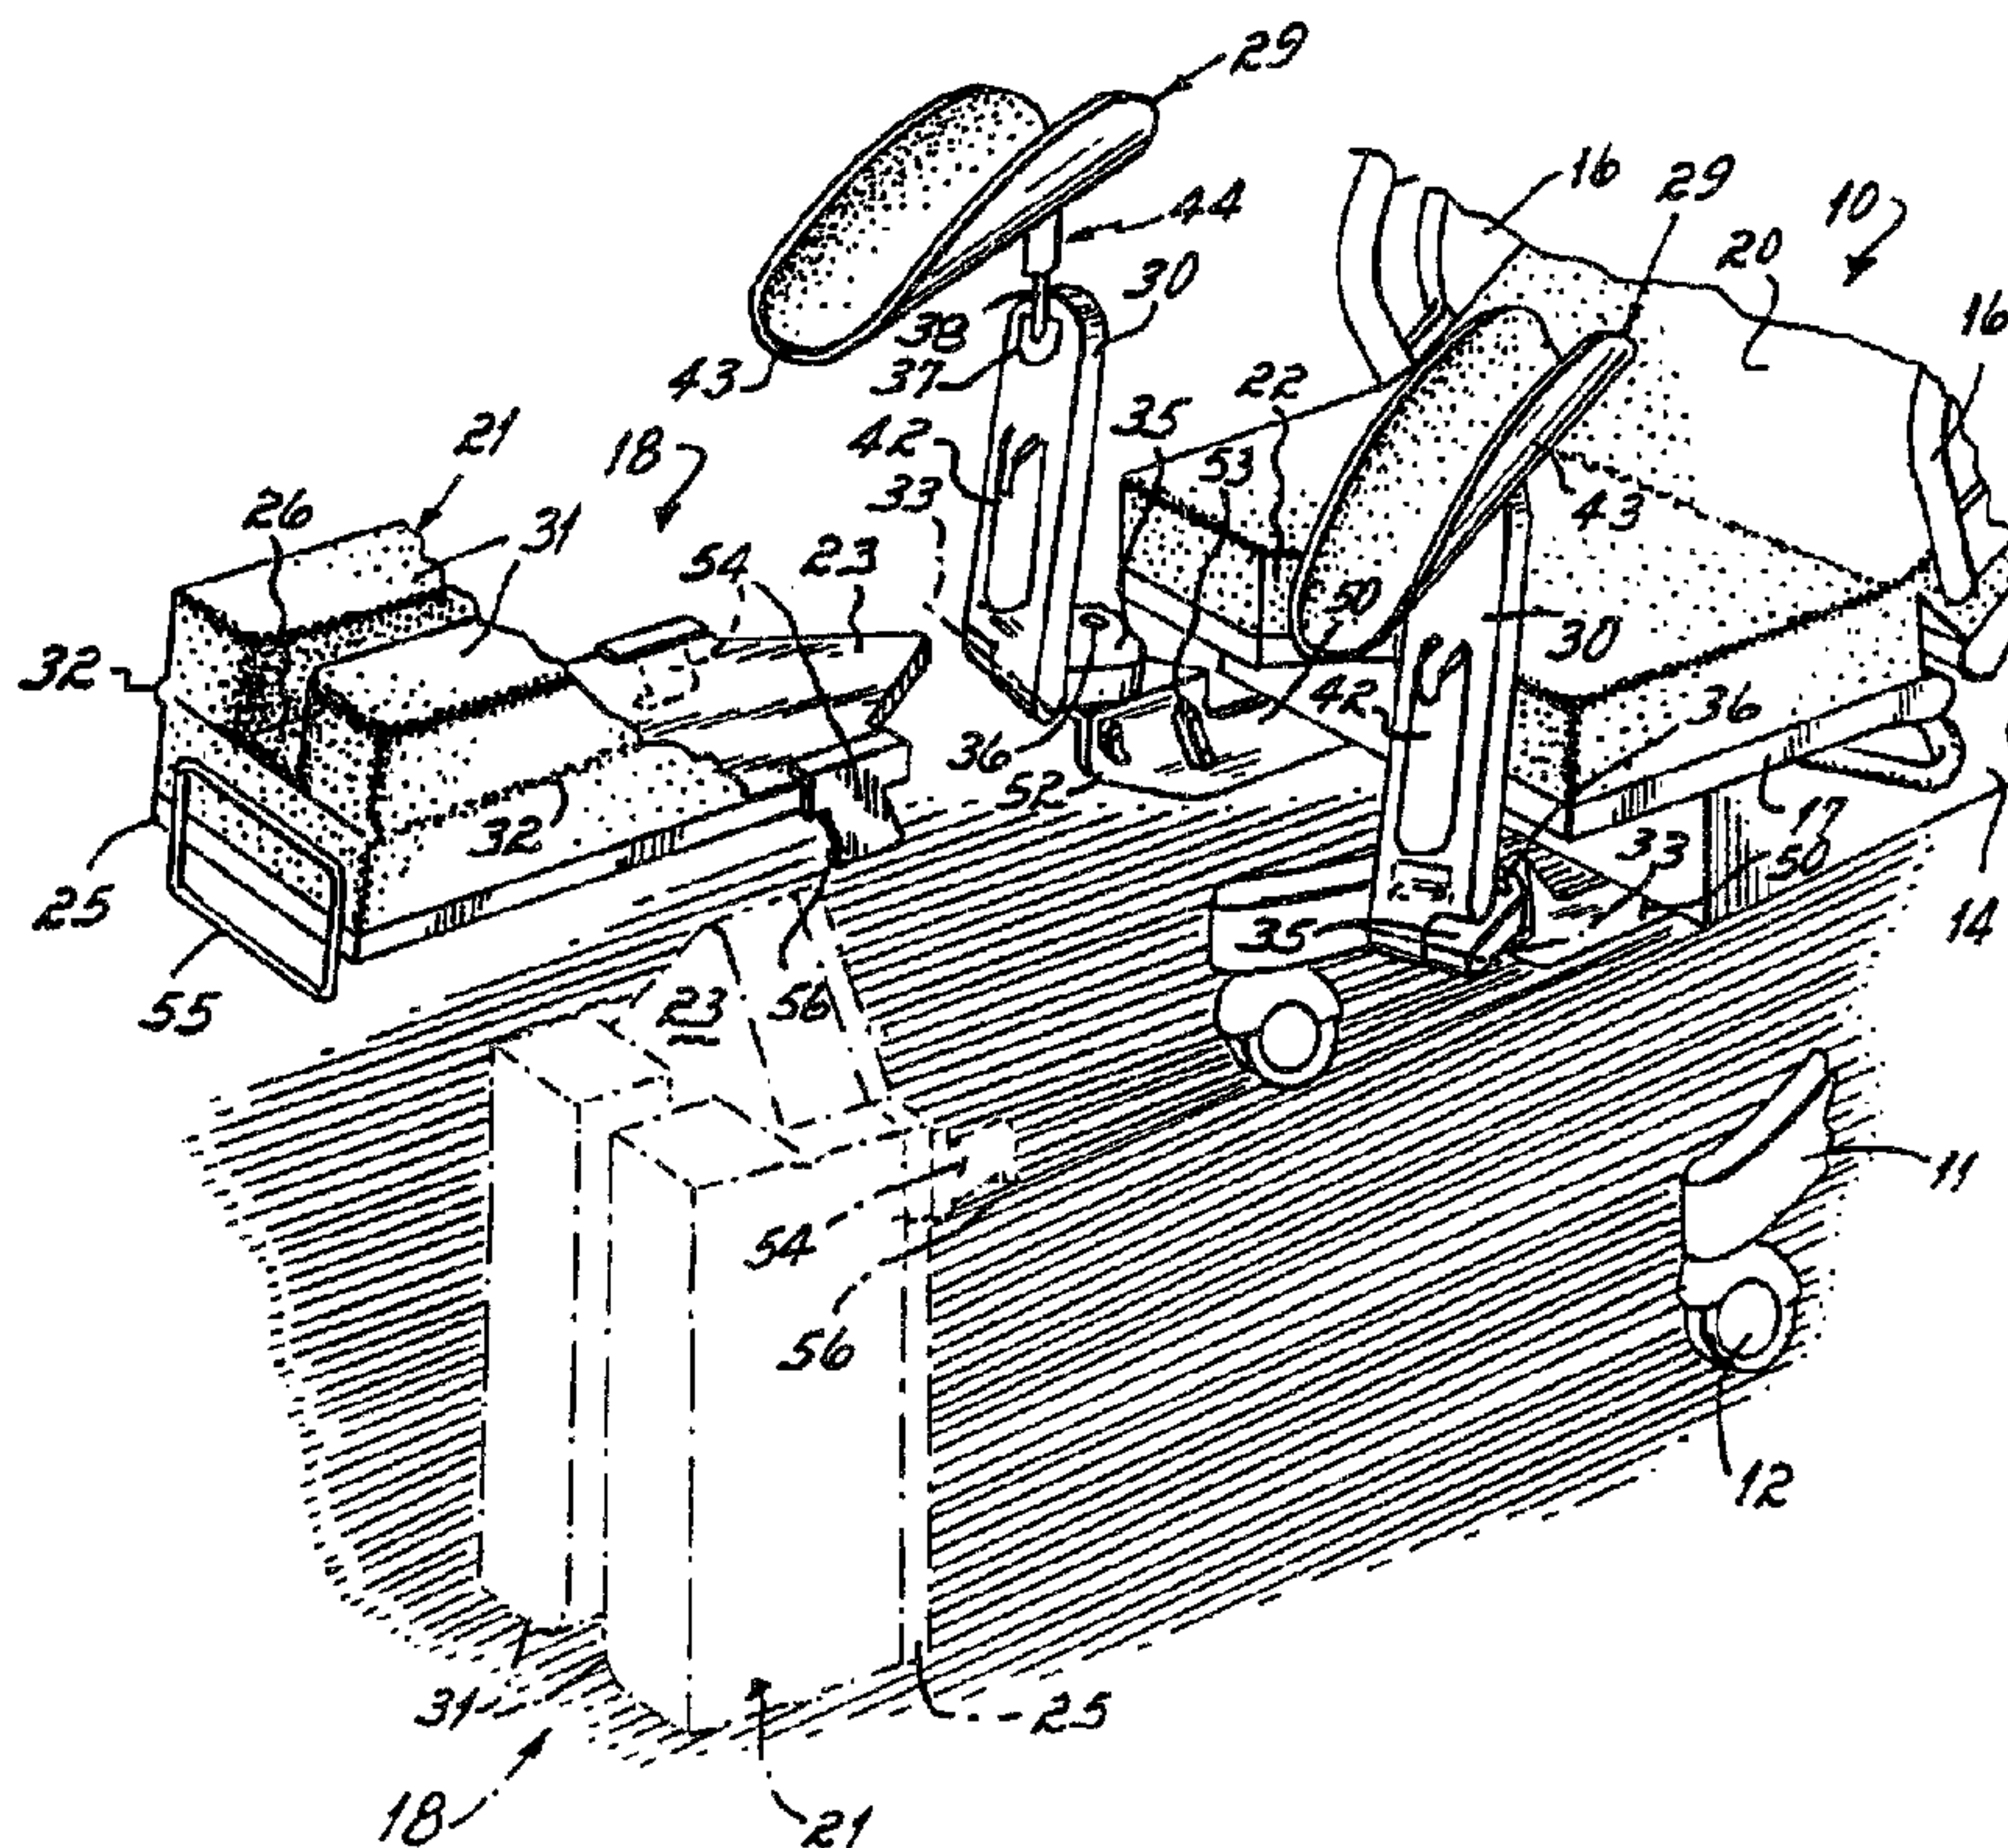

(57) Abrégé/Abstract:

A foot section for a birthing bed has a central panel (25) and two lateral plates (30, 30) that function, in an inclined attitude, as footrests and in a vertical attitude as posts for receiving calf supports (29). The calf supports (29) are stored in holsters (42) on the underside of the footrests. The mattress (21) is in three sections, with the outboard sections (31, 31) being hinged to a central section (26) so as to be swung upwardly upon the central section (26) thereby exposing the footrests without having to remove the whole foot section. The central panel (25) can be removed with the mattress and is adapted to be stood on its end for temporary storage, thereby conserving floor space.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :

A61G 7/00, F16C 3/00

A1

(11) International Publication Number:

WO 92/18082

(43) International Publication Date:

29 October 1992 (29.10.92)

(21) International Application Number: PCT/US92/03017


(22) International Filing Date: 15 April 1992 (15.04.92)

(30) Priority data:
685,188 15 April 1991 (15.04.91) US(71) Applicant: HILL-ROM COMPANY, INC. [US/US];
Highway 46, Batesville, IN 47006 (US).(72) Inventors: BORDERS, Richard, L. ; 1590 Tremont Lane,
Cincinnati, OH 45225 (US). FUSSNER, Robert, T. ;
1042 East Road, Brookville, IN 47012 (US). HAMIL-
TON, Michael, W. ; 29315 Chappelow Ridge Road,
West Harrison, IN 47060 (US).(74) Agents: JACOBS, Wayne, L. et al.; Wood, Herron &
Evans, 2700 Carew Tower, Cincinnati, OH 45202 (US).(81) Designated States: AT, AT (European patent), AU, BB, BE
(European patent), BF (OAPI patent), BG, BJ (OAPI
patent), BR, CA, CF (OAPI patent), CG (OAPI patent),
CH, CH (European patent), CI (OAPI patent), CM
(OAPI patent), CS, DE, DE (European patent), DK,
DK (European patent), ES, ES (European patent), FI,
FR (European patent), GA (OAPI patent), GB, GB (Eu-
ropean patent), GN (OAPI patent), GR (European pa-
tent), HU, IT (European patent), JP, KP, KR, LK, LU,
LU (European patent), MC (European patent), MG, ML
(OAPI patent), MN, MR (OAPI patent), MW, NL, NL
(European patent), NO, PL, RO, RU, SD, SE, SE (Euro-
pean patent), SN (OAPI patent), TD (OAPI patent), TG
(OAPI patent).

Published

*With international search report.**Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*

(54) Title: FOOT SECTION FOR BIRTHING BED

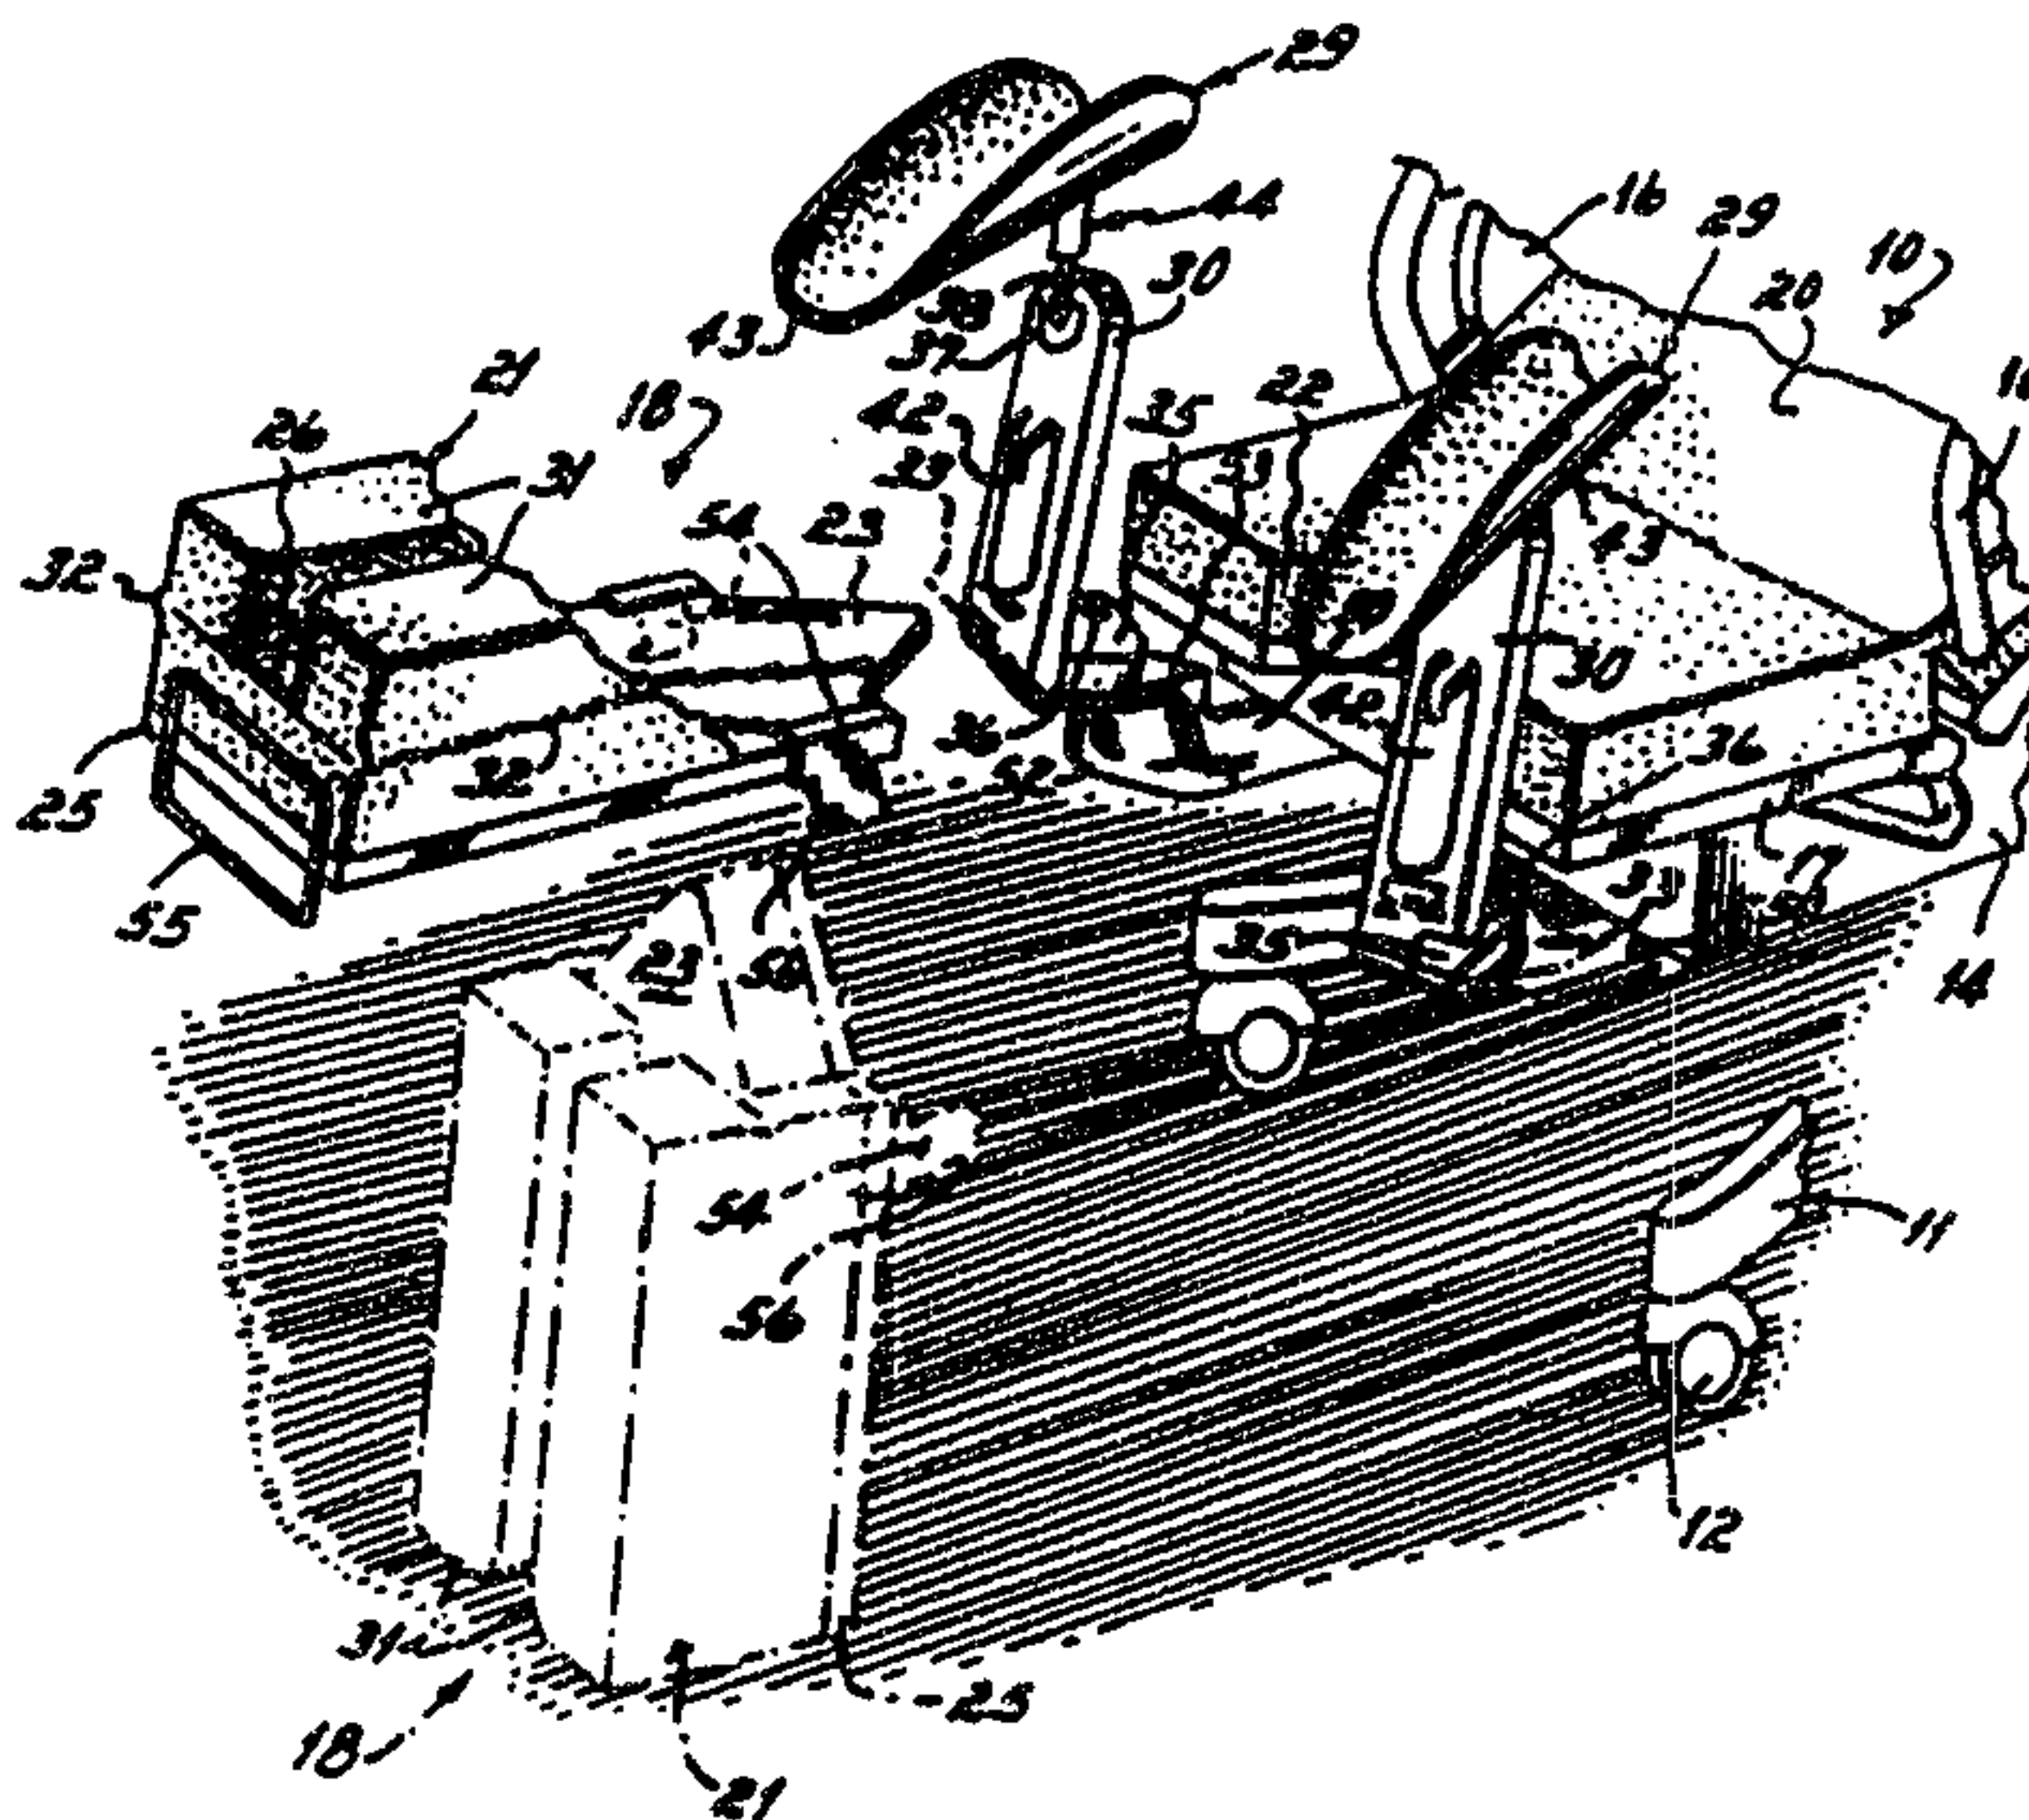

(57) Abstract

A foot section for a birthing bed has a central panel (25) and two lateral plates (30, 30) that function, in an inclined attitude, as footrests and in a vertical attitude as posts for receiving calf supports (29). The calf supports (29) are stored in holsters (42) on the underside of the footrests. The mattress (21) is in three sections, with the outboard sections (31, 31) being hinged to a central section (26) so as to be swung upwardly upon the central section (26) thereby exposing the footrests without having to remove the whole foot section. The central panel (25) can be removed with the mattress and is adapted to be stood on its end for temporary storage, thereby conserving floor space.

Foot Section for Birthing Bed

This invention relates to a birthing bed and more particularly to a foot section for a birthing bed.

Conventionally, a birthing bed has a patient
5 support consisting of a head panel, a seat panel and a
foot panel with a mattress covering the panels. The
foot panel and its mattress is removable to expose
underlying footrests so that the patient can sit up
and press her feet against footrests during labor.
10 The removal of the foot panel also permits the mount-
ing of calf supports in the space vacated by the foot
panel. The removal of the foot panel permits the
doctor to slide a footstool into the space vacated by
the foot panel so as to be in a position to assist in
15 delivery.

The current birthing bed, described above,
has some disadvantages. After the patient has an
epidural, the shifting of the patient's numbed legs
from the foot panel to the footrests is at least a
20 two-nurse operation, one nurse holding the patient's
leg while a second nurse removes the foot panel.

-2-

Further, the calf supports, when used, must be retrieved from storage and thereafter mounted on the bed.

BRIEF SUMMARY OF THE INVENTION

5 The objective of the invention has been to provide a foot section for a birthing bed that reduces the number of people required to attend the patient and which simplifies some of the procedures attending the birthing process, particularly where they relate
10 to the making available different types of equipment, e.g., the footrest, the calf support and the foot panel, at the foot end of the bed.

 The objective of the invention is attained by providing a foot section wherein the mattress has
15 side sections that are removable or that fold over upon the center section to expose underlying support plates that serve as footrests on each side of the central panel. The footrests ratchet up to any angular position including past vertical position.

20 The center section is removably mounted on the bed frame. Each footrest is mounted, completely independently of the center section, for outward swinging movement about a vertical axis and for upward pivoting movement about a horizontal axis.

25 Each footrest contains, on its undersurface, a holster to carry a calf support. Each calf support is removable and mounted on the upper end of the footrest when the footrest is in a substantially

-3-

vertical position. An improved ball joint is provided on the calf support for the convenient universal adjustment of the calf support.

5 The foot panel, with its mattress, is easily removable and is adapted to stand on its front edge so as to take up as little space in the birthing room as possible.

The mattress mounted on the foot panel is semi-permanently attached with snaps so that it can
10 easily be removed for cleaning but nevertheless stays in position when in its operative position.

There are several important advantages to the structure heretofore described.

The three-section foot panel mattress
15 permits each underlying footrest to be quickly and easily exposed by removing or by flipping the side mattress section over upon the center section. This enables one nurse to place the numbed legs or feet of the patient on the footrest. In doing so, the pa-
20 tient's legs are temporarily supported on the center portion of the foot section. The footrests are exposed and ratcheted to the desired angular position. After each footrest is exposed and raised, the patient's foot is placed on it.

25 Where calf supports are to be employed in the birthing process, they can quickly be set up. The footrest is simply ratcheted to a past vertical position and the receptacles that support the calves

-4-

are removed from the holsters on the underside of the footrest and dropped into pockets on the upper end of each footrest. The angular position of the calf receptacle with respect to the footrest on which it is
5 mounted is easily adjusted by the improved ball and socket connection. The footrests may also be swung horizontally outwardly about vertical axes and thus adjusted to the comfort of the patient.

As another feature of the invention, the
10 foot panel is provided with a very simple but nevertheless reliable attachment to the frame of the birthing bed so that it can be quickly removed. It also has a stand for supporting it on its front edge, thereby minimizing the space in the birthing room for
15 its storage.

BRIEF DESCRIPTION OF THE DRAWINGS

The several objectives and features of the invention will become more readily apparent from the following detailed description taken in conjunction
20 with the accompanying drawings in which:

Fig. 1A is a perspective view of a birthing bed in accordance with the present invention;

Fig. 1B is a fragmentary perspective view of the foot section of the birthing bed with a section of
25 the mattress folded upon the center panel;

Fig. 1C is a fragmentary perspective view of the foot section showing the footrest in an angulated position;

-5-

Fig. 1D is a fragmentary perspective view of an alternative embodiment of the foot section;

Fig. 2A is a fragmentary perspective view of the foot section showing the calf supports in position;

Fig. 2B is a fragmentary elevational view of the foot section showing the foot section removed from the main body of the birthing bed;

Fig. 3 is a plan view of the foot section and taken generally in the direction of the arrows 3-3 in Fig. 1A. The shape of the foot end is illustrated in the preferred form (the shape being diagrammatic in Figs. 1A-1D) with the mattress removed;

Fig. 4 is a cross-sectional view taken along lines 4-4 of Fig. 3 showing the mechanism for raising and lowering the foot support and foot section;

Fig. 4A is a disassembled perspective view of the center panel of the foot section;

Fig. 5 is a side elevational view of the footrest taken along lines 5-5 of Fig. 3;

Fig. 6 is a cross-sectional view taken along lines 6-6 of Fig. 5;

Fig. 7 is a cross-sectional view taken along lines 7-7 of Fig. 5;

Fig. 8 is a cross-sectional view taken along lines 8-8 of Fig. 7;

Fig. 9 is a disassembled perspective view taken from the underside of the footrest;

-6-

Fig. 10 is a disassembled perspective view of the calf support mount;

Fig. 11 is a side elevation of the footrest converted to a calf support;

5 Fig. 12 is a cross-sectional view taken along lines 12-12 of Fig. 11;

Fig. 13 is a fragmentary elevational view of the ball joint; and

10 Fig. 14 is a fragmentary view similar to Fig. 13 showing the ball rotated 90°.

DETAILED DESCRIPTION OF THE INVENTION

A birthing bed 10 in accordance with the present invention is shown in Fig. 1A. The bed has a base 11 which has casters 12 providing rolling support
15 along a floor. A parallelogram linkage 13 connects a bed frame 14 to the base. The bed frame supports a head panel 15 with side guards 16, a seat panel 17 and a foot section 18. A head end mattress section 20 covers the head panel 15 and the seat panel 17. A
20 foot section mattress 21 covers the foot section 18. Optionally, the forward edge of the seat panel and mattress 17 has a V-shaped recess 22 which, when the center section of the foot section 18 is removed, facilitates delivery of the baby. The recess 22 is
25 otherwise filled by a triangular projection 23 on the foot section 18 that mates with the recess 22.

The foot section 18 has a subframe 24 and central panel forming the center section of the foot

-7-

section 25, the foot section 18 supporting a center mattress section 26. Although shown solid for clarity, the center panel 25 is a hollow, rigid, blow-molded plastic member as best shown in the plan view of Fig. 3. As shown in Fig. 4A, the central panel 25 is mounted on an aluminum frame 27 of the subframe 24 and is bolted to it. On each side of the panel 25 is a plate 30 forming a footrest. As shown in Fig. 1B, the plate 30 supports a lateral mattress section 31 which is hinged by a plastic covering at 32 to the central mattress section 26. A calf support 29 is mounted on the lower surface of plate 30 in a manner described below. As shown in Fig. 1D, the lateral mattress section 31 can be completely removable and attachable by a hook and loop connection 32a formed on the abutting surfaces of each lateral section and central section, respectively.

The plate 30 is pivoted on a horizontal axis at 33 to a rotatable block 35, the block being pivoted about a vertical axis on a pin 36. The pivot connection between the plate 30 and the block 35 permits a ratcheting upwardly of the plate 30 so that it can be positioned at any one of a plurality of angular relationships at 9° intervals, from horizontal 117°, by a mechanism shown in Figs. 5 to 9 and to be described in detail below. As shown in Figs. 10 and 11, the plate 30 has a pocket 37 on its underside adjacent its free end. The calf support 29 has a post 38 with

-8-

a spade 39 on its lower end for insertion into the pocket 37 to mount the calf support to the footrest. The calf support, when in storage, is slidably mounted in a holster 42 on the underside of the plate 30. See
5 also Figs. 2A and 2B for the configuration of the holster.

The calf support has a receptacle 43 which receives the patient's calf, the receptacle being generally U-shaped in cross section. A post 44 is
10 connected by a ball joint 45 (shown in detail in Fig. 12 and to be described later) to a casting 43a to which the receptacle 43 is bolted. The receptacle can be fixed in one of an infinite number of angular positions universally about the ball joint, as will be
15 seen from the detailed description of Figs. 11 and 12.

As shown in Figs. 2A, 2B, and 3, the block 35 is mounted on forwardly-extending arms 50 which project integrally from a transverse beam 51 that supports the foot section. The arms 50 and beam 51
20 are a single yoke casting. Each arm has a pair of horizontally-spaced, vertically-oriented lugs 52, 53 (see also Fig. 4). The foot panel 25 has laterally spaced, depending tongues 54 fixed to the frame 27 at its rearward end. The tongues 54 fit between the lugs
25 52, 53 to provide removable support of the foot panel 25. As can be seen from Fig. 2B, the foot panel can easily be removed simply by lifting it vertically, with a slight pivoting of the front end downward, out

-9-

of the space between the adjacent lugs 52, 53. At the front edge of the front panel is a rectangular-shaped stand 55 mounted on the frame 27. The stand 55 provides a handle for grasping the foot panel and provides a floor-engaging support to hold the foot panel in a vertical orientation when it has been removed from the birthing bed.

Each tongue 54 has forward projections 56 normally lying under lug 52. The projections prevent the tongue from rising out of the space between lugs 52 and 53 when the front end of the foot panel is tilted up, as by a patient placing his knee on the projection 23 or by lifting on stand 55. The stand therefore can be used as a handle to pull on the bed without dislodging the foot panel.

Referring to Figs. 3 and 4, the transverse beam 51 that provides the main support for the foot section is connected, on each side, to a parallelogram linkage 60 which permits the foot panel to move from an upper position 57 shown in dashed lines, through an intermediate position wherein the arms 50 are shown in full lines to a lower position 58 where the arms 50 are shown in dashed lines. The transverse beam 51 is raised and lowered by a drive link 61 connected to a bellcrank lever 62 pivoted to the bed frame at 63. An electric actuator 64 is connected by a pivot pin 66 on the bellcrank lever 62 to cause the bellcrank lever to pivot between the raised and lowered positions.

-10-

The pivotal support for each footrest 30 is shown in Figs. 5-9. Each arm 50 has an outwardly-directed flange 70 having a vertical bore 71. A shaft 72 is press fit into the bore and is held against rotation by a key 73 fitting in slots 74 in the shaft and 75 in the flange 70. A quarter gear 76 is slidably mounted on the shaft and keyed to it by the key 73. Bearings 77 seat on top and bottom of the quarter gear between plate 78 and block 35. The plate 78 is mounted on the underside of the block 35 and secures the assembly of quarter gear and bearings to the block. The block 35 is rotatable about the shaft 72 and is vertically slidable with respect to it so that it can be removed. A pawl 80 is pivoted at 81 to the block 35 and has a recessed jaw 82 which engages teeth 83 on the quarter gear 76. A compression spring 84 mounted between the block and the pawl 80 urges the pawl into engagement with the teeth 83. The pawl has an arm 85 connected to a slide 86 having a pull handle 87 at its free end. When the pull handle is slid outwardly with respect to the block 35, the block 35 and the footrest 30 mounted upon it can be swung horizontally to any one of a number of angular positions from zero degrees to 90° in 10° increments toward the outside of the bed.

As indicated above, the footrest can be ratcheted upwardly from its horizontal position as shown in Fig. 1B through the angular footrest position

-11-

of Fig. 1C to a vertical position for mounting the calf support 29, as shown in Figs. 2A and 2B. The mechanism for ratcheting the footrest is shown principally in Figs. 7-9. The block 35 is fixed to a tubular shaft 100. The shaft has serrations 101 around a portion of its surface. A serrated pawl 103 is in engagement with the serrations 101 as shown in Figs. 7 and 8. The pawl is slidable in the footrest 30. The pawl 103 controls the position of the footrest and maintains it in any selected position through 81° of upward swinging unless the pawl is released. The footrest will continue movement to 117°. The relationship of the respective serrations is such that the pawls permit the footrest to swing upwardly with the pawls ratcheting against the serrations but block movement downwardly. The serrations permit the footrest to swing past vertical to about 117°.

A partial annular slot 104 in the shaft 100 is engaged by a stud 105 mounted in the footrest. The slot 104 permits movement of the footrest through 117°, but blocks it in either direction outside of 117°.

The pawl 103 is urged by a compression spring 106 into engagement with the shaft 100. The pawl has a bore 110. Referring to Figs. 7-9, a bracket 111 carries pin 112 that projects into the bore 110 in the pawl 103. An L-shaped actuating lever 115 is fixed to the bracket 111 to pivot the bracket

-12-

111. An L-shaped bar 117 having a pull handle 118 has a slot 119 which engages a leg 120 of the L-shaped lever 115. It can be seen from Figs. 7 and 8 that pulling on the L-shaped bar will pivot the bracket 111 causing the pin 112 to swing down as viewed in Fig. 8. When the arm 117 is pulled, the pawl will be moved out of engagement with the serrations in the shaft. A tension spring 122 returns arm 117 and, hence, the pawl 103 to its position of engagement with the shaft. The footrest 30 can be raised from its horizontal position to any one of a number of positions through to 117°. Then, by pulling on the arm 117, the pawl 103 releases and the footrest can be returned to its horizontal position.

Each receptacle of the calf support 29 has a ball joint 45 connecting it to a post 44. See Figs. 11 and 12. The post 44 has a sleeve 130 mounted on the elongated post 38. The post has screw threads 131 on its upper end and has the spade 39 on its lower end. The spade 39 drops in the pocket 37 of the footrest to mount the calf support and prevent it from rotating with respect to the upper end of the footrest. The uppermost end of the post 38 has a reduced diameter portion 135. The sleeve 130 surrounding the upper end portion has an inwardly-directed annular flange 138 welded to the post 38. A seat 140 is slidable in the sleeve 130 and has a plurality of depending pins 141 passing through enlarged bores 142

-13-

in the annular flange 138. The lower ends of the pins are in engagement with the upper race of roller bearings 144. A sleeve 145 is threaded on the threaded portion 131 of shaft 38 and engages the lower race of bearings 144. A plastic grip 146 is fixed to the sleeve 145. A ball 150 connected by a stud 151 to the receptacle 43 rests upon the seat 140 and is captured within the sleeve 130 by an inwardly-directed rim 152 and ring 153. When the sleeve 145 is rotated in one direction, the rim pulls the ring 153 against the ball and clamps it against the seat to fix the position of the ball. When the sleeve is rotated in the opposite direction, the ball is released.

The stud must be capable of making a right angle pivot with respect to the post 44 so that the cap support 29 can be pivoted to lie generally parallel to the post 44 for the storage position as depicted in Fig. 5.

To this end, the sleeve 130 has, at its upper end, a V slot 160 as shown in Figs. 13 and 14. A stud 151 has a matching taper as best shown in Fig. 14 so that when the stud 151 and the cap support that it carries is pivoted with respect to the sleeve, the stud 151 will lie in the V slot 160 as shown in Fig. 14.

OPERATION

In the operation of the invention, the patient is seated on a seat panel 17 with legs

-14-

comfortably resting on the mattress 21 of the leg section. When labor begins, the patient may wish to put her feet against the footrest 30 to assist the contractions. Assuming the patient has been administered an epidural anesthetic, the patient's legs are numb. The attending nurse will place the patient's legs on one side of the footrest mattress and raise the pivotal section 31 on the other side as depicted in Fig. 1B. The footrest 30 is ratcheted upwardly as shown in Fig. 1C and the patient's foot is placed upon it. The opposite leg of the patient is then placed upon the now folded-over mattress portion 31 and the opposite lateral mattress section is folded upon the center section as shown, for example, in Fig. 2A. The opposite footrest is then ratcheted up to a footrest position comparable to that of Fig. 1C and the patient's foot is placed upon it.

At the time of delivery, it may be desirable to raise the patient's calves and support them in a raised position. To make that transition, the footrests are raised to a vertical position. The calf supports 29 are removed from their holsters 42 and the spades 39 are inserted into the pockets 37 of the footrests. The angular position of each receptacle is adjusted to the desired position by rotating the sleeve 145 to free the ball 150 permitting the receptacle to be shifted. Thereafter the sleeve 145 is rotated to tighten the ring 153 against the ball,

-15-

thereby fixing the calf support in the desired position.

5 The gynecologist may find it useful simply to sit on the mattress sections 31 as they appear in Fig. 2A. The foot section can, of course, be lowered by dropping the transverse beam 50 as described above to lower the calf rests and remaining mattress section. Alternatively, as shown in Fig. 2B, the central panel 25 and mattress sections can be removed simply 10 by raising out of the lugs 52, 53 with the mattress section being stood on its rectangular stand 55 to minimize the space required for temporary storage of it in the birthing room.

15 From the above disclosure of the general principles of the present invention and the preceding detailed description of a preferred embodiment, those skilled in the art will readily comprehend the various modifications to which the present invention is susceptible. Therefore, we desire to be limited only 20 by the scope of the following claims and equivalents thereof:

We claim:

-16-

1. In a birthing bed having a bed frame,
a foot section comprising:
a foot panel mounted on said bed frame,
footrest-forming support plates mounted on
5 said frame and having a horizontal position alongside
said foot panel,
a mattress overlying said panel and support
plates,
said mattress including a central section
10 and side sections mounted adjacent to said central
section,
means permitting said side sections to be
moved away from said support plates to expose said
support plates,
15 whereby said support plates become accessi-
ble without removal of said foot panel.
2. A birthing bed as in claim 1 in which said
means permitting said side sections to be removed
20 comprises means hinging together adjacent upper
corners of said central section and said side
sections, thereby permitting said side sections to be
swung upwardly and over on top of said central sec-
tion.

3. A birthing bed as in claim 1 in which said means permitting said side sections to be removed comprises means forming detachable fasteners on said central and side sections, respectively, said fasteners normally joining
5 said side sections to said central section while permitting said side sections to be removed when access to said support plates is desired.
4. A foot section as in claim 1 further comprising:
means pivoting said support plates to said bed
10 frame for swinging between horizontal and vertical positions,
calf receptacles, and means for mounting said calf receptacles on the ends of said support plates in an attitude to support a patient's legs.
- 15 5. A foot section as in claim 4 further comprising:
a holster on the underside of each said support plate,
said calf receptacle being removable from the end
of said plate and mountable in said holster when not in
20 use.

-18-

6. A foot section as in claim 4 further comprising means for pivoting said support plates on said frame to swing horizontally about vertical axes.

5 7. A foot section as in claim 1 further comprising:

means for removably mounting said foot panel on said bed frame.

10 8. A foot section as in claim 1 further comprising:

a transverse beam,

a parallelogram linkage mounting said transverse beam to said bed frame,

15 means for raising and lowering said linkage to raise and lower said beam,

said foot panel and support plates being mounted on said beam.

20

25

- 19 -

9. A foot section as in claim 8 further comprising:
a pair of spaced forward-projecting arms
projecting from said beam,
each arm having a pair of inwardly-facing lugs
5 that are horizontally spaced apart,
said foot panel having laterally spaced,
depending tongues that are projectable between respective
lugs on said arms to removably mount said foot panel on
said beam.
- 10 10. A birthing bed comprising:
a bed frame,
a pair of laterally-spaced forwardly-projecting
arms,
means mounting said arms on said bed frame,
15 each said arm having longitudinally-spaced lugs,
a foot panel having laterally-spaced, depending
tongues that are removably inserted between said lugs to
mount said foot panel on said bed frame,
whereby said foot panel can be removed from said
20 bed frame by lifting said foot panel with respect to said
lugs.

- 20 -

11. A birthing bed comprising:

a bed frame,

a pair of laterally-spaced arms,

means mounting said arms on said bed frame, each
5 said arm having longitudinally-spaced lugs,

a foot panel having laterally-spaced, depending
tongues that are removably inserted between said lugs to
mount said foot panel on said bed frame,

whereby said foot panel can be removed from said
10 bed frame by lifting said foot panel with respect to said
lugs,

a forwardly-extending projection mounted on the
lower end of each said tongue,

said projection being engageable with a lug to
15 limit upward pivoting of said foot panel so that an
attendant can pull on the front end of said foot panel
without inadvertently removing it from said bed frame.

12. A birthing bed comprising:

a bed frame,

20 a pair of laterally-spaced arms,

means mounting said arms on said bed frame,

each said arm having longitudinally-spaced lugs,

a foot panel having laterally-spaced, depending
tongues that are removably inserted between said lugs to
25 mount said foot panel on said bed frame,

- 20 A -

whereby said foot panel can be removed from said bed frame by lifting said foot panel with respect to said lugs,

5 a stand mounted on the front edge of said foot panel, said stand being a generally rectangular shaped rod lying in a plane perpendicular to the plane of said panel,

whereby said panel, when removed from said frame, can be stood on its front edge so as to occupy minimal floor space, and whereby said rod can be used as a
10 handle to pull on said birthing bed when said panel is mounted on said bed frame.

- 21 -

13. In a birthing bed having a frame, a pair of calf supports mounted on said frame, each comprising:
- a vertical plate,
 - a calf receptacle,
 - 5 a post having a ball and socket joint connecting said post to said receptacle,
 - means for mounting said post on said vertical plate said post having an upper end,
 - said ball and socket joint including a sleeve
 - 10 fixed to the upper end of said post,
 - a seat within said sleeve and slidable with respect to said sleeve,
 - a ball in said sleeve resting on said seat,
 - said sleeve having an inwardly-projecting rim at
 - 15 its upper end confining said ball,
 - said ball being connected to said receptacle to permit said receptacle to be positioned in a multitude of angular positions,
 - means for raising and lowering said seat with
 - 20 respect to said sleeve to clamp and unclamp said ball on said post.

- 22 -

14. A birthing bed as in claim 13 further comprising:
 said sleeve having an inwardly-projecting annular
flange below said ball seat,
 said seat having a plurality of depending pins
5 slidably projecting through bores in said flange,
 an antifriction bearing at the lower ends of said
pins,
 and a second sleeve threaded to said post, said
second sleeve having a shoulder at its upper end supporting
10 said bearings whereby as said second sleeve is rotated with
respect to said post threads, the sleeve moves axially to
move said seat vertically with respect to said inwardly-
projecting rim to clamp and unclamp said ball.

-23-

15. A birthing bed having a bed frame comprising:

a footrest having a footrest support plate
pivotally mounted along a rear edge thereof to each side
of said frame,

5 said footrest support plate having a free end
and an underside and being operable to swing between a
lowered foot supporting position and a raised calf
supporting position,

 a calf support adapted to be selectively
10 mounted to said footrest support plate in a calf-
supporting position and in a storage position,

 means for mounting said calf support on the
free end of said footrest support plate when said
footrest support plate is in its raised calf supporting
15 position whereby said calf support may be placed in its
calf-supporting position, and

 means for mounting said calf support on the
underside of said footrest support plate when said
footrest support plate is in its lowered foot supporting
20 position whereby said calf support may be placed in its
storage position.

16. A footrest for a birthing bed having a frame
comprising:

25 a horizontal shaft,

 means mounting said shaft on said frame,

 a footrest pivotally mounted on said shaft to
swing between horizontal and vertical positions,

-24-

serrations around at least a portion of the surface of said shaft,

a spring biased pawl mounted on said footrest and engageable with said serrations to permit said footrest
5 to ratchet to a desired angular position,

an arcuate groove in said shaft surrounding
117° of said shaft,

a pin fixed to said footrest and riding in said groove to limit the angular movement of said footrest.

10

17. A birthing bed comprising:

a bed frame,

a foot section having,

a center section removably mounted on said bed
15 frame, and

a footrest having a footrest support plate mounted on said bed frame on each side of said center section independently of said center section,

means mounting each footrest support plate at
20 a rear edge thereof to swing horizontally outward and vertically-upward with respect to said bed frame, said footrest support plate having a free end an underside,

two calf receptacles, each adapted to be selectively mounted to one of said footrest support
25 plates in a calf-supporting position and in a storage position,

means for mounting said calf receptacles on the free ends of said footrest support plates when said footrest support plates are in raised calf supporting

-25-

positions whereby said calf receptacles may be placed in the calf supporting position, and

means for mounting said calf receptacles on the undersides of said footrest support plates when said
5 footrest support plates are in lowered foot supporting positions whereby said calf receptacles may be placed in the storage position.

18. A birthing bed comprising:

10 a bed frame,

a foot section having,

a center section removably mounted on said bed frame, and

a footrest mounted on said bed frame on each
15 side of said center section independently of said center section,

means mounting each footrest to swing horizontally outward and vertically-upward with respect to said bed frame,

20 a transverse beam,

a parallelogram linkage mounting said transverse beam to said bed frame,

means for raising and lowering said linkage to raise and lower said beam,

25 said center section and footrests being mounted on said beam.

19. A foot section as in claim 18 further comprising:

a pair of spaced forward-projecting arms projecting

-26-

from said beam,

each arm having a pair of inwardly-facing lugs that are horizontally spaced apart,

said center section having laterally spaced,
5 depending tongues that are projectable between
respective lugs on said arms to removably mount said
foot panel on said beam.

-27-

20. A birthing bed for supporting a patient giving birth, the birthing bed comprising

a frame,

a mattress supported by the frame,

5 a calf support configured to support a calf of the patient, and

a footrest coupled to the frame, the footrest having a first surface configured to support a foot of the patient, the footrest having a second surface to
10 which the calf support is coupled.

21. The birthing bed of claim 20, wherein the footrest is movable relative to the frame.

15 22. The birthing bed of claim 21, wherein the calf support is movable relative to the footrest.

23. The birthing bed of claim 32, wherein the calf support includes a ball joint and a receptacle which
20 receives the calf of the patient, the ball joint is lockable to fix the position of the receptacle relative to the footrest, and the ball joint is releasable to permit repositioning of the receptacle relative to the footrest.

25

24. The birthing bed of claim 22, wherein the calf support is lockable in a plurality of positions relative to the footrest.

30 25. The birthing bed of claim 22, further comprising a foot section that is attachable to and detachable from the frame, the calf support is movable to a first position above the foot section, and the calf support is movable to a second position beneath the foot section.

-28-

26. The birthing bed of claim 21, wherein the footrest is movable relative to the frame about a vertical axis.

27. The birthing bed of claim 26, wherein the footrest
5 is movable relative to the frame about a horizontal axis.

28. The birthing bed of claim 26, further comprising a
10 rotatable element coupled to the frame for rotation about the vertical axis and the footrest rotating about the vertical axis when the rotatable element rotates about the vertical axis.

29. The birthing bed of claim 20, further comprising a
15 rotatable element coupled to the frame for rotation about a vertical axis, the rotatable element supporting the footrest relative to the frame, and rotation of the rotatable element about the vertical axis results in rotation of the footrest about the vertical axis.

20

30. The birthing bed of claim 29, wherein the frame includes a flange and the rotatable element is situated atop the flange.

25 31. The birthing bed of claim 30, further comprising a pivot pin extending upwardly from the flange and the rotatable element is formed to include a bore that receives the pivot pin.

30 32. The birthing bed of claim 30, wherein the rotatable element is lockable relative to the flange.

33. The birthing bed of claim 29, further comprising a foot section that is attachable to and detachable from

-29-

the frame, the foot section including a foot section frame, and the rotatable element is positioned to lie alongside the foot section frame.

- 5 34. The birthing bed of claim 33, wherein the foot section includes a foot section mattress carried by the foot section frame and the foot section mattress includes a portion that is situated atop the rotatable element when the foot section is attached to the frame.
- 10
35. The birthing bed of claim 33, wherein the frame includes a transverse beam that is movable upwardly and downwardly relative to the mattress, the rotatable element moves upwardly and downwardly with the
- 15 transverse beam, and the foot section moves upwardly and downwardly with the transverse beam.
36. The birthing bed of claim 29, wherein the frame includes a transverse beam that is movable upwardly and
- 20 downwardly relative to the mattress, the rotatable element moves upwardly and downwardly with the transverse beam, and the footrest moves upwardly and downwardly with the transverse beam.
- 25 37. The birthing bed of claim 36, wherein the frame includes an arm extending from the transverse beam, the frame includes a flange extending horizontally from the arm, and the rotatable element is coupled to the flange.
- 30 38. The birthing bed of claim 20, further comprising a foot section that is attachable to and detachable from the frame, the calf support has a first position below the foot section, and the calf support has a second position above the foot section.

-30-

39. The birthing bed of claim 38, wherein the foot
section includes a foot section mattress carried by the
foot section frame and the foot section mattress
includes a portion that is positioned to lie above the
5 footrest when the foot section is attached to the frame.

40. The birthing bed of claim 38, wherein the frame
includes a transverse beam that is movable upwardly and
downwardly relative to the mattress, the footrest moves
10 upwardly and downwardly with the transverse beam, and
the foot section moves upwardly and downwardly with the
transverse beam when the foot section is attached to the
frame.

15 41. The birthing bed of claim 20, wherein the first
surface faces in a first direction and the second
surfaces faces in a second direction that is
substantially opposite to the first direction.

20 42. The birthing bed of claim 20, wherein the first
surface is a top surface of the footrest and the second
surface is a bottom surface of the footrest.

43. A birthing bed for supporting a patient giving
25 birth, the birthing bed comprising
a frame,
a seat panel supported by the frame,
a head panel pivotable relative to the frame and
relative to the seat panel,
30 a mattress supported by the frame, the mattress
including a first portion supported by the seat panel
and a second portion supported by the head panel,
a transverse beam that is movable upwardly and
downwardly relative to the frame,

-31-

a pair of spaced-apart footrests supported with respect to the transverse beam to move upwardly and downwardly therewith, each footrest being configured to support a respective foot of the patient,

5 a pair of calf supports, each calf support being coupled to a respective one of the footrests, each calf support being configured to support a respective calf of the patient, and

a foot section supported with respect to the
10 transverse beam to move upwardly and downwardly therewith, the calf supports having a first position below the foot section, and the calf supports having a second position above the foot section.

15 44. The birthing bed of claim 43, further comprising a pair of arms extending from the transverse beam, the foot section is attachable to the pair of arms, and the foot section is detachable from the pair of arms.

20 45. The birthing bed of claim 44, further comprising a set of first coupling elements and a second set of coupling elements, the first set of coupling elements being coupled to the pair of arms, the second set of coupling elements being coupled to the foot section, and
25 the second coupling elements engaging the first coupling elements when the foot section is attached to the pair of arms.

46. The birthing bed of claim 44, wherein the foot
30 section extends in a cantilevered manner away from the pair of arms when the foot section is attached to the pair of arms.

47. The birthing bed of claim 44, further comprising a

-32-

pair of rotatable blocks, each rotatable block being coupled to a respective one of the pair of arms for rotation about a respective rotation axis, and the footrests being supported with respect to the rotatable blocks such that the footrests rotate with the rotatable blocks about the rotation axes.

48. The birthing bed of claim 47, wherein the foot section includes a foot section mattress and the foot section mattress includes portions that overlie the rotatable blocks when the foot section is attached to the pair of arms.

49. The birthing bed of claim 47, wherein the rotatable blocks are lockable in a plurality of positions relative to the pair of arms.

50. The birthing bed of claim 47, wherein the rotation axes are vertical.

20

51. The birthing bed of claim 47, wherein each arm includes a horizontally extending flange and each rotatable block is situated atop a respective one of the flanges.

25

52. The birthing bed of claim 47, further comprising a pair of vertical posts, each post extending upwardly from a respective arm of the pair of arms, and each rotatable block being formed to include a bore that receives a respective post of the pair of vertical posts.

30

53. The birthing bed of claim 43, wherein the foot section includes a foot section frame, the foot section

-33-

includes a foot section mattress carried by the foot section frame, and the foot section mattress includes portions that overlie the calf supports when the calf supports are in the second position.

5

54. The birthing bed of claim 43, further comprising an electric actuator that operates to move upwardly and downwardly as a unit the transverse beam, the footrests, and the calf supports.

10

55. The birthing bed of claim 43, further comprising a pair of ball joints that are lockable to fix the positions of the calf supports relative to the footrests and that are releaseable to permit repositioning of the

15 calf supports relative to the foot rests.

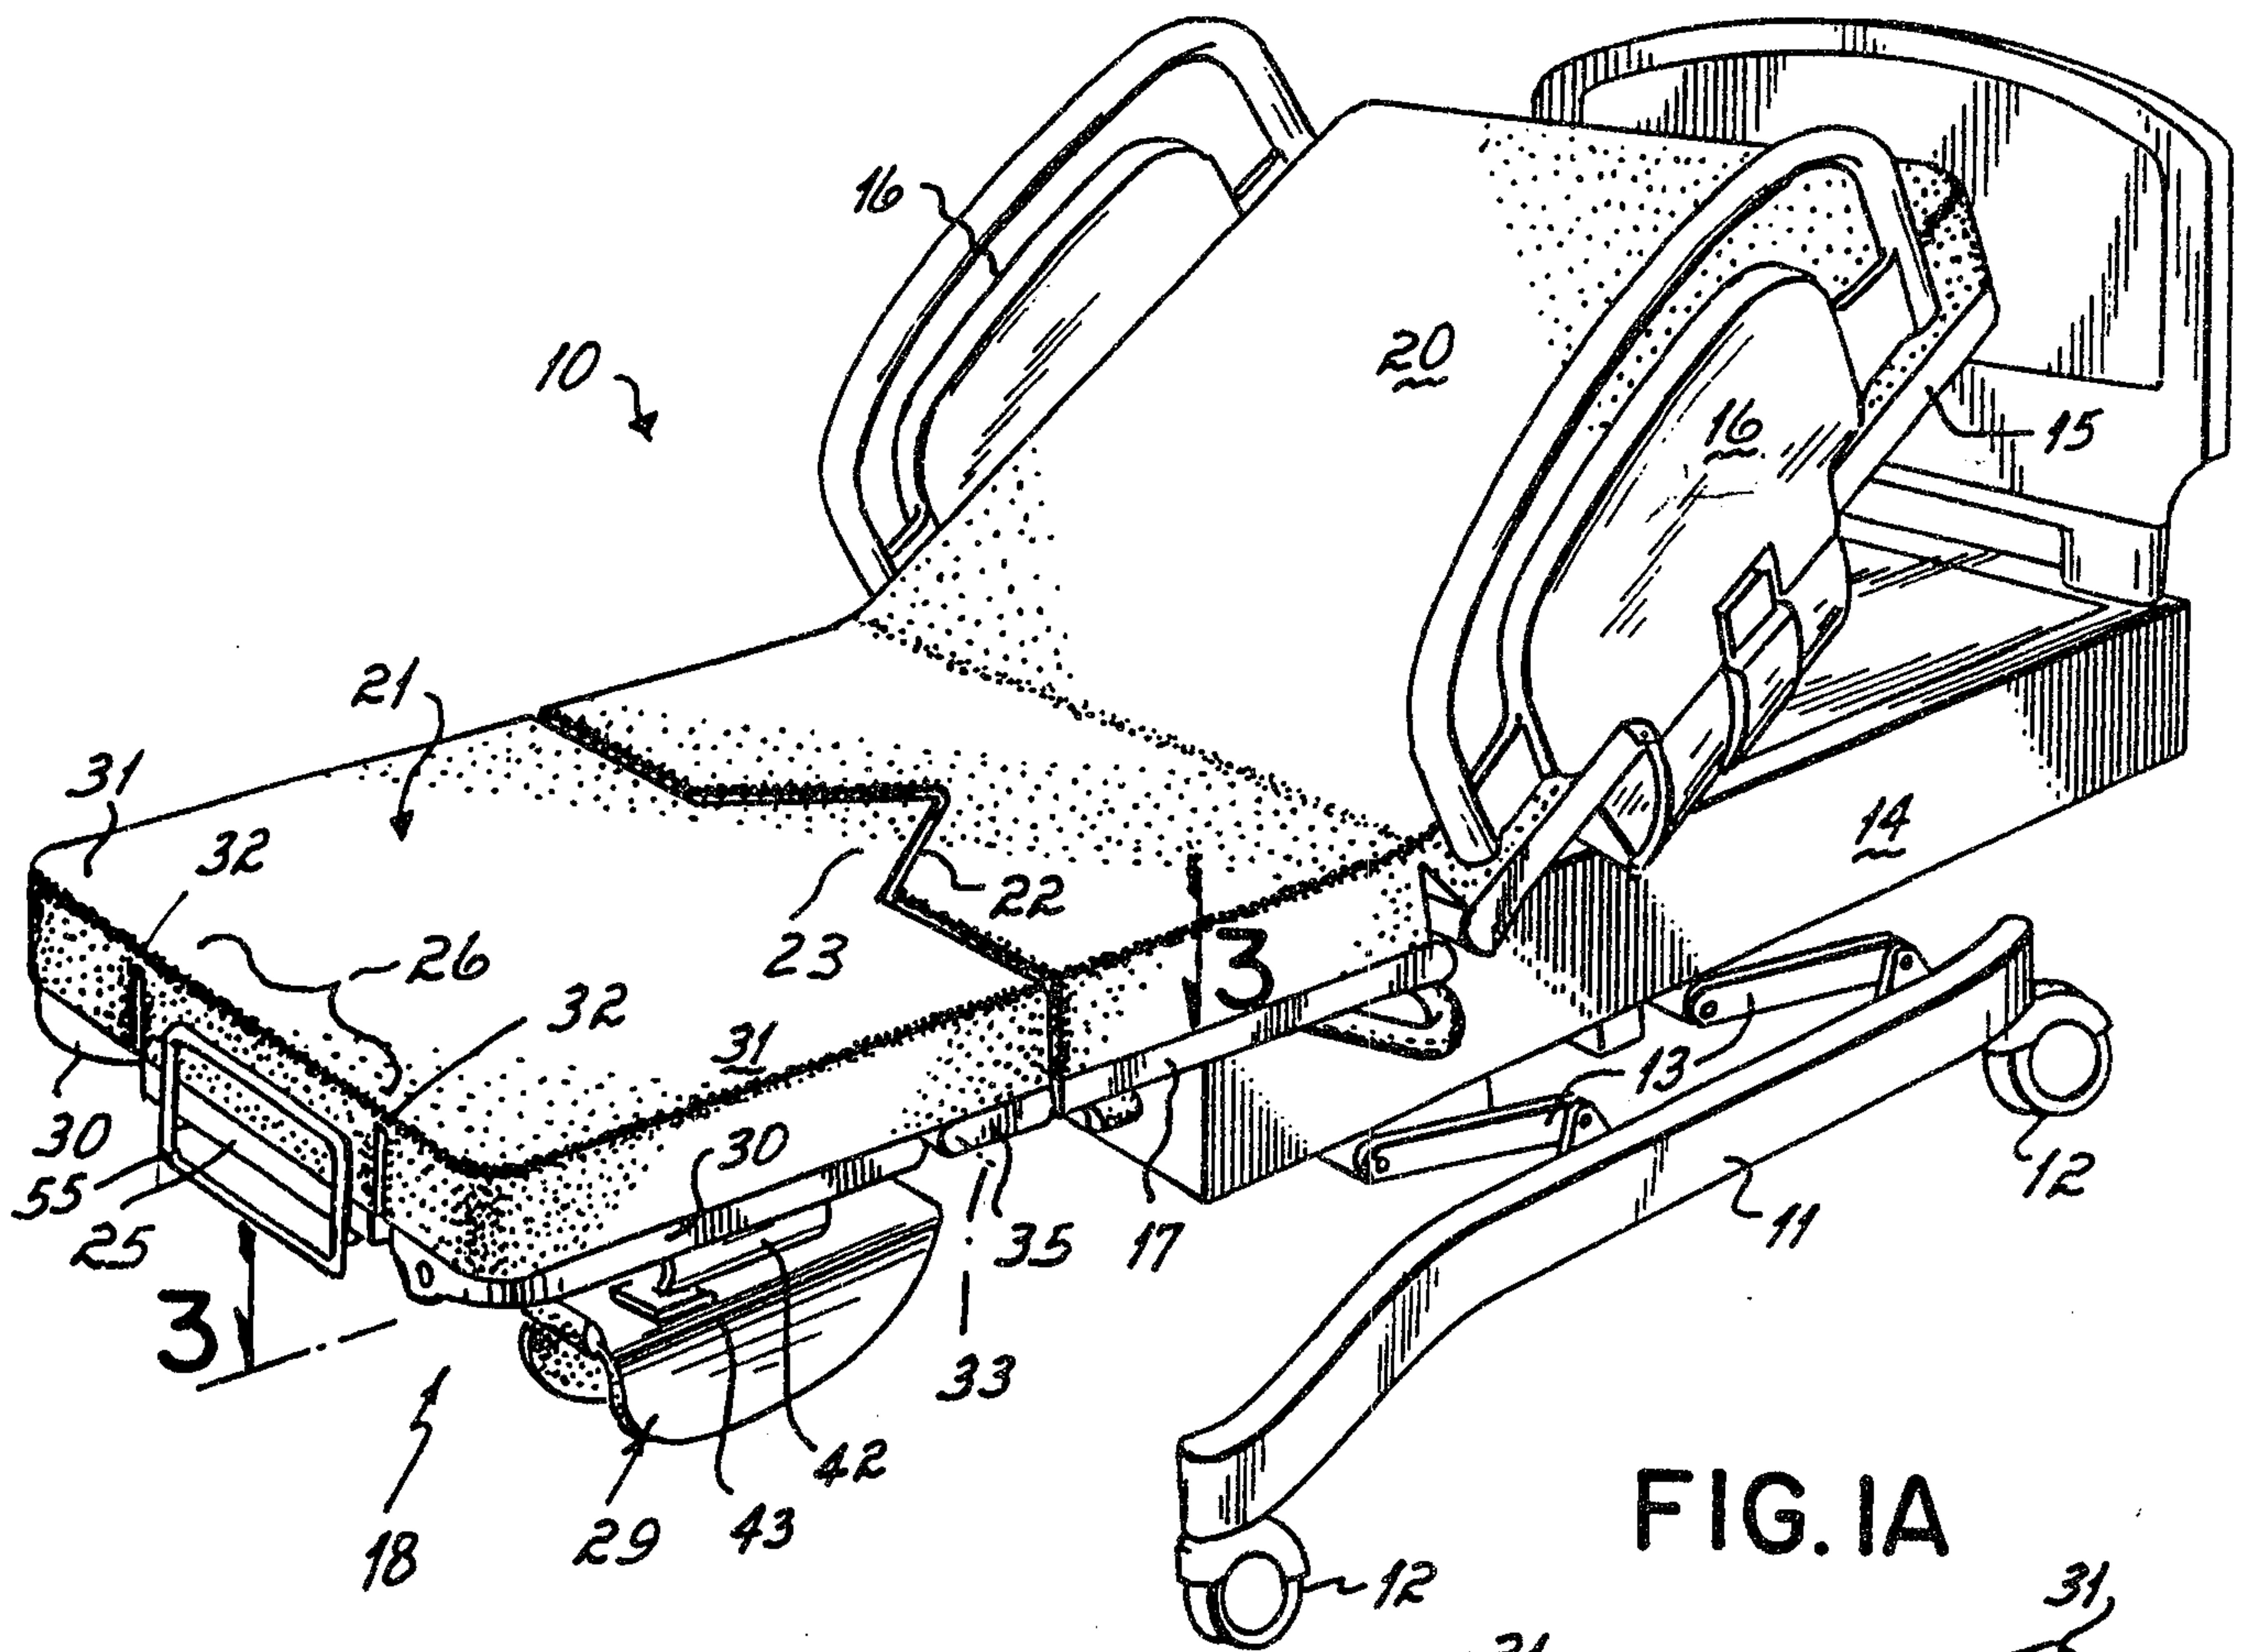


FIG. 1A

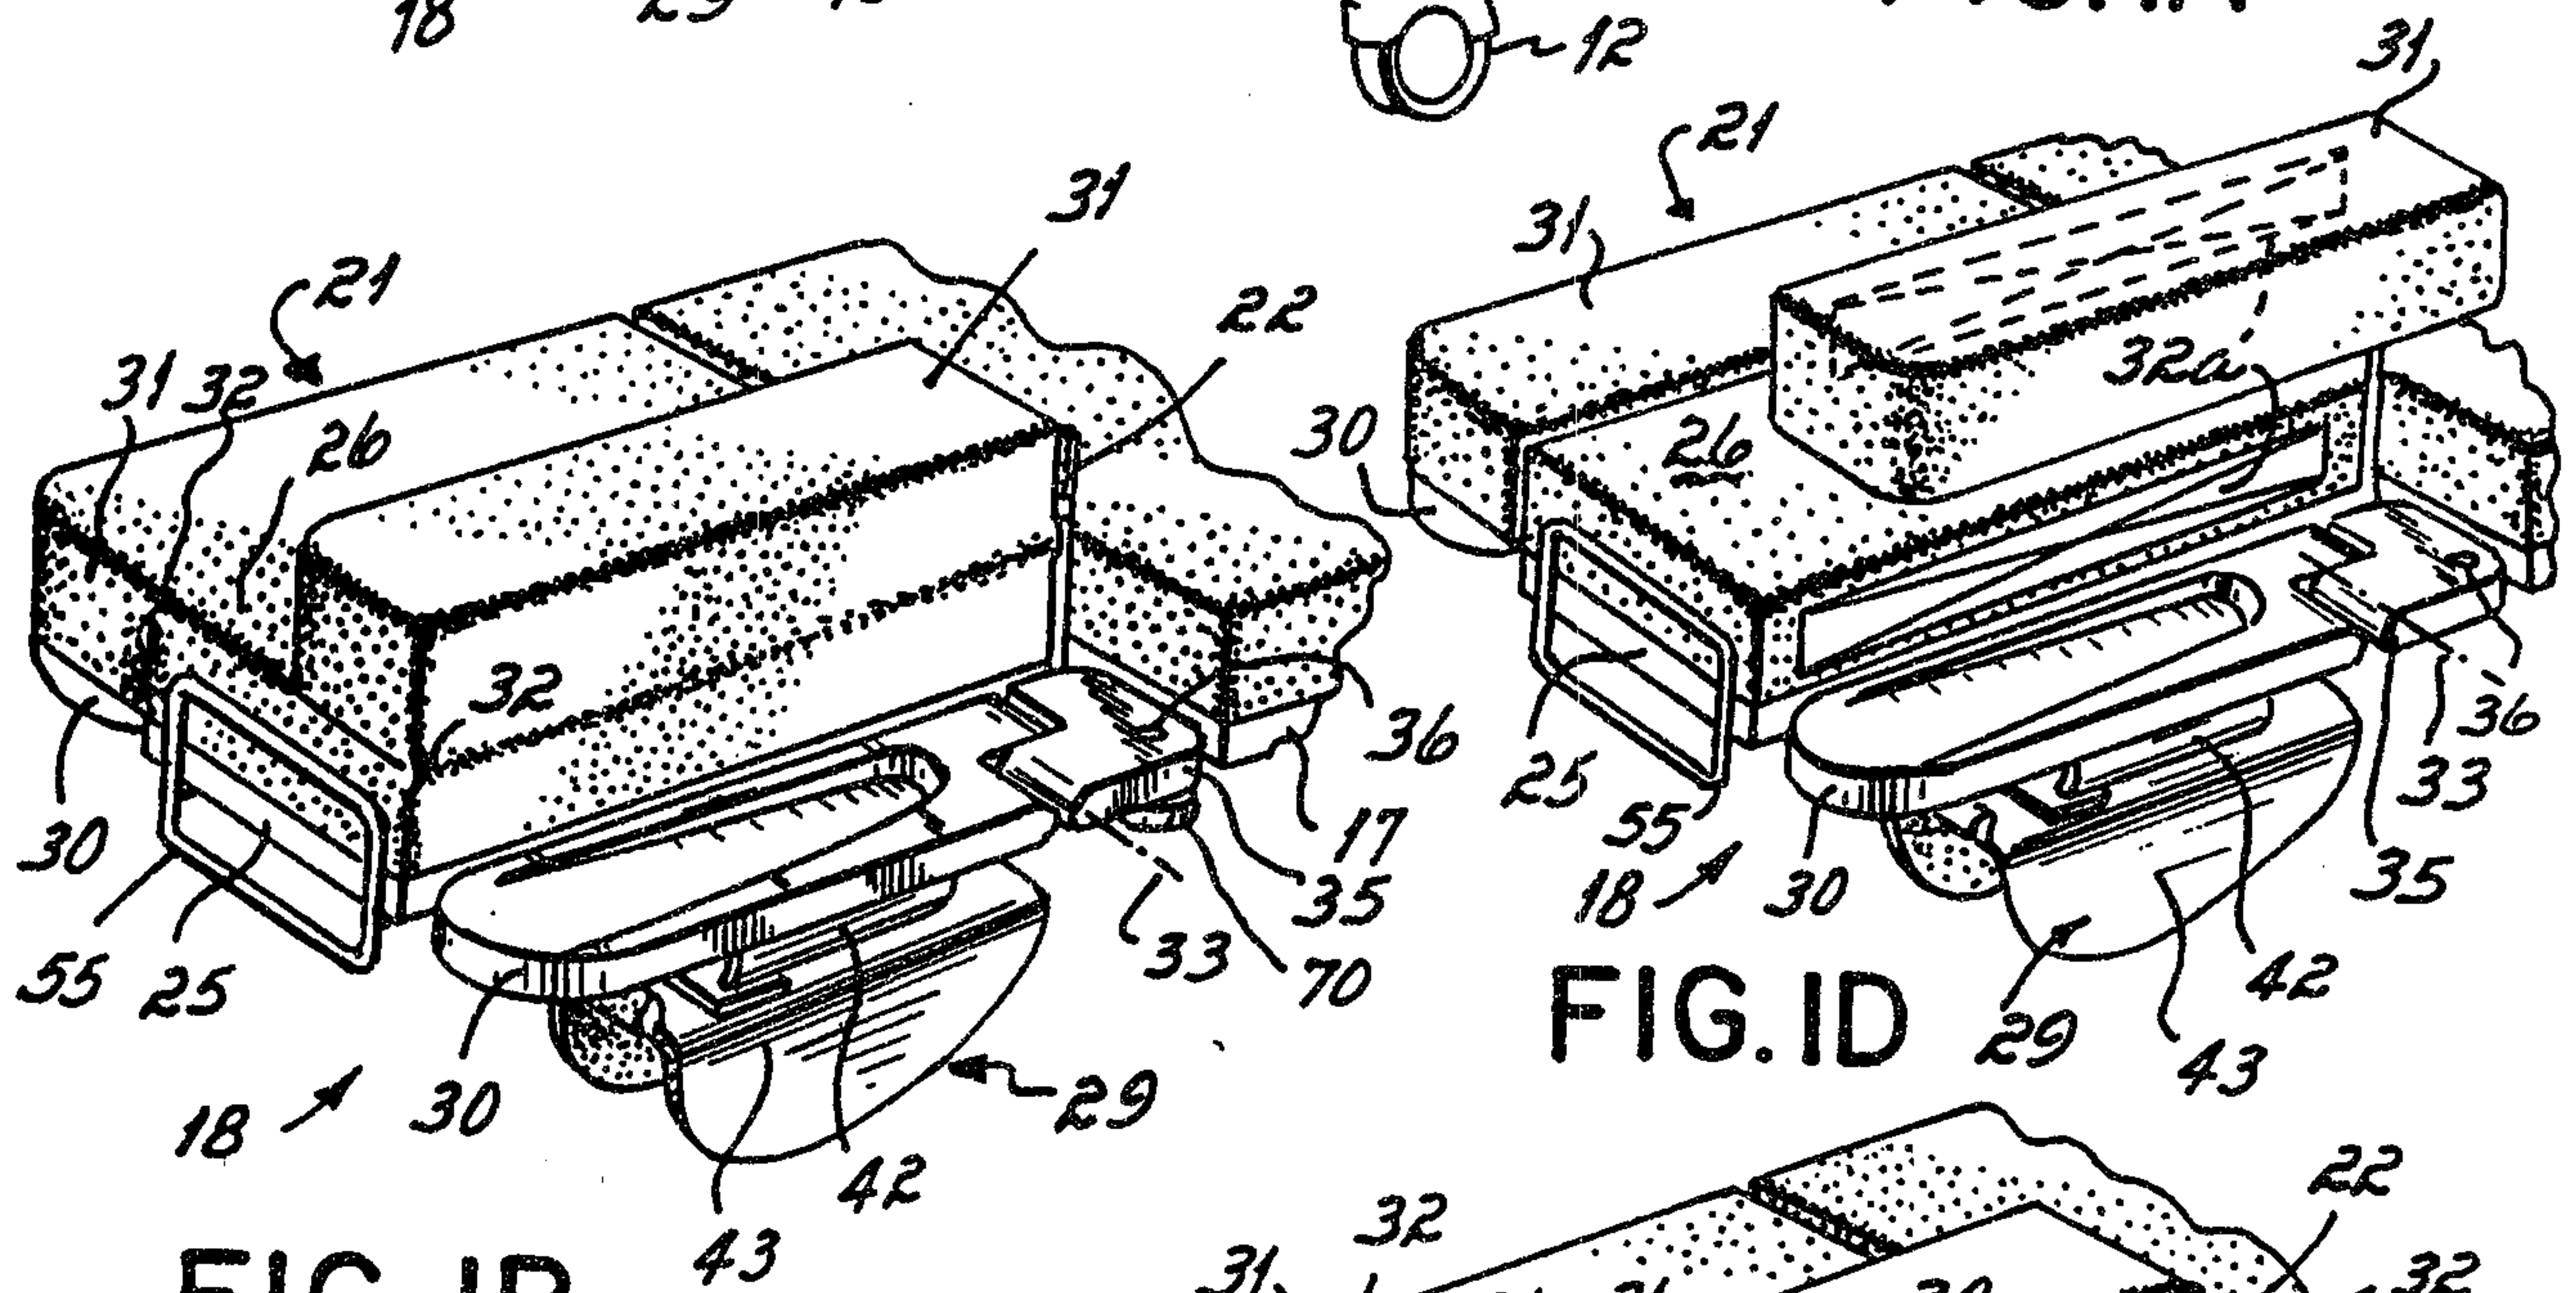


FIG. 1B

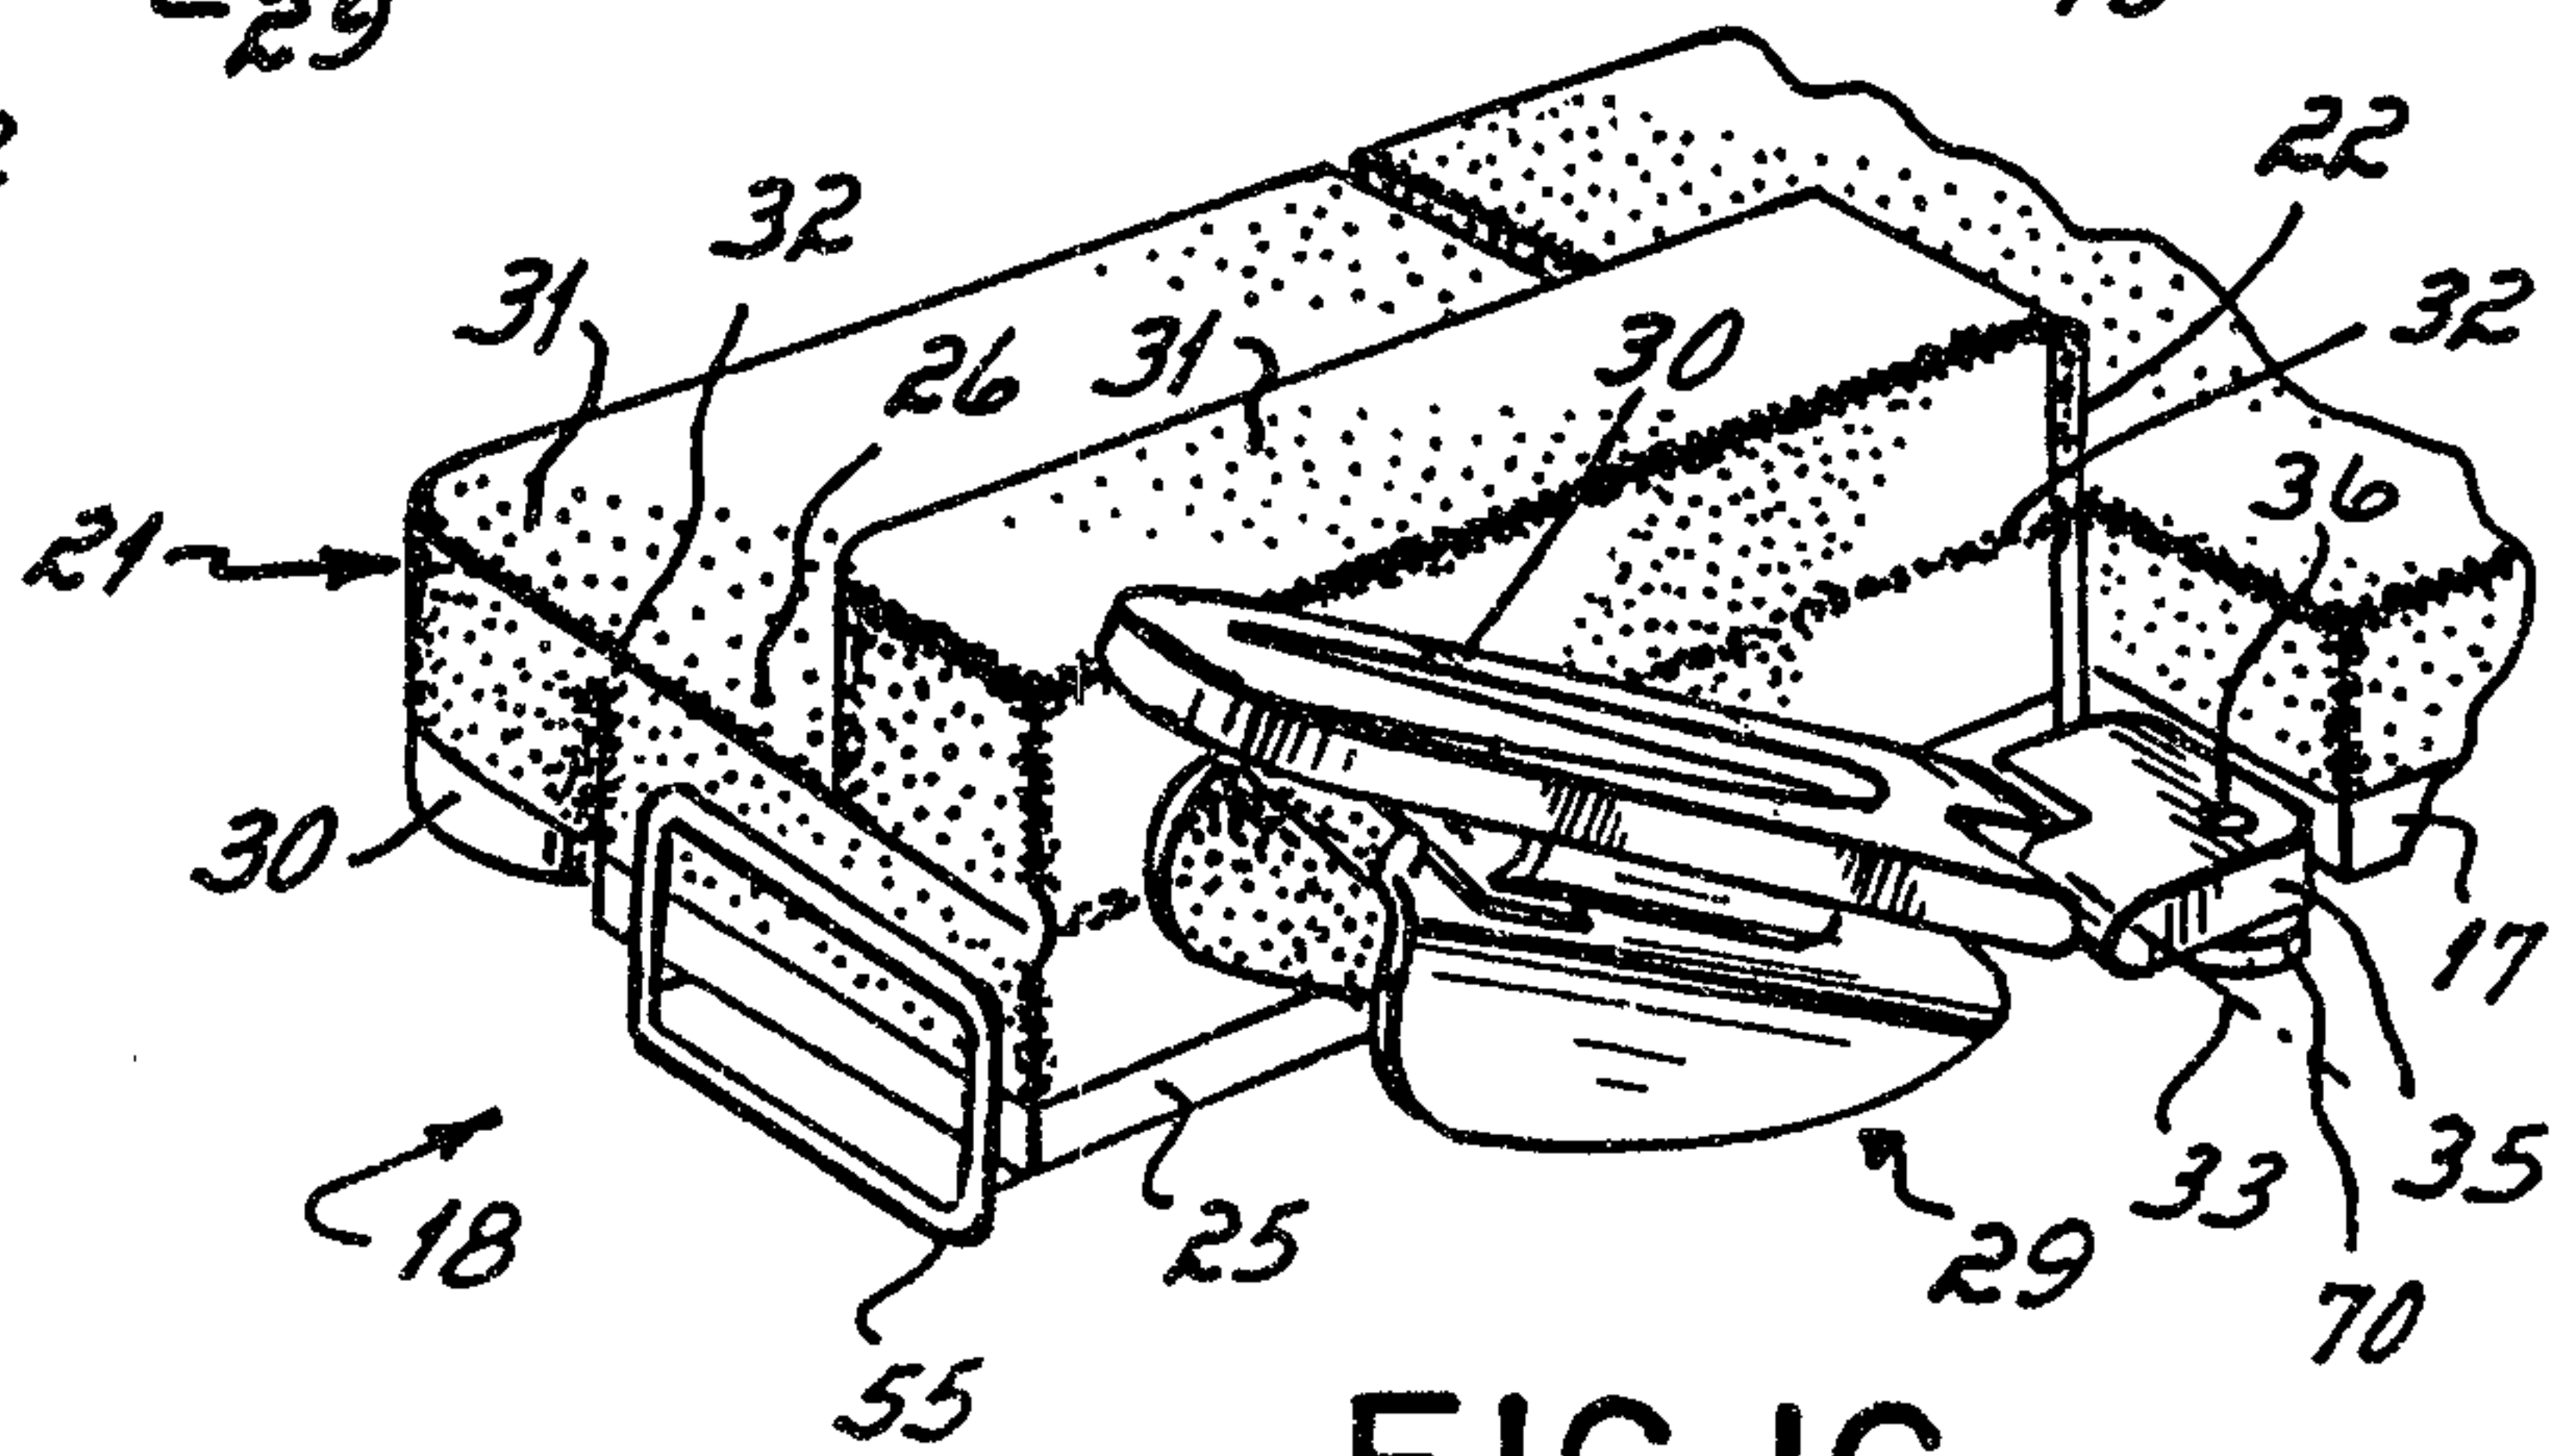


FIG. 1C

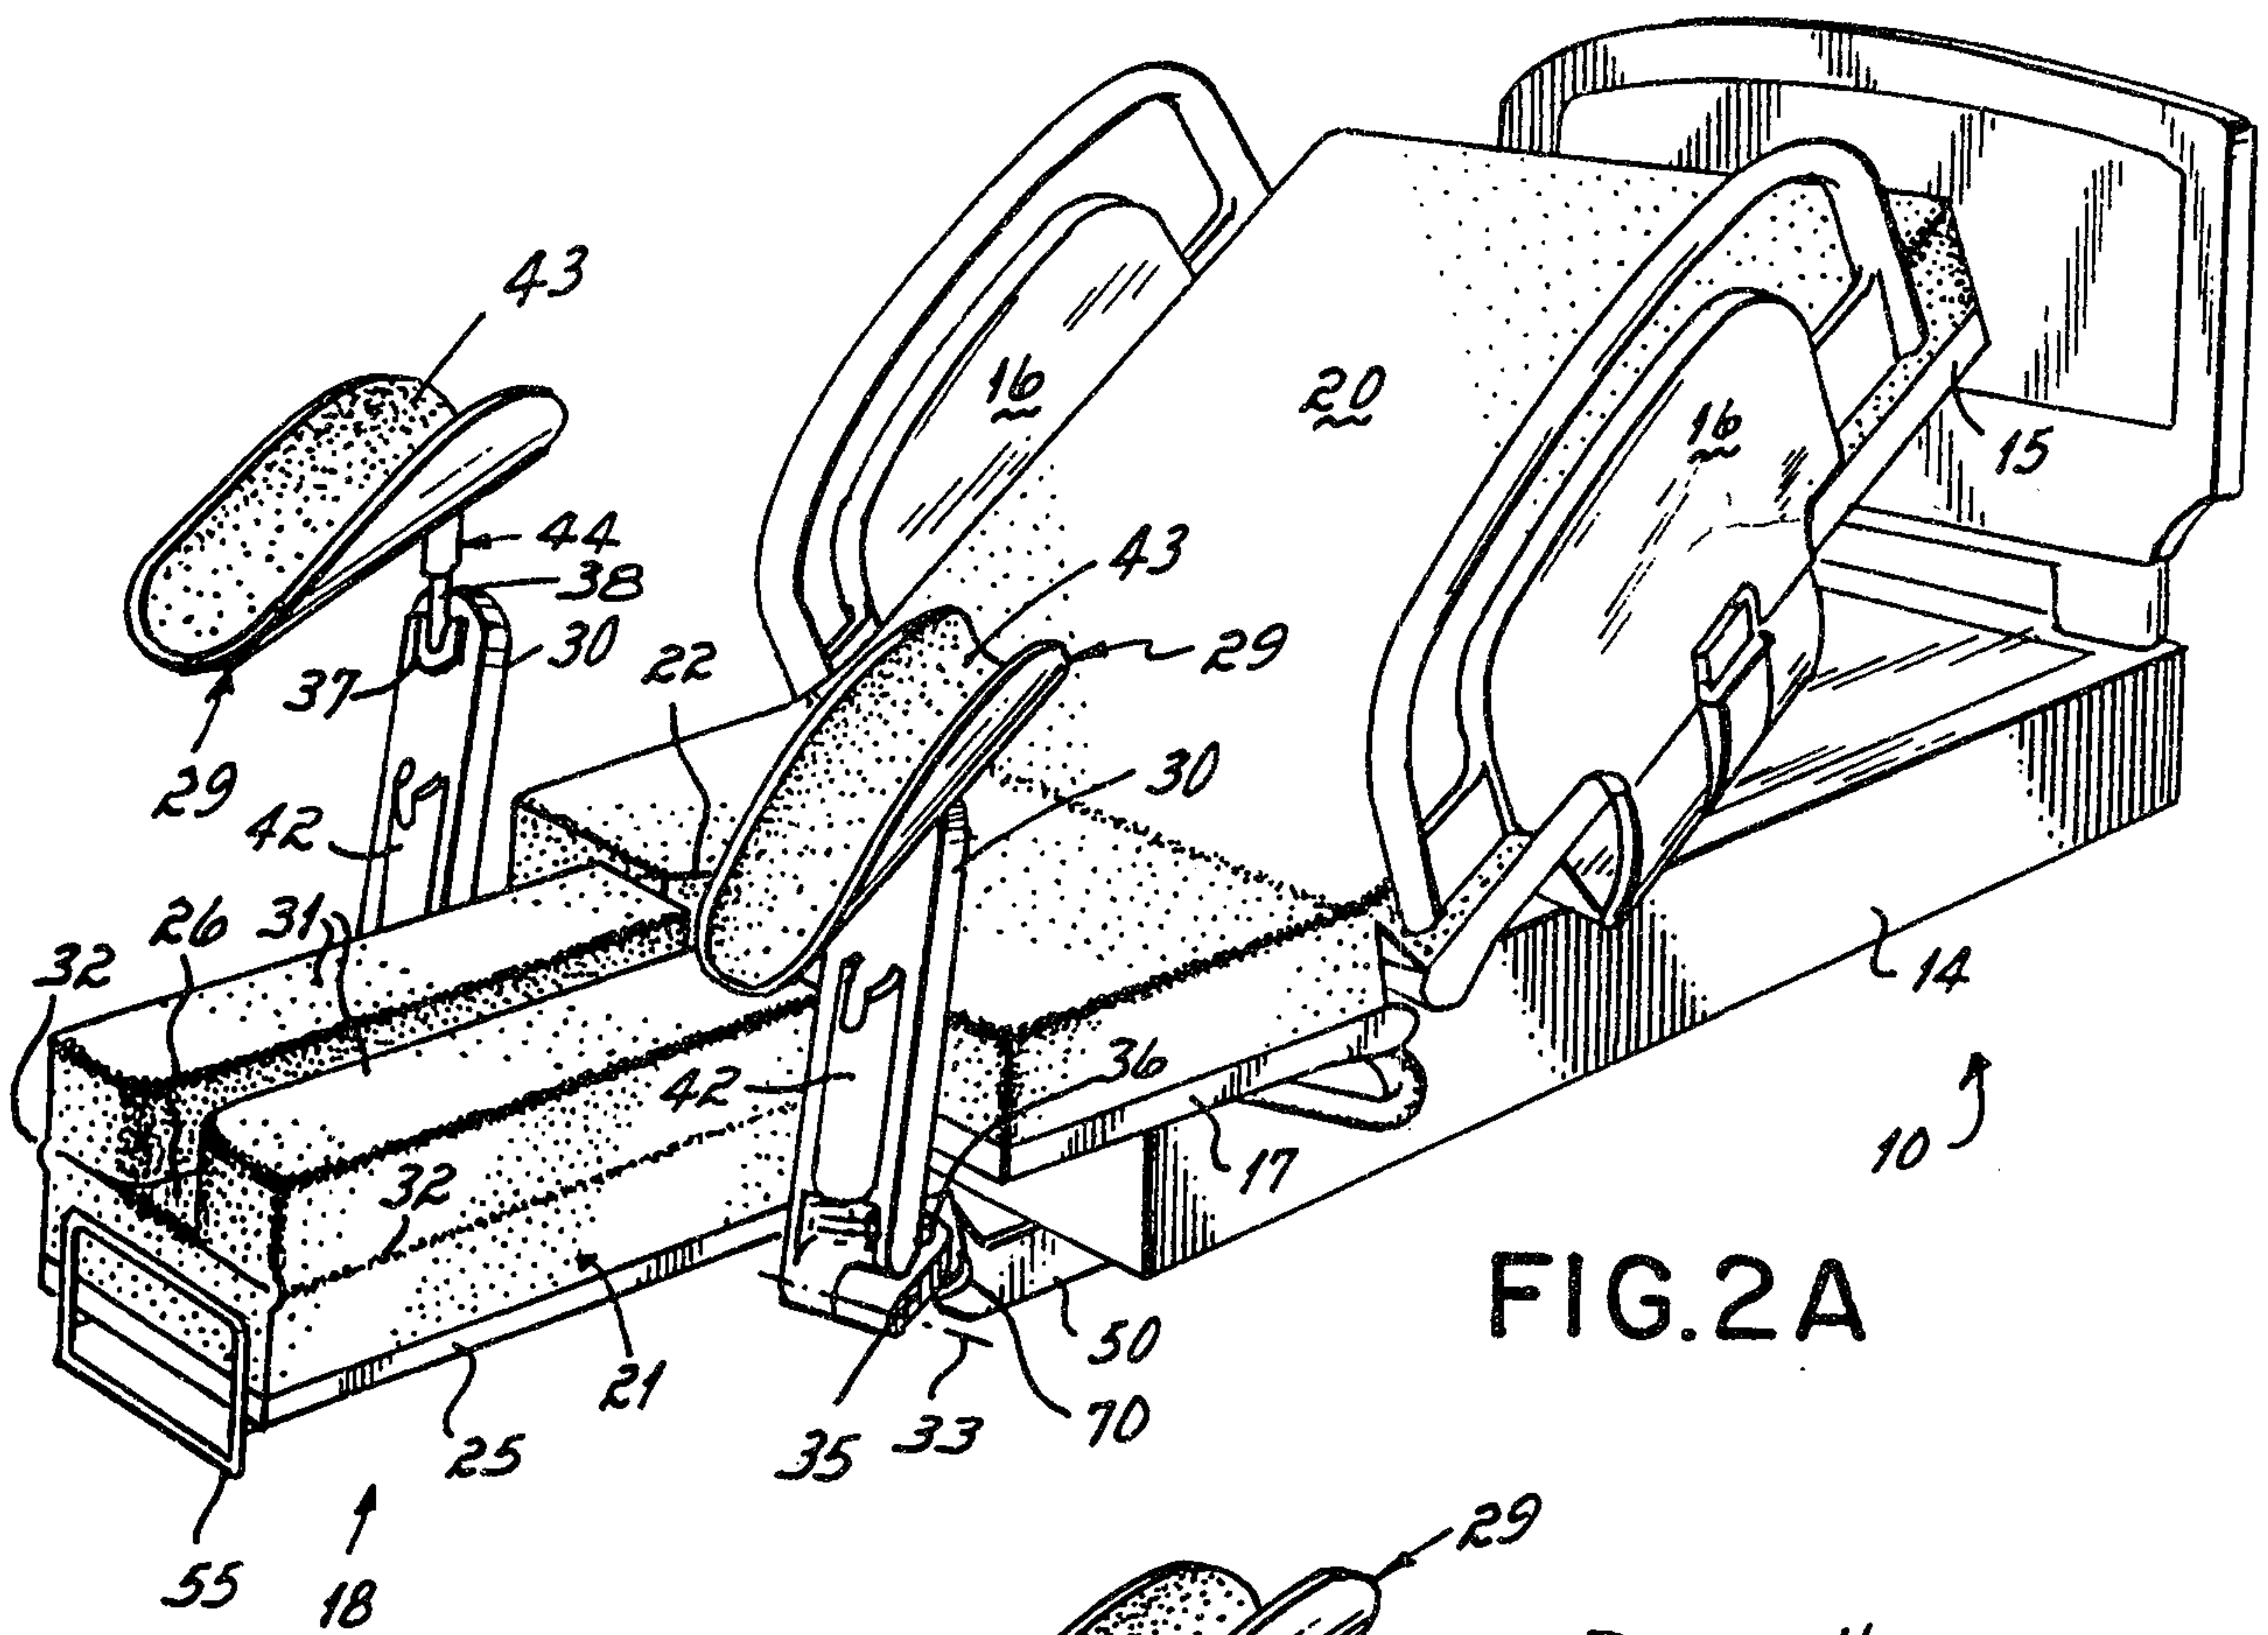


FIG. 2A

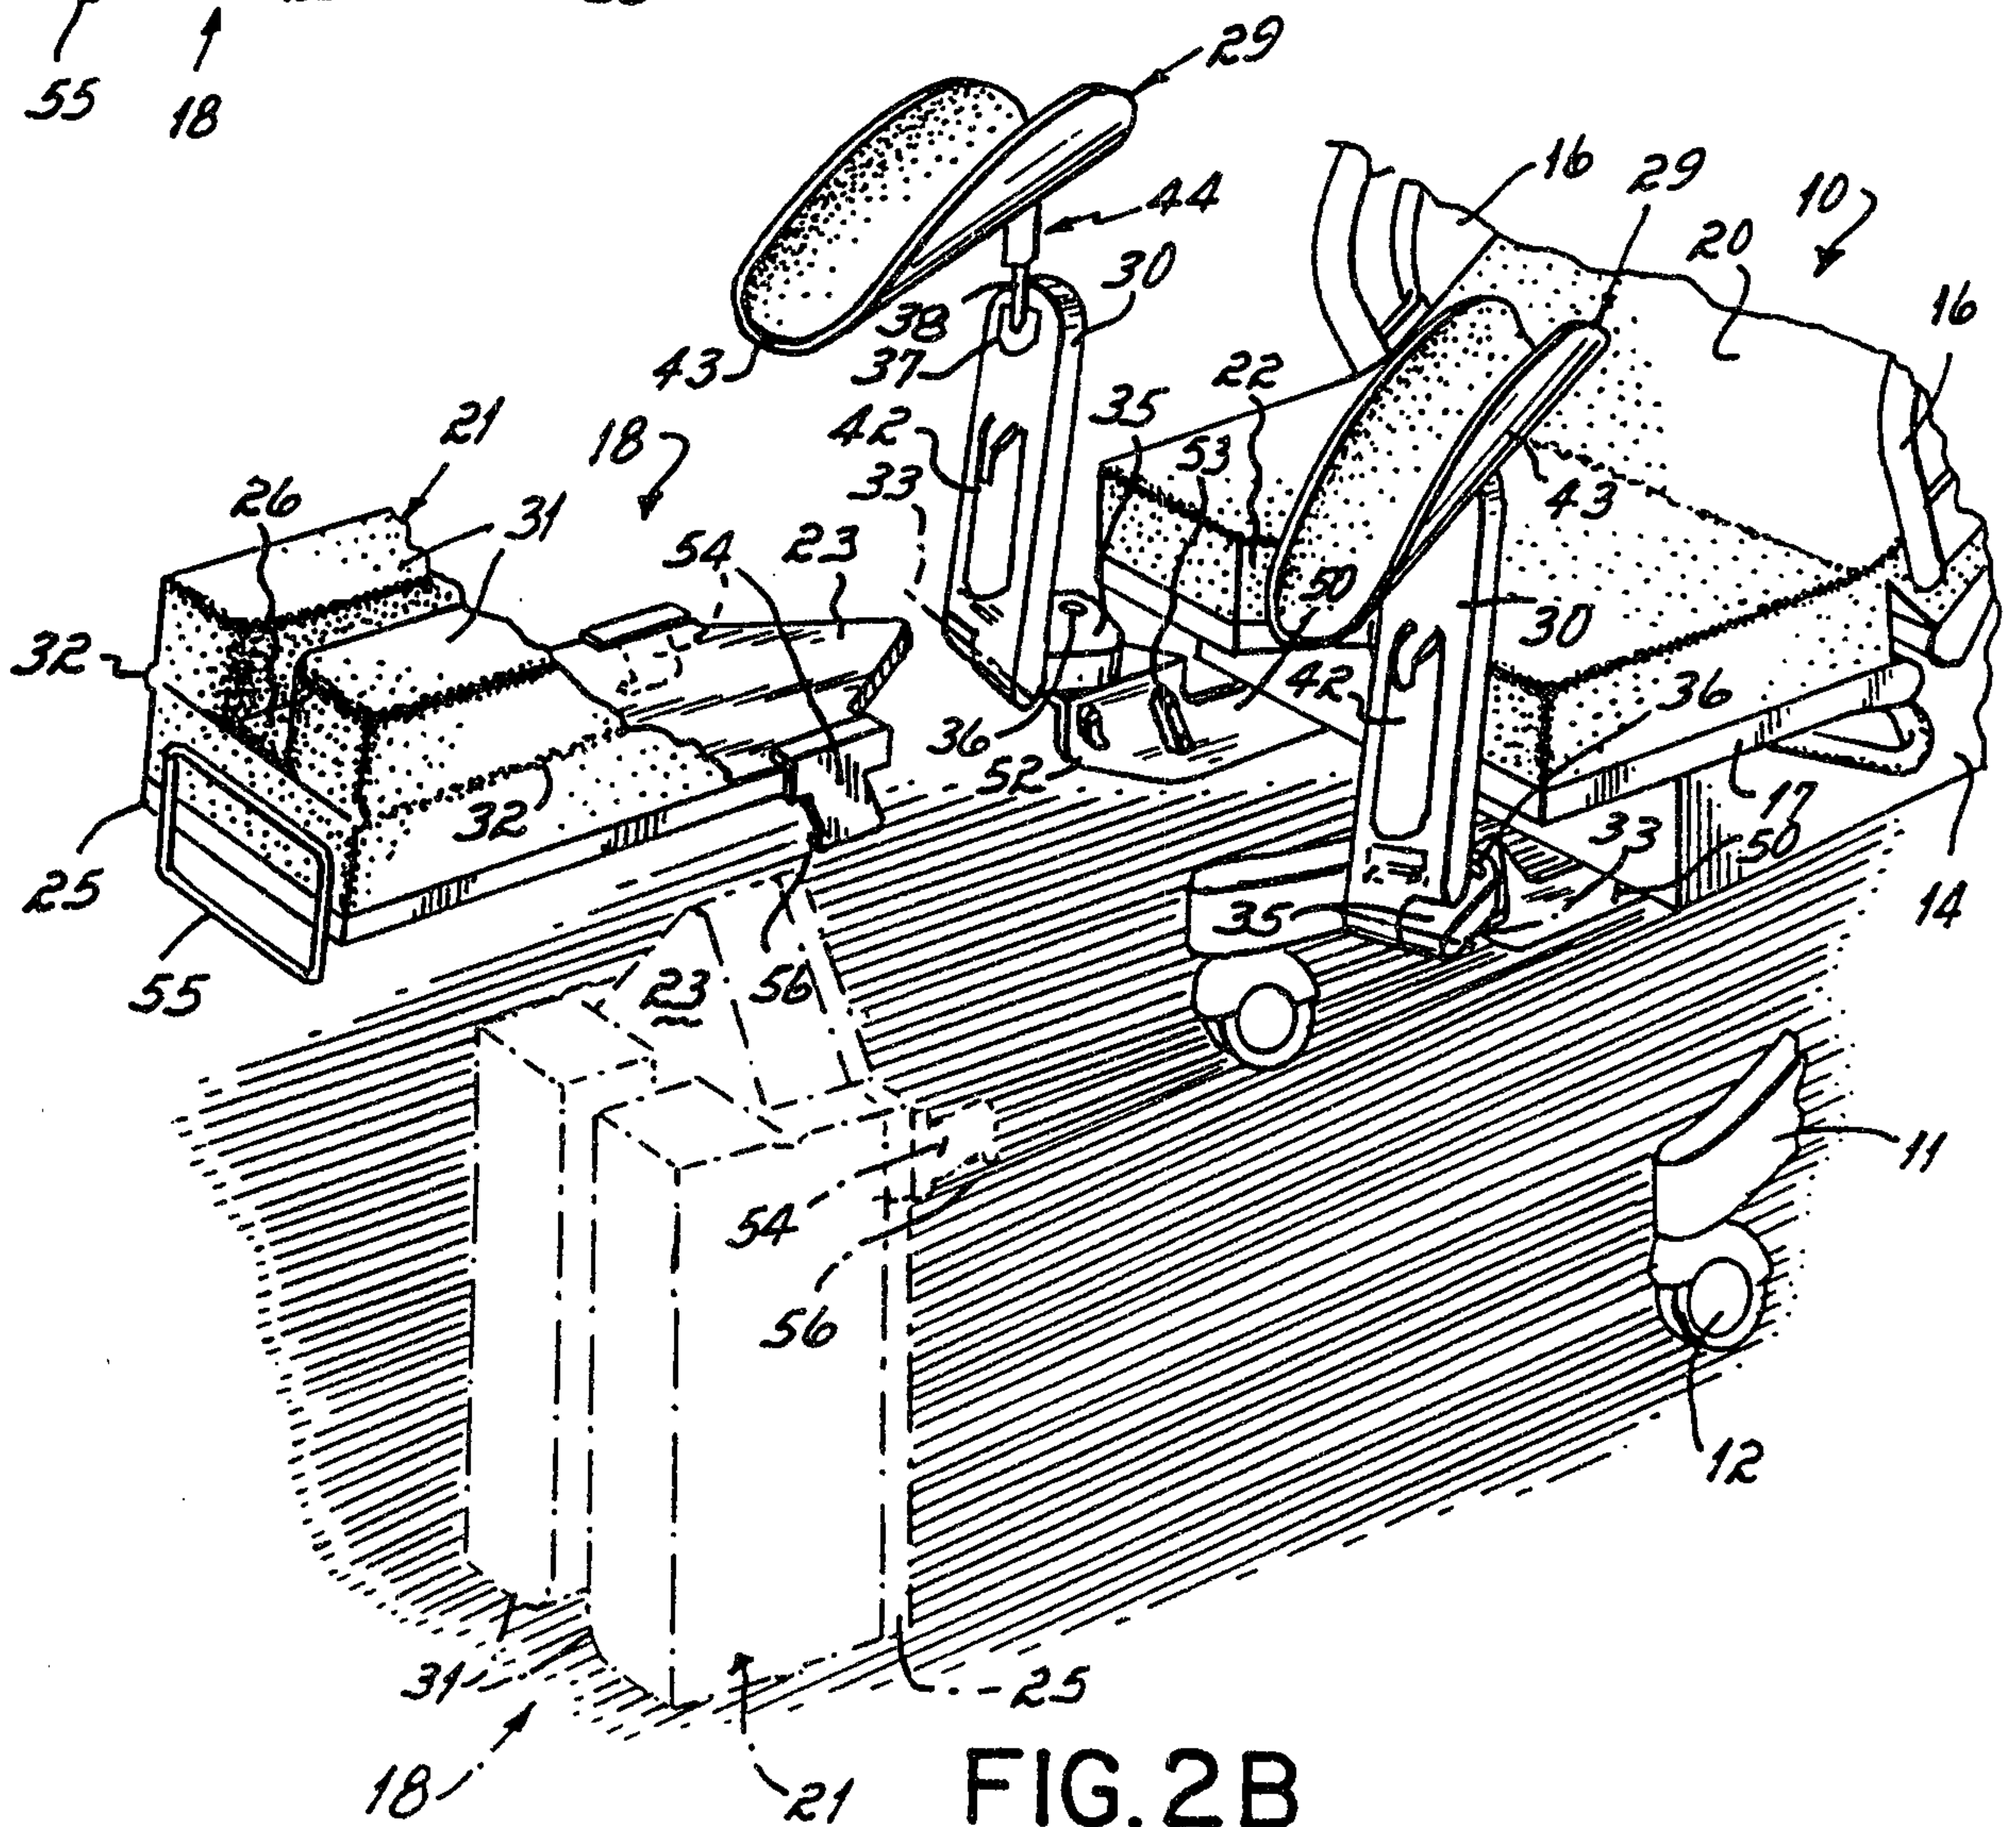
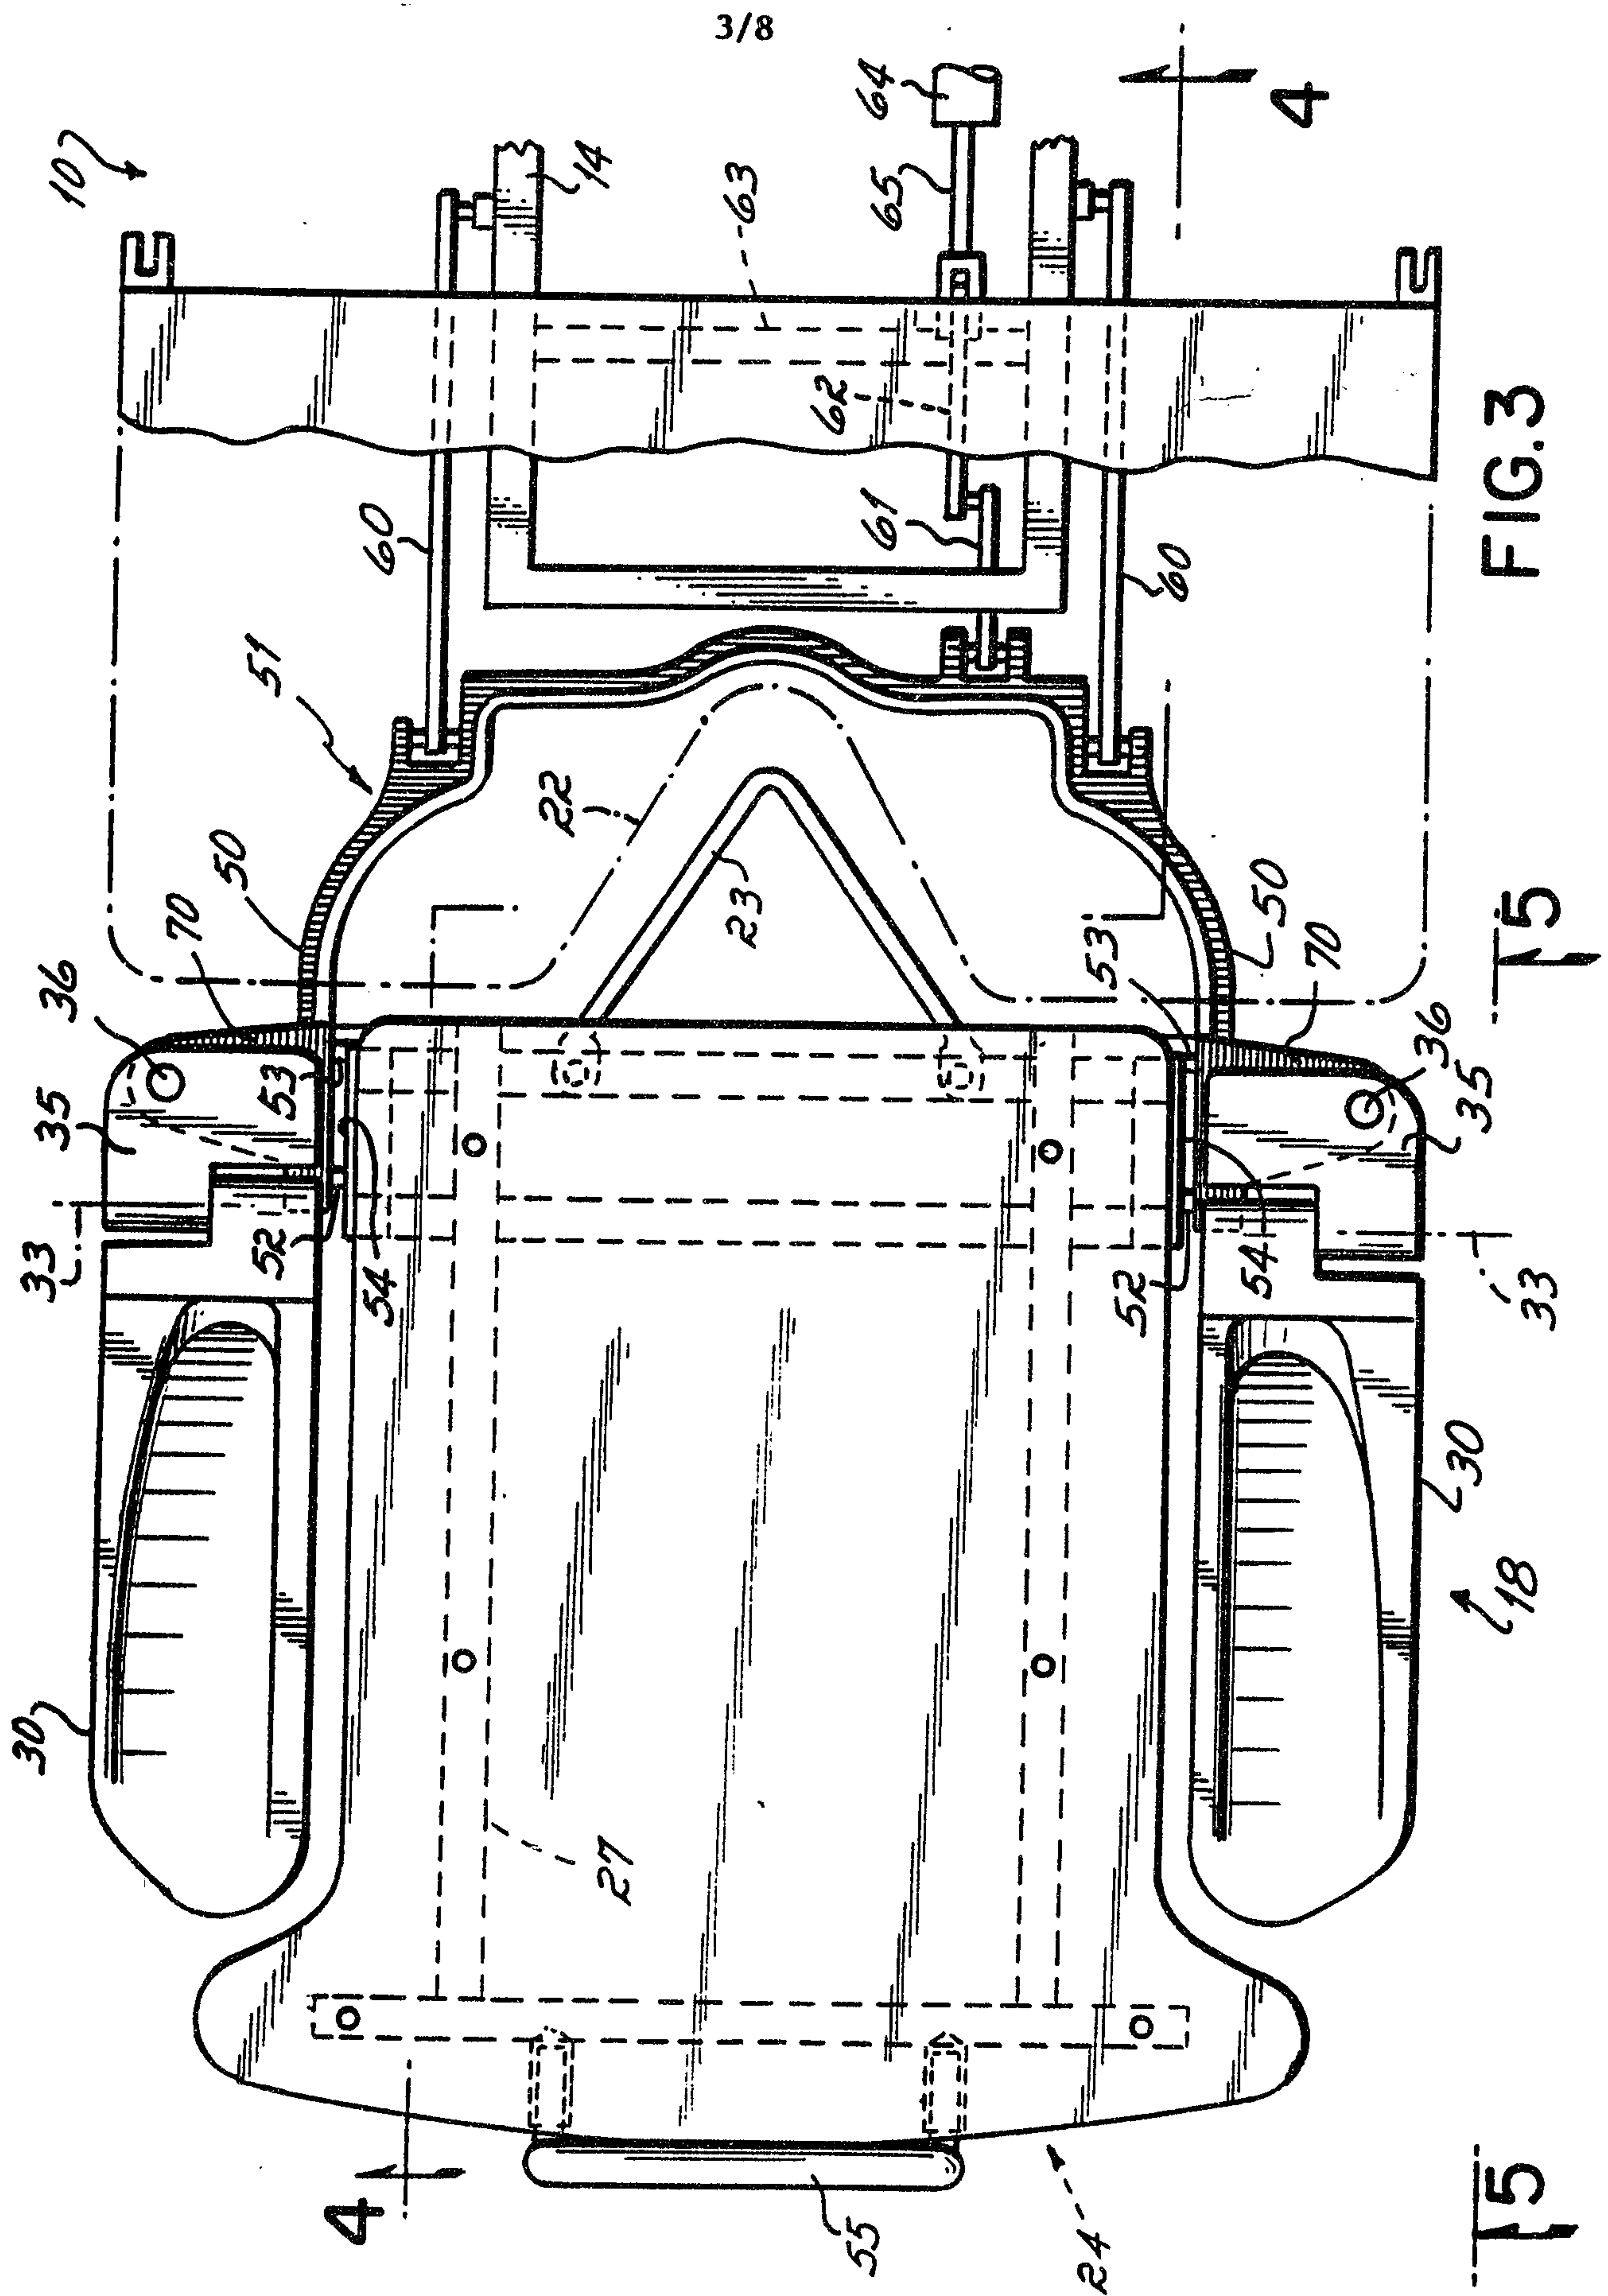
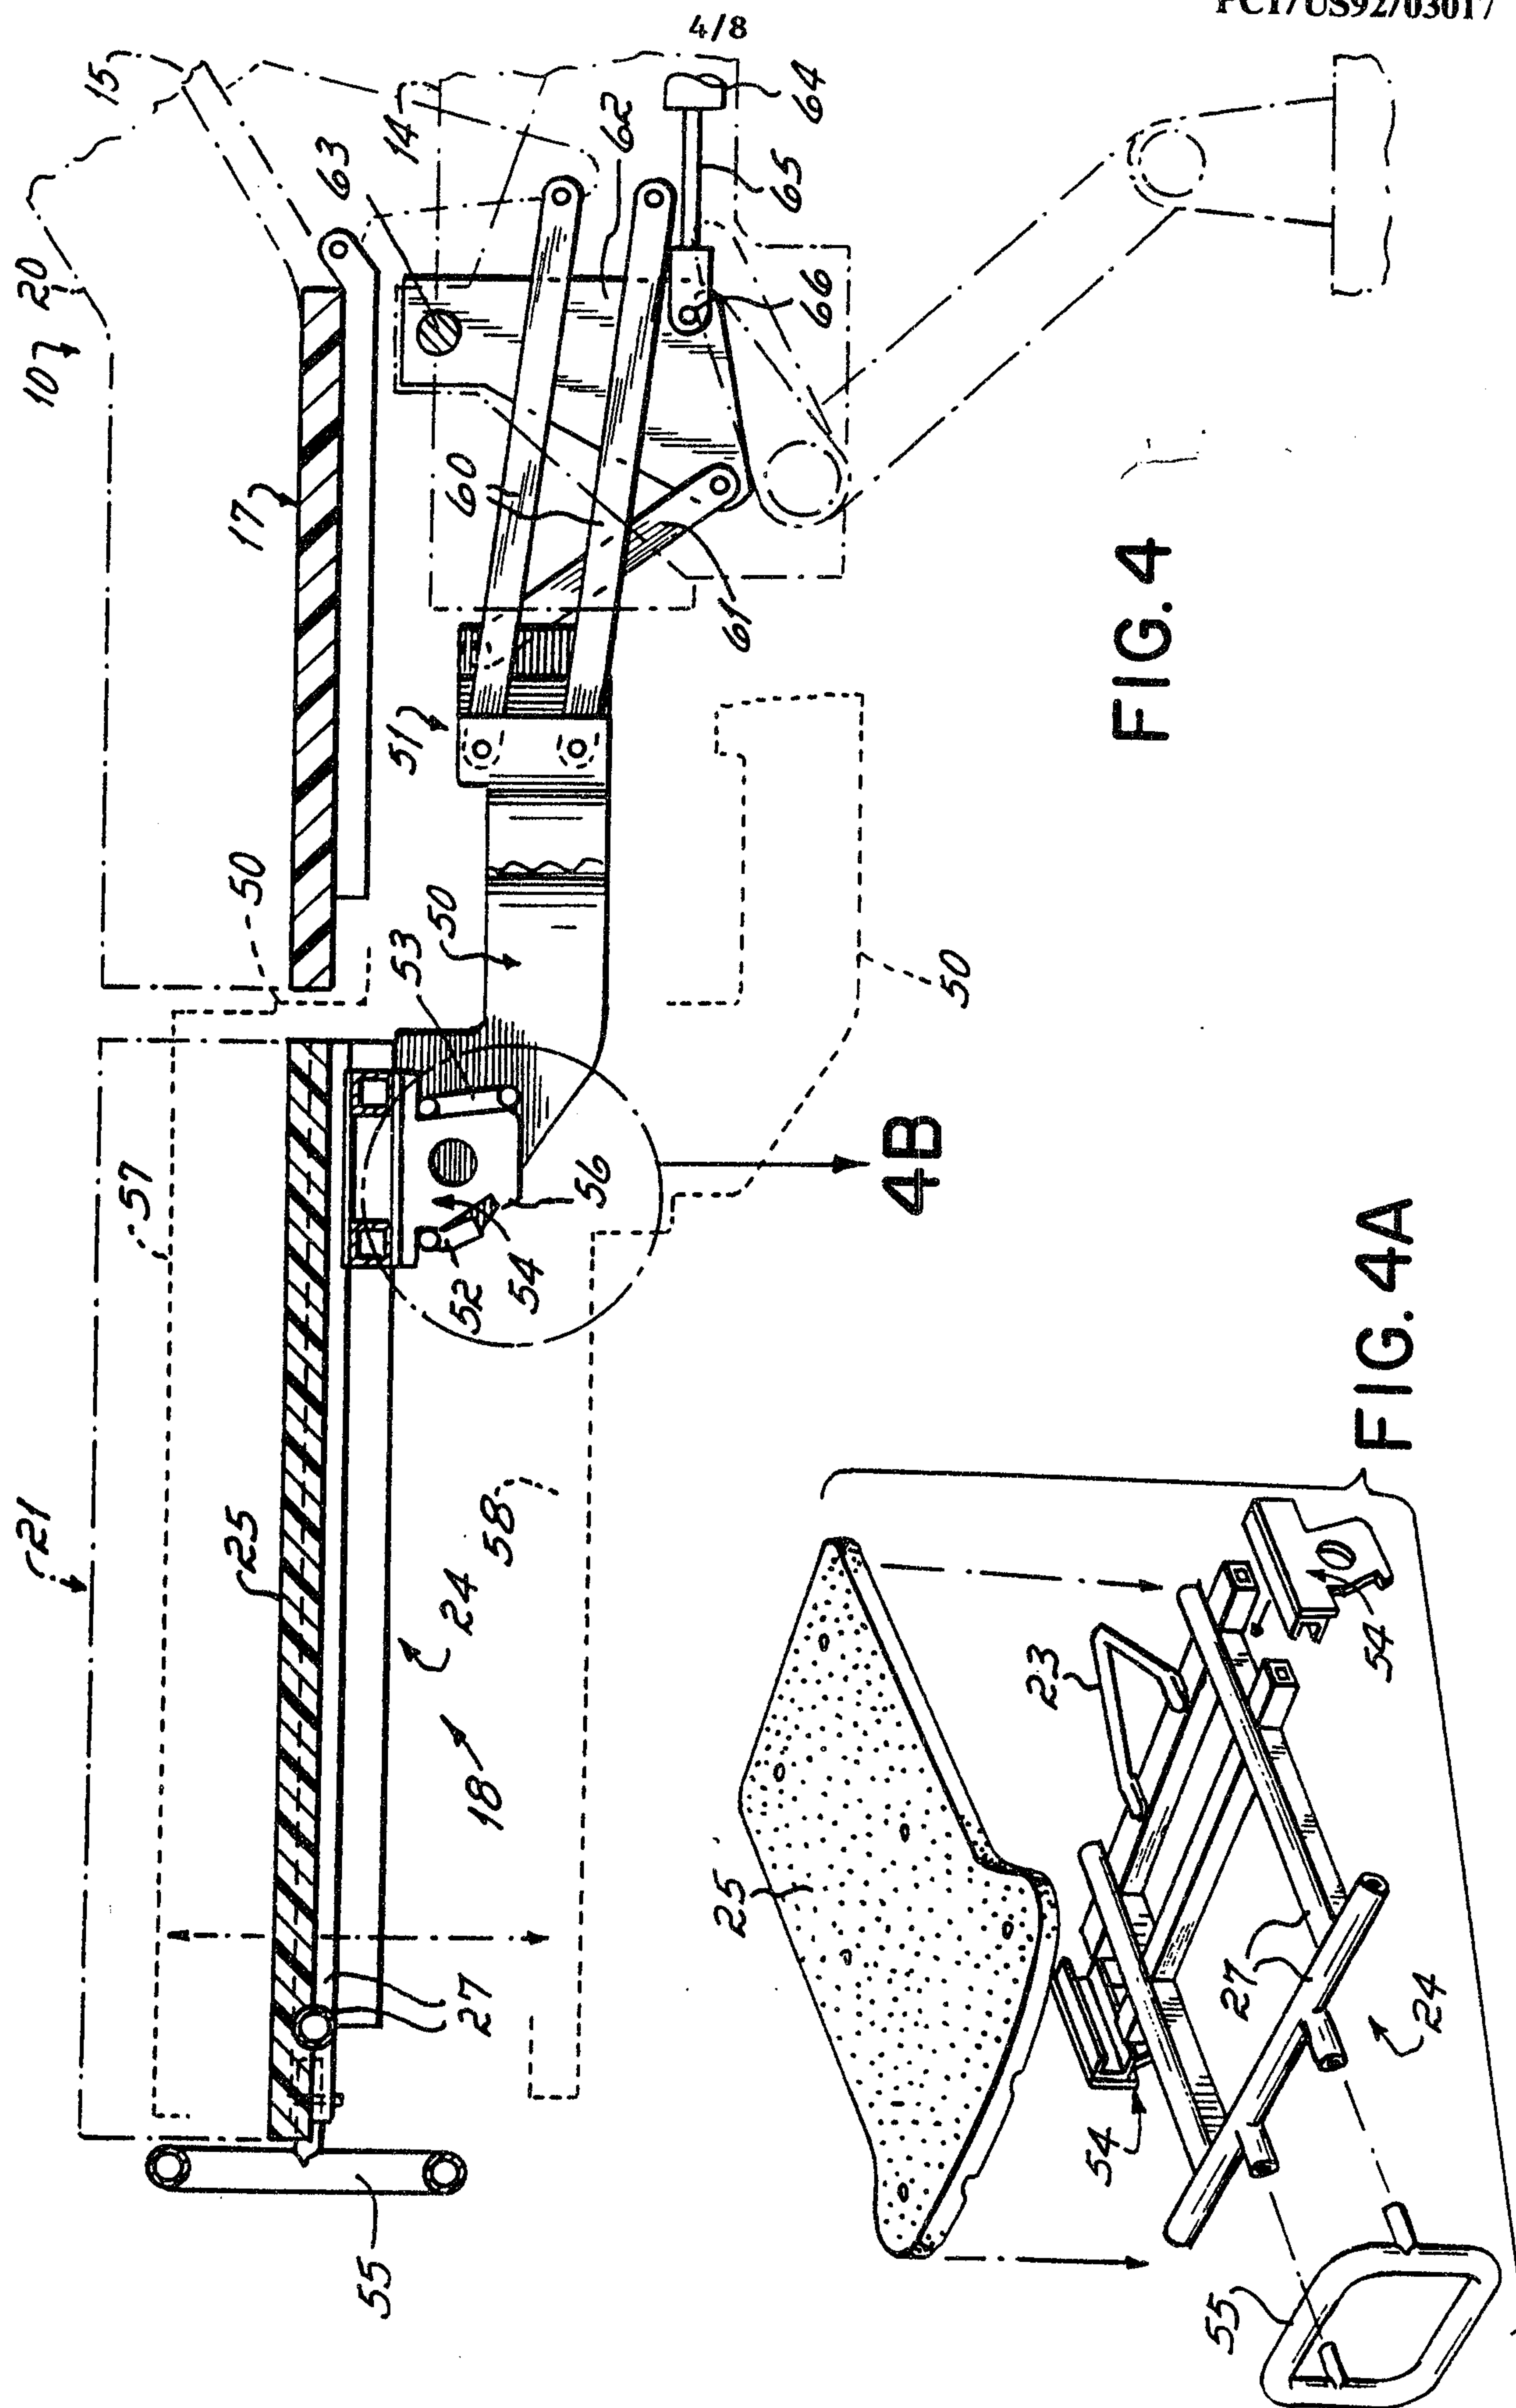


FIG. 2B





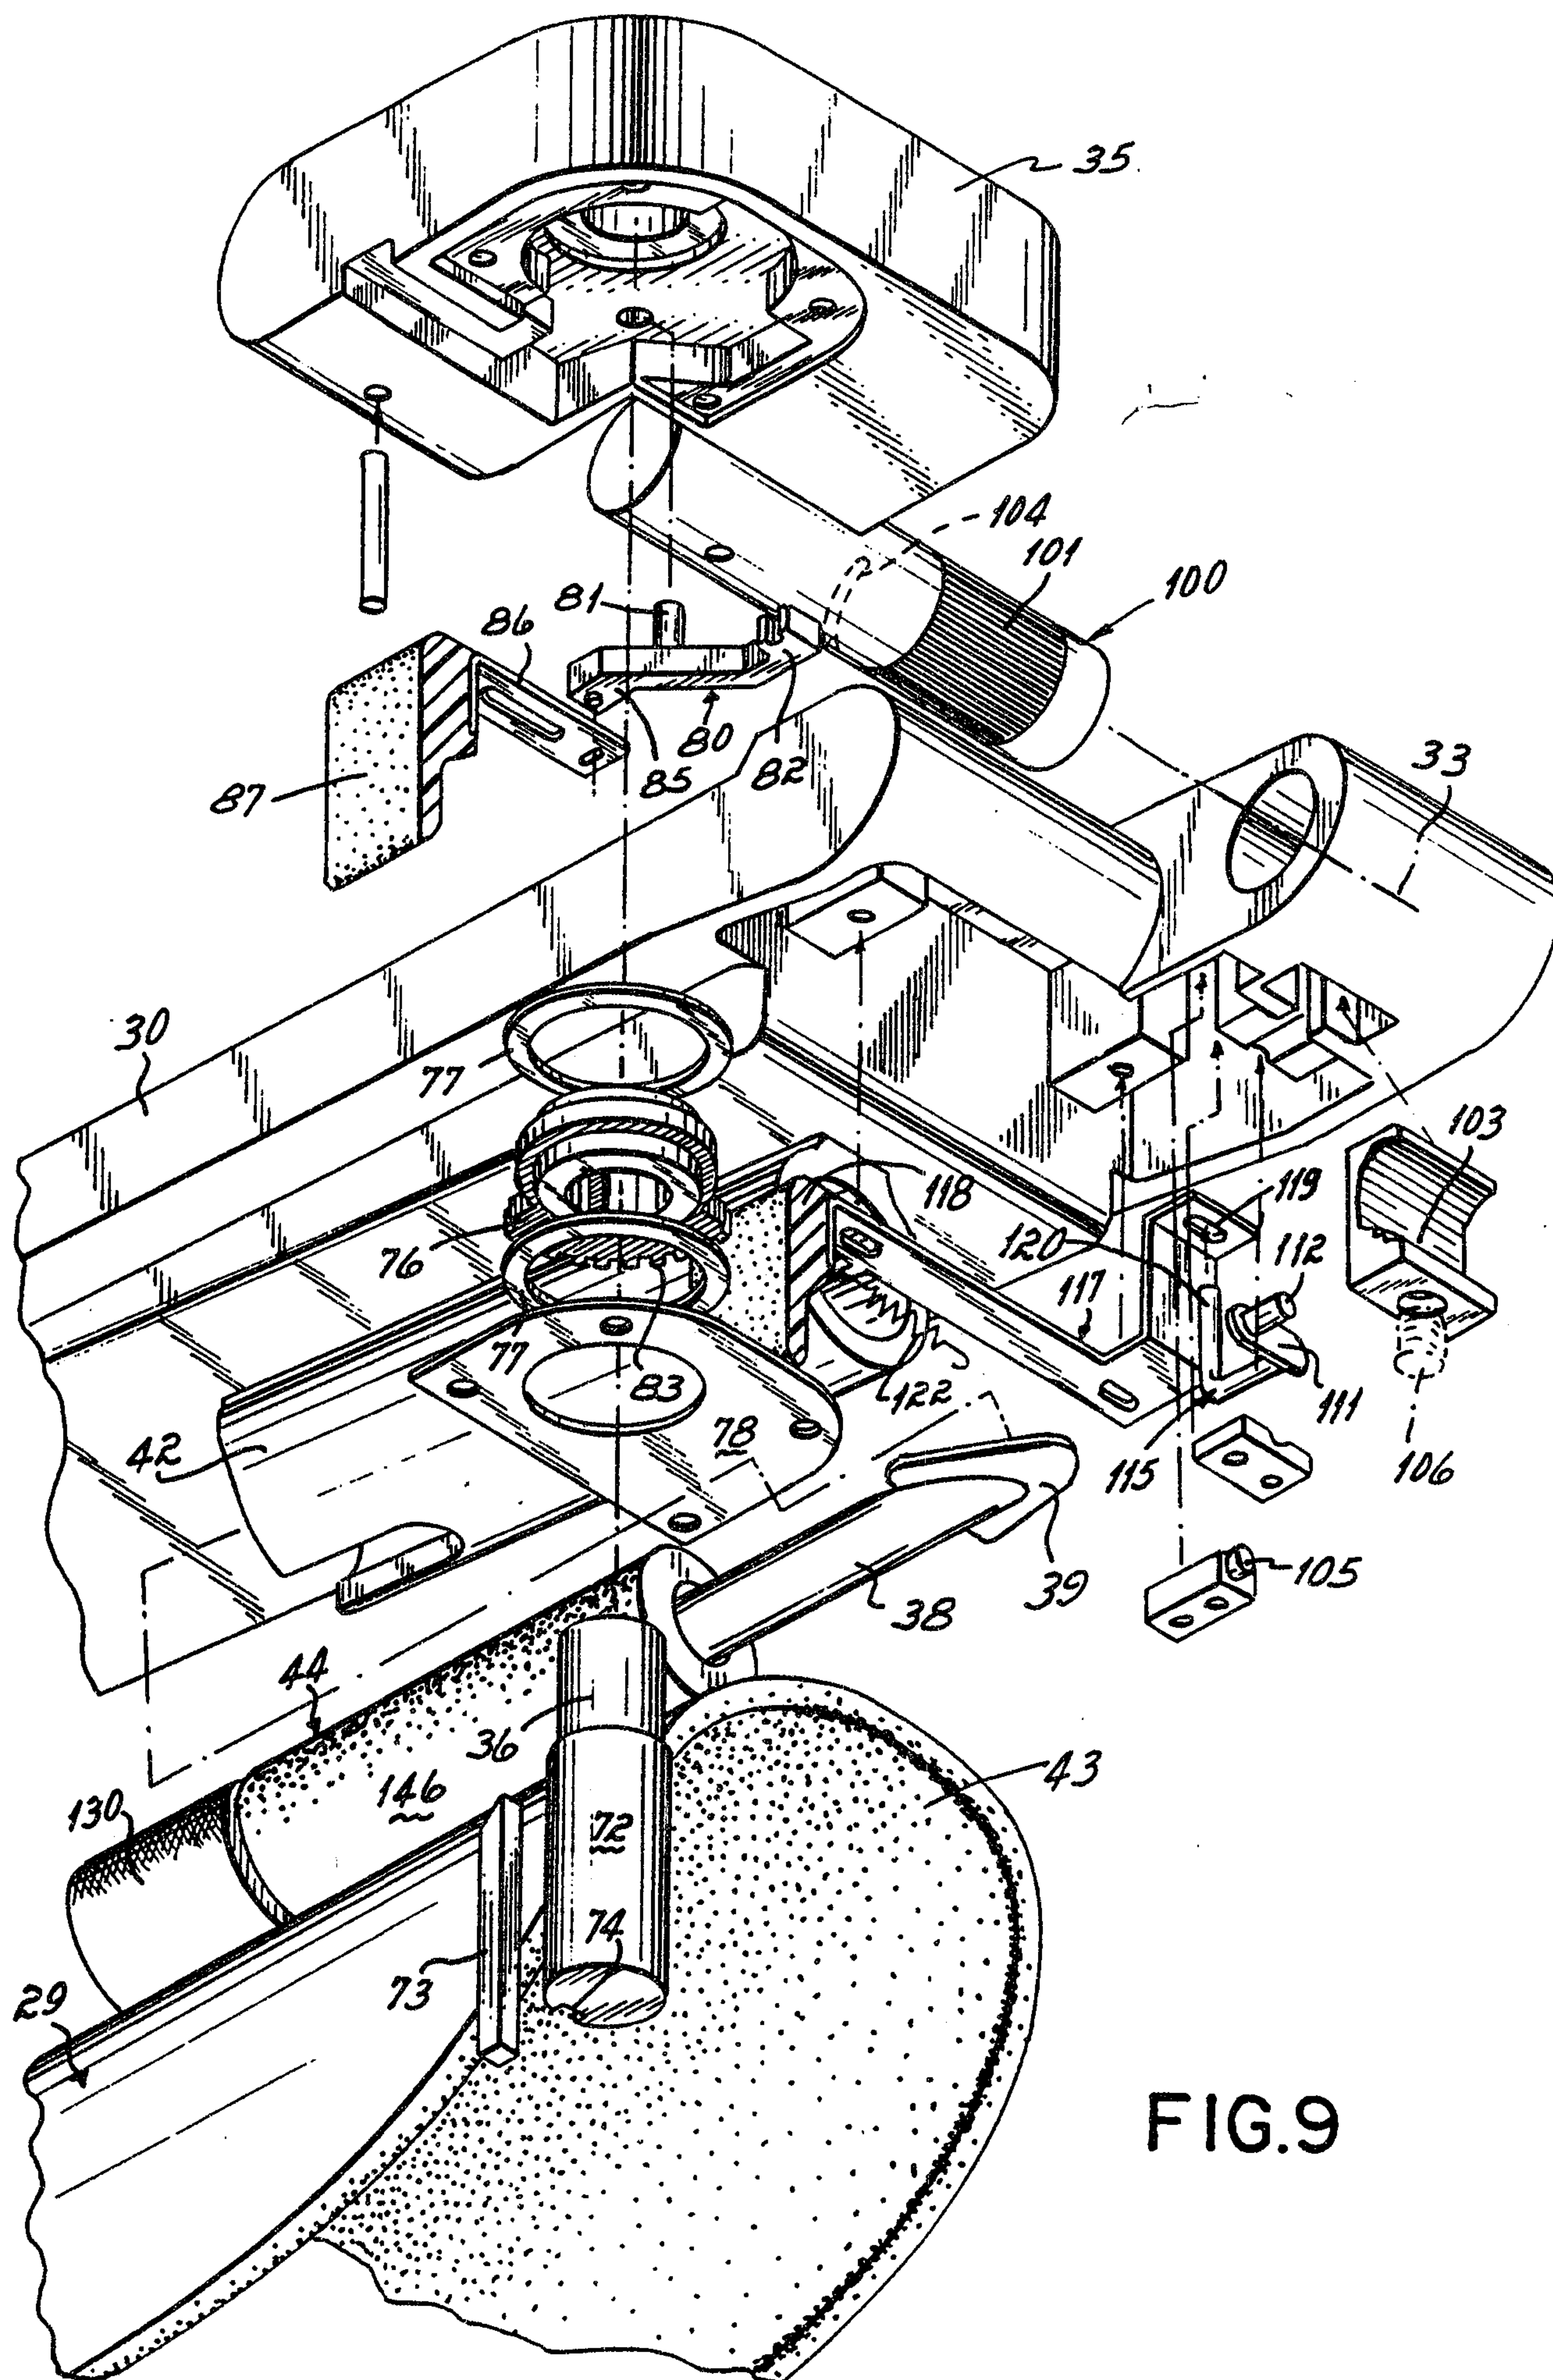


FIG.9

2107212

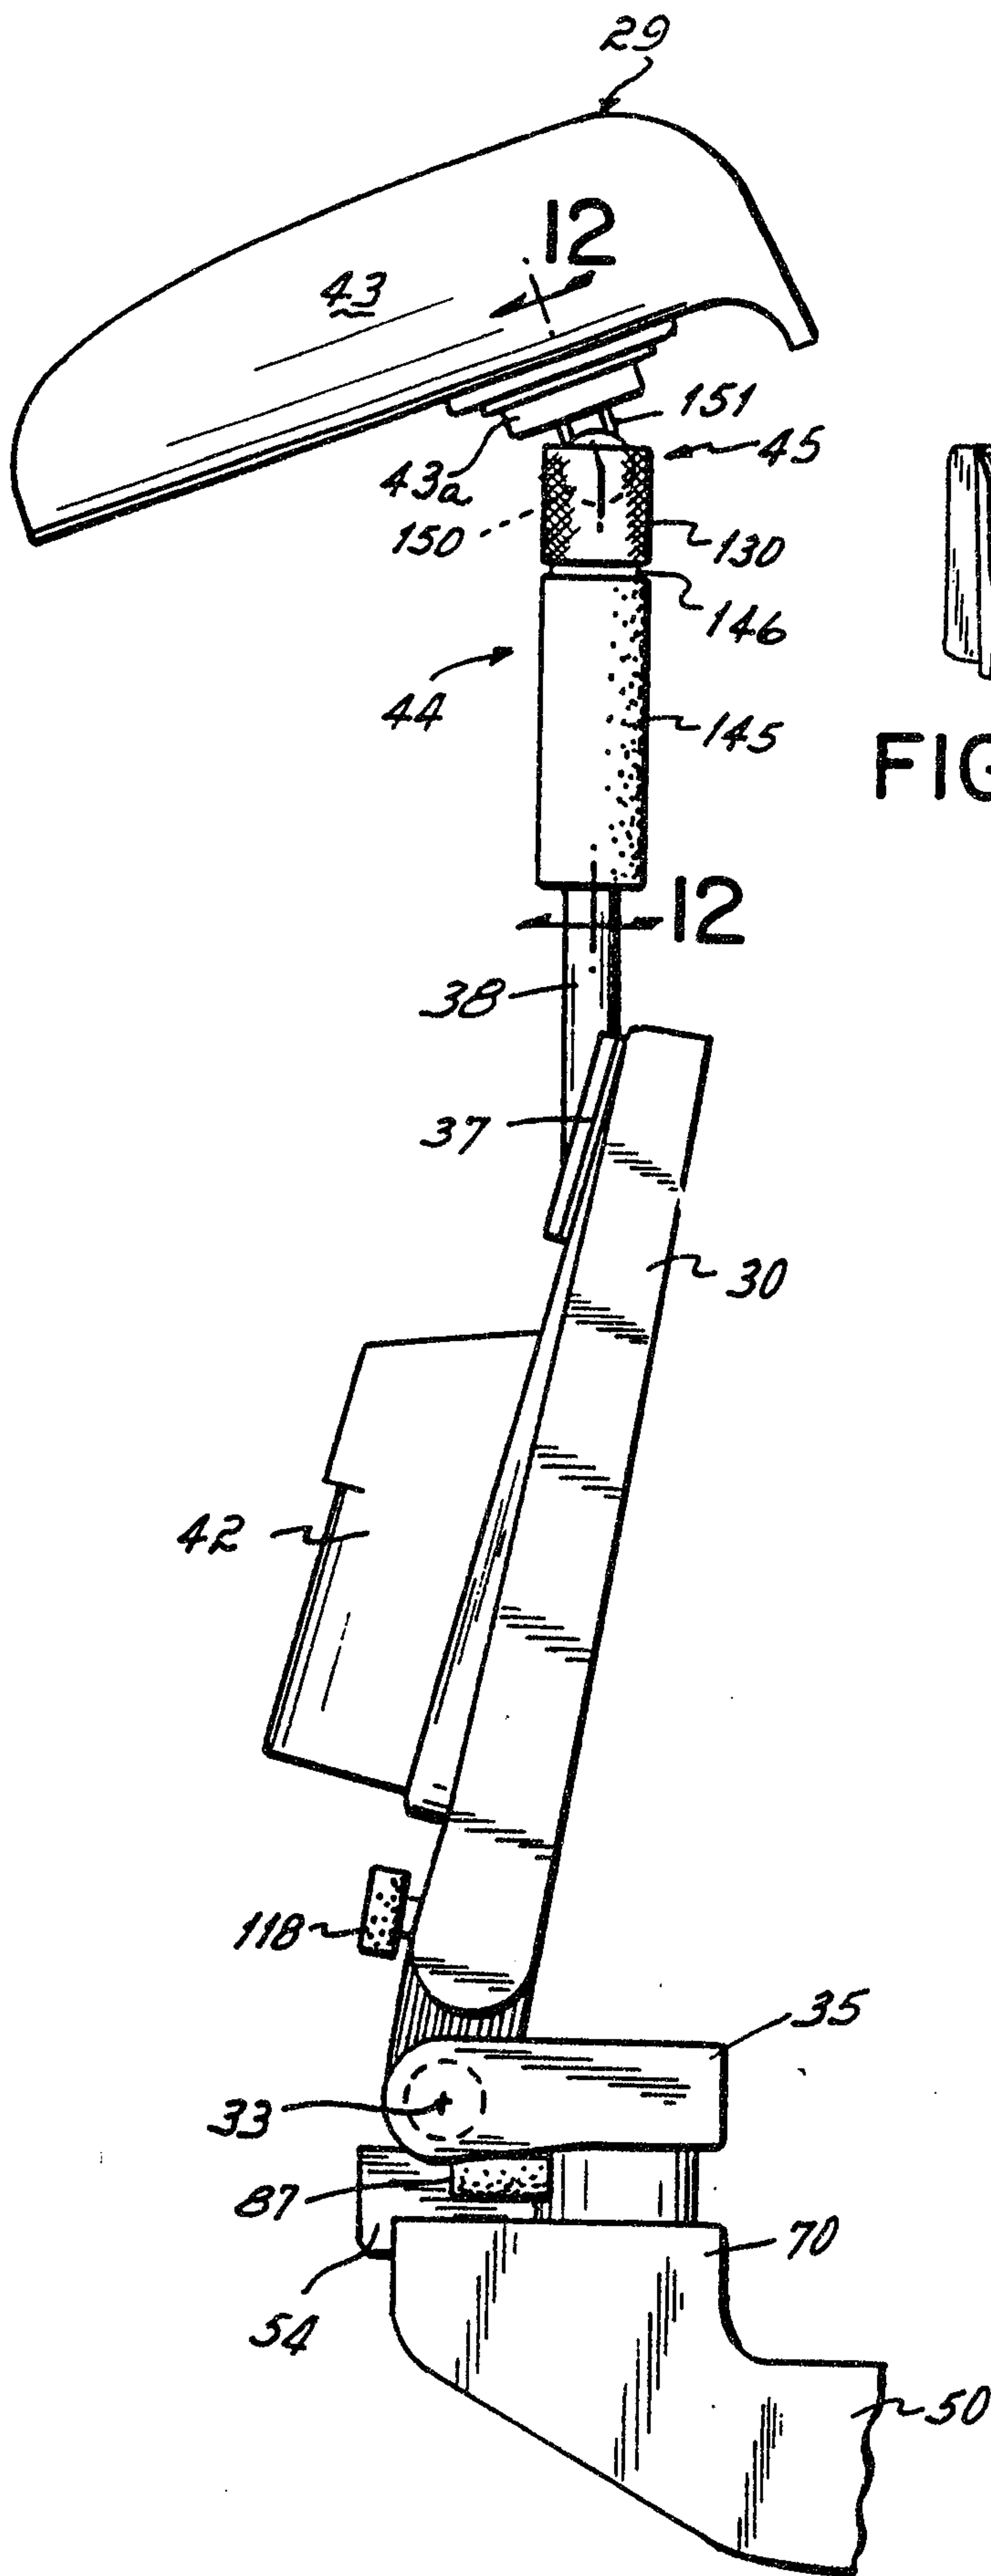


FIG. II

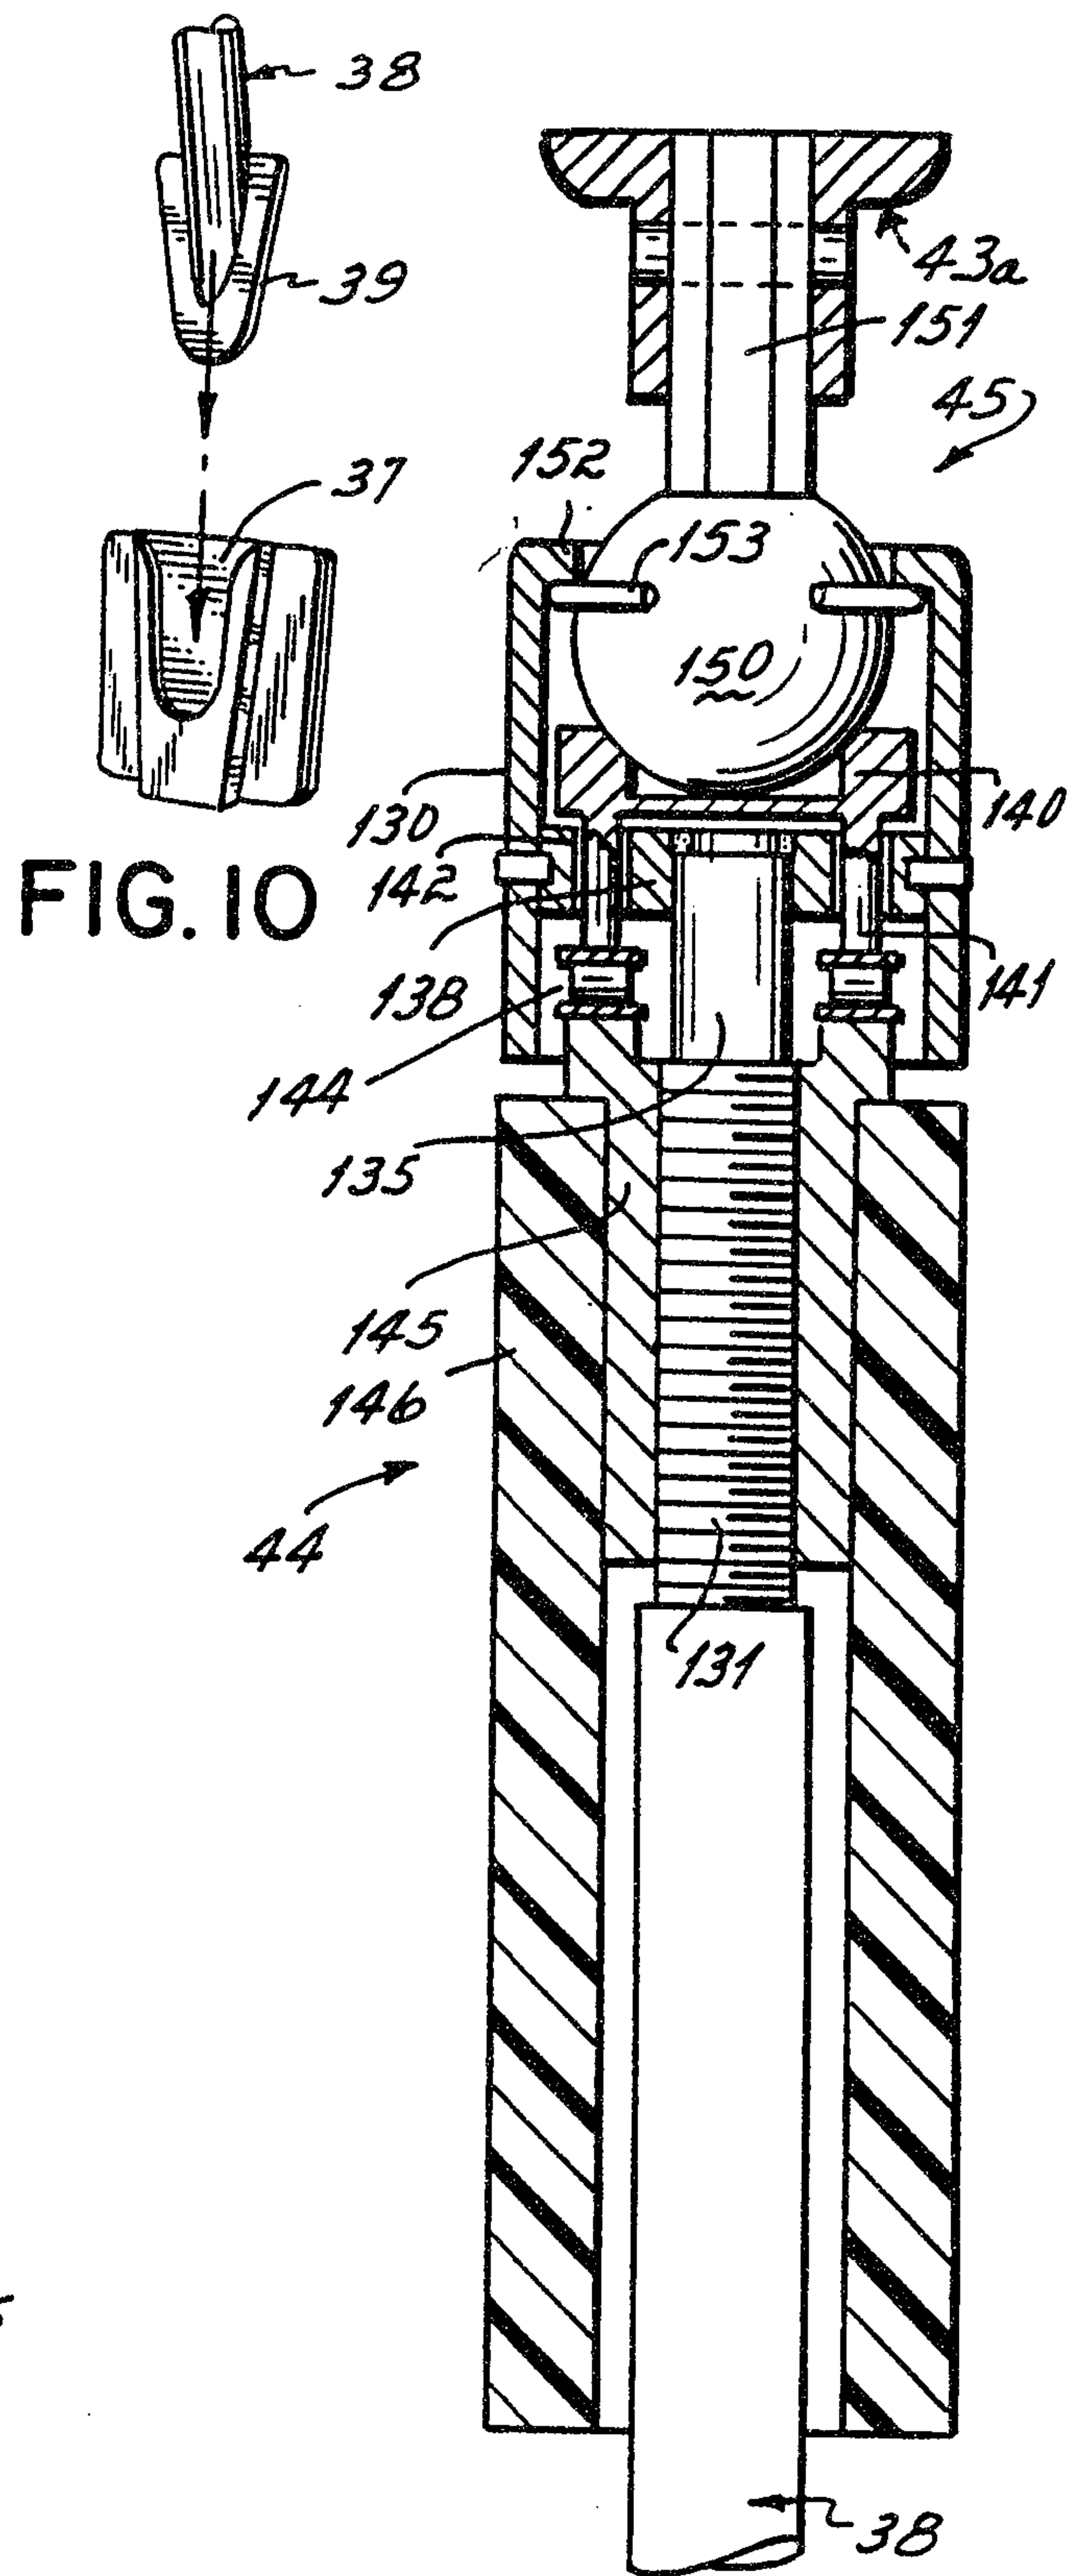


FIG. 10

FIG. 12

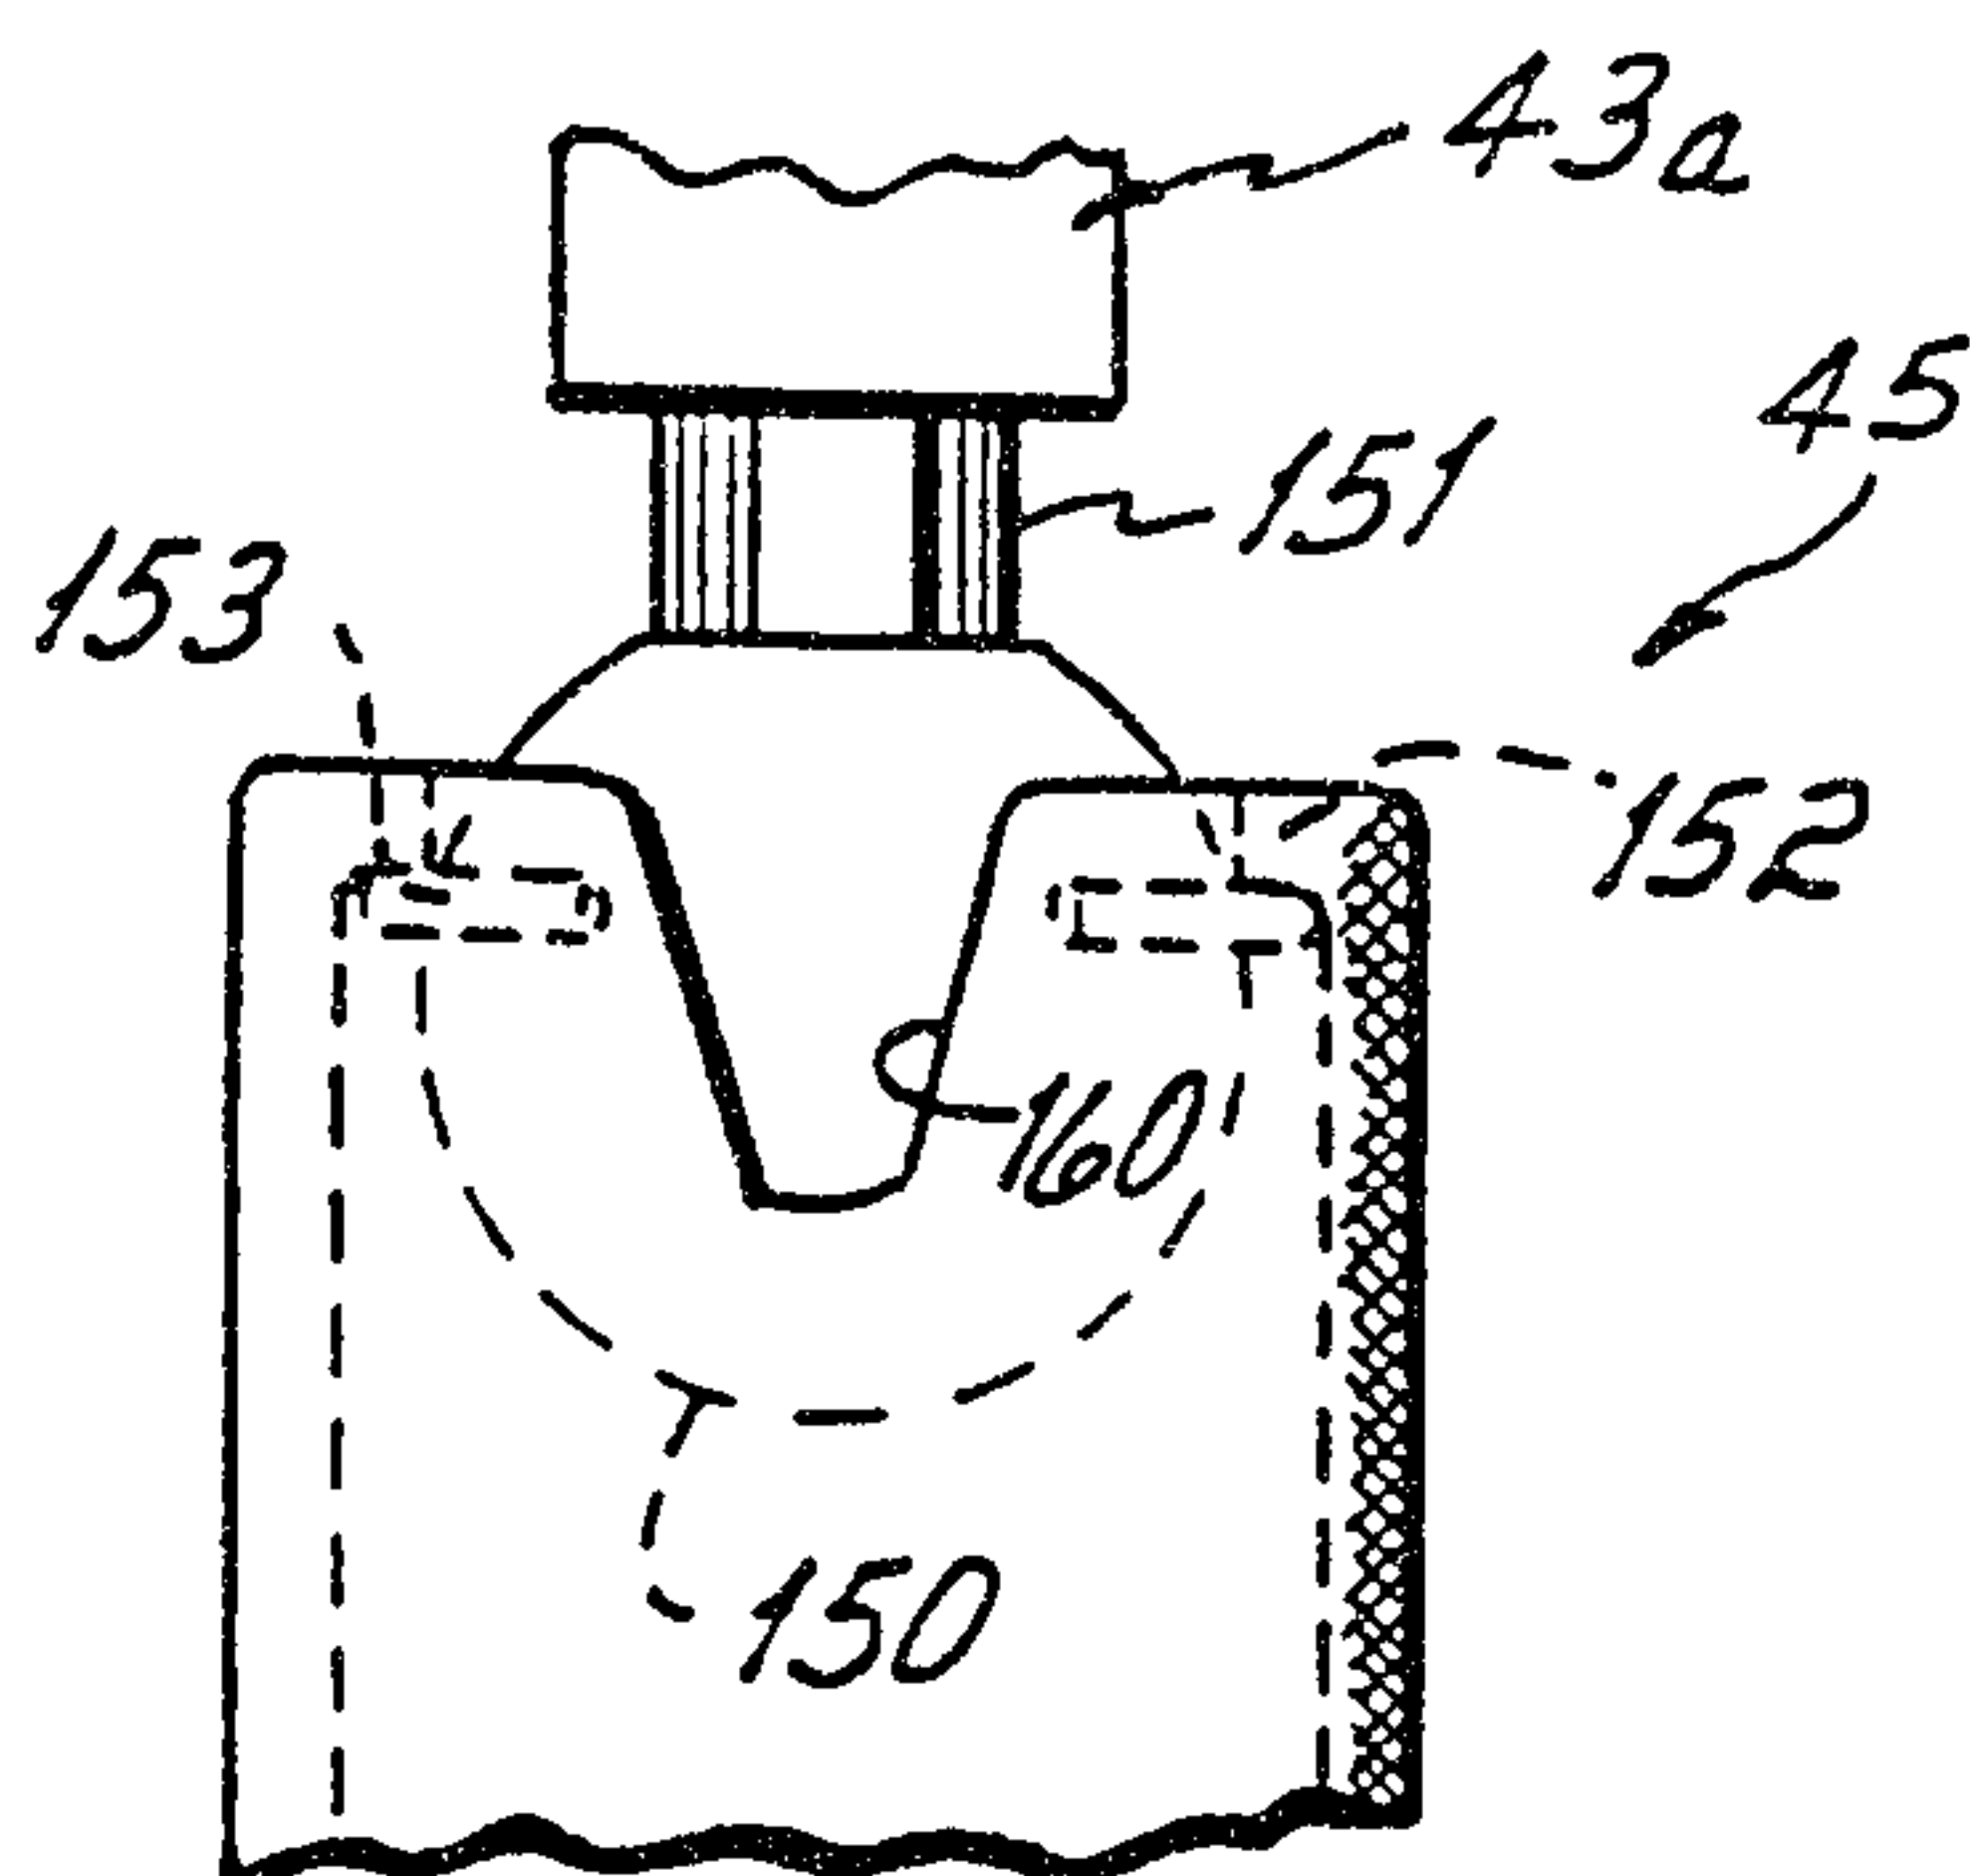


FIG. 13

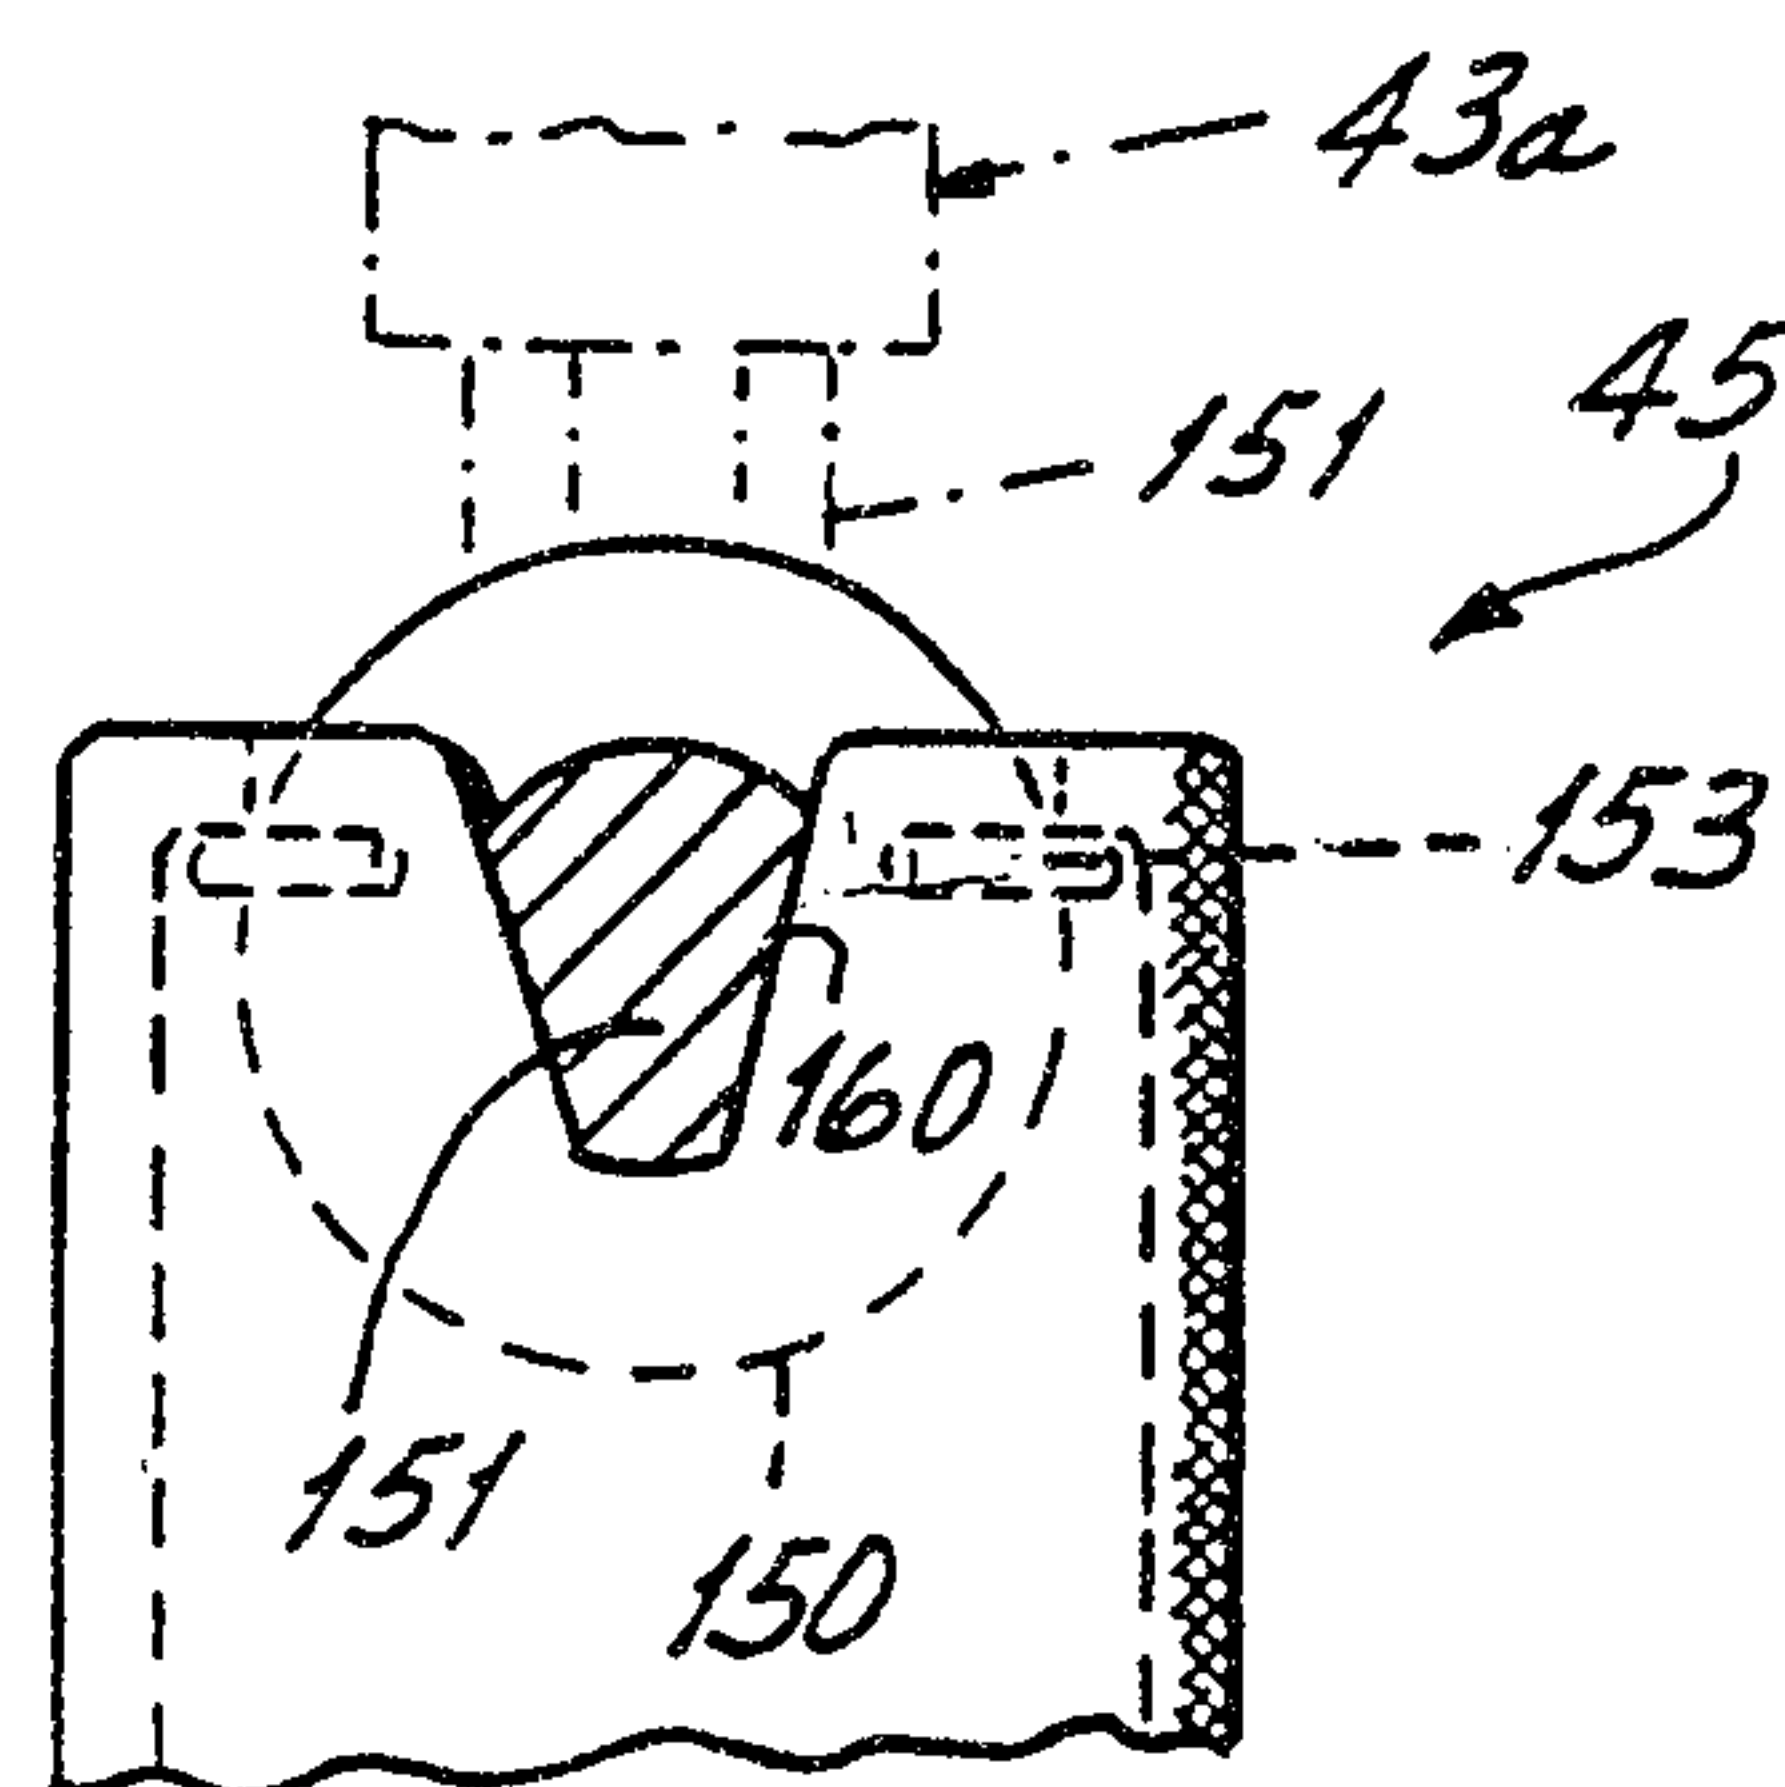


FIG. 14

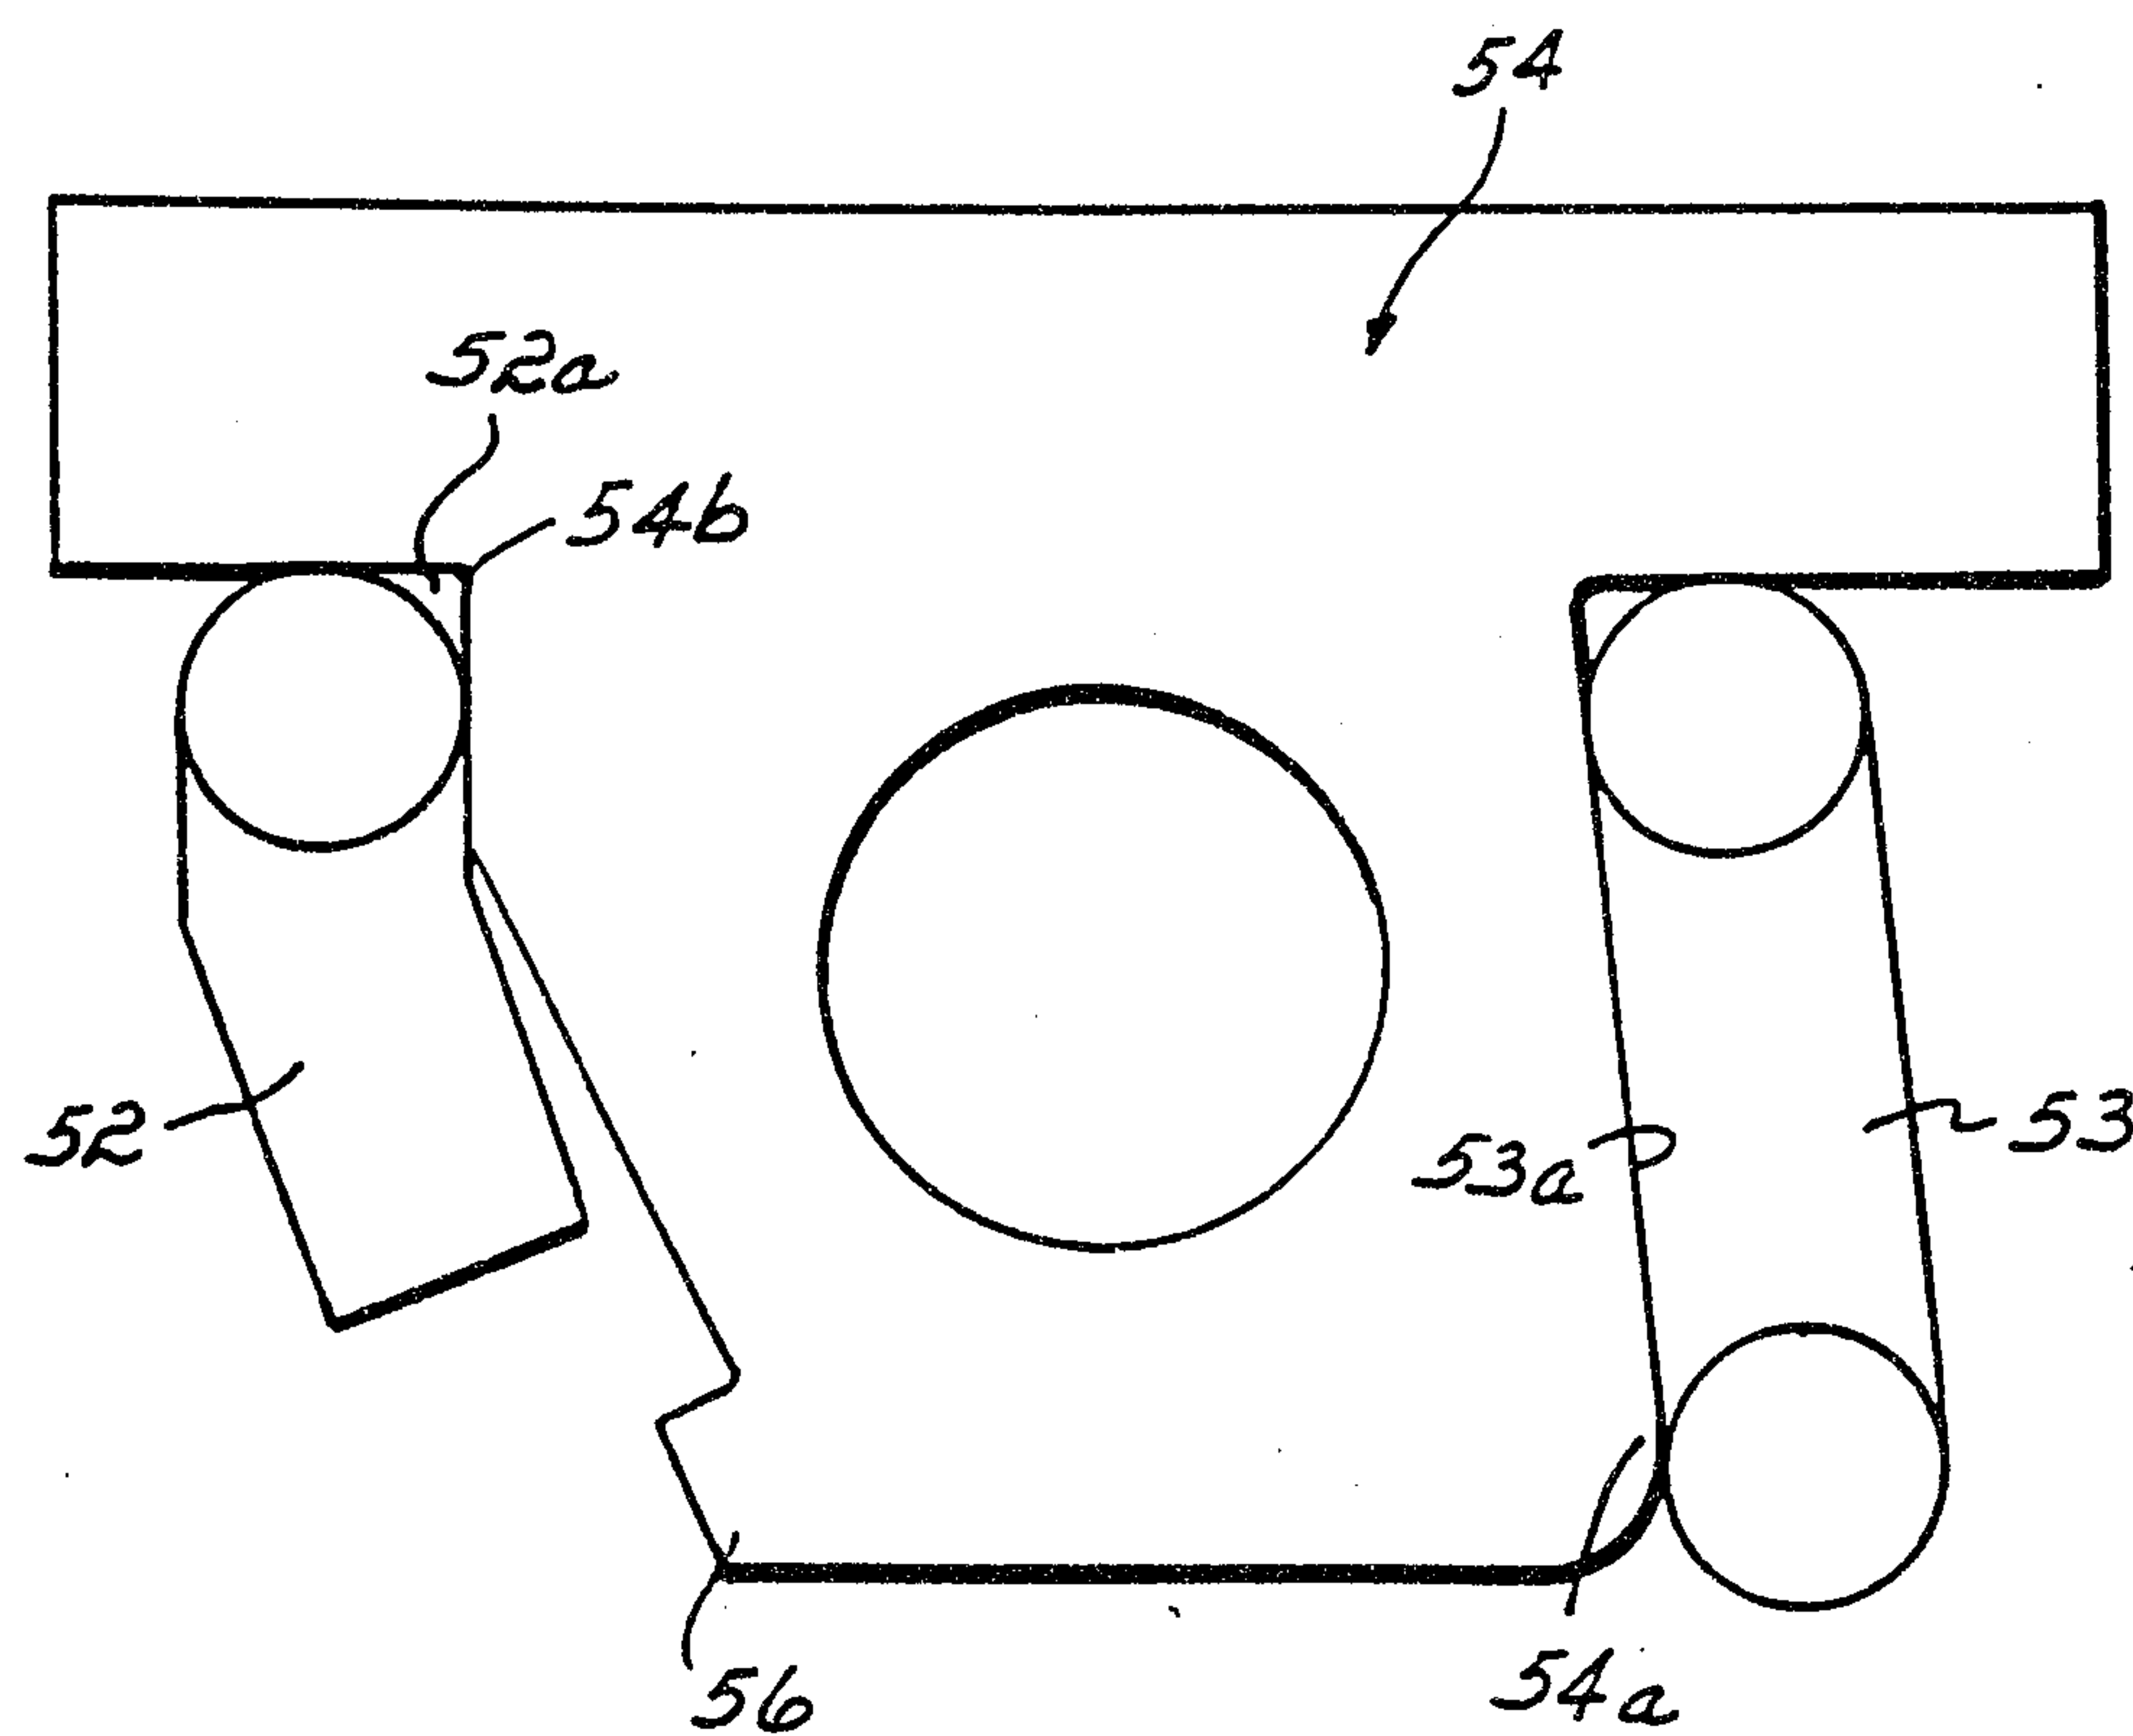


FIG. 4B

