



US 20060152482A1

(19) **United States**

(12) **Patent Application Publication**
Godwin

(10) **Pub. No.: US 2006/0152482 A1**

(43) **Pub. Date: Jul. 13, 2006**

(54) **VIRTUAL INTERFACE AND CONTROL DEVICE**

Publication Classification

(76) Inventor: **Chauncy Godwin**, Altadena, CA (US)

(51) **Int. Cl.**
G09G 5/00 (2006.01)

(52) **U.S. Cl.** **345/156**

Correspondence Address:
LAW OFFICES OF GEORGE L. STEELE
790 E. COLORADO BLVD.
SUITE 900
PASADENA, CA 91101 (US)

(57) **ABSTRACT**


An input device for a computer or other programmable device translates the proximity of an object to one or more antennae into an electronic signal. The antennae generate a first frequency and a second frequency. When an object, such as a hand, is placed in proximity to the antenna, the object causes the first and second frequencies to heterodyne, which creates a third frequency, also referred to as a beat frequency or pulse frequency. A receiver interprets the pulse frequency and translates it into an electronic signal that can be used to command a computer or other programmable device.


(21) Appl. No.: **11/327,785**


(22) Filed: **Jan. 6, 2006**

Related U.S. Application Data

(60) Provisional application No. 60/641,809, filed on Jan. 7, 2005.

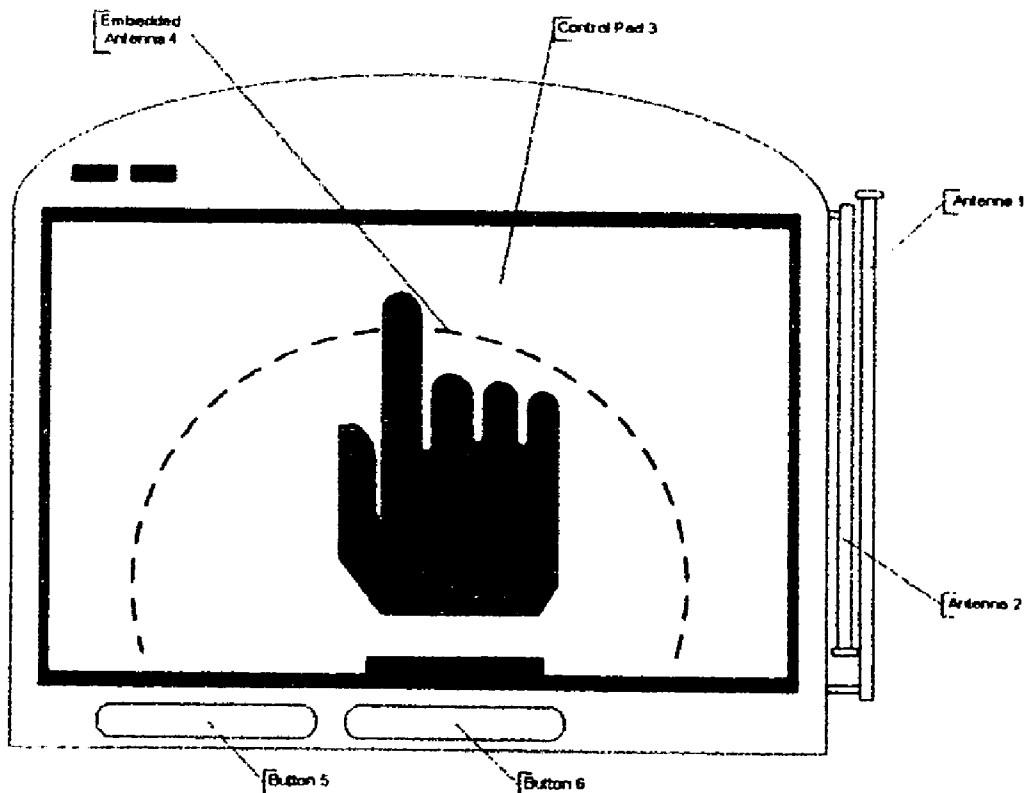

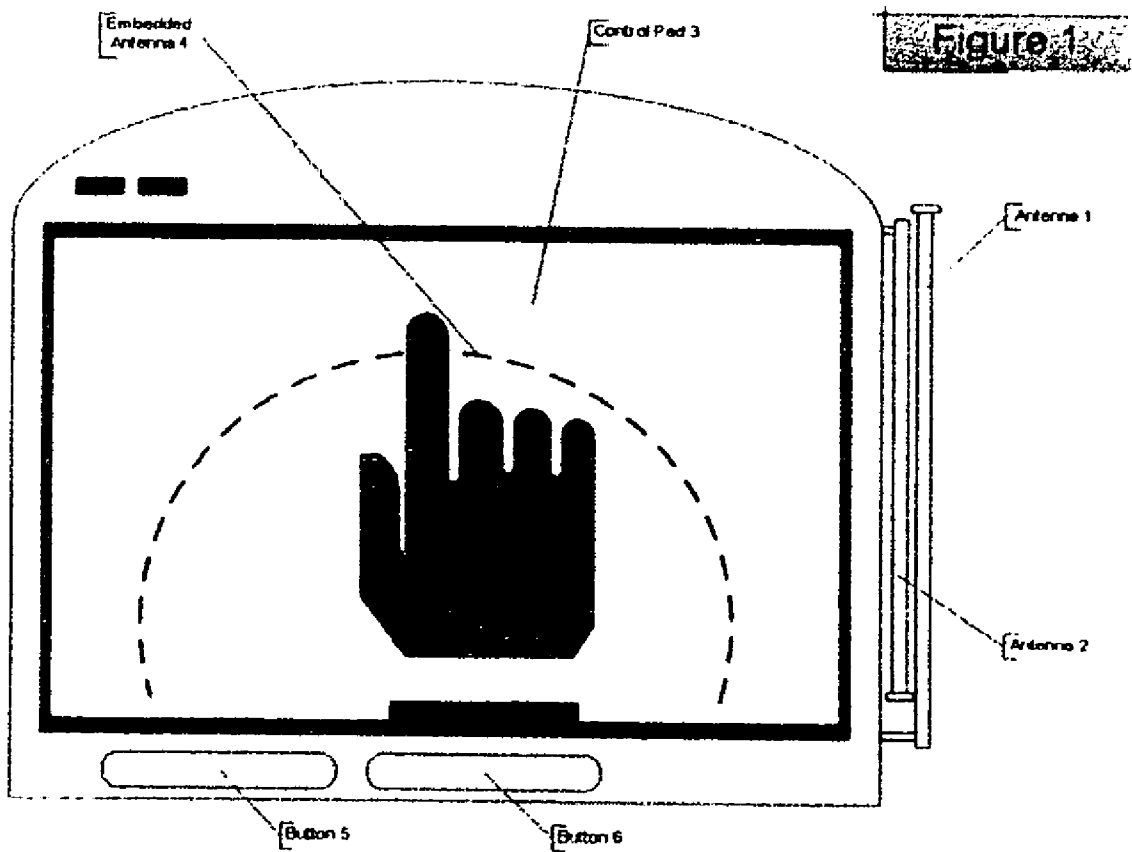

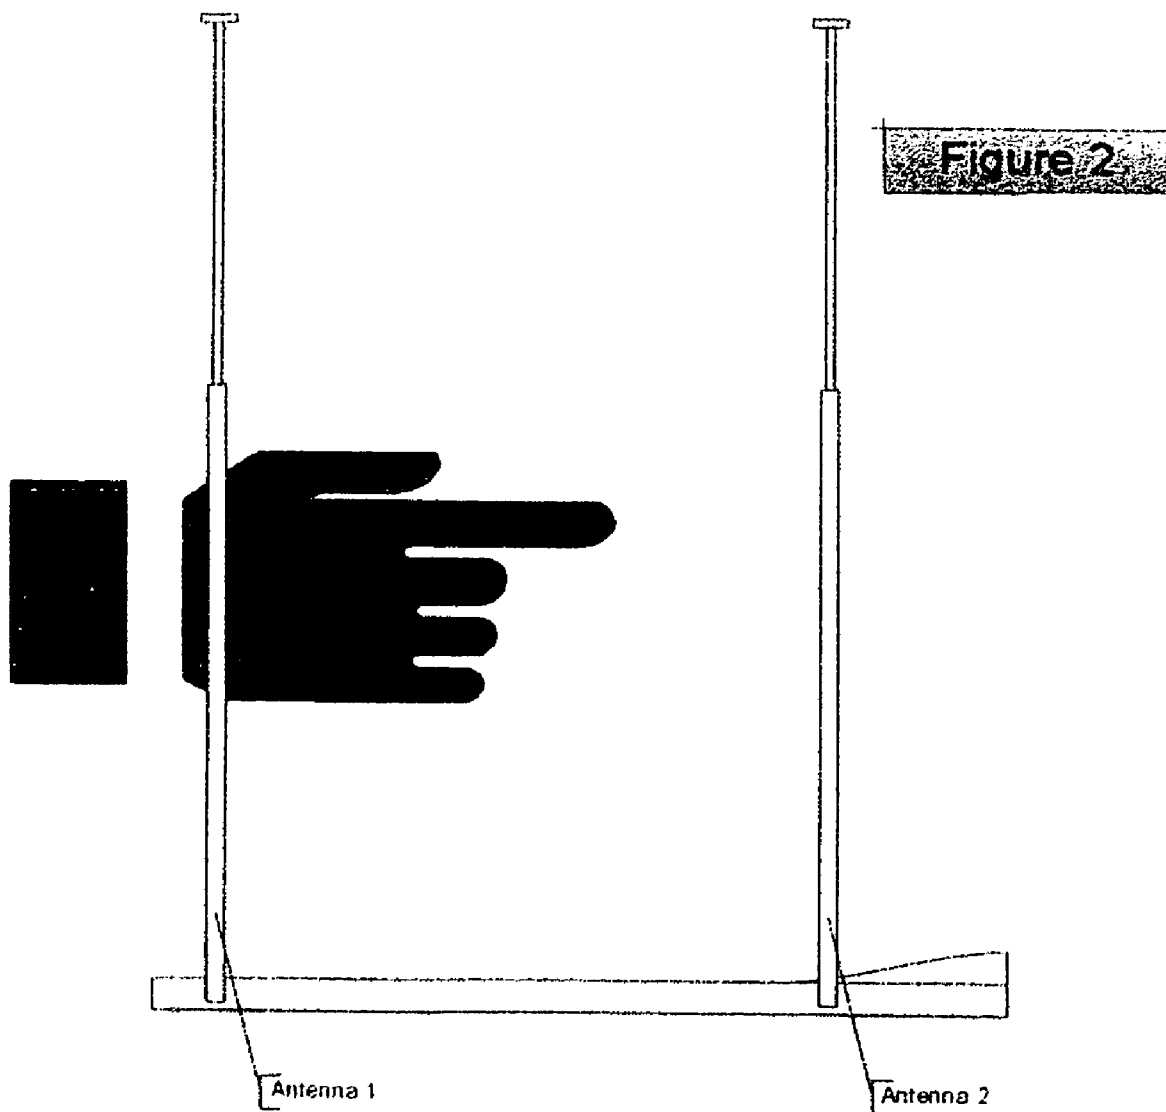

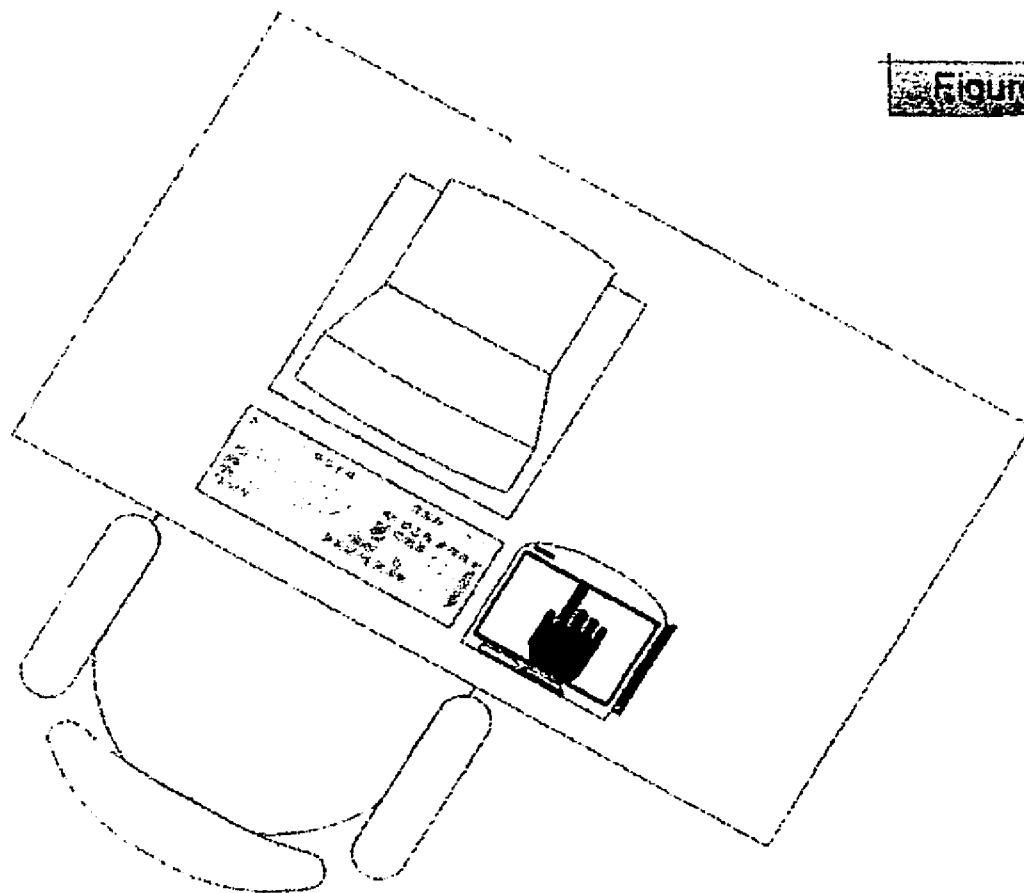


Figure 3

VIRTUAL INTERFACE AND CONTROL DEVICE

CROSS-REFERENCES TO RELATED APPLICATIONS

[0001] This patent application is related to, and claims the benefit of U.S. Provisional Patent Application Ser. No. 60/641, 809 filed Jan. 7, 2005, which application is incorporated herein by this reference thereto.

COPYRIGHT AUTHORIZATION

[0002] A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by any one of the patent disclosure as it appears in the U.S. Patent and Trademark Office patent files or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

[0003] 1. Field of the Invention

[0004] The present invention is related to methods and devices for interfacing with electronic devices that receive commands from an operator, such as computer systems.

[0005] 2. Description of the Related Art

[0006] The following description and discussion of the prior art is undertaken in order to provide background information so that the present invention may be completely understood and appreciated in its proper context.

[0007] Input devices for use with a computer have transformed significantly over the last three decades. Generally speaking, punch cards gave way to terminals with keyboards; keyboards gave way to the mouse. The mouse has evolved from a unit housing a ball interacting with motion detectors, to a number of variants, some of which are as follows:

[0008] U.S. Pat. No. 6,313,825 to Gilbert discloses an input device for a computer that detects movement of an object, such as a finger, within a selected field of space. The input device is used to control movement of a cursor over a display device. The device includes directional transducers that receive reflections of EMF from an object in the field, and provides signals to an "interpreter." The interpreter detects movements by employing a clock which determines the time difference between the reflections received by the transducers, which it then reduces to a signal that controls the cursor.

[0009] U.S. Pat. No. 6,690,357 to Dunton discloses an input device that uses images of input devices, and scanning sensors that detect user interaction with those images. The scanning sensors include digital video cameras that capture the movement of a user's hands and convert the movement into input command signals. The scanning sensors may alternatively sense the projected light reflected from the user's hands, or may detect the combination of the reflected projected light and the user's hands.

[0010] U.S. Pat. No. 6,614,422 to Rafii, et al., discloses an input device that employs a three-dimensional sensor imaging to capture three-dimensional data as to the placement of a user's fingers on a substrate that either bears or displays a

template similar to a keyboard or a keypad. The three-dimensional sensor transmits optically acquired data to a companion computer system that computes the velocity and location of the user's fingers, and converts that information into a command.

[0011] U.S. Pat. No. 6,498,628 to Iwamura discloses an electronic appliance remote controller that employs a camera as a motion-sensing interface. The camera captures video images of a user's hand, evaluates the moving speed and direction of the hand, and correspondingly moves a cursor appearing on a screen.

[0012] In U.S. Patent Application Publication 2003/0048312, Zimmerman discloses an apparatus for generating control signals for the manipulation of virtual objects in a computer system. The apparatus includes a glove worn on a hand that includes sensors for detecting the gestures of the hand, and hand position. The computer system receives data from the sensors, and generates corresponding control signals in response.

[0013] U.S. Patent Application Publication 2002/0075240, Lieberman, et al., describes a device for inputting alphanumeric information into a computer that employs sensors that may be optical, acoustic or position sensors to sense the "pressing" or "striking" of virtual keys. The sensor then forwards data to a processor, which converts the "pressing" or "striking" data with characters, instructions information or data.

[0014] U.S. Patent Application Publication 2002/0006807, Mantyjärvi, et al., teaches a device for entering data that creates a virtual keyboard by using an infrared transceiver arrangement. The infrared transceivers record reflection data obtained from an object placed within a field of infrared light, and processes the data to correspond to a key position or function.

SUMMARY OF THE INVENTION

[0015] The invention comprises an input device for a computer or other programmable circuit that translates the proximity of an object to one or more antennae into an electronic signal. The antenna generates a reference first frequency and a second frequency.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 is a perspective view of a preferred embodiment of the invention.

[0017] FIG. 2 is a side view of a preferred embodiment of the invention.

[0018] FIG. 3 is a perspective view of a preferred embodiment of the invention as used with a personal computer.

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

[0019] In the following detailed description of the preferred embodiments, reference is made to the accompanying drawings, and in which are shown by way of illustration specific embodiments in which the invention may be practiced. It is to be understood that other embodiments may be utilized and structural changes may be made without departing from the scope of the present invention.

[0020] FIG. 1 shows a perspective view of preferred embodiment of the invention that may be used to operate a programmable device, such as a computer. A first antenna 1, and second antenna are 2 rotatably and pivotally attached to control pad 3. Control pad 3 may include a third antenna 4, which may be embedded in, or externally attached to control panel 3. Control pad 3 may also include buttons 5 and 6, which can correspond to the left and right buttons found on a conventional mouse.

[0021] Antennas 1 and 2 may be constructed from conventional materials known to those of ordinary skill in the art. Antennas 1 and 2 may be rotatably and pivotally attached to control pad 3 by a combination of actuators that position the antennae in optimal relationships based upon feedback from the system driver.

[0022] Control pad 3 may resemble a conventional mouse pad known to those in the art. Control pad 3 may be constructed from any non-conductive material that is electromagnetically invisible to signals emitted or received by the antennae. Antenna 4 may be formed from conventional materials, and can be embedded within control pad 3, or may be attached externally in a manner similar to antennae 1 and 2.

[0023] FIG. 2 depicts a side view where antennae 1 and 2 are in vertical positions relative to control pad 3, which is merely an example of how the antennae may be positioned. In practice, antennae 1 and 2 may be positioned in any positions relative to each other and control pad 3 to achieve optimal transmission and reception.

[0024] FIG. 3 presents a perspective view of the invention as applied to a conventional computer 7. While FIG. 3 depicts the invention being used with a personal computer ("PC"), it is important to note that the invention can be used with any size or type of computer or device that depends on input from a human operator. Examples include, but are not limited to, notebook computers, laptop computers, workstations, video game consoles, cash registers, automatic tellers, vehicle electronics or surgical/medical devices.

[0025] This invention may be used with one or more antennae. In operation, the antenna or antennae 1, 2 and 3 act as both emitters and receivers of electromagnetic fields. Generally, the antennae are operated in an electromagnetic spectrum range of 3 Hz to 1.24 eV. The antenna or antennae are arrayed in various arrangements depending upon the particular application, and the current frequency range being used. Each of the antennae initially emits a reference frequency. When an object, such as a hand, is placed in the field created by the antenna or antennae over control pad 3, the object creates a disturbance to the field. This disturbance is registered as a change in value. The value change is translated into a coordinate by a device driver or other software conventionally installed in the device to be controlled. As the object moves within the field, the change in coordinates may be expressed as a command to the device to be controlled, for example, the movement of a cursor on a computer screen. If desired, the invention can register more than one disturbance to the field at a given time, giving the ability to convey more complex commands to a device to be controlled than can be achieved through conventional means.

[0026] In an alternative embodiment, two or more interfaces will be linked with an imaging device that projects

three-dimensional images. An example of such a three-dimensional imaging device is a holographic projector. The field emitted by the interfaces can overlay the projection. Through device drivers or other software programmed into a programmable circuit, attempts to interact with the images in the three-dimensional projection will be captured by the interface and will enable the user to move the virtual objects.

[0027] The invention will provide software specifically designed to relate two- and three-dimensional motion in two- and three-dimensional images as represented by a programmable circuit. This software can also interpret disturbances to the field for programmable circuits designed to control the motion of mechanical devices. The software may have a specific user interface that is modifiable for the user.

[0028] The invention may be linked electronically (wirelessly) or mechanically to the device to be controlled or object device, and can be powered by battery, a separate AC connection, by the object device, or any other conventional means known to those in the art. Two or more of these inventions may be connected to the device to be controlled so that a single user may use both hands simultaneously, or that multiple users can control the device. If used in conjunction with a computer as depicted in FIG. 3, buttons 5 and 6 may be used as on a conventional mouse, or alternatively, the optional third antenna 4 can be employed to interpret movement in three dimensions so that the invention can replicate the conventional functions of buttons 5 and 6 electronically, in a manner familiar to users of conventional mouse devices.

[0029] Although specific embodiments have been illustrated and described herein, it is appreciated by those of ordinary skill in the art that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiments shown. This application is intended to cover any adaptations or variations of the present invention. Therefore, it is intended that the invention be limited only by the claims and their equivalents.

What is claimed is:

- 1. An input device, comprising:

at least one antennae for generating a first frequency and a second frequency; and at least one receiver, for sensing a pulse frequency created by an object placed in proximity to said receiver, interpreting said pulse frequency, and translating said pulse frequency into an electronic signal that can be used to command a programmable device.

- 2. The input device of claim 1, wherein the first frequency and second frequency are emitted over a holographic projection.

- 3. The input device of claim 2, wherein the at least one antennae is physically connected to a programmable device.

- 4. The input device of claim 2 wherein the at least one antennae is wirelessly connected to a programmable device.

- 5. The input device of claim 1 wherein the at least one antennae generates a third frequency.

- 6. The input device of claim 5 wherein the at least one antennae is physically connected to a programmable device.

- 7. The input device of claim 5 wherein the at least one antennae is electronically connected to a programmable device.