



- (51) International Patent Classification:
A61B 17/04 (2006.01)
- (21) International Application Number:
PCT/US2012/064053
- (22) International Filing Date:
8 November 2012 (08.11.2012)
- (25) Filing Language:
English
- (26) Publication Language:
English
- (30) Priority Data:
61/557,482 9 November 2011 (09.11.2011) US
- (71) Applicant: **EASYLAP LTD.** [IL/IL]; 30 Ha'Ella Street,
POB 128, 73150 Kfar Truman (IL).
- (72) Inventors: **ALTMAN, Nir**; Kibbutz, 90912 Kfar Etzion
(IL). **FABIAN, Izhak**; 30 Ha'Ella Street, POB 128, 73150
Kfar Truman (IL).
- (74) Agent: **KLEIN, David**; 18 Menuha VeNahala Street,
76209 Rehovot (IL).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,

[Continued on next page]

(54) Title: SUTURING ASSEMBLY WITH SPACER

(57) Abstract: A suturing assembly including a first puncture element including a sharp distal end for puncturing tissue, a second puncture element including a sharp distal end for puncturing tissue, the distal ends of the first and second puncture elements being spaced from each other by a gap, and a spacer arranged for sliding distally and proximally on at least one of the first and second puncture elements.

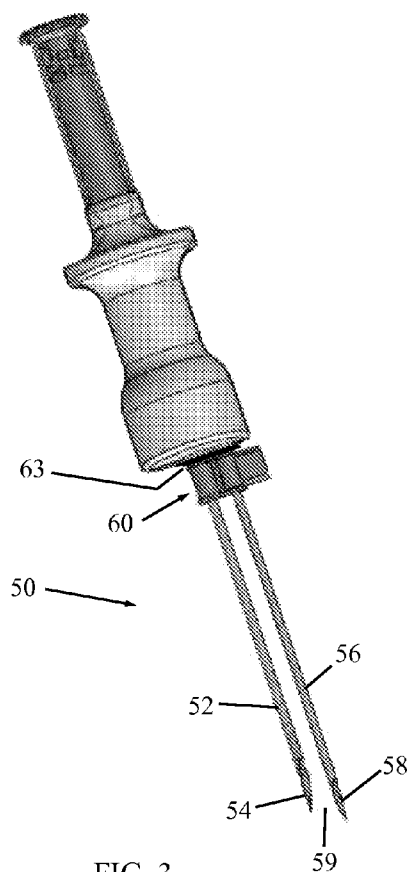


FIG. 3



ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

SUTURING ASSEMBLY WITH SPACER

FIELD OF THE INVENTION

The present invention relates generally to suturing devices and methods, such as for the percutaneous closure of body lumens and tissues by means of sutures.

BACKGROUND OF THE INVENTION

Many suturing devices are known in the art that puncture the skin with needles and percutaneously deliver sutures to the site. For example, PCT Patent Application WO 2009/069119 discloses a suturing assembly 10, which is briefly described here with reference to Figs. 1 and 2.

Suturing assembly 10 includes a first puncture element 12 including a sharp distal end 14 for puncturing tissue, and a second puncture element 16 including a sharp distal end 18 for puncturing tissue. The distal ends 14 and 18 of first and second puncture elements 12 and 16 are spaced from each other by a gap 20. Preferably, but not necessarily, first and second puncture elements 12 and 16 are parallel to each other.

First and second puncture elements 12 and 16 are hollow. A suture manipulating assembly 22 that includes a suture thread receiving member 24 and a suture grabber 26, which can be passed into the hollow portions of first and second puncture elements 12 and 16, respectively. First and second puncture elements 12 and 16 are provided with distal funnel cups 28 and 30, respectively, for guiding insertion of suture thread receiving member 24 and suture grabber 26. The funnel cups 28 and 30 also serve as stops to limit movement of suture thread receiving member 24 and suture grabber 26 into first and second puncture elements 12 and 16. Proximal ends of suture thread receiving member 24 and suture grabber 26 are mounted on a handle assembly 32. Suture thread receiving member 24 is mounted on an adjustable block 17 of handle assembly 32. Adjustable block 17 is arranged for moving with respect to a distal block 19 of handle assembly 32.

Suture thread 38 is placed over a distal end of suture thread receiving member 24. As seen in Fig. 2, the suture grabber 26 is arranged to grab suture thread 38 at the distal end 14 of first puncture element 12 and pull suture thread 38 over the gap to second puncture element 16.

Briefly, in operation of suturing assembly 10, first and second puncture elements 12 and 16 are first pushed into tissue and the sharp distal ends 14 and 18 puncture a tissue wall. The suture thread receiving member 24 and suture grabber 26 are introduced into the hollow portions of first and second puncture elements 12 and 16, respectively. When the suture thread receiving member 24 is pushed fully up to funnel cup 28, the suture

thread 38 passes from a near side of the tissue wall to a far side of the tissue wall. When suture grabber 26 is pushed fully up to funnel cup 30, suture grabber 30 swings out of second puncture element 16 towards the suture thread 38 at the distal end 14 of first puncture element 12. Suture thread 38 is now caught and grabbed by suture grabber 26, as seen in Fig. 2. The suture thread receiving member 24 and suture grabber 26 are then pulled proximally (backwards). This movement pulls suture grabber 26 back into second puncture element 16. As suture grabber 26 moves proximally it brings along with it suture thread 38 over the gap 20, proximally away from the distal end 18 of second puncture element 16, and back through to the near side of the tissue wall. Afterwards, the suture thread 38 may be secured to form a stitch.

SUMMARY OF THE INVENTION

The present invention seeks to provide an improved suturing assembly, as described in more detail further below. The present invention is described for convenience with respect to the suturing device of PCT Patent Application WO 2009/069119, but the invention is not limited to such a suturing device, and can be implemented in other suturing devices. The present invention is directed to a spacer that provides further functionality to suturing devices.

There is thus provided in accordance with an embodiment of the present invention a suturing assembly including a first puncture element including a sharp distal end for puncturing tissue, a second puncture element including a sharp distal end for puncturing tissue, the distal ends of the first and second puncture elements being spaced from each other by a gap, and a spacer arranged for sliding distally and proximally on at least one of the first and second puncture elements.

In accordance with an embodiment of the present invention the spacer is arranged to slide distally and proximally on both of the first and second puncture elements.

In accordance with an embodiment of the present invention the spacer is formed with a first opening through which one of the first and second puncture elements passes through, and a second opening through which the other of the first and second puncture elements passes through.

In accordance with an embodiment of the present invention the first opening has a closed outer contour.

In accordance with an embodiment of the present invention the second opening has a closed outer contour; alternatively, the outer contour of the second opening is not completely closed.

In accordance with an embodiment of the present invention the spacer includes a radially protruding flange.

In accordance with an embodiment of the present invention the spacer includes a distally protruding protector for protecting a distal tip of at least one of the first and second puncture elements.

In accordance with an embodiment of the present invention the spacer is arranged for pivoting about one of the first and second puncture elements and the spacer includes a connecting portion that snaps onto the other of the first and second puncture elements.

In accordance with an embodiment of the present invention, the suturing assembly further includes suture thread disposed along a portion of the first puncture element, wherein the suture thread is arranged to be grabbed at the distal end of the first puncture element, and a suture grabber positioned at the distal end of the second puncture element.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description, taken in conjunction with the drawings in which:

Figs. 1 and 2 are simplified pictorial illustrations of a prior art suturing assembly, made according to PCT Patent Application WO 2009/069119;

Figs. 3 and 4 are simplified pictorial illustrations of a suturing assembly with a spacer, constructed and operative in accordance with an embodiment of the present invention, respectively with the spacer at proximal and distal ends of puncture elements;

Fig. 5 is a more detailed illustration of the spacer of Fig. 4;

Fig. 6 is a simplified pictorial illustration of the spacer with a distally protruding protector, constructed and operative in accordance with an embodiment of the present invention; and

Figs. 7 and 8 are simplified pictorial illustrations of the spacer, constructed and operative in accordance with an embodiment of the present invention, respectively before and after pivoting to snap onto one of the puncture elements.

DETAILED DESCRIPTION OF EMBODIMENTS

Reference is now made to Figs. 3-5, which illustrate a suturing assembly 50, constructed and operative in accordance with a non-limiting embodiment of the present invention.

Suturing assembly 50 includes a first puncture element 52 including a sharp distal end 54 for puncturing tissue, and a second puncture element 56 including a sharp distal end 58 for puncturing tissue. The distal ends 54 and 58 of the first and second puncture

elements 52 and 56 are spaced from each other by a gap 59. A spacer 60 is arranged for sliding distally and proximally on either one or both of first and second puncture elements 52 and 56. In the embodiment illustrated in Fig. 3, spacer 60 is arranged to slide distally and proximally on both of first and second puncture elements 52 and 56.

As seen best in Fig. 5, in accordance with an embodiment of the present invention, spacer 60 is formed with a first opening 62 through which one of the first and second puncture elements passes through, and a second opening 64 through which the other of the first and second puncture elements passes through. In the embodiments illustrated in Figs. 5 and 6, each of the first and second openings 62 and 64 has a closed outer contour. In the embodiment illustrated in Figs. 7 and 8, the outer contour of second opening 64 is not completely closed.

Spacer 60 is normally in the distal position (Fig. 4) prior to insertion of the first and second puncture elements 52 and 56 into tissue. The spacer 60 slides to the proximal position (Fig. 3) after insertion into the tissue. Optionally, as seen in Fig. 3, a biasing device 63, such as a coil spring, may be provided for urging spacer 60 from the proximal position to the distal position.

In accordance with an embodiment of the present invention the spacer includes a radially protruding flange 66, which may serve as a guide, handle or imaging landmark.

Reference is now made to Fig. 6. In accordance with an embodiment of the present invention, spacer 60 includes one or more distally protruding protectors 68 for protecting one or both of distal ends 54 and 58 of the first and second puncture elements 52 and 56.

Reference is now made to Figs. 7 and 8. In accordance with an embodiment of the present invention, spacer 60 is arranged for pivoting about one of the first and second puncture elements 52 or 56. Spacer 60 includes a connecting portion 70 that snaps onto the other of the first and second puncture elements.


In accordance with an embodiment of the present invention, the suturing assembly may combine features of the prior art suturing device. For example, as shown previously in Figs. 1 and 2, the suturing assembly may further include suture thread 38 disposed along a portion of the first puncture element 52, wherein the suture thread is arranged to be grabbed at the distal end of the first puncture element 52, and a suture grabber 26 positioned at the distal end of the second puncture element 54.

CLAIMS

What is claimed is:

1. A suturing assembly comprising:
 - a first puncture element comprising a sharp distal end for puncturing tissue;
 - a second puncture element comprising a sharp distal end for puncturing tissue, the distal ends of said first and second puncture elements being spaced from each other by a gap; and
 - a spacer arranged for sliding distally and proximally on at least one of said first and second puncture elements.
2. The suturing assembly according to claim 1, wherein said spacer is arranged to slide distally and proximally on both of said first and second puncture elements.
3. The suturing assembly according to claim 2, wherein said spacer is formed with a first opening through which one of said first and second puncture elements passes through, and a second opening through which the other of said first and second puncture elements passes through.
4. The suturing assembly according to claim 3, wherein said first opening has a closed outer contour.
5. The suturing assembly according to claim 3, wherein said second opening has a closed outer contour.
6. The suturing assembly according to claim 3, wherein an outer contour of said second opening is not completely closed.
7. The suturing assembly according to claim 1, wherein said spacer comprises a radially protruding flange.
8. The suturing assembly according to claim 1, wherein said spacer comprises a distally protruding protector for protecting a distal tip of at least one of said first and second puncture elements.
9. The suturing assembly according to claim 1, wherein said spacer is arranged for pivoting about one of said first and second puncture elements and said spacer comprises a connecting portion that snaps onto the other of said first and second puncture elements.
10. The suturing assembly according to claim 1, further comprising a biasing device for urging said spacer from a proximal position to a distal position.
11. The suturing assembly according to claim 1, further comprising suture thread disposed along a portion of said first puncture element, wherein said suture thread is

arranged to be grabbed at the distal end of said first puncture element, and a suture grabber positioned at the distal end of said second puncture element.

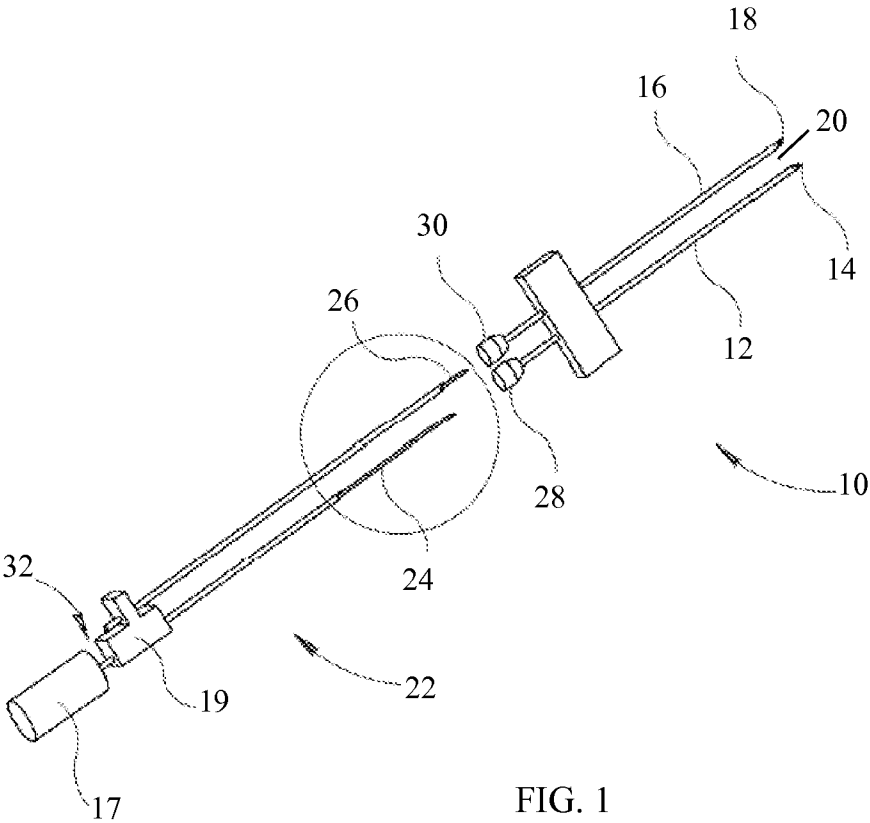

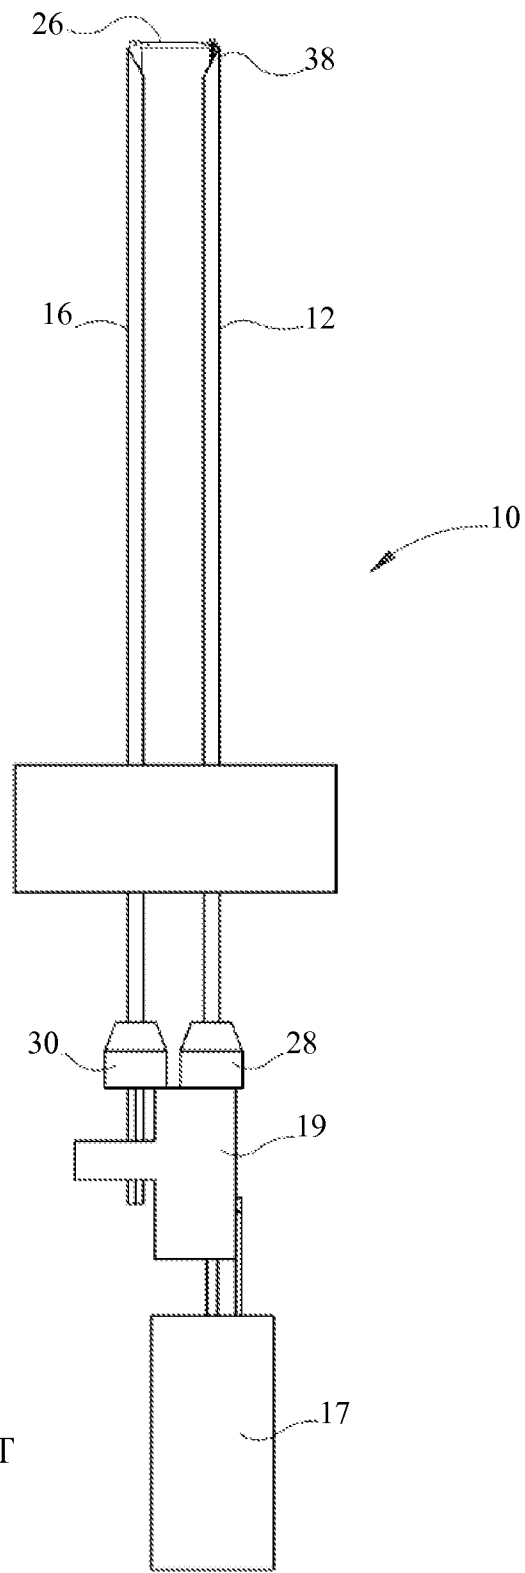
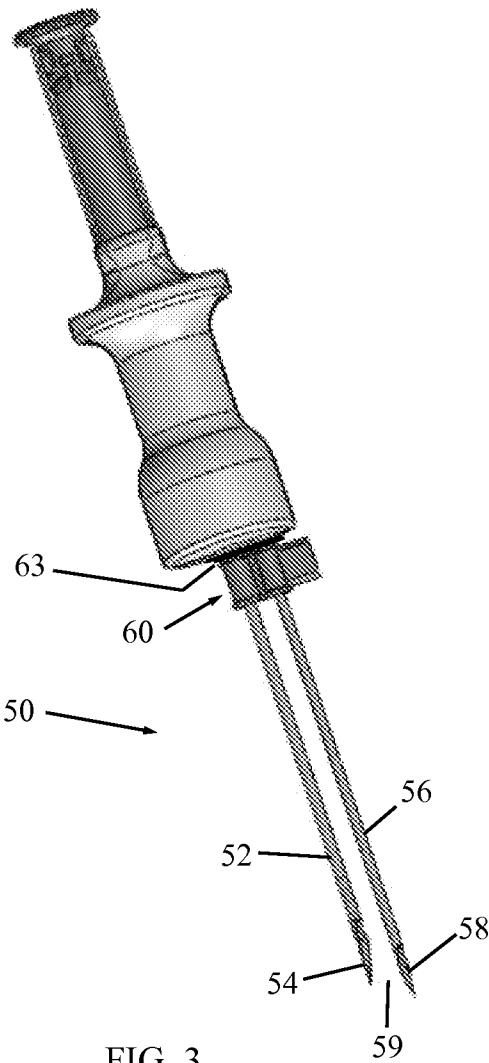
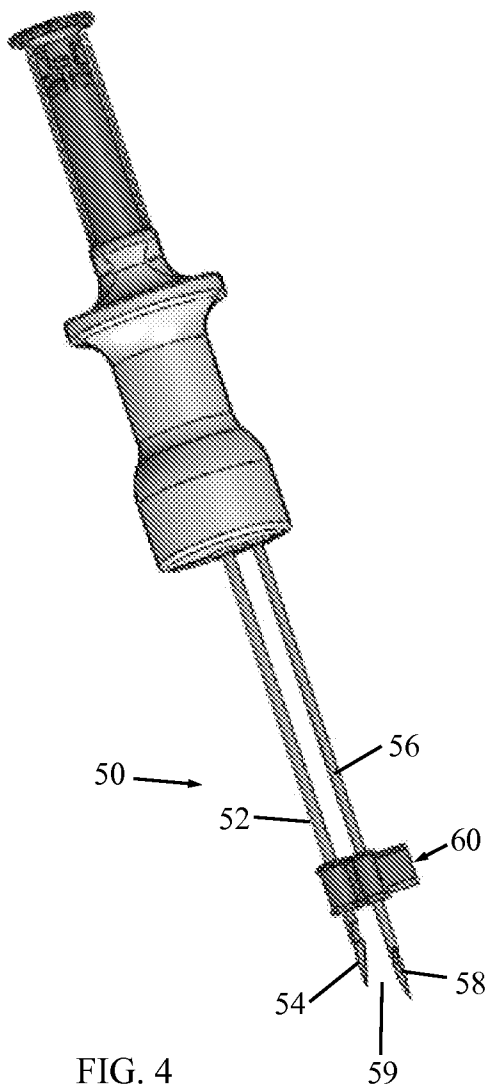


FIG. 2
PRIOR ART





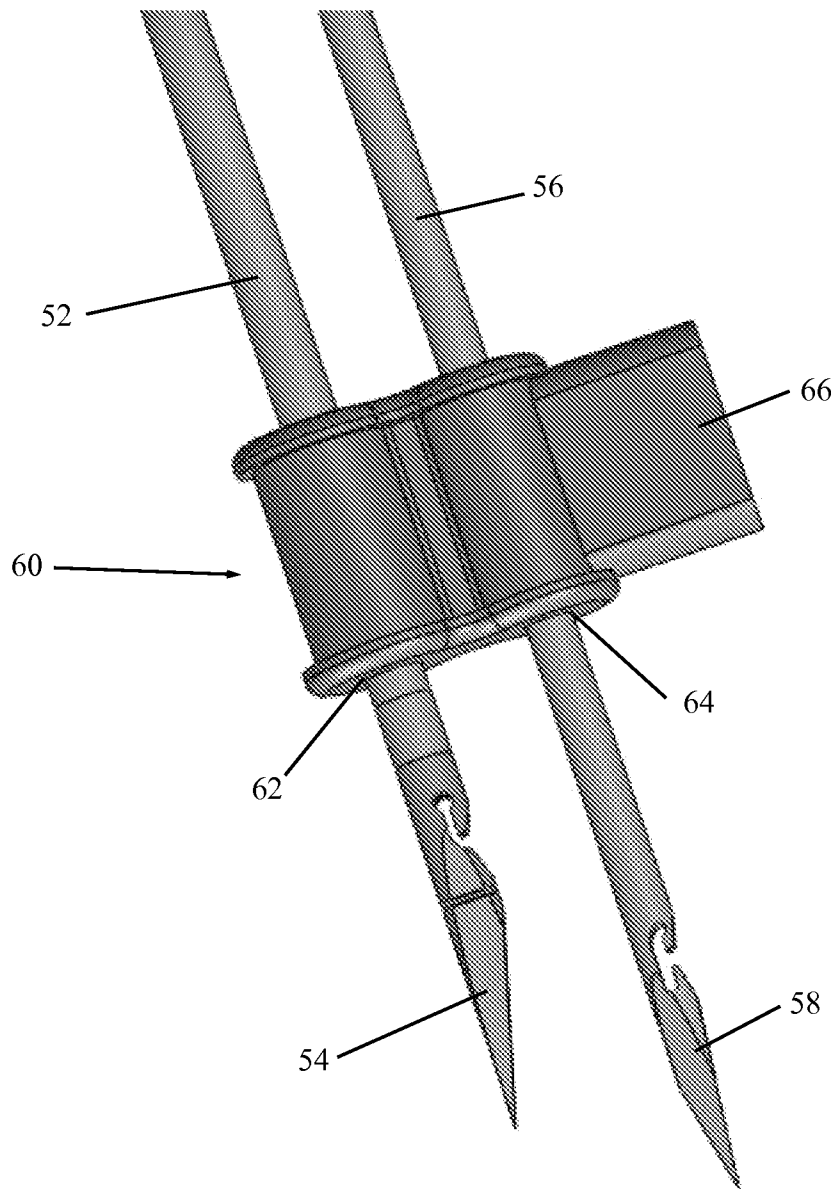
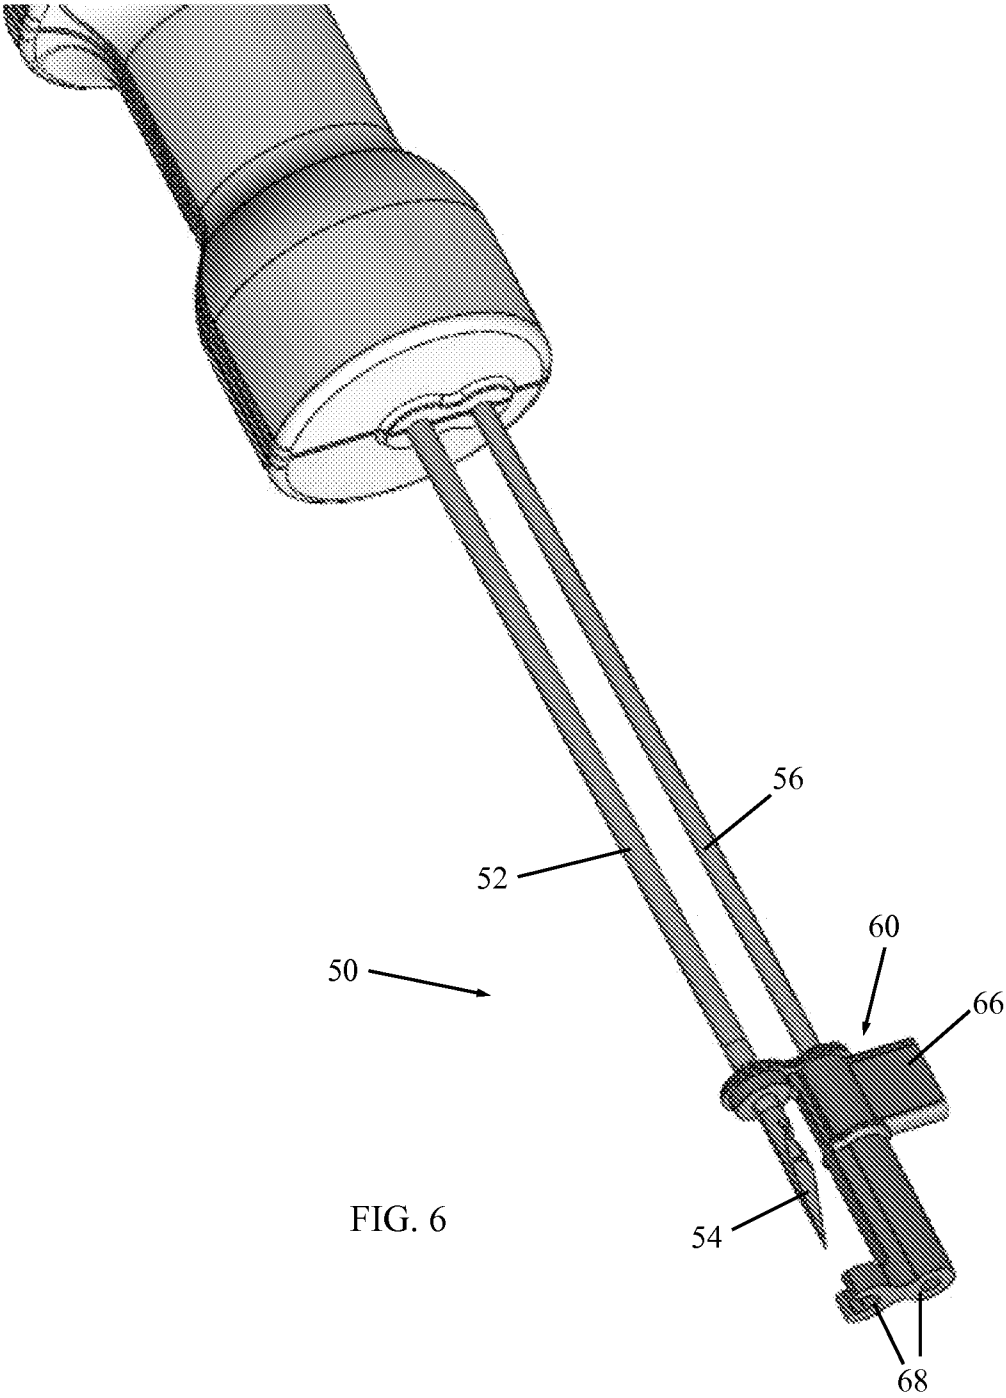


FIG. 5



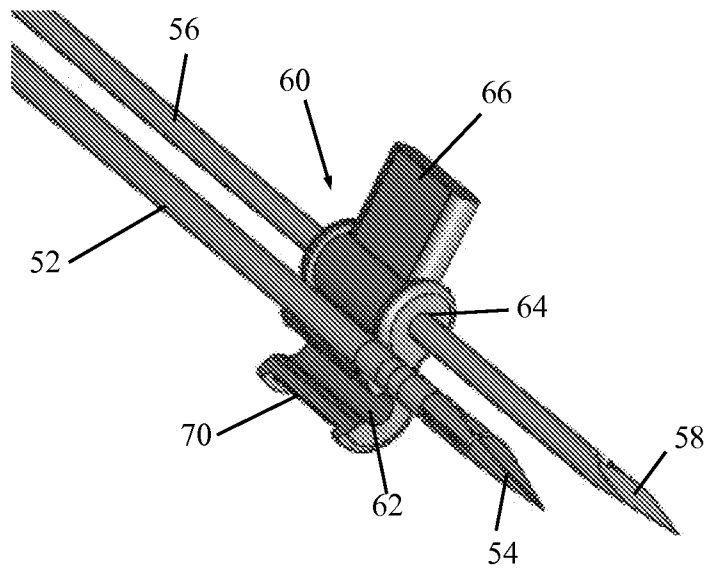


FIG. 7

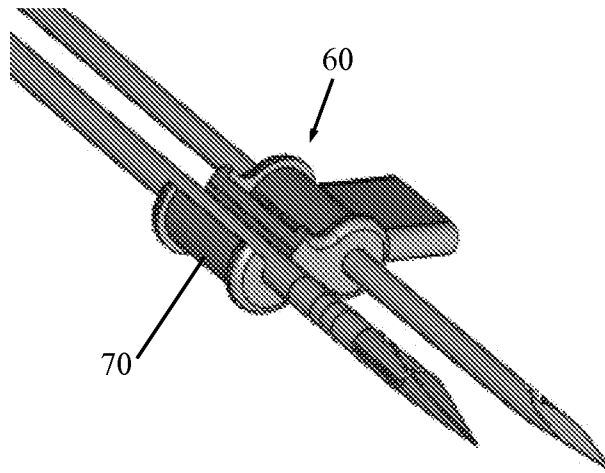


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/064053

A. CLASSIFICATION OF SUBJECT MATTER
 INV. A61B17/04
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 598 017 A1 (SUMITOMO BAKELITE CO [JP]; SUZUKI YUTAKA [JP]) 23 November 2005 (2005-11-23) paragraphs [0047] - [0055], [0067]; claim 1	1-5,7,11
X	----- WO 95/33408 A1 (TAHOE SURGICAL INSTR PUERTO RI [US]) 14 December 1995 (1995-12-14) pages 5-7; claim 1; figures 1,2	1-5,7, 10,11
X	----- US 2003/004544 A1 (KAWASHIMA KOICHI [JP] ET AL) 2 January 2003 (2003-01-02) paragraphs [0031] - [0049] ----- -/--	1-5,7,11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 March 2013

Date of mailing of the international search report

22/03/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Chopinaud, Marjorie

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/064053

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2007/073931 A1 (COVIDIEN AG [CH]; NIPPON SHERWOOD MED IND LTD [JP]; NAGATA KATSUMI [JP] 5 July 2007 (2007-07-05) paragraphs [0019] - [0036]; figures 1-2 -----	1-5,7,11
X	US 2009/264905 A1 (FUNADA MASAKI [JP]) 22 October 2009 (2009-10-22) paragraphs [0043] - [0062]; claim 1; figure 1 -----	1-5,7, 10,11
X	EP 2 005 892 A2 (SUMITOMO BAKELITE CO [JP]; SUZUKI YUTAKA [JP]) 24 December 2008 (2008-12-24) paragraphs [0026] - [0049]; figures 1,15 -----	1-5,7,11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/064053

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 1598017	A1	23-11-2005	EP	1598017 A1		23-11-2005
			JP	4255030 B2		15-04-2009
			US	2006069398 A1		30-03-2006
			WO	2004075761 A1		10-09-2004

WO 9533408	A1	14-12-1995	AU	2600595 A		04-01-1996
			WO	9533408 A1		14-12-1995

US 2003004544	A1	02-01-2003	JP	4493258 B2		30-06-2010
			JP	2002336262 A		26-11-2002
			US	2003004544 A1		02-01-2003

WO 2007073931	A1	05-07-2007	BR	PI0605379 A		16-10-2007
			CA	2572055 A1		26-06-2007
			JP	4614451 B2		19-01-2011
			JP	2007167500 A		05-07-2007
			US	2007179509 A1		02-08-2007
			US	2010305586 A1		02-12-2010
			WO	2007073931 A1		05-07-2007

US 2009264905	A1	22-10-2009	CN	101500496 A		05-08-2009
			DE	112007001095 T5		07-05-2009
			JP	5010178 B2		29-08-2012
			JP	2007319169 A		13-12-2007
			US	2009264905 A1		22-10-2009
			WO	2007138981 A1		06-12-2007

EP 2005892	A2	24-12-2008	CN	101415370 A		22-04-2009
			EP	2005892 A2		24-12-2008
			JP	4038524 B2		30-01-2008
			JP	4712765 B2		29-06-2011
			JP	2007296319 A		15-11-2007
			JP	2007296373 A		15-11-2007
			US	2009062817 A1		05-03-2009
			WO	2007129431 A1		15-11-2007
