

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08K 9/04, 9/08	A1	(11) International Publication Number: WO 96/22326 (43) International Publication Date: 25 July 1996 (25.07.96)
<p>(21) International Application Number: PCT/EP96/00177</p> <p>(22) International Filing Date: 17 January 1996 (17.01.96)</p> <p>(30) Priority Data: 195 02 629.2 19 January 1995 (19.01.95) DE</p> <p>(71) Applicant: GRACE GMBH [DE/DE]; Erlengang 31, D-22844 Norderstedt (DE).</p> <p>(72) Inventors: DUNN, Paul; 4 Rawdon Drive, Hoddesdon, Herts EN 118 DW (GB). LÜERS, Georg; Bergstasse 23, D-67593 Westhofen (DE). SOBOTTKA, Richard; Berta-Karillonstrasse 12, D-67550 Worms (DE).</p> <p>(74) Agent: VAN HEESCH, Helmut; Uexkill & Stolberg, Beselerstrasse 4, D-22607 Hamburg (DE).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: USE OF A COMPOSITION BASED ON POLYOL-TREATED SILICON DIOXIDE AS ANTIBLOCKING AGENT, ANTIBLOCKING AGENT AND PROCESS FOR ITS PRODUCTION**(57) Abstract**

The use of a composition based on silicon dioxide as antiblocking agent is described which is characterized in that it has silicon dioxide having a particle size of 2 to 8 μm , a specific surface of 150 to 850 m^2/g and a specific pore volume of 1.4 to 2.0 ml/g which has been treated with polyol. This silicon dioxide can be used together with a slip agent as combined antiblocking agent and slip agent. The working-in of the antiblocking agent or of the combined antiblocking agent and slip agent into a polymer is preferably in the form of a masterbatch. A preferred antiblocking agent contains as polyol ethoxylated pentaerythritol in which the pentaerythritol/ethoxy ratio lies in the range from 1:0.5 to 1:25. The antiblocking agent can be obtained by micronizing silicon dioxide to the given particle size and impregnating it with the polyol.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

-1-

Use of a composition based on polyol-treated silicon dioxide as antiblocking agent, antiblocking agent and process for its production

The invention relates to the use of a composition based on polyol-treated silicon dioxide as antiblocking agent, to an antiblocking agent and to a process for its production.

Micronized silicic acid gels are used to a large extent as antiblocking agents in polymer films. Synthetic amorphous silica gels have a relatively large specific pore volume (usually called porosity) and accordingly supply a larger number of particles (of a certain size) per gram than products having a smaller porosity (e.g. talc, chalk, natural silica gels such as diatomaceous earth). When these particles, which generally have diameters between 1 and 10 μm (Coulter Counter), are incorporated into polymer films in concentrations in the order of magnitude of 0.1 %, they produce microscopic surface deformations which prevent complete contact of film layers lying on one another and make the separation of the film layers from one another (for example in the case of carrier bags) or unwinding of the film rolls easier. This is the "antiblocking" effect. For the above reasons, micronized synthetic silica gels are more effective antiblocking agents than products having a low or no porosity. The specific surface of products is linked to their porosity: a very low porosity (almost zero) corresponds to a very small specific surface (less than 1 m^2/g).

- 2 -

In many cases, a slip agent is additionally added to the antiblocking agent in polymer films. In most cases the slip agent is a fatty acid amide such as oleic acid amide or erucic acid amide and makes the slipping of the film layers over one another easier (slipping effect). However, the antiblocking agent present reduces the effectiveness of the slip agent because the surface of the antiblocking agent is polar and the polar amide molecules are adsorbed on it. As a result, some of the slip agent is not available on the film surface where it is required for the desired slipping effect. Natural products have a very small surface of 0.1 to 0.5 m²/g, compared with synthetic SiO₂ products having a surface of 300 to 600 m²/g. They adsorb less slip agent than for example silica gel, but show only a very small antiblocking effect because of the low porosity and the small surface.

The antiblocking effect of synthetic silica gels is almost three times greater than that of products with a small surface, but unfortunately, synthetic silica gels adsorb slip agents. This means that, in order to achieve the desired antiblocking and slipping properties, a polyolefin film has for example to be supplied with 0.3 wt.% of an antiblocking agent having a small surface and 0.1 wt.% slip agent, or with 0.1 wt.% antiblocking agent made from synthetic silicic acid and 0.15 wt.% slip agent. This shows that the effectiveness of the slip agent in the presence of synthetic silicic acid is considerably reduced, i.e. approximately 50% more slip agent is required in order to obtain the same slipping effect or the same low coefficient of friction.

Thus, although the traditional synthetic silicic acids are highly effective antiblocking agents, the adsorption of slip agent represents a problem, because

a) it makes it difficult to predict the effect of the slip agent in the film which can ultimately be achieved,

- 3 -

- b) the higher quantity of slip agent increases the costs of film manufacture and
- c) the required higher quantity of slip agent increases the extractable quantity of organic constituents, which is of importance as regards approval of the film for the packing of foods.

Described in US-A-4 629 749 is the use of polyethylene glycol (PEG) together with antiblocking agents such as diatomaceous earth for improving the clarity of a blown film. Because of their small specific surface and their small pore volume, diatomaceous earths are not very efficient as antiblocking agents. Neither a slip agent nor the adsorption of slip agents at silicon dioxide is mentioned in the patent. The process described in US-A-4 629 749, used for the treatment of the silicon dioxide, is very expensive and disadvantageous because of solvent emission. The PEG is preferably dissolved in acetone and mixed with the silicon dioxide. The solvent is then evaporated. Another process described therein (claim 3) consists in firstly melting the polyethylene glycol and then coating it onto the surface of the antiblocking agent. The only described way to achieve this object is given in Example VIII and, otherwise than according to claim 3, involves mixing the polyethylene glycol with the polyethylene resin which already contains antiblocking agent.

25

Described in FR-A-2 484 428 is the use of ethylene glycol or polyethylene glycol with precipitated silicic acid. The silicic acid is used as filler for rubber. This publication does not relate to supplying polyolefin films with antiblocking agents or the adsorption of slip agents at silicon dioxide.

30

The Japanese patent application JP 2 055 750 relates to a silicic acid which has either been treated with calcium stearate, paraffin wax or polyolefin wax in order to be used as antiblocking agent for polyolefin films. The silicic acid is itself merely called "finely powdered silicic acid". An

35

- 4 -

adsorption of slip agent or the effect of glycols is not described.

Described in EP-A-0 442 325 is a dulling agent for coatings which is similar to the product of the present application. There is however no technological connection.

Described in EP-A-0 526 117 is a composition which contains synthetic silicon dioxide, a slip agent and an alkylene polyether (polyethylene glycol). The reduced slip agent effect is allegedly raised by adding the alkylene polyethers as "slip boosting agent", with the result that smaller quantities of slip agent suffice for the desired slip agent effect. A silicon dioxide with average pore volume is used (specific pore volume approx. 1.1 ml/g). However, although the compatibility with slip agents has been improved, the thus-treated silicon dioxide does not show adequate compatibility or a high antiblocking effect.

Compared with this, it is the object of the invention to provide an antiblocking agent with high antiblocking effect in which the aforementioned disadvantages of the state of the art as regards the adsorption of slip agent are avoided or markedly reduced, the release of the organic auxiliaries is optimized and the effectiveness of the silicon dioxide is improved. It is a further object to provide a process for the production of this antiblocking agent without disadvantageous emissions into the environment at low production costs.

This object is achieved by using a composition based on silicon dioxide as antiblocking agent which is characterized in that it contains silicon dioxide having

- a particle size of 2 to 8 μm (Coulter Counter),
- a specific surface of 150 to 850 m^2/g and
- a specific pore volume of 1.4 to 2.0 ml/g, which has been treated with polyol.

- 5 -

According to the invention, an antiblocking agent based on silicon dioxide is in particular also proposed, which is characterized in that it contains silicon dioxide having

- a particle size of 2 to 8 μm ,
 - 5 - a specific surface of 150 to 850 m^2/g and
 - a specific pore volume of 1.4 to 2.0 ml/g , which has been treated with ethoxylated pentaerythritol in which the pentaerythritol/ethoxy ratio lies in the range from 1:0.5 to 1:25.
- 10 Another subject of the invention is a process for the production of the antiblocking agent according to the invention which is characterized in that the silicon dioxide is micronized to a particle size of 2 to 8 μm and treated with the polyol.
- 15 In contrast to the materials of this type obtainable in the trade, the silicon dioxide according to the invention or the silicic acid used according to the invention has a larger specific pore volume. It lies in the range from 1.4 to 2.0 ml/g .
- 20 The following generally applies in the range of the silica gels obtainable in the trade: gels with a smaller specific pore volume have a small pore size and a large specific surface, whilst gels with a large specific pore volume have a large pore size and a relatively small specific surface. This can be demonstrated with
- 25 reference to the following examples:

Trade name	Specific pore volume, ml/g	Average pore size (Wheeler*), nm	Specific surface, BET m^2/g
SYLOID AL-1	0.4	2.3	700
SYLOBLOC 47	1.1	9.2	480

- 30 (*) Pore size (nm) = $\frac{\text{PV (ml/g)} \times 4000}{\text{BET (m}^2/\text{g)}}$

35 A. Wheeler in P.H. Emmet (Editor), Catalysis, Vol. 2, Reinhold, New York, 1955, page 116.

- 6 -

The pore volume and therefore the pore size of the silicon dioxide according to the invention are considerably different from these (see Table on page 14).

5 It was surprisingly found that the treatment of the silicon dioxide according to the invention, and in particular of the silicon dioxide surface (e.g. through its impregnation) with polyol reduces the effect of the adsorption of the slip agent. This is surprising in particular because a polyol is also a polar
10 compound. A polymer film which contains a slip agent in combination with the antiblocking agent according to the invention achieves a small and stable coefficient of friction (no "slip-stick") after extrusion much more quickly than films which contain traditional synthetic silicon dioxide antiblocking agents
15 or those antiblocking agents which contain silicon dioxide, having an average pore volume, treated with polyethylene glycol (as described in EP-A-0 526 117).

The polyols which can be used according to the invention have at
20 least two OH groups, preferably 3 to 5 OH groups, and chains with a molecular weight up to 2000, preferably 100 to 800. In those cases where long-chained substances are used, their molecular weight is limited by the fact that they must be liquid. Polyethylene glycols are for example also suitable.

25

A preferred polyol for the treatment of the silicon dioxide used is for example an alkoxyated pentaerythritol, whereby the alkoxy group is preferably a C₁-C₆ alkoxy group, and in particular is a methoxy group, ethoxy group or butoxy group. The molar ratio of
30 pentaerythritol to the alkoxy group preferably lies in the range from 1:0.5 to 1:25, more preferably 1:1 to 1:10 and most preferably 1:1 to 1:5. A particularly preferred embodiment is ethoxyated pentaerythritol. It has in particular a mole ratio of 1:3 (pentaerythritol : ethylene oxide) and a molecular weight
35 of 270. The overall results achieved with it are especially good.

- 7 -

As already stated, traditional synthetic silicon dioxide antiblocking agents have a pore volume of 0.8 to 1.2 ml/g. This means that the effectiveness is improved, compared with a non-porous material, as a result of the volume which is formed through the pores. In contrast to the silicic acids traditionally used in antiblocking agents, the silicon dioxide according to the invention does however have a pore volume of 1.4 to 2.0 ml/g which leads to an improvement of the antiblocking effect from 10 to above 80 %, compared with silicon dioxides with a specific pore volume of 1.2 ml/g. In addition to the improved antiblocking effect, the larger pores of such a silicon dioxide according to the invention improve the binding of the particles to the resin. The advantage consists in the fact that the number of agglomerates and "fish eyes" is reduced. The "fish eyes" are formed when the contact between the surface of the silicon dioxide particle and the resin is lost. This can occur in the presence of high shear forces during the blowing of the film, pouring of the film or film extension.

The pore volume of the silicon dioxide is increased compared with that of known silicon dioxide by drying the silicon dioxide hydrogel (stage of the silicon dioxide production process when the pores are completely filled with water) using a process which permits high-speed drying (flash drying). Using a high-speed dryer the pre-ground particles are dried in less than 1 second and this leads to a pore volume of 1.4 to 2.0 ml/g, whilst the same silicon dioxide which has been dried in a fixed-bed dryer for a period of several minutes has a pore volume of 0.8 to 1.2 ml/g.

30

Treatment of the antiblocking agent with the polyol (e.g. impregnation) can advantageously take place at the same time as the grinding, for example in a jet mill. Silicon dioxide and polyol are introduced at the same time into the jet mill. This process permits the particle size to be controlled and leads to a very homogeneous distribution of the polyol on the fine silicon

35

- 8 -

dioxide particles. No further production steps are required, meaning that the costs too are not further increased, and no escaping solvent has to be handled or disposed of.

5 The polymer additives which are protected according to the invention from an adsorption at the silicon dioxide are all those which are normally used in polyolefin films and contain polar groups. Such additives are for example fatty acid amides (erucic acid amide, oleic acid amide), antioxidants, anti-tarnish agents
10 and anti-static agents.

The concentration of the polyol required to prevent adsorption of slip agent at the silicon dioxide surface is 3 to 15 wt.% and preferably 6 to 10 wt.% of the silicon dioxide. It is important
15 to note that the polyols are adsorbed very strongly at the silicon dioxide surface and do not therefore adversely influence other properties of the silicon dioxide antiblocking agent.

The particle size of the silicon dioxide is measured in suitable
20 manner using a Coulter Counter and the pore volume is determined using nitrogen adsorption.

According to the invention, the silicon dioxide treated with polyol is used as antiblocking agent for polymer films, the films
25 preferably being made from polyethylene, polypropylene or linear polyester, and in particular in a concentration of 200 to 4000 ppm, preferably 700 to 3000 ppm, relative to the film weight.

Other polar additives can also be present. These other polar
30 additives are for example compounds such as erucic acid amide or oleic acid amide which are then used in concentrations of for example 200 to 4000 ppm, preferably 700 to 3000 ppm in each case. They are preferably used with polyolefins.

35 In general, such polar additives include antioxidants, anti-static agents, anti-tarnish agents and UV stabilizers.

In another version which is particularly suitable in practice, the antiblocking agent or the combined antiblocking agent and slip agent is present in the form of a masterbatch, i.e. it is
5 already incorporated in a relatively high concentration into a polymer, in particular a polyolefin. The polymer is preferably the same polymer from which the film is also comprised, into which the antiblocking agent or the combined antiblocking agent and slip agent is to be incorporated. The concentration of the
10 antiblocking agent or of the combined antiblocking and slip agent in the masterbatch is generally 5 to 25 wt.% or 10 to 50 wt.%.

In order to test the properties of films produced using an antiblocking agent according to the invention, the following test
15 procedures are employed.

Test procedures

1. Deblocking resistance

20 Two samples measuring 10.0 x 7.5 cm² are cut out of the extruded film and blocked artificially for 1 hour under a pressure of 80 g/cm² at 70°C. The force necessary to separate the two film layers is measured with a Davenport Film blocking tester (Manufacturer Davenport Ltd., Great Britain).

25

2. Coefficients of friction

30 The coefficient of friction is measured according to ASTM D 1894. The "slip-stick" effect shown in the drawings can be described as an irregular, jerky movement of one film layer over the other film layer during measurement of the coefficient of friction. Normally, one film layer moves relative to the other at a constant speed and the necessarily expended force is constant. In the case of the
35 "slip-stick" effect an irregular jerky movement of one of the film layers occurs and the measured friction force varies over a wide range (range of the "slip-stick"). The


"slip-stick" effect normally happens directly after the film extrusion. It decreases after several days and depends on how quickly the slip agent can migrate to the film surface. The processor of polyolefin films quickly notices this phenomenon since it causes problems when the films are made into bags, carrier bags etc. The ideal film develops its constant coefficient of friction in a very short time after extrusion, for example within 48 hours.

10 3. Clouding

Clouding is measured according to ASTM D 1003.

Examples

15 The following examples show the effect of a larger pore volume on the antiblocking effect and the advantages of using polyol which leads to a more rapid development of a low coefficient of friction without "slip-stick".

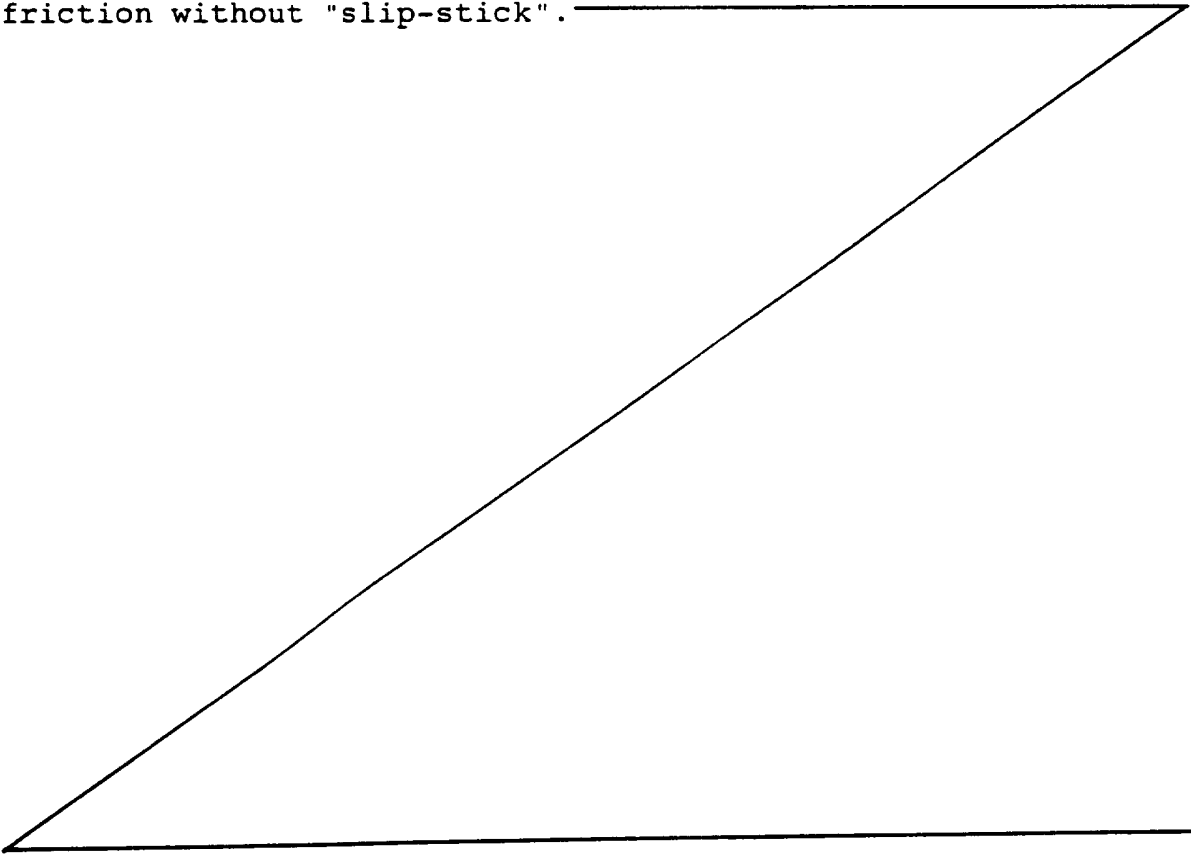

- 11 -

Product identification	<u>Polyol</u>		Growth	Silicic acid component			Notes
	z	Type		z	Pore volume (ml/g)	BET surface (m ² /g)	
Sylobloc 45	-	-	-	1.1	400	9.2	prior art
5 Antiblocking agent 1	-	-	-	1.8	400	18.0	
Antiblocking agent 2	-	-	4	1.8	400	18.0	
10 Antiblocking agent 3	8	PEG 400	4	1.8	400	18.0	PEG with a molecular weight of 400
Antiblocking agent 4	8	ethoxyl-ated pentaerythritol (3:1)	4	1.8	400	18.0	ethoxyl-ated pentaerythritol (1:3) with a molecular weight of 270

15

Example 1

A LDPE masterbatch (LDPE = low-density polyethylene) with 5 % antiblocking agent was produced using an internal mixer. The master-batch was added to a PP polymer (polypropylene polymer),
 20 a film extruder being used in order to obtain an antiblocking agent end-concentration of 1000, 2000 or 3000 ppm in films having a thickness of 40 µm. In each case the blocking force and the clouding of the films were determined.

25 It is evident from Figure 1 that, compared with a concentration of approx. 2000 ppm of a traditional antiblocking agent having lower porosity, a concentration of only approx. 1000 ppm of the antiblocking agents according to the invention having higher

- 12 -

porosity (1.8 ml/g) is required, 2000 ppm being the concentration of Sylobloc 45 (pore volume 1.1 ml/g) usually used in order to achieve a sufficiently low blocking force.

5 It can be seen from Figure 2 that the clouding of the films treated with the product according to the invention is not greater, but as a rule is even less than that of a film which has been treated with Sylobloc 45, when compared at the same blocking force.

10

Example 2

Films were produced in the same way as in Example 1 with the antiblocking agents 2, 3 and 4 (see Table above).

15

The antiblocking behaviour of these three samples is comparable with a slight disadvantage for product 3 (Figure 3). The clouding is also approximately the same (Figure 4).

20 The development of the coefficient of friction was measured for polyethylene (LDPE). For practical reasons, blocking was measured with PP films.

0.2 wt.% antiblocking agent and 0.2 wt.% oleic acid amide were
25 incorporated into the polymer using a twin-screw mixer. Films measuring 10 cm wide and 1 mm thick were extruded from this resin. The dynamic coefficient of friction was measured after 1, 4, 7 and 10 days.

30 Figures 5A, 5B and 5C show the improved behaviour of antiblocking agent 4 which is coated with the polyol according to the invention, compared with that of antiblocking agent 3 which is coated with polyethylene glycol, or antiblocking agent 2 (untreated silicon dioxide with large pore volume). The "slip-
35 stick" effect has disappeared after one day in the case of antiblocking agent 4, whilst in the case of the antiblocking

- 13 -

agent 3 coated with PEG, more than four days were required, and for the silicon dioxide without polyol (antiblocking agent 2), more than 7 days were required until the "slip-stick" effect disappeared.

5

Figures:

1/3. Antiblocking behaviour

Blocking force (N)

Concentration of antiblocking agent (ppm)

2/4. Clouding

Clouding (%)

Blocking force (N)

5A/B/C. Coefficient of friction

"

Storage time (days)

-15-

Patent claims

1. Use of a composition based on silicon dioxide as antiblocking agent, characterized in that it contains silicon dioxide having a particle size of 2 to 8 μm , a specific surface of 150 to 850 m^2/g and a specific pore volume of 1.4 to 2.0 ml/g , which has been treated with polyol.
2. Use according to claim 1, characterized in that the silicon dioxide has been treated with 3 to 15 wt.% polyol.
3. Use according to claim 1 or 2, characterized in that the silicon dioxide is micronized silica gel.
4. Use according to one of claims 1 to 3, characterized in that the polyol is alkoxyated pentaerythritol, whereby the alkoxy group is a $\text{C}_1\text{-C}_6$ alkoxy group, in particular selected from methoxy, ethoxy or butoxy, and there is a mole ratio of pentaerythritol:alkoxy from 1:0.5 to 1:25.
5. Use according to one of claims 1 to 4, characterized in that the antiblocking agent is used in a concentration of 200 to 4000 ppm, relative to the weight of the film.

- 16 -


6. Use according to one of claims 1 to 5, characterized in that the antiblocking agent, together with a slip agent, which in particular is selected from erucic acid amide and oleic acid amide and is used preferably in concentrations of 200 to 4000 ppm relative to the weight of the film, is used as a combined antiblocking agent and slip agent.
7. Use according to one of claims 1 to 6, characterized in that the polymer film consists of polyethylene, polypropylene or linear polyester.
8. Use according to one of claims 1 to 7, characterized in that other polar additives are present.
9. Use according to claim 8, characterized in that the other polar additives include antioxidants, antistatic agents and anti-tarnish agents.
10. Use according to one of claims 1 to 9, characterized in that the antiblocking agent, optionally in combination with a slip agent, is present incorporated in a polymer in the form of a masterbatch.
11. Use according to claim 10, characterized in that the master-batch consists of polymer and 10 to 50 wt.% of the combined antiblocking agent and slip agent.
12. Antiblocking agent based on silicon dioxide, characterized in that it contains silicon dioxide having a particle size of 2 to 8 μm , a specific surface of 150 to 850 m^2/g and a specific pore volume of 1.4 to 2.0 ml/g which has been treated with ethoxylated pentaerythritol in which the pentaerythritol/ethoxy ratio lies in the range from 1:0.5 to 1:25.
13. Antiblocking agent according to claim 12, characterized in

- 17 -

that the silicon dioxide has been treated with 3 to 15 wt.% of the ethoxylated pentaerythritol.

14. Antiblocking agent according to claim 12 or 13, characterized in that the silicon dioxide is micronized silica gel.
15. Process for the production of an antiblocking agent according to one of claims 12 to 14, characterized in that the silicon dioxide is micronized to a particle size of 2 to 8 μm and treated with the ethoxylated pentaerythritol.
16. Process according to claim 15, characterized in that a jet mill is used for the micronizing process.
17. Process according to claim 15 or 16, characterized in that the treatment with the polyol takes place at the same time as micronization.

Figure 1
Antiblocking behaviour

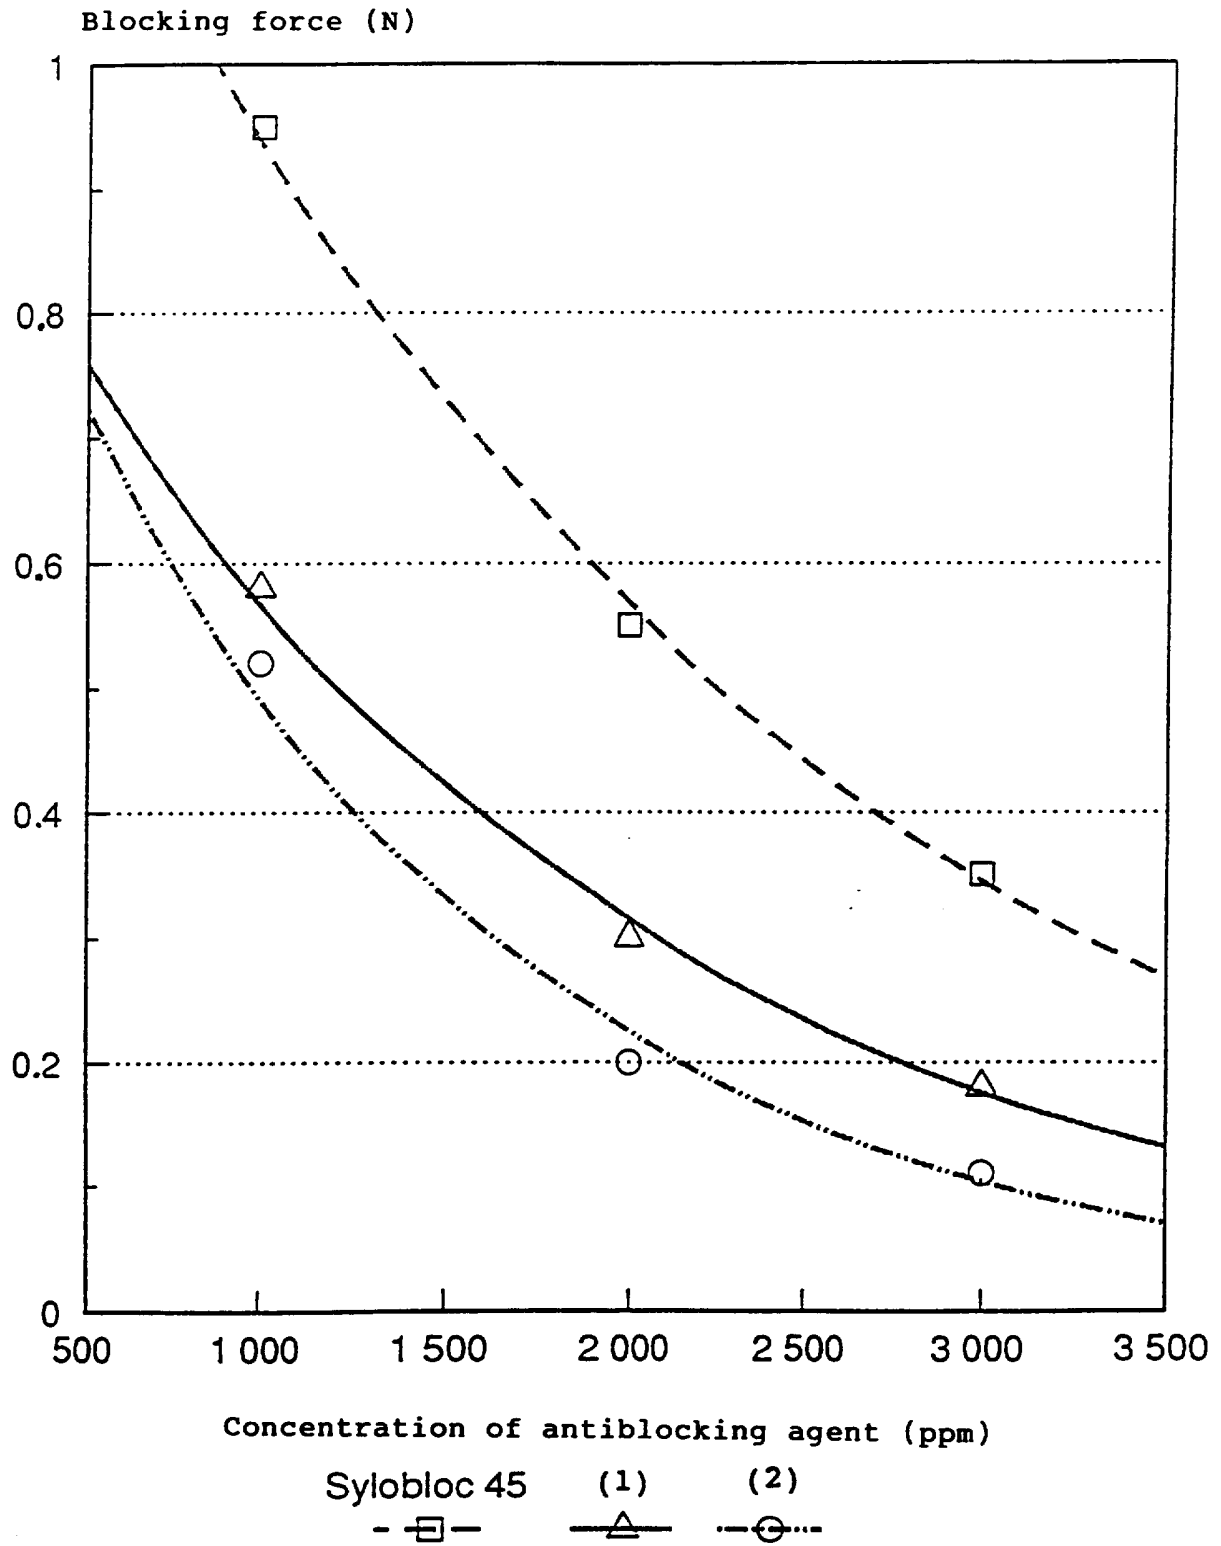

2/7

Figure 2
Clouding


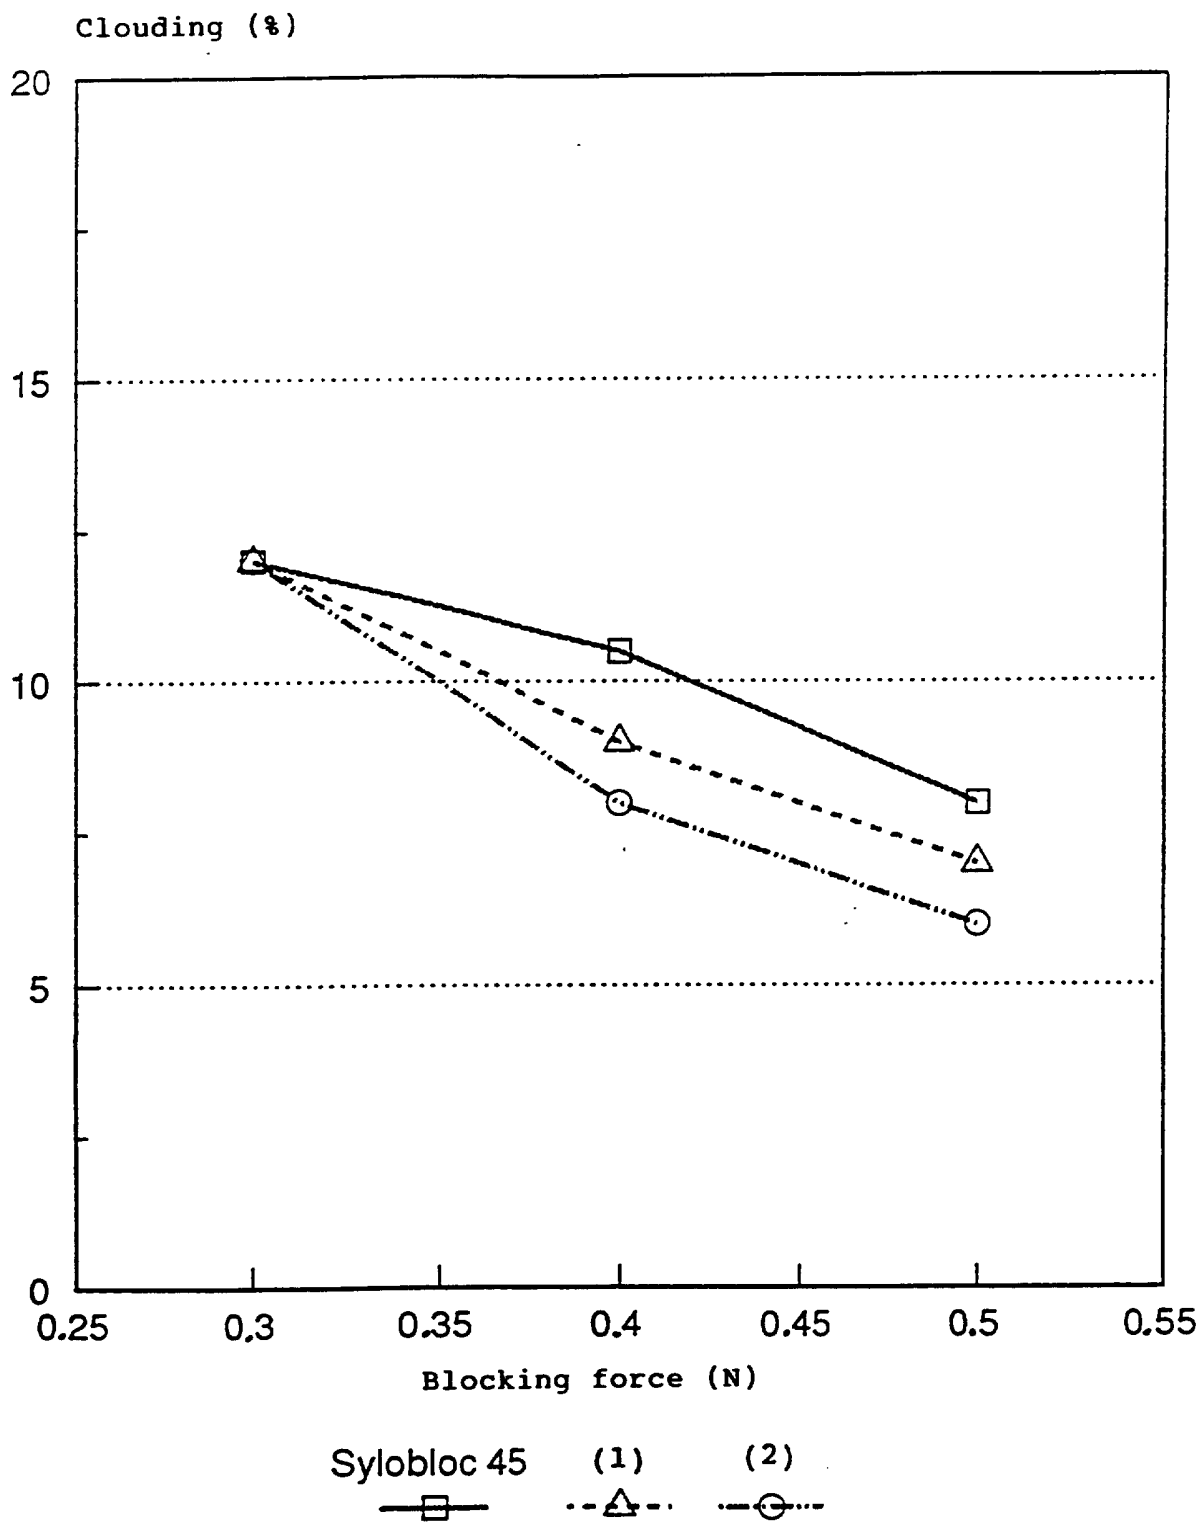



Figure 3
Antiblocking behaviour

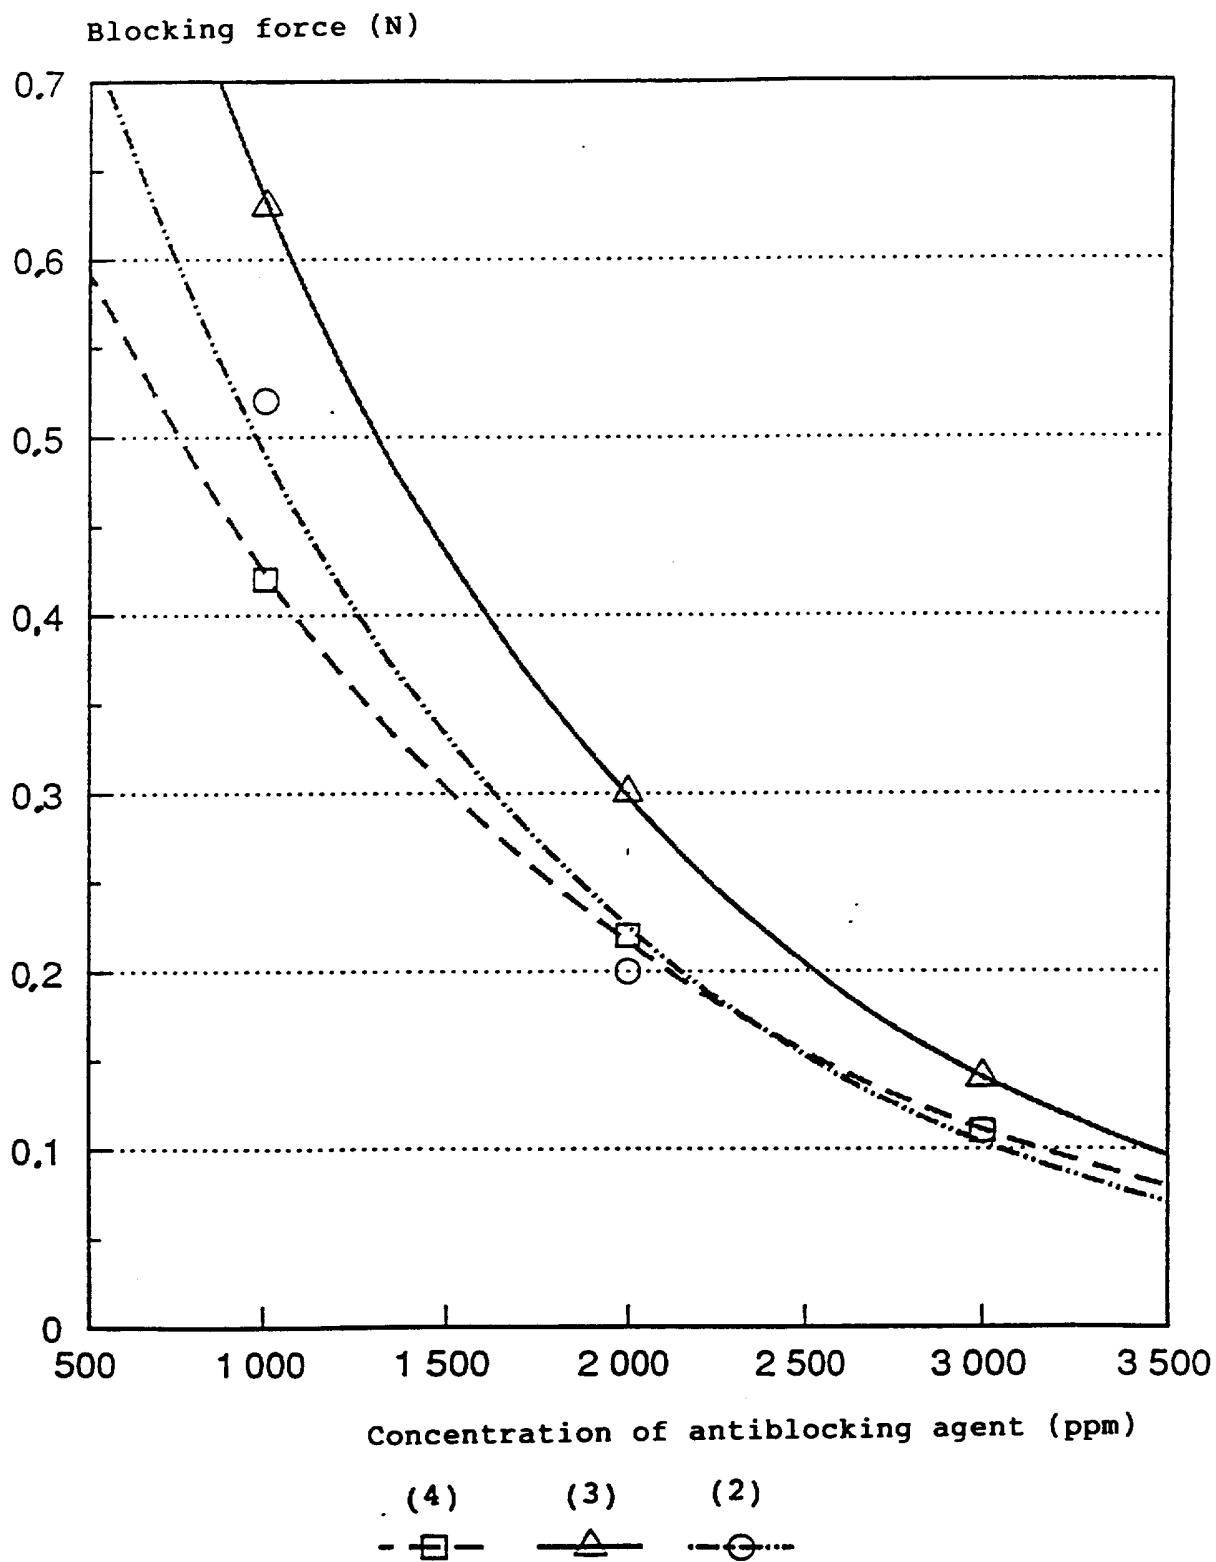

4/7

Figure 4


Clouding

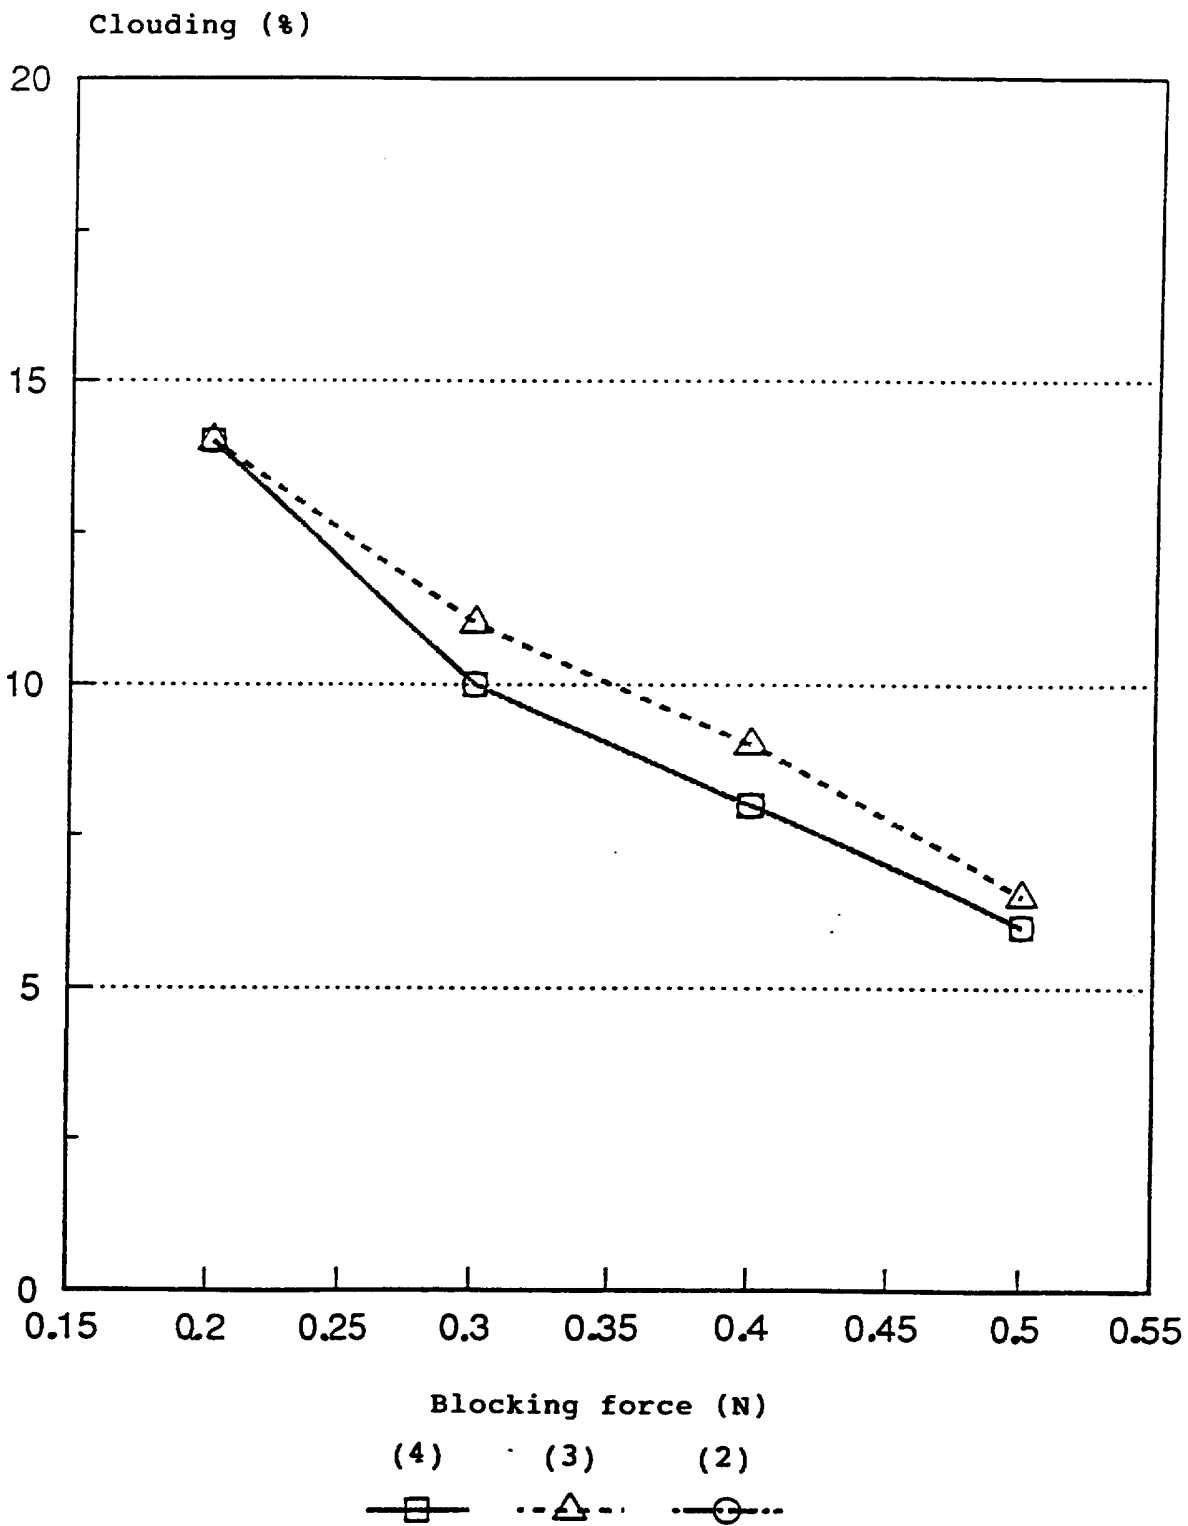

5/7

Figure 5A

Coefficient of friction

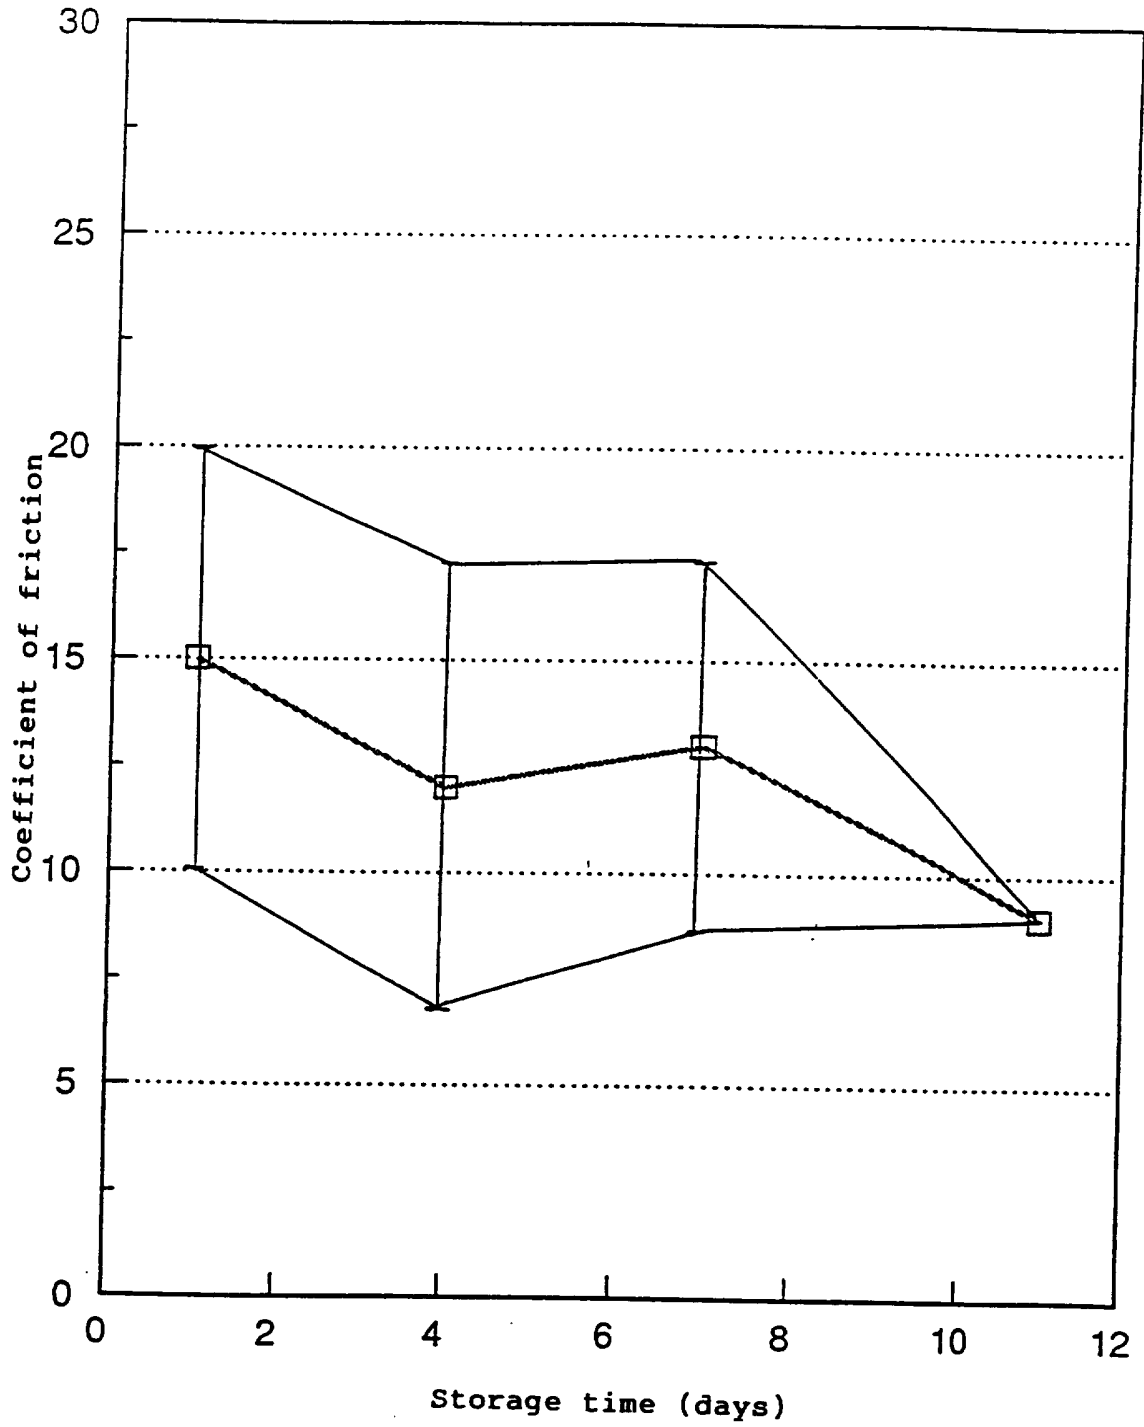


(2)

—□—

6/7

Figure 5B

Coefficient of friction

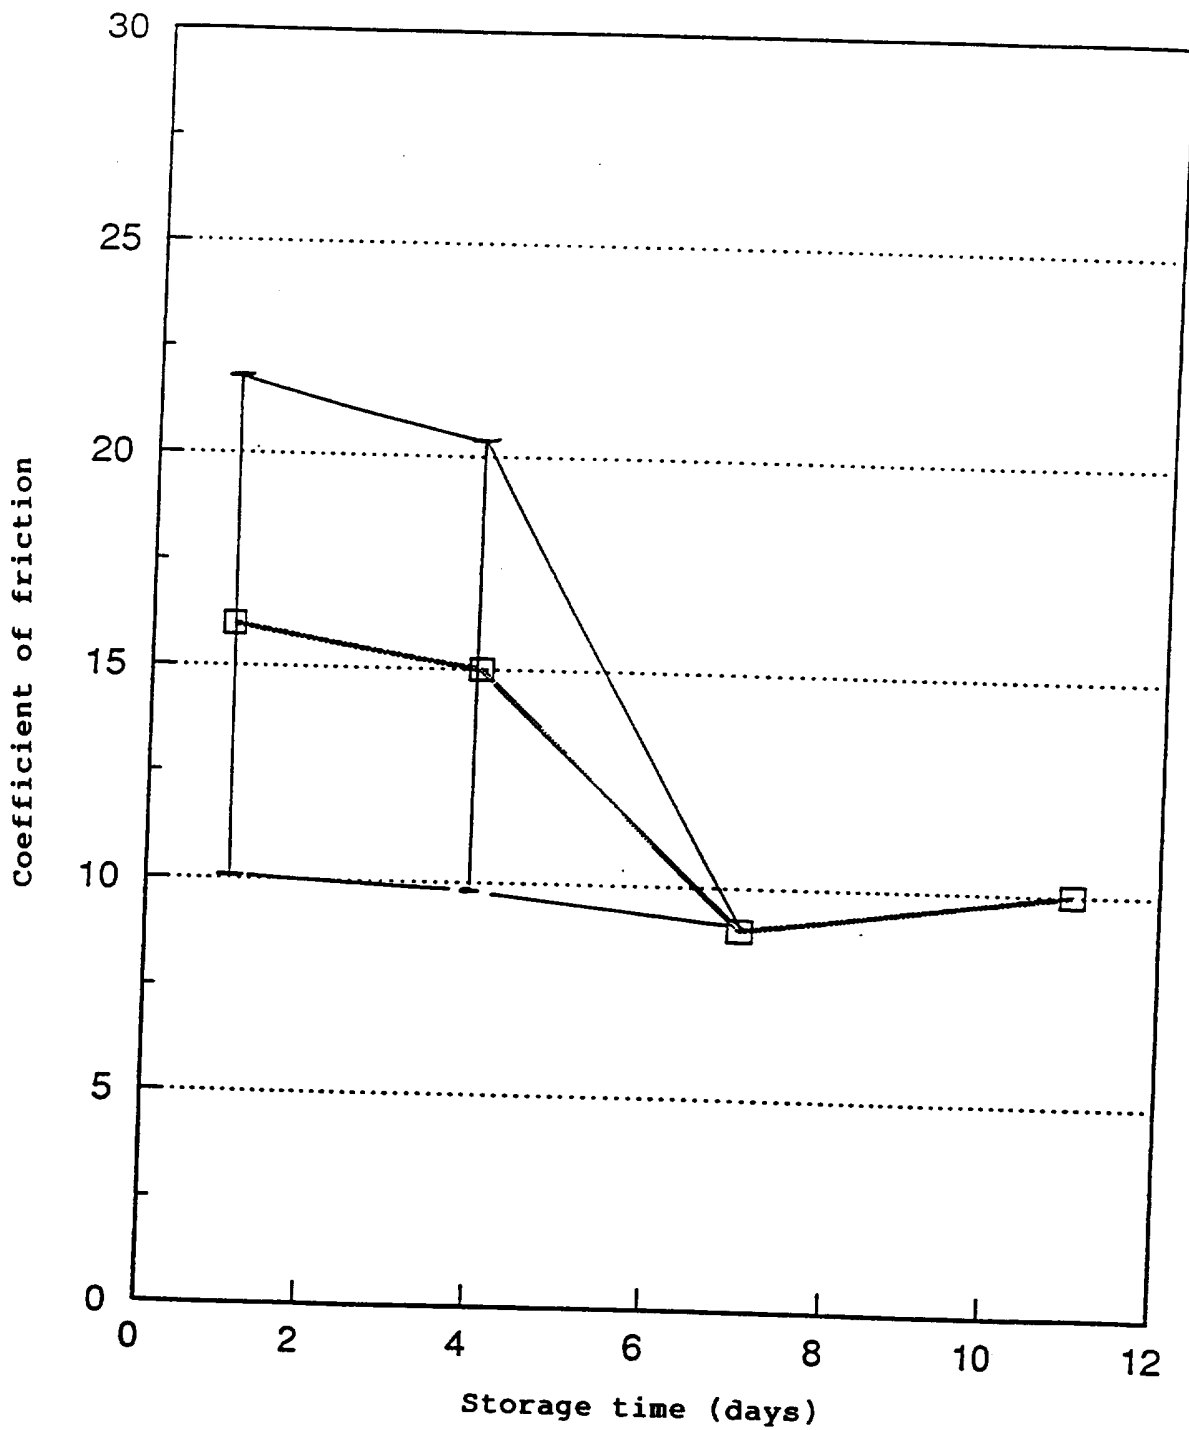


(3)



7/7

Figure 5C

Coefficient of friction

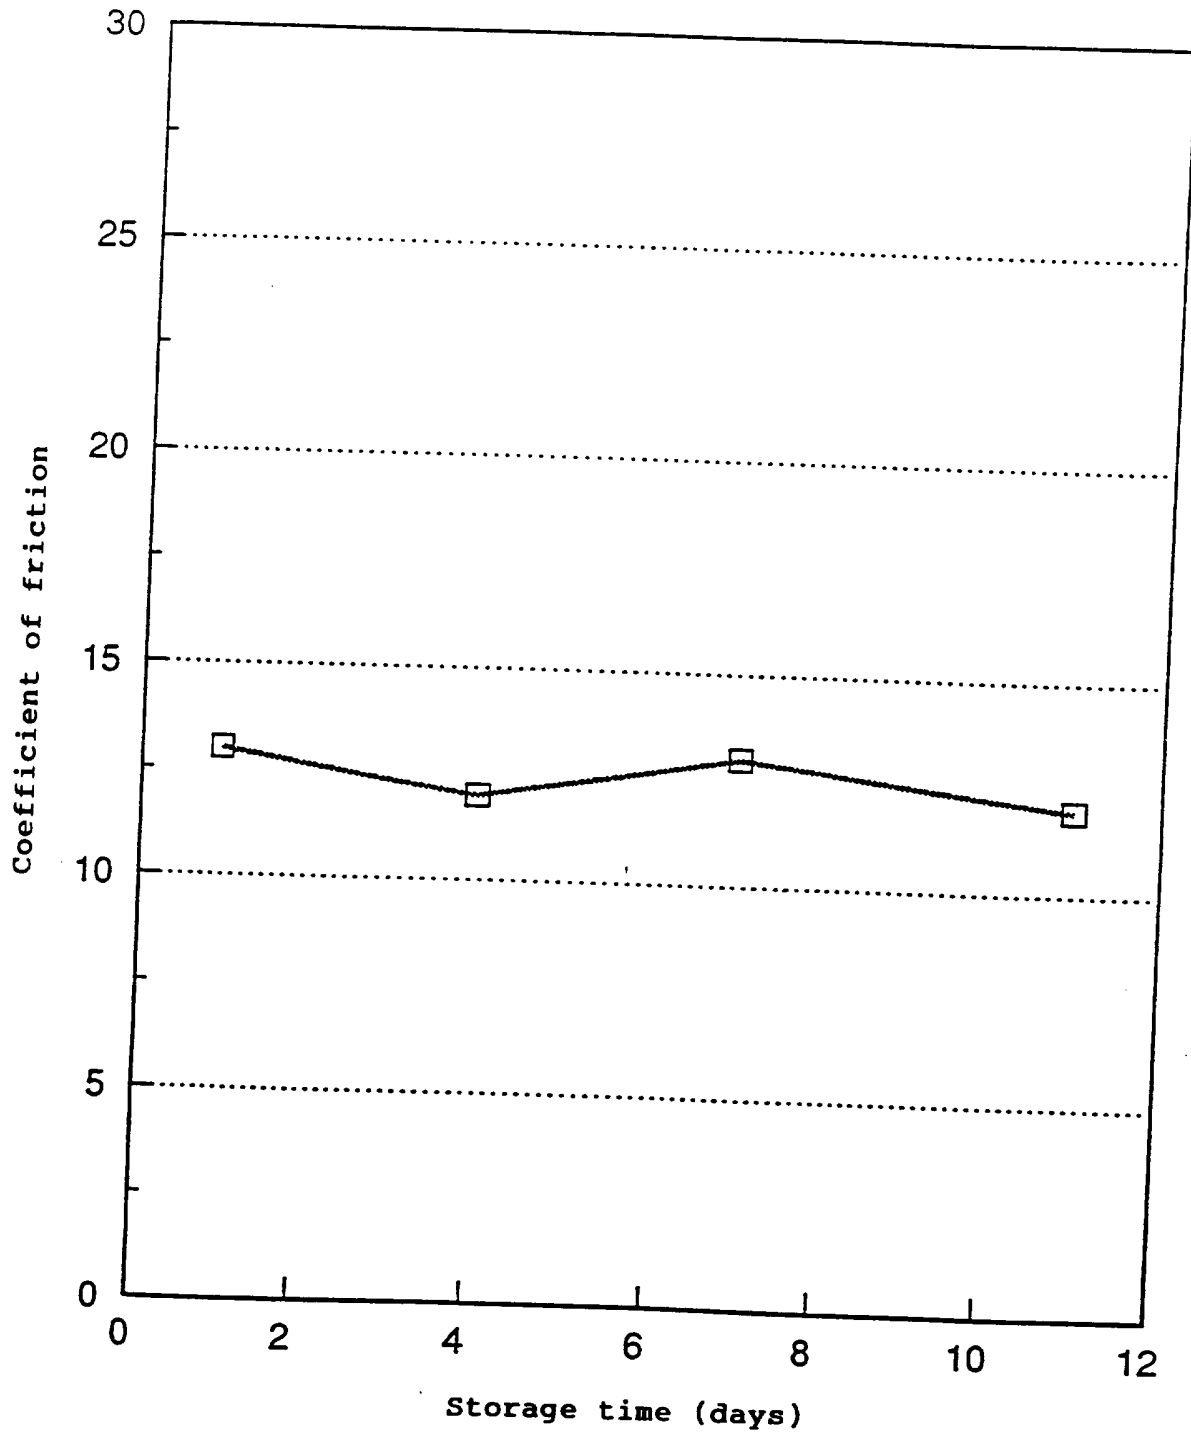

(4)



INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 96/00177

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 C08K9/04 C08K9/08				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) IPC 6 C08K				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	EP,A,0 526 117 (BP CHEM INT LTD) 3 February 1993 see page 5; examples 1,2 see claims 1-4,15 ---	1-17		
X	US,A,4 629 749 (KITCHEL FRANK T ET AL) 16 December 1986 see column 2, line 17 - line 41 see claims 1-5 ---	1-17		
X	DATABASE WPI Derwent Publications Ltd., London, GB; AN 90-104296 XP002001083 & JP,A,02 055 750 (IDEMITSU PETROCHEM KK) , 26 February 1990 see abstract -----	1		
<input type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
* Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search <div style="text-align: center; font-size: 1.2em;">19 April 1996</div>		Date of mailing of the international search report <div style="text-align: center; font-size: 1.2em;">9.05.96</div>		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016		Authorized officer <div style="text-align: center; font-size: 1.2em;">Siemens, T</div>		

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 96/00177

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0526117	03-02-93	NONE	
US-A-4629749	16-12-86	US-A- 4784822	15-11-88