




(86) Date de dépôt PCT/PCT Filing Date: 2015/03/03
 (87) Date publication PCT/PCT Publication Date: 2015/09/11
 (45) Date de délivrance/Issue Date: 2022/05/24
 (85) Entrée phase nationale/National Entry: 2016/08/30
 (86) N° demande PCT/PCT Application No.: EP 2015/000471
 (87) N° publication PCT/PCT Publication No.: 2015/131992
 (30) Priorité/Priority: 2014/03/06 (US61/948,870)

(51) Cl.Int./Int.Cl. *C22C 21/10* (2006.01)
 (72) Inventeurs/Inventors:
 FRANKLIN, JACK, FR;
 JAQUEROD, CHRISTOPHE, CH;
 NIEDZINSKI, MICHAEL, US
 (73) Propriétaires/Owners:
 CONSTELLIUM ROLLED PRODUCTS RAVENSWOOD,
 LLC, US;
 CONSTELLIUM VALAIS SA (AG-LTD), CH
 (74) Agent: NORTON ROSE FULBRIGHT CANADA
 LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : ALLIAGE DE SERIE 7XXX POUR DES APPLICATIONS DE DEFENSE PRESENTANT UNE PERFORMANCE EQUILIBREE DE PERFORATION-FRAGMENTATION DE BLINDAGE
 (54) Title: A 7XXX ALLOY FOR DEFENCE APPLICATIONS WITH A BALANCED ARMOR PIERCING-FRAGMENTATION PERFORMANCE

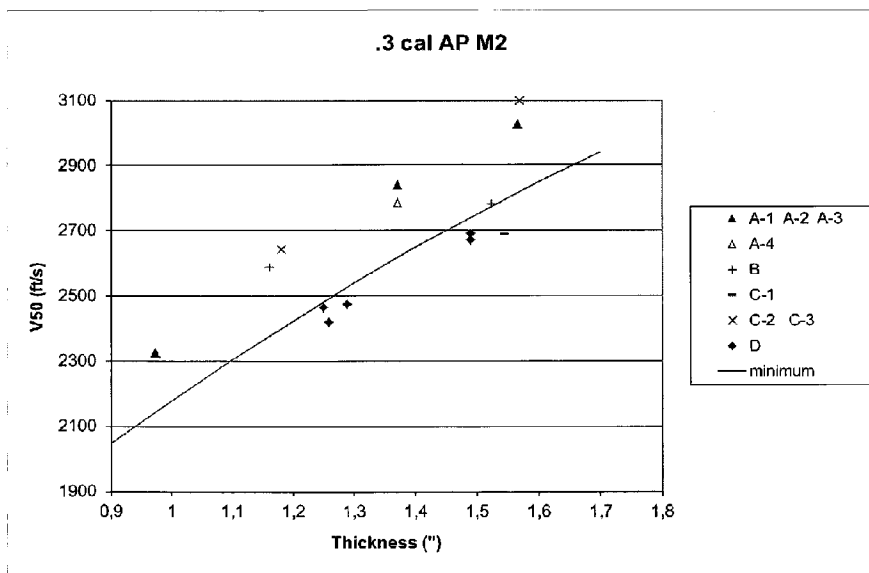

(57) **Abrégé/Abstract:**

An armor component produced from a 7xxx series aluminum alloy, wherein the aluminum alloy consists essentially of: - 8.4 wt.% ≤ Zn ≤ 10.5 wt.%; - 1.3 wt.% ≤ Mg ≤ 2 wt.%; - 1.2 wt.% ≤ Cu ≤ 2 wt.%; - at least one dispersoid forming element with a total dispersoid forming element content higher than 0.05 wt.%; - the remainder substantially aluminum, incidental elements and impurities; wherein the 7XXX alloy is in the form of a plate having a thickness of 0.5 - 3 inches; wherein the 7XXX alloy is over-aged to achieve: (i) a fragment simulated particles V50 ballistic limit such that: V50 (FSP 20mm) > 1633 T² - 1479 T + 1290 where T is the thickness plate (unit: inch) and the unit of V50 is feet/s. (ii) an armor piercing V50 ballistic limit such that: V50 (0.30cal AP M2) > -282 T² + 1850 T + 610 where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2015/131992 A1(43) International Publication Date
11 September 2015 (11.09.2015)(51) International Patent Classification:
C22C 21/10 (2006.01)

(21) International Application Number:

PCT/EP2015/000471

(22) International Filing Date:

3 March 2015 (03.03.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/948,870

6 March 2014 (06.03.2014)

US

(71) Applicants: **CONSTELLIUM ROLLED PRODUCTS RAVENSWOOD, LLC** [US/US]; Route 2 South - Ravenswood, West Virginia 26164 (US). **CONSTELLIUM VALAIS SA (AG - LTD)** [CH/CH]; CH-3960 Sierre (CH).(72) Inventors: **FRANKLIN, Jack**; 4, rue Marceau, F-38000 Grenoble (FR). **JAQUEROD, Christophe**; Impasse desRocailles 2, CH-3976 Noes (CH). **NIEDZINSKI, Michael**; 1 Watergate Drive 60010, South Barrington - Illinois (US).(74) Agent: **BUTRUILLE, Jean-Rémi**; C-TEC Constellium Technology Center, 725 Rue Aristide Bergès, CS 100027, F-38341 Voreppe Cedex (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: A 7XXX ALLOY FOR DEFENCE APPLICATIONS WITH A BALANCED ARMOR PIERCING-FRAGMENTATION PERFORMANCE

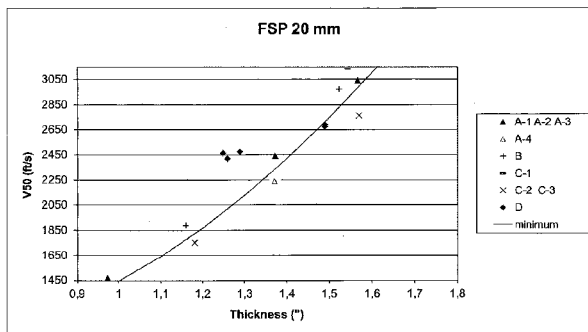


Figure 1a

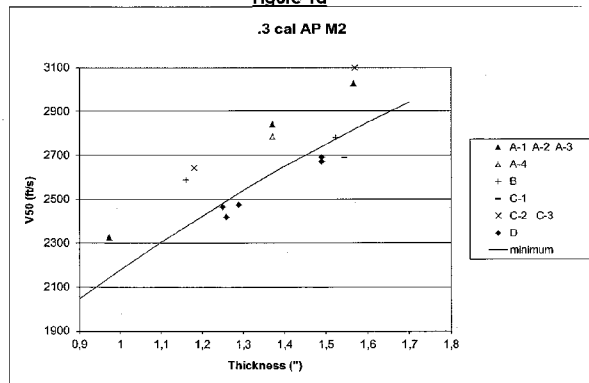


Figure 1b

(57) Abstract: An armor component produced from a 7xxx series aluminum alloy, wherein the aluminum alloy consists essentially of: - 8.4 wt.% \leq Zn \leq 10.5 wt.%; - 1.3 wt.% \leq Mg \leq 2 wt.%; - 1.2 wt.% \leq Cu \leq 2 wt.%; - at least one dispersoid forming element with a total dispersoid forming element content higher than 0.05 wt.%; - the remainder substantially aluminum, incidental elements and impurities; wherein the 7XXX alloy is in the form of a plate having a thickness of 0.5 - 3 inches; wherein the 7XXX alloy is over-aged to achieve: (i) a fragment simulated particles V50 ballistic limit such that: $V50 \text{ (FSP 20mm)} > 1633 T^2 - 1479 T + 1290$ where T is the thickness plate (unit: inch) and the unit of V50 is feet/s. (ii) an armor piercing V50 ballistic limit such that: $V50 \text{ (0.30cal AP M2)} > -282 T^2 + 1850 T + 610$ where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

WO 2015/131992 A1 

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

- 1 -

A 7xxx alloy for defence applications with a balanced armor piercing-
fragmentation performance

[0001] The present disclosure relates to armor components for military vehicles made of
5 high strength aluminum alloys, such as 7xxx series aluminum alloys. It relates more particularly
to armor components used for manufacturing armor hull walls and add-on appliques, which
are removable panels to be mounted on the external faces of the vehicles.

[0002] Generally, an armor shield includes a metal panel, typically of steel, aluminum,
10 titanium or alloys thereof. Such panels generally have an excellent ability to absorb kinetic
energy of a penetrator during impact. However, particularly if they are made of a steel alloy,
such panels are heavy and have a low effectiveness in terms of absorption of energy when
related to the weight carried by a vehicle. Therefore aluminum components made of
aluminum alloys are preferred for such applications.

15 [0003] The armor panel has a face exposed to impacts and shocks and a rear or exit face.
Upon impact on a metallic armor panel, the armor-piercing projectile can be completely
stopped in the panel but the damage to the panel on its rear face can result in the formation of
fragments which are violently ejected from the panel towards the vehicle interior.

20 [0004] Unless otherwise indicated, all the indications relating to the chemical composition of
the alloys are expressed as a mass percentage by weight based on the total weight of the alloy.
The expression 1.4 Cu means that the copper content in weight % is multiplied by 1.4. Alloy
designation is in accordance with the regulations of The Aluminium Association, known of
25 those skilled in the art. The definitions of tempers are laid down in European standard EN
515.

[0005] Unless mentioned otherwise, static mechanical characteristics, in other words the
ultimate tensile strength UTS, the tensile yield stress TYS and the elongation at fracture A, are
30 determined by a tensile test according to standard EN 10002-1, the location at which the
pieces are taken and their direction being defined in standard EN 485-1. Definitions according
to EN 12258-1 apply unless mentioned otherwise.

- 2 -

[0006] To characterize their shield effectiveness, armor panels are generally subjected to two types of tests. The first test, intended to quantify their ability to stop the piercing projectiles, is designated by the letters "AP" ("Armor Piercing") and characterizes the resistance to perforation. The second test is intended to quantify their ability to withstand the impacts which generate fragmented debris. This second type of test is referred to by the abbreviation "FSP" ("Fragment simulated projectiles"). During these tests, the armor panels are the target of projectiles of different shapes and sizes (spindle shape for the AP test, a more squat form for the FSP test). In each test type, several geometries are used in the projectile according to the thickness of the test panel and the nature of the threats that said armor panel is intended to protect. For example, according to U.S. military specification MIL-DTL-46063H, plates made of 7039 alloy and thicker than 1.5 " are submitted to AP tests with 0.5" caliber AP M2 bullets while plates thinner than 1.5 " are submitted to AP tests with 0.3" caliber AP M2 bullets. However, in practice, 0.3" caliber AP M2 bullets are still used for AP tests on plates slightly thicker than 1.5 ".

[0007] For both tests, the ability to stop bullets and absorb their kinetic energy is quantified by a parameter called "V50 ballistic limit" having a speed dimension. V50 is defined for example in MIL-STD-662 (1997) standard: it is the velocity at which the probability of penetration of an armor material is 50 %. It is established by calculating the average of speeds attained by the projectiles on impact resulting from taking the same number of results having the highest speeds corresponding to a partial penetration and results having the lowest speeds corresponding to a complete penetration. A complete penetration occurs when the impacting projectile or any fragment (of the projectile or of the test specimen) perforates a thin witness plate located behind the test specimen.

[0008] For all armor materials, Armor Piercing resistance and Fragment Simulated Particles resistance are antagonist properties: when a material has a high AP resistance, it often has a poor FSP resistance. Conversely, a material with high FSP resistance often has an ordinary AP resistance.

[0009] US Patent No. 8,206,517 discloses an armor component in the form of a plate having a thickness of 1-4 inches made of a 7xxx series aluminum alloy, which contains essentially 7.0-9.5 wt.% Zn, 1.3-1.68 wt.% Mg, 1.2-1.9 wt.% Cu, up to 0.4 wt.% of at least one grain structure

- 3 -

element, the rest being aluminum and incidental elements and impurities. Said 7xxx series aluminum alloy is overaged such that it should comply simultaneously with three conditions relating to yield strength, FSP performance and spall resistance. The chemistry of the 7xxx-series aluminum alloy claimed by US Patent No. 8,206,517 largely overlaps with that of alloy
 5 AA7085. U.S. military specification MIL-DTL-32375 (MR) covers 7085 wrought aluminum alloy armor plate for non-fusion welded applications in nominal thicknesses from 0.500 to 3.000 inch. According to this specification, 7085 alloy should only be used as unweldable appliqué armor.

10 [0010] It is generally difficult to achieve 7XXX alloys that have simultaneously high armor piercing resistance (AP) and fragment simulated particle (FSP) resistance. It is still more difficult to achieve 7XXX alloys that have also an acceptable behaviour after welding and may consequently be also used for manufacturing welded armor hull walls.

15 [0011] A first object of the invention is an armor component produced from a 7xxx series aluminum alloy, wherein the aluminum alloy consists essentially of:

- 8.4 wt.% \leq Zn \leq 10.5 wt.%;

- 1.3 wt.% \leq Mg \leq 2 wt.%;

- 1.2 wt.% \leq Cu \leq 2 wt.%;

20 - at least one dispersoid forming element with a total dispersoid forming element content higher than 0.05 wt.%;

- the remainder substantially aluminum, incidental elements and impurities;

wherein the 7XXX alloy is in the form of a plate having a thickness of about 0.5 to about 3 inches, i.e. about 12.7 to about 76.2 mm;

25 wherein the 7XXX alloy is over-aged to achieve:

(i) a fragment simulated particles V50 ballistic limit such that:

$$V50 \text{ (FSP 20mm)} > 1633 T^2 - 1479 T + 1290$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

(ii) an armor piercing V50 ballistic limit such that:

30
$$V50 \text{ (0.30cal AP M2)} > -282 T^2 + 1850 T + 610$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

[0011a] In accordance with one aspect there is provided an armor component produced from a 7xxx series aluminum alloy, wherein the aluminum alloy consists essentially of:

8.4 wt. % ≤ Zn ≤ 10.5 wt. %

1.75 wt. % ≤ Mg ≤ 2 wt. %,

1.2 wt. % ≤ Cu ≤ 2 wt. %

at least one dispersoid forming element selected from the group consisting of Zr, Sc, V, Hf, Ti, Cr, and Mn, with a total dispersoid forming element content higher than 0.05 wt. %,

wherein if the dispersoid forming element is Zr, the dispersoid forming element content is less than 0.15%,

wherein if the dispersoid forming element is Sc, Cr, Hf, or V, the dispersoid forming element content is less than 0.3%, and

wherein if the dispersoid forming element is Mn, the dispersoid forming element content is at most 0.3%;

the remainder substantially aluminum, incidental elements and impurities;

wherein the 7XXX alloy is in the form of a plate having a thickness of 0.5 to 3 inches;

wherein the 7XXX alloy is aged to achieve:

(i) a fragment simulated particles V50 ballistic limit such that

$$V50(\text{FSP20 mm}) > 1633T^2 - 1479T + 1290$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s;

(ii) an armor piercing V50 ballistic limit such that:

$$V50(0.30\text{cal AP M2}) > -282T^2 + 1850T + 610$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

[0011b] In accordance with another aspect there is provided an armor component according to claim 1, wherein the 7xxx series aluminum alloy consists essentially of:

8.5 wt. % \leq Zn \leq 9.0 wt. %;

1.8 wt. % \leq Mg \leq 2 wt. %,

1.4 wt. % \leq Cu \leq 1.8 wt. %;

Fe $<$ 0.1 wt. %;

Si $<$ 0.1 wt. %;

0.05 wt. % $<$ Zr $<$ 0.15 wt. %; balance aluminum and incidental elements and impurities;

wherein the 7XXX alloy is in the form of a plate having a thickness of about 0.5 to about 3 inches;

wherein the 7XXX alloy is aged to achieve:

(i) a fragment simulated particles V50 ballistic limit such that

$$V50(\text{FSP20 mm}) > 1633T^2 - 1479T + 1350$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s;

(ii) an armor piercing V50 ballistic limit such that:

$$V50(0.30\text{cal AP M2}) > -282T^2 + 1850T + 790$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

- 4 -

[0012] Zinc, magnesium and copper are the major alloying elements of the aluminium alloy of the armor component according to the invention. In comparison with aluminium alloy AA7039, which was developed more than 50 years ago for armor applications, said aluminium alloy comprises copper and has higher Zn content and lower Mg content.

5

[0013] Zinc is the first major alloying element. Combined with Mg and Cu content ranges defined in the frame of the present invention, the highest results obtained simultaneously in AP and FSP ballistics tests, i.e. on samples made from the same cast alloy, were obtained with a Zn content higher or equal to about 8.4 wt.% and lower or equal to about 10.5 wt.%.
10 Preferably, Zn content is from about 8.5 wt.% and about 9.5 wt. %, more preferably from about 8.5 %wt. and about 9.0 wt.%.

[0014] Magnesium has a content significantly lower than zinc content. Advantageously, Mg/Zn ratio is lower or equal to 0.20, where Mg and Zn are weight percentages of magnesium and zinc in the aluminium alloy. Combined with Zn and Cu content ranges
15 defined in the frame of the present invention, the highest results obtained simultaneously in AP and FSP ballistics tests were obtained with a magnesium content lower than about 1.3 wt.% and higher than about 2%. Preferably, magnesium content is from about 1.5 wt.% and about 2 wt. %, more preferably from about 1.8 wt. % and about 2.0 wt.%, i.e. from about 1.75
20 wt.% and about 2.04 wt.%.

[0015] In contrast with AA7039, copper is a further major alloying element. Combined with Zn and Mg content ranges defined in the frame of the present invention, the highest results obtained simultaneously in AP and FSP ballistics tests were obtained with a copper content
25 higher or equal to about 1.2 wt.% and lower or equal to about 2 wt.%. Preferably, Cu content is from about 1.4 wt. % and about 1.8 wt. %. The applicant noted also that simultaneously highest armor piercing resistance (AP) and fragment simulated particle (FSP) resistance values were obtained when copper and magnesium contents (in wt. %) were approximately the same, typically when $0.9 \leq \text{Cu/Mg} \leq 1.1$.

30

[0016] Dispersoid forming elements such as Zr, Sc, V, Hf, Ti, Cr and Mn are added to control the grain structure. The optimum levels of dispersoid forming elements depend on the

- 5 -

processing. Preferably, the dispersoid forming element is essentially zirconium. Preferably, Zr content is less than about 0.15 wt.%, more preferably less than about 0.08 wt.%.

[0017] Another dispersoid forming element can be added, alone or with other dispersoid forming elements. For example, scandium may be added as dispersoid forming element. Its content is preferably lower than about 0.3 wt.%, and more preferably lower than about 0.18 wt.%. When combined with the zirconium, the sum of Sc and Zr is preferably less than about 0.17 wt.%. Chromium, hafnium or vanadium can be added with content lower than about 0.3 wt.%, preferably about 0.15 wt.%. Manganese can be added alone or in combination with one of the other dispersoid forming elements. A preferred maximum for the Mn addition is about 0.30 wt.%.

[0018] The remainder is substantially aluminum, incidental elements and impurities. "Substantially" will be understood to mean that small amounts of other elements may be intentionally added. "Incidental elements and impurities" will be understood to mean elements and impurity inclusions that are not intentionally added to the alloy, but which unavoidably occur in the alloy as a result of manufacturing processes or natural impurities in the individual alloy elements. Fe content is preferably lower than about 0.3 wt.%, more preferably lower than about 0.1 wt.%. Si content is preferably lower than about 0.2 wt.%, more preferably lower than about 0.1 wt.%. Preferably, each other impurity element is present at up to about about 0.05 wt.%, with total impurities content being up to about 0.15 wt.%, based upon the total weight of the alloy taken as 100 wt.%.

[0019] The alloy product according to the invention can be prepared by a conventional melting process and may be cast into ingot form. Grain refiners such as titanium boride or titanium carbide may also be used. After scalping and homogenisation 460°C-520°C between 5-60 hours, the ingot is further hot worked, typically hot rolled in several steps, to obtain a plate with a thickness near the targeted gauge, which is between 0.5 and 3 inches. The product is then preferably solution heat treated 1-5 hours at 460-480°C and quenched to a temperature lower than 95°C. The product can be further processed, for example by stretching, for example up to 2%, typically between 1 and 3 %, and then aged to obtain the combined targeted ballistic properties:

$$V50 \text{ (FSP 20mm)} > 1633 T^2 - 1479 T + 1290 \quad (\text{I})$$

- 6 -

$$V50 (0.30\text{cal AP M2}) > -282 T^2 + 1850 T + 610 \quad (\text{II})$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

[0020] If the units used are from International Unit System, the inequalities to be complied with are:

$$V50 (\text{FSP } 20\text{mm}) > 0.7715 T^2 - 17.75 T + 393 \quad (\text{I}')$$

$$V50 (0.30\text{cal AP M2}) > -0.1331 T^2 + 22.22 T + 186 \quad (\text{II}')$$

where T is the thickness plate (unit: mm), comprised between 23 mm and 41 mm, and the unit of V50 is m/s.

[0021] According to the invention, the 7XXX alloy plate of the armor component has a thickness from about 0.5 and about 3 inches, i.e. about 12.7 to about 76.2 mm. However, ballistic AP and FSP inequalities to be satisfied relate to a narrower thickness range (0.9"-1.5"), because minimum FSP 20 mm and 0.3 cal AP M2 V50 values are required for such thicknesses by the U.S. military standards (see for example MIL-DTL-46063H and MIL-DTL-32375). For this reason, the sentence "the 7xxx alloy is over-aged to achieve ..." followed by particular ballistics properties, which can only be measured when said 7xxx alloy is in the form of a plate having a thickness between 0.9" and 1.5", will be understood to mean that the time-temperature over-aging schedule defined on a 7xxx alloy in the form of a plate having a thickness in said range may also be applied to said 7xxx alloy in the form of plates having a thickness inside the claimed range, which is thinner than 0.9" or thicker than 1.5".

[0022] Whatever aging treatment performed on them, known alloys do not present such an advantageous performance balance: if the ageing treatment was suitable for obtaining high V50 (0.3 cal AP M2) values, satisfying inequality (II), FSP properties are poor, such that V50 (FSP 20mm) does not comply with inequality (I). Similarly, if the ageing treatment was suitable for obtaining high V50 (FSP 20mm) values, satisfying inequality (I), AP properties are poor, such that V50 (0.3 cal AP M2) does not comply with inequality (II).

[0023] Preferably, homogenisation is made at about 493-507 °C at about 20 hours, the ingot is further hot rolled with a first pass at a temperature near 440°C, the rolled product is then solution heat treated for about 2-4 hours at about 470-475°C, and then quenched by immersion in or spraying with cold water or fast cooling and then over-aged in at least two

steps. A typical two-step over-aging treatment is about 4-8 hours at about 110°C-130°C + about 12-20 hours at about 140°C-160°C. A preferred two-step over-aging treatment is about 5-7 hours at about 115-125 °C + about 14-18 hours at about 145°C – 155°C.

- 5 [0024] In another embodiment, the total equivalent time at 150 °C of aging treatment does not exceed 25h, preferably it is from about 5h and about 25h, and more preferably from about 10h and about 20h. The equivalent time $t(\text{eq})$ at 150 °C is defined by the formula :

$$t(\text{eq}) = \frac{\int \exp(-15683 / T) dt}{\exp(-15683 / T_{\text{ref}})}$$

- 10 where T is the instantaneous temperature in Kelvin of treatment which evolves with the time t (in hours) and T_{ref} is a reference temperature selected at 150 °C (423 K). $t(\text{eq})$ is expressed in hours. The constant value of 15683 K is derived from the diffusion activation energy for Mg, $Q = 130400 \text{ J/mol}$. The formula provided $t(\text{eq})$ takes into account the heating and cooling steps.

- 15 [0025] In a preferred embodiment of the invention, the alloy chemistry is:
 $8.5 \text{ wt.\%} \leq \text{Zn} \leq 9.5 \text{ wt.\%}$;
 $1.5 \text{ wt.\%} \leq \text{Mg} \leq 2 \text{ wt.\%}$;
 $1.4 \text{ wt.\%} \leq \text{Cu} \leq 1.8 \text{ wt.\%}$;
 $\text{Fe} < 0.1 \text{ wt.\%}$;
 20 $\text{Si} < 0.1 \text{ wt.\%}$;
 $0.05 \text{ wt.\%} \leq \text{Zr} \leq 0.15 \text{ wt.\%}$; balance aluminum and incidental elements and impurities.

[0026] In some embodiments, the chemistry and manufacturing process make it possible to achieve better V50 ballistics results. For example, FSP ballistics limit are such that:

25 $V50 (\text{FSP } 20\text{mm}) > 1633 T^2 - 1479 T + 1320$ (I-a), or even

$V50 (\text{FSP } 20\text{mm}) > 1633 T^2 - 1479 T + 1350$ (I-b),

while AP ballistics limit still complies with inequality (II).

[0027] In other embodiments, FSP ballistics limit are such that:

30 $V50 (0.30\text{cal AP M2}) > -282 T^2 + 1850 T + 700$ (II-a),

or even $V50 (0.30\text{cal AP M2}) > -282 T^2 + 1850 T + 790$ (II-b)

while FSP ballistics limit still complies with inequality (I).

[0028] In a preferred embodiment, the 7xxx alloy chemistry is:

8.5 wt.% \leq Zn \leq 9.0 wt.%;

1.8 wt.% \leq Mg \leq 2 wt.%,

5 1.4 wt.% \leq Cu \leq 1.8 wt.%;

Fe $<$ 0.1 wt.%;

Si $<$ 0.1 wt.%;

0.05 wt.% \leq Zr \leq 0.15 wt.%; balance aluminum and incidental elements and impurities;

the 7XXX alloy is in the form of a plate having a thickness of 0.5 - 3 inches;

10 the 7XXX alloy is over-aged to achieve:

(i) a fragment simulated particles V50 ballistic limit such that:

$$V50 \text{ (FSP 20mm)} > 1633 T^2 - 1479 T + 1350 \quad \text{(I-b)}$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

(ii) an armor piercing V50 ballistic limit such that:

15
$$V50 \text{ (0.30cal AP M2)} > -282 T^2 + 1850 T + 790 \quad \text{(II-b)}$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

[0029] Moreover, armor plates according to the invention can be welded to manufacture armor hulls. According to § 5.9 of the Ground Combat Vehicle Welding Code 19207 –
 20 12472301, tensile test specimen were machined to measure the post-weld strength of a butt weld, which was obtained by placing 0.5" plates edge to edge and welding them using MIG technology. The butt weld obtained by this way has an ultimate tensile strength higher than 41 ksi, which is at least equal to 45% of the tensile strength before welding. The inventors note that, thanks to an appropriate choice of the filler wire, the butt weld can have a tensile
 25 strength higher than 44 ksi and even higher than 47 ksi. In the latter case, the post-weld ultimate tensile strength is at least equal to 50% of the tensile strength before welding.

[0030] Figure 1a and Fig 1b are graphs illustrating respectively FSP ballistics performance and 0.3 cal AP M2 ballistics performance which may be obtained simultaneously with the armor
 30 plates according to the invention. Black line called "minimum" on Fig 1a and Fig 1b is respectively :

$V50 \text{ (FSP 20 mm)} = 1633 T^2 - 1479 T + 1290$, and

$V50 \text{ (0.30cal AP M2)} = -282 T^2 + 1850 T + 610$

where T is the thickness plate (unit : inch) and the unit of V50 is feet/s.

EXAMPLES

Example 1: AP and FSP properties

5 [0031] Alloy plate products were made from alloys having the following chemical compositions, in weight percent, :

Alloy	Zn	Mg	Cu	Fe	Si	Zr	Ti	Cr	Mn	Cu/Mg
A	9.1	1.8	1.9	0.03	0.01	0.10	0.02	-	0.20*	1.1
B	10.1	1.9	1.6	0.06	0.03	0.12	0.04	-	0.20*	0.8
C	8.3	2.1	2.0	0.07	0.05	-	0.02	0.40*	0.40*	1.0
D	3.9	2.5	0.02	0.09	0.04	0.01	0.03	0.20*	0.25*	0.0

* nominal value

Table 1

10 [0032] Alloys A and B have a chemistry according to the invention. Zinc content of alloy C is lower than the claimed minimum content. Ratio Mg/Zn of alloy C is approximately 0.25, i.e. higher than 0.20. Alloy D belongs to the AA7039-series aluminium alloys.

[0033] Plate products were made using the following process :

- 15
- casting an ingot of an alloy whose composition is indicated in table 1 ;
 - homogenizing the ingot ;
 - hot working the homogenized ingot to arrive at an intermediate gauge ;
 - solution heat treating the plate ;
 - quenching ;

20

 - cold working said plate to arrive at a final gauge ;
 - artificial aging the stretched plate as indicated in table 2.

[0034] Plate products had different thicknesses varying from 0.9" to 1.6" and were tested for their ballistic properties. Two ballistic tests have been carried out pursuant to U.S. military standard MIL-STD-662F (1997), namely the armour piercing test using 0.3 inch (7.62 mm) projectiles and the FSP test using 20 mm fragment simulating projectiles. The results, listed in 25 Table 2, are illustrated in Figures 1.a and 1.b.

- 10 -

[0035] AA7039-series plate products, in particular the thinnest plates (D-3, D-4 and D-5), have quite good FSP ballistic properties while they have poor AP ballistic properties. Thicker plates D-1 and D-2 have both poor AP and FSP ballistic properties.

5 [0036] Results on C alloy plate products show that when FSP performance is high, AP performance is poor (C-1) and when AP performance is high, FSP performance is poor (C-2 and C-3).

10 [0037] Plate products A-1, A-2, A-3, B-1 and B-2 have combined high AP and FSP performances. Sample A-4 has the same thickness as A-1. It was more largely over-aged than A-1. AP ballistic performance of A-4 is a bit lower than A-1. FSP ballistic performance A-4 is more significantly lower than A-1.

Samples	Thickness (inches)	Temper	Equivalent time at 150 °C*	V50 (FSP 20mm) ft/s	V50 (0.3 cal AP M2) ft/s
A-1	1.37	24h@250°F+16h@300°F (24h@121°C+16h@149°C)	16.9	2439	2839
A-2	1.57	24h@250°F+16h@300°F (24h@121°C+16h@149°C)	16.9	3042	3026
A-3	0.97	24h@250°F+16h@300°F (24h@121°C+16h@149°C)	16.9	1471	2325
A-4	1.37	24h@250°F+35h@300°F (24h@121°C+35h@149°C)	34.3	2244	2785
B-1	1.16	7h@250°F+6h@300°F (7h@121°C+6h@149°C)	6.6	1890	2588
B-2	1.52	7h@250°F+12h@350°F (7h@121°C+12h@177°C)	118.8	2972	2781
C-1	1.54	7h@250°F+6h@300°F (7h@121°C+6h@149°C)	6.6	3128	2687
C-2	1.18	T7651		1752	2641
C-3	1.57	T7651		2763	3097

- 11 -

D-1	1.49	T6		2747	2671
D-2	1.49	T6		2751	2691
D-3	1.25	T6		2057	2464
D-4	1.26	T6		1977	2419
D-5	1.29	T6		2082	2474

Table 2

* heating rate 15°C/h

Example 2: Post weld strength

5 [0038] Couples of 0.5 inch thick plate products made of alloy A were butt welded along L direction. Other couples of 0.5 inch thick plate products made of alloy A were butt welded along LT direction. They were welded according to Ground Combat Vehicle Welding Code 19207, using MIG technology, a pulsed welding current and 1.2 mm or 1.6 mm diameter filler wires in AA5356 or in AA4043. Tensile test specimens were machined to measure the post-weld strength of these butt welds. Results of the tensile tests are shown in Table 3: in any case, the post-weld ultimate tensile strength is at least equal to 40.8 ksi (281 MPa), i.e. higher than 45% of the ultimate tensile strength before welding (607 MPa - 88 ksi).

15 [0039] It can be noted that thanks to an appropriate choice of the filler wire, the butt weld has an ultimate tensile strength at least equal to 50% of the tensile strength before welding. It can be also noted that the butt weld has a tensile strength which is higher than 44 ksi (304 MPa), even higher than 47 ksi (324 MPa).

		UTS MPa	TYS MPa
Base metal		607	590
Filler wire: 4043	Ø 1.2	283	222
Filler wire: 4043	Ø 1.6	281	229
Filler wire:5356	Ø 1.2	291	232
Filler wire:5356	Ø 1.6	326	246

Table 3

CLAIMS:

1. An armor component produced from a 7xxx series aluminum alloy, wherein the aluminum alloy consists essentially of:

8.4 wt. % ≤ Zn ≤ 10.5 wt. %

1.75 wt. % ≤ Mg ≤ 2 wt. %,

1.2 wt. % ≤ Cu ≤ 2 wt. %

at least one dispersoid forming element selected from the group consisting of Zr, Sc, V, Hf, Ti, Cr, and Mn, with a total dispersoid forming element content higher than 0.05 wt. %,

wherein if the dispersoid forming element is Zr, the dispersoid forming element content is less than 0.15%,

wherein if the dispersoid forming element is Sc, Cr, Hf, or V, the dispersoid forming element content is less than 0.3%, and

wherein if the dispersoid forming element is Mn, the dispersoid forming element content is at most 0.3%;

the remainder substantially aluminum, incidental elements and impurities;

wherein the 7XXX alloy is in the form of a plate having a thickness of 0.5 to 3 inches;

wherein the 7XXX alloy is aged to achieve:

(i) a fragment simulated particles V50 ballistic limit such that

$$V50(\text{FSP20 mm}) > 1633T^2 - 1479T + 1290$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s;

(ii) an armor piercing V50 ballistic limit such that:

$$V50(0.30\text{cal AP M2}) > -282T^2 + 1850T + 610$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

2. An armor component according to claim 1, wherein $Mg/Zn \leq 0.20$.
3. An armor component according to claim 1, wherein $0.9 \leq Cu/Mg \leq 1.1$.
4. An armor component according to claim 1, wherein the dispersoid forming element is essentially zirconium, whose content is higher than 0.05 wt. % and less than 0.15 wt. %.
5. An armor component according to claim 1, wherein $Fe < 0.1$ wt. % and $Si < 0.1$ wt. %.
6. An armor component according to claim 1, wherein said 7xxx alloy in the form of a plate is manufactured by:
 - a) casting said alloy into ingot form;
 - b) homogenising said ingot;
 - c) hot working said ingot to obtain a plate;
 - d) solution heat treating;
 - e) quenching;
 - f) optionally stretching to obtain a plastic deformation from 1 and 3%;
 - g) aging corresponding to the following treatment: 4-8 hours at 110° C.-130° C.+12-20 hours at 140° C.-160° C.
7. An armor component according to claim 1, wherein said 7xxx alloy in the form of a plate is manufactured by:
 - a) casting said alloy into ingot form;
 - b) homogenising said ingot;
 - c) hot working said ingot to obtain a plate;
 - d) solution heat treating;

- e) quenching;
 - f) optionally stretching to obtain a plastic deformation between 1 and 3%;
 - g) aging, a total equivalent time at 150° C. of aging treatment not exceeding 25 h.
8. An armor component according to claim 1, wherein the 7xxx series aluminum alloy consists essentially of:

8.5 wt. % ≤ Zn ≤ 9.5 wt. %;

1.75 wt. % ≤ Mg ≤ 2 wt. %,

1.4 wt. % ≤ Cu ≤ 1.8 wt. %;

Fe < 0.1 wt. %;

Si < 0.1 wt. %;

0.05 wt. % ≤ Zr ≤ 0.15 wt. %; balance aluminum and incidental elements and impurities.

9. An armor component according to claim 8, wherein 1.8 wt. % ≤ Mg ≤ 2 wt. %.
10. An armor component according to any one of claims 1 to 9, wherein FSP V50 ballistics limit is such that:

$$V50(\text{FSP20 mm}) > 1633T^2 - 1479T + 1320 \quad (\text{I-a})$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

11. An armor component according to any one of claims 1 to 9, wherein FSP V50 ballistics limit is such that:

$$V50(\text{FSP20 mm}) > 1633T^2 - 1479T + 1350 \quad (\text{I-b})$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

12. An armor component according to any one of claims 1 to 9, wherein AP V50 ballistics limit is such that:

$$V50(0.30\text{cal AP M2}) > -282T^2 + 1850T + 700 \quad (\text{II-a})$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

13. An armor component according to any one of claims 1 to 9, wherein AP V50 ballistics limit is such that:

$$V50(0.30\text{cal AP M2}) > -282T^2 + 1850T + 790 \quad (\text{II-b})$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

14. An armor component according to claim 1, wherein said plate is fusion welded and wherein the post-weld ultimate tensile strength is greater than 45%, of the ultimate tensile strength before welding.

15. An armor component according to claim 1, wherein said plate is fusion welded and wherein the post-weld tensile strength is greater than 47 ksi.

16. A method of producing an armour component according to claim 1, comprising:

a) casting said alloy into ingot form;

b) homogenising said ingot;

c) hot working said ingot to obtain a plate;

d) solution heat treating;

e) quenching;

f) optionally stretching to obtain a plastic deformation from 1 and 3%;

g) aging corresponding to the following treatment: 4-8 hours at 110° C.-130° C.+12-20 hours at 140° C.-160° C.

17. A method of producing an armour component according to claim 1, comprising:

a) casting said alloy into ingot form;

- b) homogenising said ingot;
 - c) hot working said ingot to obtain a plate;
 - d) solution heat treating;
 - e) quenching;
 - f) optionally stretching to obtain a plastic deformation between 1 and 3%;
 - g) aging, a total equivalent time at 150° C. of aging treatment not exceeding 25 h.
18. An armor component according to claim 1, wherein said plate is fusion welded and wherein the post-weld ultimate tensile strength is greater than 50% of the ultimate tensile strength before welding.
19. An armor component according to claim 1, wherein said plate is fusion welded and wherein the post-weld tensile strength is greater than 47 ksi.
20. An armor component according to claim 1, wherein the 7xxx series aluminum alloy consists essentially of:
- 8.5 wt. % ≤ Zn ≤ 9.0 wt. %;
 - 1.8 wt. % ≤ Mg ≤ 2 wt. %;
 - 1.4 wt. % ≤ Cu ≤ 1.8 wt. %;
 - Fe < 0.1 wt. %;
 - Si < 0.1 wt. %;
 - 0.05 wt. % < Zr < 0.15 wt. %; balance aluminum and incidental elements and impurities;
- wherein the 7XXX alloy is in the form of a plate having a thickness of about 0.5 to about 3 inches;
- wherein the 7XXX alloy is aged to achieve:

(i) a fragment simulated particles V50 ballistic limit such that

$$V50(\text{FSP20 mm}) > 1633T^2 - 1479T + 1350$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s;

(ii) an armor piercing V50 ballistic limit such that:

$$V50(0.30\text{cal AP M2}) > -282T^2 + 1850T + 790$$

where T is the thickness plate (unit: inch) and the unit of V50 is feet/s.

- 1 / 1 -

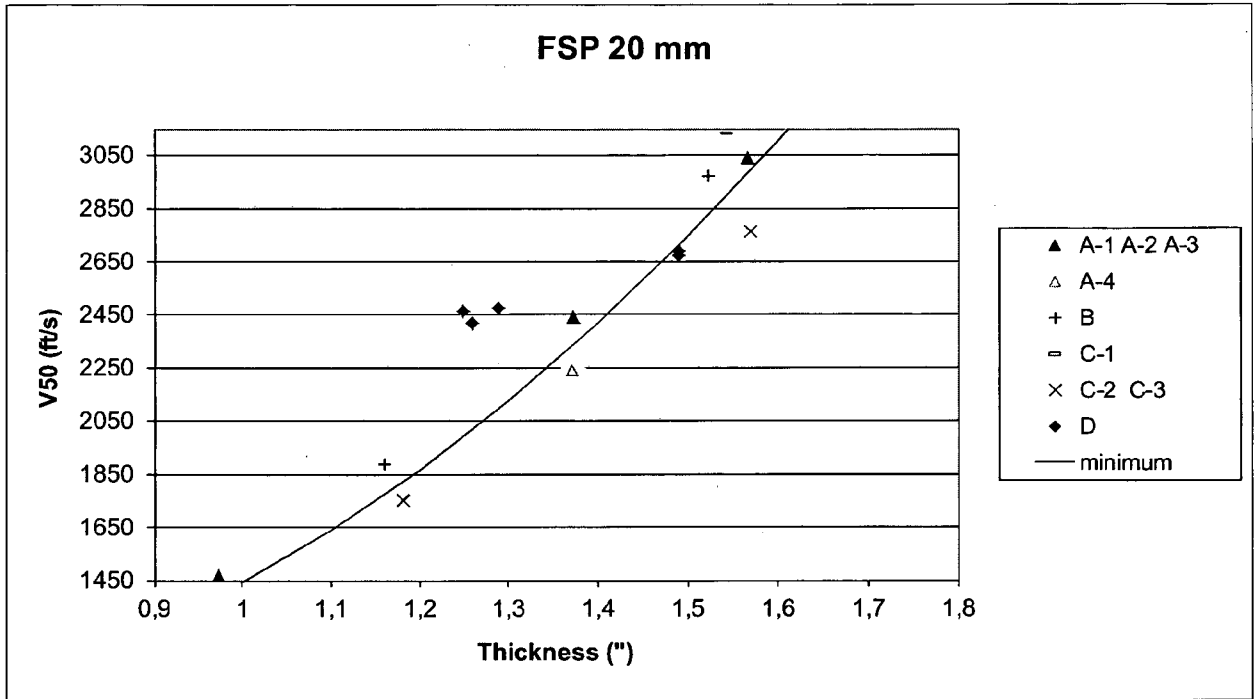


Figure 1a


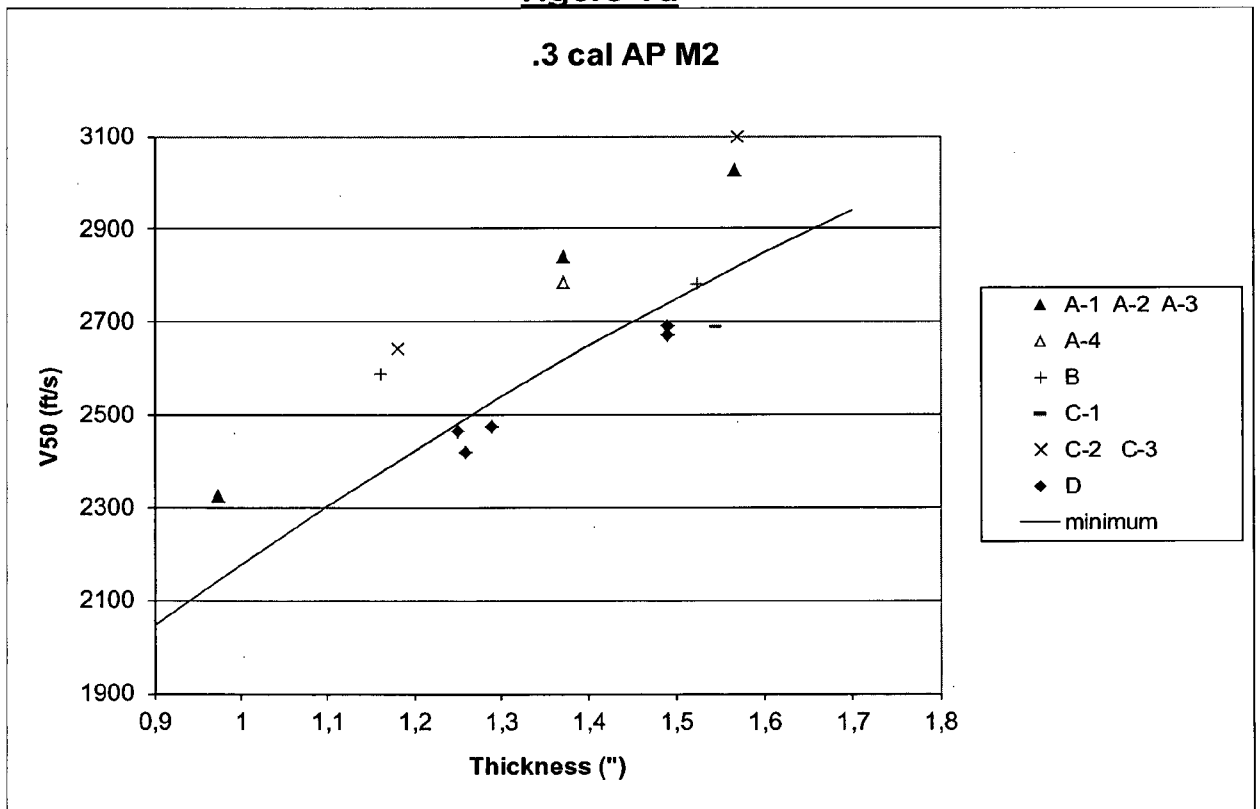


Figure 1b

.3 cal AP M2

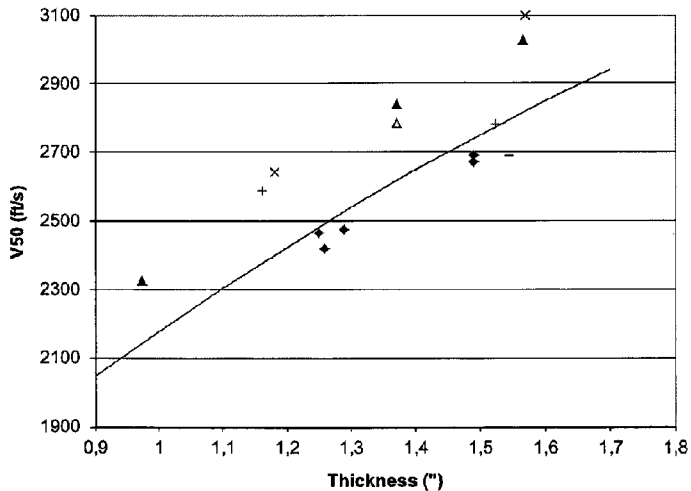

- ▲ A-1 A-2 A-3
- △ A-4
- + B
- C-1
- x C-2 C-3
- ◆ D
- minimum