

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/058915 A1

(51) International Patent Classification⁷: **C09K 19/38**

(21) International Application Number:
PCT/US2003/040239

(22) International Filing Date:
16 December 2003 (16.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/434,263 18 December 2002 (18.12.2002) US

(71) Applicant: **E.I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).

(72) Inventors: **WAGGONER, Marion, Glen**; 204 Buttonwood Road, Landenberg, PA 19350 (US). **SAMUELS, Michael, Robert**; 5116 New Kent Road, Wilmington, DE 19808 (US).

(74) Agent: **JARNHOLM, Arne, R.**; E.I. DU PONT DE NEMOURS AND COMPANY, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, DE 19805 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIQUID CRYSTALLINE POLYMER COMPOSITION

(57) Abstract: Liquid crystalline polymer having repeat units derived from 4,4'-biphenol, terephthalic acid, 2,6-naphthalenedicarboxylic acid, and 4-hydroxybenzoic acid in a limited compositional range have melting points of 400°C or more, and are useful for molded articles and for films, particularly for uses where good high temperature resistance is needed.



WO 2004/058915 A1

TITLE

LIQUID CRYSTALLINE POLYMER COMPOSITION

FIELD OF THE INVENTION

5 A liquid crystalline polymer having repeat units derived from 4,4'-biphenol, terephthalic acid, 2,6-naphthalenedicarboxylic acid, and 4-hydroxybenzoic acid in a selected limited compositional range has excellent high temperature properties.

10 TECHNICAL BACKGROUND

 Liquid crystalline polymers (LCPs) are commercially sold for a variety of uses, and in many cases they have (combinations of) properties that can't be matched by other polymers. Many LCPs have good high
15 temperature properties that are useful, for example from about 250°C to about 320°C. There are other LCPs that have been claimed to be useful at higher temperatures, but these have often had other drawbacks, such as poor processability and/or poor thermal stability at
20 their melt processing and/or use temperatures. Therefore LCPs with improved high temperature properties are of interest. Described herein are such LCPs, which contain repeat units derived from 4,4'-biphenol, terephthalic acid, 2,6-naphthalenedicarboxylic acid, and
25 4-hydroxybenzoic acid in a selected limited compositional range.

 U.S. Patent 4,849,499 describes copolymers containing the repeat units described above. None of the polymers actually made are reported to have melting
30 points above 400°C, and the compositional ranges described herein are not mentioned.


Japanese Patent 7-47624B2 describes polymers with the repeat units derived from 4,4'-biphenol, terephthalic acid, 2,6-naphthalenedicarboxylic acid, and 4-hydroxybenzoic acid. Although the compositional range described in this patent overlaps with the compositional range of this invention, no examples within the range of this invention are reported, and all polymers actually made have a "flow initiation temperature" below 320°C, and are reported to be liquids at 320°C.

Working Example 1 of Japanese Patent Application 8-41187 reports the preparation of an LCP derived from 4,4'-biphenol, terephthalic acid, 2,6-naphthalenedicarboxylic acid, and 4-hydroxybenzoic acid and having a melting point of 387°C. The compositional range of this LCP is outside the compositional range claimed herein.

SUMMARY OF THE INVENTION


This invention concerns a composition, comprising, a liquid crystalline polymer consisting essentially of repeat units of the formula

(a)




(I)


(b)



(c)

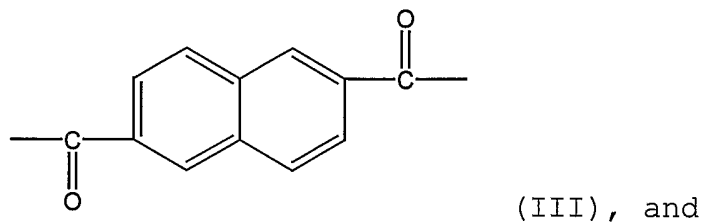

(d)



wherein per 100 molar parts of (I), (II) is 85-98 molar parts, (III) is 2-15 molar parts, and (V) is 100 to 210 molar parts,

provided that:

the molar ratio of (I)/(II)+(III) is about 0.90 to about 1.10;

when (IV) is 175 or more molar parts, (III) is about 2 to 10 molar parts; and

a melting point of said liquid crystalline polymer is 400°C or more.

DETAILS OF THE INVENTION

In these polymers (I) is derived from 4,4'-biphenol, (II) is derived from terephthalic acid, (III) is derived from 2,6-naphthalenedicarboxylic acid, (IV) is derived from 4-hydroxybenzoic acid, or one or more of their respective reactive derivatives.

In a preferred LCP, (II) is about 3 to about 10 molar parts and more preferably 3 to about 8 molar

parts, and/or (III) is about 90 to about 97 molar parts and more preferably about 93 to about 97 molar parts, and/or (IV) is about 100 to about 200 molar parts, more preferably about 100 to about 175 molar parts, and most
5 preferably about 100 to about 160 molar parts. Also, preferably the molar ratio of (I)/(II)+(III) is about 0.95 to about 1.05 and more preferably about 0.98 to about 1.02. Any of these preferred compositional ranges may be combined with any of the other preferred
10 compositional ranges.

The LCP preferably has a melting point of about 410°C or more. The melting point is taken as the peak of the melting endotherm on the second heat when measured by Differential Scanning Calorimetry according to
15 ASTM Method D3418-82, using a heating rate of 25°C/min. By "second heat" is meant the LCP is heated from room temperature at 25°C/min to above the melting point, cooled at 25°C/min to about 200°C, then heated again at 25°C/min to above the melting point. The melting point
20 of the second heat is taken during the second melting of the LCP.

The LCPs can be made by any conventional method of making aromatic polyester LCPs. A typical process for producing such LCPs involves mixing 4,4'-biphenol, terephthalic acid, 2,6-naphthalenedicarboxylic acid, and
25 4-hydroxybenzoic acid with enough of a carboxylic acid anhydride such as acetic anhydride to acylate the hydroxyl groups of the 4,4'-biphenol and 4-hydroxybenzoic acid, and then heating the resulting mixture to remove
30 byproduct carboxylic acid. Alternatively, the desired ester may be formed beforehand and added to the polymerization vessel, and the polymerization run without

addition of carboxylic acid anhydride. The polymerizing mixture is eventually heated to a relatively high temperature, typically in the latter stages under vacuum, to produce the final LCP. This is done while the process mixture is a liquid (in the melt). However if, as in the present case, the melting point of the final desired LCP is very high, it may be difficult to heat the mixture to such a high temperature (above the melting point). In such a situation, before the LCP is fully formed (the molecular weight has reached the desired level) the liquid is cooled and solidified, and broken into small particles. These particles are then heated while in the "solid state" under stream of inert gas such as nitrogen or under a vacuum to raise the molecular weight to the desired level. This latter part of the process is commonly known as solid state polymerization (SSP), see for instance F. Pilati in G. Allen, et al., Ed., Comprehensive Polymer Science, Vol. 5, Pergamon Press, Oxford, 1989, Chapter 13, which is hereby included by reference. For the polymers of the present invention, SSP is a preferred way of raising the molecular weight to the desired level. Also preferably at least part of the SSP process is carried out at a temperature of about 300°C or more and more preferably about 320°C or more.

It is preferred that the LCP compositions of the present invention also comprise 5 to 1000 ppm of an alkali metal cation (as alkali metal cation, not the total of the compound which the alkali metal cation is a part of), particularly when the LCP is prepared using SSP (solid state polymerization). The presence of alkali metal cation often raises the melting point of the

LCP formed and/or (when SSP is used in the polymerization process) the color of the resulting LCP is lighter. Not included within this 5 to 1000 ppm of alkali metal cation are alkali metal cations which are
5 part of fillers or other similar materials, such as glass or mineral fillers, if they are present during the SSP. Typically the alkali metal cation will be added as a monomeric compound to the polymerization. It may be the alkali metal salt of a carboxyl containing monomer, such as disodium terephthalate or potassium 4-hydroxybenzoate. A preferred method of adding the alkali metal cation is as an alkali metal salt of 4-hydroxybenzoic acid, particularly potassium 4-hydroxybenzoate. If a hydroxycarboxylic acid is one of
10 the monomers, an alkali metal salt of that compound is a preferred way of adding the alkali metal cation. Other alkali metal salts may be used, such as lithium acetate. While inorganic salts may be used, they may not be as effective as organic salts such as alkali
15 metal carboxylates.
20

Preferably the alkali metal cation is lithium, sodium or potassium, more preferably potassium cation. The amount of alkali metal cation is based on the amount of alkali metal cation itself, not the compound
25 in which it is added. The amount of alkali metal cation in ppm is based on the total amount of LCP in the process. At least 5 ppm, preferably 10 ppm of the alkali metal cation is present. The maximum amount of alkali metal cation is about 1000 ppm, preferably about
30 100 ppm, and most preferably about 40 ppm. Any maximum and minimum preferred amounts of alkali metal cation

above can be combined to form a preferred range of alkali metal cation.

The LCPs of this invention have melting points of about 400°C or more, making them useful in applications where good thermal resistance to relatively high temperatures are needed. The LCPs are useful as molding resins and for films, and can be melt formed into shaped parts (a part with one or more regular or planned dimensions and/or shapes) in typical melt forming processes such as injection molding, extrusion, and thermoforming.

In the Examples the following abbreviations are used:

AA - acetic anhydride
BP - 4,4'-biphenol
HBA - 4-hydroxybenzoic acid
KHBA - potassium 4-hydroxybenzoate
N - 2,6-naphthalene dicarboxylic acid
T - terephthalic acid
Tm - polymer melting point

Examples 1-4

Monomers and acetic anhydride in the molar proportions are indicated in Table 1, and the amounts by weight used are shown in Table 2. For Examples 1-3, monomers were weighed out into a 3 L resin kettle fitted with a ground glass top and agitator. A Vigreux column was connected to the ground glass top and the top of the column was fitted with a reflux splitter, and condenser. After the reactants were charged, the apparatus was connected as described, a nitrogen gas flush was started, and a liquid metal bath heated to 160°C was raised into position to heat approximately

75% of the lower portion of the kettle. At this time, the reflux splitter was adjusted so that 100% of the condensed vapors were returned to the kettle. The process was operated with agitation and 100% reflux for 30 min. Then, the splitter was partially opened until an estimated 75% of the condensed material was returned to the kettle and 25% was removed to a product receiver. Next, the temperature of the metal bath was raised from 160°C to 330-335°C over a period of approximately 3 h. The pressure was maintained at one atmosphere throughout. After the temperature reached 330-335°C, the pressure was maintained at one atmosphere until the stirring motor reached maximum torque. Then, the nitrogen flush was terminated, the agitator was stopped, and the kettle was opened and the product was removed from the kettle as a solid.

Following isolation of the solid materials, each of the materials was placed in trays in a circulating gas oven for solid state polymerization to final high molecular weight. Nitrogen was used as the gas in order to exclude air from the oven. The temperature of the oven was maintained as follows. Heated as rapidly as possible to 270°C, and held for 1 h. Then heated as rapidly as possible to 310°C and held for 1 h. Finally, heated to a final temperature of 340°C and held for 4 h, followed by cooling to room temperature.

The polymer of Example 4 was prepared in a similar manner except that the reaction vessel was a Hastelloy® metal reactor of approximately 19 L internal capacity and a column with packing of hollow glass cylinders was used instead of the Vigreux column, and the final reactor temperature was 320°C.

The compositions of the polymers and reactants charged to the vessel are given in Tables 1 and 2 in molar parts and in grams, respectively. Melting points of the polymers are given in Table 2.

5

Table 1

Ex.	BP	T	N	HBA	ppm K ⁺
1	100	90	10	200	25
2	100	97	3	150	25
3	100	90	10	100	25
4	100	95	5	175	25

Table 2

Ex.	BP, g	T, g	N, g	HBA, g	AA, g	KHBA, gm	Tm, °C
1	281.9	226.3	32.7	418.1	636.7	0.10	406
2	317.8	275.1	11.1	353.6	628.2	0.10	437
3	358.6	287.9	41.6	266.0	607.4	0.10	425
4	3196	2710	186.1	4150	6745	1.0	421


10

When an LCP of the composition of Example 2 was made without potassium cation being present the melting point was 424°C, and the color of that polymer was darker.


WHAT IS CLAIMED IS:

1. A composition, comprising, a liquid crystalline polymer consisting essentially of repeat units of
 5 the formula

(a)




(b)




10

(c)

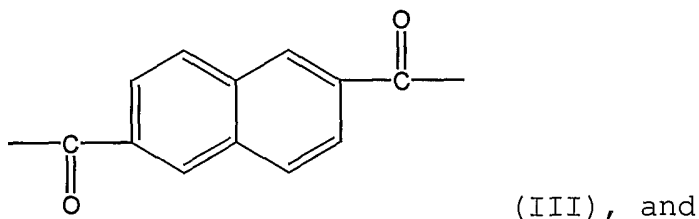

(d)



wherein per 100 molar parts of (I), (II) is 85-98
 15 molar parts, (III) is 2-15 molar parts, and (IV) is 100
 to 210 molar parts,

provided that:

the molar ratio of (I)/((II)+(III)) is about 0.90
 to about 1.10;

20 when (IV) is 175 or more molar parts, (III) is
 2 to 10 molar parts; and

a melting point of said liquid crystalline
 polymer is 400°C or more.

2. The composition as recited in claim 1 wherein 3 to about 10 molar parts of (II) are present.

3. The composition as recited in claim 1 or 2 wherein 90 to 97 molar parts of (III) are present.

5 4. The composition as recited in any one of the preceding claims wherein about 100 to about 175 molar parts of (IV) are present.

5. The composition as recited in claim 1 wherein 3 to about 10 molar parts of (II) are present, 90 to 97
10 molar parts of (III) are present, and about 100 to about 175 molar parts of (IV) are present.

6. The composition as recited in any one of the preceding claims wherein said melting point is about 410°C or more.

15 7. The composition as recited in any one of the preceding claims wherein said molar ratio is about 0.95 to about 1.05.

8. The composition as recited in any one of the preceding claims additionally comprising 5 to about
20 1000 ppm of an alkali metal cation.

9. A shaped part or film of the composition of any one of the preceding claims.

25

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/40239

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C09K19/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 0140, no. 77 (C-0688), 14 February 1990 (1990-02-14) & JP 1 294732 A (MITSUBISHI KASEI CORP), 28 November 1989 (1989-11-28) cited in the application abstract	1-9
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 06, 28 June 1996 (1996-06-28) & JP 8 041187 A (NIPPON PETROCHEM CO LTD), 13 February 1996 (1996-02-13) cited in the application abstract ----- -/--	1-9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

4 June 2004

Date of mailing of the international search report

14/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Serbetsoglou, A

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/US 03/40239

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 849 499 A (FAGERBURG DAVID R ET AL) 18 July 1989 (1989-07-18) cited in the application claims -----	1-9
A	EP 0 490 346 A (E.I. DU PONT DE NEMOURS) 17 June 1992 (1992-06-17) claims -----	1-9
A	US 5 710 237 A (WAGGONER ET AL) 20 January 1998 (1998-01-20) claims; examples; table I -----	1-9
A	US 5 173 562 A (WILSON ET AL) 22 December 1992 (1992-12-22) claims 1-13; examples 1,2 -----	1,9
A	EP 0 410 222 A (SUMITOMO CHEMICAL CO) 30 January 1991 (1991-01-30) page 5, line 20 - line 27; claims 1,2 -----	1,9
A	US 3 637 595 A (COTTIS ET AL) 25 January 1972 (1972-01-25) claims; examples -----	1,9
A	EP 0 366 392 A (POLYPLASTICS CO) 2 May 1990 (1990-05-02) claims; table 1 -----	1
A	BHOWMIK P K ET AL: "FULLY AROMATIC LIQUID CRYSTALLINE HOMOPOLYESTERS AND COPOLYESTERS OF 1,1'-BINAPHTHYL-4,4'-DIOL" JOURNAL OF POLYMER SCIENCE, POLYMER CHEMISTRY EDITION, JOHN WILEY AND SONS. NEW YORK, US, vol. 32, no. 4, 1 March 1994 (1994-03-01), pages 651-659, XP000424271 ISSN: 0360-6376 abstract; tables III,IV -----	1

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/40239

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 1294732	A	28-11-1989	JP 7047624 B	24-05-1995
JP 8041187	A	13-02-1996	JP 3411683 B2	03-06-2003
US 4849499	A	18-07-1989	CA 1321672 C	24-08-1993
			EP 0357207 A2	07-03-1990
			EP 0426730 A1	15-05-1991
			JP 4500081 T	09-01-1992
			WO 9001511 A1	22-02-1990
EP 0490346	A	17-06-1992	US 5110896 A	05-05-1992
			AT 223453 T	15-09-2002
			CA 2057234 A1	11-06-1992
			DE 69133099 D1	10-10-2002
			DE 69133099 T2	30-04-2003
			DK 490346 T3	30-09-2002
			EP 0490346 A1	17-06-1992
			ES 2181666 T3	01-03-2003
			JP 5097983 A	20-04-1993
			MX 9102448 A1	01-06-1992
			SG 46685 A1	20-02-1998
US 5710237	A	20-01-1998	NONE	
US 5173562	A	22-12-1992	JP 5287061 A	02-11-1993
EP 0410222	A	30-01-1991	JP 2830118 B2	02-12-1998
			JP 3056527 A	12-03-1991
			EP 0410222 A2	30-01-1991
			US 5142017 A	25-08-1992
US 3637595	A	25-01-1972	BE 751005 A1	27-11-1970
			CA 919341 A1	16-01-1973
			CH 527861 A	15-09-1972
			DE 2025971 A1	03-12-1970
			FR 2050399 A5	02-04-1971
			GB 1303484 A	17-01-1973
			NO 129301 B	25-03-1974
EP 0366392	A	02-05-1990	JP 2115220 A	27-04-1990
			JP 2117688 C	06-12-1996
			JP 8030111 B	27-03-1996
			CA 2000451 A1	24-04-1990
			EP 0366392 A2	02-05-1990
			KR 9306252 B1	09-07-1993